

DSV-MEM: EVALUATING MULTIMODAL MEMORY IN PROFESSIONAL WORKFLOWS FOR MLLM AGENTS

Jike Zhong^{1,2,*†} Ritwick Chaudhry^{1,*} Xuanbai Chen¹ Tianchen Zhao¹
 Linghan Xu¹ Yifan Xing¹ Nishant Sankaran¹
¹Amazon AGI ²University of Southern California

ABSTRACT

Conversational MLLM agents are increasingly expected to assist in professional workflows: from AI research and engineering design to product management and business operations. Despite this growing need, this capability has not been well explored: existing benchmarks largely focus on informal, everyday interactions and personal-life scenarios that typically feature photographic natural images, isolated, static artifacts, and recall-oriented questions. In contrast, professional scenarios often involve structured, information-heavy artifacts that undergo frequent revisions and authority updates, as well as compositional queries that require reconciling many artifact versions in memory while tracking state precisely. To address these challenges, we introduce **DSV-Mem**, a carefully curated benchmark for evaluating **Dense Stateful Visual Memory**. DSV-Mem comprises a diverse suite of expert-reviewed scenarios and 1,000 questions across five user-oriented categories (Current State, Past State, Derived State, Change History, and Conflict/Refusal). Moreover, a Hartley-inspired criterion is introduced to favor questions with broader visual-evidence inspection demands. To support further study, we introduce a generation harness that produces high-quality, domain-specific evaluation suites by decoupling state-transition synthesis from conversation filling. Rigorous evaluation over 27 configurations spanning frontier, open-weight models and popular memory management methods reveals that even the strongest baseline scores below 45% on DSV-Mem. Comprehensive analysis surfaces several important findings: 1) multimodality and information density both contribute to difficulty, but *state evolution*, particularly the number of governing updates, is the dominant tested factor. Raw conversation/haystack length, OCR and arithmetic are not the primary bottlenecks; 2) models frequently fail to verify user premises against prior state updates before answering; 3) popular interventions such as increased reasoning effort and memory management methods yield limited gains, whereas state-aware designs prove more effective. The benchmark & code will be publicly released.

1 INTRODUCTION

Conversational MLLM agents are increasingly deployed in extended professional workflows beyond isolated everyday tasks (Hu et al., 2025; Xi et al., 2023; Wang et al., 2025). For instance, designers generate and iteratively refine complex campaign graphics, while ML researchers repeatedly analyze evolving tables and plots, and revise paper drafts as experiments progress. Unlike everyday conversations, these scenarios often exhibit distinctive features: **1) information-heavy visuals:** they center on structured, data-heavy artifacts such as dense worksheets, dashboards, or intricate graphic designs rather than ordinary photographic scenes; **2) statefulness:** uploaded artifacts frequently undergo revisions, scope changes, and authority updates; and **3) analytical queries:** users go beyond single-fact questions to compositional ones that compare, aggregate, or derive quantities across visuals and revisions. Meeting these demands requires robust stateful multimodal memory, such as

*Equal contribution.

†Work done during an internship at Amazon AGI.



Figure 1: **Comparison between existing benchmarks and DSV-Mem.** Existing benchmarks (left) pose QAs over casual conversations with sparse, static photos, potentially overestimating real-world reliability (A–E). DSV-Mem addresses these limitations through goal-directed workflows over dense, evolving professional artifacts (right), with QAs requiring authoritative-state tracking across versions (A–E). Matching letters link each point to the illustrated examples on both panels.

precise state tracking that reconciles evidence across many versions, and assessing such capabilities is essential for measuring progress toward reliable professional MLLM agents.

Despite this growing need, existing efforts to evaluate multimodal memory largely focus on informal, everyday interactions and personal-life scenarios, featuring photographic visuals (Maharana et al., 2024; Bei et al., 2026; Ren et al., 2026; Guo et al., 2026), static artifacts (Maharana et al., 2024; Bei et al., 2026; Ren et al., 2026; Huang et al., 2026; Zhu et al., 2026), or recall-oriented questions (Wu et al., 2026; Liu et al., 2026a), rather than the dense visuals, stateful artifacts, and analytical queries that professional workflows demand. Moreover, our careful analysis shows many of them average fewer than three evidence images per question, often one or none (Bei et al., 2026), and may be largely saturated for frontier systems: Gemini-3.7-Flash already exceeds 90% on LoCoMo (Maharana et al., 2024). Most importantly, none of these settings jointly capture the properties and complexity of real-world workflows encountered in practice (Figure 1).

To bridge this gap, we introduce DSV-Mem (**D**ense **S**tateful **V**isual **M**emory), a comprehensive benchmark designed around the core properties above to assess MLLM agent memory in professional workflows. DSV-Mem features realistic scenarios with expert-reviewed dense artifacts, extended and topic-centric conversations with diverse stateful evolutions, and user-oriented categories (Current State, Past State, Derived State, Change History, and Conflict/Refusal) covering diverse real-world requests.

However, curating such a benchmark is highly nontrivial: Without explicit state propagation control, directly prompting an LLM/agent often yields repetitive dialogues with homogeneous or corrupted state transitions. These degraded trajectories in turn produce shallow QAs with incorrect, unverifiable labels. Conversely, manual creation limits controlled modifications, making systematic study of the underlying factors difficult. To this end, we develop a generation harness that produces high-quality conversations requiring only modest curation effort. Our key design principles are 1) the decoupling of state-trajectory construction from surface conversation realization, and 2) a Hartley-inspired criterion for cross-visual QA construction, with 7.78 candidate visual artifacts per QA in DSV-Mem (geometric mean), substantially higher than similar benchmarks (Table 1).

We conduct rigorous evaluation of 27 configurations spanning advanced frontier and open MLLMs and popular memory management methods. DSV-Mem remains hard for all evaluated baselines:

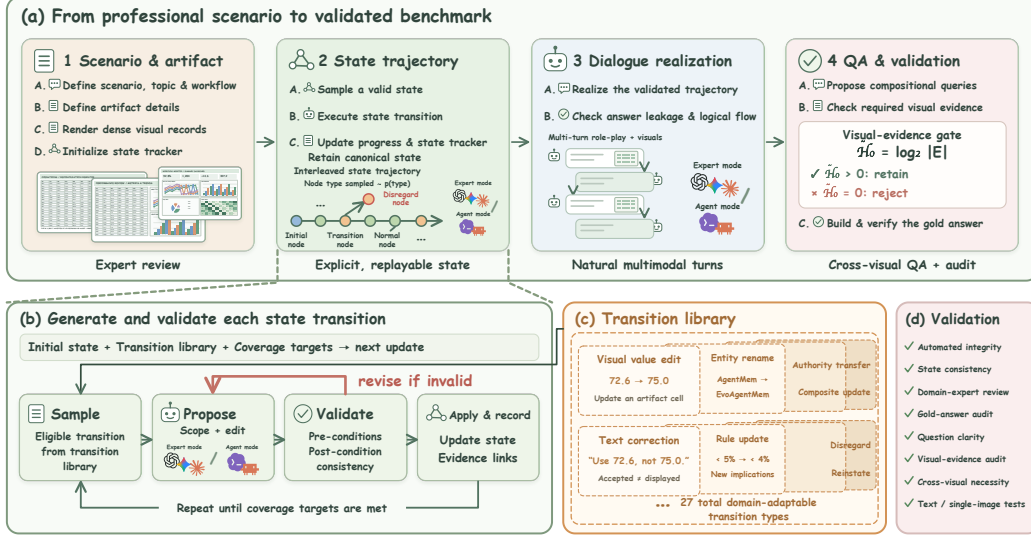


Figure 2: **DSV-Mem benchmark construction pipeline.** (a) Generation separates explicit state-trajectory construction from natural dialogue realization, followed by compositional QA construction with cross-visual evidence requirements. (b) The propose–validate–revise loop constructs transitions while preserving canonical state and evidence links. (c) A reusable library provides 27 domain-adaptable transition types. (d) Extensive automated checks and human audits.

the best-performing baselines among our evaluations, Gemini-3.7-Flash, achieves below 45% with over 80% of the errors concentrated on state reconstruction rather than computation or OCR. Beyond this, a large memory capability gap exists between the best *compact* open-weight systems and frontier MLLMs. Common interventions offer little: increased reasoning effort shows limited gains, and existing memory management solutions or simple supervised fine-tuning (SFT) provide limited gains. Moreover, a controlled ablation shows all three properties matter but statefulness dominates: removing statefulness improves matched-category accuracy by 43.2 pp, versus 12.6 pp for density reduction and 8.2 pp for visual-to-text conversion. Based on these insights, we explore a lightweight state-aware inference-time algorithm that proves effective (+13.6 – 26% overall), yet further improvement may require efforts beyond simple scaffolding or SFT. Our contributions are threefold:

- **A comprehensive benchmark:** We identify the lack of assessment tools for conversational MLLM agents in professional workflows and introduce DSV-Mem, a benchmark built around their defining features: long conversations over dense, stateful artifacts and analytical queries.
- **A generation harness:** We introduce an automated harness that synthesizes coherent, domain-specific workflow dialogues with diverse state updates, requiring minimal post-hoc curation. This paves the way for scalable future study.
- **Evaluations and findings:** We evaluate 27 configurations, conduct in-depth analysis, and share important insights that could inform better design of MLLM conversational agents in the future.

2 RELATED WORK

MLLM memory benchmarks. LoCoMo, LongMemEval, and EverMemBench evaluate conversational recall, temporal reasoning, and knowledge updates, but do not center on reconstructing fine-grained state across revisions of dense visual artifacts (Maharana et al., 2024; Wu et al., 2025; Hu et al., 2026). Mem-Gallery, MemLens, and M³Exam evaluate multimodal histories and heterogeneous evidence, while H2HMem studies human–human interactions; these settings do not focus on cumulative artifact revisions and authority changes within sustained professional workflows (Bei et al., 2026; Ren et al., 2026; Huang et al., 2026; Zhu et al., 2026). LongMemEval-V2 and World-MemArena include dynamic state tracking, but emphasize reusable environment knowledge and

action–world memory, respectively, rather than compositional analysis of dense, repeatedly revised records (Wu et al., 2026; Liu et al., 2026a). MemEye evaluates fine-grained visual evidence and evolutionary synthesis, but emphasizes visual granularity and reasoning depth across life scenarios (Guo et al., 2026). DSV-Mem instead centers on the **interaction between visual density and state evolution**: compositional queries require reconciling field-level updates and source authority across revisions of dense professional artifacts, rather than recalling individual state changes in isolation.

MLLM memory-management methods. Generative Agents and MemoryBank emphasize reflection and personalized recall, while MemGPT and MemoryOS manage hierarchical memory, prioritizing conversational continuity rather than reconstruction of evolving visual records (Park et al., 2023; Zhong et al., 2023; Packer et al., 2024; Kang et al., 2025). LongMem retrieves cached text, HippoRAG links knowledge for multi-hop retrieval, and A-Mem evolves interconnected notes, emphasizing contextual access and semantic organization rather than explicit field-level authority across artifact versions (Wang et al., 2023; Jiménez Gutiérrez et al., 2024; Xu et al., 2025). Mem0 extracts and updates salient facts, while SimpleMem and LightMem compress and consolidate interactions; such compression poses challenges for professional workflows, where minor details may govern later state-dependent queries (Chhikara et al., 2025; Liu et al., 2026b; Fang et al., 2026). MIRIX and MemVerse support multimodal memory, but retaining evidence leaves open how to reconcile successive revisions and source authority (Wang & Chen, 2025; Liu et al., 2026c). DSV-Mem tests these demands: all four evaluated integrations underperform their baselines, highlighting the challenge of **preserving and reconciling dense, state-bearing details**.

3 DSV-MEM

3.1 BENCHMARK OVERVIEW

DSV-Mem comprises 1,000 carefully curated compositional user queries across 10 professional scenarios (subsection C.2), each grounded in a long, coherent conversation with structured, information-heavy artifacts that undergo successive revisions and diverse authority updates. It extensively evaluates whether MLLM agents can **1)** track authoritative multimodal state, **2)** retain and reason over update history and evolution trajectory, and **3)** detect conflicts with maintained state and refuse unsupported requests. On average, each scenario features 212 conversation turns with 24 dense visual artifacts and up to 50k tokens.

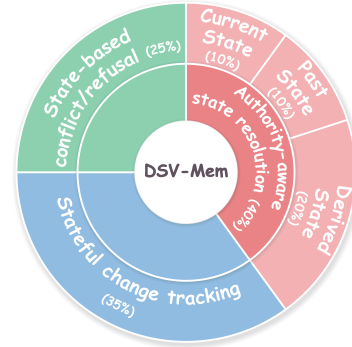


Figure 3: DSV-Mem category breakdown.

Question categories. Questions span five capability axes, grouped into three families (illustrated in Figure 3) that mirror the capabilities mentioned above; counts in parentheses. *Authority-aware state resolution* covers **Current State** (100), identifying the latest authoritative value; **Past State** (100), recovering the state at a specified point in the conversation; and **Derived State** (200), filtering, comparing, or computing over reconstructed state. *Stateful change tracking* consists of **Change History** (350), recovering the sequence or frequency of updates. *State-based conflict/refusal* comprises **Conflict/Refusal** (250), detecting false premises, unresolved conflicts, or insufficient evidence. More details are in subsection C.1.

3.2 BENCHMARK CONSTRUCTION AND VALIDATION

Stateful conversation generation. Rigorous evaluation of dense stateful visual memory requires conversation trajectories that jointly satisfy **three constraints**: (i) domain-faithful dense visual artifacts, (ii) diverse and explicit state transitions with verifiable ground truth, and (iii) coherent long-form interactions. However, directly prompting an LLM to generate complete trajectories often produces repetitive dialogue, poorly motivated shifts in the workflow, and limited transition diversity. More fundamentally, unlike static settings, evolving scenarios require accepted state to be explicitly propagated and validated across all updates to prevent inconsistent evidence and QA labels. To overcome these challenges, we **decouple latent state-trajectory construction from dialogue realization** through a generation harness (Figure 2). Starting from an initial artifact and state, the harness samples eligible operations—such as visual-value edits, textual corrections, and

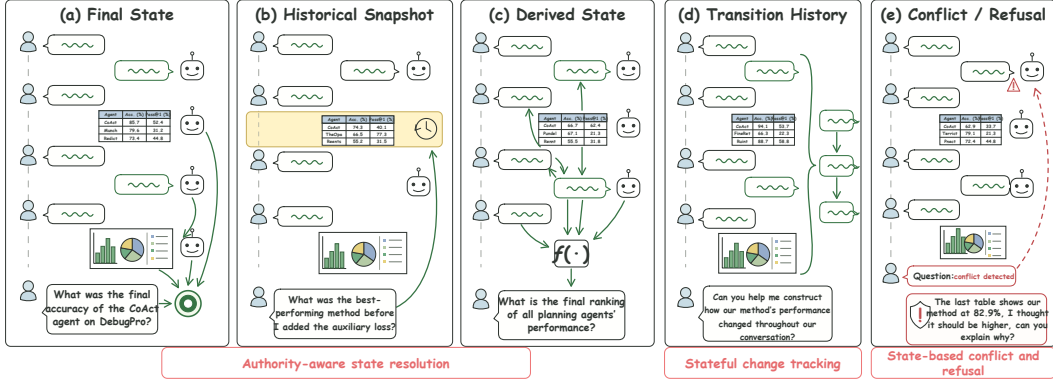


Figure 4: **DSV-Mem question taxonomy: three groups and five categories.** (a–c) **Authority-aware state resolution** recovers current, past, or derived states from multimodal evidence. (d) **Stateful change tracking** reconstructs artifact update histories and trajectories. (e) **State-based conflict and refusal** detects and corrects requests based on inconsistent state premises.

authority changes—from a predefined transition library. Each operation is instantiated against the current state, checked for pre- and post-condition consistency, and recorded with its accepted effects and evidence provenance. Two-model role-play then realizes the validated trajectory as natural dialogue, interleaving updates with ordinary interaction. The resulting dialogue is then checked for coherence, state consistency, and answer leakage. This decoupled design enables controlled, diverse trajectories and coherent dialogue, keeps QAs traceable to validated states, and requires only light post-hoc review. Full details are specified in subsection B.1 and subsection B.2.

QA construction and cross-visual evidence requirements. Stress-testing dense, stateful visual memory requires cross-visual reasoning. However, consistent with Ren et al. (2026), we find that some nominally multimodal memory questions are answerable from *text alone* or a *single visual artifact*. We therefore introduce a Hartley-inspired measure (Hartley, 1928) of required visual-evidence count to enforce **non-trivial cross-visual grounding**. Given a question Q and conversation text T , we conceptually decompose its difficulty as:

$$D(Q) = H(E | Q, T) + \sum_{e \in E} H(\text{payload}_e | e, Q) + C(Q, E),$$

where E is the visual evidence required to answer Q given T . The terms capture **evidence selection**, visual extraction, and subsequent reasoning, respectively. To ensure cross-visual necessity, we construct questions requiring $|E| \geq 2$ (human auditing in subsection C.4). To further increase inspection breadth, we favor questions with higher Hartley-inspired scores (Hartley, 1928), $\tilde{H}_0 = \log_2 \max(1, |\mathcal{C}(Q, T)|)$, where $\mathcal{C}(Q, T)$ is the candidate visual-evidence set. We additionally require a **unique gold answer and minimal sufficient evidence set** given the complete conversation and validated state trajectory. Table 1 reports **7.78 candidate visual occurrences per question** for DSV-Mem (geometric mean), indicating substantial inspection breadth. Evidence annotation, calculation details in subsection C.6.

Table 1: Candidate visual evidence across benchmarks.

Benchmark	Avg. $\tilde{H}_0$	Geometric mean count ($2^{\tilde{H}_0}$)
LoCoMo (visual set)	0.043	1.03
Mem-Gallery	0.889	1.85
MemLens 32K	0.289	1.22
MemEye	1.831	3.56
DSV-Mem	2.960	7.78

Quality assurance and expert validation. To ensure a high quality bar, we conduct three layers of validation: automated checks, independent human auditing, and domain-expert review. Automated checks cover release integrity, accidental answer leakage, duplicate questions, and computational consistency. Three PhD students independently audit a 100-question sample set, with reviewer-averaged gold-answer agreement of **98.3%**, question clarity of **97.7%**, visual-evidence consistency of **98.7%**, and confirmation of cross-visual necessity of **99.0%**. On this sample, Gemini-3.7-Flash achieves only **2%** accuracy without images and **1%** with a single image, versus **93%** when supplied with the supporting evidence, confirming *cross-visual dependence and answerability*. We additionally invite domain experts to review each scenario’s initial artifact and transition trajectory for **pro-**

Table 2: DSV-Mem performance across diverse configurations. Results are the average over three runs with standard deviation; rows marked [†] use a single run. Category avg. is the unweighted mean of the five category accuracies. Best and second-best results within each model group and metric are **bolded** and underlined respectively. *: conducted on a random subset of 100 examples.

Model	Effort	Current State	Past State	Derived State	Change History	Conflict/Refusal	Category Avg.	Total Avg.
Frontier MLLMs								
Gemini 3.7 Flash	Medium	61.7 ± 1.5	46.3 ± 2.1	50.0 ± 1.7	27.8 ± 1.2	36.4 ± 2.5	44.4 ± 0.4	39.6 ± 0.8
Gemini 3.6 Flash	Medium	38.3 ± 1.5	33.7 ± 1.5	25.0 ± 2.6	16.7 ± 1.4	20.0 ± 2.6	26.7 ± 1.1	23.0 ± 1.3
Gemini 3.5 Flash-Lite	Medium	16.0 ± 2.6	11.7 ± 0.6	8.7 ± 1.5	5.1 ± 0.8	7.7 ± 0.5	9.8 ± 0.3	8.2 ± 0.3
Gemini 3.1 Pro Preview	Medium	<u>44.7 ± 1.2</u>	<u>36.7 ± 5.7</u>	<u>29.8 ± 0.8</u>	<u>19.2 ± 2.0</u>	<u>26.8 ± 2.6</u>	<u>31.4 ± 1.3</u>	<u>27.5 ± 0.6</u>
Open-Weight MLLMs								
MiniMax M3	Thinking	21.7 ± 3.5	14.3 ± 5.5	<u>15.2 ± 2.3</u>	7.1 ± 0.8	16.0 ± 1.1	<u>14.9 ± 1.4</u>	<u>13.1 ± 0.7</u>
GLM 4.6V	Thinking	8.3 ± 1.2	6.0 ± 0.0	2.4 ± 0.7	2.8 ± 0.8	2.3 ± 1.2	4.4 ± 0.1	3.4 ± 0.3
Kimi K3	High	34.0 ± 3.5	25.0 ± 2.6	34.3 ± 3.8	24.9 ± 1.5	<u>11.5 ± 0.5</u>	25.9 ± 1.4	24.3 ± 1.2
Kimi K2.5	Thinking	11.7 ± 2.3	10.7 ± 0.6	6.3 ± 0.3	4.2 ± 0.3	3.5 ± 0.2	7.3 ± 0.4	5.8 ± 0.3
Qwen3.5-397B-A17B	Thinking	<u>22.3 ± 2.3</u>	<u>15.3 ± 2.5</u>	14.0 ± 0.9	8.6 ± 1.3	6.8 ± 0.4	13.4 ± 0.6	11.3 ± 0.5
Qwen3.5-27B	Thinking	19.0 ± 4.0	10.3 ± 2.5	13.5 ± 1.8	7.7 ± 0.9	5.2 ± 0.7	11.1 ± 1.4	9.6 ± 0.9
Qwen3.5-9B	Thinking	10.7 ± 1.5	9.0 ± 1.0	5.8 ± 1.3	8.4 ± 0.7	4.7 ± 0.5	7.7 ± 0.5	7.2 ± 0.4
Qwen3.5-4B	Thinking	8.0 ± 2.0	2.0 ± 1.0	3.2 ± 2.5	2.5 ± 0.9	3.1 ± 0.5	3.8 ± 0.7	3.3 ± 0.6
Gemma 4 31B IT	Default	21.3 ± 0.6	10.0 ± 1.7	10.0 ± 0.9	4.9 ± 0.8	6.7 ± 1.0	10.6 ± 0.6	8.5 ± 0.5
Gemma 4 26B-A4B IT	Default	5.0 ± 1.0	6.3 ± 2.5	4.3 ± 1.2	3.4 ± 0.3	2.9 ± 0.8	4.4 ± 1.0	3.9 ± 0.7
Prompt Variants								
Gemini 3.7 Flash Baseline	Medium	61.7 ± 1.5	46.3 ± 2.1	50.0 ± 1.7	27.8 ± 1.2	36.4 ± 2.5	44.4 ± 0.4	39.6 ± 0.8
Gemini 3.7 Flash + CoT Prompt	Medium	68.7 ± 2.5	<u>50.0 ± 4.6</u>	48.0 ± 4.4	30.7 ± 2.8	34.4 ± 1.7	<u>46.3 ± 1.2</u>	<u>40.8 ± 1.4</u>
Gemini 3.7 Flash + Hint Prompt	Medium	<u>67.3 ± 3.5</u>	58.3 ± 2.1	49.0 ± 0.5	28.0 ± 1.6	45.1 ± 1.5	49.5 ± 2.1	43.4 ± 1.2
Gemini 3.7 Flash + QA Wording Variants ×3	Medium	62.3 ± 0.6	46.0 ± 1.0	<u>50.8 ± 0.6</u>	27.3 ± 0.4	<u>37.9 ± 0.6</u>	44.9 ± 0.3	40.0 ± 0.4
Kimi K3 + CoT Prompt [†]	High	66.0	40.0	44.5	29.1	26.0	41.1	36.2
Kimi K3 + Hint Prompt [†]	High	59.0	<u>50.0</u>	53.5	27.7	31.2	44.3	39.1
MLLM Memory Management Methods								
Gemini 3.7 Flash Baseline	Medium	61.7 ± 1.5	46.3 ± 2.1	50.0 ± 1.7	27.8 ± 1.2	36.4 ± 2.5	44.4 ± 0.4	39.6 ± 0.8
Gemini 3.7 Flash + Mem0 [†]	Medium	30.3	15.7	17.3	17.6	14.5	19.1	17.8
Gemini 3.7 Flash + SimpleMem [†]	Medium	35.0	42.7	<u>18.5</u>	<u>24.3</u>	15.4	<u>27.2</u>	<u>23.8</u>
Gemini 3.7 Flash + LightMem [†]	Medium	25.0	21.7	16.5	16.4	18.0	19.5	18.2
Gemini 3.7 Flash + MIRIX [†]	Medium	<u>50.0</u>	17.3	11.5	14.9	15.0	21.7	18.0
Kimi K3 + Mem0 [†]	High	8.0	7.0	12.0	2.6	10.4	8.0	7.4
Kimi K3 + SimpleMem [†]	High	19.0	24.0	16.0	7.7	<u>21.2</u>	17.6	15.5
Kimi K3 + LightMem [†]	High	6.0	5.0	9.5	2.0	6.8	5.9	5.4
Kimi K3 + MIRIX [†]	High	26.0	2.0	11.5	2.0	16.4	11.6	9.9
Human baseline*	Medium	87.0 ± 1.0	88 ± 1.53	80 ± 0.58	75 ± 3.0	88 ± 3.0	83.6 ± 0.93	81.8 ± 1.11

fessional realism, appropriate terminology and units, plausible updates, and correctly propagated consequences. Identified erroneous questions were replaced (fewer than 5% of the benchmark). **Seven complementary validations further assess result robustness** (section 4); more details are presented in subsection C.4 and subsection C.5.

4 EXPERIMENTS AND ANALYSIS

Experimental setup. We evaluate **27 total configurations**: frontier MLLMs (Gemini-3.1-Pro/3.5-Flash-Lite/3.6-Flash/3.7-Flash (Google DeepMind, 2026c;a;b;d)), open-weight MLLMs (MiniMax-M3 (MiniMax, 2026), GLM-4.6V (Z.ai, 2025), Kimi-K3/K2.5 (Kimi Team, 2026b;a), Qwen-3.5 (Qwen Team, 2026), and Gemma-4 (Gemma Team, 2026)), prompt variants (CoT (Wei et al., 2022), state-tracking hints, and question rephrasing), and memory-management methods (Mem0, SimpleMem, LightMem, and MIRIX (Chhikara et al., 2025; Liu et al., 2026b; Fang et al., 2026; Wang & Chen, 2025)). Following prior memory benchmarks (Ren et al., 2026; Bei et al., 2026), we use a **web-style conversational** setting: Each question is evaluated independently as the final user turn, with the full conversation and visible multimodal evidence. Memory-management methods instead receive retrieved memories and question-attached images (subsection D.6). Models use **medium** reasoning effort unless otherwise specified. We use a **two-stage LLM judge-verifier** pipeline (Zheng et al., 2023), with GPT-5.5 as the primary judge. More details are in subsection D.1.

Results validation. We adopt a robust set of validation procedures to validate results. **1) Run stability.** Unless otherwise specified, results are averaged over three independent runs. **2) Prompt robustness.** Three semantically equivalent rewrites of each question change accuracy by less than one percentage point. **3) Two-stage judge verification.** Responses initially judged incorrect receive an additional independent judgment. **4) Human-judge agreement.** Three PhD students independently grade 200 responses, with over 90% agreement with reported labels across 600 individual

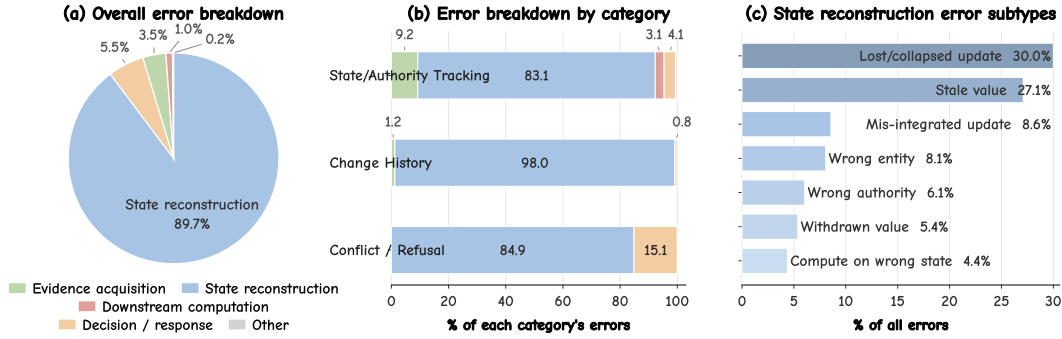


Figure 5: **Error analysis of model failures.** (a) State reconstruction dominates (89.7%), substantially exceeding all other categories. (b) Same pattern holds across question groups; *State/Authority Tracking* combines Current, Past, and Derived State. (c) Subtype breakdown of state reconstruction error. Lost/collapsed updates (30%) and stale values (27.1%) lead, alongside integration, entity, and authority errors, highlighting challenges in preserving updates and tracking value supersession.

judgments. **5) Cross-judge robustness.** GPT-5.5 (reported judge), Claude Opus 4.6, and Gemini 3.1 Pro achieve over 93% agreement. **6) Visual-reading (OCR) control.** Isolated visual-content extraction across conversation depths achieves 98.5% accuracy. More details are in subsection C.5. **7) Error-stage validation.** Three PhD students independently classify 200 failures; human-majority labels agree with automated classifications in 96% of cases (subsection D.3).

4.1 MAIN RESULTS

Table 2 yields six main findings. **1) Dense, stateful visual memory remains challenging for all systems.** All model baselines and variants score below 45% overall, ranging from 3.3% to just 43.4% for Gemini 3.7 Flash with hints, leaving substantial headroom. **2) Models generally track values’ current states better than their update histories/trajectories.** Gemini 3.7 Flash, for example, achieves 61.7% on *Current State* but only 27.8% on *Change History*. **3) Models exhibit dissociated capability profiles.** Qwen3.5-397B-A17B outperforms MiniMax M3 on Current and Past State, yet trails it on Conflict/Refusal by 9.2 pp (6.8% vs. 16.0%). **4) A substantial gap exists between compact open-weight models and frontier proprietary systems.** Qwen3.5-27B, the strongest compact open-weight model evaluated, scores only 9.6% overall versus Gemini 3.7 Flash’s 39.6%. **5) Generic inference-time interventions and memory-management methods yield limited gains.** Compared to the Gemini-3.7-Flash baseline (39.6%), CoT yields only a 1.2-point gain (40.8%), while a targeted hint prompt emphasizing version differences yields a modest 3.8-point gain. More importantly, all tested memory-management methods perform *below* baseline. Most of these methods compress visual histories into textual memories without re-attaching visual images, thus fail to preserve fine-grained details, highlighting DSV-Mem’s unique challenge: **preserving dense, state-bearing details in professional scenarios that ordinary compression loses.** **6) Prompting effects differ across models.** Kimi K3 responds much more strongly to CoT with a 11.9-pp gain vs. 1.2-pp with Gemini.

4.2 ERROR ANALYSIS: WHERE DO MODELS FAIL?

To understand the low performance in Table 2, we next analyze a key question: **where do models fail?** We classify incorrect responses from Gemini-3.7-flash, Kimi-K3, MiniMax-M3, and Qwen3.5-397B-A17B by their earliest failure stage into five categories: **1)** evidence acquisition, retrieving the wrong artifact or misreading visual content; **2)** state reconstruction, incorrectly tracking or reconciling updates; **3)** downstream computation, incorrect arithmetic; **4)** decision/response, missed refusals, hallucinations, or incorrect answers despite correct reasoning; and **5)** other. Figure 5a&b shows that **state reconstruction dominates** at 89.7% of all errors and across all categories; human annotation corroborates this pattern, attributing 85% of sampled failures to state reconstruction (96% agreement with automated labels) (subsection D.3). In contrast, decision/response contributes a modest share (5.5%) while evidence acquisition and downstream computation contribute little (3.5% and 1.0%), suggesting that the main challenge lies in **tracking and maintaining valid**

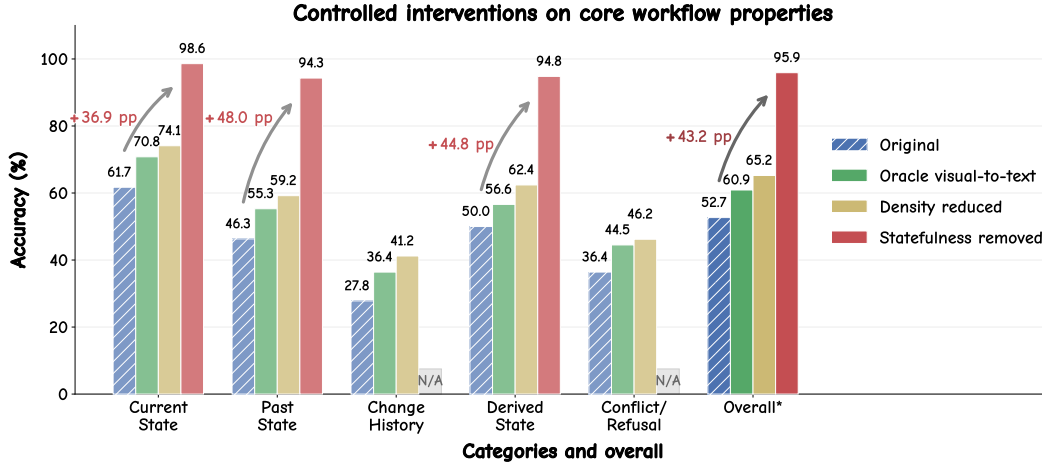


Figure 6: **Controlled interventions on core workflow properties (Gemini 3.7 Flash)**. We vary **1) multimodality**, replacing images with oracle text¹; **2) information density**, retaining only question-relevant information; and **3) state evolution**, removing changes to the targeted field. **All three interventions improve accuracy**, validating these properties as sources of difficulty. Removing statefulness yields the largest gains (+36.9–48.0 pp), highlighting **state evolution as the strongest tested difficulty factor**. Overall* averages Current, Past, and Derived State across all conditions; Change History and Conflict/Refusal are undefined without state evolution. These factors may interact and should **not be interpreted as additive**.

states whereas hallucination, visual understanding, and arithmetics/downstream computation are **not** the primary bottlenecks.

4.3 WHICH WORKFLOW PROPERTIES DRIVE DIFFICULTY?

Having identified state reconstruction as the main memory bottleneck (subsection 4.2), we next investigate a crucial question: **which properties of professional workflows make it difficult**. We hypothesize that such difficulty lies mainly in DSV-Mem’s defining characteristics, namely **multimodality**, **information density**, **evolving visual information** (section 1). However, the main evaluation combines all three in a fixed setting, preventing us from isolating their respective contributions. To address this, we design controlled interventions by varying each factor individually: **1) multimodality** (*oracle visual-to-text*), replacing each visual artifact with a faithful textual rendering; **2) information density** (*density reduced*), retaining only information required for the target question; and **3) state evolution** (*statefulness removed*), removing stateful changes to the targeted field.

Figure 6 shows that **all three properties contribute to difficulty, with state evolution showing the largest effect**. Across the three categories applicable to all interventions, oracle visual-to-text raises mean accuracy from 52.7% to 60.9% (+8.2 pp), while density reduction raises it to 65.2% (+12.6 pp). More significantly, removing statefulness yields a substantially larger gain, reaching 95.9% (+43.2 pp). Besides, oracle visual-to-text and density reduction also improve all five categories. These results not only highlight the individual impact of the properties considered but also validate DSV-Mem’s central motivation: **dense, evolving visual artifacts introduce memory demands that static or isolated-artifact evaluations do not capture**. These factors may interact in real-world workflows and therefore should not be interpreted as *additive*.

4.4 WHAT MAKES STATE EVOLUTION DIFFICULT?

To further dissect **what makes evolving state difficult to maintain**, we specifically examine when state tracking becomes harder and how it fails through four analyses: **1) context length**, adding 0–96K tokens of question-irrelevant content while preserving the governing evidence; **2) update**

¹For dense visual artifacts such as posters, an exact textual rendering is not always possible; we therefore use the closest faithful natural-language approximation.

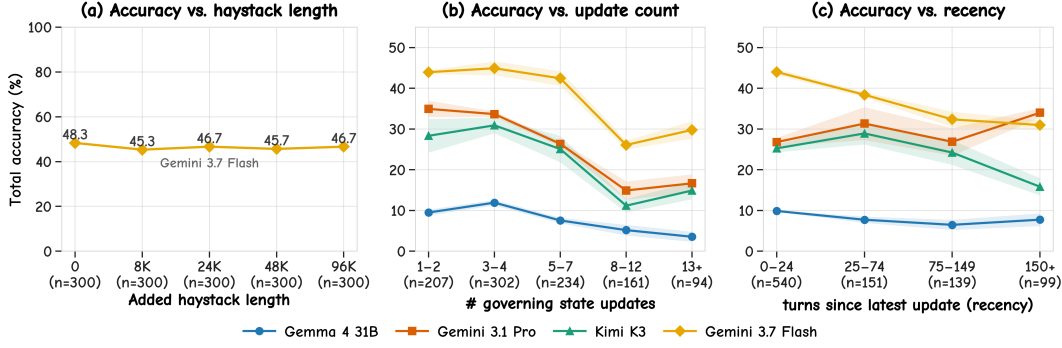


Figure 7: **State-evolution difficulty: context length, update count, and recency.** (a) Accuracy varies *little* across 0–96K added haystack tokens (45.3–48.3%). (b) Accuracy generally declines with more governing state updates across models. (c) Recency effects vary across models. Together, these results suggest that difficulty is more closely associated with **integrating governing updates** than with context length or recency alone.

count, grouping questions by the number of governing state updates; **3) recency**, grouping questions by turns since the latest governing update; and **4) failure subtype**, decomposing state-reconstruction errors by the operation mishandled. Figure 7 reveals an interesting contrast: accuracy generally declines with increasing **update count**, whereas added haystack produces little variation (45.3–48.3%) and recency shows model-dependent behavior. The subtype analysis (Figure 5) further shows that **lost/collapsed updates** (30% of all errors) and **stale values** (27.1%) are the largest failure modes, while other reconstruction errors span update integration, entity tracking, and authority resolution. Together, these results suggest that reliable memory requires a **state-aware approach** that preserves and reconciles accumulating updates across multiple state operations in the memory — which we prototype as a lightweight self-ledger in section 5 below.

5 DISCUSSION: IMPROVING DSV-MEM

Motivated by the preceding analysis, we ask: **can this capability be improved?** **First**, a natural approach is to increase *reasoning effort*, yet gains at higher effort are limited (Figure 8). Critically, we found additional reasoning often elaborates on an incomplete or stale state but fails to recover the overlooked updates needed to correct it. **Second**, exploratory fine-tuning yields limited gains, indicating that this capability is not easily learned under the tested setup (subsection D.4). **Third**, existing memory-management methods also underperform (Table 2) as most compress visual histories into textual summaries which risks discarding precisely the fine-grained, state-bearing details these workflows require. Together with our finding in subsection 4.4 that reliable memory must preserve and reconcile accumulating updates, these observations suggest changing **how state is maintained**. We therefore explore a simple **self-maintained ledger** that *explicitly records updates, retains their provenance, and reconciles their effects* on the accepted state before answering, as shown in Figure 9 and subsection D.7. These gains establish the ledger as a promising starting point for improving memory in professional workflows, while leaving substantial room for improvement.

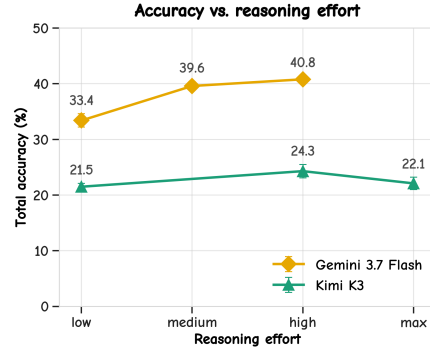


Figure 8: Increasing reasoning effort shows limited effect.

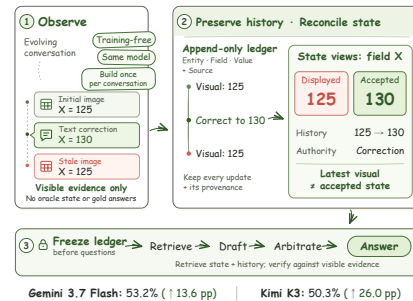


Figure 9: Self-ledger for maintaining evolving state.

6 CONCLUSION

We introduced DSV-Mem, a benchmark and generation harness for evaluating dense stateful visual memory in conversational MLLM agents. Across realistic professional workflows, DSV-Mem shows that strong static visual understanding does not necessarily translate into reliable state maintenance: models often read individual artifacts correctly yet fail to reconcile textual and visual updates, distinguish near-identical revisions, preserve transition history, or reject stale premises. By providing controlled multimodal transitions, validated state graphs, and executable QA, DSV-Mem offers a rigorous testbed for diagnosing these failures and advancing reliable MLLM agents for long-running, evolving professional workflows.

REPRODUCIBILITY STATEMENT

We will publicly release DSV-Mem together with the evaluation code. The transition operator library and generation pipeline are documented in subsection B.1 and subsection B.2; benchmark validation and visual-evidence annotation are detailed in subsection C.4 and subsection C.6; and the experimental setup and evaluation protocol are provided in subsection D.1. Additional implementation details for the evaluated memory-management methods and self-ledger are provided in subsection D.6 and subsection D.7. These materials are intended to support reproduction of both the benchmark construction process and the reported experimental results.

AI USE STATEMENT

The research team defined the benchmark design and supplied the initial artifact concepts, schemas, layouts, and numerical content. Generative AI was used to write Python rendering code, whose outputs were captured as images. Generative AI tools also assisted with harness implementation, state-transition proposals, conversation realization, candidate-question construction, manuscript editing, and figure preparation. Generated benchmark content underwent the automated checks and human reviews described in the paper. We take responsibility for the final content, results, and artifacts.

ETHICS STATEMENT

The benchmark uses researcher-created artifact content and contains no sensitive information. Domain experts reviewed the scenarios for professional realism and validity. To the best of our knowledge, it contains no harmful content, sensitive personal information, or confidential professional or proprietary information.

REFERENCES

- Yuanchen Bei, Tianxin Wei, Xuying Ning, Yanjun Zhao, Zhining Liu, Xiao Lin, Yada Zhu, Hendrik Hamann, Jingrui He, and Hanghang Tong. Mem-Gallery: Benchmarking multimodal long-term conversational memory for MLLM agents, 2026. URL <https://arxiv.org/abs/2601.03515>.
- Prateek Chhikara, Dev Khant, Saket Aryan, Taranjeet Singh, and Deshraj Yadav. Mem0: Building production-ready AI agents with scalable long-term memory, 2025. URL <https://arxiv.org/abs/2504.19413>.
- Jizhan Fang, Xinle Deng, Haoming Xu, Ziyang Jiang, Yuqi Tang, Ziwen Xu, Shumin Deng, Yunzhi Yao, Mengru Wang, Shuofei Qiao, Huajun Chen, and Ningyu Zhang. LightMem: Lightweight and efficient memory-augmented generation. In *International Conference on Learning Representations*, 2026. URL <https://arxiv.org/abs/2510.18866>.
- Gemma Team. Gemma 4 Technical Report, 2026. URL <https://arxiv.org/abs/2607.02770>.
- Google DeepMind. Gemini 3.5 Flash-Lite, July 2026a. URL <https://deepmind.google/models/model-cards/gemini-3-5-flash-lite/>. Model card.
- Google DeepMind. Gemini 3.6 Flash, July 2026b. URL <https://deepmind.google/models/model-cards/gemini-3-6-flash/>. Model card.
- Google DeepMind. Gemini 3.1 Pro Model Card. Technical report, Google DeepMind, 2026c. URL <https://deepmind.google/models/model-cards/gemini-3-1-pro/>.
- Google DeepMind. Gemini 3.7 Flash, August 2026d. URL <https://deepmind.google/models/model-cards/gemini-3-7-flash/>. Model card.
- Minghao Guo, Qingyue Jiao, Zeru Shi, Yihao Quan, Boxuan Zhang, Danrui Li, Liwei Che, Wujiang Xu, Shilong Liu, Zirui Liu, Mubbasir Kapadia, Vladimir Pavlovic, Jiang Liu, Mengdi Wang, Yiyu Shi, Dimitris N. Metaxas, and Ruixiang Tang. MemEye: A visual-centric evaluation framework for multimodal agent memory, 2026. URL <https://arxiv.org/abs/2605.15128>.

- R. V. L. Hartley. Transmission of information. *Bell System Technical Journal*, 7(3):535–563, 1928. doi: 10.1002/j.1538-7305.1928.tb01236.x.
- Chuanrui Hu, Tong Li, Xingze Gao, Hongda Chen, Yi Bai, Dannong Xu, Tianwei Lin, Xiaohong Li, Yunyun Han, Jian Pei, and Yafeng Deng. Evaluating long-horizon memory for multi-party collaborative dialogues, 2026. URL <https://arxiv.org/abs/2602.01313>.
- Xueyu Hu, Tao Xiong, Biao Yi, Zishu Wei, Ruixuan Xiao, Yurun Chen, Jiasheng Ye, Meiling Tao, Xiangxin Zhou, Ziyu Zhao, Yuhuai Li, Shengze Xu, Shenzhi Wang, Xinchun Xu, Shuofei Qiao, Zhaokai Wang, Kun Kuang, Tiejong Zeng, Liang Wang, Jiwei Li, Yuchen Eleanor Jiang, Wangchunshu Zhou, Guoyin Wang, Keting Yin, Zhou Zhao, Hongxia Yang, Fan Wu, Shengyu Zhang, and Fei Wu. OS agents: A survey on MLLM-based agents for computer, phone and browser use. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 7436–7465. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.acl-long.369. URL <https://aclanthology.org/2025.acl-long.369/>.
- Zhengjun Huang, Wenxuan Liu, Zhoujin Tian, Wei Chen, Junle Chen, Yuqian Wu, Fangyuan Zhang, Qintian Guo, and Xiaofang Zhou. M³Exam: Benchmarking multimodal memory for realistic user-agent interactions, 2026. URL <https://arxiv.org/abs/2606.07402>.
- Bernal Jiménez Gutiérrez, Yiheng Shu, Yu Gu, Michihiro Yasunaga, and Yu Su. HippoRAG: Neurobiologically inspired long-term memory for large language models. In *Advances in Neural Information Processing Systems*, volume 37, 2024. URL https://proceedings.neurips.cc/paper_files/paper/2024/hash/6ddc001d07ca4f319af96a3024f6dbd1-Abstract-Conference.html.
- Jiazheng Kang, Mingming Ji, Zhe Zhao, and Ting Bai. Memory OS of AI agent. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 25961–25970. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.emnlp-main.1318. URL <https://aclanthology.org/2025.emnlp-main.1318/>.
- Kimi Team. Kimi K2.5: Visual agentic intelligence, 2026a. URL <https://arxiv.org/abs/2602.02276>.
- Kimi Team. Kimi K3: Open frontier intelligence, 2026b. URL <https://arxiv.org/abs/2607.24653>.
- Chengzhi Liu, Yuzhe Yang, Sophia Xiao Pu, Yepeng Liu, Lin Long, Yichen Guo, Nuo Chen, Zhaotian Weng, Elena Kochkina, Simerjot Kaur, Charese Smiley, Xiaomo Liu, James Zou, Sheng Liu, Yuheng Bu, Songyou Peng, and Xin Eric Wang. WorldMemArena: Evaluating multimodal agent memory through action-world interaction, 2026a. URL <https://arxiv.org/abs/2605.29341>.
- Jiaqi Liu, Yaofeng Su, Peng Xia, Siwei Han, Zeyu Zheng, Cihang Xie, Mingyu Ding, and Huaxiu Yao. SimpleMem: Efficient lifelong memory for LLM agents, 2026b. URL <https://arxiv.org/abs/2601.02553>.
- Junming Liu, Yifei Sun, Weihua Cheng, Haodong Lei, Yirong Chen, Licheng Wen, Xuemeng Yang, Daocheng Fu, Pinlong Cai, Nianchen Deng, Yi Yu, Shuyue Hu, Botian Shi, and Ding Wang. MemVerse: Multimodal memory for lifelong learning agents, 2026c. URL <https://arxiv.org/abs/2512.03627v2>. Version 2.
- Adyasha Maharana, Dong-Ho Lee, Sergey Tulyakov, Mohit Bansal, Francesco Barbieri, and Yuwei Fang. Evaluating very long-term conversational memory of LLM agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 13851–13870. Association for Computational Linguistics, 2024. doi: 10.18653/v1/2024.acl-long.747. URL <https://aclanthology.org/2024.acl-long.747/>.
- MiniMax. MiniMax-M3, 2026. URL <https://huggingface.co/MiniMaxAI/MiniMax-M3>. Official model card.

- Charles Packer, Sarah Wooders, Kevin Lin, Vivian Fang, Shishir G. Patil, Ion Stoica, and Joseph E. Gonzalez. MemGPT: Towards LLMs as operating systems, 2024. URL <https://arxiv.org/abs/2310.08560v2>. Version 2.
- Joon Sung Park, Joseph C. O’Brien, Carrie J. Cai, Meredith Ringel Morris, Percy Liang, and Michael S. Bernstein. Generative agents: Interactive simulacra of human behavior. In *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology*. Association for Computing Machinery, 2023. doi: 10.1145/3586183.3606763. URL <https://arxiv.org/abs/2304.03442>.
- Qwen Team. Qwen3.5: Towards Native Multimodal Agents, 2026. URL <https://qwen.ai/blog?id=qwen3.5>.
- Xiyu Ren, Zhaowei Wang, Yiming Du, Zhongwei Xie, Chi Liu, Xinlin Yang, Haoyue Feng, Wenjun Pan, Tianshi Zheng, Baixuan Xu, Zhengnan Li, Yangqiu Song, Ginny Wong, and Simon See. MemLens: Benchmarking multimodal long-term memory in large vision-language models, 2026. URL <https://arxiv.org/abs/2605.14906>.
- Haoming Wang, Haoyang Zou, Huatong Song, Jiazhan Feng, Junjie Fang, Juntao Lu, Longxiang Liu, Qinyu Luo, Shihao Liang, Shijue Huang, et al. UI-TARS-2 technical report: Advancing GUI agent with multi-turn reinforcement learning. *arXiv preprint arXiv:2509.02544*, 2025. URL <https://arxiv.org/abs/2509.02544>.
- Weizhi Wang, Li Dong, Hao Cheng, Xiaodong Liu, Xifeng Yan, Jianfeng Gao, and Furu Wei. Augmenting language models with long-term memory. In *Advances in Neural Information Processing Systems*, volume 36, 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/ebd82705f44793b6f9ade5a669d0f0bf-Abstract-Conference.html.
- Yu Wang and Xi Chen. MIRIX: Multi-agent memory system for LLM-based agents, 2025. URL <https://arxiv.org/abs/2507.07957>.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed H. Chi, Quoc V. Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Advances in Neural Information Processing Systems*, volume 35, pp. 24824–24837, 2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/hash/9d5609613524ecf4f15af0f7b31abca4-Abstract-Conference.html.
- Di Wu, Hongwei Wang, Wenhao Yu, Yuwei Zhang, Kai-Wei Chang, and Dong Yu. LongMemEval: Benchmarking chat assistants on long-term interactive memory. In *International Conference on Learning Representations*, 2025. URL <https://arxiv.org/abs/2410.10813>.
- Di Wu, Zixiang Ji, Asmi Kawatkar, Bryan Kwan, Jia-Chen Gu, Nanyun Peng, and Kai-Wei Chang. LongMemEval-V2: Evaluating long-term agent memory toward experienced colleagues, 2026. URL <https://arxiv.org/abs/2605.12493>.
- Zhiheng Xi, Wenxiang Chen, Xin Guo, Wei He, Yiwen Ding, Boyang Hong, Ming Zhang, Junzhe Wang, Senjie Jin, Enyu Zhou, et al. The rise and potential of large language model based agents: A survey. *arXiv preprint arXiv:2309.07864*, 2023. URL <https://arxiv.org/abs/2309.07864>.
- Wujiang Xu, Zujie Liang, Kai Mei, Hang Gao, Juntao Tan, and Yongfeng Zhang. A-Mem: Agentic memory for LLM agents. In *Advances in Neural Information Processing Systems*, volume 38, 2025. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/19909c36f51abc4856b4560aff3d36d6-Abstract-Conference.html.
- Z.ai. GLM-4.6V, 2025. URL <https://huggingface.co/zai-org/GLM-4.6V>. Official model card.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena. In *Advances in Neural Information Processing Systems*, volume 36, 2023.

URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/91f18a1287b398d378ef22505bf41832-Abstract-Datasets_and_Benchmarks.html.

Wanjun Zhong, Lianghong Guo, Qiqi Gao, He Ye, and Yanlin Wang. MemoryBank: Enhancing large language models with long-term memory, 2023. URL <https://arxiv.org/abs/2305.10250>.

Shiping Zhu, Yibo Yang, Zhengyang Wang, Tiancheng Shen, Dandan Guo, and Ming-Hsuan Yang. H2HMem: A multimodal memory benchmark for agents in human-human interactions, 2026. URL <https://arxiv.org/abs/2606.09461>.

SUPPLEMENTARY MATERIAL

Table of Contents

A	Limitations	15
B	Additional details for generation harness	16
B.1	Transition Operator Library	16
B.2	Detailed Pipeline Overview	19
B.3	Generation Algorithm	21
C	Additional benchmark details	21
C.1	Question Category Design	21
C.2	Scenarios overview and breakdown	22
C.3	Example Visual Artifacts	23
C.4	Benchmark Validation	24
C.5	Results Validation	24
C.6	Visual-evidence annotation and calculation	25
D	Additional Experimental Results and Analysis	25
D.1	Detailed Experimental Setup	25
D.2	Additional Kimi K3 results	26
D.3	Additional Error Analysis	26
D.4	Additional Fine-Tuning Experiment	27
D.5	Performance across scenarios	28
D.6	Memory-management integrations	28
D.7	Visible-evidence self-ledger	29

A LIMITATIONS

Although we document the generation harness, transition library, and validation procedures, regenerating DSV-Mem may produce different conversations and artifacts due to differences in models, agent implementations, and stochastic generation. The harness constrains state consistency and evidence requirements but does not guarantee identical outputs or difficulty across generation runs. This variability concerns dataset regeneration rather than evaluation on a fixed benchmark release.

DSV-Mem is designed around properties motivated by professional workflows, including dense artifacts, repeated revisions, source-authority changes, and analytical queries. However, it is a researcher-constructed benchmark rather than a direct sample of deployed professional workflows. Its 1,000 questions also provide more limited breadth than very large-scale QA benchmarks; however, each question is grounded in a long, stateful multimodal workflow with many artifact versions and validated state transitions, making individual examples substantially more costly to construct and verify than isolated QA pairs. The current scale supports the controlled analyses reported here, while expanding to more workflows and questions would further strengthen coverage. We therefore do not claim that its scenarios reproduce the full distribution or complexity of real-world use, or that

quantitative findings will transfer unchanged to deployment settings. Rather, DSV-Mem isolates and stress-tests a set of memory demands motivated by such workflows; evaluating transfer to naturally occurring professional interactions remains future work.

The self-ledger explored in section 5 is intended as a lightweight diagnostic prototype motivated by our analysis, rather than a new general-purpose memory architecture. Its role is to test whether explicitly preserving updates, provenance, and accepted state can address part of the observed failure mode. We do not claim that this design is optimal or broadly general, and leave the development of more complete state-aware memory architectures to future work.

B ADDITIONAL DETAILS FOR GENERATION HARNESS

B.1 TRANSITION OPERATOR LIBRARY

DSV-Mem uses 27 domain-adaptable transition operators to represent updates in professional workflows. The library distinguishes *how an update is introduced* from *how it changes the accepted state*: a newly uploaded artifact may change displayed values without superseding an authoritative textual correction, while a textual correction may change the accepted state without changing the artifact. Thus, no single image or conversation turn necessarily contains the complete authoritative state.

State representation and operator semantics. We represent the maintained state as $S = (G, W, A, C)$, where G is the accepted semantic state, W records visual-artifact states and their presentation cues, A records source authority and provenance, and C identifies the relevant workflow context. Semantic state includes entity membership, field values, labels, ordering, groups, statuses, and rules. Entities have stable identity keys, distinct from their human-readable names. The conversation and transition history are recorded separately: an update can have no lasting semantic effect while remaining part of the history.

An instantiated transition $\tau = (\ell, \Omega, \delta)$ specifies an operator type ℓ , a target scope Ω , and a mutation δ . Its execution is a partial map

$$T_\tau : \text{Dom}(T_\tau) \longrightarrow \mathcal{S}, \quad S' = T_\tau(S),$$

where $\text{Dom}(T_\tau)$ contains only states satisfying the operator’s preconditions. Each instance records its parent state, direct changes, dependent changes, and resulting state. Let Ω_τ denote its directly modified state components and $\text{Dep}_S(\Omega_\tau)$ the affected dependent components under the scenario schema. The frame condition is

$$S'(x) = S(x) \quad \text{for all } x \notin \Omega_\tau \cup \text{Dep}_S(\Omega_\tau),$$

excluding newly appended history and provenance records. Direct changes and dependent recomputations are recorded separately; the latter include affected aggregates, rankings, and rule-dependent outcomes.

Source authority. Visual-origin edits are constructed from the preceding visual state, whereas textual edits are constructed from the preceding accepted state. A visual revision therefore does not silently incorporate textual corrections into the rendered artifact. For an ordinary visual cell-content edit at cell c , the accepted value is updated according to

$$G'(c) = \begin{cases} G(c), & \text{if an active text-backed assignment governs } c, \\ W'(c), & \text{otherwise.} \end{cases}$$

Textual updates change G without changing W and establish text-backed authority over their declared scope; later accepted textual updates supersede earlier ones within that scope. Operators 23 and 26 explicitly authorize newly rendered visual values, allowing them to supersede prior text-backed values. Dependent quantities are recomputed from the corresponding updated state rather than copied indiscriminately between W and G . These are scoped execution rules: an upload does not acquire authority over unrelated fields or contexts merely by being newer.

Visual-origin operators (1–11). These operators introduce a visual artifact or modify its contents, structure, or presentation. Task-relevant semantic changes are reconciled with the accepted state under the authority rules above.

1. **Disjoint cell-content modification.** Modify a sparse set of existing cells, with $W'(c) = v'_c \neq W(c)$ for each selected cell. Recompute declared dependencies while preserving other contents and structure. The default budget is one to eight cells; coherent block edits use Operator 2.
2. **Block or global cell-content modification.** Apply a declared transformation h_B to a coherent region B , so that $W'|_B = h_B(W|_B)$. Regions may comprise related rows, fields, time intervals, or the full cell-content domain. The budget is one to three coherent blocks or one declared global transformation.
3. **No-op visual revision.** Introduce a new upload with the same semantic contents as the preceding artifact: $\text{sem}(I') = \text{sem}(I)$. The upload history changes, but task state and meaningful presentation cues do not.
4. **Entity addition.** Add previously absent entities with their required attributes. For the visual entity set $\mathcal{I}_W$, $\mathcal{I}'_W = \mathcal{I}_W \cup \mathcal{I}_+$, where $\mathcal{I}_+ \cap \mathcal{I}_W = \emptyset$. Existing records remain unchanged except for dependent recomputations. One to five entities may be added.
5. **Entity removal.** Remove specified entities: $\mathcal{I}'_W = \mathcal{I}_W \setminus \mathcal{I}_-$. Retained records preserve their direct attributes. The usual budget is one to three entities, extended to five when they share a named block or removal rationale.
6. **Entity rename.** Change an entity's displayed name while preserving its stable identity and substantive attributes. Dependent name references are updated consistently. One to three entities may be renamed; merges and splits are not renames.
7. **Reordering.** Change one ordering over rows, columns, entities, or groups. The new order is a permutation of the same members; their values, identities, and statuses remain unchanged.
8. **Disjoint cell-style modification.** Apply or remove whole-cell bold or italic styling on one to five existing cells. Underlying values and accepted semantic state remain unchanged. Styling persists in the visual-cue registry until explicitly changed; color, layout, and status changes are excluded.
9. **Wrong-scope or wrong-context artifact.** Introduce an internally valid artifact whose context differs from the target context, such as another period, region, environment, or run. Its scoped state is retained separately, without replacing the target-context state or authority assignments.
10. **Status or annotation modification.** Change one to five status markers or annotations sharing a common rationale, such as evidence labels or inclusion marks. Entity membership and underlying direct values are preserved; affected summaries are recomputed.
11. **Unrelated visual.** Introduce an image unrelated to the task. It remains visible in the conversation but changes no task-relevant state. Unlike Operator 9, it does not provide an alternative scoped version of the task artifact.

Text-origin operators (12–22). Operators 12–20 update accepted state through text without immediately modifying the rendered artifact. Operators 21–22 additionally control whether an earlier textual update remains operative.

12. **Disjoint cell-content modification.** Change one to eight sparse accepted-state cells through explicit textual values or exact deltas. Dependencies are recomputed from the updated accepted state.
13. **Block or global cell-content modification.** Apply a shared textual correction to one to three coherent blocks or one declared global region: $G'|_B = h_B(G|_B)$. Unrelated sparse corrections instead use Operator 12.
14. **Entity addition.** Add one to five previously absent entities and their text-specified attributes to the accepted state: $\mathcal{I}'_G = \mathcal{I}_G \cup \mathcal{I}_+$. The current visual artifact remains unchanged.
15. **Entity removal.** Remove specified entities from accepted membership: $\mathcal{I}'_G = \mathcal{I}_G \setminus \mathcal{I}_-$. This is removal, not merely a status change. Retained entities preserve their direct attributes. The budget matches Operator 5.

16. **Entity rename.** Textually change one to three names and their dependent references while preserving stable identities and substantive attributes.
17. **Reordering or priority modification.** Replace one accepted ordering or priority rule over a specified set, without changing its membership or underlying values.
18. **Classification or group reassignment.** Reassign one to five entities to different groups or categories while preserving identity and direct values. Recompute affected group summaries and any declared ordering dependencies.
19. **Status change without removal.** Change the status of one to five entities while retaining them in the accepted entity set. A status change does not implicitly remove an entity or change its eligibility unless the declared rules require it.
20. **Rule, policy, predicate, or threshold modification.** Replace one to three rules and reevaluate their consequences over the declared scope. Base evidence is preserved unless an explicit rule transformation requires otherwise.
21. **Textual update disregarded by later text.** Apply a textual update and subsequently withdraw its accepted effect through a later instruction. The default wrapped operator is sampled from $\{12, 13, 14, 15, 16\}$. The update remains in the history but no longer governs the affected state.
22. **Textual update disregarded and reinstated.** Apply an update from the same pool, disregard it, and later reinstate its original effect. Reinstatement restores the recorded update rather than generating a new mutation or applying a numerical delta twice.

Visual-textual operators (23–26). These operators combine visual evidence with textual instructions that determine its accepted effect.

23. **Disjoint visual cell-content authority declared by text.** Introduce a same-turn visual edit to one to eight sparse cells and explicitly authorize those cells through text. For the declared set B , $G'(c) = W'(c)$ for $c \in B$, even when prior text-backed assignments exist. Each selected visual value must change, and its newly accepted value must differ from its preceding accepted value. Authority outside B is preserved; dependent values are recomputed as required.
24. **Visual update disregarded by text.** Introduce a visual update and subsequently reject its operative effect through text. The default wrapped operator is sampled from $\{1, 2, 4, 5, 6\}$. The rejected update remains in the conversation but does not govern the restored target state.
25. **Visual update disregarded and reinstated by text.** Introduce an update from the same visual pool, disregard it, and later reinstate the recorded update. Its authority and semantic effect are restored consistently, without duplicating its mutation.
26. **Block visual cell-content authority declared by text.** Apply the authority mechanism of Operator 23 to one to three coherent blocks or one declared global cell-content region. The block is explicitly expanded into its constituent cells; only that scope receives renewed authority.

Disregard and reinstatement semantics. Operators 21, 22, 24, and 25 are lifecycle wrappers rather than independent value mutations. Let S_0 precede the wrapped update τ , and let $S_1 = T_\tau(S_0)$. The harness records before- and after-images of its affected components, including relevant authority assignments. Disregarding τ restores its affected primary components and authority from the before-image and recomputes their dependencies; unrelated changes are preserved. It does not erase the recorded event or restore the entire conversation to an earlier point.

In the default wrappers, intervening normal dialogue does not change task state. Let π_τ project onto the affected semantic components and their operative authority, excluding append-only history. Then

$$\pi_\tau(S_{\text{disregarded}}) = \pi_\tau(S_0), \quad \pi_\tau(S_{\text{reinstated}}) = \pi_\tau(S_1).$$

These operations use recorded state differences, not an assumed inverse T_τ^{-1} : removals and overwrites need not be invertible from their outputs alone. Any extension permitting overlapping intervening updates must resolve their precedence explicitly rather than blindly restore a snapshot.

Composite operator (27).

27. **Serialized composite transition.** Combine multiple atomic operators into one user-facing turn. For an ordered sequence $\tau_1, \dots, \tau_m$,

$$T_{\text{comp}} = T_{\tau_m} \circ \dots \circ T_{\tau_1}, \quad S_j = T_{\tau_j}(S_{j-1}).$$

The composition is valid only if every intermediate S_{j-1} satisfies the next operator’s preconditions. Each atomic update is generated, validated, and applied against the current intermediate state; execution is sequential, not parallel.

The default sampler chooses one to two visual-origin operators from $\{1, 2, 4, 5, 6, 23\}$ and two to three text-origin operators from $\{12, 13, 14, 15, 16, 20\}$, producing three to five atomic updates. Directly touched cells are temporarily protected against later direct edits within the same composite. The final turn follows each atomic operator’s disclosure rules and includes only the final visual artifact when multiple visual updates occur.

Validation and visible evidence. Each instance is checked for valid targets and context, correct parent-state references, schema-compatible values, operator-specific edit budgets, authority consistency, and reproducible dependent changes. Renames must preserve identity, additions must introduce absent entities, and removals must target existing entities. The recorded state difference must match the declared direct and dependent changes, with no undeclared modifications.

The visible conversation is kept separate from the generation ledger. Visual-origin turns introduce revised artifacts without textually disclosing their changed values; textual updates state their operative corrections; and visual–textual authority declarations identify the authorized scope without transcribing its values. Disregard and reinstatement instructions refer to the relevant earlier update without exposing internal identifiers or hidden state. These constraints preserve the distinction between evidence available to the evaluated model and state records used to construct and validate the benchmark.

B.2 DETAILED PIPELINE OVERVIEW

Figure 10 details the six-stage generation pipeline. The harness separates validated state-trajectory construction from natural dialogue realization, keeping each question traceable to explicit updates, source authority, and visual evidence. Stage-specific checks govern progression; invalid outputs are repaired before downstream use.

Step 1: Scenario specification. A human author supplies a renderer-ready base artifact, a scenario note describing the professional workflow, and an impact inventory identifying consequential domain-specific changes. These inputs define entities, fields, units, dependencies, and invariants, together with plausible opportunities for updates. They constrain generation without prescribing each individual mutation.

Step 2: Artifact rendering and review. An agent builds a scenario-specific renderer and produces the initial dense visual artifact. A human reviewer checks semantic fidelity, readability, professional realism, and agreement with the underlying records. Rendering issues are corrected before approval. The approved artifact and its structured contents initialize the visual and accepted states used in subsequent stages.

Step 3: Sequential state-trajectory generation. The harness samples eligible operators from the transition library (subsection B.1) and generates updates one at a time. For each operator, an expert model or configured agent proposes a target scope and mutation; the orchestration agent checks its preconditions and resulting state, then applies, renders when needed, and commits the accepted update before proceeding. Invalid proposals are revised. Normal conversation blocks may occur between updates without changing task state. The harness separately maintains global accepted state and visual state, recording their divergences when textual corrections or authority declarations govern the accepted value. A canonical ledger records chronology, provenance, authority, and disregard/reinstatement events.

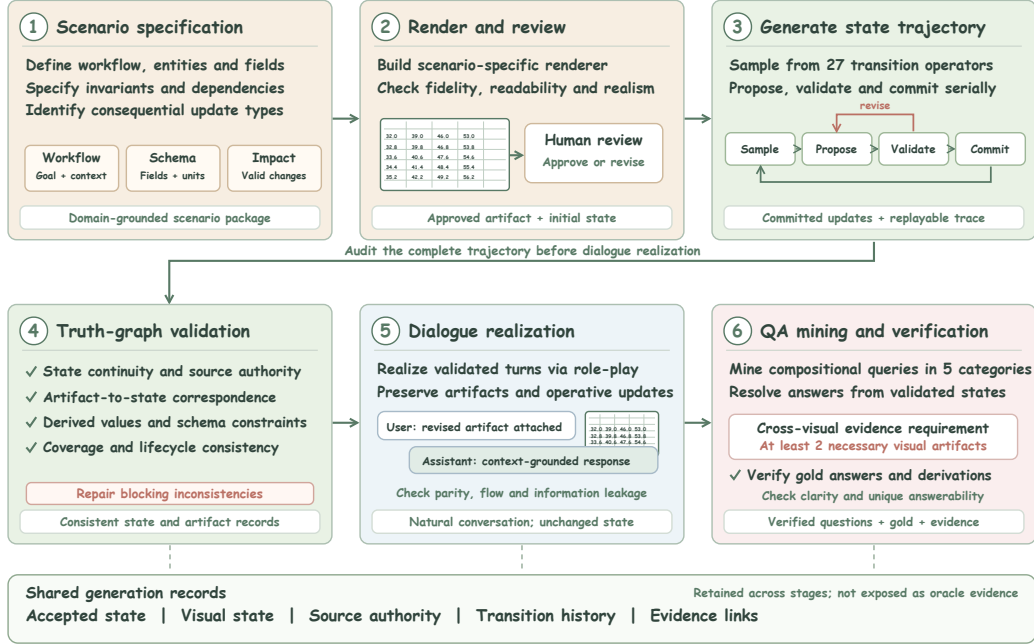


Figure 10: **Detailed DSV-Mem generation pipeline.** Scenario specification and reviewed artifacts establish the initial state. Updates are generated and validated sequentially, followed by a full-trajectory consistency audit, natural dialogue realization, and cross-visual QA construction. Accepted state, visual state, authority, and provenance are recorded throughout; these internal records are not provided to evaluated models.

Step 4: Truth-graph validation. Beyond per-transition checks, the harness audits the complete trajectory for continuity across state snapshots, rendered artifacts, and provenance records. Checks cover schema validity, operator coverage, authority and lifecycle consistency, artifact–state alignment, and dependent computations. Each recorded post-state must agree with the declared update and its dependencies, and connect consistently to the next transition’s parent state. Blocking inconsistencies are repaired before dialogue realization.

Step 5: Natural dialogue realization. Two-model role-play realizes the validated structural turns as a coherent professional conversation. It preserves the approved updates, their order, and associated artifacts while adding natural interaction around them. Checks enforce turn completeness, non-repetition, semantic parity with the validated trajectory, and compliance with information-disclosure rules. In particular, dialogue must neither introduce unrecorded state changes nor reveal future updates or hidden state records; visual-only changes must remain recoverable from the artifacts rather than being transcribed into the dialogue.

Step 6: QA mining and verification. The harness constructs compositional questions covering Current State, Past State, Derived State, Change History, and Conflict/Refusal. Each item records its target state operation, gold answer and derivation, and supporting evidence references. We apply the cross-visual criterion defined in the main paper, retaining questions that require at least two distinct visual artifacts given the conversation text. Gold answers are checked against the validated state trajectory, with independent recomputation for derived quantities and checks for clarity and unique answerability. The resulting questions and evidence undergo the benchmark audits described in the main paper; erroneous items are corrected or replaced. Evaluated models receive the visible conversation and permitted evidence, not the internal state graph or gold derivations.

Algorithm 1 Validated Stateful Conversation Generation

Require: Initial state S_0 ; transition library $\mathcal{L}_{27}$; remaining inventory $\mathbf{c} = (c_1, \dots, c_{27})$
Ensure: Validated conversation skeleton $\mathcal{D}$; transition trace $\mathcal{R}$; maintained truth graph Γ ; final state S_{final}

```

1:  $\mathcal{D} \leftarrow [], \mathcal{R} \leftarrow []$ 
2:  $\Gamma \leftarrow \text{INITIALIZE\_TRUTH\_GRAPH}(S_0), t \leftarrow 0$ 
3: while  $\sum_{k=1}^{27} c_k > 0$  do
4:    $z \leftarrow \text{SAMPLE\_NODE\_TYPE}(\mathbf{c})$ 
5:   if  $z = \text{NORMAL\_BLOCK}$  then
6:      $B \leftarrow \text{GENERATE\_VALIDATED\_NORMAL\_BLOCK}(S_t)$ 
7:      $\mathcal{D} \leftarrow \mathcal{D} \parallel B$  ▷ Task state remains unchanged
8:   else
9:      $\ell_t \leftarrow \text{SAMPLE\_ELIGIBLE}(\mathcal{L}_{27}, \mathbf{c}, S_t)$ 
10:     $r \leftarrow \emptyset$ 
11:    repeat
12:       $(\hat{\Omega}_t, \hat{\phi}_t) \leftarrow E_\theta(\ell_t, S_t, r)$ 
13:       $(v, r) \leftarrow V_{\ell_t}(S_t, \hat{\Omega}_t, \hat{\phi}_t)$ 
14:    until  $v = 1$ 
15:     $\tau_t \leftarrow (\ell_t, \hat{\Omega}_t, \hat{\phi}_t)$ 
16:     $(S_{t+1}, B_t, \mathcal{R}_t) \leftarrow \text{EXECUTE\_VALIDATED}(\tau_t, S_t)$  ▷ Apply and record constituent events
17:     $\mathcal{D} \leftarrow \mathcal{D} \parallel B_t$ 
18:     $\mathcal{R} \leftarrow \mathcal{R} \parallel \mathcal{R}_t$ 
19:     $\Gamma \leftarrow \text{COMMIT\_TRACE}(\Gamma, \mathcal{R}_t)$ 
20:     $\mathbf{c} \leftarrow \text{CONSUME}(\mathbf{c}, \ell_t, \mathcal{R}_t)$ 
21:     $t \leftarrow t + 1$ 
22:  end if
23: end while
24:  $S_{\text{final}} \leftarrow S_t$ 
25: return  $(\mathcal{D}, \mathcal{R}, \Gamma, S_{\text{final}})$ 

```

B.3 GENERATION ALGORITHM

Algorithm 1 summarizes sequential construction of the validated conversation skeleton. Natural dialogue realization and QA mining follow the stages described in subsection B.2.

Here, $\parallel$ denotes sequence concatenation, and r contains validation feedback. `EXECUTEVALIDATED` applies an ordinary transition directly, expands a disregard/reinstatement wrapper into its ordered lifecycle events, or executes a composite’s atomic transitions sequentially. It returns the resulting state, visible structural turns, and constituent transition records, including intermediate states and provenance. `CONSUME` decrements the selected operator’s inventory and, for composites, consumes available atomic-operator counts without allowing negative counts. Each accepted top-level transition therefore satisfies $S_{t+1} = T_{\tau_t}(S_t)$, giving

$$S_{\text{final}} = (T_{\tau_{t-1}} \circ \dots \circ T_{\tau_0})(S_0),$$

with the empty composition defined as the identity.

C ADDITIONAL BENCHMARK DETAILS

C.1 QUESTION CATEGORY DESIGN

Design motivation. We organize questions around how users consult evolving professional records in a sustained workflow. Users may ask what is currently authoritative, recover an earlier decision, compare or compute over accepted records, review how a value changed, or make a request whose premise conflicts with the available evidence. These needs motivate our three families: *authority-aware state resolution*, *stateful change tracking*, and *state-based conflict/refusal*. The five categories distinguish the primary operation needed to satisfy the request, rather than treating all

questions as retrieval of previously mentioned facts. The examples below illustrate these question forms; they are not verbatim benchmark items.

Authority-aware state resolution: what is true at the relevant point? Professional records are repeatedly revised, so answering a factual question requires identifying the state that governs the user’s request. We distinguish three forms of this need:

- **Current State (100 questions).** Users need the accepted information on which to act now. For example, “*What is the approved budget for Project A after the latest corrections?*” This motivates evaluating authoritative-state resolution, rather than merely reading the newest artifact.
- **Past State (100 questions).** Users also revisit earlier decisions or reconstruct what was accepted at a particular stage. For example, “*What budget was approved immediately before the scope revision?*” This motivates retaining historical snapshots rather than overwriting memory with only the current state.
- **Derived State (200 questions).** Practical requests often require analysis rather than repetition of a stored value. For example, “*Which projects remain within their revised budgets, and what is their combined allocation?*” This motivates compositional queries that combine filtering, comparison, or computation with reconstruction of the relevant authoritative state.

Together, these categories test whether memory supports current decisions, retrospective inspection, and analysis over evolving records.

Stateful change tracking: how did we get here? A final value does not explain the sequence of decisions that produced it. Users may need to audit revisions, review changes, or establish how often a field was updated. **Change History (350 questions)** captures this need. For example, “*How many accepted budget changes occurred after the initial approval, and what were the successive amounts?*” Two conversations can end with the same budget while having different update histories; endpoint retrieval alone therefore cannot answer this request. This category evaluates whether models preserve the relevant trajectory, including the effects of disregard and reinstatement, rather than collapsing it into a final summary.

State-based conflict/refusal: is the request supported by the record? Users may refer to an outdated value, assume that an unresolved decision has been finalized, or request a conclusion that the records do not support. **Conflict/Refusal (250 questions)** evaluates whether models recognize these conditions instead of accepting the premise and producing an unsupported answer. For example, “*Using the finalized budget, calculate the remaining allocation*” is not answerable as stated if conflicting revisions remain unresolved. The appropriate response is to identify that issue rather than invent a finalized value. The design targets evidence-grounded correction or refusal, not refusal as a default behavior.

Compositional questions, primary-operation labels. These categories organize user needs without assuming that the underlying operations are independent. A comparison may require recovering past states, and a conflict check may require tracing which update superseded another. We therefore assign each question to its primary requested operation while allowing multiple supporting operations. Across all categories, questions must satisfy the shared cross-visual evidence requirement. This design connects recognizable professional requests to the benchmark’s central challenge: **pre-serving and reasoning over authoritative state as dense visual records evolve.**

C.2 SCENARIOS OVERVIEW AND BREAKDOWN

DSV-Mem covers ten professional scenarios involving evolving records, research evidence, and visual designs. Each conversation centers on a sustained workflow in which accepted textual and visual updates must be reconciled across artifact versions.

1. **Tax-return reconciliation.** Reconcile source documents, corrected amounts, provisional calculations, and filing blockers in a pre-filing workpaper.

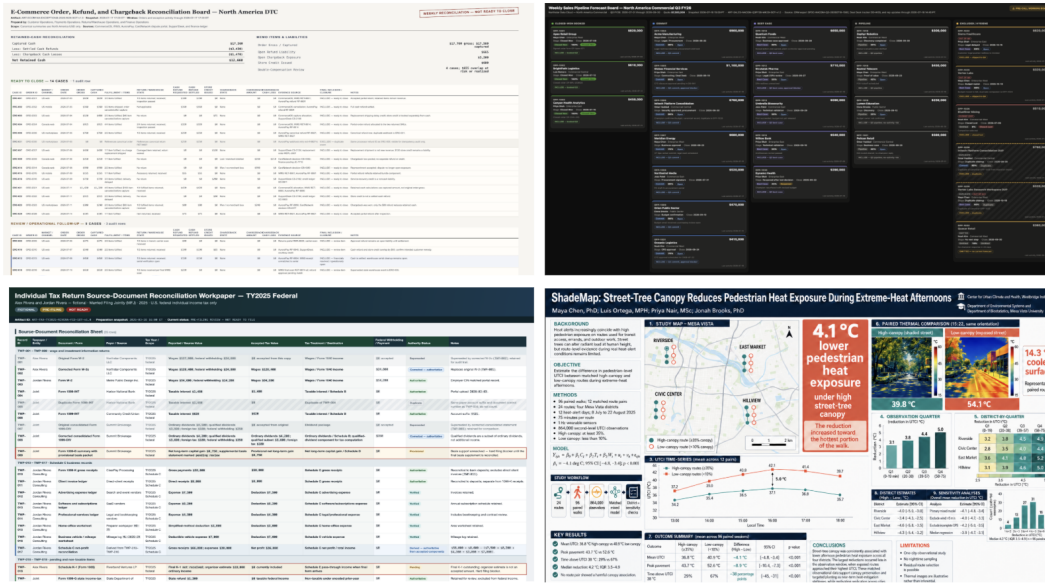


Figure 11: **Example DSV-Mem artifacts.** Representative dense professional visuals spanning e-commerce reconciliation, sales forecasting, tax-return preparation, and scientific-poster design. Each artifact evolves through sparse but consequential textual and visual updates over a sustained workflow.

2. **E-commerce reconciliation.** Track orders, refunds, returns, chargebacks, and closure status during a weekly financial reconciliation.
3. **ML agent research.** Revise experimental results and comparisons as reruns, evaluator checks, and reporting decisions arrive.
4. **Clinical-trial database lock.** Maintain a blinded data-cleaning board, including site counts, outstanding queries, and database-lock readiness.
5. **Sales-pipeline forecasting.** Reconcile opportunity values, forecast categories, exclusions, and blockers across successive pipeline updates.
6. **SRE incident postmortem.** Reconstruct an incident timeline while reconciling timestamps, impact estimates, mitigation events, and evidence scope.
7. **Scientific-poster revision.** Revise an urban-heat research poster while preserving consistency among findings, figures, labels, and layout.
8. **Product-campaign design.** Iterate a projector campaign poster while tracking product identity, visual styling, composition, and accepted revisions.
9. **Expo floor-plan revision.** Update booth assignments, spatial layout, utilities, and access constraints in an exhibition plan.
10. **Robotics evaluation.** Reconcile linked performance, efficiency, safety, and failure-analysis artifacts for a manipulation study.

Each scenario contributes 100 questions: 10 Current State, 10 Past State, 20 Derived State, 35 Change History, and 25 Conflict/Refusal.

C.3 EXAMPLE VISUAL ARTIFACTS

Figure 11 shows representative visual artifacts from DSV-Mem’s 10 diverse professional scenarios. Each scenario features expert-reviewed artifacts that reflect real-world workflow characteristics.

C.4 BENCHMARK VALIDATION

We combine automated checks, expert review, independent question audits, and evidence controls to validate DSV-Mem.

Automated checks and expert review. Automated checks cover schema integrity, state continuity, dependent computations, and consistency between evidence and authority records. Six domain experts, three PhD students, and five additional graduate students participated in reviewing scenario artifacts and transition trajectories. Review criteria include professional realism, appropriate terminology and units, plausible updates, and correct propagation of their consequences. Across three successive checks, we replaced 32, 16, and 1 questions, respectively, totaling 49 replacements (~5% of the benchmark size).

Independent question audit. Three PhD students independently reviewed the same 100 randomly sampled questions, answering each before checking the supplied gold answer. Their gold-answer correctness ratings were 99%, 97%, and 99%, and question-clarity ratings were 97%, 98%, and 98%, respectively. Visual-evidence inconsistency rates were 1%, 2%, and 1%. The reviewers confirmed cross-visual necessity for 97%, 100%, and 100% of the audited questions, respectively. These percentages report individual reviewers’ assessments.

Evidence controls. On the audited sample, text-only evaluation achieves 2% accuracy, while supplying only the best supporting image achieves 1%, supporting the need for cross-visual evidence. When supplied with the supporting artifacts and extracted answer-relevant values, Gemini 3.7 Flash achieves 93% accuracy. This result supports our finding that obtaining and maintaining the required evidence and state correctly is the main challenge, rather than subsequent answer computation. These benchmark-level checks complement the seven results-validation procedures in section 4, detailed in subsection C.5.

C.5 RESULTS VALIDATION

We conduct seven complementary checks to assess the stability of model results, their sensitivity to question wording, and the reliability of evaluation judgments.

Run stability. Unless otherwise specified, each configuration is evaluated over three independent runs. We report the mean and sample standard deviation; single-run results are explicitly marked in the corresponding tables.

Prompt robustness. We evaluate Gemini 3.7 Flash using three semantically equivalent rewrites of each question. Overall accuracy changes by less than one percentage point, indicating that the reported performance is stable under these wording variations.

Two-stage judge verification. We use GPT-5.5 as the primary judge. Responses initially judged incorrect receive an additional independent judgment to verify the assessment, reducing reliance on a single evaluation pass.

Human-judge agreement. Three PhD students independently grade responses to 200 randomly sampled questions. Agreement with the reported evaluation labels exceeds 90% across the resulting 600 individual judgments.

Cross-judge robustness. GPT-5.5, Claude Opus 4.6, and Gemini 3.1 Pro independently re-evaluate 200 randomly sampled responses. Agreement with the reported evaluation labels exceeds 93% across 600 individual judgments, supporting consistency across judge models.

Visual-reading control. We evaluate isolated visual-content extraction on 900 targets across the ten scenarios, sampling 30 targets at each of the beginning, middle, and late stages of each conversation. Extraction accuracy reaches 98.5%. Together with the supporting-evidence control in subsection C.4, this result supports the distinction between reading individual artifacts and maintaining their authoritative state across updates.

Error-stage validation. Three PhD students independently classify 200 incorrect responses randomly drawn from all incorrect responses; human-majority labels agree with automated classifications in 96% of cases. Details appear in subsection D.3.

C.6 VISUAL-EVIDENCE ANNOTATION AND CALCULATION

We characterize inspection breadth from the question and conversation text. Annotators view ordinary dialogue with images and generated captions replaced by opaque visual identifiers preserving their conversational positions. They identify candidate visual occurrences whose contents could resolve answer-relevant information left undetermined by the text, excluding merely topical references and redundant corroboration. Repeated images count separately when their temporal position matters. We denote the candidate count by $K_E = |\mathcal{C}(Q, T)|$ and assign $K_E = 0$ when text alone determines the answer.

Practically, we compute $\tilde{H}_0 = \log_2 \max(1, K_E)$, assigning zero to questions with zero or one candidate occurrence. The reported $2^{\tilde{H}_0}$ is the geometric mean of these floored counts; higher values indicate broader candidate sets for visual inspection.

D ADDITIONAL EXPERIMENTAL RESULTS AND ANALYSIS

D.1 DETAILED EXPERIMENTAL SETUP

Evaluated models and methods. We evaluate frontier and open-weight MLLMs, prompt variants, and multimodal memory-management methods:

- **Frontier MLLMs.** Gemini 3.7 Flash (Google DeepMind, 2026d), Gemini 3.6 Flash (Google DeepMind, 2026b), Gemini 3.5 Flash-Lite (Google DeepMind, 2026a), and Gemini 3.1 Pro Preview (Google DeepMind, 2026c).
- **Open-weight MLLMs.** MiniMax M3 (MiniMax, 2026), GLM 4.6V (Z.ai, 2025), Kimi K3 (Kimi Team, 2026b), Kimi K2.5 (Kimi Team, 2026a), Qwen3.5 (397B-A17B, 27B, 9B, and 4B) (Qwen Team, 2026), and Gemma 4 (31B IT and 26B-A4B IT) (Gemma Team, 2026).
- **Prompt variants.** Using Gemini 3.7 Flash Medium as the baseline, we evaluate chain-of-thought (CoT) prompting (Wei et al., 2022), an explicit state-tracking hint, and three semantically equivalent rewrites of each question. We additionally evaluate CoT and hint prompting with Kimi K3 High. These controls test the effects of reasoning instructions and sensitivity to question phrasing.
- **MLLM memory-management methods.** Using Gemini 3.7 Flash Medium and Kimi K3 High as backbones, we evaluate Mem0, SimpleMem, LightMem, and MIRIX (Chhikara et al., 2025; Liu et al., 2026b; Fang et al., 2026; Wang & Chen, 2025) to test whether existing memory systems improve performance with dense, evolving artifacts.

Unless otherwise specified, Gemini models use *medium* reasoning effort and Kimi K3 uses *high*. Other open-weight models use thinking mode where indicated in Table 2, while Gemma 4 uses its default configuration.

Evaluation protocol. Following Ren et al. (2026); Bei et al. (2026), we adopt a *web-style conversational* setting, appending each question as the final user turn and evaluating it independently. Unaugmented models receive the complete conversation and all visible multimodal evidence; memory-management methods instead use retrieved memories and question-attached images. Neither setting provides oracle state graphs or answer-revealing metadata, such as informative filenames. External memory is reset between scenarios and may contain only information derived from the visible interaction. We report accuracy for each of the five categories, *Category Avg.* as their unweighted mean, and *Total Avg.* as accuracy over all questions. Unless otherwise specified, results report the mean and sample standard deviation over **three independent runs**; rows marked [†] report a single run.

Table 3: Additional DSV-Mem results for Kimi K3 with memory-management methods. The baseline reports mean $\pm$ sample standard deviation over three runs; † denotes a single run. Category Avg. is the unweighted mean of the five category accuracies. Best and second-best results in each metric are **bolded** and underlined, respectively.

Model	Effort	Current State	Past State	Derived State	Change History	Conflict/Refusal	Category Avg.	Total Avg.
Kimi K3 Baseline	High	34.0 $\pm$ 3.5	25.0 $\pm$ 2.6	34.3 $\pm$ 3.8	24.9 $\pm$ 1.5	11.5 $\pm$ 0.5	25.9 $\pm$ 1.4	24.3 $\pm$ 1.2
Kimi K3 + Mem0 †	High	8.0	7.0	12.0	2.6	10.4	8.0	7.4
Kimi K3 + SimpleMem †	High	19.0	<u>24.0</u>	<u>16.0</u>	<u>7.7</u>	21.2	<u>17.6</u>	<u>15.5</u>
Kimi K3 + LightMem †	High	6.0	5.0	9.5	2.0	6.8	5.9	5.4
Kimi K3 + MIRIX †	High	<u>26.0</u>	2.0	11.5	2.0	<u>16.4</u>	11.6	9.9

D.2 ADDITIONAL KIMI K3 RESULTS

Table 3 compares Kimi K3 with four memory-management methods under high reasoning effort. All four underperform the baseline overall, achieving 5.4–15.5% accuracy versus 24.3%, although SimpleMem and MIRIX improve Conflict/Refusal to 21.2% and 16.4%, respectively. As discussed in subsection 4.1, many of these integrations compress visual histories into textual memories without re-attaching the visual images (subsection D.6), risking the loss of fine-grained, state-bearing details needed for later queries. These results reinforce the challenge posed by DSV-Mem: generic summarization may not preserve the dense details and update history required in professional workflows.

D.3 ADDITIONAL ERROR ANALYSIS

We expand the error analysis in subsection 4.2 to clarify where failures arise and which state operations they involve. The analysis distinguishes failures to acquire evidence from failures to reconstruct its authoritative state, compute over that state, or produce an appropriate response.

Error classification. We classify all incorrect responses (Gemini-3.7-flash, Kimi-K3, MiniMax-M3, and Qwen3.5-397B-A17B) by the *earliest failure stage* into five categories: **1) evidence acquisition**, retrieving the wrong artifact or misreading visual content; **2) state reconstruction**, incorrectly tracking, retaining, or reconciling updates across the conversation; **3) downstream computation**, performing incorrect arithmetic over correctly reconstructed state; **4) decision/response**, missed refusals, hallucinations, or incorrect answers despite correct preceding reasoning; and **5) other**, failures not covered by these categories. Labels are assigned by majority vote among GPT-5.5, Claude Opus 4.6, and Gemini 3.1 Pro, with unanimous agreement on 87% of responses. Three PhD students independently classify 200 sampled incorrect responses, achieving 87% unanimous agreement. Human-majority labels agree with automated classifications in 96% of cases and attribute 85% of failures to state reconstruction, corroborating its dominance.

The earliest-stage criterion distinguishes the source of an error from its downstream consequences. For example, computing a total from a superseded value is a state-reconstruction failure when the arithmetic itself is correct. Similarly, an incorrect response caused by a missed authoritative correction is attributed to state reconstruction rather than counted again as a decision/response error.

State reconstruction is the primary bottleneck. As shown in Figure 5a, **state reconstruction accounts for 89.7% of errors**, substantially exceeding decision/response (5.5%), evidence acquisition (3.5%), and downstream computation (1.0%). The dominant challenge is therefore not extracting an isolated value or computing with it, but determining which values and updates remain authoritative in the evolving conversation. A model may correctly read an artifact yet answer incorrectly because it overlooks a later correction, retains a withdrawn update, or combines values from incompatible states.

Evidence acquisition and downstream computation together account for only 4.5% of errors, indicating that visual reading and arithmetic are not the primary bottlenecks in this evaluation. This finding is consistent with the visual-reading control, which achieves 98.5% accuracy, and the evidence-supplied validation, in which Gemini 3.7 Flash achieves 93% accuracy when provided with the

Table 4: **Label-only fine-tuning on DSV-Mem.** Accuracies are reported in percentages. Category Avg. is the unweighted mean of the five categories. ID denotes the in-domain split; OOD denotes the held-out-scenario split.

Setting	Model	Current State	Past State	Derived State	Change History	Conflict/Refusal	Category Avg.
ID	Qwen3.5-9B	9.4	9.9	6.3	7.2	4.8	7.52
ID	Qwen3.5-9B + SFT	11.2	8.5	6.4	8.2	26.6	12.18
OOD	Qwen3.5-9B	11.2	8.8	5.4	7.4	5.6	7.68
OOD	Qwen3.5-9B + SFT	9.4	8.8	6.2	9.2	24.5	11.62

supporting evidence (section 4). Together, these results support the distinction between reading available evidence and reconstructing the authoritative state needed to answer a question.

The bottleneck persists across question categories. State reconstruction dominates across the category groups in Figure 5b. Although their outputs differ, these tasks share a prerequisite: identifying the operative state and its supporting updates. Current and Past State questions require selecting the correct state at the relevant point; Derived State questions require reconstructing that state before computation; Change History questions require retaining the accepted update sequence; and Conflict/Refusal questions require checking a request against the maintained state. Consequently, a reconstruction failure can affect all five categories rather than appearing only in questions explicitly asking about update history.

Lost updates and stale values are the largest reconstruction failure modes. We further classify state-reconstruction errors by their dominant erroneous state operation (Figure 5c). **Lost/collapsed updates account for 30% of all errors**, while **stale values account for 27.1%**. The former occurs when a governing update is omitted or collapsed during reconstruction, so its effect is absent from the maintained history or state. The latter occurs when a superseded value remains in use despite an operative replacement. These subtypes distinguish failure to preserve an update from failure to resolve which value it makes authoritative. Their percentages use *all incorrect responses* as the denominator, not only state-reconstruction errors.

Reliable reconstruction requires multiple state operations. The remaining subtypes span computation on the wrong state, entity tracking, withdrawn values, authority resolution, and update integration. Each accounts for approximately 10% or less of all errors, but together they demonstrate that reconstruction is not reducible to a single operation. Retaining an update is insufficient if it is associated with the wrong entity, treated as authoritative outside its scope, or combined incorrectly with other changes. Likewise, selecting the latest displayed value is insufficient when a textual correction or withdrawal determines the accepted state.

These findings complement the update-count analysis in Figure 7, where accuracy generally declines as more governing updates must be integrated. Together, the update-count trend and diverse error subtypes suggest that reliable memory requires a state-aware approach: **preserving and reconciling accumulating updates across multiple state operations**. This explains why DSV-Mem tests more than isolated visual recognition or retrieval: successful answers depend on maintaining the authoritative evolution of dense professional artifacts.

D.4 ADDITIONAL FINE-TUNING EXPERIMENT

We explore whether supervised fine-tuning (SFT) on final-answer labels improves DSV-Mem performance using Qwen3.5-9B. We consider two settings: an in-domain 80/20 train-test split and a cross-scenario split using eight scenarios for training and two held-out scenarios for evaluation. Training supervises only the gold answer, without intermediate evidence-selection, state-reconstruction, or reasoning traces.

Table 5: Gemini 3.7 Flash Medium accuracy (%) by scenario. Results report mean $\pm$ sample standard deviation over three runs on the same 100 questions per scenario.

Scenario	Accuracy (%)
Tax-return reconciliation	29.7 $\pm$ 1.5
E-commerce reconciliation	26.3 $\pm$ 2.5
ML agent research	37.0 $\pm$ 2.6
Clinical-trial database lock	42.0 $\pm$ 1.7
Sales-pipeline forecasting	29.7 $\pm$ 2.9
SRE incident postmortem	18.0 $\pm$ 2.0
Scientific-poster revision	40.0 $\pm$ 1.0
Product-campaign design	36.0 $\pm$ 4.0
Expo floor-plan revision	56.7 $\pm$ 2.9
Robotics evaluation	81.0 $\pm$ 1.0
Overall	39.6 $\pm$ 0.8

Results. As shown in Table 4, Conflict/Refusal improves from 4.8% to 26.6% in-domain and from 5.6% to 24.5% on held-out scenarios, suggesting that this category is more amenable to final-answer supervision. In contrast, Current State, Past State, Derived State, and Change History remain close to baseline and do not reflect broad improvement in state reconstruction.

Interpretation. Label-only supervision provides a target answer without explicitly teaching the intermediate operations required to obtain it: selecting relevant visual evidence, preserving governing updates, and reconciling their cumulative effects before answering. The limited gains outside Conflict/Refusal are consistent with the state-reconstruction bottleneck identified in subsection 4.2. These results suggest that final-answer SFT alone, under the tested configuration, is insufficient to substantially improve this capability; supervision targeting evidence selection and state evolution remains a promising direction.

D.5 PERFORMANCE ACROSS SCENARIOS

Table 5 reports Gemini 3.7 Flash Medium performance across the ten scenarios. Mean accuracy ranges from 18.0% on incident-postmortem reconciliation to 81.0% on robotics evaluation, with eight scenarios below 50%. Although performance varies substantially across scenarios, the aggregate difficulty is *not* confined to a single workflow. The scenario-level spread also highlights heterogeneous workflow difficulty; its relationship to update count, artifact density, and authority-operation mix remains an important direction for further analysis. Each scenario contains 100 questions with the same category distribution, so the overall score equally weights the ten scenarios.

D.6 MEMORY-MANAGEMENT INTEGRATIONS

By design, these methods typically distill interaction histories into compact memories and answer using retrieved memories at inference time. Subsequent answers therefore depend on what survives memory construction and retrieval. We supply historical visual information during construction: SimpleMem and LightMem receive detailed, question-independent transcriptions through their text-based interfaces, while Mem0 and MIRIX receive images directly through their multimodal ingestion interfaces. To reduce transcription loss, the configured model is explicitly instructed to preserve labels, values, statuses, spatial groupings, and formatting cues. Each method then applies its own memory-construction and retrieval procedures to the chronological conversation.

At answer time, the backbone receives retrieved textual memories and any question-attached images. Historical visual information is therefore mediated by constructed memories, rather than withheld during ingestion. Their underperformance on DSV-Mem highlights the challenge of preserving dense, state-bearing details through this process. This also partially *motivates* our self-ledger design: preserving update-level records and source links allows fine-grained details to be revisited rather than relying solely on compressed representations. Memory construction is scenario-specific and question-independent, using only visible evidence without gold answers or hidden state graphs.

D.7 VISIBLE-EVIDENCE SELF-LEDGER

We explore a training-free self-ledger that explicitly preserves updates and their provenance. The model processes the conversation in chronological windows, using visible dialogue and images, image-derived OCR, and visual-difference hints. It appends entity-field events recording observed values, changes, source turns, and authority cues, while maintaining a compact index of entity aliases, standing instructions, and unresolved conflicts. Displayed values are distinguished from accepted working values, allowing textual corrections or rejected visual revisions to remain explicit without overwriting history.

The ledger is frozen before evaluation questions are introduced. For each question, a retrieval step selects relevant events, temporal scope, source dialogue, and original visual evidence. The model uses this evidence to check an initial answer and produce a ledger-assisted draft; a final arbitration step reconciles the candidate answers against their visible sources. Ledger construction receives no evaluation questions, gold answers, or benchmark state graphs. This exploratory procedure tests whether explicit update preservation and reconciliation can improve performance without model training.