

ONE LOOP, TWO GAINS: CAN ACTIVE LEARNING WIN THE LOTTERY FOR FREE?

Benedikt Tscheschner

University of Technology Graz
Know-Center Research GmbH
Austria
btscheschner@know-center.at

Eduardo Veas

University of Technology Graz
Know-Center Research GmbH
Austria
eveas@know-center.at

Marc Masana

Institute of Visual Computing
University of Technology Graz
Austria
mmasana@tugraz.at

ABSTRACT

The lottery ticket hypothesis posits the existence of *winning tickets*: sparse subnetworks that, when trained in isolation from their original initialization, match the accuracy of the full dense network. The predominant method for discovering such tickets, iterative magnitude pruning, alternates pruning with full retraining from scratch until convergence over many cycles. Similarly, deep active learning also retrains a model from scratch after each acquisition round as new labels become available. Despite this shared reliance on iterative retraining with a substantial computational overhead, the two paradigms have been studied separately. We observe that the iterative training loop inherent to pool-based active learning already provides the exact computational structure that iterative magnitude pruning exploits, and propose *Improve & Prune* (I&P), a method that integrates magnitude pruning into each active learning retraining cycle at practically no additional cost. This raises a key empirical question: can iterative magnitude pruning produce winning tickets under the non-stationary data regime of active learning? We investigate this question across multiple acquisition functions, architecture families, and image classification datasets, including an active fine-tuning scenario. Our results demonstrate that I&P yields sparse, deployable models at each active learning iteration. Those match the accuracy of their dense counterparts at sparsities up to 95%, effectively obtaining winning tickets as a byproduct of the active learning pipeline. These per-iteration sparse models can address two computational bottlenecks — per-round model retraining and acquisition scoring over the unlabeled pool — that currently prevent the practical adoption of DAL on large architectures and large unlabeled pools.

1 INTRODUCTION

Training deep neural networks demands both large labeled datasets and large models, yet practitioners in specialized domains such as medical imaging or industrial analysis often face a scarcity of expert annotations (Settles, 2009; Munro, 2021). In these domains, models are often deployed on portable diagnostic devices or on-premise industrial hardware (Han et al., 2015) under tight memory, energy, and latency constraints, and are queried at scale once in production, making inference-time compute a first-class cost alongside annotation effort. Deep active learning (DAL) (Li et al., 2024) and iterative magnitude pruning (IMP) (Frankle et al., 2019) tackle these two costs independently. DAL minimizes annotation cost by iteratively selecting the most informative samples to be labeled from a large unlabeled pool. IMP discovers highly sparse subnetworks, so-called *winning tickets* (Frankle & Carbin, 2019), that match dense-model accuracy at a fraction of the parameters through repeated cycles of training and pruning. Although the two paradigms target different resources — annotations and model size respectively — they share a common computational backbone: both retrain the model from scratch over multiple rounds. This structural overlap suggests a natural, yet unexplored, opportunity to combine them — one that becomes more important as DAL scales to modern workloads, where per-round retraining grows costly on large backbones (Das et al., 2023) and acquisition functions must repeatedly score increasingly large unlabeled pools (Tsvigun et al., 2022; Citovsky et al., 2021).

We observe that the retraining loop present in pool-based active learning provides exactly the iterative, train-then-prune structure that IMP requires. However, trivially applying the IMP at each DAL iteration would scale the training costs quadratically. Therefore, we want to exploit that DAL already retrains the model from scratch to avoid the optimization bias introduced by warm-starting on a previously smaller dataset (Ash & Adams, 2020)). We argue that a single pruning step appended to each round can progressively discover winning tickets at no additional training cost. These winning tickets uncovered along the way are not merely a deployment side effect — they directly alleviate a key scalability bottleneck inside the DAL loop itself (Citovsky et al., 2021).

Acquisition functions must score the entire unlabeled pool, often repeatedly in Bayesian approaches (Gal et al., 2017), which makes inference costs scale directly with pool size. Sparse models reduce both the number of per-pass FLOPs and the effective embedding dimension used by distance-based acquisition functions, making the DAL loop scale more favorably to large pools.

We formalize this integration of both paradigms as *Improve & Prune* (I&P), a drop-in extension to any pool-based DAL pipeline that yields sparse models at each DAL iteration. Unlike the original IMP, our method operates on a non-stationary labeled set. To accommodate for this, we relax the strict monotonic shrinking of IMP and let the pruning mask dynamically expand and contract at each iteration. Parameters deemed unimportant on previous iterations can be reactivated while a subsequent pruning step reinstates sparsity. We empirically show that winning tickets nonetheless emerge under this regime across six acquisition functions, four image classification datasets (including an active fine-tuning scenario), and two architecture backbones under both supervised and self-supervised pretraining.

2 BACKGROUND

2.1 MINIMAL LABELING WITH DEEP ACTIVE LEARNING

DAL aims at efficient deep neural network training through iterative batch-wise sample selection with minimal labeling effort (Munro, 2021; Li et al., 2024). Pool-based active learning, where all data samples are available and fixed from the start, is the dominant setting and the focus of this work; stream-based alternatives, where new unlabeled data arrives over time, are left for future investigation.

For a pool-based scenario, let $D_U^{(0)} \sim P$ denote an unlabeled pool drawn from a data distribution P , accompanied by an initial set of oracle-labeled samples $D_L^{(0)} \sim P$ with $D_U^{(0)} \cap D_L^{(0)} = \emptyset$. The goal is to learn a model $f(x; \theta)$ that generalizes over P while querying as few oracle labels from $D_U^{(0)}$ as possible. The model is initially trained on $D_L^{(0)}$, starting from either a random initialization or a predefined checkpoint θ_{init} . At each iteration ($j > 0$), an acquisition function $\mathcal{S}$ scores $D_U^{(j)}$ using the embedding representations and pseudo labels of $f(x; \theta^{(j)})$ to select a batch of *informative* samples $D_A^{(j)} \subset D_U^{(j)}$. Then, annotations from an oracle are requested for $D_A^{(j)}$ and the partitions are updated as $D_L^{(j+1)} = D_L^{(j)} \cup D_A^{(j)}$ and $D_U^{(j+1)} = D_U^{(j)} \setminus D_A^{(j)}$. A new model is retrained from the initial weights θ_{init} on $D_L^{(j+1)}$ to convergence, keeping hyperparameters constant across iterations. In practice, DAL iterates until a predetermined annotation or computation budget is exhausted or a target performance level is reached (Li et al., 2024). Furthermore, to avoid a cold start (Schein et al., 2002; Hacohen et al., 2022), $D_L^{(0)}$ is commonly seeded by random draws or by clustering pretrained embeddings so that the initial batch already covers P broadly (Li et al., 2024).

The design of the acquisition function, which ranks unlabeled samples for labeling, has been a central research question in deep active learning. The most direct extension of active learning to deep neural networks estimates predictive uncertainty for individual samples and selects those for which the model is least confident (Settles, 2009; Gal et al., 2017; Kirsch et al., 2019). While computationally efficient on a per-sample basis, uncertainty-based selection is prone to redundancy within a single acquisition batch and exhibits sensitivity to outliers and noisy labels (Li et al., 2024).

Rather than scoring individual samples, coreset methods aim to select batches that best represent the underlying data distribution P , drawing on ideas from clustering and covering theory (Sener & Savarese, 2018; Hacohen et al., 2022). A distance or covering metric is computed over embedding representations of the neural network. Because exact batch selection is often computationally intractable, greedy approximations or random subsampling are standard.

A third family aims to combine uncertainty and diversity signals in a single function. Some methods estimate the influence of candidate annotations on model parameters, e.g. through gradient embeddings or Fisher information, and enforce batch diversity over these representations (Ash et al., 2020; 2021). Others pair conventional uncertainty measures with embedding-based clustering to balance informativeness and coverage (Citovsky et al., 2021; Maekawa et al., 2022).

No single acquisition function dominates across all settings: different label budgets and dataset sizes favor different strategies (Hacohen et al., 2022), and recent research has shifted towards selecting the most suitable acquisition function adaptively throughout the DAL loop (Zhang et al., 2023; Wang et al., 2025; Huseljic et al., 2026). To ensure generality, we benchmark against six representative acquisition functions covering all three families since I&P imposes no assumptions on $\mathcal{S}$.

2.2 PROMOTING SPARSITY WITH THE LOTTERY TICKET HYPOTHESIS

Frankle & Carbin (2019) introduced the Lottery Ticket Hypothesis (LTH):

Lottery Ticket Hypothesis: A randomly-initialized, dense neural network contains a subnetwork that, when trained in isolation from its original initialization, can match the test accuracy of the original network after training for at most the same number of iterations.

The primary method for identifying such *winning tickets* is Iterative Magnitude Pruning (IMP): the model is trained from its original initialization, a fixed fraction of the lowest-magnitude weights are pruned (typically 20% per round), and the process repeats. The aim is to empirically find the maximum sparsity at which performance begins to degrade within some predefined margin ϵ .

Let $f(\mathbf{x}; \theta_{\text{init}})$ be the initial model that is trained on dataset $D_B \sim P$ until convergence for j training iterations. A pruning mask for the model is defined as $M \in \{0, 1\}^{|\theta|}$ with an initialization $M^{(0)} = 1$, and with a pruning rate p_c . A pruning function $\mathcal{C}$ (e.g. weight magnitude) ranks the converged parameter set $\theta^{(j)}$. The mask for the next round $M^{(j+1)}$ is obtained by pruning the p_c lowest-ranked weights. At each iteration ($j \geq 0$), the model $f(\mathbf{x}; \theta_{\text{init}} \odot M^{(j)})$ trains from scratch with the pruning mask $M^{(j)}$ as a constraint. After j iterations, IMP yields a family of candidate tickets $(\theta_{\text{init}}, M^{(i)})_{i \leq j}$ with geometrically increasing sparsities $1 - (1 - p_c)^i$; the winning ticket is the sparsest candidate still matching the dense reference within a performance margin ϵ .

Frankle et al. (2019; 2020a) subsequently showed that pruning alone is insufficient for reliable ticket discovery in large-scale networks. Rewinding weights to an early training epoch rather than to initialization yields more stable winning tickets, especially in deeper architectures. This finding suggests that early optimization dynamics encode critical inductive biases that determine subnetwork viability. The LTH is therefore not merely a pruning heuristic but evidence that plasticity (Frankle et al., 2020b; Pinson, 2026) for a given task is unevenly distributed within model parameter space, a perspective we revisit in Section 5.

Despite its effectiveness, IMP remains computationally expensive due to the repeated training cycles it requires, and various strategies for reducing this burden have been proposed (Liu et al., 2024), including early stopping for ticket discovery (You et al., 2020) and training on a specialized coreset (Zhang et al., 2021). This overhead has largely confined IMP to the role of an analysis tool rather than a practical deployment recipe. However, we observe that this cost is only expensive in isolation: whenever a training pipeline *already* performs repeated retraining (such as our proposed I&P), IMP can be layered on top.

2.3 PRUNING FOR COMPUTATIONAL SAVINGS

The magnitude signal IMP exploits is only available after convergence, which explains both its reliability and its cost. Pruning methods of neural networks more broadly differ in the training stage at which they commit to an importance estimate (Cheng et al., 2024), trading signal quality for computational savings. Some methods determine which weights can be removed from the randomly initialized network before training begins: SNIP (Lee et al., 2019) measures connection sensitivity with respect to the loss, GraSP (Wang et al., 2020) preserves gradient flow, and PX (Iurada et al., 2024) aligns the sparse network’s training dynamics with those of the dense model via NTK spectral properties. All three require a batch of training data for their estimates, whereas SynFlow (Tanaka et al., 2020) operates entirely data-free by conserving synaptic flow to avoid layer collapse. Despite these differences, all methods share a fundamental limitation: parameter importance at initialization is a poor proxy for importance after training, causing consistent underperformance relative to iterative pruning at high sparsity (Iurada et al., 2024; Cheng et al., 2024).

Rather than committing to a fixed topology upfront, dynamic sparse training methods jointly learn weights and sparse structure in a single training run. RigL (Evci et al., 2020) and DSR (Mostafa & Wang, 2019) maintain a fixed sparsity level throughout training, periodically updating the topology by pruning low-magnitude weights and regrowing connections identified via instantaneous dense gradient computations. While this reduces memory and FLOPs for forward passes, the periodic dense gradient steps and additional hyperparameters introduce optimization complexity (Cheng et al., 2024). Finally, there are also post-hoc pruning methods. Most prominently, magnitude pruning (Han et al., 2015) first trains a dense model to convergence and then removes parameters. The pruning signal is strong since it reflects learned importance, and the post-hoc nature of the approach makes it flexible: it can be applied to any trained model without modifying the training procedure. However, the full dense training cost has already been paid and efficiency gains are realized only at deployment. Iterative pruning generally outperforms single-shot pruning at high sparsity (Wojnar et al., 2024). Importance scores shift as training progresses, and iterative schemes account for this drift by reassessing importance after each round. IMP is one realization of this principle, operating post-hoc by pruning after convergence and rewinding.

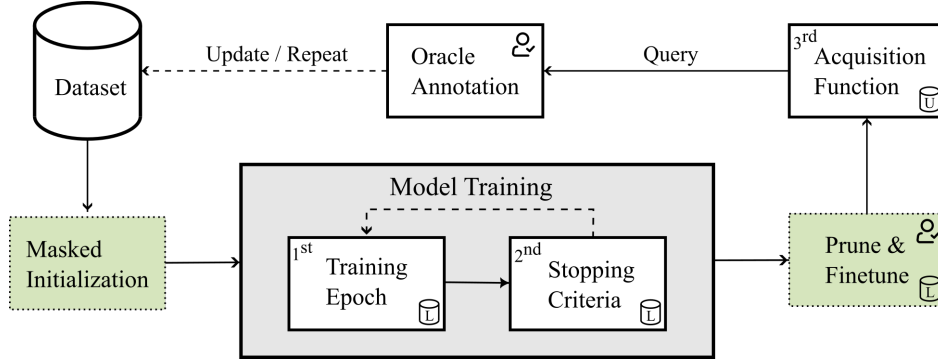


Figure 1: Depiction of a standard DAL loop (white boxes), where the dominant computational costs are model training and acquisition scoring over the unlabeled pool. I&P extends DAL by incorporating masked initialization before training and pruning with finetuning after convergence (green boxes). The $\mathbb{U}$ and $\mathbb{L}$ icons indicate whether an operation acts on the labeled or unlabeled set.

3 ONE LOOP, TWO GAINS

The iterative training by DAL and IMP incurs significant computational costs due to models being repeatedly trained from scratch until convergence. We reduce these scaling costs in DAL by leveraging the increased efficiency of sparse models induced by the LTH. We first analyze the computational scaling, before describing our proposed method.

3.1 SCALING OF COMPUTATION IN DAL

The computational cost of a deep active learning pipeline decomposes into three primary components:

- 1st *Model size and sparsity.* The FLOPs per forward and backward pass are governed by both the number of parameters and the types of operations in the architecture. Because every training epoch and every pool inference call pays this cost, reducing model complexity through pruning can compound savings across both the training and acquisition phases of the DAL loop.
- 2nd *Optimization strategy and training duration.* Per-iteration costs are majorly influenced by how the model is optimized and how long it trains until convergence, which relies on the choice of optimizer and momentum, learning rate and its schedule, the number of epochs, and early stopping criteria. To avoid unnecessary epochs, we adopt the well established accuracy-based early stopping (Ash et al., 2020) in our experiments.
- 3rd *Pool inference and acquisition function.* Acquisition functions often require one forward pass over the full unlabeled pool D_U . Bayesian approaches such as BALD (Gal et al., 2017) multiply this cost by the number of stochastic passes. Distributional and hybrid methods additionally compute pairwise distances in the embedding space, introducing costs that scale quadratically with the representation dimension. Scaling to large pools remains a practical bottleneck (Citovsky et al., 2021), forcing several acquisition families (Kim et al., 2023; Bae et al., 2025) to resort to random subsampling of the unlabeled pool to remain tractable.

This work targets the first and third component through network sparsity; the second is highly task-, dataset-, and architecture-dependent, limiting general prescriptions. Together, these two components form the dominant practical barrier to adopting pool-based DAL on large-scale workloads: per-round retraining from scratch becomes prohibitive as backbone complexity and training data grows (Das et al., 2023), and acquisition over large unlabeled pools compounds the cost at every iteration (Tsvigun et al., 2022).

3.2 IMPROVE AND PRUNE

Pool-based active learning already retrains the model from scratch at every acquisition round to avoid warm-start bias (Ash & Adams, 2020). IMP requires an analogous iterative training loop: train to convergence, prune, repeat. I&P exploits this structural correspondence by attaching a single pruning step after each DAL training phase (right green box in Figure 1), thereby discovering winning lottery tickets at minimal additional cost. At each iteration (j), the model is pruned and the dataset pool grows. This introduces the risk of pruning connections that are required in future iterations, which we address with controlled expansion before training (left green box in Figure 1).

Our goal is to iteratively learn a model $f(\mathbf{x}; \boldsymbol{\theta})$ on $D_L^{(j)} \sim P$ that generalizes over data distribution P while querying as few oracle labels as possible, matching the general setup of DAL described in Section 2.1. From the IMP perspective, we have $D_B = D_L^{(j)}$ be the training dataset, which in the DAL setup is non-stationary w.r.t the iterations, and we initialize a mask $M^{(0)} = \mathbf{1}$ and a pruning rate p_c as described in Section 2.2. Further, we also define a percentage of the total parameters p_r as the reactivation rate, and a minimum percentage of active parameters $(1 - s)$. Next, we first provide a compact definition of our proposed method, and then we expand individually on each of its components.

At iteration $(j) > 0$, we start by expanding the mask in order to restore model capacity. We define a function $\mathcal{R}(M^{(j)}, p_r)$ that restores capacity proportionally across layers by setting random mask entries to 1. Then, the model $f(\mathbf{x}, \boldsymbol{\theta}_{\text{init}} \odot \mathcal{R}(M^{(j)}; p_r))$ is trained on $D_L^{(j)}$ until convergence. After the training, we apply a pruning function $\mathcal{C}(M^{(j)}; p_c)$, which ranks the learned parameters $\boldsymbol{\theta}^{(j)}$ and updates the mask by setting p_c mask entries to zero according to the ranking from $\mathcal{C}$, and subject to retaining at least a fraction of $(1 - s)$ active parameters. The model parameters are pruned with the new mask, and finetuned for φ epochs or until convergence to compensate for any changes in the old mask pruned parameters. Finally, the acquisition function $\mathcal{S}$ scores the $D_U^{(j)}$ based on the sparse model to select informative samples, obtain labels from the oracle and concludes an iteration cycle by updating $D_L^{(j+1)}$ and $D_U^{(j+1)}$. A pseudo-code version of the described algorithm is available in Section A.1.

Masked initialization. The expansion function $\mathcal{R}$ follows a layer-wise budget, distributing restored capacity proportionally across layers. The relaxed pruning mask remains unstructured, inspired by evolutionary capacity principles (Mostafa & Wang, 2019). The rationale is that the labeled set grows by the newly acquired batch $D_A^{(j)}$, so parameters pruned under the previous data distribution may carry renewed importance for fitting the expanded dataset; relevant ones will survive the current pruning cycle while unimportant ones will be pruned away. This flexibility is essential: a single mask discovered once and frozen for the remaining iterations gradually drifts out of alignment with the growing labeled set, as we show empirically in Figure 2.

Model Training. Our main training stage is equivalent to a standard DAL pipeline: the model is optimized on $D_L^{(j)}$ until convergence. The only difference is that training benefits from the sparsity pattern imposed by $M^{(j)}$, which is held *fixed* throughout the training. Therefore, this sparsity is amenable to static sparse-kernel optimization and hardware-level acceleration (e.g. 2:4 structured or tiling (Zhao et al., 2024)). Dynamic sparse training methods such as RigL (Evci et al., 2020) forfeit this opportunity since their masks evolve during training and their regrowth step requires dense gradient computations, preventing the training loop from fully exploiting the nominal FLOP savings.

Prune and Finetune. Once training has converged, $\mathcal{C}$ is applied to the converged parameters, removing the lowest-magnitude weights at rate p_c up to the target sparsity s . Pruning induces an abrupt discontinuity in the function realized by the network leaving the remaining parameters briefly out of alignment with the task. The finetuning-phase (Mishra et al., 2021) continues training on $D_L^{(j)}$ under identical conditions, but with an updated mask $M^{(j+1)}$, so that remaining parameters can realign to the unchanged objective. This phase incurs minimal computational overhead since the majority of optimization is performed during model training on the larger mask and the finetuning is restricted to a maximum budget φ . Therefore, finetuning typically converges within a small fraction of the original training epochs. Crucially, the finetuning being inexpensive enables efficient exploration of the minimum active parameters s . Multiple sparsity levels can be evaluated by branching from the same model training checkpoint and running only the short finetuning phase for each candidate, making the selection of s practical even in resource-constrained settings. This property lends itself naturally to a human-in-the-loop workflow (Munro, 2021): after the first stage of any DAL iteration, a practitioner can branch at multiple sparsity levels, inspect the resulting efficiency trade-off on a test set, and select the operating point that best fits the deployment constraints before committing to the next acquisition round.

Acquisition. The acquisition step, operating over the large unlabeled pool $|D_U^{(j)}| \gg |D_L^{(j)}|$, benefits from the refined sparsity of the finetuned model, in terms of generalization to distribution shifts, better calibrated predictive uncertainty and computational efficiency (Chen et al., 2022). Any distance-based $\mathcal{S}$ can gain a quadratic speedup from the reduced latent representation dimension without requiring specialized sparse operations (see Appendix A.9 for scaling details).

I&P is agnostic to both the reactivation and pruning criteria. This work adopts unstructured magnitude pruning for $\mathcal{C}$ following the original LTH formulation (Frankle & Carbin, 2019), and random layer-wise reactivation for $\mathcal{R}$ (Mostafa & Wang, 2019). These can be formally defined as,

$$\mathcal{C}(M^{(j)}, \boldsymbol{\theta}^{(j)}) = M^{(j)} \odot \mathbf{1} \left[|\boldsymbol{\theta}^{(j)}| > \tau^{(j)} \right], \quad \mathcal{R}(M^{(j)}) = M^{(j)} \vee \xi^{(j)}, \quad (1)$$

where $\tau^{(j)}$ is the threshold that removes the lowest p_c fraction of active weights and $\xi^{(j)}$ is a layer-stratified random mask that activates a p_r fraction of pruned weights. Conceptually, DAL and IMP could be run as two nested loops,

Table 1: *Acquisition does not affect pruning*. Final classification accuracy A_9 [%] for a ResNet-18 pretrained with self-supervised SimCLR on CIFAR-100 and Imagewoof under a low (LB) and high (HB) annotation budget. Rewinding points are taken at half of the warmup period. Results report the mean $\pm$ std over 10 seeds. p -value of one-sided Wilcoxon test for non-inferiority against Dense on AULC; $\checkmark$ if $p < 0.05$ (margin $\epsilon = 0.005$), $\times$ otherwise.

Acquisition	Train	CIFAR-100 LB		CIFAR-100 HB		Imagewoof LB		Imagewoof HB	
		A_9	p -value	A_9	p -value	A_9	p -value	A_9	p -value
Margin SIGIR 1995	Dense	17.45$\pm$2.07	—	52.48$\pm$1.33	—	54.74$\pm$3.61	—	80.95$\pm$0.92	—
	Rand Sparse	12.97 $\pm$ 1.03	$\times$ (0.999)	41.76 $\pm$ 1.32	$\times$ (1.000)	47.25 $\pm$ 1.06	$\times$ (1.000)	76.64 $\pm$ 0.94	$\times$ (1.000)
	Rand Prune	11.70 $\pm$ 1.18	$\times$ (1.000)	17.46 $\pm$ 1.46	$\times$ (1.000)	43.64 $\pm$ 1.54	$\times$ (1.000)	64.04 $\pm$ 3.21	$\times$ (1.000)
	I&P (ours)	17.52$\pm$1.80	$\checkmark$ (0.032)	52.29$\pm$1.30	$\checkmark$ (0.014)	55.46$\pm$3.44	$\checkmark$ (0.001)	81.14$\pm$0.80	$\checkmark$ (0.001)
CoreSet ICLR 2018	Dense	17.73$\pm$2.09	—	51.37$\pm$1.23	—	55.15$\pm$4.29	—	79.82$\pm$0.82	—
	Rand Sparse	13.78 $\pm$ 0.71	$\times$ (0.997)	41.91 $\pm$ 1.13	$\times$ (1.000)	46.49 $\pm$ 1.83	$\times$ (1.000)	75.34 $\pm$ 1.00	$\times$ (1.000)
	Rand Prune	12.20 $\pm$ 1.46	$\times$ (1.000)	18.50 $\pm$ 1.39	$\times$ (1.000)	45.06 $\pm$ 1.65	$\times$ (1.000)	68.41 $\pm$ 1.92	$\times$ (1.000)
	I&P (ours)	18.44$\pm$2.16	$\checkmark$ (0.001)	50.52$\pm$1.03	$\times$ (0.080)	54.73$\pm$4.83	$\checkmark$ (0.001)	79.07$\pm$1.14	$\checkmark$ (0.001)
BADGE ICLR 2020	Dense	18.01$\pm$2.44	—	50.89$\pm$1.35	—	54.79$\pm$3.63	—	78.68$\pm$1.07	—
	Rand Sparse	13.83 $\pm$ 0.81	$\times$ (0.995)	41.63 $\pm$ 1.12	$\times$ (1.000)	47.80 $\pm$ 1.41	$\times$ (1.000)	75.43 $\pm$ 0.63	$\times$ (1.000)
	Rand Prune	12.40 $\pm$ 1.76	$\times$ (1.000)	18.93 $\pm$ 1.16	$\times$ (1.000)	44.49 $\pm$ 1.34	$\times$ (1.000)	68.09 $\pm$ 1.50	$\times$ (1.000)
	I&P (ours)	18.48$\pm$1.86	$\checkmark$ (0.001)	49.94$\pm$1.34	$\times$ (0.903)	54.43$\pm$3.92	$\checkmark$ (0.002)	78.45$\pm$1.24	$\checkmark$ (0.003)
SAAL PMLR 2023	Dense	17.76$\pm$1.91	—	51.74$\pm$1.17	—	54.83$\pm$3.19	—	80.24$\pm$1.08	—
	Rand Sparse	13.10 $\pm$ 0.95	$\times$ (0.997)	41.76 $\pm$ 1.34	$\times$ (1.000)	47.12 $\pm$ 1.30	$\times$ (1.000)	76.45 $\pm$ 0.81	$\times$ (1.000)
	Rand Prune	12.29 $\pm$ 1.85	$\times$ (1.000)	18.50 $\pm$ 1.27	$\times$ (1.000)	42.72 $\pm$ 2.33	$\times$ (1.000)	66.16 $\pm$ 1.63	$\times$ (1.000)
	I&P (ours)	17.88$\pm$1.97	$\checkmark$ (0.005)	51.36$\pm$1.32	$\times$ (0.313)	55.62$\pm$3.84	$\checkmark$ (0.001)	81.01$\pm$1.27	$\checkmark$ (0.001)
MaxHerdling ECCV 2024	Dense	18.72$\pm$2.01	—	51.89$\pm$0.93	—	55.74$\pm$3.91	—	80.33$\pm$1.07	—
	Rand Sparse	13.92 $\pm$ 1.00	$\times$ (0.999)	41.88 $\pm$ 1.37	$\times$ (1.000)	47.76 $\pm$ 1.64	$\times$ (1.000)	76.41 $\pm$ 1.02	$\times$ (1.000)
	Rand Prune	12.41 $\pm$ 1.73	$\times$ (1.000)	19.03 $\pm$ 1.36	$\times$ (1.000)	42.88 $\pm$ 1.76	$\times$ (1.000)	65.38 $\pm$ 2.60	$\times$ (1.000)
	I&P (ours)	18.89$\pm$1.88	$\checkmark$ (0.005)	51.39$\pm$1.16	$\times$ (0.116)	55.16$\pm$4.13	$\checkmark$ (0.003)	80.55$\pm$1.27	$\checkmark$ (0.001)
UHerdling ICLR 2025	Dense	17.70$\pm$2.20	—	52.28$\pm$1.38	—	54.70$\pm$2.75	—	80.46$\pm$1.14	—
	Rand Sparse	13.87 $\pm$ 0.81	$\times$ (0.993)	41.81 $\pm$ 1.16	$\times$ (1.000)	47.45 $\pm$ 1.71	$\times$ (1.000)	77.06 $\pm$ 1.17	$\times$ (1.000)
	Rand Prune	12.27 $\pm$ 1.18	$\times$ (1.000)	17.68 $\pm$ 1.14	$\times$ (1.000)	42.40 $\pm$ 2.05	$\times$ (1.000)	63.45 $\pm$ 2.28	$\times$ (1.000)
	I&P (ours)	18.19$\pm$1.86	$\checkmark$ (0.001)	51.86$\pm$1.39	$\checkmark$ (0.014)	55.52$\pm$3.34	$\checkmark$ (0.001)	81.07$\pm$1.11	$\checkmark$ (0.001)

paying the iterative training cost of IMP on top of the cost already incurred by DAL. I&P fuses these into one loop with two gains: progressively sparser models and label-efficient acquisition, without extra winning ticket search cost.

4 EXPERIMENTS

We evaluate I&P on four image classification datasets: CIFAR-100 (Krizhevsky et al., 2009), Imagewoof (Howard, 2019), Tiny-ImageNet (Deng et al., 2009), and Places365 (Zhou et al., 2017). These datasets cover training from scratch at multiple input resolutions as well as active finetuning from ImageNet-pretrained checkpoints. For CIFAR-100, Imagewoof, and Tiny-ImageNet a ResNet-18 (He et al., 2016), we pretrain a self-supervised backbone with SimCLR (Chen et al., 2020) on the whole unlabeled pool *before* any annotation is drawn, reflecting the now-standard practice of initializing DAL pipelines from a representation learned on the unlabeled data rather than from random weights (Gashi et al., 2025), a convention adopted for robust active learning evaluation (Lüth et al., 2023) rather than a requirement of I&P itself. We also adapt the stem of the model per input resolution to avoid excessive early down-sampling (Appendix A.2). All models are trained with AdamW (Loshchilov & Hutter, 2019) and a cosine learning-rate schedule with linear warmup. Convergence is considered on the first epoch that reaches a fixed high training-accuracy threshold on the current labeled set, following Ash et al. (2020) early stopping criterion. At each DAL iteration, we re-initialize the model to the pretrained checkpoint to prevent warm-start interference (Ash & Adams, 2020). Normalization layers and the classification head are excluded from pruning. Full per-dataset hyperparameters, including optimizer settings, schedule, budgets and pruning configuration are reported in Table 12.

Table 2: *Longer DAL cycle*. Classification accuracy [%] (mean $\pm$ std over 15 seeds) on Tiny-ImageNet, starting from 1000 stratified samples with a per-iteration budget of 200 over 20 iterations. p -value of one-sided Wilcoxon test for non-inferiority against Dense on AULC; $\checkmark$ if $p < 0.05$ (margin $\epsilon = 0.005$), $\times$ otherwise.

Acquisition	Train	Tiny-ImageNet						
		A_0	A_4	A_8	A_{12}	A_{16}	A_{20}	p -value
Margin SIGIR 1995	Dense	10.56 $\pm$ 0.49	14.07 $\pm$ 0.65	16.70 $\pm$ 0.62	19.28 $\pm$ 0.56	21.15 $\pm$ 0.70	22.77 $\pm$ 0.72	—
	Rand Sparse	8.27 $\pm$ 0.43	6.86 $\pm$ 0.42	8.59 $\pm$ 0.48	10.28 $\pm$ 0.56	11.77 $\pm$ 0.37	13.32 $\pm$ 0.60	$\times$ (1.00)
	Rand Prune	9.42 $\pm$ 0.52	7.62 $\pm$ 0.48	9.09 $\pm$ 0.53	9.67 $\pm$ 0.77	11.02 $\pm$ 0.67	10.64 $\pm$ 0.77	$\times$ (1.00)
	I&P (ours)	11.27 $\pm$ 0.54	14.10 $\pm$ 0.65	16.87 $\pm$ 0.64	18.83 $\pm$ 0.64	20.71 $\pm$ 0.63	22.22 $\pm$ 0.54	$\checkmark$ ($3e^{-5}$)
CoreSet ICLR 2018	Dense	10.56 $\pm$ 0.49	13.97 $\pm$ 0.51	16.77 $\pm$ 0.79	19.32 $\pm$ 0.61	20.84 $\pm$ 0.79	22.69 $\pm$ 0.68	—
	Rand Sparse	8.27 $\pm$ 0.43	6.65 $\pm$ 0.34	8.26 $\pm$ 0.45	9.87 $\pm$ 0.41	11.12 $\pm$ 0.37	12.32 $\pm$ 0.44	$\times$ (1.00)
	Rand Prune	9.42 $\pm$ 0.52	7.87 $\pm$ 0.35	9.24 $\pm$ 0.37	10.29 $\pm$ 0.57	11.57 $\pm$ 0.66	11.71 $\pm$ 0.81	$\times$ (1.00)
	I&P (ours)	11.27 $\pm$ 0.54	14.32 $\pm$ 0.65	17.20 $\pm$ 0.64	18.93 $\pm$ 0.59	20.70 $\pm$ 0.49	22.20 $\pm$ 0.44	$\checkmark$ ($3e^{-5}$)
BADGE ICLR 2020	Dense	10.56 $\pm$ 0.49	14.42 $\pm$ 0.40	17.43 $\pm$ 0.63	19.59 $\pm$ 0.53	21.60 $\pm$ 0.70	23.50 $\pm$ 0.72	—
	Rand Sparse	8.27 $\pm$ 0.43	7.10 $\pm$ 0.36	8.84 $\pm$ 0.42	10.85 $\pm$ 0.30	12.36 $\pm$ 0.30	13.94 $\pm$ 0.52	$\times$ (1.00)
	Rand Prune	9.42 $\pm$ 0.52	8.00 $\pm$ 0.42	9.76 $\pm$ 0.31	10.42 $\pm$ 0.56	12.15 $\pm$ 0.62	11.83 $\pm$ 0.76	$\times$ (1.00)
	I&P (ours)	11.27 $\pm$ 0.54	14.44 $\pm$ 0.46	17.42 $\pm$ 0.64	19.16 $\pm$ 0.55	21.47 $\pm$ 0.62	22.81 $\pm$ 0.50	$\checkmark$ ($3e^{-5}$)

We compare I&P against three training baselines (further pruning baselines are investigated in Appendix A.5):

- **Dense.** The standard DAL pipeline without any pruning steps (finetuning phase still applies). The model trains at full capacity in every iteration and serves as the target upper-bound reference.
- **Rand Sparse.** The initial model is pruned at the same sparsity s as I&P. Training proceeds in a single stage without the expand-and-contract cycle or the second-stage finetuning. This baseline evaluates whether merely operating at reduced capacity, without structured mask discovery, is sufficient.
- **Rand Prune.** The same pipeline as I&P is retained, including reactivation $\mathcal{R}$ and the finetuning phase, but magnitude-based pruning is replaced by random pruning.

4.1 MAIN EXPERIMENTS

The choice of acquisition function affects the distribution coverage of the model through the choice of labeled batches. Therefore, we aim to elucidate how this choice interacts with pruning. We report final test accuracy A_9 on CIFAR-100 and Imagewoof across six acquisition functions within a low (LB) and high (HB) annotation budget regime. Specifically, LB sets both the initial pool $|D_L^{(0)}|$ and the per-round budget B between 1-5 samples per class, while HB scales them an order of magnitude higher to 10-50 samples per class. We additionally perform a one-sided Wilcoxon signed-rank (non-inferiority) test on the AULC (Werner et al., 2024), with hypothesis $H_1 : \text{AULC}_A - \text{AULC}_B < \epsilon$. If rejected, method B is unlikely to fall below $\epsilon = 0.005$ AULC compared to method A (see Appendix A.3 for details). In our experiments, Dense is the reference method A .

Results are presented in Table 1, which show how I&P consistently matches Dense across all settings, confirming that the DAL retraining loop produces winning tickets without a dedicated, extra ticket-search cost. Furthermore, the training method is agnostic to the choice of acquisition function: no function exhibits a systematic accuracy loss under pruning. In Appendix A.7, we explore whether structural similarities emerge from different acquisition functions within the CIFAR HB setting. Appendix A.11 contains detailed visualizations over the DAL cycle. Noticeably, both random baselines fall considerably below Dense, emphasizing that no trivial sparse solution is available.

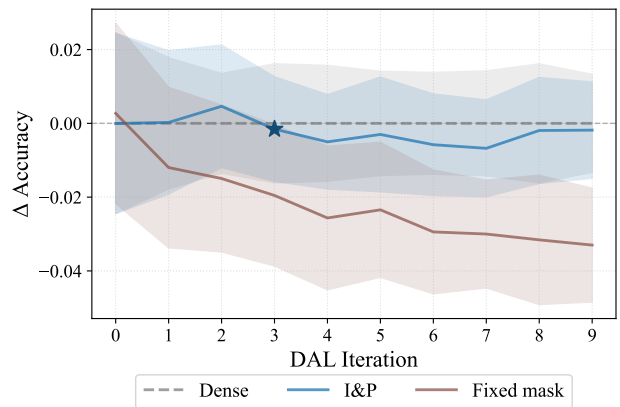


Figure 2: Fixed transfer mask vs. I&P on CIFAR-100 HB (Margin). Relative accuracy is reported w.r.t. Dense over 5 seeds. The $\star$ marks the iteration where I&P reaches $\approx 95\%$ sparsity, which corresponds to the sparsity of *fixed mask* at all iterations.

The preceding experiments use a moderate number ($A = 9$) of DAL iterations, which might hide longer cycle performance trends. Therefore, we also check a longer iteration cycle ($A = 20$) on Tiny-ImageNet. The results are summarized in Table 2. The longer cycle exposes no cumulative pruning penalty, indicating that I&P remains viable as the number of DAL rounds grows, which is validated by the statistical test.

Cross-iteration mask transferability. Zhang et al. (2021) have shown that masks can transfer across related settings, which questions the need for per-iteration re-discovery. To address this, we apply the standard (non-DAL) IMP on the initial labeled pool $D_L^{(0)}$ until only $(1 - s)$ active parameters remain. This *fixed mask* is applied throughout the remaining DAL iterations. Figure 2 compares this strategy against I&P on CIFAR-100 HB (Margin), and shows how both achieve similar initial accuracy. However, the *fixed mask* degrades steadily as more data is acquired. In contrast, I&P refines the mask at every DAL iteration maintaining near-Dense accuracy for the whole cycle.

4.2 COMPUTATIONAL COSTS ANALYSIS

Finetuning cost and mask quality. The purpose of the finetuning stage is to compensate for any catastrophic degradation in generalization induced by pruning, so that the acquisition function can exploit the pruned model in the subsequent selection step. For this to be viable, recovery must be achievable at negligible compute relative to main training; otherwise the computational benefits of sparse models are offset by a prohibitive retraining cost. We analyze finetuning costs as a direct probe of mask quality: a valid pruning signal should permit rapid re-convergence, whereas an uninformative mask should not. Table 3 reports finetuning epochs and convergence rate on Tiny-ImageNet. I&P re-converges within a few epochs on every run, indistinguishable from Dense finetuning. In contrast, Rand Prune fails to recover on more than 90% of runs and is terminated at the patience ceiling, confirming that random masks at the same sparsity do not preserve a trainable subnetwork. The same pattern holds for CIFAR-100, Imagewoof, and Places365. The consequences of omitting the finetune phase have been explored in Appendix A.6.

FLOPs Approximation. All computational savings reported in this work are *theoretical*; we do not measure wall-clock time on specific hardware (see Section 5 for discussion). We estimate multiply-accumulate operations (MACs) in a *mask-aware, per-layer* fashion rather than applying a single global scaling factor (Hoeffler et al., 2021), because the contribution of each pruned parameter depends on the layer type and the spatial dimensions of the intermediate feature maps at that stage. For MACs calculation details and a general scaling of acquisition function computation see Appendix A.8 and A.9, respectively.

Figure 3 visualizes the cumulative computational cost paired with achieved test accuracy on Tiny-ImageNet. I&P reaches the same test accuracy as the dense baseline while spending roughly half the computations across the full 20-iteration DAL cycle. Both random baselines land in between due to more training epochs from the exhausted patience φ budget (see Table 3), inflating their training cost to roughly 50% above that of I&P, while converging to substantially lower accuracy. The same accuracy vs MACs trend holds for CIFAR-100, Imagewoof and Places365 and across acquisition functions (see Appendix A.12).

4.3 ACTIVE FINETUNING

To test whether I&P is suitable for transfer learning, we evaluate an active finetuning scenario (Xie et al., 2023) on Places365. Model checkpoints pretrained on ImageNet are adapted to the target domain. This setting is particularly demanding for pruning: the pretrained features possess strong generalization potential, and aggressive weight removal risks catastrophic forgetting of the

Table 3: Training (T) and finetuning (FT) epochs per DAL iteration on Tiny-ImageNet, averaged across acquisition functions, DAL rounds, and seeds. *Conv.* is the fraction of trainings that re-reach the train-acc threshold before patience budget; values below 100% indicate runs terminated at the patience ceiling.

Train	T epochs	FT epochs	Conv. (%)
Dense	63.1 $\pm$ 16.6	3.3 $\pm$ 4.3	100.0
I&P (ours)	56.5 $\pm$ 19.6	3.8 $\pm$ 2.3	100.0
Rand Prune	80.7 $\pm$ 19.6	29.8 $\pm$ 4.0	9.5

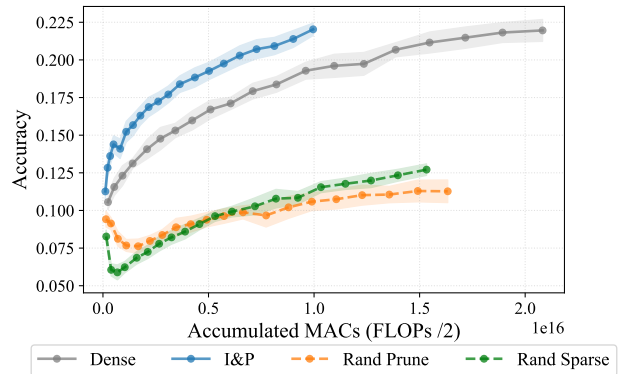


Figure 3: *Mean Accuracy with one std as a function of cumulative MACs calculated over 15 seeds with $S = \text{Margin}$ on Tiny-ImageNet. Each marker corresponds to one DAL iteration. Curves that stop at lower cumulative MAC values indicate a more efficient pipeline at comparable accuracy.*

Table 4: *Pretrained features survive pruning under active finetuning.* Classification accuracy [%] (mean $\pm$ std over 3 seeds) on Places365 with ImageNet pretrained backbone and Margin acquisition. Initial label pool of 5475 class-balanced samples with an annotation budget of 3650 over 9 iterations.

Architecture	Train	A_0	A_1	A_3	A_5	A_7	A_9
ResNet-50 (sup.)	Dense	21.49$\pm$0.28	24.96$\pm$0.35	28.70$\pm$0.34	31.23$\pm$0.30	32.78$\pm$0.17	34.20$\pm$0.09
	Rand Sparse	19.94 $\pm$ 0.36	22.72 $\pm$ 0.29	25.40 $\pm$ 0.17	26.24 $\pm$ 0.20	24.43 $\pm$ 0.08	26.28 $\pm$ 0.63
	I&P (ours)	21.89$\pm$0.07	25.48$\pm$0.33	28.70$\pm$0.31	30.36 $\pm$ 0.12	32.04 $\pm$ 0.13	33.16 $\pm$ 0.15
ConvNext v2 Tiny (ssl.)	Dense	18.96$\pm$0.30	22.92$\pm$0.19	26.21$\pm$0.77	27.61$\pm$1.21	27.16$\pm$4.03	30.44$\pm$0.52
	Rand Sparse	8.81 $\pm$ 0.70	10.69 $\pm$ 0.65	14.93 $\pm$ 0.78	17.64 $\pm$ 0.82	19.00 $\pm$ 0.11	20.93 $\pm$ 0.40
	I&P (ours)	18.38 $\pm$ 0.20	22.89$\pm$0.10	26.31$\pm$0.24	27.82$\pm$0.10	28.63$\pm$0.27	30.00$\pm$0.23
DeiT-Small (sup.)	Dense	31.99$\pm$0.48	33.99$\pm$0.26	35.56$\pm$0.08	34.85$\pm$0.47	34.82$\pm$0.26	35.61$\pm$0.30
	Rand Sparse	27.32 $\pm$ 0.31	26.92 $\pm$ 0.44	27.27 $\pm$ 0.30	27.29 $\pm$ 0.51	27.68 $\pm$ 0.31	28.62 $\pm$ 0.09
	I&P (ours)	31.92$\pm$0.21	33.55 $\pm$ 0.24	33.44 $\pm$ 0.28	33.84 $\pm$ 0.09	34.30 $\pm$ 0.07	34.94 $\pm$ 0.04
DINO ViT-S (ssl.)	Dense	17.72$\pm$0.43	21.53$\pm$0.34	25.21$\pm$0.30	27.41$\pm$0.17	27.20$\pm$1.24	29.38$\pm$1.08
	Rand Sparse	12.80 $\pm$ 0.20	15.34 $\pm$ 0.26	17.94 $\pm$ 0.08	18.76 $\pm$ 0.78	19.65 $\pm$ 0.26	21.63 $\pm$ 0.33
	I&P (ours)	17.85$\pm$0.27	21.52$\pm$0.29	24.29 $\pm$ 0.29	26.32 $\pm$ 0.29	27.64$\pm$0.03	27.46 $\pm$ 0.83

learned representations. We evaluate on four architectures and two training paradigms: ResNet-50 (He et al., 2016) and DeiT-Small (Touvron et al., 2021) with supervised ImageNet pretraining, and ConvNext v2 Tiny (Woo et al., 2023) and DINO ViT-S (Caron et al., 2021) with self-supervised pretraining. LTH discovery with magnitude pruning is significantly more difficult for ViTs than CNNs (Liu et al., 2024). To stabilize the discovery we keep the first 3 ViT blocks dense to stabilize features as they are especially sensitive for modification (Touvron et al., 2021). Other specialized LTH pruning signals for ViTs exist (Shen et al., 2023) and could be adopted seemingly.

On Places365 active finetuning (Table 4), I&P stays within an absolute margin of $\epsilon \approx 1\%$ of Dense across all four backbones, although the difference is larger than in the other settings. The residual gap is most visible on DeiT-Small and DINO ViT-S, yet I&P remains decisively above Rand Sparse on every architecture, confirming that viability stems from an appropriate choice of $\mathcal{C}$ and p_c rather than reduced capacity s alone. Seed variance is elevated throughout—most notably for Dense ConvNext v2, where per-seed deviations reach several percentage points—reflecting the limited budget of 3 seeds and cautioning against over-interpreting individual endpoint differences. Supervised ImageNet pretraining yields a more favourable starting point for the setting than the self-supervision.

5 DISCUSSION AND LIMITATIONS

Practical realizability of computational savings. All FLOP reductions reported in this work are theoretical estimates derived from the sparsity of the pruning mask. On current mainstream GPU accelerators, unstructured sparsity does not translate directly into proportional wall-clock speedups, because dense matrix-multiplication kernels cannot exploit arbitrary zero patterns efficiently (Hoeffler et al., 2021). Recent hardware generations have begun to close this gap: NVIDIA’s Ampere and Hopper architectures provide native support for 2:4 semi-structured sparsity, achieving near $2\times$ throughput for conforming patterns (Mishra et al., 2021). While the masks produced by I&P are fully unstructured, post-hoc conversion to 2:4 patterns or block-sparse layouts is an active area of research and could be applied as a deployment step. On CPU and edge devices, where inference relies on sparse linear-algebra libraries, the theoretical savings are directly realizable. We therefore view the FLOPs analysis as a proxy for the efficiency frontier as sparse hardware and software support continues to mature.

Empirical scope and domain limitations. Our evaluation is limited to image classification tasks. Although the structural correspondence between the DAL iterative training loop and IMP is task-agnostic in principle, the lottery ticket hypothesis itself is an empirical observation: a winning ticket is not guaranteed to exist for every architecture, dataset, or sparsity level. Whether the favorable ticket discovery we observe generalizes to other domains (object detection, natural language processing, tabular data) remains an open question that warrants dedicated investigation. Similarly, our experiments focus on unstructured magnitude pruning; extending the framework to structured pruning criteria could yield more hardware-friendly sparse models but may require different reactivation strategies and sparsity schedules.

Efficient selection of target sparsity. Most pruning methods require a target sparsity s as a core hyperparameter (Cheng et al., 2024). IMP-style approaches additionally specify a per-round pruning rate p_c that controls the

granularity of iterative mask refinement. The finetuning phase of I&P turns sparsity selection into a possible post-hoc search: from the converged model at the end of main training, any candidate sparsity s requires only applying a new mask and running the short finetuning phase with a reset learning rate schedule (Renda et al., 2020), while the expensive main training is shared across all candidates.

Synergies between DAL and LTH. Beyond the structural correspondence exploited by our method, several independent best practices in the DAL and LTH communities converge in ways that may further facilitate ticket discovery within an active learning loop. Distributional acquisition functions (Bae et al., 2024), which prioritize representative samples and have strong performance in initial DAL iterations (Hacohen et al., 2022), produce training sets that resemble the easy-to-learn subsets found by Paul et al. (2022) to improve lottery ticket discovery stability. Besides test accuracy, model quality has several facets that matter directly for acquisition. Winning tickets have been reported to exhibit improved uncertainty calibration (Arora et al., 2023) and stronger out-of-distribution sensitivity than their dense counterparts (Chen et al., 2022). This translates into cleaner signals for uncertainty-based criteria such as Margin or BADGE. The same works also point to more faithful learned representations, a property that should benefit coreset methods whose selections depend on feature-space geometry. Using the pruned model, rather than the dense checkpoint, to score the pool in the subsequent DAL round may thus improve the informativeness of acquired batches at no additional training cost.

6 CONCLUSION

We presented *Improve & Prune* (I&P), a method that exploits the structural correspondence between the iterative re-training loop of pool-based active learning and iterative magnitude pruning. By appending a single pruning step to each DAL iteration, the method is able to uncover *winning tickets* at nearly no additional training cost and without modification to the training procedure or acquisition function. Across four image classification datasets, six acquisition functions, and both CNN and Transformer architectures, sparse models produced by I&P consistently match the accuracy of their dense counterparts while reducing FLOPs for both training and acquisition function sampling. In particular, we observe that a fixed mask discovered through IMP early in the DAL cycle degrades as the labeled set grows, underscoring the need for expansion and contraction in each iteration of I&P to keep the sparsity pattern aligned with the evolving data distribution. Together, these results provide the first evidence that winning tickets can be discovered even under a non-stationary data regime.

ACKNOWLEDGMENTS

This research was partially funded by the Austrian Science Fund (FWF) 10.55776/COE12. The authors sincerely thank their colleagues at Know-Center and the members of the CLAR group at the Institute of Visual Computing for the many insightful discussions, helpful feedback, and support that contributed to this work. We further acknowledge the Institute Human-Centered Computing for kindly providing essential compute resources and the Graz Center for Machine Learning (GraML) for providing an inspiring interdisciplinary research environment.

REFERENCES

- Viplove Arora, Daniele Irto, Sebastian Goldt, and Guido Sanguinetti. Quantifying lottery tickets under label noise: accuracy, calibration, and complexity. In *Uncertainty in Artificial Intelligence*, pp. 88–98. PMLR, 2023.
- Jordan Ash and Ryan P Adams. On warm-starting neural network training. *Advances in neural information processing systems*, 33:3884–3894, 2020.
- Jordan T. Ash, Chicheng Zhang, Akshay Krishnamurthy, John Langford, and Alekh Agarwal. Deep batch active learning by diverse, uncertain gradient lower bounds. In *International Conference on Learning Representations*, 2020.
- Jordan T. Ash, Surbhi Goel, Akshay Krishnamurthy, and Sham Kakade. Gone fishing: Neural active learning with fisher embeddings. *Advances in Neural Information Processing Systems*, 34:8927–8939, 2021.
- Wonho Bae, Junhyug Noh, and Danica J Sutherland. Generalized coverage for more robust low-budget active learning. In *European Conference on Computer Vision*, pp. 318–334. Springer, 2024.
- Wonho Bae, Danica J Sutherland, and Gabriel L Oliveira. Uncertainty herding: One active learning method for all label budgets. In *ICLR*, 2025.

- Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 9650–9660, 2021.
- Tianlong Chen, Zhenyu Zhang, Jun Wu, Randy Huang, Sijia Liu, Shiyu Chang, and Zhangyang Wang. Can you win everything with a lottery ticket? *Transactions on Machine Learning Research*, 2022. ISSN 2835-8856.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pp. 1597–1607. PmLR, 2020.
- Hongrong Cheng, Miao Zhang, and Javen Qinfeng Shi. A survey on deep neural network pruning: Taxonomy, comparison, analysis, and recommendations. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(12): 10558–10578, 2024.
- Gui Citovsky, Giulia DeSalvo, Claudio Gentile, Lazaros Karydas, Anand Rajagopalan, Afshin Rostamizadeh, and Sanjiv Kumar. Batch active learning at scale. *Advances in Neural Information Processing Systems*, 34:11933–11944, 2021.
- Arnav Mohanty Das, Gantavya Bhatt, Megh Manoj Bhalerao, Vianne R. Gao, Rui Yang, and Jeff Bilmes. Accelerating batch active learning using continual learning techniques. *Transactions on Machine Learning Research*, 2023.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *Computer Vision and Pattern Recognition, 2009. CVPR 2009. IEEE Conference on*, pp. 248–255. IEEE, 2009.
- Utku Evci, Trevor Gale, Jacob Menick, Pablo Samuel Castro, and Erich Elsen. Rigging the lottery: Making all tickets winners. In *International conference on machine learning*, pp. 2943–2952. PMLR, 2020.
- Jonathan Frankle and Michael Carbin. The lottery ticket hypothesis: Finding sparse, trainable neural networks. In *International Conference on Learning Representations*, 2019.
- Jonathan Frankle, Gintare Karolina Dziugaite, Daniel M Roy, and Michael Carbin. Stabilizing the lottery ticket hypothesis. *arXiv preprint arXiv:1903.01611*, 2019.
- Jonathan Frankle, Gintare Karolina Dziugaite, Daniel Roy, and Michael Carbin. Linear mode connectivity and the lottery ticket hypothesis. In Hal Daumé III and Aarti Singh (eds.), *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pp. 3259–3269. PMLR, 13–18 Jul 2020a.
- Jonathan Frankle, David J Schwab, and Ari S Morcos. The early phase of neural network training. In *International Conference on Learning Representations*, 2020b.
- Yarin Gal, Riashat Islam, and Zoubin Ghahramani. Deep bayesian active learning with image data. In *International conference on machine learning*, pp. 1183–1192. PMLR, 2017.
- Edrina Gashi, Jiankang Deng, and Ismail Elezi. Deep active learning: A reality check. *Pattern Recognition Letters*, 2025.
- Guy Hacohen, Avihu Dekel, and Daphna Weinshall. Active learning on a budget: Opposite strategies suit high and low budgets. In *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pp. 8175–8195. PMLR, 17–23 Jul 2022.
- Song Han, Jeff Pool, John Tran, and William J Dally. Learning both weights and connections for efficient neural networks. In *Advances in Neural Information Processing Systems*, volume 28, 2015.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 770–778, 2016.
- Torsten Hoeftler, Dan Alistarh, Tal Ben-Nun, Nikoli Dryden, and Alexandra Peste. Sparsity in deep learning: Pruning and growth for efficient inference and training in neural networks. *Journal of Machine Learning Research*, 22(241): 1–124, 2021.
- Jeremy Howard. Imagewoof: a subset of 10 classes from imagenet that aren’t so easy to classify, March 2019. URL <https://github.com/fastai/imagenette#imagewoof>.

- Denis Huseljic, Paul Hahn, Marek Herde, Christoph Sandrock, and Bernhard Sick. Boss: A best-of-strategies selector as an oracle for deep active learning. *arXiv preprint arXiv:2603.13109*, 2026.
- Leonardo Iurada, Marco Ciccone, and Tatiana Tommasi. Finding lottery tickets in vision models via data-driven spectral foresight pruning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 16142–16151, June 2024.
- Yoon-Yeong Kim, Youngjae Cho, Joonho Jang, Byeonghu Na, Yeongmin Kim, Kyungwoo Song, Wanmo Kang, and Il-Chul Moon. SAAL: Sharpness-aware active learning. In Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett (eds.), *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 16424–16440. PMLR, 23–29 Jul 2023.
- Andreas Kirsch, Joost Van Amersfoort, and Yarin Gal. Batchbald: Efficient and diverse batch acquisition for deep bayesian active learning. *Advances in neural information processing systems*, 32, 2019.
- Alex Krizhevsky, Geoffrey Hinton, et al. *Learning multiple layers of features from tiny images*. Toronto, ON, Canada, 2009.
- Namhoon Lee, Thalaiyasingam Ajanthan, and Philip HS Torr. SNIP: Single-shot network pruning based on connection sensitivity. In *International Conference on Learning Representations*, 2019.
- Dongyuan Li, Zhen Wang, Yankai Chen, Renhe Jiang, Weiping Ding, and Manabu Okumura. A survey on deep active learning: Recent advances and new frontiers. *IEEE Transactions on Neural Networks and Learning Systems*, 36(4): 5879–5899, 2024.
- Bohan Liu, Zijie Zhang, Peixiong He, Zhensen Wang, Yang Xiao, Ruimeng Ye, Yang Zhou, Wei-Shinn Ku, and Bo Hui. A survey of lottery ticket hypothesis. *arXiv preprint arXiv:2403.04861*, 2024.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019.
- Carsten T. Lüth, Till J. Bungert, Lukas Klein, and Paul F. Jaeger. Navigating the pitfalls of active learning evaluation: A systematic framework for meaningful performance assessment. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- Seiji Maekawa, Dan Zhang, Hannah Kim, Sajjadur Rahman, and Estevam Hruschka. Low-resource interactive active labeling for fine-tuning language models. In *Findings of the association for computational linguistics: EMNLP 2022*, pp. 3230–3242, 2022.
- Asit Mishra, Jorge Albericio Latorre, Jeff Pool, Darko Stosic, Dusan Stosic, Ganesh Venkatesh, Chong Yu, and Paulius Micikevicius. Accelerating sparse deep neural networks. *arXiv preprint arXiv:2104.08378*, 2021.
- Hesham Mostafa and Xin Wang. Parameter efficient training of deep convolutional neural networks by dynamic sparse reparameterization. In Kamalika Chaudhuri and Ruslan Salakhutdinov (eds.), *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pp. 4646–4655. PMLR, 09–15 Jun 2019.
- Rob Munro. *Human-in-the-Loop Machine Learning: Active learning and annotation for human-centered AI*. Manning, 2021.
- Mansheej Paul, Brett Larsen, Surya Ganguli, Jonathan Frankle, and Gintare Karolina Dziugaite. Lottery tickets on a data diet: Finding initializations with sparse trainable networks. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information Processing Systems*, volume 35, pp. 18916–18928. Curran Associates, Inc., 2022.
- Hannah Pinson. It’s not a lottery, it’s a race: Understanding how gradient descent adapts the network’s capacity to the task, 2026.
- Alex Renda, Jonathan Frankle, and Michael Carbin. Comparing rewinding and fine-tuning in neural network pruning. In *International Conference on Learning Representations*, 2020.
- Andrew I Schein, Alexandrin Popescul, Lyle H Ungar, and David M Pennock. Methods and metrics for cold-start recommendations. In *Proceedings of the 25th annual international ACM SIGIR conference on Research and development in information retrieval*, pp. 253–260, 2002.

- Ozan Sener and Silvio Savarese. Active learning for convolutional neural networks: A core-set approach. In *International Conference on Learning Representations*, 2018.
- Burr Settles. *Active learning literature survey*. University of Wisconsin-Madison Department of Computer Sciences, 2009.
- Xuan Shen, Zhenglun Kong, Minghai Qin, Peiyan Dong, Geng Yuan, Xin Meng, Hao Tang, Xiaolong Ma, and Yanzhi Wang. Data level lottery ticket hypothesis for vision transformers. In Edith Elkind (ed.), *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence, IJCAI-23*, pp. 1378–1386. International Joint Conferences on Artificial Intelligence Organization, 8 2023.
- Wuxuan Shi and Mang Ye. Prototype reminiscence and augmented asymmetric knowledge aggregation for non-exemplar class-incremental learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 1772–1781, 2023.
- Hidekazu Tanaka, Daniel Kunin, Daniel LK Yamins, and Surya Ganguli. Pruning neural networks without any data by iteratively conserving synaptic flow. In *Advances in Neural Information Processing Systems*, volume 33, pp. 6377–6389, 2020.
- Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. In *International conference on machine learning*, pp. 10347–10357. PMLR, 2021.
- Akim Tsvigun, Artem Shelmanov, Gleb Kuzmin, Leonid Sanochkin, Daniil Larionov, Gleb Gusev, Manvel Avetisyan, and Leonid Zhukov. Towards computationally feasible deep active learning. In *Findings of the Association for Computational Linguistics: NAACL 2022*, pp. 1198–1218, July 2022.
- Chaoqi Wang, Guodong Zhang, and Roger Grosse. Picking winning tickets before training by preserving gradient flow. In *International Conference on Learning Representations*, 2020.
- Yifeng Wang, Xueying Zhan, and Siyu Huang. AutoAL: Automated active learning with differentiable query strategy search. In *Forty-second International Conference on Machine Learning*, 2025.
- Thorben Werner, Johannes Burchert, Maximilian Stubbemann, and Lars Schmidt-Thieme. A cross-domain benchmark for active learning. In *The Thirty-eight Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2024.
- Tomasz Wojnar, Mikołaj Janusz, Luca Benini, Yawei Li, and Kamil Adamczewski. How many does it take to prune a network: Comparing one-shot vs. iterative pruning regimes. In *Workshop on Machine Learning and Compression, NeurIPS 2024*, 2024.
- Sanghyun Woo, Shoubhik Debnath, Ronghang Hu, Xinlei Chen, Zhuang Liu, In So Kweon, and Saining Xie. Convnext v2: Co-designing and scaling convnets with masked autoencoders. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 16133–16142, 2023.
- Yichen Xie, Han Lu, Junchi Yan, Xiaokang Yang, Masayoshi Tomizuka, and Wei Zhan. Active finetuning: Exploiting annotation budget in the pretraining-finetuning paradigm. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 23715–23724, 2023.
- Haoran You, Chaojian Li, Pengfei Xu, Yonggan Fu, Yue Wang, Xiaohan Chen, Yingyan Lin, Zhangyang Wang, and Richard G. Baraniuk. Drawing early-bird tickets: Toward more efficient training of deep networks. In *International Conference on Learning Representations*, 2020.
- Jifan Zhang, Shuai Shao, saurabh verma, and Robert D Nowak. Algorithm selection for deep active learning with imbalanced datasets. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- Zhenyu Zhang, Xuxi Chen, Tianlong Chen, and Zhangyang Wang. Efficient lottery ticket finding: Less data is more. In *International Conference on Machine Learning*, pp. 12380–12390. PMLR, 2021.
- Kang Zhao, Tao Yuan, Han Bao, Zhenfeng Su, Chang Gao, Zhaofeng Sun, Zichen Liang, Liping Jing, and Jianfei Chen. Beyond 2: 4: exploring v: N: M sparsity for efficient transformer inference on gpus. *arXiv preprint arXiv:2410.16135*, 2024.
- Bolei Zhou, Agata Lapedriza, Aditya Khosla, Aude Oliva, and Antonio Torralba. Places: A 10 million image database for scene recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2017.

A APPENDIX

A.1 METHOD ALGORITHM

Algorithm 1 gives the full I&P procedure in pseudo-code, in line with the four stages of the pipeline overview in Figure 1. Each DAL iteration (j) performs:

1. *Masked initialization* (lines 5-6): reactivate a fraction p_{react} of previously pruned parameters via $\mathcal{R}$ and reload θ_{init} under the relaxed mask $M_{\text{init}}^{(j)}$.
2. *Model training* (line 7): an new model on the current labeled pool $D_L^{(j)}$ until the convergence criterion is met, yielding $\theta_K^{(j)}$.
3. *Prune and finetune* (lines 8-9): update the mask via $\mathcal{C}$ by zeroing the lowest-magnitude p_c percentage of entries subject to the minimum active fraction s , and run a short finetuning phase of at most φ epochs to compensate for the function drift induced by pruning.
4. *Acquisition function* (lines 15-18): score the unlabeled pool $D_U^{(j)}$ with the sparse finetuned model through $\mathcal{S}$, query the oracle, and update the labeled and unlabeled partitions accordingly.

The optional rewind block (lines 11-13) allows θ_{init} to be replaced by an early training checkpoint $\theta_r^{(0)}$, recovering late rewinding proposed by Frankle et al. (2019) as a special case.

Algorithm 1 *Improve & Prune* (I&P)

- 1: **Input:** Initial $D_L^{(0)}$ and $D_U^{(0)}$, initialization θ_{init} , DAL iterations A , target sparsity s , Reactivation function $\mathcal{R}$, Pruning function $\mathcal{C}$, Acquisition function $\mathcal{S}$, pruning rate p_c , reactivation rate p_r
 - 2: **Optional:** rewind epoch $r = 0$; $M^{(0)} = \mathbf{1}$
 - 3:
 - 4: **for** $j = 0$ to A **do**
 - 5: $M^{(j)} \leftarrow \mathcal{R}(M^{(j)}; p_r)$
 - 6: $\theta^{(j)} \leftarrow \theta_{\text{init}} \odot M^{(j)}$
 - 7: $\theta_K^{(j)} \xleftarrow{\text{train}} f(\mathbf{x}; \theta^{(j)})$ on $D_L^{(j)}$
 - 8: $M^{(j+1)} \leftarrow \mathcal{C}(M^{(j)}; \theta_K^{(j)}; p_c; s)$
 - 9: $\tilde{\theta}_{K+\varphi}^{(j)} \xleftarrow{\text{finetune}} f(\mathbf{x}; \theta_K^{(j)} \odot M^{(j+1)})$ on $D_L^{(j)}$
 - 10:
 - 11: **if** $j = 0$ **and** $r > 0$ **then**
 - 12: $\theta_{\text{init}} \leftarrow \theta_r^{(0)}$
 - 13: **end if**
 - 14:
 - 15: **if** $j \neq A$ **then**
 - 16: $D_A^{(j)} \leftarrow \mathcal{S}(\tilde{\theta}_{K+\varphi}^{(j)}; D_U^{(j)})$
 - 17: $D_L^{(j+1)} = D_L^{(j)} \cup D_A^{(j)}$ **and** $D_U^{(j+1)} = D_U^{(j)} \setminus D_A^{(j)}$
 - 18: **end if**
 - 19: **end for**
-

Reduction to standard DAL and IMP. I&P subsumes both of its parent protocols, DAL and LTH, as special cases of Algorithm 1, which clarifies the structural correspondence between the two loops and pinpoints where the computational savings originate. In either reduction, the mask reactivation (line 5) and the finetuning phase (lines 9) are dropped, as neither operation is part of the respective baseline. A *standard DAL loop* is recovered by fixing $M_{\text{init}}^{(j)} = \mathbf{1}$ throughout and removing the pruning step (line 8) together with the rewind selection (lines 11-13), so that every iteration trains a dense model from the same initialization and passes it directly to the acquisition function. Conversely, a

standard IMP procedure is obtained by freezing the training data at $D_L^{(j)} = D_L^{(0)}$ for all j and removing the acquisition update (lines 15–18): the loop then reduces to repeated train-and-prune rounds on a fixed dataset, exactly matching the original LTH formulation of Frankle & Carbin (2019).

A.2 RESNET-18 BACKBONE ADAPTATIONS

The standard ResNet-18 stem is designed for 224×224 input resolutions and down-samples the spatial resolution before the first residual block. Applying this stem unchanged to substantially smaller inputs would collapse the feature maps prematurely. We therefore reduce the down-sampling as (Shi & Ye, 2023) in the stem for lower resolutions while keeping all residual blocks and the final 512-dimensional embedding identical. Table 5 lists the per-resolution configurations; convolution padding is always set to $\lfloor K/2 \rfloor$.

Table 5: ResNet-18 stem adaptations dependent on the targeted input resolution. All variants share identical network topology and penultimate feature dimensionality (512); differences are restricted to the input stem and initial pooling

Input Scale	CIFAR 32×32	Tiny-ImageNet 64×64	ImageNet 224×224
Conv kernel size	3×3	7×7	7×7
Conv stride	1	2	2
Conv padding	1	3	3
Max-pool	—	—	3×3, stride 2, pad 1
Feature map after stem	32×32	32×32	56×56

A.3 WINNING-TICKET SIGNIFICANCE TESTING

We assess whether a pruned method qualifies as a winning ticket with respect to the Dense reference. Tests are performed for each acquisition function and dataset separately with a one-sided paired Wilcoxon test, no power corrections are applied. H_1 states that the pruned variant is non-inferior to Dense up to a tolerance of $\epsilon = -0.005$ AULC:

$$H_1 : \text{AULC}_{\text{Dense}} - \text{AULC}_{\text{method}} < \epsilon, \quad (2)$$

where AULC denotes the area under the accuracy-vs-labels learning curve across the DAL iterations of a single seeded run. The AULC summarizes the entire learning trajectory in a single scalar and is an aggregate for active learning benchmarks (Werner et al., 2024). Concretely, let $n_0 < n_1 < \dots < n_A$ denote the cumulative number of labeled samples after each of the $A+1$ DAL iterations (including the initial pool) and let a_i be the corresponding test accuracy. The AULC is the trapezoidal integral of the accuracy–labels curve, normalized by the label range:

$$\text{AULC} = \frac{1}{n_A - n_0} \sum_{i=1}^A \frac{a_{i-1} + a_i}{2} (n_i - n_{i-1}). \quad (3)$$

Averaging over DAL rounds rather than reporting the final-iteration accuracy alone makes the test sensitive to trajectory-level differences, not just to the endpoint.

We employ a one-sided seed-paired test on the $\text{AULC}_{\text{Dense}} - \text{AULC}_{\text{method}}$ differences. Paired seeds imply identical initialization and initial data splits. The Wilcoxon test makes no assumption on the distribution of the AULC differences. Rejection at $p < 0.05$ means that significant underperformance of the method relative to the dense baseline cannot be established at the seed-level variability; consequently the method is then marked as a *winning ticket*. We omit values for Places365 as 3 seeds provide insufficient power for the statistical test. The non-inferiority margin ϵ is a deliberate design choice with no standard value, and the verdict can be sensitive to it: in the CIFAR-100 HB regime, the few cases that do not pass at the strict $\epsilon = 0.005$ exhibit a mean paired AULC gap to Dense of ≈ 0.007 , and relaxing the tolerance to the still-small $\epsilon = 0.01$ recovers non-inferiority. We report the strict setting throughout to remain conservative.

A.4 HYPERPARAMETER SENSITIVITY

We probe the three key hyperparameters of I&P, e.g. pruning rate p_c , reactivation rate p_r and target sparsity s on CIFAR-100 with margin sampling with 3 seeds: the per-round pruning rate p_c (Table 6) and the target sparsity, expressed as the retained active-parameter fraction $1 - s$ (Table 7) together with the reactivation rate jointly control how

the resulting sparsity evolves across the DAL sequence. Across both sweeps, I&P showed stable performance with limited sensitivity to p_c and p_r . Only under extreme pruning conditions with roughly 99.95% of all original parameters removed, the accuracy of the model starts to collapse.

Table 6: *Per-round pruning-rate sweep*. Final classification accuracy A_9 on CIFAR-100 (Margin, 3 seeds) as a function of the per-round pruning rate p_c .

Budget	Method	Pruning rate p_c				
		0.50	0.66	0.75	0.85	0.95
LB	Dense	18.66$\pm$1.68				
	Rand Sparse	15.34 $\pm$ 0.89	13.02 $\pm$ 1.28	13.44 $\pm$ 0.90	12.66 $\pm$ 0.52	13.32 $\pm$ 0.48
	Rand Prune	16.03 $\pm$ 0.78	11.59 $\pm$ 1.56	12.11 $\pm$ 1.26	12.64 $\pm$ 0.17	13.16 $\pm$ 0.72
	I&P (ours)	19.15$\pm$1.27	18.66$\pm$0.70	18.93$\pm$1.48	18.94$\pm$0.84	19.22$\pm$0.20
HB	Dense	53.27$\pm$1.13				
	Rand Sparse	46.26 $\pm$ 0.50	42.16 $\pm$ 0.47	41.66 $\pm$ 0.34	41.63 $\pm$ 1.39	42.10 $\pm$ 0.49
	Rand Prune	27.81 $\pm$ 3.40	17.04 $\pm$ 1.71	17.00 $\pm$ 0.34	17.42 $\pm$ 1.38	17.44 $\pm$ 1.36
	I&P (ours)	53.13$\pm$0.86	52.17$\pm$1.01	52.60$\pm$0.83	52.05$\pm$0.97	52.31$\pm$0.59

Table 7: *Target-sparsity sweep*. Final classification accuracy A_9 on CIFAR-100 (Margin, 3 seeds) as a function of the retained active-parameter fraction $1 - s$ and the coupled reactivation budget p_r ; the per-round pruning rate is held fixed at $p_c = 0.66$. Bold marks I&P runs that match or exceed Dense within one standard deviation.

Method	Active fraction	Reactivation	A_9 [%]	
	$1 - s$	p_r	LB	HB
Dense	X	X	18.66$\pm$1.68	53.27$\pm$1.13
I&P (ours)	0.0005	0.001	14.94 $\pm$ 0.25	27.59 $\pm$ 18.37
	0.001	0.002	17.73$\pm$0.51	45.77 $\pm$ 0.24
	0.0025	0.005	19.23$\pm$0.55	48.96 $\pm$ 0.18
	0.005	0.010	18.77$\pm$0.77	48.97 $\pm$ 1.08
	0.01	0.020	18.54$\pm$0.66	49.42 $\pm$ 1.11
	0.025	0.050	19.01$\pm$0.83	51.18 $\pm$ 1.59
	0.05	0.100	18.66$\pm$0.70	52.17$\pm$1.01
	0.07	0.100	18.66$\pm$0.70	52.17$\pm$1.01
	0.10	0.100	19.17$\pm$1.22	52.52$\pm$1.52
	0.15	0.100	18.68$\pm$1.04	52.68$\pm$0.81
	0.20	0.100	19.00$\pm$1.39	53.04$\pm$0.31

A.5 COMPARISON TO PRUNING-AT-INITIALIZATION AND DYNAMIC SPARSE TRAINING

I&P derives its mask from a trained dense model and refines it across DAL iterations. Two other competing paradigms avoid dense train-and-prune cycles altogether. *Pruning at initialization* (PAI) fixes a sparse mask *before* any training. Three common pruning strategies used for the fixed mask are: connection sensitivity (SNIP, Lee et al., 2019), gradient-flow preservation (GraSP, Wang et al., 2020), or iterative synaptic-flow conservation (SynFlow, Tanaka et al., 2020). Further, *dynamic sparse training* (RigL, Evci et al., 2020) maintains a fixed sparsity budget throughout training while periodically regrowing and pruning connections based on gradient magnitude. Both families achieve the target sparsity s without a dense training phase within a single AL iteration.

Table 8 compares these methods against I&P under the Margin acquisition function on CIFAR-100, in both the low-budget (LB) and high-budget (HB) regimes. All sparse methods are matched to the same target sparsity s and evaluated within the identical DAL loop; a major difference is **how** and **when** the pruning mask is obtained. PAI masks are recomputed from scratch at the **start** of each AL iteration, whereas RigL computes it **during** network training and I&P performs the pruning **after** initial iteration training and before finetuning.

RigL. Dynamic sparse training surpasses Dense in the high-budget regime, where enough labeled data is available to jointly fit the mask topology and the parameters. This benefit carries two practical costs. First, the periodic regrow

Table 8: *Comparison to pruning-at-initialization and dynamic sparse training.* Final classification accuracy [%] on CIFAR-100 with the Margin acquisition function, for the low-budget (LB) and high-budget (HB) regimes. All sparse methods are pruned to the same target sparsity $s = 0.95\%$. Prune paradigm column defines at which point the pruning is performed. Pruning at Initialization (PAI), while joint optimizes the pruning mask and the network training simultaneously.

Method	Prune	Margin LB	Margin HB
Dense	X	17.45 ± 2.07	52.48 ± 1.33
SNIP	PAI	16.82 ± 2.36	49.91 ± 1.04
SynFlow	PAI	16.31 ± 1.95	50.54 ± 1.67
GraSP	PAI	13.02 ± 1.04	48.39 ± 1.27
RigL	while training	14.52 ± 0.81	54.25 ± 1.07
One-Shot	posthoc	17.52 ± 2.51	52.18 ± 1.14
I&P (ours)	iter. posthoc	17.52 ± 1.80	52.29 ± 1.30

step requires the gradient over the *inactive* weights, so every update reverts to a dense backward pass even though the forward path is sparse. Second, the mask keeps shifting throughout training, which obstructs the structured patterns – in particular the N:M masks of [Mishra et al. \(2021\)](#) – that translate unstructured sparsity into measurable hardware speedups; I&P, whose mask stabilizes within a DAL iteration, is comparatively well-aligned with such patterns. The ranking inverts at low budget. With few labels, the externally imposed magnitude mask of I&P appears to act as a regularizer, while RigL’s joint mask–weight optimization is more prone to overfit the small labeled pool.

SNIP, SynFlow, GraSP. The three pruning at initialization criteria show moderate underperformance relative to Dense and I&P at both budgets while remaining clearly above the random sparsity baselines reported in Table 1. This matches the broader evidence collected by [Hoefer et al. \(2021\)](#) that parameter importance estimated *before* training is a weak proxy for importance after convergence: the saliency landscape shifts as the network fits the data, so a mask fixed at initialization cannot capture the structure that only emerges from training.

One-Shot Pruning. Post-hoc one-shot pruning reaches accuracy parity with Dense and I&P at both budgets, indicating that magnitude-based pruning is competitive once the model has been trained. Because the mask is derived only after training, however, every DAL iteration trains the network in its dense form and cannot exploit the sparse-kernel savings that I&P realizes from the second AL round onward. Iterative pruning has also been reported to outperform one-shot pruning at very high sparsities ([Wojnar et al., 2024](#)), suggesting that the parity observed at our target sparsity (95%) may not extend to higher sparsities.

A.6 SECOND-STAGE TRAINING COST AND RECOVERY

Table 9 quantifies the additional training cost introduced by the finetuning phase. The *convergence rate* records whether the pruned model re-reached the training-accuracy threshold within the patience φ , making it a direct indicator of whether the pruned model remains trainable to its original performance level. Across all settings, I&P re-converges quickly (100% on CIFAR-100, Imagewoof, Tiny-ImageNet, and Places365 except DINO), using a marginal fraction of the main training budget. The overhead remains well below $< 10\%$ in almost all settings and is indistinguishable from the Dense dual-stage baseline, that skips the pruning step and terminates on the next epoch that is again above the early stopping criterion.

In sharp contrast, Rand Prune exhibits the opposite pattern: its finetuning phase rarely re-converges within the patience φ ceiling in the vast majority of runs. High variance in finetuning epoch is predominantly determined by non converging trainings. Read together, the two observations tell a single story: finetuning is inexpensive. It is cheap for I&P precisely because the magnitude-based pruning preserves the performance of the resulting subnetwork while random decision fail to.

The only outlier in the table is DINO ViT-S on Places365, where both the dense baseline (76.7%) and I&P (86.7%) occasionally fail to converge within the patience budget. This reflects a property of an optimization problem of the network and an inadequate early stopping criteria.

In Figure 4, the triangle markers depict Dense and I&P with their finetuning phase accounted as free (finetune MACs = 0). Table 10 reports the corresponding final accuracy when the finetune phase is omitted altogether: Dense is essentially unaffected, whereas I&P loses $\approx 1\%$ absolute accuracy, indicating that the finetune phase is relevant for recovering the function drift induced by pruning.

Table 9: Finetuning training cost across all experimental settings. Training (T) and Finetuning (F) columns report the mean ($\pm$ std) number of training epochs per DAL iteration, averaged across acquisition functions, DAL rounds, and seeds. *Conv.* gives the fraction of iterations that re-reached the training-accuracy convergence threshold before hitting the patience budget; values below 100% indicate runs that were terminated at the patience ceiling.

DAL Setting	Patience	Train	T. epochs	F. epochs	Conv. (%)
CIFAR-100 LB	$\varphi = 30$	Dense	51.1 $\pm$ 18.8	3.0 $\pm$ 3.5	100.0
		I&P (ours)	43.1 $\pm$ 16.0	2.6 $\pm$ 3.1	100.0
		Rand Prune	80.0 $\pm$ 28.0	29.6 $\pm$ 4.4	11.0
CIFAR-100 HB	$\varphi = 30$	Dense	80.1 $\pm$ 16.3	1.8 $\pm$ 1.7	100.0
		I&P (ours)	82.6 $\pm$ 18.8	1.9 $\pm$ 1.0	100.0
		Rand Prune	124.3 $\pm$ 36.1	30.5 $\pm$ 1.7	8.0
Imagewoof LB	$\varphi = 60$	Dense	82.7 $\pm$ 22.5	7.8 $\pm$ 7.9	100.0
		I&P (ours)	61.5 $\pm$ 21.3	4.2 $\pm$ 3.1	100.0
		Rand Prune	104.4 $\pm$ 30.0	56.4 $\pm$ 10.0	22.7
Imagewoof HB	$\varphi = 60$	Dense	103.8 $\pm$ 20.3	5.2 $\pm$ 5.3	100.0
		I&P (ours)	95.7 $\pm$ 21.4	5.8 $\pm$ 4.1	100.0
		Rand Prune	132.6 $\pm$ 32.7	57.6 $\pm$ 8.5	17.5
Tiny-ImageNet	$\varphi = 30$	Dense	63.1 $\pm$ 16.6	3.3 $\pm$ 4.3	99.9
		I&P (ours)	56.5 $\pm$ 19.6	3.8 $\pm$ 2.3	100.0
		Rand Prune	80.7 $\pm$ 19.6	29.8 $\pm$ 4.0	9.5
Places365 ResNet-50 (sup.)	$\varphi = 15$	Dense	35.6 $\pm$ 6.1	1.0 $\pm$ 0.2	100.0
		I&P (ours)	34.4 $\pm$ 5.8	1.0 $\pm$ 0.0	100.0
Places365 ConvNext v2 Tiny (ssl.)	$\varphi = 15$	Dense	28.2 $\pm$ 6.2	1.0 $\pm$ 0.0	100.0
		I&P (ours)	28.5 $\pm$ 5.5	1.6 $\pm$ 0.8	100.0
Places365 DeiT-Small (sup.)	$\varphi = 15$	Dense	22.4 $\pm$ 9.7	1.4 $\pm$ 1.4	100.0
		I&P (ours)	23.9 $\pm$ 9.5	2.4 $\pm$ 1.1	100.0
Places365 DINO ViT-S (ssl.)	$\varphi = 15$	Dense	41.1 $\pm$ 9.8	4.9 $\pm$ 6.2	76.7
		I&P (ours)	41.7 $\pm$ 9.1	3.1 $\pm$ 5.1	86.7

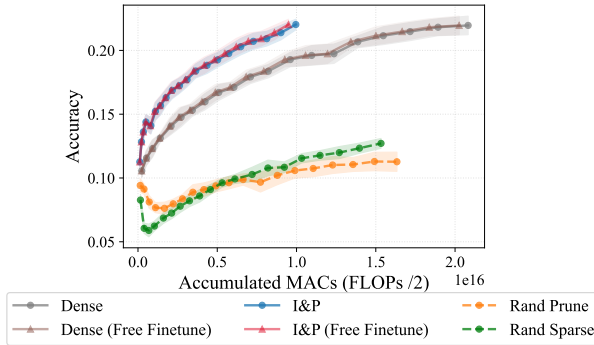


Figure 4: *Mean Accuracy with one std as a function of cumulative MACs calculated over 15 seeds with $S = \text{Margin}$ on Tiny-ImageNet.* Triangle markers do not account for the needed finetune MACs.

Table 10: *Finetuning ablation.* Final classification accuracy A_9 on CIFAR-100 (Margin, 3 seeds) with and without the per-round finetuning phase. Dense is essentially unaffected, whereas removing finetuning from I&P drops by $\approx 1\%$.





Method	A_9 with FT	A_9 without FT
Dense	53.27 $\pm$ 1.13	53.20 $\pm$ 0.76
Rand Sparse	42.16 $\pm$ 0.46	41.11 $\pm$ 3.24
Rand Prune	17.04 $\pm$ 1.71	9.93 $\pm$ 0.01
I&P (ours)	52.17 $\pm$ 1.01	51.20 $\pm$ 0.76

A.7 MASK TRAJECTORIES ACROSS ACQUISITION FUNCTIONS

To compare the sparse subnetworks discovered under different acquisition functions, we quantify the overlap of their final pruning masks with the *Jaccard similarity* J . Let $M_a, M_b \in \{0, 1\}^d$ denote two binary masks over the flattened d prunable parameters, where $M_{\cdot,i} = 1$ marks an active (retained) weight. The Jaccard similarity is the size of the intersection of the active supports over the size of their union,

$$J(M_a, M_b) = \frac{|M_a \cap M_b|}{|M_a \cup M_b|} = \frac{\sum_i \mathbf{1}[M_{a,i} = 1 \wedge M_{b,i} = 1]}{\sum_i \mathbf{1}[M_{a,i} = 1 \vee M_{b,i} = 1]}, \quad (4)$$

with $J = 1$ for identical masks and $J = 0$ for disjoint ones. Unlike a hamming distance, the Jaccard measure ignores the typically large set of pruned weights and thus isolates the agreement among the weights that remain active.

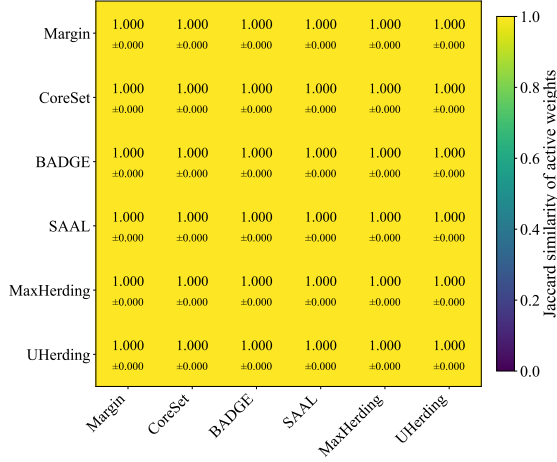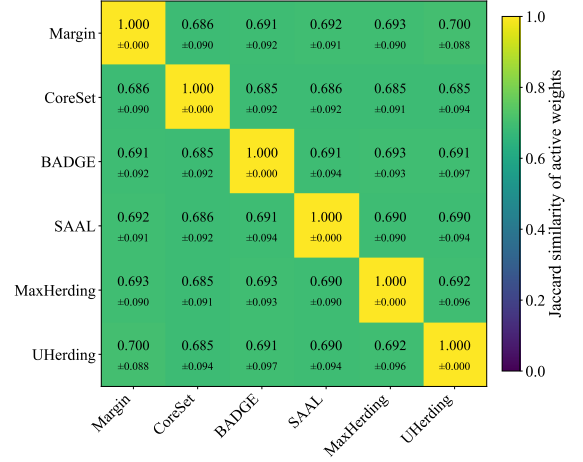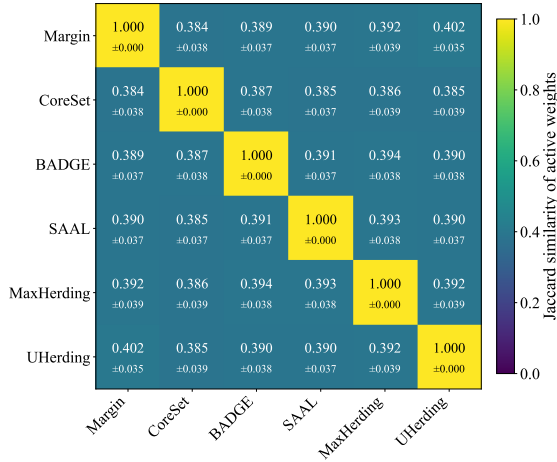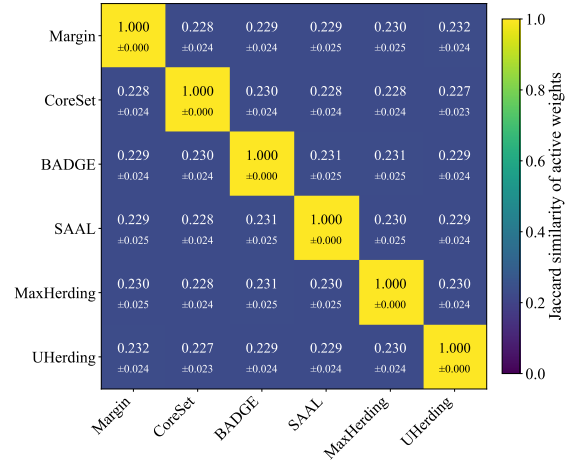Figure 5: After AL Iteration $j = 0$ Figure 7: After AL Iteration $j = 1$ Figure 6: After AL Iteration $j = 2$ Figure 8: After AL Iteration $j = 9$

Figures 5 to 8 illustrate the pairwise Jaccard similarity between the pruning masks $M^{(j+1)}$ across DAL iterations j . Results are shown for all six acquisition functions and averaged over 10 seeds in the CIFAR-HB setting. Similarities are only computed between matching seeds from identical initialization. At iteration $j = 0$ all masks coincide exactly ($J = 1$), because training and pruning are performed on the identical initial pool $D_L^{(0)}$ and the acquisition function only enters at the end of the iteration. From iteration $j = 1$ onward the masks diverge sharply, yet the inter-function similarity is still well above chance. At a sparsity of $s = 0.95$ two independent random masks would result in an expected Jaccard similarity of $(1 - s)/(1 + s) \approx 0.0256$, whereas the observed final similarity sits roughly an order

of magnitude higher. We interpret this as evidence that the six acquisition strategies converge on a shared coreset of parameters and fit a comparatively large, acquisition-specific number of parameters around it that are not essential for the task. This might be an indication that the target sparsity could be raised without major adverse effects (see Appendix A.4 for higher sparsities in same the scenario).

A.8 SPARSE-AWARE FLOPS ESTIMATION

This section provides the full per-layer formulas underlying the mask-aware MAC (e.g FLOPs / 2) estimation. Pruning is implemented via `torch.nn.utils.prune` module, which attaches binary masks to parameters without physically removing weights. All sparsities are read directly from these masks.

For each layer ℓ , we compute the dense MACs from the layer geometry (kernel size, channel counts, and output spatial dimensions) and scale by the weight density $d_w^{(\ell)} = 1 - s_w^{(\ell)}$ obtained from the pruning mask to obtain the sparse count. Bias additions are scaled analogously by the per-layer bias density $d_b^{(\ell)}$. Operations not attributable to parametric layer forward hooks, notably attention matmuls ($QK^\top$ and $\text{attn} \cdot V$), are captured via a global MAC counter and included at full cost in both the dense and sparse totals. The total sparse MAC count is therefore

$$C_{\text{sparse}} = C_{\text{global}} - C_{\text{hook}}^{\text{dense}} + C_{\text{hook}}^{\text{sparse}}, \quad (5)$$

Convolutional layers. For a `Conv2d` layer ℓ with kernel size $K_h \times K_w$, C_{in} input channels, C_{out} output channels, G groups, and output spatial dimensions $H_{\text{out}} \times W_{\text{out}}$, the dense weight MACs are

$$C_{\text{conv}}^{\text{dense}} = K_h \cdot K_w \cdot \frac{C_{\text{in}}}{G} \cdot C_{\text{out}} \cdot H_{\text{out}} \cdot W_{\text{out}}. \quad (6)$$

The sparse weight MACs are $C_{\text{conv}}^{\text{sparse}} = d_w^{(\ell)} C_{\text{conv}}^{\text{dense}}$. If a bias is present, its dense contribution is $C_{\text{out}} H_{\text{out}} W_{\text{out}}$ additions, scaled by the bias density $d_b^{(\ell)}$ for the sparse count.

Linear layers. For a `Linear` layer with F_{in} input features and F_{out} output features, the dense weight MACs are

$$C_{\text{lin}}^{\text{dense}} = F_{\text{in}} \cdot F_{\text{out}}. \quad (7)$$

Sparse weight MACs and bias additions follow the same density-scaling as for convolutional layers.

Effective embedding dimension. Several acquisition functions (CoreSet, BADGE, SAAL, MaxHerdling, UHerdling) operate on the penultimate-layer embedding of dimension e . Under unstructured weight pruning, some neurons in this layer may receive only zeroed inputs, producing a constant activation across all data points. Such *dead* dimensions carry no discriminative signal yet still contribute to the cost of pairwise distance computations if counted at face value. We therefore determine an *effective* embedding dimension $e_{\text{eff}} \leq e$ that reflects the true embedding dimensionality of the representation after pruning. To calculate e_{eff} a batch of random Gaussian inputs is passed through the model and the per-dimension variance of the resulting embeddings is computed. A dimension is considered alive if its variance exceeds zero (in practice a negligible numerical threshold suffices). The effective dimension is then

$$e_{\text{eff}} = |\{i : \text{Var}_x[\phi(x)_i] > 0\}|, \quad (8)$$

where $\phi(x) \in \mathbb{R}^e$ is the penultimate-layer representation. Because the input is random noise, any dimension that remains constant is dead by construction — its output is determined entirely by bias terms unaffected by the input — rather than merely inactive on a particular data distribution. Replacing e with e_{eff} in the acquisition cost formulas of Table 11 yields tighter FLOPs estimates, especially at high sparsity where a substantial fraction of embedding dimensions become dead.

A.9 INFERENCE & DAL SCORE COSTS

To coarsely bound the computational costs of acquisition functions $\mathcal{S}$ we introduce the following quantities, building on the notation of Section 3. For readability we drop the iteration index (j) throughout this paragraph. Let $C_{\text{fwd}}(s)$ denote the FLOPs for a single forward pass at sparsity s ; as a first-order approximation $C_{\text{fwd}}(s) \approx (1 - s) C_{\text{fwd}}(0)$, i. e. linear savings relative to the dense model. Let e denote the dimensionality of the penultimate-layer representation, C the number of output classes, $|D_U|$ the pool size, $|D_L|$ the labeled set size, and B the per-round acquisition budget. Every acquisition function begins with inference over D_U , contributing a base cost of $|D_U| \cdot C_{\text{fwd}}(s)$. Beyond this shared term, methods that rely on embeddings or gradient embeddings incur additional costs that scale with e , $|D_L|$, and B . Most commonly, pairwise ℓ_2 or inner-product distances introduce an $\mathcal{O}(e^2)$ term per candidate pair. Pruned models

Table 11: Computational complexity approximation $\mathcal{O}(\cdot)$ for the acquisition phase of each method considered in this work. $C_{\text{fwd}}(s)$ denotes the forward-pass cost at sparsity s and e_{eff} is the effective penultimate-layer embedding dimension after pruning. The *Subsampling* column indicates whether the method has been proposed with random pool subsampling for tractability of larger pools.

Acquisition Function $\mathcal{S}$	Subsampling	Computational Complexity $\mathcal{O}(\cdot)$
Random	✗	—
Margin SIGIR 1995	✗	$ D_U \cdot C_{\text{fwd}}(s)$
CoreSet ICLR 2018	✗	$(D_L + D_U) \cdot C_{\text{fwd}}(s) + B \cdot D_U \cdot e_{\text{eff}}^2$
BADGE ICLR 2020	✗	$ D_U \cdot C_{\text{fwd}}(s) + B \cdot D_U \cdot e_{\text{eff}}^2$
SAAL PMLR 2023	✓	$5 \cdot D_U \cdot C_{\text{fwd}}(s) + B \cdot D_U \cdot e_{\text{eff}}^2$
MaxHerdin ECCV 2024	✓	$(D_L + D_U) \cdot C_{\text{fwd}}(s) + (D_L + D_U)^2 \cdot e_{\text{eff}}^2$
UHerdin ICLR 2025	✓	$(D_L + D_U) \cdot C_{\text{fwd}}(s) + (D_L + D_U)^2 \cdot e_{\text{eff}}^2$

therefore improve acquisition efficiency along two axes: first, through reduced forward-pass FLOPs at sparsity s , and second, through a sparser penultimate-layer representation that lowers the *effective* embedding dimension $e_{\text{eff}} \leq e$ for all distance- or similarity-based computations. We define e_{eff} as the number of embedding dimensions with nonzero variance across a batch of random inputs; dimensions that are zeroed by pruning in the penultimate layer produce constant outputs and contribute no discriminative signal. Table 11 summarizes the leading-order cost approximation for each acquisition function.

A.10 HYPERPARAMETER SETTINGS & REPRODUCIBILITY

Table 12 consolidates all training, pruning, and active learning hyperparameters across the experimental scenarios evaluated in this work. Where a cell spans multiple columns, the value is shared across the corresponding scenarios. All experiments were conducted on PyTorch 2.9 and torchvision version 0.24. Results can be reproduced from the configurations reported in Table 12. The complete source code, exact package versions, configuration files, and launch scripts are included in the supplementary material and will be released publicly upon acceptance. Computations were distributed across a heterogeneous cluster of machines equipped with NVIDIA H100 and RTX 3080 Ti GPUs, with the larger backbones (ResNet-50, ConvNeXt v2, DeiT-S, DINO ViT-S) and the Places365 scenarios preferentially scheduled on the H100 nodes. In total, this work conducted more than 468 DAL experiments across 4 datasets, 5 architectures, 6 acquisition functions, 4 and training methods. Constituting a total of ≈ 6500 individual model trainings.

UHerdin (Bae et al., 2025) originally calibrates its uncertainty estimates via temperature scaling by a dual model training stage. First a model is trained with a held-out test set split from the available labeled set $D_L^{(j)}$ to estimate the temperature parameter τ . Afterwards the model is retrained again on the complete labeled set and τ is applied without further calibration. To maintain a uniform computational baseline across all acquisition functions, we use the default recommended temperature $\tau = 1$ and omit the additional calibration training, ensuring that no acquisition function incurs extra model training beyond the shared DAL loop.

A.11 PER-ITERATION LEARNING CURVES

We report mean test accuracy on Tiny-ImageNet over the DAL iterations with shaded regions indicating ± 1 std over seeds for all four training strategies (Dense, Rand Sparse, Rand Prune, I&P). We can observe a consistent pattern in Figure 9 that also generalizes to CIFAR-100, Imagewoof. In the low-budget regime, and during the early iterations of the high-budget regime, I&P matches or slightly outperforms the Dense baseline, which we attribute to the slightly lower sparsity levels ($< 80\%$) in the beginning combined with increased regularization effects from the sparse models. In the later iterations of the high-budget regime, I&P falls marginally below Dense, typically by less than $\epsilon < 0.5\%$ absolute accuracy — a gap we regard as practically negligible given the sparsity level reached at that point. In contrast, both random baselines (Rand Sparse, Rand Prune) trail Dense and I&P by a substantial margin throughout, confirming a trivial random sparsity is insufficient for this performance level. These trends are remarkably stable and translate across acquisition functions. Suggesting that the compatibility of I&P with the DAL loop is largely orthogonal to the choice of acquisition function.

Table 12: Full hyperparameter reference for reproducing all experiments. Each column corresponds to one DAL scenario; rows are grouped by architecture, pretraining, optimization, pruning, and active learning configuration. LB = low budget, HB = high budget. KMeans + anchor modifies the standard initialization procedure by incorporating a set of fixed centers, e.g. anchors with 1 anchor for each class, the remaining elements from $|D_L^{(0)}|$ are chosen according to the KMeans algorithm.

	CIFAR-100		Imagewoof		Tiny-ImageNet	Places365	
	LB	HB	LB	HB	-	CNN	ViT
Architecture							
Backbone	ResNet-18		ResNet-18		ResNet-18	ResNet-50 /	DeiT-S /
Input resolution	32×32		224×224		64×64	ConvNext v2	DINO ViT-S
Pretraining							
Method	SimCLR		SimCLR		SimCLR	ImageNet	
						Sup. /	Sup. /
Paradigm	Self-sup.		Self-sup.		Self-sup.	Self-sup.	Self-sup.
Optimization							
Optimizer	AdamW		AdamW		AdamW	AdamW	
Weight decay	10 ^{−4}		10 ^{−4}		10 ^{−4}	10 ^{−4}	
Batch size	128	32	64	32	64	128	
Max epochs (1st stage)	150		300		150	45	
Max epochs (2nd stage)	30		60		30	15	
Head warmup	-		-		-	3	
LR warmup epochs	10		20		10	5	
LR warmup range	10 ^{−6} → 10 ^{−3}		10 ^{−6} → 10 ^{−3}		10 ^{−6} → 10 ^{−3}	10 ^{−6} → 10 ^{−3}	
LR schedule	Cosine		Cosine		Cosine	Cosine	
LR schedule range	10 ^{−3} → 5 · 10 ^{−5}		10 ^{−3} → 5 · 10 ^{−5}		10 ^{−3} → 5 · 10 ^{−5}	10 ^{−3} → 5 · 10 ^{−5}	
Convergence threshold	99%		97.5%		99%	99%	
Pruning							
Min. active parameter fraction 1 − s	5%		5%		5%	30%	40%
Pruning rate p	0.66		0.66		0.66	0.25	0.15
Reactivation fraction	0.1		0.1		0.1	0.05	
Rewind epoch r	5		10		5	-	
Active Learning							
Initial Selection	KMeans + anchor		KMeans + anchor		Stratified Random	Stratified Random	
Initial pool D _L ⁽⁰⁾	200	2000	100	500	1000	5475	
Budget per round B	100	2000	50	500	200	3650	
DAL iterations A	9		9		20	9	
	Margin, CoreSet, BADGE,				Margin, CoreSet,		
Acquisition functions	SAAL, MaxHerdg, UHerdg				BADGE	Margin	
Seeds	10		10		15	3	

DeiT-Small visualized in Figure 10 is the only architecture and setting that deviates significantly. In our evaluation (3 seeds) the test accuracy temporarily decreases during the DAL cycle before recovering at later iterations. Notably, this dip affects both the Dense baseline and I&P, indicating that it is not entirely an artifact of pruning. We hypothesize that the mid-cycle labeled set occupies an unfavorable regime for domain transfer: it contains enough samples to overfit to Places365 and erode the pretrained ImageNet features, but not yet enough to generalize well to the new domain. As more data is acquired in later iterations, generalization recovers and accuracy resumes its upward trend.

A.12 ACCURACY VS. CUMULATIVE TRAINING MACS

Figure 12 and Figure 13 depict mean accuracy with one standard deviation as a function of cumulative MACs, aggregating training, finetuning, and acquisition function costs across the full DAL cycle. The trends are consistent across all acquisition functions and dataset settings: I&P achieves comparable accuracy to Dense while saving between 40 and 60% of the total computation. Both random baselines fall well below Dense in accuracy and, due to their exhausted patience budgets and prolonged training times, sometimes even exceed Dense in cumulative MACs. While the qualitative trend is stable, the nominal scale of MACs differs substantially between scenarios (Figure 11) and budget regimes, reflecting the varying input resolutions, model sizes, and label pool growth rates.

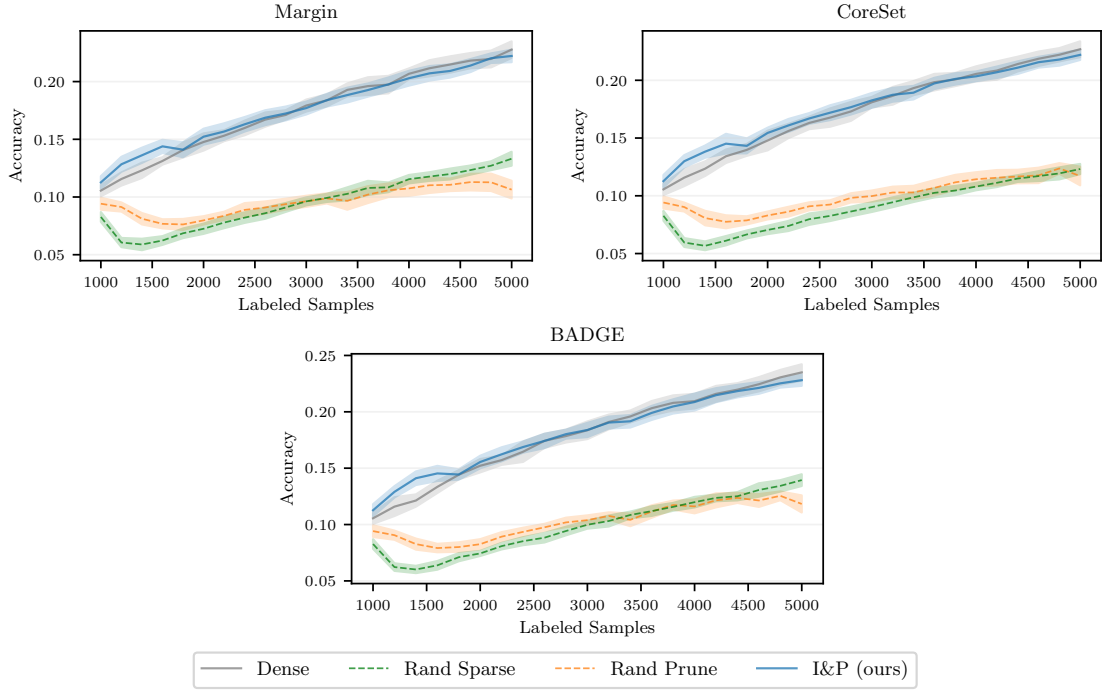


Figure 9: Mean Accuracy on Tiny-ImageNet for Margin, CoreSet, and BADGE acquisition function $\mathcal{S}$ over 20 DAL iterations with $|D_L^{(0)}| = 1000$ stratified samples and an annotation budget of 200 samples per iteration. Shaded regions indicate ± 1 std over 15 seeds.

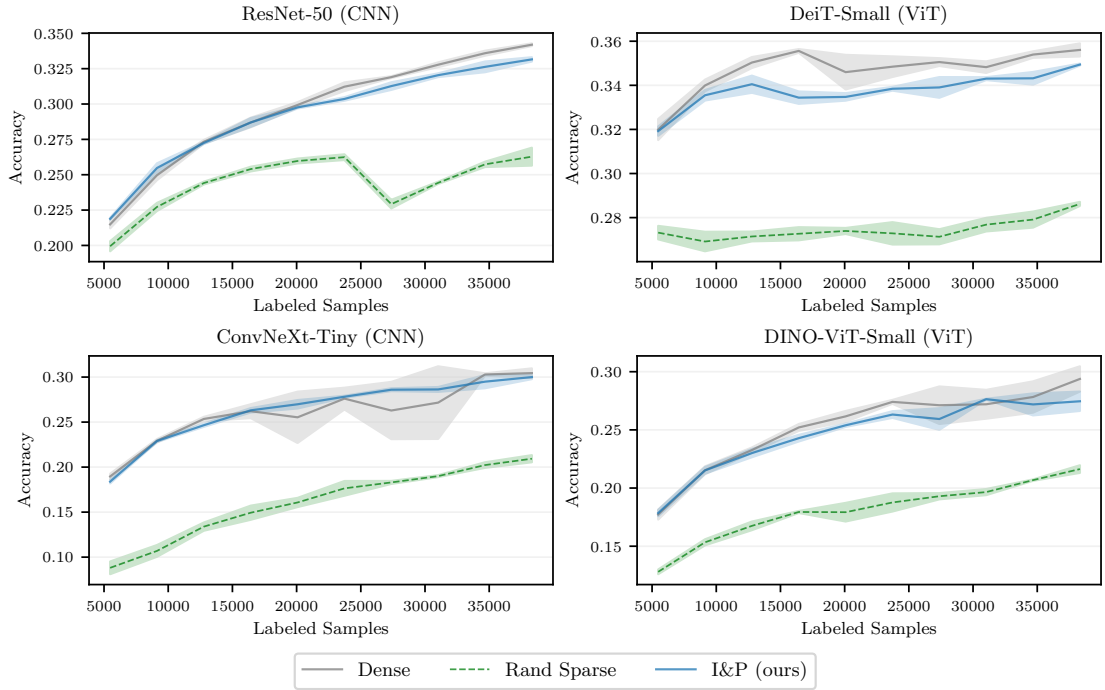


Figure 10: Mean Accuracy on Places365 (active finetuning) for Margin acquisition function $\mathcal{S}$ over 9 DAL iterations with $|D_L^{(0)}| = 5475$ class-balanced samples and an annotation budget of 3650 samples per iteration. Rows correspond to different ImageNet-pretrained architectures spanning CNN and Transformer families with supervised and self-supervised pretraining. Shaded regions indicate ± 1 std over 3 seeds.

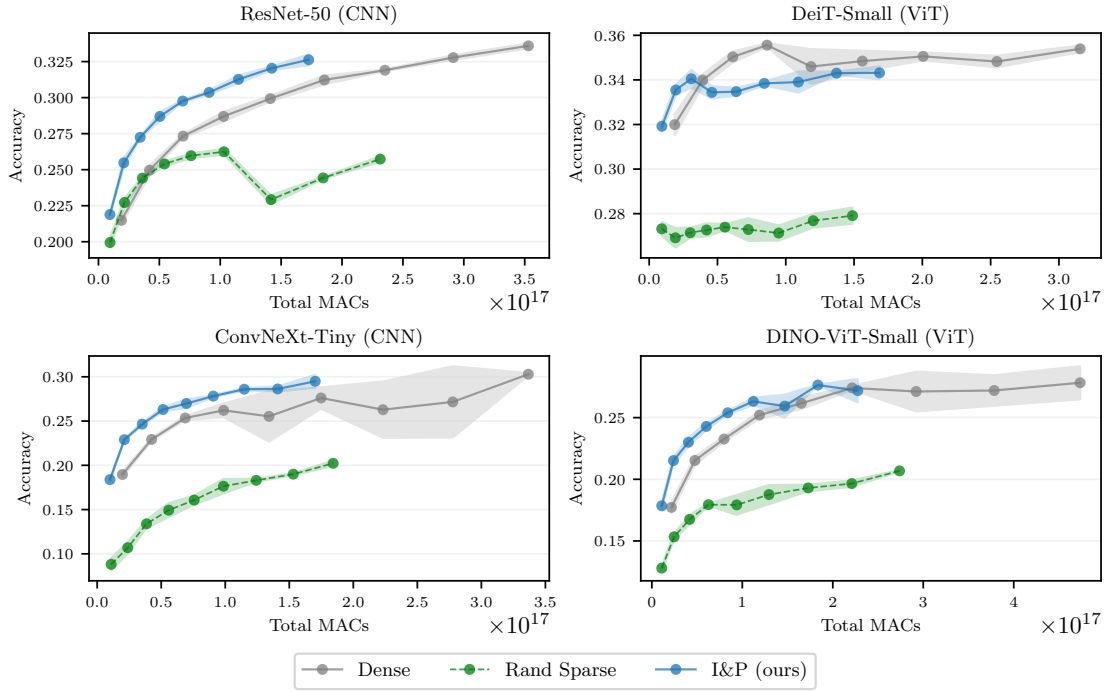


Figure 11: Test accuracy vs. cumulative training MACs on Places365 (active finetuning) with Margin acquisition. Rows correspond to different ImageNet-pretrained architectures spanning CNN and Transformer families with supervised and self-supervised pretraining.

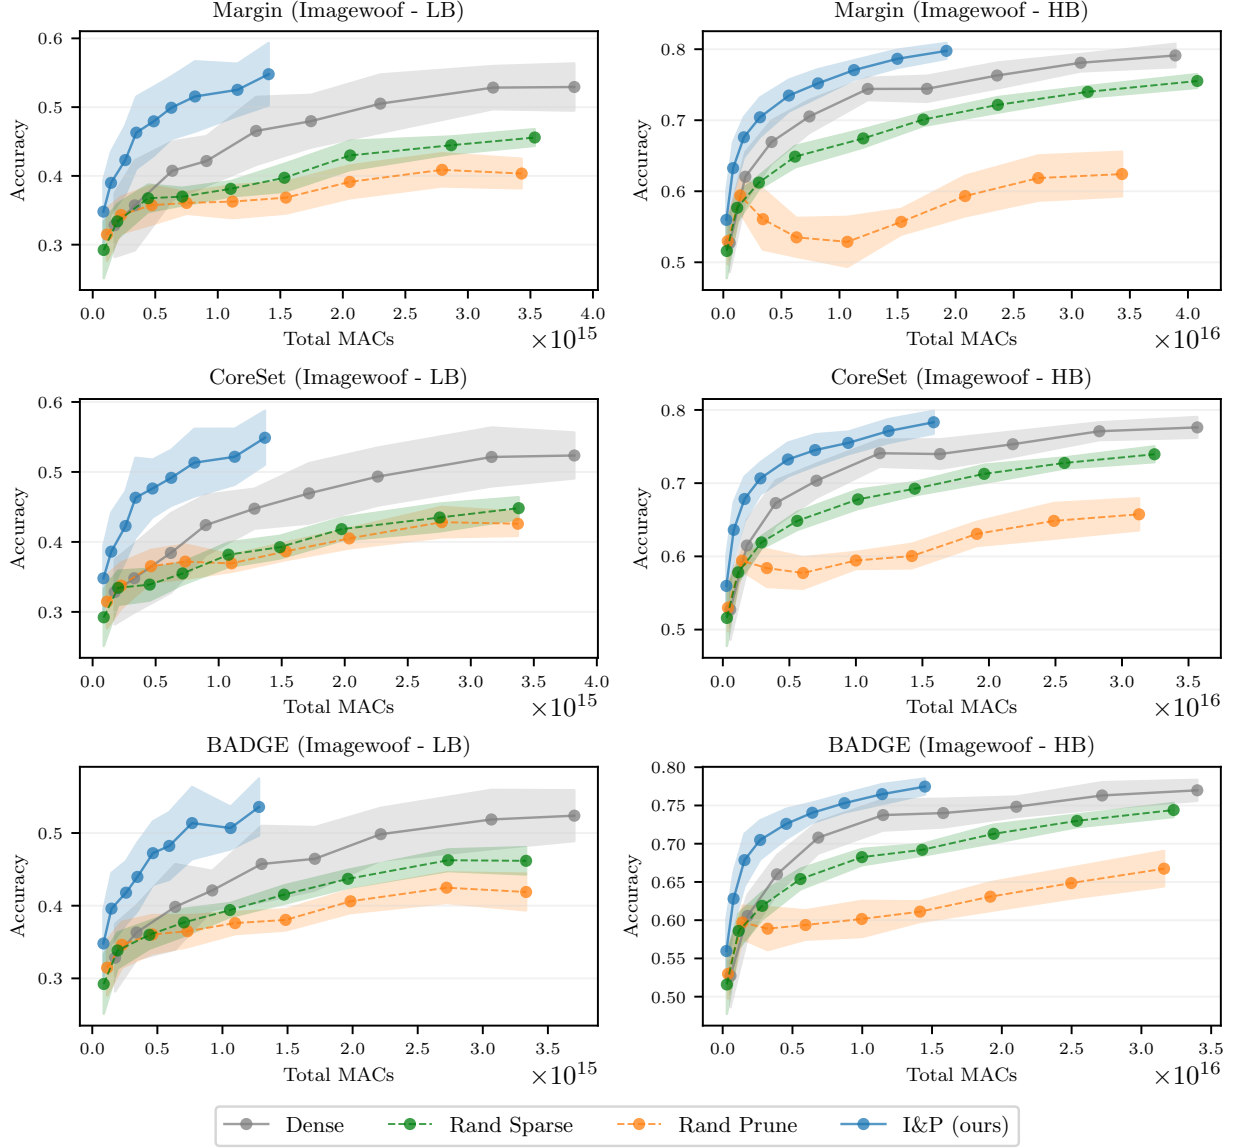


Figure 12: Test accuracy vs. cumulative training MACs on Imagewoof for Margin, CoreSet, and BADGE. Left column: low budget (LB); right column: high budget (HB). Each marker corresponds to one DAL iteration.

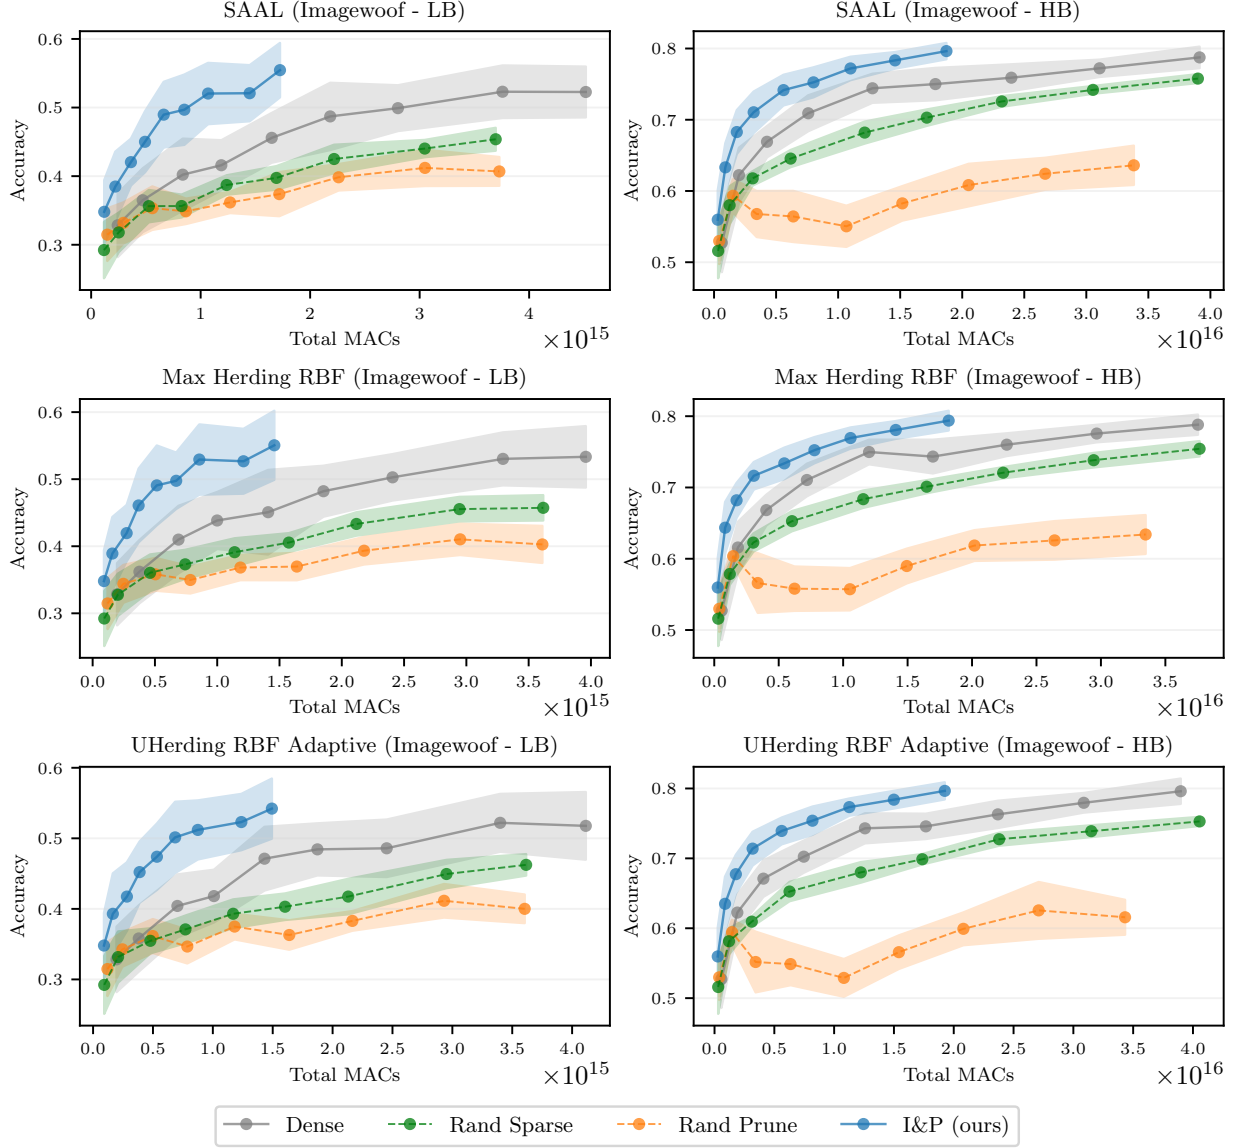


Figure 13: Test accuracy vs. cumulative training MACs on Imagewoof for SAAL, MaxHerding, and UHerding. Left column: low budget (LB); right column: high budget (HB). Each marker corresponds to one DAL iteration.