

A computable representation of the physical laboratory enables verifiable workflows

Xiaobo Li^{1,2,#,*}, Luyao Ge^{1,#}, Xiaohui Li², Lulu Guo¹, Ming Mao³, Jiwang Zheng³, Wenting Guan³, Xin Yang³, Yi Luo^{1,2}, Jun Jiang^{1,2,*}, Linjiang Chen^{1,2*}

¹ State Key Laboratory of Precision and Intelligent Chemistry, Hefei National Research Center for Physical Sciences at the Microscale, School of Chemistry and Materials Science, University of Science and Technology of China, Hefei, China

² Center for Scientific Intelligence Innovation, Hefei, China

³ Huawei Technologies Co., Ltd.

These authors contributed equally.

*Correspondence: xiaoboli@ustc.edu.cn; jiangj1@ustc.edu.cn; linjiangchen@ustc.edu.cn.

Abstract


Making science computable requires representations of both scientific knowledge and the physical world in which scientific claims are tested. A computable representation of the physical laboratory is established through typed research objects, capability-bound operations and a compositional workflow algebra. It provides the physical-world counterpart to machine-readable knowledge, expressing workflows as programs over evolving laboratory states with explicit dependencies, decisions, iteration and concurrency. The representation was implemented in a modular agentic robotic laboratory by binding formal operations to executable Function Skills. For diverse scientific intents, capability-relative workflows were generated, while stateful simulation propagated object transformations and verified operation preconditions and laboratory constraints before dispatch. The proposed representation and its engineering framework jointly establish a general computational interface between agent reasoning and capability-bound physical transformations, providing a foundation for end-to-end autonomous scientific discovery.

A computable laboratory state–action space


Agentic self-driving laboratories combine artificial-intelligence reasoning with modular systems for synthesis, processing, reaction, characterization and analysis.^{1–3} Their central computational problem is not merely to select instruments. Scientific intent is expressed semantically and can vary without bound, whereas execution must conserve samples, respect container and device limits, maintain location, order dependencies and condition later actions on measurements. A plausible plan can therefore be chemically meaningful yet physically inadmissible. Chemical programming languages provide essential operation vocabularies and control structures,^{4–6} and laboratory orchestrators coordinate instruments, resources and data.^{7–9} Agentic operation therefore requires a computable representation of the physical laboratory, in which research objects, laboratory capabilities and control logic are encoded within a common state-transition semantics.

A chemical procedure links physical operations, evolving samples and measurement-dependent decisions (Fig. 1a). The representation abstracts this procedure as a state–action system for the actionable laboratory—not an idealized chemical universe (Fig. 1b). At workflow step t , S_t denotes the state of a typed research object, comprising its persistent identity and structured sample, container, evidence and provenance fields. An operation is a typed, workstation-bound function $f_i(\theta_i)$ whose contract declares accepted states, parameters, constraints, effects, returns and failures. When its mandatory predicates are satisfied, the operation maps S_t to S_{t+1} and records evidence; otherwise, it returns a diagnostic without changing the affected simulated state. The computational unit is thus a physically bounded state transition, rather than a free-text instruction or an isolated device call (Supplementary Notes 1–2, Supplementary Tables S1–S3, Supplementary Fig. S1 and Supplementary Data 1).

a Typical chemical workflow

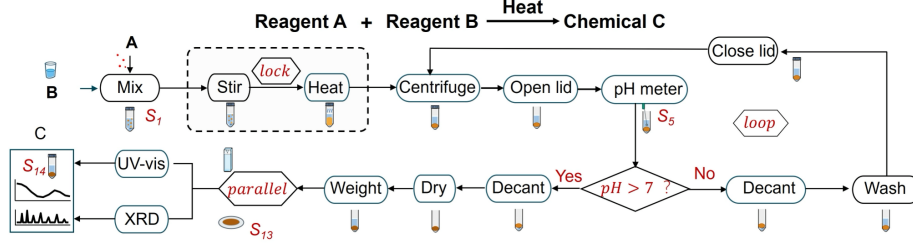

b Workflow abstraction

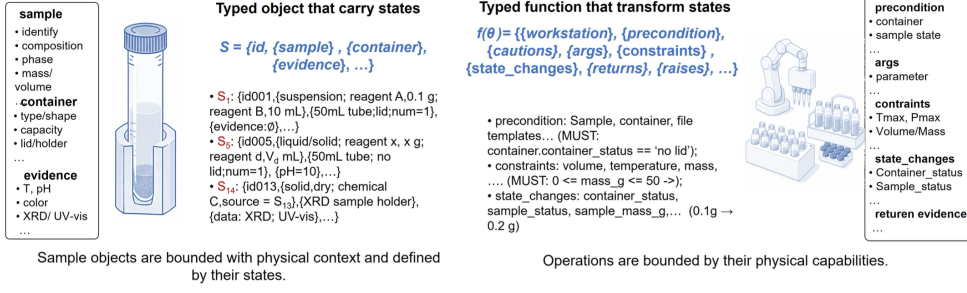

Primitive operator


$$f(\theta): S_t \rightarrow S_{t+1}, \quad P(S_t, \theta_t) = 1$$

P_i : Precondition_check

Control-flow composition operators

Sequence	Loop	Conditional branch	Parallel composition	Lock
F_{seq}	F_{loop}	F_{cond}	F_{par}	F_{lock}

c Control-flow composition operators

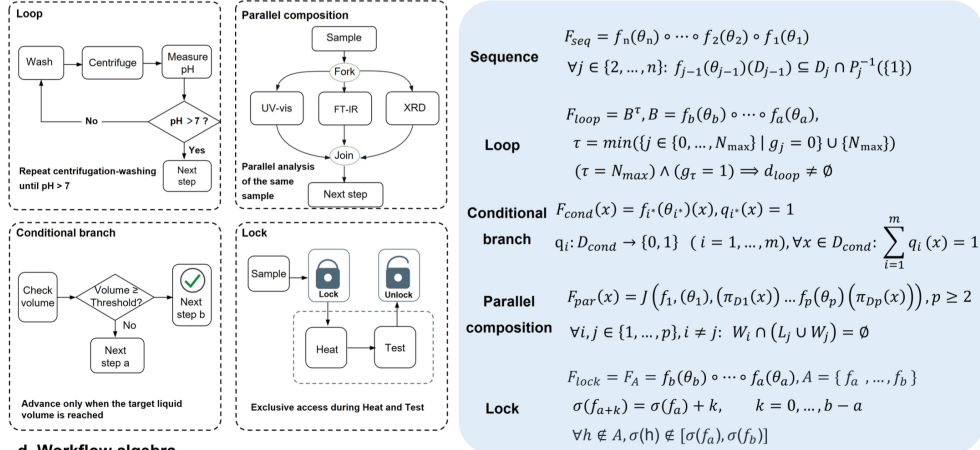

d Workflow algebra

$$F_{hybrid} = f_{16} \circ [(f_5 \circ (f_9 \circ f_8 \circ f_7 \circ f_6 \circ f_5)^{T_L} \circ \pi_L, F_{cond} \circ \pi_C, (u \circ f_{15} \circ f_{14} \circ \ell) \circ \pi_K) \circ f_4 \circ f_3 \circ f_2]^{R_{max}} \circ f_1$$

$$F_{cond}(x) = \begin{cases} (f_{13} \circ f_{12})(x), & Q(x) \geq Q_{thre} \\ (f_{11} \circ f_{10})(x), & Q(x) < Q_{thre} \end{cases}$$

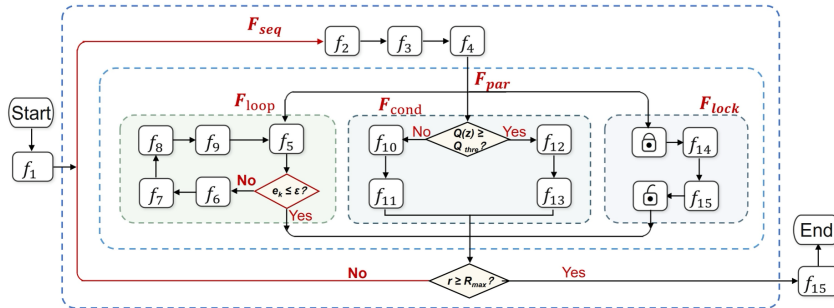


Fig. 1 | A computable representation of the physical laboratory. a, A chemical procedure comprises transformations of samples and containers, with measurements and control decisions determining subsequent actions. b, The same procedure is represented as a state-action system: S_t denotes a typed research-object state, and each capability-bound operation $f_i(\theta_i)$ declares accepted inputs, constraints, effects, returns and failures before mapping S_t to S_{t+1} . c, Five operators encode sequence, bounded iteration, evidence-dependent branching, parallel fork-join and protected execution. d, Recursive nesting of operations and operators forms a workflow algebra over evolving laboratory state. The panels therefore progress from physical procedure to computable state, explicit control logic and compositional program. XRD, X-ray diffraction; UV-vis, ultraviolet-visible spectroscopy.

Workflows as compositional programs

Primitive transitions become workflows through five operators (Fig. 1c). Sequence propagates state between operations. A bounded loop makes iteration and non-convergence explicit. A conditional selects a branch from current evidence. Parallel fork-join projects objects into independent branches and reconciles compatible updates. A protected interval keeps a resource-sensitive block contiguous. The workflow algebra nests these operators (Fig. 1d), allowing a scientific procedure to be expressed as a program over evolving laboratory state. Type compatibility is checked at sequential boundaries; loops require finite bounds; conditional guards must resolve to a permitted branch; parallel branches must not introduce conflicting writes; and protected blocks preserve declared ordering. Workflow abstraction therefore converts experimental logic into structures that can be composed and computationally inspected (Supplementary Notes 3–4, Supplementary Table S4, Supplementary Fig. S2 and Supplementary Data 2).

This construction separates scientific plausibility from operational admissibility. The formal layer tests the latter against an explicit capability inventory and cannot invent unavailable operations. Its generative space is the closure of registered primitives under the five operators. Generality is capability-relative: transfer requires each laboratory to register local operations, constraints and adapters.

Engineering executable semantics

To test whether the representation can be operationalized, it was implemented in a modular agentic self-driving laboratory (Fig. 2).¹⁰ Forty-nine workstation specifications—45 physical and 4 virtual control-flow modules—were converted from structured device descriptions into agent-readable Function Skills. The frozen snapshot exposes 63 functions covering liquid and solid handling, mixing, heating, separation, reaction, electrochemical testing, chromatography, spectroscopy, diffraction, imaging and control flow. Each Function Skill preserves the corresponding operation contract and uses workstation-qualified names where repeated actions could otherwise be ambiguous. This compilation turns the installed laboratory into a machine-readable capability space, while keeping the formal representation independent of any single device command set.

Scientific intent is translated by an agent into a Python workflow containing only registered calls. Before dispatch, the abstract syntax tree is admitted against allow-listed imports, functions and entry points, then normalized conservatively. The resulting program enters a shared stateful simulator. Each call evaluates all encoded mandatory and advisory conditions before applying effects. A mandatory failure blocks the update; a successful call commits the new object state and appends a step record. Diagnostics localize the function, step, observed condition, expected condition and suggested remediation. This validate-then-commit cycle allows a workflow fragment to be revised without treating the entire protocol as unstructured text. It verifies operational consistency with encoded contracts; it does not prove chemical truth, experimental safety beyond those rules or device reliability (Supplementary Notes 5–7, Supplementary Tables S5–S8, Supplementary Figs. S3–S6, Supplementary Data 1 and 4, and Additional Files 1–2).

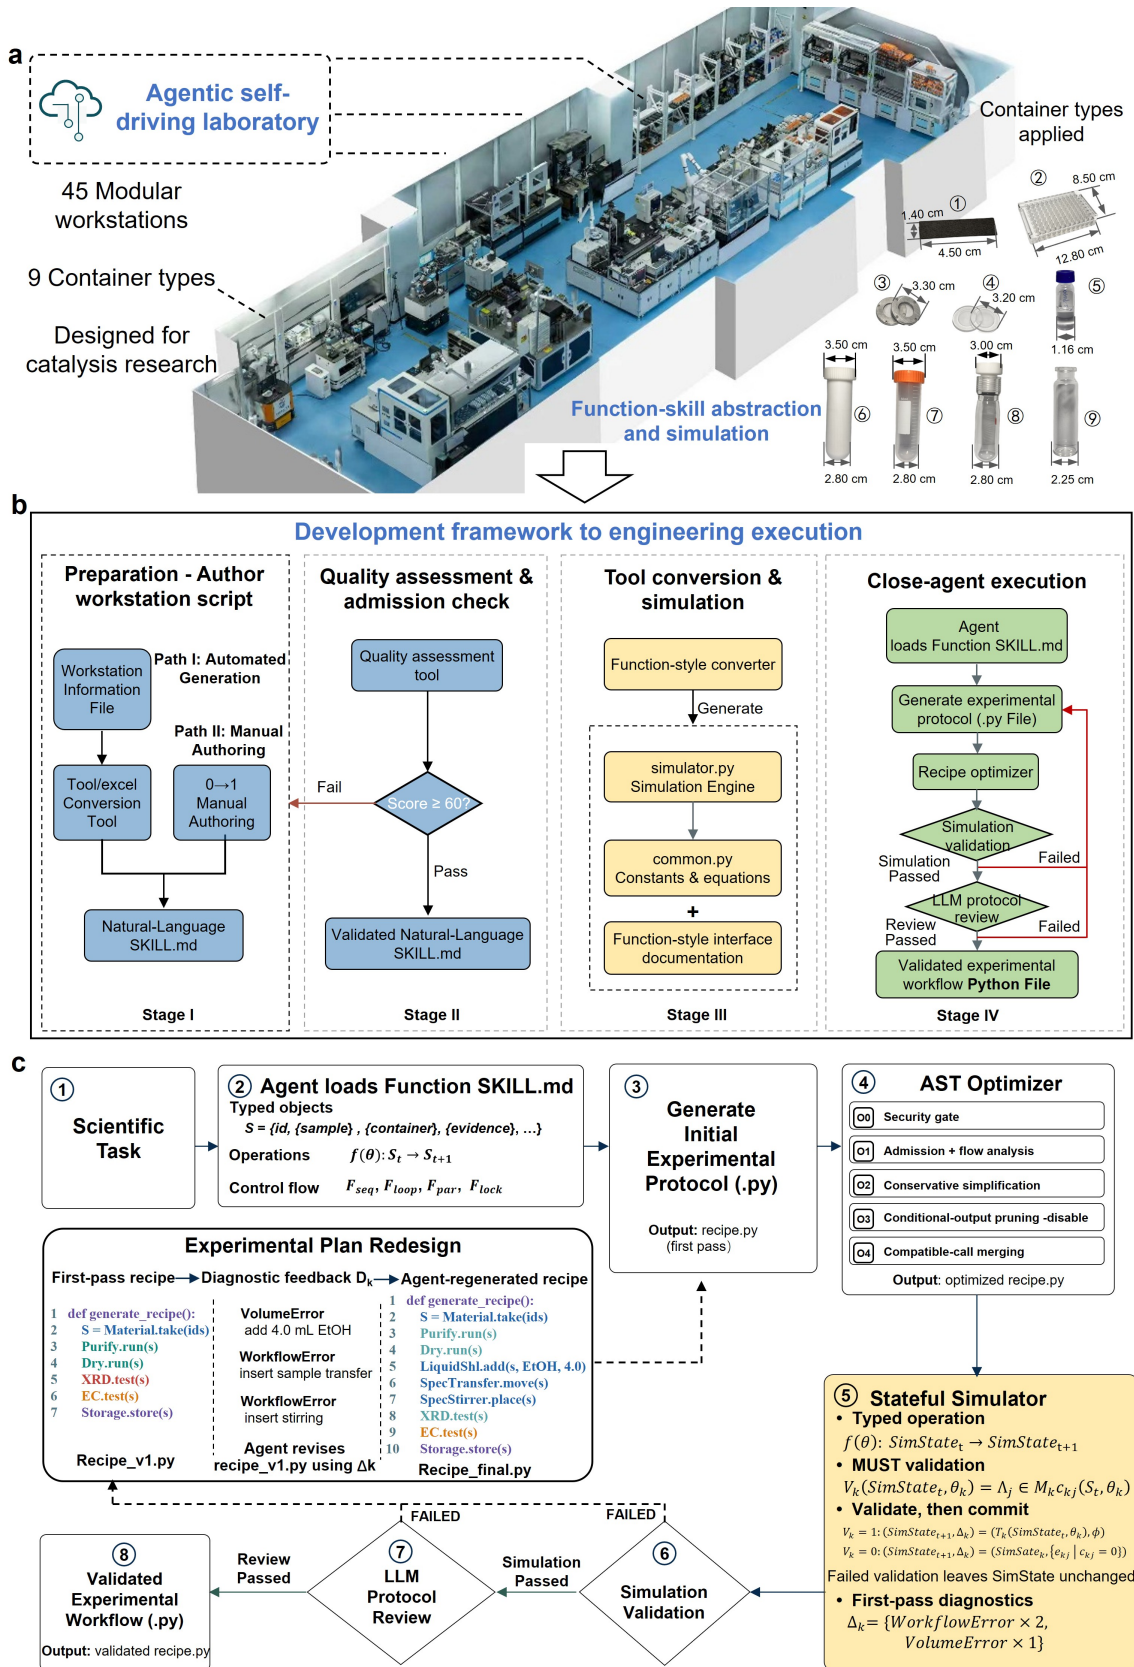


Fig. 2 | Engineering and checking computable laboratory workflows. a, Structured specifications register the physical and virtual capabilities of the modular agentic self-driving laboratory. b, These records are compiled into agent-readable Function Skills, shared runtime types and simulator functions while preserving operation contracts. c, Scientific intent is compiled into a Python workflow containing registered calls, admitted through abstract-syntax-tree analysis and evaluated by stateful simulation before review and downstream serialization. Successful calls commit object-state changes; failed MUST predicates leave $SimState_t$ unchanged and return a localized diagnostic set Δ_k for regeneration. Here, S_t denotes a research-object state, and $SimState_t$ denotes the bounded executable projection used by the simulator. O0–O4 denote optimizer levels and are unrelated to these state symbols.

Capability-relative generation from scientific intent

Compositional scope was examined with four prompts that specified scientific objectives and control logic but not complete workstation sequences (Extended Data Fig. 1). The first compared five Fe-introduction routes for NiFe-based catalysts under matched alkaline oxygen-evolution testing and produced a 27-node sequence across 11 workstations. The second coupled layered double hydroxide synthesis and electrode preparation in a protected interval to HMF oxidation, then forked solid-electrode and liquid-product objects into three analytical branches; it contained 22 physical nodes, 31 simulated steps and 11 workstations. The third combined furfural hydrogenation with a bounded gas-chromatography method-optimization loop ($N_{max} = 6$), yielding 20 nodes and 23 simulated steps. The fourth coupled ZnO preparation to parallel infrared and ultraviolet–visible characterization, with a conditional dilution loop ($N_{max} = 3$), yielding 27 nodes, 30 simulated steps and 15 workstations.

All four accepted workflows used only registered capabilities and passed structural analysis and state simulation with no mandatory errors or advisory warnings. The cases span sequence, conditional branching, bounded iteration, fork–join parallelism and protected execution. They are not four hard-coded protocol templates; each is a different composition of shared operations selected through required object transitions and evidence dependencies (Supplementary Notes 8–11, Supplementary Tables S9–S11, Supplementary Figs. S7–S10, Supplementary Data 3 and Additional File 3).

A representation layer for agentic laboratories

Recent efforts have added a foundational laboratory schema, literature-to-protocol agents and simulation-guided refinement to the established programming and orchestration layers.^{11–13} Broader developments encompass modular self-driving-laboratory architectures, autonomous materials synthesis and distributed closed-loop discovery,^{14–17} while knowledge graphs, natural-language robotic planning, orchestration middleware and sample-centred automata address complementary parts of laboratory autonomy.^{18–21} The contribution here is the unification of three levels that are commonly separated: a typed representation of physical research objects, an algebra for composing capability-bound transitions, and an executable realization that checks those transitions against evolving state. Unlike protocol-centric representations, the object state being transformed remains an explicit operand throughout generation, composition and checking. Agent reasoning is thereby connected to physical action through an explicit computational object rather than through prose alone.

The present checks are intentionally bounded. Their validity depends on the completeness of workstation contracts and the fidelity of simulated state. Scheduler-level resource isolation, live telemetry, device faults, empirical repeatability and chemical outcomes require execution evidence or additional models. These are extension interfaces rather than hidden assumptions: constraints, resources, observations and adapters can be added without changing the intent layer. Local failures can consequently be assigned to an object, operation, guard or join rather than to the workflow as a whole. By making laboratory state, permitted transformations and control structure jointly computable, the framework establishes a basis for generating increasingly complex experiments while keeping their physical commitments verifiable before execution.

Methods

Research-object and operation representation

At workflow step t , S_i denotes the state of a typed research object. Each object contains a persistent identifier and typed subrecords for sample identity and composition, phase, amount, container type and state, location, evidence and provenance. Evidence may contain scalar observations or references to generated data. A workstation contract declares the projection of these fields required for an operation. The current simulator implements the subset needed for workstation checking: container identifier and type, closure state, sample state, volume, mass, location, source-bottle use, step logs, errors and warnings.

Each physical operation is represented by a Function Skill containing the workstation binding, operation name, input-state requirements, cautions, typed parameters, constraints, state changes, return schema and diagnostic categories. For operation f_i with parameters θ_i , a transition from S_t to S_{t+1} is admitted only when all mandatory predicates $P_i(S_t, \theta_i)$ hold. For operations involving multiple research objects, the function acts on the corresponding tuple of object states. Advisory predicates record warnings but do not block the transition. Mandatory failure returns an unsuccessful result and leaves the affected simulated state unchanged.

Workflow composition

Sequence was defined by functional composition, with each intermediate output required to lie in the next operation's input domain. A loop repeated its body until the continuation guard became false or a declared N_{max} was reached; an active guard at the bound returned a non-convergence diagnostic. Conditional composition required a unique permitted branch. Parallel fork-join projected the objects required by each branch and admitted the join only when branch write sets did not conflict and shared updates agreed. A protected interval was constrained to occupy consecutive scheduler positions. The five operators could be nested recursively.

Capability compilation

Workstation capabilities were supplied as structured records or curated Skill documents. Required fields included workstation identity, available operations, accepted input and output states, parameters, bounds, container requirements, state effects and returns. A development-stage quality gate assessed documentation completeness; the archived configuration admitted records at the required-field score of 60. Accepted records were converted into workstation-qualified interfaces, shared data classes and simulator implementations. The frozen inventory contains 28 synthesis, 5 reaction-and-testing, 12 characterization and 4 virtual specifications, declaring 63 functions.

Structural analysis and stateful simulation

Generated workflows were Python modules with one `generate_recipe()` entry point. Each module was parsed into an abstract syntax tree. Admission permitted only registered runtime imports and allow-listed function calls, and rejected wildcard imports, dynamic calls, unsupported top-level statements, forbidden names and additional function definitions. Literal arithmetic and Boolean expressions were folded, inactive constant branches were removed and redundant pass statements were eliminated. Conditional-output pruning was available as a domain-aware transformation but was disabled in the frozen configuration.

For simulation, the shared state was reset, artificial delays were disabled and registered workstation functions were injected into the workflow namespace. Each operation collected all applicable checks before applying any effect. Checks covered container existence and count, container and sample state, cumulative and per-call volume, mass, parameter ranges, file constraints and declared workstation dependencies. A diagnostic stored the function, step, code, category, expected and observed values, parameter snapshot, severity and suggested remediation. Mandatory diagnostics blocked passage. Successful operations committed state changes and appended a structured step record.

Case construction and evaluation

The four prompts requested Fe coordination-environment modulation and matched alkaline oxygen-evolution testing; layered double hydroxide synthesis, electrochemical HMF oxidation and parallel analysis; furfural hydrogenation with iterative gas-chromatography optimization; and ZnO synthesis with parallel spectroscopy and adaptive dilution. Complete workstation sequences were not supplied. The agent received the controller Skill and registered Function Skills. The workflow-generation agent was powered by GPT-5.6 Sol (OpenAI). Model invocations used in this study were performed between 15 and 25 August 2026. Accepted workflows were serialized into canonical JSON, and node counts, workstation counts, simulated steps and diagnostic totals were calculated from the frozen workflow and validation records. No workflow was physically executed for this study.

Statistical analysis

The study evaluates a representation, its software realization and four workflow constructions. No wet-laboratory outcome comparison or inferential statistical analysis was performed.

Data availability

The typed capability registry, formal definitions, four prompts, canonical workflow representations, validation summaries and evidence manifest are provided as Supplementary Data 1–4. Complete workflow and validation records for the four cases shown in Extended Data Fig. 1 are supplied as Additional File 3. No new wet-laboratory measurement data were generated for the workflows reported here.

Code availability

Source code for Function-Skill conversion, workflow analysis, simulation and serialization is supplied as Additional File 1, and the frozen Function-Skill library as Additional File 2. Additional File 4 contains the internal release-page record supplied for provenance only; it is not presented as a public repository, persistent public access route or DOI.

References

1. Burger, B. et al. *Nature* 583, 237–241 (2020). <https://doi.org/10.1038/s41586-020-2442-2>
2. Canty, R. B. & Abolhasani, M. *Nat. Rev. Chem.* 10, 523–537 (2026). <https://doi.org/10.1038/s41570-026-00847-2>
3. Boiko, D. A., MacKnight, R., Kline, B. & Gomes, G. *Nature* 624, 570–578 (2023). <https://doi.org/10.1038/s41586-023-06792-0>
4. Steiner, S. et al. *Science* 363, eaav2211 (2019). <https://doi.org/10.1126/science.aav2211>
5. Rauschen, R., Guy, M., Hein, J. E. & Cronin, L. *Nat. Synth.* 3, 488–496 (2024). <https://doi.org/10.1038/s44160-023-00473-6>
6. Šiaučiulis, M. et al. *Nat. Commun.* 15, 10261 (2024). <https://doi.org/10.1038/s41467-024-54238-6>
7. Roch, L. M. et al. *PLoS ONE* 15, e0229862 (2020). <https://doi.org/10.1371/journal.pone.0229862>
8. Sim, M. et al. *Matter* 7, 2959–2977 (2024). <https://doi.org/10.1016/j.matt.2024.04.022>
9. Fei, Y. et al. *Digit. Discov.* 3, 2275–2288 (2024). <https://doi.org/10.1039/D4DD00129J>
10. Li, X. et al. *ACS Nano* (2026). <https://doi.org/10.1021/acsnano.6c15286>
11. Gottstein, W., Blanc, A., Feng, S., Sutherland, B. R. & Pablo-García, S. *Device* 101202 (2026). <https://doi.org/10.1016/j.device.2026.101202>
12. Pagel, S., Jirasek, M. & Cronin, L. *Commun. Chem.* 9, 191 (2026). <https://doi.org/10.1038/s42004-026-01993-w>
13. Hsu, B. et al. *Digit. Discov.* 5, 2613–2628 (2026). <https://doi.org/10.1039/D6DD00004E>
14. Abolhasani, M. & Kumacheva, E. *Nat. Synth.* 2, 483–492 (2023). <https://doi.org/10.1038/s44160-022-00231-0>
15. Tom, G. et al. *Chem. Rev.* 124, 9633–9732 (2024). <https://doi.org/10.1021/acs.chemrev.4c00055>
16. Szymanski, N. J. et al. *Nature* 624, 86–91 (2023). <https://doi.org/10.1038/s41586-023-06734-w>
17. Strieth-Kalthoff, F. et al. *Science* 384, eadk9227 (2024). <https://doi.org/10.1126/science.adk9227>
18. Bai, J. et al. *Nat. Commun.* 15, 462 (2024). <https://doi.org/10.1038/s41467-023-44599-9>
19. Darvish, K. et al. *Matter* 8, 101897 (2025). <https://doi.org/10.1016/j.matt.2024.10.015>
20. Angelopoulos, A. et al. In 2025 IEEE International Conference on Robotics and Automation 15900–15906 (IEEE, 2025). <https://doi.org/10.1109/ICRA55743.2025.11128578>
21. Tahara-Arai, Y. et al. *Digit. Discov.* 5, 1411–1424 (2026). <https://doi.org/10.1039/D5DD00409H>

Acknowledgements

The workflow generation and stateful simulations were performed on the Robotic AI-Scientist Platform of the Chinese Academy of Sciences (CAS).

Author contributions

X.L. and L.G. contributed equally to this work. X.L., L.C. and J.J. conceived and supervised the project. X.L., L.G., X.H.L., L.G., M.M., J.Z., W.G. and X.Y. developed the formal representation and engineering framework, constructed and analysed the workflows, and curated the supporting materials. All authors discussed the results, revised the manuscript and approved the final version.

Competing interests

The authors declare no competing interests.

Additional information

Supplementary information accompanies this paper. Reproducibility settings and the software and evidence manifest are provided in Supplementary Note 12, Supplementary Table S12 and Supplementary Data 4; the corresponding source-code archive, Function-Skill library, workflow archive and internal release-page record are supplied as Additional Files 1–4.

Supplementary Information

A computable representation of the physical laboratory enables verifiable workflows

Xiaobo Li^{1,2,#,*}, Luyao Ge^{1,#}, Xiaohui Li², Lulu Guo¹, Ming Mao³, Jiwang Zheng³, Wenting Guan³, Xin Yang³, Yi Luo^{1,2}, Jun Jiang^{1,2,*}, Linjiang Chen^{1,2*}

¹ State Key Laboratory of Precision and Intelligent Chemistry, Hefei National Research Center for Physical Sciences at the Microscale, School of Chemistry and Materials Science, University of Science and Technology of China, Hefei, China

² Center for Scientific Intelligence Innovation, Hefei, China

³ Huawei Technologies Co., Ltd.

These authors contributed equally.

*Correspondence: xiaoboli@ustc.edu.cn; jiangj1@ustc.edu.cn; linjiangchen@ustc.edu.cn.

This Supporting Information contains Supplementary Notes 1–12, Supplementary Tables S1–S12 and Supplementary Figs. S1–S10. Supplementary Data files and author-supplied Additional Files are described in the SI Guide at the end of this document. References cited here follow the numbering of the main Article.

Supplementary Notes

Supplementary Note 1. Typed research-object representation

The workflow representation begins with a laboratory state, denoted by S_t at workflow step t , comprising one or more typed research objects. Fig. 1a,b defines the object schema as

$$S = \{\text{id}, \{\text{sample}\}, \{\text{container}\}, \{\text{evidence}\}, \dots\}.$$

The representation binds scientific material to the physical context required for manipulation. The sample component records identity, composition, phase, mass and volume. The container component records type, geometry, capacity, lid or holder state and other handling-relevant properties. The evidence component records observations and data products, including temperature, pH, colour and characterization outputs. The ellipsis permits laboratory-specific fields without altering the required object–container–evidence structure.

Fig. 1a,b illustrates the representation through three research-object states. S_1 contains a suspension of Chemicals A and B in a lidded 50 ml tube with no evidence recorded. S_5

contains a liquid–solid object in an open 50 ml tube with pH evidence. S_{14} contains a dry solid derived from S_{13} , placed in a characterization holder with XRD and UV–vis evidence. These examples show that provenance is retained while the material, container and evidence states evolve.

The executable simulator implements a bounded projection of this conceptual object. The supplied $SimState_t$ records containers, errors, warnings, step logs, source-bottle usage and a step counter. Each Container records ***container_id***, ***container_type***, ***container_status***, ***sample_status***, ***sample_volume_ml***, ***sample_mass_g*** and ***location***. This implementation does not replace the richer definition of St. It provides the subset required to test the currently encoded workstation contracts. The conceptual and implemented fields are aligned in Supplementary Table S2.

Research objects are identified independently from workflow operations. An operation can therefore accept one or more objects, test their current states, update approved fields and append evidence without discarding object identity. This separation is required for provenance, branching and convergence. It also permits two branches to operate on distinct projections of the same parent object and later join their evidence, provided that the parallel consistency conditions in Supplementary Note 3 are satisfied.

Cross-references: Fig. 1a,b; Supplementary Tables S1 and S2; Supplementary Fig. S1; Supplementary Data 1.

Supplementary Note 2. Primitive operation contracts

A primitive experimental operation is represented by the state transition

$$f_i(\theta_i): S_t \rightarrow S_{t+1}, P_i(S_t, \theta_i) = 1 \quad (1)$$

where f_i is operation i , θ_i contains its arguments and P_i is its precondition predicate. The operation is admissible only when the predicate evaluates to one. Its output must remain in the domain accepted by the next operation.

The Function-Skill interface realizes this primitive contract as a workstation-bound function declaration. The supplied documents define the interface through workstation identity, preconditions, cautions, typed arguments, constraints, state changes, structured returns and declared failure categories. Each physical function uses a namespace call, for example ***Liquid_Handling_Station_1ml_V2.open_caps(...)***. The namespace encodes workstation ownership and removes ambiguity when different devices expose similarly named operations.

Function signatures use explicit types and unit-bearing parameter names. Enumerations are constrained through Literal aliases, nested inputs are represented by named data classes, and shared physical limits are centralized in ***_common.py***. A Function-Skill document contains only the callable interface and contract. The corresponding implementation in ***simulator.py*** performs the actual parameter, precondition and state-transition checks. The interface and implementation are required to remain synchronized.

Constraints are separated into MUST and SHOULD rules. A failed MUST rule is added to `SimState.errors` and blocks acceptance. A failed SHOULD rule is added to ***SimState.warnings*** and does not block acceptance. State changes are committed only when every MUST rule for the operation passes. Data-producing operations return typed result objects containing file or measurement references in addition to the common ***StepResult*** fields.

The current common runtime enumerates 11 container types: sample vial, 50-ml heat-resistant bottle, screw vial, chromatography vial, carbon-paper holder, 10-ml pressure reaction tube, test holder, 96-well plastic plate (96-well quartz plate) and 54-position GC plate (54-position LC plate). Laboratory-specific limits remain attached to the corresponding Function-Skill and shared constant, rather than being generalized beyond the documented capability.

Cross-references: Fig. 1b; Supplementary Table S3; Supplementary Data 1.

Supplementary Note 3. Mathematical semantics of workflow composition

The five control-flow operators in Fig. 1c organize primitive transitions without changing their individual contracts. Equations (2)–(14) below reproduce the supplied mathematical-definition document. Symbols are defined in Supplementary Table S1.

Sequential composition

$$F_{seq} = f_n(\theta_n) \circ \dots \circ f_2(\theta_2) \circ f_1(\theta_1) \quad (2)$$

Execution proceeds from right to left. Every intermediate state must satisfy the next precondition and fall within the next domain:

$$\forall j \in \{2, \dots, n\}: f_{j-1}(\theta_{j-1})(D_{j-1}) \subseteq D_j \cap P_j^{-1}(\{1\}) \quad (3)$$

Here, n is the number of operations, and j indexes operation f_j . The set $P_j^{-1}(\{1\}) = \{S \in D_j | P_j(S, \theta_j) = 1\}$ contains the states satisfying the precondition of f_j . Complete notation definitions are provided in Supplementary Table S1.

Bounded loop

For a loop body spanning operations f_a through f_b , define

$$B = f_b(\theta_b) \circ \dots \circ f_a(\theta_a), \quad F_{loop} = B^\tau \quad (4)$$

Here, B^τ denotes the τ -fold composition of the complete loop body B , with $B^0 = I$, where I is the identity mapping. Let $x^{(0)} = x_{in}$ denote the loop-entry state and $x^{(j+1)} = B(x^{(j)})$. Thus, $x^{(j)}$ is the state after j completed executions of the loop body. Define $g_j := g(x^{(j)})$, where $g_j = 1$ indicates that another iteration is required and $g_j = 0$ indicates normal exit. The iteration count is

$$\tau = \min(\{j \in \{0, \dots, N_{max}\} | g_j = 0\} \cup \{N_{max}\}) \quad (5)$$

Reaching the upper bound while the continuation predicate remains true produces a non-empty loop diagnostic:

$$(\tau = N_{max}) \wedge (g_\tau = 1) \Rightarrow d_{loop} \neq \emptyset \quad (6)$$

Conditional branch

For m branches with mutually exclusive and collectively exhaustive guards, let $q_i(x)$ denote the binary guard associated with branch i .

$$q_i: D_{cond} \rightarrow \{0, 1\} \quad (i = 1, \dots, m), \quad \forall x \in D_{cond}: \sum_{i=1}^m q_i(x) = 1 \quad (7)$$

For each input x , let i^* denote the unique active branch index satisfying $q_{i^*}(x) = 1$.

The corresponding conditional operator is defined as:

$$F_{cond}(x) = f_{i^*}(\theta_{i^*})(x) \quad (8)$$

Parallel fork-join

For a global state x and $p \geq 2$ parallel branches, let π_{D_i} project x onto the branch-local objects and resources required by branch i , and let J merge the resulting branch outputs at the synchronization point:

$$F_{par}(x) = J\left(f_1(\theta_1)(\pi_{D_1}(x)), \dots, f_p(\theta_p)(\pi_{D_p}(x))\right), p \geq 2 \quad (9)$$

Let W_i and L_i denote the write and read sets of branch i , respectively. Cross-branch write-read and write-write conflicts are excluded by

$$\forall i, j \in \{1, \dots, p\}, i \neq j: W_i \cap (L_j \cup W_j) = \emptyset. \quad (10)$$

If two branch-local projections overlap, their outputs must agree on the shared state components before they are joined:

$$\begin{aligned} &\forall i, j \in \{1, \dots, p\}, i \neq j, D_i \cap D_j \neq \emptyset: \\ &\pi_{D_i \cap D_j}(f_i(\theta_i)(\pi_{D_i}(x))) = \pi_{D_i \cap D_j}(f_j(\theta_j)(\pi_{D_j}(x))) \end{aligned} \quad (11)$$

Equation (10) permits shared read-only state while excluding conflicting cross-branch updates, whereas Equation (11) ensures deterministic merging of overlapping branch-local outputs. This formulation supports parallel operations on shared read-only state or distinct subsamples, followed by synchronization at the join point.

Protected atomic interval

For a protected interval A spanning operations f_a through f_b , where $1 \leq a \leq b \leq n$, define

$$A = \{f_a, \dots, f_b\}, \quad F_A = f_b(\theta_b) \circ \dots \circ f_a(\theta_a) \quad (12)$$

Let $\sigma(f_i)$ denote the unique position of operation instance f_i in the global execution schedule. The operations in A occupy consecutive schedule positions:

$$\sigma(f_{a+k}) = \sigma(f_a) + k, \quad k = 0, \dots, b - a \quad (13)$$

No operation outside A may be scheduled within the interval bounded by its endpoints:

$$\forall h \notin A: \sigma(h) \notin [\sigma(f_a), \sigma(f_b)] \quad (14)$$

The figure label F_{lock} and the mathematical symbol F_A refer to the same protected, non-interleavable execution construct.

Cross-references: Fig. 1c; Supplementary Tables S1 and S4; Supplementary Fig. S2; Supplementary Data 2.

Supplementary Note 4. Nested workflow algebra and serialization

The expanded workflow in Fig. 1d composes the five operator classes within a single graph. Primitive functions form locally ordered sequences. A bounded outer loop controls repeated execution. The loop contains a fork-join region, within which one branch contains an inner loop, one contains a conditional branch and one contains a protected interval. The join synchronizes branch outputs before evaluation of the outer stopping predicate.

The executable representation preserves this hierarchy as an abstract syntax tree. Physical operations are namespace function calls. Parallel blocks are represented by ***parallel_execution*** containing named ***branch*** contexts. Protected intervals use ***atomic_lock***. Conditions use Python ***if/elif/else***, and bounded repetition uses ***while*** or ***for***. The converter recursively serializes these constructs into JSON without flattening their nesting.

The current converter produces a canonical structural string using SEQ, PAR, ATOMIC, IF, WHILE and FOR. Individual operations are indexed as f_i . The canonical string records topology rather than chemical threshold values. The JSON additionally records plan name, variables, ordered steps, workstation names, operation names, parameters, graph paths and switch mappings. Namespace calls retain `workstation_eng_name`, enabling deterministic routing back to a workstation-specific interface.

Cross-references: Fig. 1d; Supplementary Fig. S2; Supplementary Tables S1 and S4; Supplementary Data 2.

Supplementary Note 5. Capability acquisition and Function-Skill admission

The engineering pipeline converts laboratory capability descriptions into agent-readable and simulator-readable contracts. The supplied release contains 49 workstation specifications: 28 synthesis workstations, 5 reaction and testing workstations, 12 characterization workstations and 4 virtual control-flow workstations. The 45 physical workstations provide laboratory operations, whereas the 4 virtual modules provide parallel, conditional, loop and protected-interval constructs. Across these files, the current snapshot contains 63 declared Function-Skill functions. Shared operation names remain distinguishable through workstation namespaces.

Capability acquisition begins from a structured workstation-information file or manual authoring. The information schema includes workstation identity, operation descriptions, parameters, input and output constraints, state transitions, returns and file parameters. Natural-language Skill documents are admitted through a configurable 100-point assessment. The six required checks contribute 60 points, and a score of at least 60 is required for admission. Nine optional checks contribute the remaining 40 points. Virtual modules and workstations without material state receive documented relaxations for inapplicable checks.

Admitted Skills are converted into Function-Skill interface documents, ***_common.py*** and ***simulator.py***. Each interface function contains a typed signature and an eight-part docstring: Summary, Preconditions, Cautions, Args, Constraints, State Changes, Returns and Example. The converter centralizes shared constants, data classes, result classes, exception categories and namespace classes. The simulator implements the declared checks and state changes.

Fig. 2a–c separates development from use. Stages I–III construct, assess and convert the capability layer. Stage IV loads the control Skill, generates a recipe, analyzes and simulates the recipe, reviews it and returns diagnostics for regeneration when necessary. A generated workflow becomes a candidate for downstream dispatch only after the configured checks and workflow review pass.

The supplied release materials include [Additional File 1](#) (source-code archive) and [Additional File 2](#) (Function-Skill library), with 49 Skill documents, the shared runtime, simulator and conversion/assessment sources. No version tag or commit identifier is provided.

Local archive checksums are **AF-01:**
59C0F68A82C3E7A9EF168F305658D62B5D0D70D2F7B12BB1DF97AAA1EFD430E7
and **AF-02:**

A3D71B6EB741F95900E3E5505E232B6BF9B1C80C5B5796D9C5F6ABB11DC855E
E.

Cross-references: Fig. 2a,b; Supplementary Tables S5 and S6; Supplementary Figs. S3 and S4; Supplementary Data 1.

Supplementary Note 6. Static analysis and recipe optimization

The recipe optimizer parses a generated Python recipe into an abstract syntax tree before simulation. Its security gate rejects syntax and constructs outside the bounded recipe language. The supplied implementation restricts imports to ***_common***, blocks dynamic execution and system, network, reflection and file-access functions, and validates function calls against names obtained from the Function-Skill library and common runtime.

The optimizer implements five cumulative levels. O0 performs the security gate. O1 adds recipe admission, normalization and flow analysis. O2 applies conservative AST simplification while preserving workstation-call order and experimental semantics. O3 can disable unused conditional outputs using laboratory-specific rules. O4 can merge compatible consecutive calls to the same workstation operation. Each transformed tree is checked again after modification.

The configuration supplied with the source uses O0 as the default. O0, O1 and O2 are enabled, whereas O3 and O4 are disabled. All four archived case-validation reports record O2 structural analysis as passed; no O3 or O4 transformation was applied.

The converter subsequently serializes the accepted AST into canonical JSON. Static acceptance establishes conformance to the encoded recipe language and workstation call inventory. It does not replace stateful checks, which are performed by the simulator, or scientific review, which evaluates whether the workflow addresses the stated intent.

Cross-references: Fig. 2c; Supplementary Table S7; Supplementary Fig. S5; Supplementary Data 4; Additional File 1.

Supplementary Note 7. Stateful simulation and diagnostic-guided regeneration

The simulator evaluates each operation against its executable state. For operation k , Fig. 2c defines the validation indicator

$$V_k(\text{SimState}_t, \theta_k) = \bigwedge_j \in M_k c_{kj}(\text{SimState}_t, \theta_k),$$

where M_k is the set of MUST constraints and c_{kj} is constraint j . When all MUST constraints pass,

$$V_k = 1: (\text{SimState}_{t+1}, \Delta_k) = (T_k(\text{SimState}_t, \theta_k), \emptyset),$$

where T_k is the encoded transition. When at least one MUST constraint fails,

$$V_k = 0: (\text{SimState}_{t+1}, \Delta_k) = (\text{SimState}_t, \{e_{kj} \mid c_{kj} = 0\}).$$

This validate-then-commit rule prevents a failed call from partially modifying the simulation state. The simulator continues checking compatible downstream information and returns a batch of diagnostics. SHOULD failures are retained separately as warnings.

Each diagnostic is an `ErrorEntry` containing function name, step number, unique code, category, message, expected value, actual value, remediation, parameter snapshot and MUST/SHOULD status. The supplied categories cover volume, container, status, parameter, temperature, time, speed, pressure, file, material, sample-state, workflow and general simulation failures. Supplementary Table S8 lists the reporting schema and categories.

The runner dynamically injects simulator implementations into the workstation namespace classes declared in `_common.py`. It resets ***SimState***, executes ***generate_recipe()***, reports errors and warnings separately and returns acceptance only when the MUST-error list is empty. The virtual control-flow contexts record entry and exit events for protected and parallel blocks. The JSON converter preserves the nested topology for downstream adapters.

Fig. 2c is a schematic of the validate–diagnose–regenerate pattern rather than a case-specific archived regeneration trace.

Cross-references: Fig. 2c; Supplementary Table S8; Supplementary Figs. S5 and S6; Supplementary Data 4; Additional File 1.

Supplementary Note 8. Fe coordination environment and alkaline OER workflow

Extended Data Fig. 1a specifies a workflow to compare Fe-free Ni(OH)₂, co-precipitated Fe, post-impregnated Fe, citrate-complexed Fe and EDTA-complexed Fe while holding nominal Fe loading and electrochemical conditions constant. The recipe covers matched precursor addition, room-temperature mixing, staged drying and redispersion, XRD/infrared characterization and alkaline OER testing.

The attached case archive contains a 27-step linear workflow using 11 unique workstations. Its canonical representation is $\text{SEQ}(f_1(\theta_1), \dots, f_{27}(\theta_{27}))$; no parallel branch or bounded loop is encoded because the same vial class is reused across the formulation routes. O2 structural analysis passed, simulation passed with 27 steps, zero MUST errors and zero SHOULD warnings, and workflow generation returned template 2701712185720832.

The case manifest specifies three independent batches, matched synthesis/OER aliquots and external confirmation of local Fe coordination by Fe K-edge XANES/EXAFS, XPS, ICP-OES and optional ⁵⁷Fe Mossbauer spectroscopy. The automated workflow therefore establishes capability-relative structure and simulation admissibility; it does not by itself establish the coordination assignment or measured OER performance.

The case archive supplies the experiment-design manifest, validated JSON plan, executable recipe, validation report and workflow-service response. The reported evidence is limited to automated semantic review, structural checks and stateful simulation; physical execution data are not included.

Cross-references: Extended Data Fig. 1a; Supplementary Tables S9–S11; Supplementary Fig. S7; Supplementary Data 3; Additional File 3.

Supplementary Note 9. LDH–HMF synthesis, electrochemistry and multimodal analysis workflow

Extended Data Fig. 1b specifies integrated synthesis and electrochemical testing of layered double hydroxide catalysts for alkaline 5-hydroxymethylfurfural oxidation. Catalyst preparation and electrode fabrication form a protected sequential interval. Electrochemical testing then produces solid-electrode and liquid-product objects that are routed to parallel contact-angle, XRD and liquid-phase product analyses. Their outputs are joined for integrated assessment.

The archived topology is $F_{hybrid} = F_{par} \circ F_{lock} \circ F_{seq}$. It contains a nine-operation protected preparation interval, sequential electrochemical evaluation, three object-specific analytical branches and an explicit post-branch join.

The attached case archive supplies the 22-step LDH-HMF JSON plan and Python recipe, with a nine-operation protected preparation interval and three parallel post-test branches. O2 analysis passed; simulation executed 31 steps with zero MUST errors and zero SHOULD warnings; workflow generation returned template 2695905526579200. The case-specific run sheet fixes 1.0 M KOH plus 10 mM HMF, while the validation report records adapter and sample-handoff assumptions.

The archive records NiFe-LDH preparation, electrode fabrication, CV/EIS/constant-potential testing, contact-angle, XRD and liquid-chromatography branches, followed by integrated evaluation. The reported evidence is limited to automated semantic review and stateful simulation; physical outcome data are not included. The contact-angle holder adapter, electrode scraping/transfer and electrolyte composition remain explicit execution assumptions.

Cross-references: Extended Data Fig. 1b; Supplementary Tables S9–S11; Supplementary Fig. S8; Supplementary Data 3; Additional File 3.

Supplementary Note 10. Furfural hydrogenation and closed-loop GC optimization workflow

Extended Data Fig. 1c specifies catalyst synthesis followed by electrocatalytic hydrogenation of furfural to furfuryl alcohol and closed-loop optimization of gas-chromatographic separation. The analytical loop adjusts method variables until the predefined peak-resolution criterion is met. The selected method is then applied to quantify furfural, furfuryl alcohol and major liquid by-products and to calculate conversion, yield and selectivity.

The archived topology is $F_{hybrid} = F_{seq} \circ F_{loop}$. The full workflow must distinguish the chemistry branch from the method-optimization loop and define the join that makes the optimized method available to the quantification step. The loop requires an explicit objective, candidate parameter space, stopping predicate and maximum iteration count. Reaching the bound without satisfying the resolution predicate must return d_{loop} , not a successful method.

The attached case archive supplies the exact furfural workflow specification, Python recipe, canonical JSON, GC method and batch files, and validation report. The workflow contains 20 physical nodes, an O2-passed bounded WHILE loop with $N_{max} = 6$, pass/loop-back/fail-at-cap routes and a final quantification stage. Simulation passed with 23 executed steps, zero MUST errors and zero SHOULD warnings; workflow generation returned template 2696024588517376.

The closed-loop decision requires $R_s \geq 1.5$ for both peak pairs, tailing ≤ 2.0 and retention-time RSD $\leq 1.0\%$. The validation report identifies the GC controller, measured metrics and method persistence as assumptions. No chromatograms or physical conversion/yield/selectivity outcomes are supplied, so the case supports workflow construction rather than measured chemical performance.

Cross-references: Extended Data Fig. 1c; Supplementary Tables S9–S11; Supplementary Fig. S9; Supplementary Data 3; Additional File 3.

Supplementary Note 11. ZnO synthesis and adaptive spectroscopic characterization workflow

Extended Data Fig. 1d specifies automated ZnO nanoparticle synthesis, centrifugal purification, drying, redispersion and parallel FTIR and UV–vis characterization. The UV–vis branch includes dilution and remeasurement until absorbance lies within a predefined quantitative interval. The FTIR and accepted UV–vis outputs are then joined.

The attached case archive supplies the ZnO Python recipe, canonical JSON, submitted workflow request, solid-weighing workbook and validation report. The workflow contains 27 physical nodes across 15 workstations, two parallel characterization branches and a bounded UV–vis dilution/remasurement loop with $N_{\text{max}} = 3$ and a 0.20–1.00 AU acceptance interval. O2 analysis passed; simulation executed 30 steps with zero MUST errors and zero SHOULD warnings; workflow generation returned template 2690180845338624.

The FTIR and UV–vis branches use disjoint container classes. The UV–vis guard applies the measured absorbance interval conceptually, while the supplied simulation uses a deterministic starting absorbance and a 0.5 dilution response.

Cross-references: Extended Data Fig. 1d; Supplementary Tables S9–S11; Supplementary Fig. S10; Supplementary Data 3; Additional File 3.

Supplementary Note 12. Reproducibility and release package

Reproduction requires a frozen software release, a frozen Function-Skill library and the exact artifacts for every reported workflow. The release should include the recipe optimizer, simulator runner, simulator implementation, common runtime, recipe converter, Function-Skill converter, quality assessor, configuration files, dependency specification and documentation. It should also include the four prompts, archived recipes, AST/JSON outputs, automated semantic-review reports and simulation logs.

The supplied package now includes Additional File 1 (source-code archive), Additional File 2 (49-workstation Function-Skill library), Additional File 3 (the four-case workflow archive) and Additional File 4 (release-page text). The local source archive contains the optimizer, simulator, converter, runtime and configuration files. A commit identifier, dependency lockfile and final non-sensitive model record remain unspecified.

The local release artifacts have been assigned archive-level SHA-256 values in Supplementary Data 4. Before public or reviewer release, the source archive must exclude credential-bearing configuration, internal object-storage URLs, temporary files and local paths. The AF-04 address is not treated as a persistent public link.

The case dialogues record the scientific prompts and generation dates in the four AF-03 folders. Exact provider/model, decoding parameters, random seeds and a deterministic reproduction statement are not present in the supplied package; those fields remain release metadata rather than inferred values.

Additional Files 1–3 are present locally. Additional File 4 contains an author-supplied internal release-page record, not a verified persistent public or reviewer-access repository. The three local archives are catalogued in Supplementary Table S12 and their checksums recorded in Supplementary Data 4. The supplied package does not include a dependency lockfile or final model metadata, and the source archive requires credential and internal-path sanitization before release.

Cross-references: Supplementary Tables S10–S12; Supplementary Data 4; Additional Files 1–4.

Supplementary Tables

Supplementary Table S1. Authoritative notation used in Figs. 1 and 2, Extended Data Fig. 1 and the mathematical-definition document.

Symbol	Definition	Scope or condition
S_t	Typed research-object state at workflow step t	Contains identity, sample, container, evidence and extensible object-level fields
x	Generic state argument	Generic state argument supplied to loop, conditional and parallel operators
t	Workflow-step index	Used in S_t and SimStatet
f_i	Primitive operation i	Workstation-bound state transition
i,j,k	Locally quantified integer indices	Index operations, branches, loop checks, constraints or schedule offsets as specified in each equation
θ_i	Parameters of operation i	Typed and constrained by the corresponding Function Skill
e_k	Non-negative error or convergence metric evaluated after iteration k of a loop.	Used in F_{loop} ; convergence is reached when $e_k \leq \varepsilon$.
ε	Prespecified non-negative convergence tolerance; the loop terminates when $e_k \leq \varepsilon$.	Convergence threshold for F_{loop} ; the loop continues while $e_k > \varepsilon$.
z	Observed measurement, diagnostic quantity, or state-derived value supplied to a conditional decision function.	Input quantity supplied to $Q(z)$ for evaluation of an F_{cond} branch.
$Q(z)$	Scalar decision metric evaluated from z for conditional branch selection.	Used in F_{cond} ; the positive branch is selected when $Q(z) \geq Q_{thre}$.
Q_{thre}	Prespecified decision threshold; the positive branch is selected when	Decision threshold for ; separates the positive and negative branches.
r	Current repetition count of the enclosing workflow.	Repetition counter for the enclosing workflow; compared with R_{max} after each repetition.
R_{max}	Maximum permitted number of repetitions of the enclosing workflow before forced termination.	Hard repetition bound; execution terminates when $r \geq R_{max}$, otherwise the enclosing workflow repeats.
P_i	Precondition predicate for operation i	Operation is admissible when $P_i(S_t, \theta_i) = 1$

Symbol	Definition	Scope or condition
$P_j^{-1}(\{1\})$	Set of states satisfying precondition P_j	$P_j^{-1}(\{1\}) = \{S \in D_j P_j(S, \theta_j) = 1\}$
D_i	Domain accepted by operation or branch i	Used as an accepted input domain in Eq. (3) and as a branch-local projection target in Eqs. (9) and (11)
F_{seq}	Sequential composition	Defined in Eq. (2); adjacent-domain compatibility is specified by Eq. (3)
n	Number of operations in the considered ordered sequence	Used in Eqs. (2) and (3) and in $1 \leq a \leq b \leq n$
B	Transformation corresponding to one complete loop-body execution	Eq. (4)
I	Identity state transformation	$I(x) = x$
x_{in}	Loop-entry state	$x^{(0)} = x_{in}$
$x^{(j)}$	State after j completed loop-body executions	$x^{(j+1)} = B(x^{(j)})$
F_{loop}	Bounded loop composition	Eqs. (4)–(6)
g_j	Loop continuation predicate after check j	One continues; zero exits
τ	Realized loop count	Bounded by N_{max}
N_{max}	Maximum permitted loop count	Produces d_{loop} if continuation remains true
d_{loop}	Non-convergence diagnostic	Non-empty under Eq. (6)
$q_i(x)$	Binary guard associated with conditional branch i	exactly one guard is active for each admissible input
i^*	Active conditional-branch index for the current input x	Unique index satisfying $q_{i^*}(x) = 1$
F_{cond}	Conditional composition	Unique active branch under Eqs. (7) and (8)
m	Number of conditional branches	Exactly one $q_i(x)$ equals one
F_{par}	Parallel fork–join composition	Eqs. (9)–(11)

Symbol	Definition	Scope or condition
p	Number of parallel branches	$p \geq 2$
π_{Di}	Projection onto branch i 's required state and resources	Applied before branch execution
J	Join operator	Merges consistent branch outputs
W_i	Write set of branch i	Used in Eq. (10)
L_i	Read set of branch i	Used in Eq. (10); retain this symbol from the supplied definition
A	Protected atomic interval $\{f_a, \dots, f_b\}$	Eq. (12)
F_A	Composition inside protected interval A	Same control-flow class as figure label F_{lock}
F_{lock}	Figure label for protected non-interleavable composition	Use consistently with F_A
$\sigma(f)$	Position of operation f in the schedule	Eqs. (13) and (14)
h	Scheduled operation instance outside protected interval A	Used in Eq. (14)
F_{hybrid}	Workflow composed from two or more operator classes	Used in Fig. 1d and Extended Data Fig. 1
k	Wash-loop iteration index	$k=1, \dots, T$; used in $S_i^{(k)}$ for states generated during the k -th execution of the wash-loop body
$S_i^{(k)}$	Research-object state at workflow node i during wash-loop iteration k	Applied to $i \in \{4, 5, 6, 7, 8, 9\}$
$SimState_t$	Executable simulator state at step t	Bounded executable projection of the conceptual research-object collection S_t
V_k	MUST-validation indicator for operation k	Conjunction of c_{kj}
M_k	Set of MUST constraints for operation k	Used by V_k
c_{kj}	Constraint j for operation k	Boolean predicate
T_k	Encoded state transition for operation k	Committed only when $V_k=1$

Symbol	Definition	Scope or condition
Δ_k	Structured diagnostic set returned for operation k	Empty on success; contains failed constraints on failure
e_{kj}	Diagnostic associated with failed c_{kj}	Included when $c_{kj}=0$

Supplementary Table S2. Conceptual research-object fields and their implemented simulation projection.

Component	Conceptual fields in Fig. 1b	Current executable fields	Evidence or limitation
Identity	Object identifier and provenance links	Container key combines type and identifier; step log retains operation order	Object-level provenance beyond container identity requires case JSON
Sample	Identity, composition, phase, mass, volume and extensible properties	sample_status, sample_volume_ml, sample_mass_g	Composition is represented in recipe parameters or case records, not as a general SimState field
Container	Type, shape, capacity, lid or holder state and location	container_id, container_type, container_status, location	Geometry and capacity limits are encoded in Skill constraints and shared constants
Evidence	Temperature, pH, colour, XRD, UV-vis and other outputs	Typed result objects, test_result_file, logs and diagnostics	Operation-specific evidence schemas are recorded in typed result classes and case JSON records
Capability binding	Accepted container, phase or volume, parameter limits and expected effects	Function namespace, typed signature, preconditions, MUST/SHOULD constraints and state changes	Defined in Function-Skill documents
State history	$S_t \rightarrow S_{t+1}$ with retained provenance	SimState.logs, step counter and committed container state	Stepwise history is retained in SimState.logs and the case JSON records

Supplementary Table S3. Function-Skill contract schema.

Contract element	Required content	Executable realization	Acceptance requirement
Workstation	Unique English namespace, Chinese name, module and identifier	Namespace class in <code>_common.py</code>	Namespace must resolve to a registered simulator function
Summary	One-sentence operation purpose	Docstring	Must agree with source capability description
Preconditions	Accepted object, container and sample states	<code>require_*</code> checks and operation-specific checks	Every declared MUST precondition must be implemented
Cautions	Cross-step effects and device-specific restrictions	Documentation and automated checks	Must not be converted into hidden simulator behavior
Args	Typed values with unit-bearing names and enumerations	Function signature and data classes	Values must parse and fall within documented types
Constraints	MUST/SHOULD Boolean conditions with failure categories	<code>record_error</code> and <code>record_warning</code>	All feasible checks are collected in one pass
State Changes	Explicit target fields and effects	Validate-then-commit update	No state update is allowed after a failed MUST rule
Returns	StepResult or operation-specific subclass	Typed result object	Data-producing operations include evidence references
Example	Valid, internally consistent call	Skill document	Must use a registered namespace and legal values
Raises or diagnostics	Category, message, expected, actual and remediation	ErrorEntry	MUST and SHOULD records remain separate

Supplementary Table S4. Composition operators, invariants and code representation.

Operator	Formal definition	Required invariant	Python representation	Canonical JSON token
Sequence	Eqs. (2), (3)	Each output lies in the next domain and each precondition holds	Ordered statements	SEQ(...)
Bounded loop	Eqs. (4)–(6)	Explicit continuation predicate, finite N_{max} , diagnostic at non-convergence	while or for	WHILE(...) or FOR(...)
Conditional	Eqs. (7), (8)	Exactly one branch is selected	if/elif/else	IF(...)
Parallel fork–join	Eqs. (9)–(11)	No write conflict and agreement on shared state	parallel_execution with branch contexts	PAR(...)
Protected interval	Eqs. (12)–(14)	Contiguous scheduled positions with no external interleaving	atomic_lock context	ATOMIC(.. .)

Supplementary Table S5. Capability inventory in the supplied Function-Skill snapshot.

Module	Workstations, grouped by declared capability	Workstation count	Declared functions
Synthesis	Container storage; general material; liquid handling at 1 ml, 4 channels and 5 ml in multiple versions; liquid pouring; drying; single- and multi-channel solid dosing; solid transfer; centrifugation; cleaning and dispensing; cooling; heat-resistant container supply; heated and room-temperature stirring; muffle furnace; plate storage; spectroscopy holder preparation; ultrasonic dispersion and liquid handling; intelligent photocatalysis container transfer; purification	28	41
Reaction and testing	Dual-station electrochemistry; high-temperature/high-pressure microreaction; photocatalysis V1 and V2; post-reaction processing	5	6
Characterization	Dark-box imaging; fluorescence; gas chromatography; high-speed imaging; infrared; contact angle; illumination and membrane clamping; liquid chromatography; microplate reader; spectroscopy container transfer; UV–visible spectroscopy; XRD	12	13
Virtual control flow	Atomic lock; parallel branch; conditional jump; loop	4	3 explicit context functions plus native Python control
Total	45 physical and 4 virtual workstation specifications	49	63

Supplementary Table S6. Natural-language Skill quality-assessment rubric.

Check	Maximum score	Requirement
R1 Workstation name/title	10	Name, code and primary title
R2 Operation description	10	Explicit operation section and purpose
R3 Parameter information	15	Parameter names, types, levels, units and constraints
R4 Initial state	10	Container type, container state and sample state where applicable
R5 State update	10	Explicit effect or state-transition mapping
R6 Constraint rules	5	Business and parameter constraints
Required subtotal	60	Admission threshold is at least 60
O1 Frontmatter completeness	5	Name, description, module and code
O2 Similar-workstation distinction	5	Version or capability distinction
O3 Overall workflow constraints	5	Required predecessor or process dependency
O4 Parameter-constraint format	5	Explicit ranges, enumeration or conditional dependency
O5 Nested-parameter expansion	5	Structured nested inputs
O6 File parameters	3	Template, format and transfer requirements
O7 Return values	5	Typed output schema
O8 State-transition completeness	4	Coverage of declared initial-state fields
O9 Example completeness	3	Valid example values and call
Optional subtotal	40	Used to assess conversion completeness

Supplementary Table S7. Recipe optimizer levels and supplied configuration.

Level	Implemented behavior	Supplied configuration	Final case-use evidence
O0	Syntax and attack-surface gate; import, node, name and function-call restrictions	Enabled; default	Included in the O2 checks recorded for all four cases; no separate command line supplied
O1	O0 plus generate_recipe() admission, normalization, flow warnings and merge suggestions	Enabled	Included in the O2 admission and flow checks
O2	O1 plus conservative AST simplification; no workstation-call reordering	Enabled	Passed for Fe coordination/OER, LDH-HMF, furfural and ZnO
O3	O2 plus disabling of unused conditional outputs under configured rules	Disabled	Disabled; no case evidence of use
O4	O3 plus compatible consecutive-call merging	Disabled	Disabled; no case evidence of use; advisory merges were not applied

Supplementary Table S8. Structured simulation diagnostics.

Field or category	Meaning	Required reporting
function_name	Operation that produced the diagnostic	Registered namespace operation
step_number	Position in simulated workflow	Integer step identifier
code	Unique machine-readable error code	Stable across reruns of the same release
category	Diagnostic class	One of the release categories below
message	Observed failure	Current value and expected condition
expected, actual	Normalized comparison	Explicit where applicable
remediation	Proposed repair	Parameter adjustment or missing/reordered operation
params_snapshot	Relevant call arguments	Sufficient to reproduce the failure
is_must	Blocking status	MUST enters errors; SHOULD enters warnings
Volume and volume-constraint categories	Insufficient or excessive sample or transfer volume	VolumeError, VolumeConstraintError
Container and material categories	Missing, incompatible or excessive container/material	ContainerConstraintError, MaterialConstraintError
State categories	Invalid container or sample state	StatusError, SampleStatusError
Parameter categories	Missing, out-of-range, dependent or otherwise invalid parameter	ParameterError, ParameterRangeError, ParameterConstraintError, ParameterDependencyError, ParameterMissingError
Physical-limit categories	Temperature, time, speed or pressure failure	TemperatureError, TimeError, SpeedError, PressureError
File categories	Invalid file or template input	FileFormatError, FileConstraintError
Workflow and simulation categories	Missing, unordered or otherwise invalid workflow element	WorkflowError, SimulationError

Supplementary Table S9. Extended Data Fig. 1 scientific intents and displayed operator topologies.

Panel	Scientific intent	Displayed algebra	Required evidence	Reconciliation status
Extended Data Fig. 1a	Fe coordination environment modulation and alkaline OER	$F_{hybrid} = F_{seq}$	Five Fe-introduction routes, matched OER aliquots, XRD/IR outputs and external coordination confirmation	27-step linear archive; O2/simulation/workflow generation passed; coordination assignment and physical OER data remain external
Extended Data Fig. 1b	LDH synthesis, HMF oxidation and multimodal analysis	$F_{hybrid} = F_{par} \circ F_{lock} \circ F_{seq}$	Protected endpoints, object projections, parallel branches and join	Exact archive supplied; O2 and simulation passed with zero errors; adapter assumptions and physical outcomes remain explicit
Extended Data Fig. 1c	Furfural hydrogenation and closed-loop GC optimization	$F_{hybrid} = F_{seq} \circ F_{loop}$	Objective, parameter space, stopping predicate, bound and method trace	Exact archive supplied; bounded loop and O2/simulation passed; chromatographic measurements remain assumptions
Extended Data Fig. 1d	ZnO synthesis and adaptive FTIR/UV–visible analysis	$F_{hybrid} = F_{par} \circ F_{loop} \circ F_{cond} \circ F_{seq}$	UV–vis condition, dilution action, repeat bound and join	Exact archive supplied; bounded ultraviolet–visible loop and nested conditional are explicit in canonical JSON

Supplementary Table S10. Required per-case artifact and graph-metric record.

Record	Fe coordination/OER	LDH-HMF	Furfural	ZnO
Exact prompt	Dialogue history.md; exact Fe coordination/OER prompt	Dialogue history.md; exact LDH-HMF prompt	Dialogue history.md; exact furfural/GC prompt	Dialogue history.md; exact ZnO prompt
First-pass recipe	One archived recipe; no separate v1/final pair	One archived recipe; no separate v1/final pair	One archived recipe; no separate v1/final pair	One archived recipe; no separate v1/final pair
Final recipe	Same archived recipe; no separate final pair	Same archived recipe; no separate final pair	Same archived recipe; no separate final pair	Same archived recipe; no separate final pair
Canonical AST/JSON	experiment_plan.json; SEQ(f ₁ –f ₂₇)	recipe_ldh_hmf_oxidation.json; ATOMIC + PAR	recipe_furfural_furfuryl_alcohol_gc_loop.json; WHILE	recipe_ZnO_nanoparticle_adaptive_spectroscopy.json; PAR + WHILE
Primitive-operation nodes	27	22	20	27
Unique physical workstations	11	11	11	15
Sequence blocks	1	5	2	4

Record	Fe coordination/OER	LDH–HMF	Furfural	ZnO
Loop blocks and bounds	0	0	1 ($N_{\max} = 6$)	1 ($N_{\max} = 3$)
Conditional blocks	0	1	1	2
Parallel branches	0	3	0	2
Protected intervals	0	1 (f_1 – f_9)	0	0
MUST errors before regeneration	0	0	0	0
MUST errors after regeneration	0	0	0	0
SHOULD warnings after regeneration	0	0	0	0


Supplementary Table S11. Automated semantic review and simulation outcomes.

Case	Automated semantic review	Stateful simulation
Fe coordination/OER	Passed with warnings; external coordination confirmation remains outside the automated workflow.	Passed; 27 steps, 0 MUST errors, 0 SHOULD warnings.
LDH-HMF	Passed with warnings; adapter and sample-handoff assumptions are recorded.	Passed; 31 steps, 0 MUST errors, 0 SHOULD warnings.
Furfural-GC	Passed with assumptions; GC metric publication and method persistence are external controller assumptions.	Passed; 23 steps, 0 MUST errors, 0 SHOULD warnings.
ZnO spectroscopy	Passed with information; absorbance and dilution response are simulation controls.	Passed; 30 steps, 0 MUST errors, 0 SHOULD warnings.

Supplementary Table S12. Software, model and release manifest.

Artifact	Role	Supplied status
recipe_optimizer.py	Security, admission and AST optimization	AF-01 source archive; local archive hash recorded below
run_simulation.py	Runtime registration and simulation entry point	AF-01 source archive
references/simulator.py	Constraint checks and state transitions	AF-01 source archive
references/_common.py	Shared constants, types, results and namespaces	AF-01 source archive
recipe_converter.py	Python/JSON conversion and canonical form	AF-01 source archive
skills_to_functions.py	Natural-language to Function-Skill conversion	AF-01 source archive
skill_quality_assessor.py	Skill admission	AF-01 source archive
optimizer_config.json	Enabled optimizer levels	AF-01 source archive; O0–O2 enabled, O3–O4 disabled
o3_conditional_rules.yaml	Conditional-output optimization rules	AF-01 source archive
domain_validation_rules.yaml	Laboratory-specific validation rules	AF-01 source archive
quality_scoring_config.json	Skill admission rubric	AF-01 source archive; threshold 60
Python and dependencies	Execution environment	No lockfile in supplied package
Generative model	Recipe or Skill generation	AF-03 dialogues and validation reports
Source-code release	Reproduction package	AF-01 Source-code archive.zip
Function-Skill release	Capability package	AF-02 Function-Skill library.zip
Extended Data Fig. 1 case archive	Exact prompts, recipes and logs	AF-03 Extended Data Fig. 1 workflow archive.zip
Release-page record	Internal provenance record; not a verified persistent public/reviewer route	AF-04 Release page.txt

Supplementary Figures

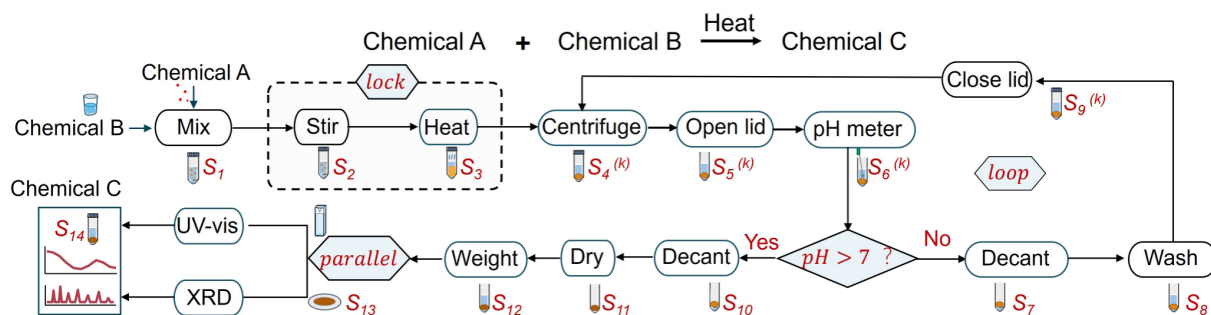

Field-level state changes throughout the representative workflow

State	Triggering operation	Sample state	Mass/volume state	Container and lid state	Evidence appended / principal change
S ₁	f ₁ : mixing	Suspension of A and B	Total mass/volume	50mL tube; lid closed	Mixing completed; sample identity and provenance initialized
S ₂	f ₂ : stirring	Homogenized suspension	Unchanged	50mL tube; lid closed	Stirring time and speed appended
S ₃	f ₃ : heating	Heated reaction mixture	Unchanged	50mL tube; lid closed	Heating temperature and duration appended
S ₄	f ₄ : centrifuge	Liquid-solid separated	Unchanged	50mL tube; lid closed	Centrifugation speed and duration appended
S ₅	f ₅ : open lid	Liquid-solid mixture	Unchanged	50mL tube; lid open	Lid-state transition appended
S ₆	f ₆ : pH measurement	Liquid-solid mixture	Unchanged	50mL tube; lid open	Measured pH appended as evidence
S ₇	f ₇ : decant after pH ≤ 7	Retained solid	Supernatant removed	50mL tube; lid open	Conditional result and decanted volume appended
S ₈	f ₈ : wash	Washed suspension	Wash liquid added	50mL tube; lid open	Washing reagent, volume and cycle number appended
S ₉	f ₉ : close lid	Washed suspension prepared for repeated separation	Unchanged	50mL tube; lid closed	Lid closure and loop-back event appended
S ₁₀	f ₁₀ : decant after pH > 7	Final washed solid retained; supernatant removed	Supernatant removed	50mL tube; lid open	Passing decision and final decant record appended
S ₁₁	f ₁₁ : dry	Dry solid	Solvent removed	50ml tube; lid open	Drying temperature and duration appended
S ₁₂	f ₁₂ : weigh	Dry solid aliquot	Measured mass	50ml tube; lid open	Mass measurement appended as evidence
S ₁₃	f ₁₃ : parallel sample preparation/for k	Characterized solid	Unchanged	XRD holder and quartz cuvette	Branch identities, aliquot masses and parent-child provenance appended
S ₁₄	f ₁₄ : parallel characterization and join	Characterized Chemical C; material state nominally unchanged	Unchanged except for any consumed characterization aliquot	Characterization holders; branches completed and joined	XRD and UV-Vis results appended and combined into the final evidence record


Supplementary Fig. S1 | Stateful synthesis – characterization workflow and field-level state changes. The workflow includes a protected sequence, a pH-dependent wash loop, and parallel UV-vis/XRD analysis. States S1-S14 are research-object states summarized in the table below. Superscript k denotes the wash-loop iteration index ($k=1, \dots, T$); $S_i^{(k)}$ represents the research-object state at workflow node i during iteration k . States $S_4^{(k)}$ – $S_9^{(k)}$ belong to the repeated loop body, whereas S_{10} is reached after the exit condition $pH(S_6^{(k)}) > 7$ is satisfied.

Valid Violation (mandatory) State /object Operation A, B ... Research object S_i State (key attributes)			
Operator	Required invariant (admissibility rule)	Valid execution (accepted)	Representative violation (rejected)
1. Sequence A → B	The output state of A must satisfy the input requirements of B.	S_i liquid lid open A S_i liquid lid open B (requires liquid) S_o accepted Output of A matches the input requirement of B.	S_i solid dry A S_i solid dry B (requires liquid) State mismatch: required liquid, actual solid.
2. Loop Loop(A, C, N_{max})	The guard C must become false and the loop must exit within the bound N _{max} .	g = true → repeat S_i A S_i C (check g) g exit g = true (and count < N_{max}) Example: exits at iteration = 3 < N_{max}	g = true → repeat S_i A S_i C (check g) g = true at count N_{max} Non-convergence: guard remains true at the bound. Example: no exit at iteration = N_{max}
3. Conditional branch If (G): {A} else {B}	Exactly one guard evaluates to true (exhaustive and mutually exclusive).	Exactly one guard is true. S_i G₁? True A S_i S_i G₂? False B	No guard is true. S_i G₁? False A S_i G₂? False B More than one guard is true. S_i G₁? True A S_i G₂? True B Violation when zero or multiple guards are true.
4. Parallel composition Par{A}	Branches execute concurrently but must not produce read/write conflicts on the same object.	S_i A1 (measure A) S_{i1} updates object A S_i A2 (measure B) S_{i2} updates object B C Different objects (A and B): no conflict.	S_i A1 (modify sample A) S_{i1} S_i A2 (modify sample A) S_{i2} Write conflict on A Both branches write (or modify) the same object.
5. Lock Lock (A, I)	All operations in the protected interval I must execute contiguously without interruption by outside operations.	Contiguous execution inside the protected interval. Lock I A₁ A₂ ... A_n No external operation inserted.	External operation inserted inside the protected interval. Lock I A₁ X (external) A₂ ... A_n An outside operation is inserted within the lock.

Violations of mandatory operator invariants return a localized diagnostic and prevent the affected state transition from being committed; the validate–then–commit mechanism is detailed in Figure S6.

Supplementary Fig. S2 | Admissibility conditions and representative violations of the five workflow operators. Valid and rejected execution patterns are illustrated for sequence, loop, conditional, parallel, and protected-interval operators. Each operator is defined by a mandatory structural invariant; violations trigger a localized diagnostic and prevent the corresponding state transition from being committed.

a Hierarchical inventory of workstation specifications

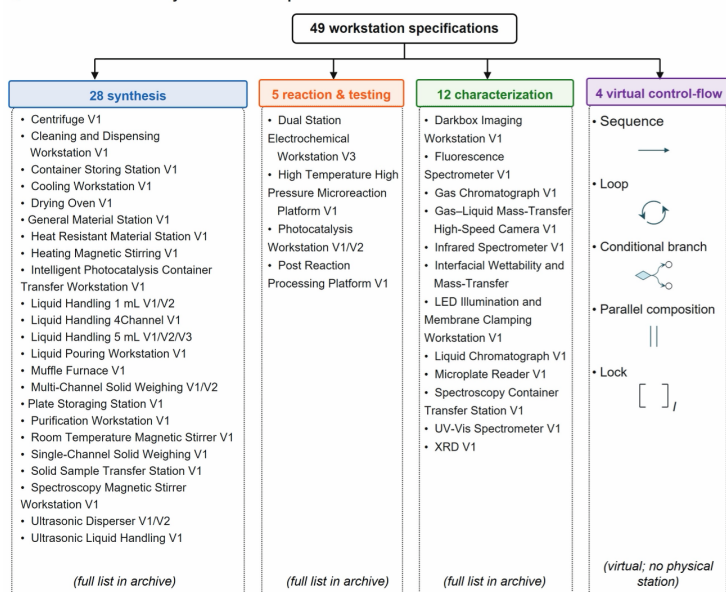


b Capability families and representative operations

	Material / container management	Store / retrieve container, transfer container
	Liquid handling	Add liquid, transfer liquid, open lid, close lid
	Solid handling	Weigh solid, transfer solid, dispense solid
	Thermal / mechanical processing	Stir / mix, heat, cool, maintain temperature, ultrasonic disperser
	Separation & purification	Centrifuge, decant, filter, wash, dry, evaporate, purify
	Reaction & testing	Run electrochemical test, perform heterogeneous catalytic reactions, photocatalysis, illuminate, clamp membrane, monitor reaction conditions
	Spectroscopy & diffraction	Measure UV-Vis, measure FTIR, measure fluorescence, measure XRD
	Chromatography	Run GC, run LC, collect chromatogram, quantify peaks
	Imaging & interface characterization	Image sample, contact angle, interfacial wettability, mass-transfer characterization, high-speed imaging
	Virtual workflow control	Sequence, conditional branch, loop, parallel composition, lock

Supplementary Fig. S3 | Hierarchical inventory of workstation specifications and capability families. (a) The 49 workstation specifications are organized into synthesis, reaction and testing, characterization, and virtual control-flow categories, with representative workstations or operators shown. (b) The corresponding capability taxonomy summarizes representative operations spanning material and container management, sample handling, processing, separation, reaction, characterization, and workflow control.

a Assessment logic of one natural-language workstation SKILL.md document

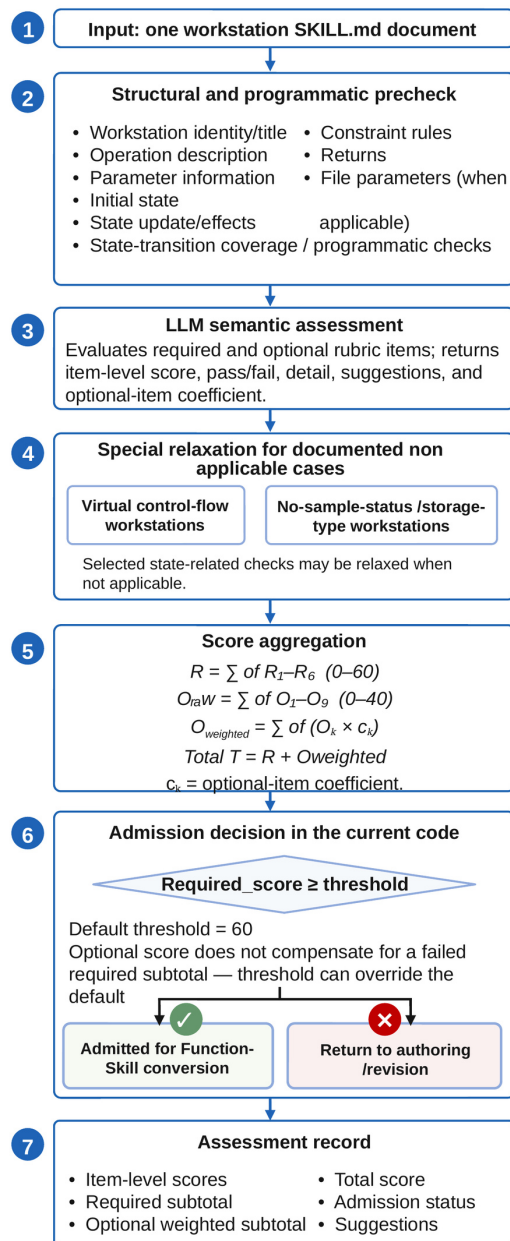


b Rubric items defined in Supplementary Table S6

Required checks (60 points)		
R1	Workstation name/title	10
R2	Operation description	10
R3	Parameter information	15
R4	Initial state	10
R5	State update	10
R6	Constraint rules	5

Optional checks (40 points)		
O1	Frontmatter completeness	5
O2	Similar-workstation distinction	5
O3	Overall workflow constraints	5
O4	Parameter-constraint format	5
O5	Nested-parameter expansion	5
O6	File parameters	3
O7	Return values	5
O8	State-transition completeness	4
O9	Example completeness	3

The quality score measures document completeness /conversion readiness; it is not an experimental performance metric.


Supplementary Fig. S4 | Natural-language Skill quality assessment and admission logic. (a) Workflow for structural checks, LLM-based semantic assessment, special-case handling, score aggregation, threshold-based admission, and assessment recording. (b) Required and optional rubric items used for Skill quality scoring, with a total score of 100 points.

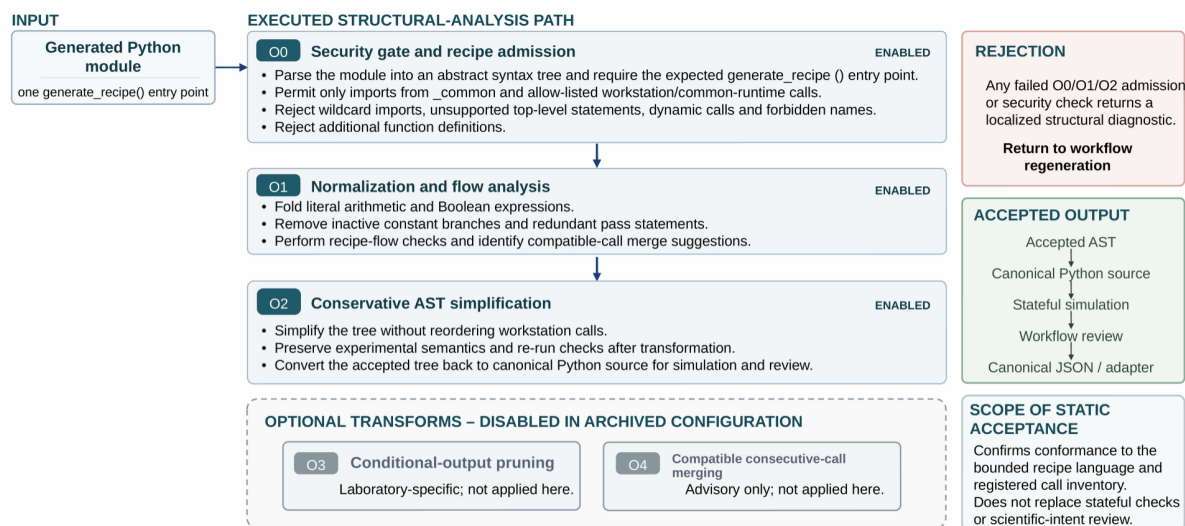

Release evidence: all four validation reports supporting Extended Data Fig. 1 record O2 structural analysis as passed.

O3 and O4 were disabled; advisory merge suggestions were not applied.

Supplementary Fig. S5 | Static analysis and conservative optimization of generated Python recipes. The workflow covers security admission, normalization, conservative AST simplification, and optional domain-aware optimization, with rejected recipes returned for regeneration and accepted recipes serialized for simulation and review. O0–O2 are enabled, whereas O3–O4 are disabled in the archived configuration. The workflow and configuration are aligned with Supplementary Note 6 and Supplementary Table S7.

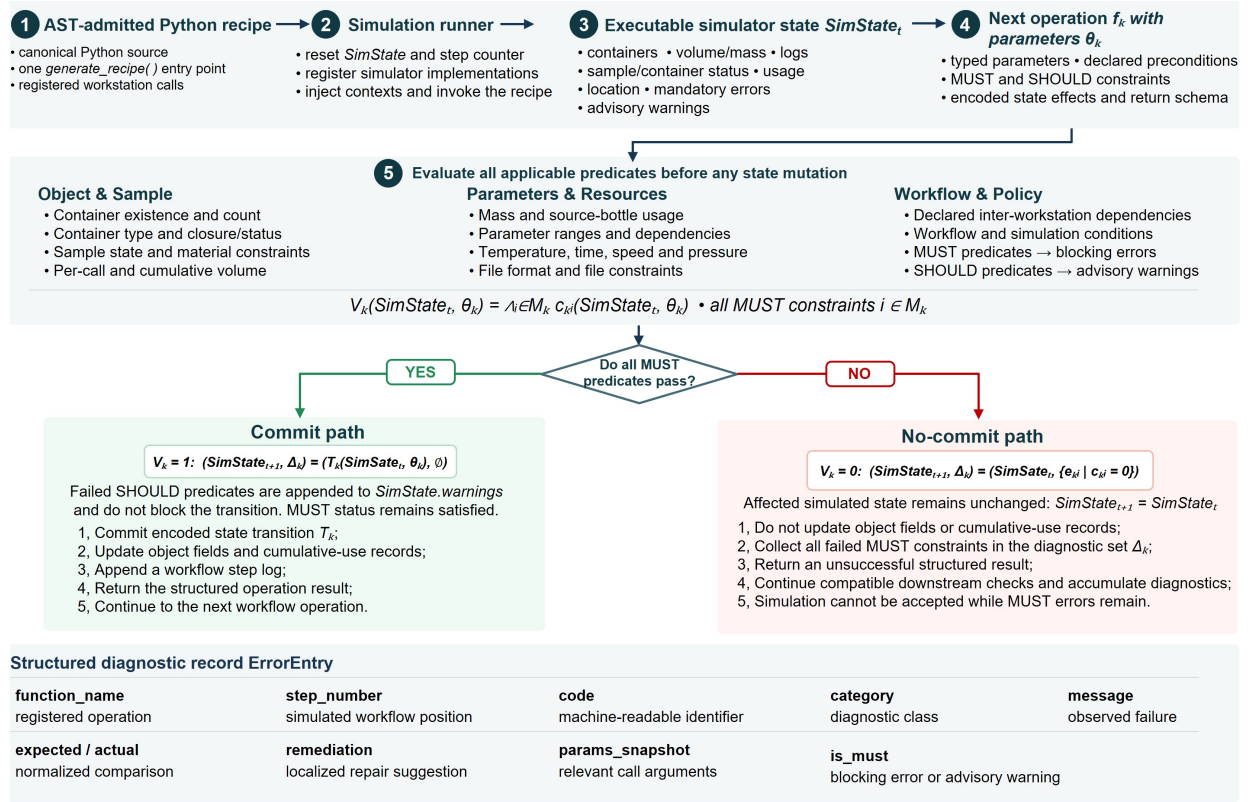


Supplementary Fig. S6 | Validate-then-commit stateful simulation and structured diagnostic reporting. Following static recipe admission, each operation is dynamically evaluated against all applicable MUST and SHOULD predicates before any state mutation. Operations satisfying all MUST constraints are committed, whereas failed MUST constraints trigger a no-commit path that preserves the current state and records structured diagnostics in ErrorEntry; SHOULD violations are retained as non-blocking warnings. Here, $SimState_t$ is the bounded executable projection of the global laboratory state $\mathcal{L}_t$. The schematic illustrates the operation-level validation logic and contains no case-specific values.

a. Scientific intent and comparison design

Fe-free control	Co-precipitated Fe	Post-impregnated Fe	Citrate-mediated Fe	EDTA-mediated Fe
Fe-free reference	Lattice-associated Fe-O-Ni hypothesis	Surface-enriched FeOx/FeOOH-like hypothesis	Ligand-modulated hypothesis and incorporation	Stronger chelation-modulated Fe availability

External coordination confirmation: Fe K-edge XANES/EXAFS • XRD • ICP-OES • optional ⁵⁷Fe Mossbauer spectroscopy.

b. Workstation architecture

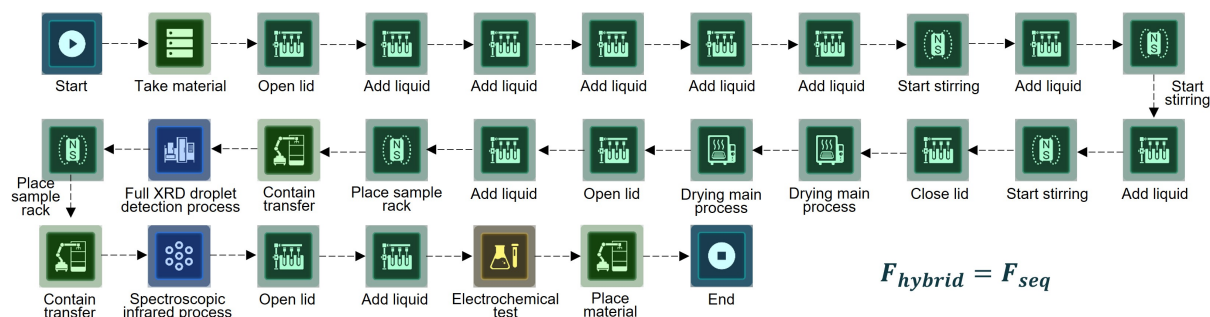

Five matched formulation routes are executed as a linear sequence because the same sample-vial container class is reused. Working coordination motifs remain hypotheses until confirmed by the external measurements listed above.

c. Validation and archived record

Optimizer	O2	Optimization	Passed	Simulation	Passed	Simulated steps	27	Physical steps	27
MUST errors	0	SHOULD warnings	0	Independent batches	3	Minimum OER measurement	15		

Archived artifacts: fe_coordination_environment_alkaline_oer.py • experiment_plan.json • experiment_design_manifest.json • validation_report.json • workflow_generation_response.json


Supplementary Fig. S7 | Full Fe coordination-environment comparison and alkaline OER workflow. The figure summarizes the experimental design used to investigate how the existing form and coordination environment of Fe influence the alkaline OER performance of NiFe-based catalysts. Five Fe-introduction routes are compared under matched synthesis and OER conditions, followed by a sequential workflow for preparation, characterization, and electrochemical testing. The archived validation results confirm successful workflow generation and simulation, while route-specific Fe coordination motifs are treated as working hypotheses requiring independent experimental verification.

Full LDH–HMF synthesis, electrochemistry and multimodal analysis workflow

a. Scientific intent

Objective: Design an integrated synthesis, electrochemical testing and multimodal characterization experiment for LDH catalysts toward alkaline 5-hydroxymethylfurfural (HMF) oxidation. The catalyst preparation and electrode-fabrication steps must follow a time-locked sequential workflow. After electrochemical testing, the solid electrode and liquid reaction products are required to undergo parallel contact-angle measurement, XRD analysis and liquid-phase product analysis, followed by integrated evaluation of the results.

b. Workstation architecture

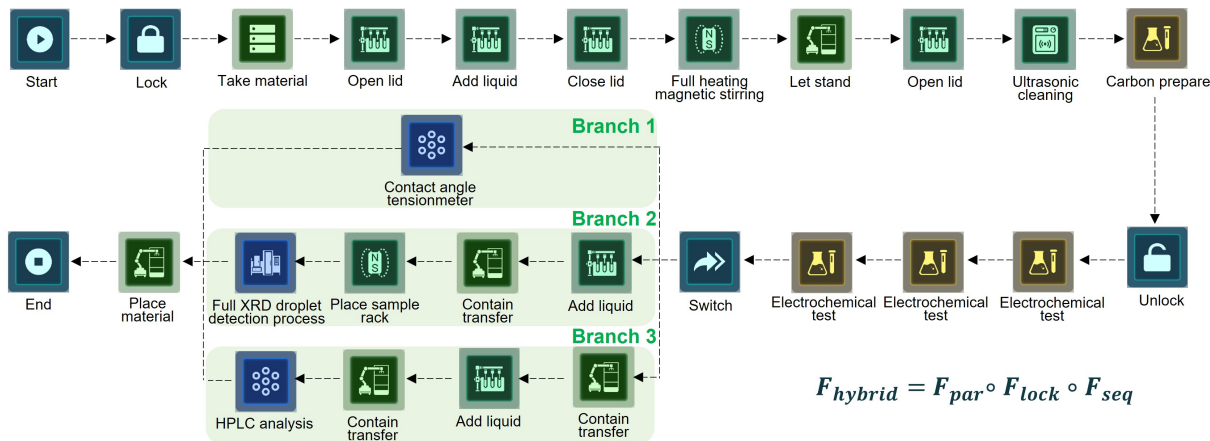

Join and integrated evaluation: Activity • selectivity • wettability • phase stability

c. Validation and archived record

Optimizer	O2	Optimization	Passed	Simulation	Passed	Simulated steps	31	Physical steps	22
MUST errors	0	SHOULD warnings	0	Atomic interval	f 1 – f 9	Parallel branches	3	Canonical atomic	Yes

Archived artifacts: recipe_ldh_hmf_oxidation.py • recipe_ldh_hmf_oxidation.json • integrated_evaluation.json • validation_report.json • workflow_generation_response.json

Supplementary Fig. S8 | Integrated synthesis, electrochemical testing, and multimodal characterization workflow for LDH catalysts toward alkaline HMF oxidation. The workflow combines a time-locked catalyst preparation sequence with sequential electrochemical evaluation, followed by parallel contact-angle, XRD, and liquid-phase product analyses. Results from all branches are subsequently joined for integrated evaluation, with archived validation confirming successful workflow generation and simulation.

Furfural hydrogenation and bounded GC optimization workflow


a. Scientific intent and analytical requirements

Objective: Design an automated catalyst synthesis and closed-loop analytical optimization experiment for the electrocatalytic hydrogenation of furfural to furfuryl alcohol. After catalyst preparation, a closed-loop algorithm is required to iteratively optimize the gas-chromatographic separation of furfural, furfuryl alcohol and major liquid by-products until predefined peak-resolution criteria are satisfied. The optimized method will then be applied to quantify the reaction mixture and evaluate furfural conversion, furfuryl alcohol yield and product selectivity. Need to use a loop node.

Monitored analytes: furfural • furfuryl alcohol • tetrahydrofurfuryl alcohol • cyclopentanone • cyclopentanol

All pass criteria: R_s (target pair) ≥ 1.50 • R_s (nearest major by product) ≥ 1.50 • max tailing ≤ 2.00 • retention time RSD $\leq 1.00\%$.

b. Workstation architecture

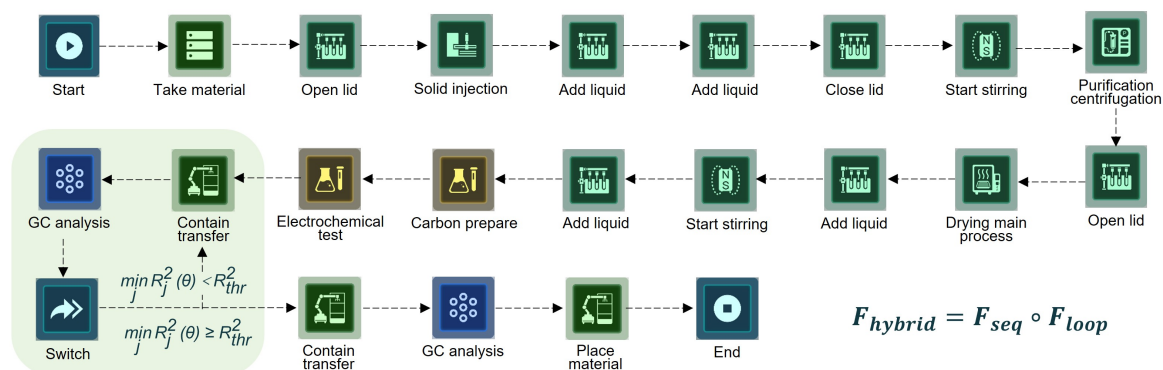


c. Validation and archived record

Optimizer	O2	Admission	Passed	Simulation	Passed	Simulated steps	23	Physical steps	20
MUST errors	0	SHOULD warnings	0	Loop verified	Yes	Loop bound N_{max}	6	Workflow generation	Passed

Archived artifacts: recipe_furfural_furfuryl_alcohol_gc_loop.py • recipe_furfural_furfuryl_alcohol_gc_loop.json • experiment_design_spec.json • validation_report.json • workflow_generation_response.json

Supplementary Fig. S9 | Automated furfural hydrogenation and closed-loop GC optimization workflow. The workflow integrates automated Cu-catalyst preparation, duplicate constant-potential electrocatalytic hydrogenation, and iterative GC method optimization for furfural, furfuryl alcohol, and major liquid by-products. GC conditions are iteratively refined until predefined separation criteria are satisfied or the maximum iteration limit is reached, after which the accepted method is used for quantitative analysis of conversion, yield, selectivity, and carbon balance. Archived validation results confirm successful workflow generation and simulation.

ZnO synthesis and adaptive parallel spectroscopy workflow

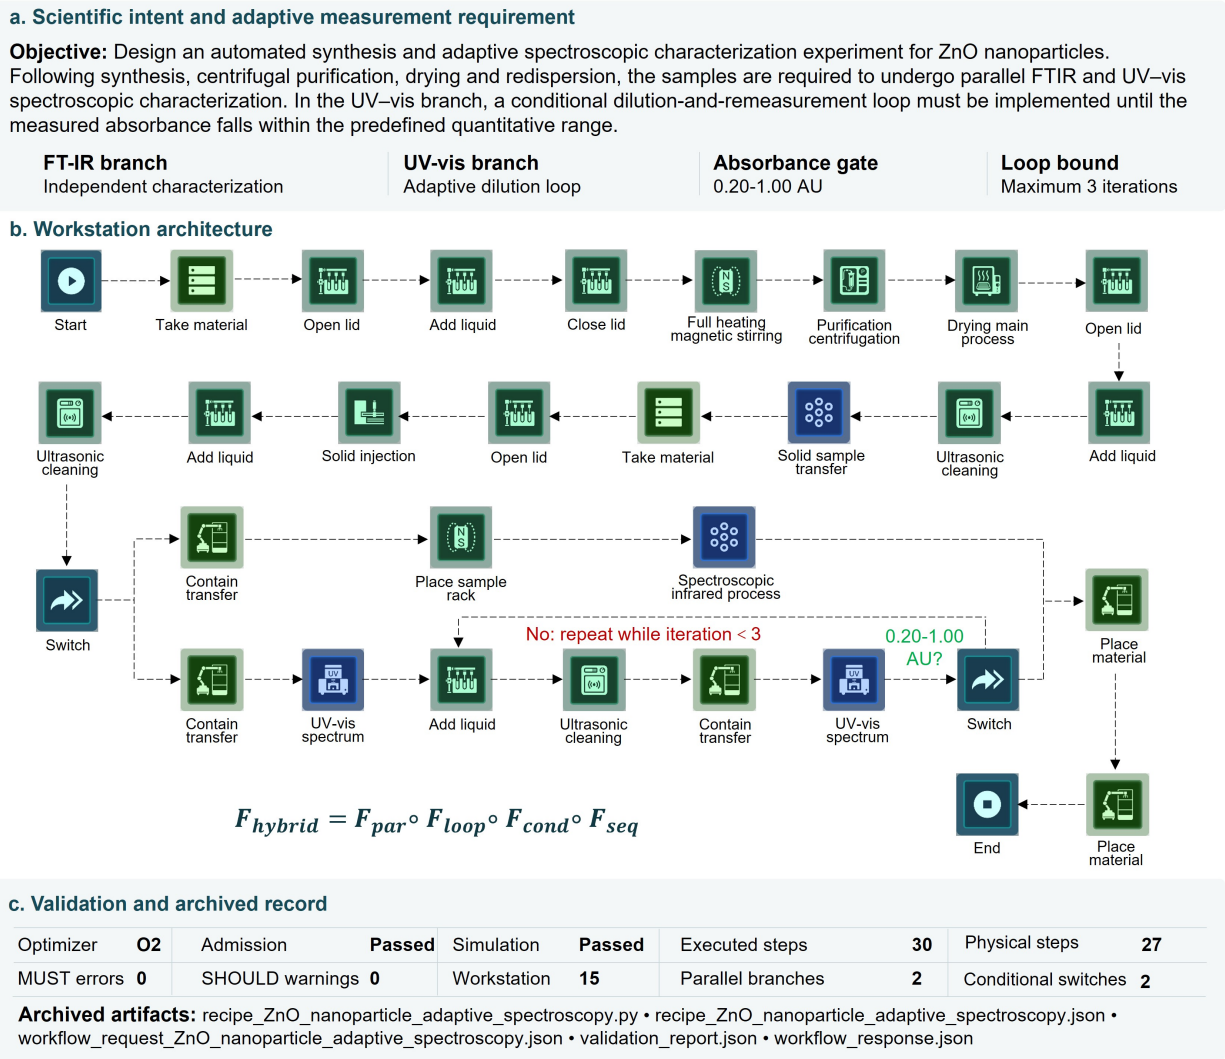

Supplementary Fig. S10 | Automated ZnO synthesis and adaptive parallel spectroscopy workflow. The workflow integrates ZnO nanoparticle synthesis, centrifugation, drying, and redispersion with parallel FTIR and UV-Vis characterization. The UV-Vis branch incorporates a bounded dilution-and-remeasurement loop until the predefined quantitative absorbance range is reached or the iteration limit is met. Archived validation confirms successful workflow generation and simulation.

SI Guide entries

Supplementary Information

Supplementary Information. Supplementary Notes 1–12, Supplementary Tables S1–S12 and Supplementary Figs. S1–S10 supporting the formal representation, Function-Skill implementation, stateful simulation and four workflow cases.

Supplementary Data

Supplementary Data 1. Capability and operation registry. Machine-readable inventory of the final workstation specifications, Function-Skill operations, accepted states, arguments, constraints, state changes, returns, source provenance, versions and checksums. File: Supplementary_Data/Supplementary_Data_1.xlsx

Supplementary Data 2. Formal grammar and canonical workflows. JSON definitions of the workflow grammar and canonical AST/JSON records for Fig. 1d and the four workflows in Extended Data Fig. 1a–d, with node-to-operation maps. File: Supplementary_Data/Supplementary_Data_2.json

Supplementary Data 3. Four-case evidence record. Exact prompts, recipe versions, workflow metrics, simulation results, structured diagnostics for Fe-coordination/OER, LDH–HMF, furfural and ZnO workflows. File: Supplementary_Data/Supplementary_Data_3.xlsx

Supplementary Data 4. Reproducibility manifest. Software, model and configuration versions, commands, environment information, filenames, SHA-256 checksums and links to author-supplied release artifacts. File: Supplementary_Data/Supplementary_Data_4.xlsx

Author-supplied Additional Files

Additional File 1. Source-code archive. Final optimizer, simulator, converter, configuration, dependency and reproduction files.

Additional File 2. Function-Skill library. Frozen 49-workstation capability library.

Additional File 3. Extended Data Fig. 1 workflow archive. Exact prompts, archived recipes, canonical JSON plans and validation reports for the four cases; physical-execution logs are not included. File: AF-03 Extended Data Fig. 1 workflow archive.zip (legacy filename retained).

Additional File 4. Release-page record. Author-supplied internal release-address record. File: AF-04 Release page.txt. T=33he recorded route is not a verified persistent public or reviewer-access repository.