

Feedback-Assisted Trust Propagation over Document Relation Graphs for Retrieval-Augmented Generation

Zhuoheng Li, Ying Chen

College of Information Sciences and Technology, The Pennsylvania State University
{zml5515, yingchen}@psu.edu

Abstract

Retrieval-augmented generation (RAG) systems rely on external corpora that may contain outdated, contradictory, noisy, or unreliable documents, introducing reliability risks. Prior work has leveraged document relations to improve the answer reliability of RAG. To propagate reliability signals beyond directly compared document pairs, we propose TrustPropRAG, which structures document relations as a graph and estimates document reliability through multi-hop propagation across the graph. TrustPropRAG anchors this propagation with a limited set of human feedback on document reliability, extending these costly-to-collect feedback-based reliability signals across the whole corpus. Specifically, based on the constructed document relation graph, TrustPropRAG estimates a trust score for each document by formulating and solving an optimization problem that jointly captures pairwise document relations and user feedback. These scores are then used to improve the selection of reliable documents and support trust-aware answer generation. Evaluation results show that TrustPropRAG improves both retrieval quality and exact match over baselines, and remains robust under sparse and noisy feedback.

1 Introduction

Retrieval-augmented generation (RAG) has emerged as an effective approach for mitigating the limitations of large language models (LLMs), whose parametric knowledge may be incomplete or outdated (Lewis et al., 2020; Borgeaud et al., 2022; Izacard et al., 2023). By retrieving knowledge from external corpora, LLMs can incorporate relevant and up-to-date information during answer generation. However, RAG’s reliance on external corpora can introduce reliability risks, as the corpora may contain noisy, outdated, or contaminated content (Zhong et al., 2023; Zou et al., 2025), as well as knowledge conflicts (Xie et al., 2024; Chen et al., 2022).

Prior work aims to improve RAG reliability in both the retrieval (Ma et al., 2023) and answer generation (Wang et al., 2025a) phases. Notably, a line of work leverages relationships among documents to improve the answer reliability of RAG, such as aggregating answers from different documents through majority agreement (Xiang et al., 2024), or selecting a subset of documents that are mutually consistent before answer generation (Shen et al., 2025). Document relations can be inferred by using natural language inference (NLI) models or leveraging source metadata.

We propose TrustPropRAG, a framework that structures document relations as a graph, as graph representations enable information to propagate through *multi-hop relations*. Recent studies have explored graph-enhanced RAG, but they mainly focus on organizing knowledge graphs (Edge et al., 2024), or constructing index graphs for retrieval (Guo et al., 2025). In contrast, we use the graph structure to estimate document reliability and propagate these estimates across the corpus through multi-hop relations. Graph propagation, however, requires anchoring, as document relations reveal consistency or conflict, but not document reliability itself. We anchor this propagation with a set of human feedback on document reliability. In practice, explicit signals (e.g., thumbs-up or thumbs-down ratings) and implicit signals (e.g., clicks or dwell time) can be attributed to the documents that contribute to the generated answer using traceback methods (Wang et al., 2025b; Cohen-Wang et al., 2024), thereby providing positive or negative signals for those documents. Since user feedback is costly to collect, TrustPropRAG leverages document relation graphs to propagate sparse feedback across the corpus, similar to how label propagation methods in semi-supervised learning (Zhu et al., 2003; Zhou et al., 2003) spread a few labeled examples across many unlabeled ones. TrustPropRAG then turns the propagated document reli-

ability scores into performance improvements in retrieval and answer generation.

To estimate document reliability and propagate estimates across the corpus, TrustPropRAG first constructs a document relation graph, where nodes represent documents and edges capture document relations (e.g., shared source, mutual support, or contradiction). Based on this graph, TrustPropRAG estimates a trust score for each document by formulating and solving an optimization problem. The problem includes two objective function terms to jointly capture pairwise document relations and incorporate user feedback. At query time, these trust scores are used for trust-aware rescoring, which helps select more reliable documents, and for trust-aware prompting, where the LLM is informed of document reliability during answer generation. Trust score optimization is performed offline over the corpus, amortizing its computational cost across future queries.

Our contributions are threefold. First, we propose a framework that estimates document trust scores by propagating human feedback over a document relation graph, and uses these scores to improve both retrieval and answer generation. Second, we formulate and solve an optimization problem for trust score estimation. We also provide a theoretical analysis of how feedback influences trust score propagation, as well as the convergence rate of the propagation. Third, we evaluate TrustPropRAG with three open-domain question-answering (QA) benchmarks, three retrievers, and six LLMs, and further test its robustness under sparse and noisy feedback. Our code is publicly available at <https://github.com/zhli0v0/TrustPropRAG>.

2 Related Work

RAG reliability. A growing body of work has studied how to improve RAG reliability. For example, InstructRAG guides LLMs to denoise retrieved contexts using rationales (Wei et al., 2025). AstuteRAG compares retrieved evidence with the LLM’s parametric knowledge to handle knowledge conflicts (Wang et al., 2025a). A notable line of work uses relationships (agreements or contradictions) among documents to improve reliability. For instance, RobustRAG isolates retrieved documents, generates per-document answers independently, and aggregates them through majority agreement (Xiang et al., 2024). TrustRAG leverages similarity relations among retrieved doc-

uments by clustering them and then filtering out contaminated documents before generation (Zhou et al., 2025). ReliabilityRAG detects contradictions between documents, selects a subset of documents that are mutually consistent, and produces the final answer via keyword aggregation (Shen et al., 2025). However, these relationships are considered within a subset of documents, and reliability is not propagated beyond the directly compared documents. To move beyond this one-hop relation, TrustPropRAG structures document relations as a graph and captures multi-hop relations among documents through the graph representation.

Graph-empowered RAG. Graphs have long been used to model relationships among textual evidence in tasks such as multi-document summarization (Christensen et al., 2013) and fact verification (Zhong et al., 2020). Recent work has also incorporated graph structures into RAG. For example, GraphRAG organizes corpora with entity knowledge graphs, and leverages community summaries for all groups of closely related entities (Edge et al., 2024). LightRAG incorporates graph structures into text indexing and relevant information retrieval for efficient RAG (Guo et al., 2025). NodeRAG introduces heterogeneous graph structures to better leverage the structural nature of graphs (Xu et al., 2025). However, these methods primarily use graphs to organize knowledge and guide retrieval. In contrast, we use graph structure to propagate document reliability estimates across the corpus that may contain noisy, outdated, or contradictory information.

Human feedback for enhancing LLMs. Human feedback has been used to align LLM systems with user preferences or intents. For example, InstructGPT trains language models with human feedback using reinforcement learning (Ouyang et al., 2022). RAG-Reward uses preference-based reward models to improve the quality of generated answers (Zhang et al., 2025a). Pistis-RAG aligns human feedback by training a ranking model to improve content ranking and retrieval mechanisms (Bai et al., 2024). Some methods further study feedback in interactive settings. For example, Liu et al. (2025b) leverages implicit feedback in human-LLM dialogues. Zhang et al. (2025b) leverages engagement and disengagement signals for improving LLM-based recommenders. These works mainly use feedback to fine-tune model behavior or improve outputs in human-LLM interactions. TrustPropRAG instead uses limited feedback

to estimate document reliability across the large-scale corpus without model fine-tuning.

3 Methodology

Our objective is to enhance RAG by selecting and using more reliable documents from an external corpus for answer generation. The external document corpus may contain unreliable documents, such as those with misinformation, outdated information, or conflicting claims (Xu et al., 2024; Zou et al., 2025). User feedback can indicate whether certain documents are reliable or unreliable. For example, correct and incorrect RAG-generated answers, reported by users or flagged by fact-verification systems, can be traced back to their contributing documents (e.g., using traceback methods (Wang et al., 2025b; Cohen-Wang et al., 2024)), providing positive or negative feedback for the corresponding documents. However, user feedback can cover only a small fraction of a large external corpus. To address this, TrustPropRAG takes advantage of document relations to propagate sparse feedback across the corpus.

As shown in Figure 1, TrustPropRAG consists of four main stages. First, we construct a graph where each node represents a document, and each edge encodes a relation between two documents, such as a same-source relation, mutual support, or contradiction (Section 3.1). Second, based on the document relation graph, we formulate and solve *optimization problems for estimating trust scores* (Section 3.2). We estimate a trust score $\tau_i \in [0, 1]$ for each document d_i by jointly optimizing these scores over all documents in the corpus $\mathcal{C} = \{d_1, d_2, \dots, d_N\}$ with N documents. Third, we perform *trust-aware rescoring* (Section 3.3). Given a user query q , the objective is to produce a ranked list $\mathcal{R}_k(q)$ of k documents that are provided to the LLM for answer generation, favoring query-relevant documents with higher trust scores. Finally, we perform *trust-aware prompting* (Section 3.4) by leveraging document trust scores during answer generation.

TrustPropRAG separates offline trust estimation from query-time answer generation. Graph construction and trust score optimization are performed offline over the corpus, amortizing their computational cost across future queries, while trust-aware rescoring and prompting are performed for each query with limited additional overhead.

3.1 Document Relation Graph Construction

Given the corpus $\mathcal{C}$, we construct a document relation graph $G = (\mathcal{C}, E)$, where each node represents a document, and each edge e_{ij} encodes a relation between documents d_i and d_j . Each edge e_{ij} is assigned a relation label ℓ_{ij} . Specifically, $\ell_{ij} = +1$ means that the two documents are expected to receive similar trust scores, $\ell_{ij} = -1$ means that they contain conflicting claims and should not both be highly trusted, and $\ell_{ij} = 0$ means that no reliable relation can be identified. Each edge also has a confidence weight $w_{ij} \in [0, 1]$, which reflects the confidence associated with the relation label ℓ_{ij} .

The relation label and confidence weight can be obtained in different ways. For example, we can use source metadata to connect two documents d_i and d_j from the same source group with supportive edges ($\ell_{ij} = +1$), because they are expected to have correlated trustworthiness and thus similar trust scores. Document relations can also be inferred using an NLI model, which derives whether documents d_i and d_j are supportive ($\ell_{ij} = +1$), contradictory ($\ell_{ij} = -1$), or neutral ($\ell_{ij} = 0$). For edges derived by NLI, the confidence weight w_{ij} is set to the softmax probability associated with the relation label.

3.2 Trust Score Optimization

Pairwise consistency loss. We encourage two documents with positive relation labels to have similar trust scores, while enforcing that contradictory documents have diverging trust scores. Specifically, if d_i and d_j are mutually supportive ($\ell_{ij} = +1$), their trust scores τ_i and τ_j should be close to each other, i.e., we aim to minimize $(\tau_i - \tau_j)^2$; whereas if $\ell_{ij} = -1$, meaning that d_i and d_j are contradictory, their trust scores should be far apart so that at most one document can be trusted, i.e., we aim to minimize $(\tau_i + \tau_j - 1)^2$. Hence, we define the pairwise consistency loss $\mathcal{L}_{\text{pair}}$:

$$\mathcal{L}_{\text{pair}} = \sum_{\substack{e_{ij} \in E \\ \ell_{ij} = +1}} w_{ij} (\tau_i - \tau_j)^2 + \sum_{\substack{e_{ij} \in E \\ \ell_{ij} = -1}} w_{ij} (\tau_i + \tau_j - 1)^2.$$

Feedback loss. Over time, we maintain a feedback set $\mathcal{F} = \mathcal{F}^+ \cup \mathcal{F}^-$: $\mathcal{F}^+$ for documents marked as reliable through user feedback, and $\mathcal{F}^-$ for documents marked as unreliable. We incorporate this feedback into the optimization problem of trust score estimation. Nodes in $\mathcal{F}^+$ are encouraged to have high trust scores, e.g., by minimizing

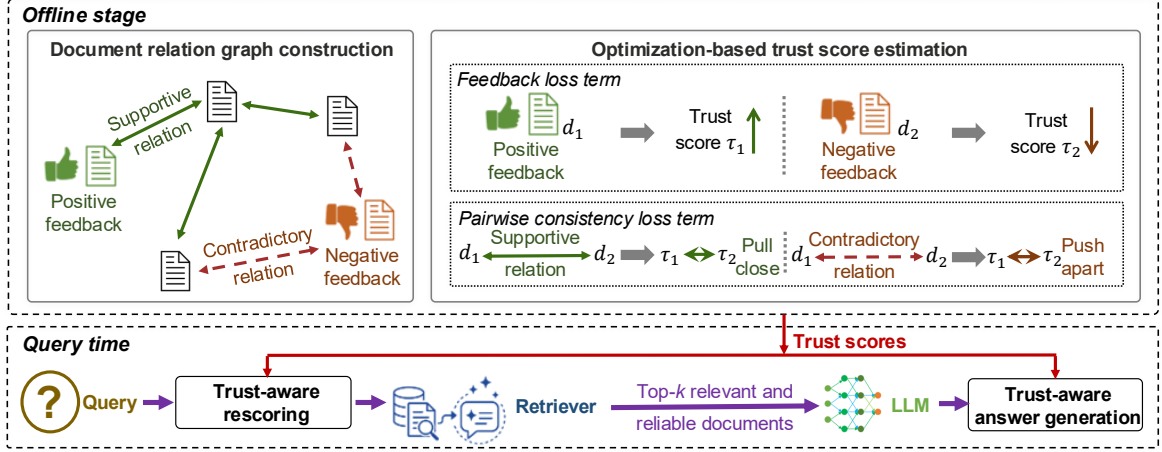


Figure 1: Overview of the TrustPropRAG pipeline.

$(\tau_i - \tau^+)^2$, where τ^+ is close to 1. In contrast, nodes in $\mathcal{F}^-$ are pushed toward lower trust scores, e.g., by minimizing $(\tau_i - \tau^-)^2$, where τ^- is close to 0, to limit their influence on answer generation. We implement this by adding a feedback term $\mathcal{L}_{fb}$ to the optimization problem of trust score estimation. $\mathcal{L}_{fb}$ is formulated as

$$\mathcal{L}_{fb} = \sum_{d_i \in \mathcal{F}} (\tau_i - y_i)^2, \quad y_i = \begin{cases} \tau^+, & \text{if } d_i \in \mathcal{F}^+ \\ \tau^-, & \text{if } d_i \in \mathcal{F}^- \end{cases},$$

where y_i is the feedback value.

Formulating trust score optimization problem.

To capture pairwise consistency of documents and incorporate user feedback, we jointly optimize objective function terms $\mathcal{L}_{pair}$ and $\mathcal{L}_{fb}$. We formulate the optimization problem to assign trust scores to all documents in the corpus:

$$\tau^* = \arg \min_{\tau \in [0,1]^N} \mathcal{L}_{pair} + \lambda_f \mathcal{L}_{fb}, \quad (1)$$

where $\tau = \{\tau_1, \tau_2, \dots, \tau_N\}$ is the set of trust scores for all documents, and λ_f controls the trade-off between the two terms.

Solving trust score optimization problem. Eq. (1) is a quadratic programming (QP) problem. We solve the problem with projected gradient descent (PGD). The document relation graph can contain many nodes but remains sparse (i.e., each node has supportive or contradictory relation labels with only a small number of other nodes). As a result, each PGD step only needs to compute the loss and gradients for document pairs connected by these relations, rather than all possible document pairs. Section 4.2 reports the measured cost of each stage in TrustPropRAG.

Before running PGD, we initialize each document’s trust score using its relations with other

documents in the document relation graph. Specifically, for each document d_i , we compute an initial score by aggregating the signed weights of its connected edges: $\text{init}(d_i) = \sum_{(i,j) \in E} \ell_{ij} \cdot w_{ij}$. Values are min-max normalized to $[\tau_{\min}, \tau_{\max}]$, with $0 < \tau_{\min} < 0.5 < \tau_{\max} < 1$. Intuitively, documents connected to others through stronger supportive relations receive higher initial trust scores, while documents involved in stronger contradictory relations receive lower initial trust scores. Graph construction and trust score optimization are performed *offline* over the corpus, amortizing their computational cost across future queries.

Theoretical analysis. Trust scores exhibit *multi-hop propagation*. Feedback on a document shifts its trust score; through pairwise document relations, this effect then spreads to its neighbors, which further propagate the influence to their neighbors. We formalize this behavior in two lemmas below. Since $\mathcal{L} = \mathcal{L}_{pair} + \lambda_f \mathcal{L}_{fb}$ is quadratic in τ , its Hessian $A = \nabla^2 \mathcal{L}$ is symmetric positive semidefinite. We assume that every connected component of G contains at least one document with feedback, which is sufficient to make A strictly positive definite (see proof in Appendix C). Let $\sigma_{\min} \leq \dots \leq \sigma_{\max}$ denote its eigenvalues and $\kappa = \sigma_{\max}/\sigma_{\min}$ its condition number. The unconstrained minimizer satisfies the linear system $A\tau^* = \mathbf{b}$. We use this unconstrained solution to analyze trust propagation and convergence rate.

Lemma 1 (Trust propagation) *Let $f_1, \dots, f_m$ be the feedback documents in $\mathcal{F}$. Suppose the feedback value y_k at each $f_k \in \mathcal{F}$ is perturbed with a change of Δy_{f_k} . Then the resulting change*

in the trust score of document d_i satisfies

$$|\Delta\tau_i| \leq \sum_{k=1}^m \gamma_k \cdot q^{d_G(i, f_k)}, \quad q = \frac{\sqrt{\kappa} - 1}{\sqrt{\kappa} + 1},$$

where $\gamma_k = 2\lambda_f \gamma |\Delta y_{f_k}|$, $\gamma = (1 + \sqrt{\kappa})^2 / (2\sigma_{\max}) = O(1/\sigma_{\min})$, and $d_G(i, j)$ is the shortest-path distance between nodes i and j in G .

Proof. See Appendix C.1.

This lemma shows that trust propagation is distance-weighted and cumulative. Each document receives influence from all documents with feedback. Each influence term is weighted by $q^{d_G(i, f_k)}$, which depends on its graph distance to the corresponding document with feedback. The result suggests that sparse feedback can still be effective when the documents with feedback are well positioned in the relation graph, allowing their influence to reach other documents through short relation paths.

Lemma 2 (Convergence) *With the fixed step size $\eta^* = 2/(\sigma_{\min} + \sigma_{\max})$, the projected gradient descent iterates satisfy*

$$\|\tau^{(t)} - \tau^*\| \leq \rho \cdot \|\tau^{(t-1)} - \tau^*\|, \quad \rho = \frac{\kappa - 1}{\kappa + 1}.$$

Proof. See Appendix C.2.

At each iteration, the error contracts by a factor of at most ρ , so the number of iterations needed to reach an ϵ -accurate solution (i.e. $\|\tau^{(t)} - \tau^*\| \leq \epsilon$) scales as $O(\kappa \log(1/\epsilon))$. In our experiments, PGD converges within 1000 iterations on tested datasets.

3.3 Trust-aware Rescoring

We select documents with both high trust scores and high query relevance, and provide them to the LLM as retrieved context for answer generation. To this end, we perform trust-aware rescoring for every document by using its estimated trust score and its similarity score. The similarity score is computed by the retriever, e.g., as a dot product score, to measure how relevant the document is to the query. Specifically, for document d_i , we combine its trust score τ_i with its normalized similarity score s_i and define the trust-aware ranking score as $r_i = \alpha\tau_i + (1 - \alpha)s_i$, where $\alpha \in [0, 1]$ controls the trade-off between document trustworthiness and its relevance to the query. We select the top- k documents with the largest r_i and provide them to the LLM for answer generation.

3.4 Trust-aware Answer Generation

Apart from using trust-aware rescoring for document retrieval, we further leverage the estimated trust scores during answer generation. Specifically, for the top- k documents with the largest trust-aware ranking scores, we format the prompt so that each document is accompanied by its trust score. We also include an instruction in the prompt to guide the LLM to place greater reliance on documents with higher trust scores during answer generation. This trust-aware prompting complements trust-aware rescoring: while rescoring filters out less reliable documents before answer generation, this trust-aware prompting helps the LLM account for document reliability during answer generation.

4 Evaluation

4.1 Evaluation Setup

Datasets. We evaluate TrustPropRAG with three open-domain QA datasets: MS MARCO (Bajaj et al., 2016), Natural Questions (NQ) (Kwiatkowski et al., 2019), and TriviaQA (Joshi et al., 2017). These datasets are widely adopted in retrieval-augmented and open-domain QA evaluation, and together they cover diverse question types. Following the evaluation settings commonly used in prior RAG reliability and robustness studies (Shen et al., 2025; Zhong et al., 2023; Wei et al., 2025; Wang et al., 2025a), we randomly sample 300 query-answer instances for each dataset. Half of the sampled queries are paired with synthetic contradictory documents generated by following the method in PoisonedRAG (Zou et al., 2025). These documents are written to remain fluent and relevant to the query while supporting answers that conflict with the ground-truth answers. The remaining queries are paired only with factual documents from the original datasets. In this way, we construct the evaluation corpus from the relevant documents associated with the sampled queries, resulting in 805, 893, and 1,037 documents for MS MARCO, NQ, and TriviaQA, respectively. This setup evaluates whether the end-to-end system can produce correct answers when the corpus contains both reliable evidence and fluent but misleading contradictory content.

Retrievers. We evaluate with both sparse and dense retrievers. We use BM25 (Robertson and Zaragoza, 2009), a sparse lexical retriever, and two dense bi-encoder retrievers: Con-

triever (Izacard et al., 2022) and MiniLM based on all-MiniLM-L6-v2 (Reimers and Gurevych, 2019). For each query, we retrieve $k=5$ documents.

Graph construction. We construct a document relation graph using two types of information: document sources and semantic relations between documents. Documents i and j from the same source are connected with supportive edges ($\ell_{ij} = +1$). In TriviaQA, we determine whether two documents share the same source based on their source Uniform Resource Locators (URLs). For MS MARCO and NQ, which do not provide source metadata, we use simulated source grouping: factual documents are partitioned into multiple source groups, and contradictory documents are partitioned into another set of source groups. Documents in the same group are treated as sharing the same source. We adopt this simulation as a proxy for real source metadata, following recent source-reliability-aware RAG work that simulates sources with varying reliability (Hwang et al., 2025). We also apply an NLI model (nli-deberta-v3-small) to each document pair. If the model predicts that two documents i and j support each other, we add a supportive edge ($\ell_{ij} = +1$). If it predicts that they contradict each other, we add a contradictory edge ($\ell_{ij} = -1$). Appendix F reports the precision and recall of the NLI-derived edges on all three datasets. Table 4 evaluates the impact of removing the source-group edges to isolate the contribution of the NLI-derived edges.

Feedback construction. We construct the feedback set by randomly sampling a fraction of factual and contradictory documents and simulating feedback labels for them. Sampled factual documents are assigned positive feedback labels, while sampled contradictory documents are assigned negative feedback labels. We refer to this sampling fraction as the feedback ratio (FB); for instance, $\text{FB} = 30\%$ means that feedback labels are provided for 30% of the documents. As real-world feedback may be imperfect, we evaluate TrustPropRAG under noisy feedback in Figure 2, where a portion of the feedback labels are incorrect.

Trust optimization. For PGD, we use a step size of $\eta = 0.01$, run for at most $T = 1000$ iterations, and stop when the convergence tolerance reaches $\epsilon = 10^{-6}$. We set feedback loss weight $\lambda_f = 1.0$. Trust scores are optimized over all corpus documents, resulting in large-scale optimization problems over 805, 893, and 1,037 documents for MS MARCO, NQ, and TriviaQA, respectively.

Rescoring. We set the trust coefficient to $\alpha=0.6$. We also test the impact of α in Section 4.2. The top- k documents, where $k = 5$ in our experiments, are provided as retrieved context to the LLM. We also test the impact of k in Appendix B.

Answer generation. We use proprietary and open-source LLMs, including GPT-4o-mini, GPT-5, Gemini 2.5 Flash, Gemini 2.5 Pro, Llama-3.1-8B-Instruct, and Mistral-7B-Instruct. TrustPropRAG leverages the trust-aware prompt that annotates each document with its trust score (as detailed in Section 3.4).

Evaluation metrics. We adopt exact match (EM) and fact precision@ k ($\text{FP}@k$) as evaluation metrics. EM is a widely used metric in open-domain QA. EM checks whether the normalized generated answer contains the ground-truth answer, with normalization including lowercasing and the removal of articles and punctuation. $\text{FP}@k$ evaluates retrieval quality, which measures the reliability of the top-ranked documents used for answer generation. Specifically, let $\mathcal{D}_{\text{fact}}$ and $\mathcal{D}_{\text{contr}}$ denote the sets of factual and contradictory documents, respectively, and let $\mathcal{R}_k(q)$ denote the top- k documents for query q . $\text{FP}@k$ is defined as the fraction of factual documents among these top- k documents:
$$\text{FP}@k = \frac{|\mathcal{R}_k(q) \cap \mathcal{D}_{\text{fact}}|}{|\mathcal{R}_k(q) \cap (\mathcal{D}_{\text{fact}} \cup \mathcal{D}_{\text{contr}})|}.$$

Baselines. We compare TrustPropRAG against the following methods: (1) *VanillaRAG* ranks documents using the relevance scores produced by the retriever and feeds the top-ranked documents to the LLM. (2) *InstructRAG* (Wei et al., 2025) guides the LLM to better use retrieved evidence during generation. It decomposes retrieved documents into atomic claims, and prompts the LLM to generate a rationale connecting relevant claims to the final answer. (3) *AstuteRAG* (Wang et al., 2025a) combines the LLM’s internal knowledge with retrieved evidence. It first prompts the LLM to produce an answer-relevant document from its internal knowledge, and then compares this document with the retrieved documents and resolves conflicts before generating the answer. (4) *ReliabilityRAG* (Shen et al., 2025) uses NLI to identify contradictions among retrieved documents. It then solves a maximum independent set problem to select a subset of documents with no detected pairwise contradictions and uses keyword aggregation to generate the final answer. (5) *TrustRAG* (Zhou et al., 2025) includes a first-stage filtering procedure that clusters the retrieved documents by embedding similarity

Dataset	Method	Contriever	BM25	MiniLM
MS MARCO	VanillaRAG	0.27	0.24	0.26
	InstructRAG	0.35	<u>0.40</u>	0.37
	AstuteRAG	0.38	0.39	0.37
	ReliabilityRAG	<u>0.42</u>	<u>0.40</u>	0.39
	TrustRAG _{stage 1}	0.36	0.35	0.33
	TrustPropRAG	0.45	0.47	0.44
NQ	VanillaRAG	0.37	0.37	0.39
	InstructRAG	<u>0.46</u>	0.48	0.43
	AstuteRAG	0.44	<u>0.50</u>	0.42
	ReliabilityRAG	0.45	<u>0.50</u>	0.48
	TrustRAG _{stage 1}	0.44	0.46	0.41
	TrustPropRAG	0.55	0.59	0.59
TriviaQA	VanillaRAG	0.57	0.62	0.49
	InstructRAG	0.68	0.67	0.69
	AstuteRAG	0.70	0.71	<u>0.72</u>
	ReliabilityRAG	<u>0.75</u>	<u>0.72</u>	0.67
	TrustRAG _{stage 1}	0.66	0.65	0.63
	TrustPropRAG	0.78	0.75	0.77

Table 1: EM averaged over GPT-4o-mini, Gemini 2.5 Flash, and GPT-5 ($k=5$, FB=30%). Best results are **bolded**; second-best results are underlined.

Dataset	Retriever	Baselines	TrustPropRAG
MS MARCO	Contriever	44%	77%
	BM25	57%	92%
	MiniLM	54%	88%
NQ	Contriever	53%	79%
	BM25	46%	88%
	MiniLM	48%	96%
TriviaQA	Contriever	38%	77%
	BM25	57%	90%
	MiniLM	49%	92%

Table 2: Retrieval quality measured by FP@5 ($k=5$, FB=30%).

and filters out clusters identified as suspicious. We use this first-stage procedure as the baseline.

4.2 Evaluation Results

TrustPropRAG outperforms baselines on EM and FP@5. Tables 1 and 2 report the EM and FP@5 averaged over GPT-4o-mini, Gemini 2.5 Flash, and GPT-5. Table 1 shows that TrustPropRAG achieves the best EM across all datasets and retrievers, with absolute EM gains of 0.03–0.11 compared with the strongest baseline. Table 2 shows FP@5 (the fraction of factual documents among top- k documents) of TrustPropRAG and baselines. All baselines have the same FP@5 as VanillaRAG under this retrieval-level metric: InstructRAG, AstuteRAG, and TrustRAG_{stage 1} operate after the retriever selects the top- k documents

based on query relevance and thus do not change the ranked top- k documents; although ReliabilityRAG filters documents before final answer generation, its filtering is driven by intermediate LLM-generated answers and their consistency, rather than by producing a new top- k list. The baseline methods have an FP@5 of 38–57%, while TrustPropRAG raises it to 77–96%. The improvement is observed with all three retrievers, indicating that the method is not tied to a specific retriever. These improvements in FP@5 help explain the EM gains of TrustPropRAG. Specifically, a higher FP@5 indicates that the top- k list contains a larger fraction of factual documents, which suggests that trust score optimization assigns higher trust to more reliable documents, and trust-aware rescoring promotes them into the top- k list. As a result, the LLM inputs contain more documents that support the correct answer.

Ablation study. We conduct an ablation study to examine the contribution of each component in TrustPropRAG. Table 3 evaluates five variants on MS MARCO with FB=30% using Gemini 2.5 Flash. We observe that the combination of trust score optimization and trust-aware rescoring leads to a substantial improvement. Compared with VanillaRAG, adding these two components increases FP@5 from 54% to 87% and improves EM from 0.28 to 0.41. This suggests that the optimized trust scores are effective for identifying more trustworthy documents and that rescoring can promote them into the top- k context used for answer generation. We also observe that trust-aware prompting provides an additional benefit when combined with trust score optimization and trust-aware rescoring, increasing EM from 0.41 to 0.46. This suggests that some low-trust documents may still remain in the top- k list after rescoring, and trust-aware prompting helps the LLM reduce their influence during answer generation. Finally, we observe that using trust-aware prompting alone does not improve performance. Without trust score optimization, FP@5 remains at 54%, and EM slightly decreases from 0.28 to 0.27 compared with VanillaRAG. This suggests the trust-aware prompt becomes useful only when the trust scores have been optimized and can provide a meaningful signal for answer generation. **The effects of trust propagation and source-group edges.** To separate the benefit of trust propagation from simply having access to feedback, the *trivial feedback* variant uses the same feedback set as TrustPropRAG but does not propagate

Variant	Opt.	Rescore	Prompt	EM	FP@5
VanillaRAG	—	—	—	0.28	54%
Opt.+Prompt	✓	—	✓	0.35	54%
Opt.+Rescore	✓	✓	—	0.41	87%
Prompt only	—	—	✓	0.27	54%
Full TrustPropRAG	✓	✓	✓	0.46	88%

Table 3: Effects of different TrustPropRAG components. *Opt.*: trust score optimization, *Rescore*: trust-aware rescoring, and *Prompt*: trust-aware prompting.

Variant	EM	FP@5
VanillaRAG	0.31	51%
TrustPropRAG (trivial feedback)	0.36	62%
TrustPropRAG (NLI-only)	0.44	79%
TrustPropRAG	0.49	92%

Table 4: Effects of trust propagation and source-group edges (MS MARCO and NQ, MiniLM, GPT-4o-mini, $k=5$, $FB=30\%$).

the feedback through the graph. Documents with positive feedback receive a boost to their retrieval scores, while documents with negative feedback are not included in the top- k list. To isolate the contribution of the NLI-derived edges from source-group edges, the *NLI-only* variant removes all simulated source-group edges and retains only the NLI-derived edges.

From Table 4, the trivial feedback variant achieves an EM of 0.36 and an FP@5 of 62%. This confirms that directly using feedback is beneficial. However, its performance remains substantially below TrustPropRAG, which achieves an EM of 0.49 and an FP@5 of 92%, respectively. This gap shows that the gain of TrustPropRAG cannot be attributed only to access to the feedback set. Propagating feedback through document relation graphs provides trust estimates for documents without direct feedback. Table 4 also shows that the NLI-only variant achieves an EM of 0.44 and an FP@5 of 79%. Although removing the source-group edges leads to a performance drop, the NLI-only variant still outperforms the trivial feedback variant, showing that propagation remains beneficial even when the graph contains only NLI-derived relations.

Performance under noisy feedback. Figure 2 evaluates the robustness of TrustPropRAG by varying the accuracy of feedback labels from 60% to 100%. Feedback accuracy denotes the fraction of feedback labels that are correct. For example, 80% feedback accuracy means that 20% of the feedback labels are flipped: a factual document may be labeled as low-trust, or a contradictory docu-

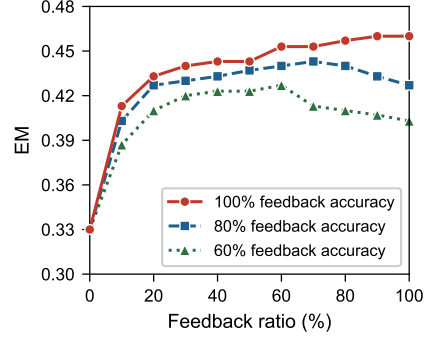


Figure 2: Impact of feedback ratio and feedback accuracy on EM (MS MARCO, MiniLM, Gemini 2.5 Flash).

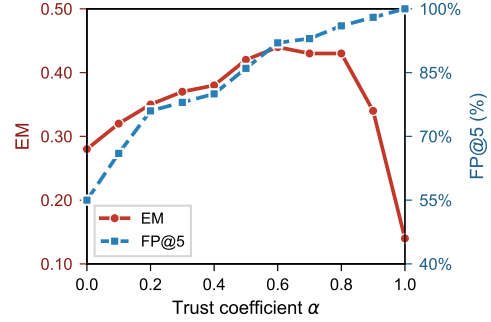


Figure 3: Impact of trust coefficient α on EM and FP@5. (MS MARCO, MiniLM, Gemini 2.5 Flash, $FB=30\%$)

ment may be labeled as high-trust. Figure 2 reports EM on MS MARCO with Gemini 2.5 Flash. We observe that TrustPropRAG is robust to noisy feedback. Even when feedback accuracy is only 60% (i.e., 40% of feedback labels are incorrect), TrustPropRAG still improves EM over the setting without feedback across all feedback ratios. This is because individual feedback errors can be mitigated through trust propagation over the document relation graph, where relations among documents help mitigate the impact of noisy feedback signals.

The impact of feedback ratio. Figure 2 also shows EM as a function of the feedback ratio on MS MARCO with Gemini 2.5 Flash. Compared with the setting without feedback, TrustPropRAG improves sharply when only 10% of documents receive feedback, after which the improvement becomes more gradual. This indicates that a small portion of feedback is sufficient for trust propagation to produce reliable trust estimates across the document relation graph.

The impact of trust coefficient α . Figure 3 shows EM and FP@5 as the trust coefficient α varies from 0 to 1. When $\alpha = 0$, rescoring uses only the retrieval relevance score. As α increases from 0, both EM and FP@5 improve, showing that incorporating trust scores helps promote documents that

Model	MS MARCO		NQ		TriviaQA		$\bar{\Delta}$
	VanillaRAG	TrustPropRAG	VanillaRAG	TrustPropRAG	VanillaRAG	TrustPropRAG	
<i>Proprietary</i>							
GPT-4o-mini	0.21	0.40	0.41	0.58	0.50	0.76	+0.21
GPT-5	0.30	0.49	0.43	0.62	0.53	0.85	+0.23
Gemini 2.5 Flash	0.28	0.46	0.33	0.56	0.44	0.69	+0.22
Gemini 2.5 Pro	0.32	0.48	0.37	0.60	0.46	0.77	+0.23
<i>Open-source</i>							
Llama-3.1-8B-Instruct	0.19	0.32	0.38	0.55	0.48	0.77	+0.20
Mistral-7B-Instruct	0.22	0.35	0.33	0.47	0.51	0.74	+0.17

Table 5: Performance with different LLMs across three datasets. $\bar{\Delta}$ denotes TrustPropRAG’s absolute EM improvement over VanillaRAG, averaged across the three datasets.

support the correct answer into the top- k context. EM reaches its best value at $\alpha = 0.6$, and remains stable between 0.5 and 0.8. However, when α is too large, the top- k list tends to include documents with high trust scores but lower query relevance, leading to a slight decrease in EM. As TrustPropRAG is not sensitive to the exact choice of α within a range (e.g., between 0.5 and 0.8), we set $\alpha=0.6$ for the rest of the experiments.

Performance with different LLMs. We evaluate the performance of TrustPropRAG with a diverse set of proprietary and open-source LLMs of different model scales in Table 5. Since FP@5 depends only on retrieval and rescoring, it is unchanged across LLMs; therefore, we report EM as the main metric. We use MiniLM as the retriever and set $k = 5$ and FB=30%. Table 5 shows that TrustPropRAG consistently outperforms VanillaRAG across all evaluated LLMs. The average EM improvement ranges from 0.17 to 0.23 across both proprietary models (GPT-4o-mini, GPT-5, Gemini 2.5 Flash, Gemini 2.5 Pro) and smaller open-source models (Llama-3.1-8B-Instruct, Mistral-7B-Instruct). Notably, TrustPropRAG still achieves an average EM gain of 0.23 with strong LLMs such as GPT-5 and Gemini 2.5 Pro. This suggests that improving the reliability of the retrieved context with trust propagation remains useful even for strong LLMs.

Computational cost. Table 6 reports the computational cost of TrustPropRAG, including offline graph construction and trust optimization, as well as query-time retrieval. The computational resources are detailed in Appendix A. Constructing the graph accounts for most of the offline cost, taking 578.3–1077.1 seconds. Given the constructed graph, trust score optimization is efficient, requiring only 0.3–0.4 seconds, indicating that trust propagation itself introduces negligible computational

Stage	MS MARCO	NQ	TriviaQA
<i>Offline</i>			
Graph construction	578.3 s	852.4 s	1077.1 s
Trust optimization (PGD)	0.3 s	0.3 s	0.4 s
<i>Query time</i>			
Retrieval	4.4 s	4.8 s	4.8 s

Table 6: Computational cost breakdown.

overhead. Both graph construction and trust optimization are performed offline and their costs are therefore amortized across future queries. At query time, retrieval takes 4.4–4.8 seconds and is shared by TrustPropRAG and the baselines. Beyond retrieval, TrustPropRAG only performs lightweight trust-aware rescoring using the precomputed trust scores, introducing limited additional query-time overhead.

5 Conclusions

We present TrustPropRAG, a framework that improves RAG reliability by propagating sparse human feedback over a document relation graph. TrustPropRAG estimates a trust score for each document by optimizing an objective that combines pairwise consistency loss and feedback loss. The resulting trust scores are used to select more reliable documents and guide trust-aware answer generation. TrustPropRAG achieves absolute EM gains of 0.03–0.11 over the strongest baseline, and demonstrates robustness to noisy feedback.

Acknowledgments

We thank the anonymous reviewers for insightful feedback. This work was supported by Seed Grant of IST, and the National Science Foundation under Grants 2550742, 2623125, 2555329, and 2549266.

Limitations

TrustPropRAG incorporates human feedback as binary labels, marking documents as either reliable or unreliable. In practice, feedback can be graded rather than binary. Studying TrustPropRAG under graded feedback is left to future work. Following common practice in RAG evaluation, we focus on unreliable content that is injected as synthetic contradictions rather than drawn from naturally occurring conflicts. Finally, we focus on open-domain QA with short factual answers. Applying trust propagation to long-form or multi-hop generation, where reliability interacts with compositional reasoning, is left to future work.

Ethical Considerations

This work addresses the problem of unreliable content in retrieval-augmented generation. Our experiments use synthetically generated contradictions. All datasets and models used in this work are publicly released and licensed for research use, and our usage is consistent with their intended research purposes. MS MARCO, NQ, and TriviaQA are publicly available open-domain QA benchmarks released for research. The retrievers (BM25, Contriever, and the all-MiniLM-L6-v2 encoder) and the NLI model (nli-deberta-v3-small) are also publicly released.

References

- Yu Bai, Yukai Miao, Li Chen, Dawei Wang, Dan Li, Yanyu Ren, Hongtao Xie, Ce Yang, and Xuhui Cai. 2024. Pistis-RAG: Enhancing retrieval-augmented generation with human feedback. *arXiv preprint arXiv:2407.00072*.
- Payal Bajaj, Daniel Campos, Nick Craswell, Li Deng, Jianfeng Gao, Xiaodong Liu, Rangan Majumder, Andrew McNamara, Bhaskar Mitra, Tri Nguyen, Mir Rosenberg, Xia Song, Alina Stoica, Saurabh Tiwary, and Tong Wang. 2016. MS MARCO: A human generated machine reading comprehension dataset. In *Proceedings of the Workshop on Cognitive Computation: Integrating Neural and Symbolic Approaches (CoCo@NIPS)*.
- Michele Benzi and Nader Razouk. 2007. Decay bounds and $O(n)$ algorithms for approximating functions of sparse matrices. *Electronic Transactions on Numerical Analysis*, 28:16–39.
- Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Millican, George van den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, Diego de Las Casas, Aurelia Guy, Jacob Menick, Roman Ring, Tom Hennigan, Saffron Huang, Loren Maggiore, Chris Jones, Albin Cassirer, and 9 others. 2022. Improving language models by retrieving from trillions of tokens. In *Proceedings of the 39th International Conference on Machine Learning (ICML)*, volume 162 of *Proceedings of Machine Learning Research*, pages 2206–2240. PMLR.
- Hung-Ting Chen, Michael J.Q. Zhang, and Eunsol Choi. 2022. Rich knowledge sources bring complex knowledge conflicts: Recalibrating models to reflect conflicting evidence. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 2292–2307, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Janara Christensen, Mausam, Stephen Soderland, and Oren Etzioni. 2013. Towards coherent multi-document summarization. In *Proceedings of the 2013 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1163–1173, Atlanta, Georgia. Association for Computational Linguistics.
- Benjamin Cohen-Wang, Harshay Shah, Kristian Georgiev, and Aleksander Mađry. 2024. ContextCite: Attributing model generation to context. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 37.
- Stephen Demko, William F. Moss, and Philip W. Smith. 1984. Decay rates for inverses of band matrices. *Mathematics of Computation*, 43(168):491–499.
- Darren Edge, Ha Trinh, Newman Cheng, Joshua Bradley, Alex Chao, Apurva Mody, Steven Truitt, Dasha Metropolitansky, Robert Osazuwa Ness, and Jonathan Larson. 2024. From local to global: A graph RAG approach to query-focused summarization. *arXiv preprint arXiv:2404.16130*.
- Zirui Guo, Lianghao Xia, Yanhua Yu, Tu Ao, and Chao Huang. 2025. LightRAG: Simple and fast retrieval-augmented generation. In *Findings of the Association for Computational Linguistics: EMNLP 2025*, pages 10746–10761.
- Jeongyeon Hwang, Junyoung Park, Hyejin Park, Dongwoo Kim, Sangdon Park, and Jungseul Ok. 2025. Retrieval-augmented generation with estimation of source reliability. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 34279–34303.
- Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. 2022. Unsupervised dense information retrieval with contrastive learning. *Transactions on Machine Learning Research*.
- Gautier Izacard, Patrick Lewis, Maria Lomeli, Lucas Hosseini, Fabio Petroni, Timo Schick, Jane Dwivedi-Yu, Armand Joulin, Sebastian Riedel, and Edouard

- Grave. 2023. Few-shot learning with retrieval augmented language models. *Journal of Machine Learning Research*, 24(251):1–43.
- Mandar Joshi, Eunsol Choi, Daniel S. Weld, and Luke Zettlemoyer. 2017. TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics*.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. Natural questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:452–466.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *Advances in Neural Information Processing Systems*, volume 33.
- Siyi Liu, Qiang Ning, Kishalay Halder, Zheng Qi, Wei Xiao, Phu Mon Htut, Yi Zhang, Neha Anna John, Bonan Min, Yassine Benajiba, and 1 others. 2025a. Open domain question answering with conflicting contexts. In *Findings of the Association for Computational Linguistics: NAACL 2025*, pages 1838–1854.
- Yuhan Liu, Michael JQ Zhang, and Eunsol Choi. 2025b. User feedback in human-LLM dialogues: a lens to understand users but noisy as a learning signal. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 2666–2681.
- Xinbei Ma, Yeyun Gong, Pengcheng He, Hai Zhao, and Nan Duan. 2023. Query rewriting in retrieval-augmented large language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 5303–5315.
- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. 2022. Training language models to follow instructions with human feedback. In *Advances in Neural Information Processing Systems*, volume 35.
- Nils Reimers and Iryna Gurevych. 2019. Sentence-BERT: Sentence embeddings using siamese BERT-networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*, pages 3982–3992. Association for Computational Linguistics.
- Stephen Robertson and Hugo Zaragoza. 2009. The probabilistic relevance framework: BM25 and beyond. *Foundations and Trends in Information Retrieval*, 3(4):333–389.
- Zeyu Shen, Basileal Imana, Tong Wu, Chong Xiang, Prateek Mittal, and Aleksandra Korolova. 2025. ReliabilityRAG: Effective and provably robust defense for RAG-based web-search. In *Advances in Neural Information Processing Systems*.
- Fei Wang, Xingchen Wan, Ruoxi Sun, Jiefeng Chen, and Serkan Ö. Arik. 2025a. Astute RAG: Overcoming imperfect retrieval augmentation and knowledge conflicts for large language models. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 30553–30571, Vienna, Austria. Association for Computational Linguistics.
- Yanting Wang, Wei Zou, Runpeng Geng, and Jinyuan Jia. 2025b. TracLLM: A generic framework for attributing long context llms. In *USENIX Security Symposium*.
- Zhepei Wei, Wei-Lin Chen, and Yu Meng. 2025. InstructRAG: Instructing retrieval-augmented generation via self-synthesized rationales. In *Proceedings of the Thirteenth International Conference on Learning Representations (ICLR)*.
- Chong Xiang, Tong Wu, Zexuan Zhong, David Wagner, Danqi Chen, and Prateek Mittal. 2024. Certifiably robust RAG against retrieval corruption. *arXiv preprint arXiv:2405.15556*.
- Jian Xie, Kai Zhang, Jiangjie Chen, Renze Lou, and Yu Su. 2024. Adaptive chameleon or stubborn sloth: Revealing the behavior of large language models in knowledge conflicts. In *Proceedings of the Twelfth International Conference on Learning Representations (ICLR)*.
- Rongwu Xu, Zehan Qi, Zhijiang Guo, Cunxiang Wang, Hongru Wang, Yue Zhang, and Wei Xu. 2024. Knowledge conflicts for LLMs: A survey. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 8541–8565, Miami, Florida, USA. Association for Computational Linguistics.
- Tianyang Xu, Haojie Zheng, Chengze Li, Haoxiang Chen, Yixin Liu, Ruoxi Chen, and Lichao Sun. 2025. NodeRAG: Structuring graph-based rag with heterogeneous nodes. *arXiv preprint arXiv:2504.11544*.
- Hanning Zhang, Juntong Song, Juno Zhu, Yuanhao Wu, Tong Zhang, and Cheng Niu. 2025a. RAG-Reward: Optimizing RAG with reward modeling and RLHF. *arXiv preprint arXiv:2501.13264*.
- Jizhi Zhang, Chongming Gao, Wentao Shi, Xin Chen, Jingang Wang, Xunliang Cai, and Fuli Feng. 2025b. Leveraging unpaired feedback for long-term LLM-based recommendation tuning. In *Findings of the Association for Computational Linguistics: EMNLP 2025*, pages 24507–24521.

Wanjun Zhong, Jingjing Xu, Duyu Tang, Zenan Xu, Nan Duan, Ming Zhou, Jiahai Wang, and Jian Yin. 2020. Reasoning over semantic-level graph for fact checking. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 6170–6180. Association for Computational Linguistics.

Zexuan Zhong, Ziqing Huang, Alexander Wettig, and Danqi Chen. 2023. Poisoning retrieval corpora by injecting adversarial passages. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*.

Dengyong Zhou, Olivier Bousquet, Thomas N. Lal, Jason Weston, and Bernhard Schölkopf. 2003. Learning with local and global consistency. In *Advances in Neural Information Processing Systems*, volume 16, pages 321–328.

Huichi Zhou, Kin-Hei Lee, Zhonghao Zhan, Yue Chen, Zhenhao Li, Zhaoyang Wang, Hamed Haddadi, and Emine Yilmaz. 2025. TrustRAG: Enhancing robustness and trustworthiness in retrieval-augmented generation. *arXiv preprint arXiv:2501.00879*.

Xiaojin Zhu, Zoubin Ghahramani, and John D. Lafferty. 2003. Semi-supervised learning using Gaussian fields and harmonic functions. In *Proceedings of the 20th International Conference on Machine Learning*, pages 912–919.

Wei Zou, Runpeng Geng, Binghui Wang, and Jinyuan Jia. 2025. PoisonedRAG: Knowledge corruption attacks to retrieval-augmented generation of large language models. In *34th USENIX Security Symposium (USENIX Security 25)*, pages 3827–3844. USENIX Association.

A Implementation Details

Models and computational resources. Among the LLMs we evaluate, Llama-3.1-8B-Instruct and Mistral-7B-Instruct are open-source models with 8B and 7B parameters, respectively; GPT-4o-mini, GPT-5, Gemini 2.5 Flash, and Gemini 2.5 Pro are proprietary models accessed through their respective APIs. The NLI model (nli-deberta-v3-small) has approximately 44M parameters, and the dense retrievers (Contriever and all-MiniLM-L6-v2) are sentence-encoder models with approximately 110M and 22M parameters respectively. All local computation, including NLI-based edge construction, dense retrieval, and trust score optimization, was run on an NVIDIA RTX 5070 GPU. For our largest corpus (1,037 documents, TriviaQA), this took approximately 0.3 GPU-hours. Trust score optimization via projected gradient descent is lightweight, converging within 1,000 iterations and taking under 1 minute per corpus. We

	$k=1$	$k=3$	$k=5$	$k=10$	$k=20$
EM	0.41	0.43	0.46	0.45	0.42
FP@ k	95%	92%	88%	84%	73%

Table 7: Impact of the number of retrieved documents k on EM and FP@ k (MS MARCO, MiniLM, Gemini 2.5 Flash, FB=30%).

implement retrieval, NLI inference, and trust score optimization using standard Python libraries, and provide exact package versions and scripts in the released code.

Hyperparameters. We use the same hyperparameters across all datasets, retrievers, and LLMs. For trust score initialization, we set $\tau_{\min} = 0.3$ and $\tau_{\max} = 0.7$. We set feedback loss weight $\lambda_f=1.0$. We set the feedback values $\tau^+ = 0.9$ and $\tau^- = 0.1$.

B Number of Retrieved Documents k

The number of retrieved documents k controls the size of the context provided to the LLM. A smaller k yields a more selective context but may omit relevant evidence, while a larger k provides broader coverage at the cost of allowing more unreliable documents into the prompt. We evaluate TrustProPAG across $k \in \{1, 3, 5, 10, 20\}$ on MS MARCO with MiniLM as the retriever, Gemini 2.5 Flash as the backbone LLM, and FB=30%. All other hyperparameters follow Section 4.

FP@ k falls steadily from 95% ($k=1$) to 73% ($k=20$) as lower-trust documents enter the top- k selected documents. EM is less sensitive, staying within 0.41–0.46 and peaking at $k=5$ and $k=10$. Trust-aware rescoring places reliable evidence at the top, so small k already provides sufficient factual support; at larger k , the trust-aware prompt helps the LLM put less weight to lower-trust documents that are provided in the context. EM is smaller at $k=1$, where the retrieved context may provide insufficient context, and at $k=20$, where the larger retrieval set exposes the LLM to more contradictory context.

Considering that EM peaks at $k=5$ and $k=10$, we adopt $k=5$, matching prior work (Zou et al., 2025; Shen et al., 2025).

C Proofs

We provide proofs of the two lemmas stated in Section 3.2. Both lemmas rely on the fact that the trust optimization objective $\mathcal{L} = \mathcal{L}_{\text{pair}} + \lambda_f \mathcal{L}_{\text{fb}}$

is a quadratic in τ , so the first-order optimality condition for the unconstrained quadratic problem is given by the linear system $A\tau^* = \mathbf{b}$, where $A = \nabla^2 \mathcal{L}$ is the Hessian. We first verify that A is positive definite under the assumption that every connected component of G contains at least one document with feedback, then prove the two lemmas.

Positive definiteness of A . Let $\mathbf{e}_i \in \mathbb{R}^N$ denote the i -th standard basis vector, whose i -th entry is one and all other entries are zero. Expanding the Hessian gives

$$\begin{aligned} A = & 2 \sum_{\substack{e_{ij} \in E \\ \ell_{ij} = +1}} w_{ij} (\mathbf{e}_i - \mathbf{e}_j)(\mathbf{e}_i - \mathbf{e}_j)^\top \\ & + 2 \sum_{\substack{e_{ij} \in E \\ \ell_{ij} = -1}} w_{ij} (\mathbf{e}_i + \mathbf{e}_j)(\mathbf{e}_i + \mathbf{e}_j)^\top \\ & + 2\lambda_f \sum_{i \in \mathcal{F}} \mathbf{e}_i \mathbf{e}_i^\top, \end{aligned} \quad (2)$$

which is a sum of positive semidefinite matrices, hence $A \succeq 0$. Next, we prove $A \succ 0$. A vector $\mathbf{v}$ lies in $\ker(A)$ iff (a) $v_i = v_j$ on every supportive edge ($\ell_{ij} = +1$), (b) $v_i = -v_j$ on every contradictory edge ($\ell_{ij} = -1$), and (c) $v_i = 0$ on every node with feedback. If a node with value zero is connected to another node by a supportive edge, condition (a) implies that the neighboring node also has value zero. If it is connected by a contradictory edge, condition (b) again implies that the neighboring node has value zero. Under our assumption that every connected component contains at least one feedback node, we have $\mathbf{v} = \mathbf{0}$ globally, so $A \succ 0$. We write its eigenvalues as $\sigma_{\min} \leq \dots \leq \sigma_{\max}$ and its condition number as $\kappa = \sigma_{\max}/\sigma_{\min}$.

C.1 Proof of Lemma 1 (Trust Propagation)

We fix the set of documents with feedback $\mathcal{F} = \{f_1, \dots, f_m\}$ and consider perturbations of their feedback values. Let Δy_{f_k} denote the perturbation applied to the feedback value y_{f_k} . These perturbations leave A unchanged and only modify the right-hand side $\mathbf{b}$ at entries corresponding to documents in $\mathcal{F}$. Let $\Delta \mathbf{b}$ denote the resulting change in $\mathbf{b}$, and let Δb_{f_k} denote its entry corresponding to feedback document f_k . We have

$$\Delta b_{f_k} = 2\lambda_f \Delta y_{f_k}. \quad (3)$$

Step 1: Linearity and superposition. Because the perturbations only change the feedback target

values, the matrix A remains fixed. Therefore, the unconstrained optimum satisfies $\tau^* = A^{-1}\mathbf{b}$. After the perturbation, the right-hand side becomes $\mathbf{b} + \Delta \mathbf{b}$, and the corresponding change in the optimized trust scores is

$$\Delta \tau^* = A^{-1} \Delta \mathbf{b}.$$

Since $\Delta \mathbf{b}$ is nonzero only at documents with feedback, the change in the trust score of document d_i can be written as

$$\Delta \tau_i = \sum_{k=1}^m (A^{-1})_{if_k} \Delta b_{f_k}, \quad (4)$$

where $(A^{-1})_{if_k}$ denotes the entry in the i -th row and f_k -th column of A^{-1} .

Step 2: Entry-wise decay of A^{-1} . The feedback term contributes only to the diagonal entries of A . The off-diagonal entry A_{ij} ($i \neq j$) is nonzero when documents i and j are joined by an edge ($\ell_{ij} = \pm 1$). Specifically, from Eq. (2), each pairwise relation term adds $\pm 2w_{ij}$ at positions (i, j) and (j, i) of A . The sparsity pattern of A therefore coincides with the adjacency structure of G . For a symmetric positive definite matrix with this property, the Demko–Moss–Smith decay bound (Demko et al., 1984; Benzi and Razouk, 2007) gives an entry-wise decay of A^{-1} that is exponential in graph distance:

$$|(A^{-1})_{ij}| \leq \gamma q^{d_G(i,j)}, \quad q = \frac{\sqrt{\kappa} - 1}{\sqrt{\kappa} + 1}, \quad (5)$$

where $\gamma = (1 + \sqrt{\kappa})^2 / (2\sigma_{\max}) = O(1/\sigma_{\min})$.

Step 3: Superposition bound. Combining Eqs. (3)-(5) and using the triangle inequality, we obtain

$$\begin{aligned} |\Delta \tau_i| & \leq \sum_{k=1}^m |(A^{-1})_{if_k}| \cdot |\Delta b_{f_k}| \\ & \leq \sum_{k=1}^m 2\gamma \lambda_f |\Delta y_{f_k}| q^{d_G(i,f_k)}. \end{aligned}$$

C.2 Proof of Lemma 2 (Convergence)

Let $\tilde{\tau}^{(t)} = \tau^{(t-1)} - \eta \nabla \mathcal{L}(\tau^{(t-1)})$ denote the gradient descent step before projection, and let $\tau^{(t)} = P_{[0,1]^N}(\tilde{\tau}^{(t)})$ denote the projected iterate. Since $\mathcal{L}$ is quadratic with Hessian A , for any τ we

have $\nabla \mathcal{L}(\tau) = A(\tau - \tau^*)$. Therefore,

$$\begin{aligned}\tilde{\tau}^{(t)} - \tau^* &= \tau^{(t-1)} - \eta \nabla \mathcal{L}(\tau^{(t-1)}) - \tau^* \\ &= \tau^{(t-1)} - \tau^* - \eta A(\tau^{(t-1)} - \tau^*) \\ &= (I - \eta A)(\tau^{(t-1)} - \tau^*).\end{aligned}\tag{6}$$

With the fixed step size $\eta^* = 2/(\sigma_{\min} + \sigma_{\max})$, each eigenvalue σ of A is mapped to an eigenvalue $1 - \eta^* \sigma$ of $I - \eta^* A$. Since $\sigma \in [\sigma_{\min}, \sigma_{\max}]$, these eigenvalues lie in $[-\frac{\kappa-1}{\kappa+1}, \frac{\kappa-1}{\kappa+1}]$. Thus, the largest absolute eigenvalue of $I - \eta^* A$ is $\rho = \frac{\kappa-1}{\kappa+1}$. Because $I - \eta^* A$ is symmetric, its spectral norm is equal to its largest absolute eigenvalue, so

$$\|I - \eta^* A\|_2 = \rho.$$

Taking norms in (6) then gives

$$\|\tilde{\tau}^{(t)} - \tau^*\| \leq \rho \|\tau^{(t-1)} - \tau^*\|.$$

The projection operator $P_{[0,1]^N}(\cdot)$ is non-expansive, and hence

$$\|\tau^{(t)} - \tau^*\| \leq \|\tilde{\tau}^{(t)} - \tau^*\| \leq \rho \|\tau^{(t-1)} - \tau^*\|.$$

D Impact of Mislabeled Edges

A mislabeled edge between documents i and j changes the Hessian A in Eq. (2) only at the entries involving i and j . Under the same assumptions used in Lemma 1, the entry-wise decay bound on A^{-1} from Demko et al. (1984) implies that the resulting perturbation to the optimized trust scores decreases exponentially with the shortest-path distance from the mislabeled edge. Therefore, the influence of an edge error diminishes rapidly as it propagates to more distant documents.

E Prompt Templates

Trust-aware prompt. Each retrieved document is annotated with both its trust score τ_i and a trust label. We assign the label based on the trust score: high if $\tau_i \geq 0.7$, low if $\tau_i \leq 0.3$, and medium otherwise. The system instruction is:

You are a QA system. Each document has a trust score. Strongly prefer HIGH-trust documents. Ignore or discount LOW-trust documents, they may contain deliberate misinformation. Give a short, direct answer.

Documents are formatted as:

Dataset	Contradictory		Supportive	
	Precision	Recall	Precision	Recall
MS MARCO	0.65	0.18	0.71	0.14
NQ	0.69	0.21	0.68	0.17
TriviaQA	0.58	0.13	0.62	0.12

Table 8: Precision and recall of the NLI-derived contradictory and supportive edges.

```
[Document 1] (Trust: HIGH, score=0.92):
<text>
[Document 2] (Trust: LOW, score=0.15):
<text>
...
```

Baseline prompt. VanillaRAG uses the following prompt. The other baselines use the prompts specified in their original papers.

```
Answer the following question based on the
provided documents. Give a short, direct
answer.
Documents: [Document 1]: <text> ...
Question: <query>
Short answer:
```

F Quality of NLI-derived Edges

We evaluate the NLI-derived edges against the known factual and contradictory structure of the corpus on the three datasets. We treat an edge between a factual document and a contradictory document as a ground-truth contradictory relation, and an edge between two documents of the same category as a supportive relation. Table 8 reports the precision and recall of the contradictory and supportive edges produced by the NLI model.

The NLI-derived edges have moderate precision and low recall, as the NLI model predicts most document pairs as neutral. The low recall indicates that many relations are omitted, resulting in a sparse graph, which reflects practical settings where only a limited subset of inter-document relations can be identified. The imperfect precision indicates that the graph also contains some incorrectly labeled edges. Nevertheless, the NLI-only ablation in Table 4 shows that TrustPropRAG still outperforms the baselines when relying only on these imperfect edges, which suggests that trust propagation is robust to noise and sparsity in graph construction.

G Performance on QACC

We evaluate TrustPropRAG on naturally occurring conflicts without any synthetic injection. We used

Method	EM
VanillaRAG	0.48
InstructRAG	0.54
AstuteRAG	0.50
ReliabilityRAG	0.56
TrustRAG _{stage 1}	0.50
TrustPropRAG	0.59

Table 9: EM on QACC (GPT-4o-mini, MiniLM, $k=5$, FB=30%).

QACC (Liu et al., 2025a), a human-annotated open-domain QA dataset in which unambiguous questions are paired with real web contexts retrieved via Google Search. The conflicts among these contexts arise naturally on the web rather than from injected documents. We randomly sampled 100 questions from QACC and constructed the evaluation corpus from their retrieved contexts. As shown in Table 9, TrustPropRAG achieves the best EM (0.59) on this naturally conflicting corpus, outperforming the strongest baseline ReliabilityRAG (0.56) and improving over VanillaRAG by 0.11. These results indicate that the effectiveness of TrustPropRAG is not limited to synthetically injected contradictions and extends to naturally occurring conflicts.