

The Limits of Simulated Societies: How Post-Training and Survey Fine-Tuning Erase Cross-Cultural Variance

Rojin Ziaei

Georgetown University
nz204@georgetown.edu

Abstract

Using large language models (LLMs) to simulate diverse human populations has the potential to transform many aspects of computational social science, yet many evaluations score the average response rather than the spread of opinion within real groups. Here, we develop a diagnostic framework that measures point accuracy alongside dispersion retention, the ratio of predicted to human standard deviation (σ_r), on 10,000 respondent-question pairs from the World Values Survey (WVS) spanning twelve countries and six continents. We evaluate eleven zero-shot language models and five variants fine-tuned on WVS data with SFT, DPO, and GRPO. We identify a failure mode we term *consensus collapse*, where alignment training compresses outputs toward one stereotype per group. Along the post-training trajectory from the Llama 3.1 70B base to the Tulu 3 checkpoints, the first stage, supervised instruction tuning, removes half of the spread with minimal accuracy gain (σ_r 1.22 to 0.59; accuracy +0.9 points), the later stages do not restore it, and a gap opens between WEIRD and non-WEIRD countries that survey fine-tuning then deepens while pursuing higher point accuracy. The most accurate model (Tulu 3 70B-DPO fine-tuned on WVS, 57.9%) keeps half the human spread overall ($\sigma_r = 0.50$) and 11% of it for Nigeria, against 0.70–0.87 for WEIRD countries. Raising the sampling temperature to 1.0 leaves the Wasserstein-1 distance (W_1) to human distributions unchanged for both fine-tuned DPO models, and GRPO on Qwen 3.5 9B does not restore the spread under either an accuracy reward or a distribution-shaped reward. Mixing the aligned model with an unaligned prior raises σ_r from 0.51 to 0.62 on a held-out split but leaves Nigeria at 0.36. Point accuracy alone therefore misjudges these simulators, and current post-training trades diversity for consensus.

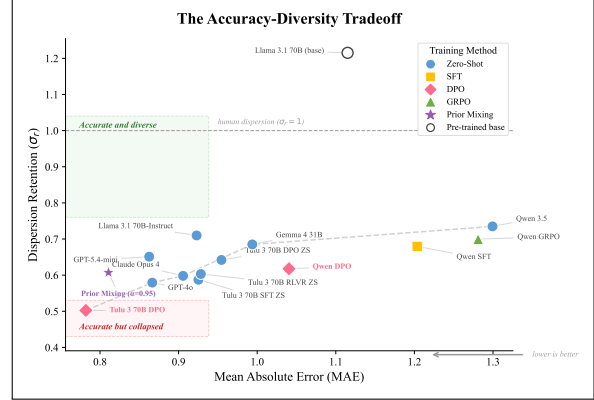


Figure 1: **The Accuracy–Diversity Tradeoff.** Each point is a model evaluated on 10,000 held-out WVS responses (x : mean absolute error; y : dispersion retention σ_r). The pre-trained Llama 3.1 70B base (hollow circle) is the only model above the human-dispersion line ($\sigma_r = 1$); every post-trained checkpoint falls below it, and alignment fine-tuning (pink diamonds) pushes models into the “accurate but collapsed” region—Tulu 3 70B-DPO (+WVS) achieves the lowest MAE but keeps only half of the human spread. Prior mixing (purple star; the dev-selected $\alpha = 0.95$ applied to the full evaluation set) recovers part of the spread at a small accuracy cost. No model reaches the “accurate and diverse” quadrant.

1 Introduction

The application of large language models (LLMs) as computational stand-ins for human survey respondents represents a major frontier in computational social science. By accurately simulating the responses of diverse demographic groups, LLMs enable subpopulation representative modeling (SRM) (Simmons and Savinov, 2024), a framework that allows researchers to pilot interventions, stress-test public policies, and generate synthetic panels without the financial and temporal bottleneck of traditional cohort recruitment (Horton et al., 2023; Manning et al., 2024). This potential is increasingly supported by empirical advances. Baseline zero-shot models utilizing demographic per-

sonas have already demonstrated the ability to reproduce aggregate public opinion (Argyle et al., 2023; Sun et al., 2024). Fine-tuning on individual-level responses improves this fidelity further: Kolluri et al. (2025) fine-tune on 2.9 million responses from 210 social science experiments and report that their strongest model’s predictions on unseen studies are 26% more aligned with human response distributions than its base model’s.

As promising as this may seem, a growing body of evidence warns that the paradigm carries fundamental risks. Wang et al. (2025) demonstrate that LLMs prompted with demographic identities harmfully *flatten and misportray* those identity groups, collapsing rich within-group diversity into monolithic stereotypes. Krsteski et al. (2026) find that pure LLM synthesis introduces substantial bias (24–86%), necessitating post-hoc “rectification” using held-out human data. Qu and Wang (2024) confirm this on the World Values Survey specifically, showing that performance degrades sharply for non-Western, non-English-speaking populations. This contrast, with the promise of alignment on one hand and the evidence of systematic flattening on the other, remains unreconciled because it has been difficult to measure the precise mechanism by which alignment objectives distort the distributional properties of model outputs.

Park et al. (2024) show that these failures can be overcome when models perform modeling grounded in two-hour qualitative interviews: their agents replicate participants’ General Social Survey answers 85% as accurately as the participants replicate their own answers two weeks later. However, such data is prohibitively expensive for the vast majority of global survey datasets, and most cross-national survey simulation research operates with structured demographic personas rather than biographical transcripts. Prior work establishes that LLMs flatten demographic groups under persona prompting. What is not yet established is whether existing LLM training paradigms mitigate or amplify this flattening.

Using data from the World Values Survey (WVS) across 12 culturally diverse countries, we construct value-encoded personas that explicitly encode the dimensions of the Inglehart-Welzel cultural-map (Inglehart, 2006). We then use these personas to evaluate eleven off-the-shelf checkpoints zero-shot and five variants fine-tuned on WVS data with three methods (SFT, DPO, GRPO). To execute this evaluation, we develop a distributional diagnostic frame-

work built on four complementary metrics, accuracy, MAE, Wasserstein-1 distance (W_1), and deviation ratio (σ_r), that captures both point-prediction quality and dispersion retention. This framework enables us to characterize a systematic failure mode we call *consensus collapse*: the structural compression of model output variance induced by alignment fine-tuning.

We make three contributions and propose one practical mitigation. First, we formally define and measure consensus collapse, showing that general-purpose post-training already amplifies the flattening observed by Wang et al. (2025) and that our survey fine-tuning deepens it further, where the best-performing fine-tuned model keeps only half of the human response spread ($\sigma_r = 0.50$). Second, we show that the collapse is not recoverable by raising the sampling temperature: for two Direct Preference Optimization (DPO) (Rafailov et al., 2023) models of different families and scales, sampling at up to $T = 1.0$ leaves W_1 unchanged. Third, we reveal that the collapse is inequitable: Nigeria keeps only 11% of the human response spread ($\sigma_r = 0.11$) compared to 70–87% for WEIRD countries, and that Group Relative Policy Optimization (GRPO) (Shao et al., 2024) on Qwen 3.5 9B fails to restore it under either an accuracy reward or a distribution-shaped reward. As a partial mitigation, we introduce prior mixing, a post-hoc probe that probabilistically mixes an aligned model with an unaligned prior, raising σ_r from 0.51 to 0.62 and reducing W_1 from 0.54 to 0.51 on a held-out split while underscoring that the underlying collapse resists simple correction.

2 Related Work

Subpopulation Representative Modeling. The idea of using LLMs as “Homo Silicus” computational stand-ins for human economic and social agents was formalized by Horton et al. (2023). Manning et al. (2024) extend this to automated hypothesis generation and testing. Simmons and Savinov (2024) formalize SRM, evaluating the ability of LLMs to generalize from empirical data via in-context learning. Kim and Lee (2023) fine-tune on the General Social Survey and report an AUC of 0.86 for retrodicting individual opinions in unsurveyed years, with weaker performance on entirely unasked questions.

Value-encoded persona Prompting and Flattening. A common approach to SRM involves con-

ditioning LLMs on demographic descriptors. The “Random Silicon Sampling” framework (Sun et al., 2024) demonstrates that group-level demographic prompting alone can reflect U.S. public opinion distributions. However, both Wang et al. (2025) and Qu and Wang (2024) reveal failure modes, where LLMs systematically flatten within-group diversity into stereotypes, and performance degrades sharply for non-Western populations. We extend this line of work by quantifying the WEIRD/non-WEIRD asymmetry directly: our per-country diagnostics (§4.4) show that dispersion retention for WEIRD countries ($\sigma_r = 0.70\text{--}0.87$) is up to $8\times$ higher than for non-WEIRD countries ($\sigma_r = 0.11\text{--}0.60$), and that at 70B alignment fine-tuning widens rather than narrows this gap.

Fine-Tuning for Survey Simulation. Kolluri et al. (2025) construct SOCSICI210, a dataset of 2.9 million responses from 210 experiments, and show that Supervised Fine-Tuning (SFT) (Ouyang et al., 2022) meaningfully improves distributional alignment. Their Demographic Contrastive DPO approach, which pairs respondents with contrasting demographics who answered the same question differently, is the basis for our DPO pipeline. We extend their work by systematically diagnosing why alignment collapses variance, by evaluating on a cross-national rather than U.S.-only benchmark, and by testing whether an alternative training objective offers an escape.

Post-Hoc Calibration and Rectification. Krsteski et al. (2026) demonstrates that pure LLM synthesis introduces 24–86% bias in population estimates. They propose *rectification* which is importance weighting using held-out human responses. Our prior-mixing probe (§4.6) addresses the same problem without requiring ground-truth human data at inference time.

Alignment Bias. Santurkar et al. (2023) show that human-feedback-tuned LLMs lean left relative to US demographic groups and poorly reflect the views of some groups, such as respondents aged 65 and over. Sharma et al. (2024) show that the human preference judgments used in RLHF favor sycophantic responses. Durmus et al. (2023) show that LLM responses to cross-national survey questions are more similar to the opinions of populations such as those of the USA and some European and South American countries than to others. Our work moves from documenting this skew to characterizing how

I am a 68-year-old male from Australia. My worldview is strongly traditional and authority-respecting, and I am transitioning from survival priorities toward self-expression values. In my interactions with others, I am generally trusting of others and open to strangers. Socially, I am moderately active in community life with selective group memberships. My identity is deeply tied to being Roman Catholic.

Figure 2: A representative value-encoded persona (verbatim from the dataset, ~ 60 words). It encodes the two Inglehart–Welzel dimensions (tradition/secular, survival/self-expression), interpersonal trust, civic embeddedness, and religious identity, drawing on the core constructs that the WVS instrument captures.

it scales with alignment. Comparing unaligned and aligned variants of the same model family, we find that at 70B alignment fine-tuning *amplifies* the WEIRD/non-WEIRD gap rather than mitigating it ($\sigma_r = 0.70\text{--}0.87$ for WEIRD vs. $0.11\text{--}0.60$ for non-WEIRD countries under DPO), whereas the 9B Qwen family shows only a small gap at every training stage (§4.4).

Epistemic Modeling. Park et al. (2024) proposes using agents built from two-hour interview transcripts, demonstrating this method can match participants’ own two-week test–retest consistency 85% of the way. This suggests a spectrum of input richness, including demographics through structured personas to dense biographical context, along which consensus collapse may progressively dissolve. Our work provides the diagnostic evidence at the structured persona point on this spectrum, where most cross-national survey simulation research currently operates.

3 Experimental Setup

3.1 Dataset

Each data record, drawn from WVS Wave 7 (Haerpfer et al., 2022), pairs a respondent’s *value-encoded persona* (a natural-language description of 59–70 words, synthesized from each respondent’s demographic variables and derived cultural indices in the WVS microdata) with a question and the respondent’s ground-truth ordinal answer. Notably, each persona encodes not only standard demographics (age, gender, country) but also the two Inglehart–Welzel cultural-map axes (traditional vs. secular-rational values and survival vs. self-expression orientation), alongside interpersonal trust, civic engagement, and religious identity.

Set	Count	Purpose
Train	15	Fine-tuning signal
Test	6	Held-out evaluation

Table 1: Question split. Training questions: Q2, Q6, Q27, Q46–Q50, Q58–Q60, Q106, Q164, Q185, Q240. Test questions: Q1, Q29, Q64, Q71, Q182, Q189. The test set spans the Values, Social Trust, and Political clusters; the Economic cluster appears only in training.

3.2 Question Split Strategy

To test whether models can generalize persona-grounded reasoning to unseen value domains, we partition the 21 survey questions into two non-overlapping sets:

The test set deliberately includes high-consensus questions (Q1), contested questions (Q182), and culturally sensitive questions (Q189). We use 100,000 respondent–question pairs for training (50,000 for GRPO), drawn with a fixed seed from all 12 countries, and 10,000 for testing.

3.3 Prompt Format

All chat models receive an identical three-turn chat prompt instructing them to simulate a survey respondent given a persona and to return a single integer on the question’s response scale; the pre-trained base model, which has no chat template, receives the same content as a plain completion prompt. Both templates are in Appendix H.

We evaluate eleven zero-shot language models (four proprietary API models, open-weight instruction-tuned models from 9B to 70B, and the four checkpoints of the Llama 3.1 70B → Tulu 3 post-training trajectory (Lambert et al., 2024): the pre-trained base, Tulu 3 70B-SFT, Tulu 3 70B-DPO, and Tulu 3 70B-RLVR, the final checkpoint trained with reinforcement learning with verifiable rewards) and five WVS-fine-tuned variants (Qwen 3.5 9B with SFT, with DPO, and with GRPO under two reward designs, and Tulu 3 70B with DPO; §4.3); full configurations including LoRA rank, learning rates, and precision are provided in Appendix I.

3.4 Evaluation Metrics

We employ four complementary metrics. Accuracy is the exact-match rate between prediction and ground-truth ordinal answer, and Mean Absolute Error (MAE) is the average magnitude of prediction errors on the ordinal scale; both are pooled over all test pairs. The two distributional metrics

are computed per (country, question) cell and averaged over cells. We use Wasserstein-1 Distance (W_1) to measure the distance between ground-truth and predicted population distributions ($\downarrow$ better). Deviation Ratio (σ_r) is $\sigma_{\text{pred}}/\sigma_{\text{truth}}$, the ratio of predicted to human standard deviation, which we also call dispersion retention; $\sigma_r = 1.0$ is perfect, $\sigma_r \rightarrow 0$ is mode collapse, and $\sigma_r > 1$ is over-dispersion, so values are read by their distance from 1. Because it is a ratio of standard deviations, $\sigma_r = 0.50$ keeps half the spread and a quarter of the variance.

3.5 Inference

All primary evaluations use greedy decoding ($T = 0$) to minimize variation in the outputs across the 10,000 test pairs. Because greedy decoding could in principle exaggerate variance compression by collapsing each prediction to the argmax token, we additionally evaluate both WVS-fine-tuned DPO models, Tulu 3 70B-DPO ($\sigma_r = 0.50$) and Qwen 3.5 9B-DPO ($\sigma_r = 0.62$), at $T = 0.5, 0.7$, and 1.0, spanning the range from sharpened sampling to the model’s untransformed output distribution. This sweep tests whether consensus collapse is a decoding artifact that broader sampling would dissolve (§4.2).

4 Results

4.1 Alignment reduces human variance

All metrics include 95% bootstrap confidence intervals (1,000 iterations, resampling over $Q \times C$ cells). Table 2 presents aggregate results across the full test set of 10,000 predictions.

The results reveal a trade-off. The most accurate model (Tulu 3 70B-DPO fine-tuned on WVS, 57.9%) keeps only half of the human response spread ($\sigma_r = 0.50$), whereas the unaligned Qwen 3.5 9B keeps 73% of it but reaches only 38.4% accuracy. Two reference points calibrate these accuracies: always predicting each question’s modal answer scores 52.6%, level with GPT-4o, and predicting the modal answer of each (country, question) cell scores 63.2% in-sample, with $\sigma_r = 0$ by construction. Every model sits between these two, so fine-tuning moves models toward the majority-class predictor without reaching it, shedding spread along the way. DPO compresses the spread below the unaligned baseline at both scales (paired $\Delta\sigma_r$ of -0.11 and -0.14) and SFT at 9B compresses it slightly (-0.05), every CI excluding

Model	Acc%	MAE	$W_1 \downarrow$	$\sigma_r (\rightarrow 1)$	ΔAcc	$\Delta\sigma_r$
<i>Zero-Shot Baselines</i>						
GPT-4o	52.8 [46.2, 59.6]	0.87 [0.68, 1.08]	0.59 [0.48, 0.73]	0.58 [0.45, 0.71]	—	—
GPT-5.4-mini	51.0 [44.6, 57.6]	0.86 [0.69, 1.04]	0.57 [0.46, 0.71]	0.65 [0.54, 0.76]	—	—
Tulu 3 70B-SFT	51.2 [44.5, 58.4]	0.93 [0.73, 1.13]	0.71 [0.55, 0.87]	0.59 [0.46, 0.71]	—	—
Llama 3.1 70B-Instruct	50.7 [44.5, 57.4]	0.92 [0.74, 1.13]	0.60 [0.48, 0.75]	0.71 [0.58, 0.85]	—	—
Tulu 3 70B-RLVR	50.6 [43.9, 57.6]	0.93 [0.74, 1.13]	0.69 [0.54, 0.85]	0.60 [0.48, 0.73]	—	—
Llama 3.1 70B (base)	50.3 [45.1, 56.1]	1.12 [0.92, 1.32]	0.52 [0.42, 0.66]	1.22 [1.08, 1.43]	—	—
Tulu 3 70B-DPO	49.7 [43.1, 56.8]	0.95 [0.75, 1.16]	0.69 [0.55, 0.86]	0.64 [0.52, 0.78]	—	—
Gemma 4 31B	49.8 [43.1, 56.4]	0.99 [0.78, 1.23]	0.72 [0.55, 0.90]	0.69 [0.58, 0.81]	—	—
Claude Opus 4	48.2 [41.5, 55.0]	0.91 [0.73, 1.10]	0.68 [0.54, 0.83]	0.60 [0.49, 0.72]	—	—
Gemini 2.5 Pro	43.0 [37.0, 49.1]	1.28 [0.97, 1.63]	0.89 [0.64, 1.20]	0.87 [0.72, 0.99]	—	—
Qwen 3.5 9B	38.4 [31.5, 45.8]	1.30 [1.00, 1.67]	1.01 [0.77, 1.32]	0.73 [0.62, 0.93]	—	—
<i>Fine-Tuned on WVS</i>						
Tulu 3 70B-DPO (+WVS)	57.9 [52.0, 63.8]	0.78 [0.62, 0.96]	0.55 [0.44, 0.68]	0.50 [0.39, 0.62]	+8.2 [7.5, 8.8]	-0.14 [-0.17, -0.13]
Qwen 3.5 9B-SFT (+WVS)	52.9 [46.5, 59.6]	1.20 [0.90, 1.59]	0.89 [0.64, 1.22]	0.68 [0.54, 0.86]	+14.5 [13.5, 15.4]	-0.05 [-0.16, -0.02]
Qwen 3.5 9B-DPO (+WVS)	53.0 [47.2, 59.0]	1.04 [0.78, 1.32]	0.73 [0.54, 0.96]	0.62 [0.50, 0.78]	+14.6 [13.7, 15.4]	-0.11 [-0.21, -0.08]
Qwen 3.5 9B-GRPO (+WVS)	38.6 [31.7, 45.9]	1.28 [0.99, 1.64]	1.00 [0.76, 1.31]	0.70 [0.59, 0.90]	+0.2 [-0.2, 0.5]	-0.03 [-0.05, -0.02]
Qwen 3.5 9B-GRPO-dist (+WVS)	47.5 [40.3, 54.5]	1.01 [0.78, 1.28]	0.84 [0.67, 1.07]	0.21 [0.14, 0.27]	+9.1 [8.1, 10.1]	-0.52 [-0.64, -0.50]

Table 2: **Diagnostic evaluation across 10,000 held-out predictions (6 questions $\times$ 12 countries).** Bracketed values report 95% cluster-bootstrap confidence intervals (1,000 iterations over the 71 country-question cells). **WVS Fine-Tuning Shift** (ΔAcc , $\Delta\sigma_r$) measures the change relative to each model’s corresponding zero-shot checkpoint (Tulu 3 70B-DPO for the 70B run; Qwen 3.5 9B for the 9B runs), with 95% paired-bootstrap CIs. The best accuracy and MAE are bolded. While WVS fine-tuning via SFT and DPO substantially improves point accuracy (+8.2 to +14.6 points), it systematically compresses dispersion ($\Delta\sigma_r$ of -0.05 to -0.14). Sparse-reward GRPO leaves accuracy unchanged and σ_r within 0.03 of the baseline, whereas distribution-shaped GRPO improves accuracy (+9.1) at the cost of severe variance collapse ($\sigma_r = 0.21$). Unparseable responses are excluded (Gemini 2.5 Pro: $n = 8,377$; Llama 3.1 70B Base: $n = 9,988$; all other models: $n = 10,000$).

zero (Table 2); sparse-reward GRPO leaves accuracy unchanged and σ_r within 0.03 of the baseline (§4.3). Fine-tuning does improve location: MAE and W_1 fall for every SFT and DPO run (Tulu W_1 $0.69 \rightarrow 0.55$; Qwen $1.01 \rightarrow 0.89$ with SFT and 0.73 with DPO), so consensus collapse names the loss of spread, not a loss of distributional accuracy overall. The pre-trained Llama 3.1 70B base, prompted in completion style, is the only over-dispersed model ($\sigma_r = 1.22$ at 50.3% accuracy) and has the lowest W_1 in the table (0.52); every post-trained checkpoint, whether post-trained by its provider or fine-tuned on WVS in this work, falls below 1. Along the Tulu trajectory (Table 5), general post-training removes half of the spread with minimal accuracy gain (base $\rightarrow$ SFT: $\Delta\text{Acc} +0.9$ [+0.1, +1.9], $\Delta\sigma_r -0.63$ [-0.74, -0.58]) and the preference-optimization stage restores a little of it (+0.05); survey fine-tuning is what buys accuracy. The 9B and 70B DPO runs, trained with the same objective and pair construction, show the same qualitative pattern ($\sigma_r = 0.62$ vs. 0.50), so the collapse is not specific to one family or scale. The fine-tuned model moves toward the conditional mode for each persona, gaining point accuracy at the direct cost of spread.

4.2 The collapse is not recoverable by raising the sampling temperature

We swept the sampling temperature across two model families and scales to test whether the observed collapse is a decoding artifact. If fine-tuning had merely narrowed the output distribution, rather than altered it, raising the temperature should restore the suppressed dispersion. For the most collapsed model in our suite, Tulu 3 70B-DPO (+WVS, $\sigma_r = 0.50$), and for Qwen 3.5 9B-DPO (+WVS), we swept $T \in \{0, 0.5, 0.7, 1.0\}$, from greedy decoding to the untransformed output distribution, with $n = 10,000$ at every temperature for both models.

We find that temperature does not recover the collapse for either model (Table 3). For Tulu, moving from $T = 0$ to $T = 1.0$ changes 3.7% of predictions and shifts σ_r from 0.50 to 0.51. Qwen’s output distribution is less concentrated: 7.1% of its predictions change at $T = 1.0$, roughly twice Tulu’s rate, yet W_1 stays at 0.73 at every temperature and σ_r moves only from 0.62 to 0.65. The pattern holds within WEIRD and non-WEIRD populations separately (Appendix D): Tulu’s non-WEIRD σ_r stays at 0.33–0.34 across all temperatures. The lost dispersion is therefore not recoverable by sampling temperature; we did not test $T > 1$, nucleus or min- p sampling, or diversity-seeking prompts,

Metric	$T = 0$	$T = 0.5$	$T = 0.7$	$T = 1.0$
<i>Tulu 3 70B-DPO (+WVS)</i>				
Accuracy (%)	57.9	58.0	57.9	57.9
MAE	0.78	0.78	0.78	0.78
W_1	0.55	0.54	0.55	0.54
σ_r	0.50	0.50	0.50	0.51
Preds. changed	—	2.0%	2.7%	3.7%
<i>Qwen 3.5 9B-DPO (+WVS)</i>				
Accuracy (%)	53.1	53.0	52.8	52.7
MAE	1.04	1.05	1.05	1.06
W_1	0.73	0.73	0.73	0.73
σ_r	0.62	0.62	0.63	0.65
Preds. changed	—	3.8%	5.0%	7.1%

Table 3: Temperature sweeps on both WVS-fine-tuned DPO models ($n = 10,000$ at every temperature). “Preds. changed” is measured against each model’s own $T = 0$ run. The Qwen $T = 0$ column is a fresh greedy run made for the sweep, which is why its accuracy (53.1) differs from Table 2 (53.0): it differs from the original greedy run on 1.3% of predictions (126 of 10,000), the run-to-run floor of greedy decoding. Even at $T = 1.0$, W_1 is unchanged for both models and σ_r moves by at most 0.03: sampling perturbs individual predictions without restoring population spread.

so the claim is limited to the range tested. Because DPO compresses variance substantially while SFT and sparse-reward GRPO trained on the same respondent pool barely move it (§4.1), we attribute the loss to the training objective rather than to decoding; this is a behavioural result: we have not measured the output logits of the fine-tuned models directly.

4.3 Reinforcement learning on Qwen 3.5 9B does not reverse the collapse

We next ask whether reinforcement learning can provide an alternative path. We train Qwen 3.5 9B with GRPO under two reward designs. With a sparse accuracy reward (+1.0 for exact match, scaled MAE penalty otherwise), the policy performs near-identically to its zero-shot baseline (38.6% vs. 38.4% accuracy, σ_r 0.70 vs. 0.73), a null result (paired ΔAcc +0.2 [−0.2, +0.5]). Human survey data is inherently stochastic, two demographically identical respondents may give different answers, so the sparse reward offers the policy gradient no stable update direction and the model stays at its pre-trained prior. A distribution-shaped reward does not help either: rewarding each sampled answer by its relative frequency among human respondents in the same (country, question) cell, estimated from training questions only, raises accuracy to 47.5% and lowers W_1 to 0.84, but collapses

WEIRD			non-WEIRD		
Ctry	Acc	σ_r	Ctry	Acc	σ_r
AUS	57.5	0.79	BGD	62.9	0.33
DEU	56.9	0.71	BRA	51.1	0.55
GBR	53.5	0.87	CHN	53.9	0.60
NLD	58.9	0.70	ETH	66.5	0.16
USA	53.1	0.73	IDN	68.2	0.28
			KEN	51.7	0.25
			NGA	60.9	0.11

Table 4: Per-country accuracy and σ_r for Tulu 3 70B-DPO (+WVS). WEIRD: $\sigma_r = 0.70$ –0.87. Non-WEIRD collapse: NGA 0.11, ETH 0.16.

the spread further (σ_r 0.70 $\rightarrow$ 0.21, reaching 0.00 on Q1). That reward is maximized by always emitting the cell’s modal answer, so it drives the policy toward the conditional mean more directly than the sparse reward does.

4.4 The collapse is most severe for underrepresented populations

Per-country analysis reveals that consensus collapse is not uniform, and that it is most severe for non-WEIRD populations (Henrich et al., 2010), which are plausibly less represented in pre-training data, although we do not measure that (Table 4).

For Nigeria, the aligned model keeps only 11% of the human response spread, effectively reducing 660 diverse respondents to a single stereotyped prediction. This extends the findings of Qu and Wang (2024) along the training trajectory of a single model family (Table 5): the pre-trained Llama 3.1 70B base shows no WEIRD/non-WEIRD gap at all (σ_r 1.21 vs. 1.22, both over-dispersed); the gap opens at the first post-training stage, supervised instruction tuning (Tulu 3 SFT: 0.81 vs. 0.43), persists through the DPO and RLVR stages, and deepens further with our survey fine-tuning (0.76 vs. 0.33).

Figure 3 shows that this asymmetry is not unique to Tulu. For every post-trained model outside the Qwen 3.5 9B family, MAE is broadly comparable between WEIRD and non-WEIRD populations (right panel) while dispersion retention diverges by 0.20–0.43 (left panel), with non-WEIRD populations losing more dispersion under every provider’s post-training and under our DPO fine-tuning. The Qwen family is the exception: its gap is at most 0.08 zero-shot and after DPO or GRPO, and disappears after SFT (0.68 vs. 0.68), so the size of the asymmetry depends on the base model as well as on the training objective.

Stage	Acc%	σ_r WEIRD	σ_r non-WEIRD
Llama 3.1 70B (base)	50.3	1.21 [1.03, 1.37]	1.22 [1.01, 1.44]
Tulu 3 70B-SFT (ZS)	51.2	0.81 [0.63, 1.01]	0.43 [0.31, 0.56]
Tulu 3 70B-DPO (ZS)	49.7	0.86 [0.68, 1.05]	0.49 [0.36, 0.64]
Tulu 3 70B-RLVR (ZS)	50.6	0.83 [0.63, 1.03]	0.45 [0.33, 0.57]
Tulu 3 70B-DPO (+WVS)	57.9	0.76 [0.60, 0.93]	0.33 [0.22, 0.44]

Table 5: WEIRD vs. non-WEIRD dispersion retention along the Llama 3.1 70B $\rightarrow$ Tulu 3 training trajectory, evaluated on the same 10,000 pairs; the first four rows are zero-shot checkpoints, the last is our WVS fine-tune of the Tulu-DPO checkpoint. 95% cluster-bootstrap CIs over (country, question) cells. The two groups’ intervals overlap at the base and separate from the first post-training stage onward.

4.5 Question-level variation reveals where collapse matters most

Figure 4 shows per-cell σ_r across all 12 countries; per-question accuracy and σ_r averages are in Appendix G.

Key observations. For high-consensus questions such as Q1, all models achieve $\sim 88\text{--}90\%$ accuracy, but every model collapses the spread ($\sigma_r < 0.25$); when ground truth is near-unanimous, consensus collapse is harmless. For culturally sensitive questions such as Q182, alignment dominates accuracy (Tulu 3 70B-DPO (+WVS) 52.3% vs. 9.9% for Qwen 3.5 9B zero-shot), but at the cost of spread ($\sigma_r = 0.53$ vs. 0.68).

Q189: a case study in complete collapse. Q189 asks: “Do you think it is justifiable for a man to beat his wife?” (1–10 scale). Tulu 3 70B-DPO (+WVS) predicts 1 (“never justifiable”) for every single respondent in every country¹—1,544 identical predictions, $\sigma_r = 0.00$. Yet the human distribution varies substantially: while the global mode is 1, Kenya’s mean response is 3.44 ($\sigma = 2.95$), Nigeria’s is 2.23 ($\sigma = 1.99$), and Bangladesh’s is 2.31 ($\sigma = 1.73$). The model has learned the socially desirable answer, the one DPO’s preference signal reinforces, and applies it uniformly, erasing all cross-national and within-country variation. GPT-4o exhibits identical behavior ($\sigma_r = 0.00$), suggesting this is not specific to fine-tuning but reflects a broader tendency of aligned models to converge on normatively “correct” responses to morally charged questions.

¹Q189 was not administered in Great Britain in the WVS Wave 7; the 1,544 predictions span the remaining 11 countries.

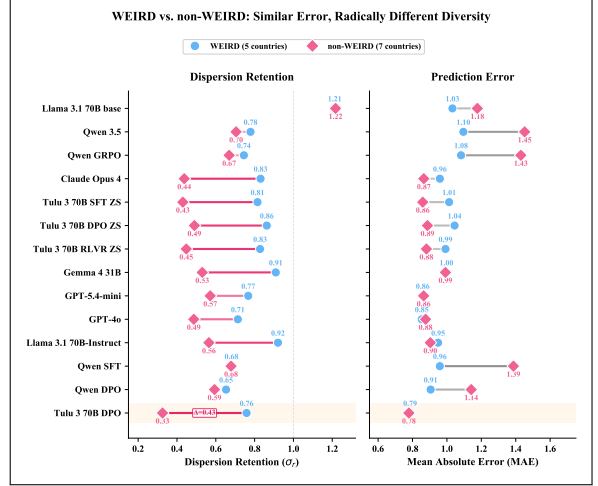


Figure 3: **WEIRD vs. non-WEIRD asymmetry across all models.** Left: dispersion retention (σ_r); right: prediction error (MAE). Error rates are comparable across populations, but dispersion retention differs by up to $\Delta = 0.43$ for Tulu 3 70B-DPO (+WVS). The pre-trained Llama 3.1 70B base (top row) shows no gap (1.21 vs. 1.22). The gap is 0.20–0.43 for every post-trained model outside the Qwen 3.5 9B family, including Tulu’s SFT, DPO, and RLVR stages, so the asymmetry is not specific to Tulu or to DPO; within the Qwen family it is at most 0.08 and vanishes after SFT (0.68 vs. 0.68).

4.6 How Much Can a Post-Hoc Fix Recover?

To test whether the collapse is recoverable by post-hoc means, we ask how much of the spread can be restored through a minimal intervention, which we call *prior mixing*: probabilistically mixing the aligned model with a small unaligned prior from a different family, Qwen 3.5 9B zero-shot. This is not proposed as a deployment-ready method, but as a probe of the collapse’s depth—a test of what mixing can and cannot recover.

Probe Formulation. Let M_{DPO} denote the aligned point-predictor and M_{ZS} the unaligned zero-shot prior. For each simulated respondent i , sample $z_i \sim \text{Bernoulli}(\alpha)$:

$$\hat{y}_i = z_i \cdot M_{\text{DPO}}(x_i) + (1 - z_i) \cdot M_{\text{ZS}}(x_i) \quad (1)$$

At $\alpha = 1.0$ the probe reduces to pure DPO and at $\alpha = 0.0$ to the prior. Each query is served by exactly one model, so with a 9B prior at $1 - \alpha = 0.05$ the mixture is cheaper than the 70B model alone, and unlike rectification (Krsteski et al., 2026) it needs no ground-truth human data at inference time.

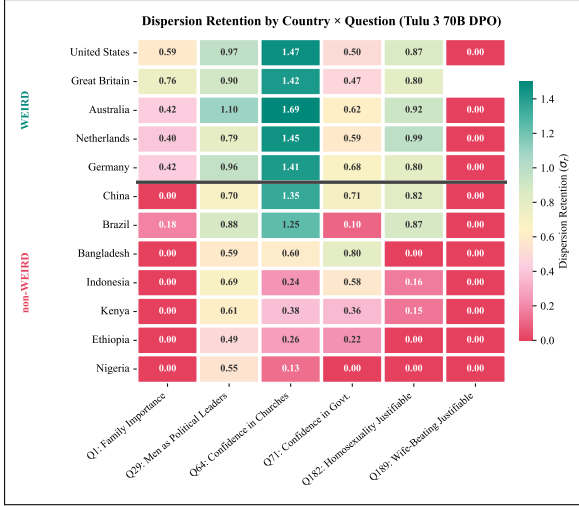


Figure 4: **Per-cell σ_r for Tulu 3 70B-DPO (+WVS)** (12 countries $\times$ 6 questions). The Q189 column is uniformly zero (complete mode collapse). The WEIRD/non-WEIRD divide is visible vertically: WEIRD countries (top rows) retain moderate spread while non-WEIRD countries (bottom rows) show near-total collapse across most questions.

Configuration	Acc%	MAE	$W_1 \downarrow$	$\sigma_r (\rightarrow 1)$
DPO only ($\alpha = 1.0$)	58.3	0.77	0.54	0.51
Zero-shot prior only ($\alpha = 0.0$)	39.0	1.28	1.00	0.74
Prior mixing ($\alpha = 0.95$)	57.0	0.80	0.51	0.62

Table 6: Held-out test results ($n = 8,005$) using the dev-selected $\alpha = 0.95$ and routing seed 42; across ten routing seeds the mixed row gives $W_1 = 0.51 \pm 0.01$ and $\sigma_r = 0.60 \pm 0.02$. Prior mixing reduces W_1 from 0.54 to 0.51 and partially recovers σ_r from 0.51 to 0.62. The recovery is consistent but bounded; the residual gap measures how much of the collapse persists under the simplest post-hoc intervention, particularly for non-WEIRD populations (Table 7).

Protocol. We partition the 10,000 test pairs into a 20% development set (1,995 pairs) and an 80% held-out set (8,005 pairs), stratified by (country, question) cell with a fixed seed, select α on the development set, and report the probe on the held-out set; the diagnostic results in §4 use the full set, on which no selection was performed. Sweeping α on the development set (Appendix F), we select $\alpha = 0.95$, the largest value whose dev-set W_1 (0.58) is no worse than pure DPO’s (0.60) while σ_r improves substantially (0.60 vs. 0.52).

Prior mixing raises held-out σ_r from 0.51 to 0.62 and lowers W_1 from 0.54 to 0.51 (Table 6), a small but consistent improvement over pure DPO; held-out W_1 is flat at 0.50–0.51 across $\alpha \in [0.80, 0.95]$, so the recovery is not an artifact of a brittle α

Country	Accuracy (%)		σ_r	
	DPO	Mix.	DPO	Mix.
AUS	58.2	56.9	0.81	0.90
DEU	56.4	55.1	0.70	0.75
GBR	54.6	53.7	0.85	0.87
NLD	59.8	58.7	0.71	0.75
USA	54.4	54.0	0.74	0.76
BGD	61.9	60.9	0.30	0.51
BRA	50.7	48.9	0.56	0.73
CHN	53.6	52.7	0.59	0.64
ETH	67.5	66.7	0.18	0.26
IDN	68.7	66.4	0.29	0.53
KEN	50.7	49.0	0.25	0.37
NGA	62.4	61.1	0.13	0.36

Table 7: Per-country recoverability under prior mixing ($\alpha = 0.95$) on the held-out test set ($n = 8,005$). The residual gap from $\sigma_r = 1.0$ measures the structural component of the collapse, i.e., spread not recoverable by routing a fraction of queries to an unaligned prior. For non-WEIRD populations, large residuals remain: Nigeria recovers to $\sigma_r = 0.36$, meaning 64% of the within-country spread among Nigerian respondents is not recoverable by output-space mixing.

choice. Decomposed by country (Table 7), the bounded recovery is itself the finding. For WEIRD populations, whose retention was already 0.70–0.85, mixing adds a few points (AUS 0.81 $\rightarrow$ 0.90, DEU 0.70 $\rightarrow$ 0.75). For non-WEIRD populations the gap remains large even after mixing (NGA 0.13 $\rightarrow$ 0.36, IDN 0.29 $\rightarrow$ 0.53, KEN 0.25 $\rightarrow$ 0.37), so the unaligned prior does not supply the lost spread for these populations either. Evidence from these results suggests that collapse for underrepresented populations is not a surface-level reweighting failure but a deeper representational gap that output-space mixing with an unaligned prior cannot recover.

5 Discussion

5.1 Why value-encoded personas are not enough

Consensus collapse reflects, in part, a gap between categorical persona descriptions and individual biographical specificity. Our value-encoded personas are not simple demographic vectors, but instead each encodes ~ 60 words of information, including interpersonal trust orientation, civic engagement level, and religious identity. Crucially, they encode the Inglehart–Welzel cultural-map dimensions (traditional/secular-rational, survival/self-expression) that the WVS instrument was specifically designed to measure. Despite this, the model

still reduces Nigeria to $\sigma_r = 0.11$, keeping only 11% of the spread that exists among Nigerian respondents who share the same categorical profile. The failure does not appear to be caused by lack of information, since our personas already encode the most meaningful dimensions of the WVS instrument. We believe that part of the deficit therefore lies in the lack of *idiosyncratic biographical detail* required for individual-level prediction, but not all of it. A Bayes-optimal point predictor given only the persona would retain $\sigma_r \approx 0.31$ on average (Appendix C), and Nigeria, Ethiopia, and Kenya fall below even that floor, so the model discards variance the persona demonstrably supports, while Western countries sit about twice above it. Two respondents who are both “traditional, trusting, civically embedded, 40-year-old Orthodox males from Ethiopia” may hold fundamentally different views shaped by life experiences not captured at the persona level.

Formally, under cross-entropy loss with input features X that do not fully determine target Y , the loss-minimizing predictor converges to $\mathbb{E}[Y | X]$, whose variance satisfies $\text{Var}(\mathbb{E}[Y | X]) \leq \text{Var}(Y)$, with equality only when X fully determines Y . This bounds the variance any point predictor can express when the input does not resolve individual responses, and it is the direction of the compression we observe; but the bound alone does not explain the pattern, since the fine-tuned model sits above the floor for WEIRD countries and below it for the most affected non-WEIRD countries (Appendix C). Park et al. (2024) provide compelling evidence for this: replacing structured personas with two-hour interview transcripts that inherently capture biographical specificity enables more detailed modeling, with agents reproducing participants’ survey answers 85% as accurately as the participants reproduce their own answers two weeks later. These findings suggest a continuum of input richness along which consensus collapse may progressively dissolve, scaling from bare demographics through the structured personas evaluated in this work, and ultimately to dense biographical contexts (Park et al., 2024).

5.2 Implications for the field

Our diagnostic findings carry three implications. First, point accuracy alone can be a misleading metric. The most accurate model in our study is also the least distributionally faithful, and researchers evaluating SRM systems must report

variance-aware metrics (W_1 , σ_r) alongside accuracy. Second, alignment exacerbates representational harm, where the populations most in need of accurate simulation, underrepresented and non-Western communities, suffer the most substantial collapse, plausibly a consequence of alignment objectives applied to populations less represented in the base model training data, though we do not measure coverage directly. Third, decoding settings do not appear to reverse the collapse, so recovering spread requires an intervention beyond temperature. This could include richer per-individual context (Park et al., 2024), post-hoc strategies such as rectification or prior mixing, or prompt-level distribution elicitation, which restored spread for GPT-4o at a substantial accuracy cost (Appendix E).

6 Conclusion

In this work, we identified a failure mode termed *consensus collapse*, which is the systematic compression of response spread induced by post-training and survey fine-tuning. We demonstrate that general post-training removes half of the spread with minimal accuracy gain; survey fine-tuning then buys accuracy at a further cost, so that the most accurate model (Tulu 3 70B-DPO fine-tuned on WVS, 57.9%) keeps only half of the human spread ($\sigma_r = 0.50$). Sampling at up to $T = 1.0$ leaves W_1 unchanged for both fine-tuned DPO models, and reinforcement learning on Qwen 3.5 9B left the model at its pre-trained prior under a sparse accuracy reward and collapsed variance further under a distribution-shaped one. We also find that the collapse is inequitable, with WEIRD populations keeping 70–87% of their spread while Nigeria keeps 11%, and on Q189 the aligned model predicted “never justifiable” for all 1,544 respondents despite a Kenyan mean of 3.44 on a 10-point scale. Prior mixing, the simplest post-hoc probe, lowers W_1 from 0.54 to 0.51 but lifts Nigeria only from $\sigma_r = 0.13$ to 0.36; the bounded recovery shows that the collapse is not stored where output-space mixing can reach it. Work that simulates populations with LLMs must therefore move beyond point accuracy and recognize that current post-training and survey fine-tuning trade population diversity for consensus.

Limitations

Our evaluation uses 6 held-out WVS questions from a single survey instrument. We note three

mitigating factors: (1) we hypothesize, but have not tested, that the underlying mechanism (cross-entropy loss with features that do not fully determine the target, §5) is instrument-agnostic; (2) the WVS is among the most rigorously cross-validated cross-cultural instruments, with the Inglehart–Welzel dimensions encoded directly into our personas; and (3) the per-country asymmetry we document (e.g., UK $\sigma_r = 0.87$, Netherlands 0.70 vs. Nigeria $\sigma_r = 0.11$, Ethiopia 0.16) mirrors patterns Durmus et al. (2023) observe across different cultural instruments. Nonetheless, replication on other instruments (Pew, ANES, Eurobarometer) is valuable future work.

The (Q189, GBR) cell is empty across all data files due to a gap in the WVS source data, yielding 71/72 cell coverage (98.6%). The persona’s two value tiers are derived from the WVS SAC-SECVL and RESEMAVAL indices, which are computed from multiple survey items; two of our test questions (Q29 and Q182) and two training questions (Q6 and Q185) are among them. Excluding the two test items leaves the accuracy–diversity ordering unchanged (Appendix B); we did not rebuild the personas with these items removed. All prompts were administered in English, whereas WVS respondents in non-English-speaking countries answered in local languages. Our decoding sweep covers sampling temperatures up to 1.0 only; higher temperatures, nucleus or min- p sampling, and diversity-seeking prompts were not tested on the fine-tuned models. A prompt-level probe on GPT-4o (Appendix E) shows that eliciting a stated answer distribution and sampling from it restores spread on the collapsed item Q189 at a cost of 12 accuracy points; we have not run the probe on the fine-tuned models. Our evaluation covers 4-point and 10-point ordinal scales; generalization to wider scales or open-ended responses requires further investigation. The prior-mixing α was selected on a stratified 20% development split; using a larger or independently collected development set would further strengthen the claim. Furthermore, our evaluation relies on a standardized, neutral persona prompt. While this isolates the effect of the model’s training, investigating whether prompt engineering can recover the spread of the fine-tuned models remains an important direction for future work.

Ethical Considerations

All data is from the publicly available World Values Survey (WVS), a well-established cross-national survey instrument with documented sampling protocols and methodology used across the social sciences. Our use of the WVS complies with its public release terms.

All model usage adhered to the respective provider terms of service and API usage policies for proprietary models (OpenAI, Anthropic, Google), and to the model license terms for open-weight models (Qwen, Gemma, Llama, Tulu) accessed via Hugging Face and OpenRouter. No usage policies were circumvented at any stage of evaluation or fine-tuning.

We evaluate simulation fidelity rather than advocate for replacing human participants. Simulated survey responses should never substitute for genuine engagement with real communities, particularly marginalized populations. The geographic labels we employ are analytical shorthand and should not be read as essentializing any national identity.

References

- Lisa P Argyle, Ethan C Busby, Nancy Fulda, Joshua R Gubler, Christopher Rytting, and David Wingate. 2023. Out of one, many: Using language models to simulate human samples. *Political Analysis*, 31(3):337–351.
- Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. 2023. QLoRA: Efficient finetuning of quantized LLMs. In *Advances in Neural Information Processing Systems*, volume 36.
- Esin Durmus, Karina Nguyen, Thomas I Liao, Nicholas Schiefer, Amanda Askell, Anton Bakhtin, Carol Chen, Zac Hatfield-Dodds, Danny Hernandez, Nicholas Joseph, Liane Lovitt, Sam McCandlish, Orowa Sikder, Alex Tamkin, Janel Thamkul, Jared Kaplan, Jack Clark, and Deep Ganguli. 2023. Towards measuring the representation of subjective global opinions in language models. *arXiv preprint arXiv:2306.16388*.
- Christian Haerpfer, Ronald Inglehart, Alejandro Moreno, Christian Welzel, Kseniya Kizilova, Jaime Diez-Medrano, Marta Lagos, Pippa Norris, Eduard Ponarin, and Bi Puranen. 2022. World values survey: Round seven – country-pooled datafile version 6.0.
- Joseph Henrich, Steven J. Heine, and Ara Norenzayan. 2010. *The weirdest people in the world?* *Behavioral and Brain Sciences*, 33(2-3):61–83.
- John J Horton, Apostolos Filippas, and Benjamin S Manning. 2023. Large language models as simulated

- economic agents: What can we learn from homo sili-
cus? Technical report, National Bureau of Economic
Research.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan
Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and
Weizhu Chen. 2022. [LoRA: Low-rank adaptation of
large language models](#). In *International Conference
on Learning Representations*.
- Ronald F. Inglehart. 2006. [Mapping global values](#).
Comparative Sociology, 5:115–136.
- Junsol Kim and Byungkyu Lee. 2023. AI-augmented
surveys: Leveraging large language models and
surveys for opinion prediction. *arXiv preprint
arXiv:2305.09620*.
- Akaash Kolluri, Shengguang Wu, Joon Sung Park, and
Michael S Bernstein. 2025. Finetuning LLMs for
human behavior prediction in social science experi-
ments. In *Proceedings of the 2025 Conference on
Empirical Methods in Natural Language Processing*,
pages 30096–30111.
- Stefan Krsteski, Giuseppe Russo, Serina Chang, Robert
West, and Kristina Gligorić. 2026. [Valid survey simu-
lations with limited human data: The roles of prompt-
ing, fine-tuning, and rectification](#). In *Proceedings
of the 64th Annual Meeting of the Association for
Computational Linguistics (Volume 1: Long Papers)*,
pages 10887–10906, San Diego, California, United
States. Association for Computational Linguistics.
- Nathan Lambert, Jacob Morrison, Valentina Pyatkin,
Shengyi Huang, Hamish Ivison, Faeze Brahman,
Lester James V Miranda, Alisa Liu, Nouha Dziri,
Shane Lyu, Yuling Gu, Saumya Malik, Victoria Graf,
Jena D Hwang, Jiangjiang Yang, Ronan Le Bras,
Oyvind Taffjord, Chris Wilhelm, Luca Soldaini,
and 4 others. 2024. Tulu 3: Pushing frontiers in
open language model post-training. *arXiv preprint
arXiv:2411.15124*.
- Benjamin S Manning, Kehang Zhu, and John J Horton.
2024. Automated social science: Language models
as scientist and subjects. Technical report, National
Bureau of Economic Research.
- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Car-
roll L Wainwright, Pamela Mishkin, Chong Zhang,
Sandhini Agarwal, Katarina Slama, Alex Ray, John
Schulman, Jacob Hilton, Fraser Kelton, Luke Miller,
Maddie Simens, Amanda Askell, Peter Welinder,
Paul Christiano, Jan Leike, and Ryan Lowe. 2022.
Training language models to follow instructions with
human feedback. *Advances in neural information
processing systems*, 35:27730–27744.
- Joon Sung Park, Carolyn Q Zou, Aaron Shaw, Ben-
jamin Mako Hill, Carrie Cai, Meredith Ringel Morris,
Robb Willer, Percy Liang, and Michael S Bernstein.
2024. Generative agent simulations of 1,000 people.
arXiv preprint arXiv:2411.10109, 52.
- Yao Qu and Jue Wang. 2024. Performance and biases of
large language models in public opinion simulation.
Humanities and Social Sciences Communications,
11(1):1095.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Christo-
pher D Manning, Stefano Ermon, and Chelsea Finn.
2023. Direct preference optimization: Your language
model is secretly a reward model. *Advances in neural
information processing systems*, 36:53728–53741.
- Shibani Santurkar, Esin Durmus, Faisal Ladhak, Cino
Lee, Percy Liang, and Tatsunori Hashimoto. 2023.
Whose opinions do language models reflect? In
International conference on machine learning, pages
29971–30004. PMLR.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu,
Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan
Zhang, Y. K. Li, Y. Wu, and Daya Guo. 2024.
Deepseekmath: Pushing the limits of mathematical
reasoning in open language models. *arXiv preprint
arXiv:2402.03300*.
- Mrinank Sharma, Meg Tong, Tomasz Korbak, David
Duvenaud, Amanda Askell, Samuel R Bowman,
Newton Cheng, Esin Durmus, Zac Hatfield-Dodds,
Scott R Johnston, Shauna Kravec, Timothy Maxwell,
Sam McCandlish, Kamal Ndousse, Oliver Rausch,
Nicholas Schiefer, Da Yan, Miranda Zhang, and
Ethan Perez. 2024. Towards understanding sycoph-
ancy in language models. In *International Con-
ference on Learning Representations*, volume 2024,
pages 110–144.
- Gabriel Simmons and Vladislav Savinov. 2024. Assess-
ing generalization for subpopulation representative
modeling via in-context learning. In *Proceedings of
the 1st Workshop on Personalization of Generative
AI Systems*, pages 18–35.
- Seungjong Sun, Eungu Lee, Dongyan Nan, Xiangy-
ing Zhao, Wonbyung Lee, Bernard J Jansen, and
Jang Hyun Kim. 2024. Random silicon sam-
pling: Simulating human sub-population opinion
using a large language model based on group-
level demographic information. *arXiv preprint
arXiv:2402.18144*.
- Angelina Wang, Jamie Morgenstern, and John P Dick-
erson. 2025. Large language models that replace
human participants can harmfully misportray and
flatten identity groups. *Nature Machine Intelligence*,
7(3):400–411.

A Question Inventory

Table 8 lists all 21 World Values Survey questions
used in this study, their response scales, thematic
clusters, and train/test assignment. The test set
spans three of the four clusters (Values, Social
Trust, Political); no Economic item is held out,
so generalisation to that cluster is not tested.

Table 8: Complete question inventory drawn from WVS Wave 7. Q57 (interpersonal trust) is used in persona construction and excluded from evaluation. [†]Q29 and Q182 are components of the RESEMAVAL index encoded in the persona, as are the training items Q6 and Q185 (Appendix B).

Code	Question (abbreviated)	Scale	Cluster	Split
Q1	How important is family in your life?	1–4	Values	Test
Q2	How important are friends in your life?	1–4	Values	Train
Q6	How important is religion in your life?	1–4	Values	Train
Q27	Main goal: make my parents proud	1–4	Values	Train
Q29	Men make better political leaders than women	1–4	Values	Test [†]
Q46	Would you say you are happy?	1–4	Economic	Train
Q47	State of health these days	1–5	Economic	Train
Q48	Freedom of choice and control over your life	1–10	Economic	Train
Q49	Satisfaction with life as a whole	1–10	Economic	Train
Q50	Satisfaction with financial situation of household	1–10	Economic	Train
Q58	How much do you trust your family?	1–4	Social Trust	Train
Q59	How much do you trust people in your neighborhood?	1–4	Social Trust	Train
Q60	How much do you trust people you know personally?	1–4	Social Trust	Train
Q64	Confidence in churches/mosques/temples	1–4	Social Trust	Test
Q71	Confidence in the government	1–4	Political	Test
Q106	Incomes equal vs. incentives for individual effort	1–10	Economic	Train
Q164	How important is God in your life?	1–10	Values	Train
Q182	Is homosexuality justifiable?	1–10	Values	Test [†]
Q185	Is divorce justifiable?	1–10	Values	Train
Q189	Is it justifiable for a man to beat his wife?	1–10	Values	Test
Q240	Political self-placement: left–right	1–10	Political	Train

B Persona–Index Overlap

The two value tiers in each persona are three-level binnings of the WVS SACSECVL and RESEMAVAL indices, which the WVS computes from twelve survey items each. Following the Common EVS/WVS Dictionary, two test questions are among these items, Q29 (D059, the gender-equality component of RESEMAVAL) and Q182 (F118, the choice component of RESEMAVAL), as are two training questions, Q6 (A006, SACSECVL) and Q185 (F121, RESEMAVAL). The remaining four test questions are not part of either index. Table 9 measures how much signal the self-expression tier carries for the two affected test items, with Q189 as a control, and recomputes the headline metrics on the four unaffected test questions.

C Bayes-Optimal Variance Floor

Because personas do not fully determine responses, $\sigma_r = 1$ is unattainable for any point predictor. We estimate the attainable floor from the full WVS microdata (462K records): respondents are grouped into identical-persona cells (the persona text with age replaced by its decade), and for each (country, test question) pair the explained variance is estimated by the law of total variance with unbiased within-cell variances, $\text{Var}(\mathbb{E}[Y \mid X]) = \text{Var}(Y) - \mathbb{E}[\text{Var}(Y \mid X)]$, dropping cells with fewer than five respondents. The oracle σ_r is the

Q	In index	Tier adds	corr(tier, answer)
Q182	yes	+1.7 pts	+0.42
Q29	yes	+7.0 pts	+0.33
Q189	no (control)	+0.1 pts	+0.09

Model	Acc (%)		σ_r	
	all 6	clean 4	all 6	clean 4
Tulu 3 70B-DPO (+WVS)	57.9	64.2	0.50	0.43
Tulu 3 70B-DPO (ZS)	49.7	58.7	0.64	0.50
Qwen 3.5 9B-DPO (+WVS)	53.0	59.6	0.62	0.64
Qwen 3.5 9B (ZS)	38.4	47.5	0.73	0.73
GPT-4o (ZS)	52.8	61.4	0.58	0.41

Table 9: Persona–index overlap. *Top*: accuracy gained by predicting the modal answer per (country, persona-tier) cell over a per-country modal baseline, and the mean within-country correlation between the three-level self-expression tier and the ordinal answer, computed on ground-truth responses only; Q189 is not part of the index and serves as a control. *Bottom*: accuracy and σ_r recomputed on the four test questions outside the index (Q1, Q64, Q71, Q189). The accuracy–diversity ordering is unchanged.

square root of the explained fraction; it averages 0.31 (per question: Q1 0.08, Q29 0.36, Q64 0.34, Q71 0.30, Q182 0.47, Q189 0.29). Table 10 compares it with Tulu 3 70B-DPO (+WVS).

D Temperature Analysis by Subgroup

Tables 11 and 12 disaggregate the temperature sweeps of §4.2 by WEIRD and non-WEIRD pop-

Country	Oracle σ_r	Tulu +WVS-DPO	Ratio
AUS	0.35	0.79	2.26
DEU	0.30	0.71	2.37
GBR	0.35	0.87	2.48
NLD	0.29	0.70	2.42
USA	0.41	0.73	1.77
BGD	0.24	0.33	1.36
BRA	0.20	0.55	2.71
CHN	0.26	0.60	2.28
ETH	0.38	0.16	0.43
IDN	0.26	0.28	1.08
KEN	0.33	0.25	0.77
NGA	0.31	0.11	0.35

Table 10: Oracle deviation ratio of a Bayes-optimal point predictor that outputs $\mathbb{E}[Y \mid \text{persona}]$, against the fine-tuned model. Ratio = model σ_r / oracle σ_r . Western countries sit about twice *above* the floor, whereas Ethiopia, Kenya, and Nigeria fall *below* it: the model under-expresses even the variance its input supports.

ulations. For Tulu 3 70B-DPO (+WVS) the gap between the groups is constant across temperatures: non-WEIRD σ_r remains at 0.33–0.34 from $T = 0$ to $T = 1.0$, while WEIRD σ_r holds at 0.76. For Qwen 3.5 9B-DPO, whose predictions change at roughly twice Tulu’s rate, W_1 is flat in both groups; non-WEIRD σ_r drifts from 0.59 to 0.64 without any accompanying W_1 improvement, which we read as added noise rather than recovered signal. Stochastic sampling does not reach the suppressed variance for either group, and reaches it least where the collapse is most severe.

Group	Metric	$T = 0$	$T = 0.5$	$T = 0.7$	$T = 1.0$
WEIRD	Accuracy (%)	55.8	55.9	55.9	55.8
	W_1	0.40	0.39	0.40	0.39
	σ_r	0.76	0.76	0.76	0.76
	Preds. changed	—	2.1%	3.4%	4.4%
Non-WEIRD	Accuracy (%)	59.5	59.6	59.4	59.5
	W_1	0.65	0.65	0.65	0.65
	σ_r	0.33	0.33	0.33	0.34
	Preds. changed	—	1.9%	2.2%	3.2%

Table 11: Temperature sweep on Tulu 3 70B-DPO (+WVS) disaggregated by WEIRD and non-WEIRD populations. σ_r for non-WEIRD countries remains at 0.33–0.34 across all temperatures; the gap between the groups is unchanged by sampling.

E Prompt-Level Remedies on GPT-4o

To test whether a single closed-weight model can be prompted out of the collapse without a second checkpoint, we ran three conditions on GPT-4o over the same stratified subset of the evaluation set: 30 respondents per (country, question) cell, 2,130 pairs in total (seed 3407), with no parse failures

Group	Metric	$T = 0$	$T = 0.5$	$T = 0.7$	$T = 1.0$
WEIRD	Accuracy (%)	51.6	51.1	50.7	51.2
	W_1	0.54	0.56	0.56	0.54
	σ_r	0.65	0.65	0.66	0.66
	Preds. changed	—	3.4%	4.7%	5.9%
Non-WEIRD	Accuracy (%)	54.2	54.3	54.4	53.8
	W_1	0.85	0.85	0.84	0.86
	σ_r	0.59	0.60	0.61	0.64
	Preds. changed	—	4.1%	5.2%	8.0%

Table 12: Temperature sweep on Qwen 3.5 9B-DPO (+WVS) disaggregated by WEIRD and non-WEIRD populations. Predictions change at roughly twice Tulu’s rate, yet W_1 is flat in both groups; the non-WEIRD σ_r drift from 0.59 to 0.64 is not accompanied by any W_1 improvement.

in any condition. *Baseline* is the paper’s prompt decoded greedily. *Population draw* appends an instruction to answer as one randomly drawn individual from the real-world population matching the profile rather than giving the most typical or most socially acceptable answer, and samples at $T = 1.0$. *Distribution elicitation* asks the model to return a JSON probability distribution over the answer scale (decoded greedily) and samples one answer per respondent from that stated distribution with a per-respondent seed. Table 13 reports the results.

Condition	Acc%	MAE	$W_1 \downarrow$	σ_r	σ_r WEIRD	σ_r non-WEIRD
Baseline	51.2	0.88	0.63	0.61	0.77	0.49
Population draw	45.2	0.98	0.63	0.68	0.76	0.63
Distribution elicitation	39.5	1.19	0.57	1.34	1.32	1.35

Q	Baseline	Population	Distribution
Q1	0.00	0.10	2.02
Q29	1.08	0.94	1.36
Q64	1.10	1.14	1.46
Q71	0.48	0.60	1.19
Q182	0.79	0.76	1.13
Q189	0.00	0.37	1.02

Table 13: Prompt-level remedies on GPT-4o ($n = 2,130$, 30 pairs per cell, identical respondents in every condition). *Top*: aggregate metrics. *Bottom*: per-question σ_r . Population-draw prompting recovers little spread (0.61 $\rightarrow$ 0.68, mostly on Q189) and costs 6 accuracy points. Distribution elicitation restores the collapsed item Q189 (σ_r 0.00 $\rightarrow$ 1.02) and lowers W_1 to 0.57, comparable to prior mixing without a second model, but over-disperses consensus items (Q1: $\sigma_r = 2.02$) and costs 12 accuracy points. The probe was run on GPT-4o only; it does not test whether prompt-level elicitation reaches the spread erased by survey fine-tuning.

F Prior-Mixing α Sweep

Table 14 reports the development-set α sweep behind the selection rule in §4.6.

α	Acc%	MAE	$W_1 \downarrow$	$\sigma_r (\rightarrow 1)$
0.00	36.4	1.36	1.07	0.97
0.50	45.9	1.10	0.70	0.98
0.60	47.8	1.03	0.63	0.97
0.70	50.6	0.98	0.59	0.94
0.80	53.1	0.92	0.55	0.82
0.85	53.8	0.91	0.55	0.78
0.90	54.7	0.88	0.55	0.72
0.95	55.6	0.85	0.58	0.60
1.00	56.5	0.82	0.60	0.52

Table 14: α sweep on the development set ($n = 1,995$; routing seed 42). W_1 falls from 1.07 at $\alpha = 0$ to 0.58 at $\alpha = 0.95$, against 0.60 for pure DPO. We select $\alpha = 0.95$, the largest α whose dev-set W_1 is no worse than pure DPO’s while σ_r improves substantially (0.60 vs. 0.52).

G Per-Question Accuracy and Dispersion Retention

Tables 15 and 16 report per-question accuracy and deviation ratio averaged across all 12 countries, complementing the per-cell breakdown in Figure 4. For high-consensus questions such as Q1, all models reach ~ 88 – 90% accuracy but collapse the spread ($\sigma_r < 0.25$): when ground truth is near-unanimous, collapse is harmless. For culturally sensitive questions, alignment dominates accuracy at the cost of spread — on Q182, Tulu 3 70B-DPO (+WVS) reaches 52.3% (vs. 9.9% for Qwen 3.5 9B zero-shot and 33.0% for GPT-4o) but at $\sigma_r = 0.53$ (vs. 0.68 for Qwen zero-shot). On Q189 (“justifiable for a man to beat his wife”), Tulu 3 70B-DPO (+WVS) and GPT-4o both achieve $\sigma_r = 0.00$, complete mode collapse on the same morally charged item, while unaligned models retain $\sigma_r > 1.0$. On Q64 (confidence in religious institutions), unaligned models over-diversify ($\sigma_r > 1.0$), suggesting that some of the spread they preserve is noise rather than signal.

H Prompt Template

All chat models receive the following three-turn chat prompt verbatim. {persona}, {question_text}, {min}, and {max} are filled in per sample; no other prompt engineering, few-shot examples, or chain-of-thought instructions are used. The pre-trained Llama 3.1 70B base has no

Q	Tulu	Qw.DPO	Qw.SFT	GPT-4o	Qw.ZS	GRPO
Q1	88.0	88.4	89.9	89.8	89.5	89.7
Q29	39.5	32.8	24.1	39.1	31.9	32.2
Q64	49.2	50.7	51.4	43.4	47.5	48.0
Q71	42.1	37.3	34.4	35.2	32.6	34.9
Q182	52.3	47.6	60.6	33.0	9.9	6.8
Q189	79.0	62.8	58.4	79.0	18.5	19.2

Table 15: Per-question accuracy (%). Q1 is high-consensus across all models. Q182 and Q189 show the largest spread across models: Qwen 3.5 9B zero-shot and sparse-reward GRPO score 7–19%, while the WVS-fine-tuned models and GPT-4o score 33–79%.

Q	Tulu	Qw.DPO	Qw.SFT	GPT-4o	Qw.ZS	GRPO
Q1	0.23	0.22	0.00	0.03	0.10	0.05
Q29	0.77	0.54	0.75	1.00	0.80	0.73
Q64	0.97	0.89	0.73	1.09	1.17	1.11
Q71	0.47	0.47	0.59	0.49	0.50	0.48
Q182	0.53	0.60	0.75	0.82	0.68	0.67
Q189	0.00	1.02	1.32	0.00	1.20	1.20

Table 16: Per-question deviation ratio (σ_r), averaged across all 12 countries. Complete collapse on Q189 ($\sigma_r = 0.00$) for both Tulu 3 70B-DPO (+WVS) and GPT-4o despite substantial human variation; over-diversification on Q64 ($\sigma_r > 1.0$) for unaligned models.

chat template and receives the same content as a single completion prompt, decoded greedily for at most 8 tokens:

```
Survey respondent profile: {persona}
Question: {question_text}
Answer (single integer from {min} to {max}):
```

[System] You are simulating a survey respondent. Answer exactly as instructed, following the specified response format without additional commentary.

[User] You are a survey respondent with the following profile: {persona}. Read the question below and answer exactly as this person would. Question: {question_text}. Only return a single integer from {min} to {max}, nothing else.

[Assistant] {predicted_integer}

I Models and Hyperparameters

Table 17 lists all evaluated models with training methods, parameter counts, precision, and key hyperparameters. Custom fine-tuning uses LoRA (Hu et al., 2022) (rank 16, $\alpha = 16$) via the Unsloth framework on a single 80 GB-class NVIDIA GPU (A100 or H100); the 70B model additionally uses 4-bit NF4 quantization (Dettmers et al., 2023).

Supervised Fine-Tuning (SFT). Qwen 3.5 9B trained on 100,000 respondent–question pairs from the 15 training questions, drawn as a seeded random sample (seed 3407) of the 331,344 training-

question pairs and covering all 12 countries (5,352–14,234 pairs per country); 5% of the sample is split off for the early-stopping evaluation. Learning rate 2×10^{-5} , 3 epochs, effective batch 8 (per-device 2, gradient accumulation 4), AdamW 8-bit optimizer, BF16 precision, early stopping with patience 3.

DPO — Qwen 3.5 9B. Demographic Contrastive DPO following Kolluri et al. (2025): for each respondent the chosen response is their own answer and the rejected response is a different answer given by another respondent to the same question (a random other value in the rare case that all respondents agree). 100,000 such pairs, sampled with a fixed seed from the 15 training questions, learning rate 5×10^{-6} , 1 epoch, $\beta = 0.05$, effective batch 8. The reference model is implicit.

DPO — Tulu 3 70B. Replicated on allenai/Llama-3.1-Tulu-3-70B-DPO. 4-bit quantization (NF4, ~ 35 GB VRAM), effective batch 8 (per-device 1, gradient accumulation 8). As for Qwen, the reference model is implicit: the trainer scores reference log-probabilities with the LoRA adapter disabled, so no second copy of the 70B weights is loaded.

GRPO. Qwen 3.5 9B, 8 generations per prompt, $\beta = 0.04$, learning rate 5×10^{-6} , 1 epoch over 50,000 training samples, effective batch 16 (per-device 4, gradient accumulation 4). Reward: +1.0 for exact match, $-\text{MAE}/\text{scale_range}$ for near misses, -1.0 for parse failures (Shao et al., 2024). A second run keeps the same data budget, LoRA configuration, learning rate, β , and generation count, uses a larger effective batch of 128 (per-device 16, gradient accumulation 8), and replaces the reward with a distribution-shaped one: a sampled answer a earns $p(a \mid \text{cell}) / \max_{a'} p(a' \mid \text{cell})$, its relative frequency among human respondents in the same (country, question) cell, estimated from training questions only.

Model	Method	Params	Prec.	Key Config
<i>Zero-Shot Baselines (no fine-tuning)</i>				
GPT-4o	Zero-Shot	Prop.	—	API, greedy
GPT-5.4-mini	Zero-Shot	Prop.	—	API, greedy
Claude Opus 4	Zero-Shot	Prop.	—	API, greedy
Gemini 2.5 Pro	Zero-Shot	Prop.	—	API (preview endpoint), greedy
Gemma 4 31B	Zero-Shot	31B	—	API, greedy
Qwen 3.5 9B [†]	Zero-Shot	9B	—	API, greedy
Llama 3.1 70B-Instruct	Zero-Shot	70B	—	API, greedy
Llama 3.1 70B (base)	Zero-Shot	70B	—	Completion prompt, greedy
Tulu 3 70B-SFT	Zero-Shot	70B	—	A12 SFT checkpoint
Tulu 3 70B-DPO [†]	Zero-Shot	70B	—	A12 DPO checkpoint
Tulu 3 70B-RLVR	Zero-Shot	70B	—	A12 final RLVR checkpoint
<i>Custom Fine-Tuned on WVS</i>				
Qwen 3.5 9B [†]	+WVS-SFT	9B	BF16	$\text{lr}=2 \times 10^{-5}$, 3 ep.
Qwen 3.5 9B [†]	+WVS-DPO	9B	BF16	$\text{lr}=5 \times 10^{-6}$, $\beta=0.05$
Tulu 3 70B-DPO [†]	+WVS-DPO	70B	NF4	$\text{lr}=5 \times 10^{-6}$, $\beta=0.05$
Qwen 3.5 9B [†]	+WVS-GRPO	9B	BF16	8 gens/prompt, $\beta=0.04$
Qwen 3.5 9B [†]	+WVS-GRPO (dist.)	9B	BF16	cell-frequency reward

Table 17: Models under evaluation. [†]Checkpoints marked with [†] appear in both sections: evaluated zero-shot (top) and after additional fine-tuning on WVS data (bottom). The proprietary models and the open-weight Qwen, Gemma, and Llama-Instruct checkpoints were queried through OpenRouter, the Llama base and Tulu RLVR checkpoints through the Hugging Face Inference API, and the Tulu SFT and DPO checkpoints and all fine-tuned adapters were run locally with Unsloth; the Qwen Δ columns in Table 2 therefore compare an API-served zero-shot run with locally served fine-tuned runs.