

Neurosymbolic Action Model Learning under Partial Observability

Adem Kikaj^{1*}, Lennert De Smet¹, Giuseppe Marra¹, Luc De Raedt¹

¹ KU Leuven, Belgium
firstname.lastname@kuleuven.be

Abstract

AI planning studies how an agent can reach a goal by executing a sequence of actions. To plan correctly, the agent needs an action model describing when each action can be executed and how it changes the world. Constructing such models by hand requires domain expertise, and can be costly and error-prone. Action models can instead be learned from available data using existing neurosymbolic approaches, but they currently assume access to complete traces of fully observable images. These approaches fail to learn action models under partial observability where some of the images might not be present or are not fully informative of the current state of the world. Hence, this paper proposes NeSyAM, a novel neurosymbolic modeling paradigm for action model learning under partial observability. In addition, the paper presents a unified variational framework for theoretically analysing the limitations of existing methods compared to our proposed approach. NeSyAM is then tested extensively on six visual planning domains and three observation regimes to show it consistently recovers relevant parts of the true action model under partial observability.

1 Introduction

Given an initial state and a goal, AI planning searches for a sequence of actions that transforms the initial state into a state satisfying the goal (Ghallab, Nau, and Traverso 2004). This search relies on symbolic action models: descriptions of when actions are applicable and how they change the world, usually specified as preconditions and effects over symbolic predicates. In BLOCKSWORLD, for example, picking up a block requires the block to be clear and on the table (preconditions), and causes the robot to hold it (effects). Such models are traditionally provided by domain experts, but their manual construction is costly, error-prone, and difficult to scale. This has motivated a long line of work on learning action models from traces (Pasula, Zettlemoyer, and Kaelbling 2007; Yang, Wu, and Jiang 2007; Zhuo and Kambhampati 2013; Aineto, Celorrio, and Onaindia 2019; Lamanna and Serafini 2024; Aineto and Scala 2024; Lamanna et al. 2025).

Learning from symbolic traces however still requires a fully symbolic description of the traces provided by domain experts. Consequently, more recent work considers learning from visual traces (Xi, Gould, and Thiébaux 2024; Xi, Gould,

and Thiébaux 2026) where the learner observes traces of images and executed actions together with final-state information. Learning from such traces is a neurosymbolic problem: neural perception is required to interpret the images, while symbolic reasoning is required to recover the preconditions and effects of actions. Unfortunately, existing neurosymbolic learning approaches make the strong assumption that visual traces are complete and fully observable. They can not be applied to settings with missing images or when images do not contain all information of the state. For example, if a robot’s gripper is outside of its camera view, the images recorded when performing the action *pick-up(A)* may not show that the robot is holding block *A*. The images may therefore provide insufficient evidence for *holding(A)*, even though earlier observations, later observations, or the final-state description may constrain it.

In this paper, we focus on contributing to neurosymbolic action model learning under partial observability. We start by (1) proposing NeSyAM, a novel structured approximation to the partially observable action model learning problem. This approximation is then (2) theoretically compared to existing approaches by casting action model learning within a unifying variational perspective (Section 5). Specifically, this perspective shows that the state of the art uses a type of mean-field approximation to the action model learning problem that relies on complete and fully observable visual traces, while our structured approximation does not. Finally, we (3) compare NeSyAM with ROSAME-I across six visual planning domains and three observation regimes. Under full observability, NeSyAM recovers all relevant action roles, while ROSAME-I achieves higher full-candidate recovery. Under occlusion, NeSyAM preserves relevant-role recovery more consistently, although the full-candidate comparison remains mixed.

2 Preliminaries

In all that follows, uppercase characters X will denote random variables or random vectors with probability distribution $p(X)$, while lowercase characters x denote instances of those variables with corresponding probabilities $p^X(x)$, or simply $p(x)$ if the distribution is clear from context.

Planning domains and action models. We consider a lifted planning domain $D = \langle \mathcal{T}, \mathcal{P}, \mathcal{A}, \text{AM} \rangle$, where $\mathcal{T}$ is

*Corresponding author.

a set of types, $\mathcal{P}$ is a set of predicate symbols, $\mathcal{A}$ is a set of action schemas, and AM is an action model. A classical action model assigns every action schema $a(x) \in \mathcal{A}$ a tuple

$$\text{AM}(a(x)) = \langle \text{Pre}(a(x)), \text{Add}(a(x)), \text{Del}(a(x)) \rangle,$$

containing its preconditions, add effects, and delete effects.

For a planning instance I with a finite set of objects $\mathcal{O}$, grounding the variables x in the action schemas $a(x)$ and predicate templates $p(x)$ with respect to $\mathcal{O}$ produces a finite set of propositions $\mathcal{P}_I$ and grounded actions $\mathcal{A}_I$. For an action schema $a(x) \in \mathcal{A}$ and a type-compatible tuple of objects $\mathbf{o} \in \mathcal{O}$, we write $a(\mathbf{o}) \in \mathcal{A}_I$ for the corresponding grounded action. For example, *holding* is a predicate symbol with template *holding(x)* that is ground into the proposition *holding(A)*, while the action schema *pick-up(x)* is ground into the action *pick-up(A)*. A symbolic state $s \subseteq \mathcal{P}_I$ contains the grounded propositions that are true. We write $s_p \in \{0, 1\}$ for the truth value of proposition $p \in \mathcal{P}_I$, with $s_p = 1$ if and only if $p \in s$.

We use mostly standard STRIPS semantics to define action applicability and state transitions (Fikes and Nilsson 1971; Ghallab, Nau, and Traverso 2004). A grounded action a is applicable in state s when $\text{Pre}(a) \subseteq s$. Applying an applicable action produces $\text{res}(s, a) = (s \setminus \text{Del}(a)) \cup \text{Add}(a)$. Propositions that are not deleted persist. Preconditions that are not deleted remain true and are called *prevail conditions* (Bäckström and Nebel 1995). Standard STRIPS permits adding an already true proposition. However, our model will apply the additional constraint that an add effect can only apply to a false proposition. This modeling choice is intended to reduce reasoning shortcuts (Marconato et al. 2023).

In BLOCKSWORLD, the action schema *pick-up(x)* illustrates these definitions. For block A , the grounded action *pick-up(A)* requires *clear(A)*, *onTable(A)*, and *handEmpty*. It adds *holding(A)* and deletes *clear(A)*, *onTable(A)*, and *handEmpty*. Therefore, considering only these relevant propositions, applying *pick-up(A)* transforms $\{\text{clear}(A), \text{onTable}(A), \text{handEmpty}\}$ into $\{\text{holding}(A)\}$. In our learning setting, these precondition and effect relations are not given and must be recovered from visual traces.

Visual traces. The learner receives visual traces rather than symbolic state trajectories. A trace has the form $\tau = (z_1, a_1, z_2, a_2, \dots, z_T, a_T, f)$, where z_t are images, $a_t \in \mathcal{A}_I$ are observed grounded actions, and f is a fully observed symbolic description of the state reached after the final action. The trace contains no image of this final state. More formally, let $s_t \subseteq \mathcal{P}_I$ denote the symbolic state underlying image z_t , and let s_{T+1} denote the state reached after the final action. Then, the sequence $\mathbf{s} = (s_1, \dots, s_{T+1})$ forms the symbolic execution of which the first T entries $s_{1:T}$ are hidden. The final symbolic state s_{T+1} is fully described by the observed description f . Other observed entities are the images $\mathbf{z} = (z_1, \dots, z_T)$ and grounded actions $\mathbf{a} = (a_1, \dots, a_T)$. The image observations $\mathbf{z}$ might in our case be partial, i.e. an image z_t does not fully describe the content of its associated symbolic state s_t .

For example, for $t < T + 1$, a BLOCKSWORLD trace may contain an image z_t showing block A clear and on the table,

followed by *pick-up(A)* and a successor image z_{t+1} . The underlying transition changes *holding(A)* from false to true and removes *onTable(A)*. Under partial observability, the gripper or block A may be hidden in z_{t+1} , so the image alone does not determine whether *holding(A)* became true. Other observations, executed actions, and the final-state description may nevertheless constrain its value.

Probabilistic action models. We represent the unknown action model AM using a probabilistic action model (PAM) (Xi, Gould, and Thiébaux 2024). A PAM models the effects of actions on predicates in a lifted way by considering lifted combinations $c = (a(x), p(y))$, where $a(x) \in \mathcal{A}$ is an action schema and $p(y)$ a type-compatible lifted predicate template for each $p \in \mathcal{P}$. The PAM predicts probabilities for four possible roles NOT-INVOLVED, PRE, ADD, DEL, for each lifted combination c . The role NOT-INVOLVED means that the predicate is unrelated to the action. The role PRE denotes a prevail condition, ADD denotes an add effect and DEL denotes a predicate that is both a precondition and a delete effect. Specifically, these four mutually exclusive roles form the domain of a categorical random variable R_p over the roles of predicate template $p(y)$ with conditional probability distribution $p_{\theta_{\text{AM}}}(R_p | a)$ given an action schema a . The PAM distribution $p_{\theta_{\text{AM}}}(R_p | a)$ is modeled by four parameters $\theta_c = (p_N, p_P, p_A, p_D)$ with $p_N + p_P + p_A + p_D = 1$, for each lifted combination $c \in \mathcal{C} = \mathcal{A} \times \mathcal{P}$ representing the unknown precondition and effect relations in $\text{AM}(a(x))$. We collect the global action-model parameters as $\theta_{\text{AM}} = \{\theta_c\}_{c \in \mathcal{C}}$. The lifted PAM distributions $p_{\theta_{\text{AM}}}(R_p | a)$ are applied on specific planning instances I by assuming the roles of ground predicates are conditionally independent given the action a , i.e. the random vector $\mathbf{R}$ of roles for all ground predicates in $\mathcal{P}_I$ is governed by the distribution

$$p_{\theta_{\text{AM}}}(\mathbf{R} | a) = \prod_{p \in \mathcal{P}_I} p_{\theta_{\text{AM}}}(R_p | a), \quad (1)$$

where we slightly abuse notation by identifying the ground predicate $p \in \mathcal{P}_I$ with its corresponding predicate template.

In the *pick-up(x)* example, *holding(x)* has the ADD role, while *onTable(x)* has the DEL role. Evidence from different ground instances *pick-up(A)*, *pick-up(B)* therefore update the same lifted action-model parameters. The probabilistic transition that maps role probabilities and a proposition values to a successor value is introduced with our model (Section 4).

Variational inference. An alternative to maximising the log-likelihood $\log p_{\theta}(\mathbf{O})$ of a series of observations $\mathbf{O}$ under a parametrised distribution $p_{\theta}(\mathbf{O}, \mathbf{X}) = p_{\theta}(\mathbf{O} | \mathbf{X}) \cdot p_{\theta}(\mathbf{X})$ is to aim for the posterior distribution $p_{\theta}(\mathbf{X} | \mathbf{O})$. Indeed, the posterior is interpreted as the distribution over $\mathbf{X}$ that is consistent with the given observations $\mathbf{O}$, instead of the distribution $p_{\theta}(\mathbf{X})$ optimised to fit $\mathbf{O}$. It is however generally intractable to compute $p_{\theta}(\mathbf{X} | \mathbf{O})$. Hence, variational inference (VI) (Jordan et al. 1999) approximates $p_{\theta}(\mathbf{X} | \mathbf{O})$ by minimising a statistical divergence between $p_{\theta}(\mathbf{X} | \mathbf{O})$ and a parametrised family of *variational distributions* $q_{\lambda}(\mathbf{X})$. Minimising the KL divergence is a popular choice in VI and is equivalent to maximising the *evidence lower bound* (ELBO) (Blei, Kucukelbir, and McAuliffe 2017)

$$\mathbb{E}_{q_{\lambda}(\mathbf{X})} [\log p_{\theta}(\mathbf{O} | \mathbf{X})] - \text{KL}(q_{\lambda}(\mathbf{X}) || p_{\theta}(\mathbf{X})). \quad (2)$$

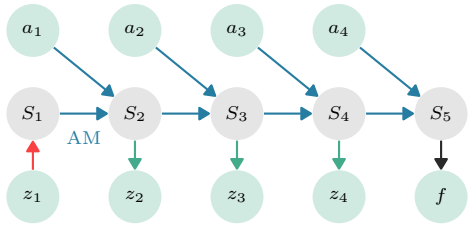


Figure 1: Action-conditioned hidden Markov model for a visual trace of length $T = 5$ representing the overall model to learn. Grey nodes indicate hidden symbolic state variables and green nodes indicate input actions and images. The perception model $p_{\theta}(S_1 | z_1)$ predicts the belief of the initial state. The probabilistic action model AM and the observed grounded actions $\mathbf{a}$ produce the successor states through $p_{\theta_{AM}}(S_{t+1} | S_t, a_t)$. The emission model $p_{\theta}(z_t | S_t)$ measures the agreement between the states and their associated images, while the final-state supervision compares the sampled endpoint s_5 with the observed description f .

The ELBO is popular, because choosing a fitting family of variational distributions, e.g. the mean-field family

$$q_{\lambda}(\mathbf{X}) = \prod_{i=1}^N q_{\lambda}(X_i), \quad (3)$$

can make it (partially) analytical. Another reason is the easy fitting of any variational distribution using black-box variational inference (Ranganath, Gerrish, and Blei 2014).

3 Action-Model Learning under Partial Observability

We now formalise the problem of learning action models from partially observable visual traces. Let I be the concrete planning instance of a lifted planning domain $\langle \mathcal{T}, \mathcal{P}, \mathcal{A}, \text{AM} \rangle$. Given visual traces of images $\mathbf{z} = (z_1, \dots, z_T)$, grounded actions $\mathbf{a} = (a_1, \dots, a_T) \in \mathcal{A}_I^T$ and a final states $f \in \mathcal{P}_I$, the learning target is the action model $\text{AM}(a(x))$ for every action schema $a(x) \in \mathcal{A}$ while accounting for uncertainty about the hidden symbolic variables $\mathbf{s}$. That is, a partially observable action model learning problem defines a parametrised probabilistic model $p_{\theta}(\mathbf{S}, \mathbf{z}_{2:T}, f | z_1, \mathbf{a})$ over symbolic states and images that takes the shape of the hidden Markov model (Figure 1)

$$p_{\theta}(S_1 | z_1) \prod_{t=1}^T p_{\theta_{AM}}(S_{t+1} | S_t, a_t) p_{\theta}(z_t | S_t) \mathbb{1}_{f=S_T},$$

where we explicitly indicate the dependency of the transitions $p_{\theta_{AM}}(S_{t+1} | S_t, a_t)$ on the action model parameters $\theta_{AM} \subseteq \theta$. We consider a joint probability distribution conditional on the first image z_1 to allow the distribution of the initial state S_1 to be informed by the first image z_1 through the perception model $p(S_1 | z_1)$. One can remove the perception model and consider only emission models from states S_t to z_t via $p(z_t | S_t)$ in Figure 1. The subsequent factorisation will instead start from an unconditional prior belief $p(S_1)$ that has to be obtained by other means.

The difficulty of action model learning under partial observability is compounded by the need to infer the symbolic

states from images while the action model is itself unknown. That is, there are two sources of uncertainty corresponding to different factors of $p(\mathbf{S}, \mathbf{z}_{2:T}, f | z_1, \mathbf{a})$; the uncertainty on the action model is captured by the transitions $p_{\theta_{AM}}(S_{t+1} | S_t, a_t)$, while the uncertainty due to partial observability is captured by the perception model $p_{\theta}(S_1 | z_1)$ and emission model $p_{\theta}(z_t | S_t)$. For example, if the gripper is hidden after *pick-up(A)*, the successor image may not reveal whether *holding(A)* is true. Nevertheless, the proposition *holding(A)* may be constrained by observations, executed actions, or the final-state description. The relevant question is therefore not only whether a proposition is visible in an individual image, but whether its value is identifiable from the complete trace.

Now let $\mathcal{D} = \{(\mathbf{z}^{(i)}, \mathbf{a}^{(i)}, f^{(i)})\}_{i=1}^N$ be a dataset of visual traces of a planning instance I . The action model AM as well as the perception model $p_{\theta}(S_1 | z_1)$ and emission model $p_{\theta}(z_i | S_i)$ can be jointly learned from $\mathcal{D}$ by maximising the conditional log-likelihood of the dataset $\mathcal{D}$, i.e.

$$\log p_{\theta}(\mathcal{D} | Z_1, \mathbf{A}) = \sum_{i=1}^N \log p_{\theta}(\mathbf{z}_{2:T}^{(i)}, f^{(i)} | z_1^{(i)}, \mathbf{a}^{(i)}). \quad (4)$$

Because the symbolic states are hidden, the likelihood $p_{\theta}(\mathbf{z}_{2:T}^{(i)}, f^{(i)} | z_1^{(i)}, \mathbf{a}^{(i)})$ of a single data point requires a marginalisation over ground symbolic states

$$\sum_{\mathbf{s} \in 2^{\mathcal{P}_I}} p_{\theta}(\mathbf{s}, \mathbf{z}_{2:T}^{(i)}, f^{(i)} | z_1^{(i)}, \mathbf{a}^{(i)}) \\ = \mathbb{E}_{p_{\theta}(\mathbf{S} | z_1^{(i)}, \mathbf{a}^{(i)})} [p_{\theta}(\mathbf{z}_{2:T}^{(i)}, f^{(i)} | \mathbf{S}, z_1^{(i)}, \mathbf{a}^{(i)})] \quad (5)$$

This marginalisation is generally intractable as the state space $2^{\mathcal{P}_I}$ of even a single symbolic state s_i is combinatorially large and the data likelihood $p_{\theta}(\mathbf{z}_{2:T}^{(i)}, f^{(i)} | \mathbf{S}, z_1^{(i)}, \mathbf{a}^{(i)})$ depends on the full symbolic state $\mathbf{S}_t$. The intractability is the reason for introducing approximations.

4 Action-Model Learning with Relational Neurosymbolic Markov Models

At a high-level, the probabilistic graphical model of action model learning (Figure 1) is directly captured by NeSyMMs as it is a Markov model over symbolic states with subsymbolic observations. The crucial point lies in how to model the transitions $p_{\theta_{AM}}(S_{t+1} | S_t, a_t)$. Here, we incorporate the probabilistic action model (PAM) of Xi, Gould, and Thiébaux (2024) into a NeSyMM according to STRIPS.

Action-Conditioned probabilistic transitions Given a symbolic state $s_t \in \mathcal{P}_I$ and an input ground action a_t , the PAM module outputs the joint distribution $p_{\theta_{AM}}(\mathbf{R}_t | a_t)$ over roles $\mathbf{R}_t$ of every ground predicate $p \in \mathcal{P}_I$ (Equation 1) at time t . It specifies for every predicate what the probability is of that predicate taking a certain role with respect to the action a_t . For instance, the predicate *holding(A)* should have a high probability for the role *add* given the action *pick-up(A)*.

The goal of this section is to describe how to exactly compute the action-conditioned probabilistic transitions $p_{\theta_{AM}}(S_{t+1} | s_t, a_t)$ that follow from combining the PAM predictions $p_{\theta_{AM}}(\mathbf{R} | a_t s)$ with the semantics of STRIPS. The main difficulty lies in enforcing that the semantics of STRIPS are not violated. For instance, not every

role $r_{t,p}$ can be applied to every current state $s_{t,p}$. The combination $r_{t,p} = \text{DEL}$ and $s_{t,p} = 0$ (false) is not allowed since the role DEL means that the predicate is both a precondition and it is deleted; if $s_{t,p}$ is false, it can not be a precondition. To make this modeling detail explicit, let φ be the constraint

$$\neg(s_{t,p} = 0 \wedge r_{t,p} = \text{PRE}) \quad (6)$$

$$\wedge \neg(s_{t,p} = 0 \wedge r_{t,p} = \text{DEL}) \quad (7)$$

$$\wedge \neg(s_{t,p} = 1 \wedge r_{t,p} = \text{ADD}) \quad (8)$$

imposed by STRIPS on every tuple $(r_{t,p}, s_{t,p})$. The first line says that predicate p can not be a prevail condition PRE if it is currently false. The second expresses that p has to be true to be a deleted precondition DEL . Both follow from the STRIPS semantics and the definitions of PRE and DEL . The third adds the non-standard constraint that true predicates can not be added by ADD . The latter is introduced on top of the usual STRIPS constraints in order to avoid reasoning shortcuts (Marconato et al. 2023), which was tackled by Xi, Gould, and Thiébaux (2024) by adding an additional losses. Here, we build the constraint into the transitions. $p(S_{t+1} \mid s_t, a_t, \varphi)$. To do so, we start by marginalising out the roles $\mathbf{r}_t$

$$p(S_{t+1} \mid s_t, a_t, \varphi) = \sum_{\mathbf{r}_t} p(S_{t+1}, \mathbf{r}_t \mid s_t, a_t, \varphi), \quad (9)$$

and apply Bayes' rule to rewrite each summand as

$$\begin{aligned} & p(S_{t+1}, \mathbf{r}_t \mid s_t, a_t, \varphi) \\ &= \frac{p(S_{t+1}, \mathbf{r}_t \mid s_t, a_t) p(\varphi \mid s_t, a_t, \mathbf{r}_t, S_{t+1})}{p(\varphi \mid s_t, a_t)} \end{aligned} \quad (10)$$

$$= \frac{p(S_{t+1}, \mathbf{r}_t \mid s_t, a_t) p(\varphi \mid s_t, \mathbf{r}_t)}{\sum_{s_{t+1}} \sum_{\mathbf{r}'_t} p(S_{t+1}, \mathbf{r}'_t \mid s_t, a_t) p(\varphi \mid s_t, \mathbf{r}'_t)}. \quad (11)$$

The joint $p(S_{t+1}, \mathbf{r}_t \mid s_t, a_t)$ factorises as

$$p(S_{t+1} \mid \mathbf{r}_t, s_t) p(\mathbf{r}_t \mid a_t) \quad (12)$$

since $(S_{t+1} \perp\!\!\!\perp a_t \mid \mathbf{r}_t)$ and $(\mathbf{r}_t \perp\!\!\!\perp s_t \mid a_t)$. Once a role $\mathbf{r}_t$ is assigned to each predicate in the symbolic state s_t for the action a_t , the next state transition $p(S_{t+1} \mid \mathbf{r}_t, s_t)$ is determined deterministically according to the STRIPS semantics. To be precise, the role $r_{t,p}$ of each predicate $p \in \mathcal{P}_I$ only depends on and affects the predicate p , i.e. $\forall p \neq q \in \mathcal{P}_I : (s_{t+1,p} \perp\!\!\!\perp s_{t+1,q} \mid r_{t,p}, s_{t,p})$, such that

$$p(S_{t+1} \mid r_{t,p}, s_t) = \prod_{p \in \mathcal{P}_I} p(S_{t+1,p} \mid r_{t,p}, s_{t,p}), \quad (13)$$

with $s_{t,p} \in \mathcal{P}_I$ being the component of the state s_t corresponding to the predicate p at time t . If $r_{t,p}(s_{t,p}) \in \mathcal{P}_I$ denotes the successor state obtained by applying role $r_{t,p}$ to $s_{t,p}$, then the unconditional transitions are deterministic functions, i.e. $p(S_{t+1,p} \mid r_{t,p}, s_{t,p}) = \mathbb{1}_{S_{t+1,p}=r_{t,p}(s_{t,p})}$. Together with the factorisation of $p(\mathbf{r}_t \mid a_t)$ (Equation 1), Equation 12 reduces to

$$\prod_{p \in \mathcal{P}_I} \mathbb{1}_{S_{t+1,p}=r_{t,p}(s_{t,p})} p_{\theta_{\text{AM}}}(r_{t,p} \mid a_t). \quad (14)$$

The constraint factor $p(\varphi \mid s_t, \mathbf{r}_t)$ in Equation 11 similarly factorises over predicates

$$p(\varphi \mid s_t, \mathbf{r}_t) = \prod_{p \in \mathcal{P}_I} \mathbb{1}_{\varphi(s_{t,p}, r_{t,p})}, \quad (15)$$

so that Equation 11 also transitions predicate-wise

$$p(S_{t+1} \mid s_t, a_t, \varphi) = \prod_{\mathcal{P}_I} \frac{\sum_{r_{t,p}} \mathbb{1}_{S_{t+1,p}=r_{t,p}(s_{t,p})} \mathbb{1}_{\varphi(s_{t,p}, r_{t,p})} p_{\theta_{\text{AM}}}(r_{t,p} \mid a_t)}{\sum_{s_{t+1,p}, r'_{t,p}} \mathbb{1}_{s_{t+1,p}=r'_{t,p}(s_{t,p})} \mathbb{1}_{\varphi(s_{t,p}, r'_{t,p})} p_{\theta_{\text{AM}}}(r'_{t,p} \mid a_t)} \quad (16)$$

In summary, the constrained transition function $p_{\theta_{\text{AM}}}(S_{t+1} \mid s_t, a_t, \varphi)$ factorises over predicates $\prod_{p \in \mathcal{P}_I} p_{\theta_{\text{AM}}}(S_{t+1,p} \mid s_{t,p}, a_{t,p}, \varphi)$ where every factor can be explicitly written in terms of the PAM probabilities as

$$\begin{aligned} & p_{\theta_{\text{AM}}}^{S_{t+1,p}}(1 \mid s_{t,p}, a_t, \varphi) \\ &= \begin{cases} p_{\Lambda}/(p_{\Lambda} + p_{\text{N}}) & \text{if } s_t = 0, \\ (p_{\text{N}} + p_{\text{P}})/(p_{\text{N}} + p_{\text{P}} + p_{\text{D}}) & \text{if } s_t = 1, \end{cases} \end{aligned} \quad (17)$$

for role probabilities $p_{\text{N}}, p_{\text{P}}, p_{\Lambda}$ and p_{D} corresponding to $r_{t,p}$.

This discussion fully specifies how NeSyAM models and computes the probabilistic transitions that arise when using a PAM together with the formal Boolean semantics of STRIPS. It is one of the key factors that differentiate NeSyAM from the state of the art that relies on a fuzzy approximation of STRIPS. Another key differentiating factor of NeSyAM is its sampling-based approximation outlined in the next section.

Approximate action model learning with sampling Although the action model transition $p_{\theta_{\text{AM}}}(S_{t+1} \mid s_t, a_t, \varphi)$ factorises over predicates, exact maximum likelihood maximisation (Equation 4) remains intractable due to the emission model $p_{\theta}(z_t \mid S_t)$ generally depending on the full state S_t . Hence, we propose two ways to optimise NeSyAM: (1) approximate maximum likelihood and (2) a variational approximation of the posterior $p_{\theta}(\mathbf{S} \mid \mathbf{z}, f, \mathbf{a}, \varphi)$. Both approaches rely on NeSyAM's ability to sample differentiable symbolic trajectories from $p_{\theta}(\mathbf{S} \mid z_1, \mathbf{a})$ inherited from the underlying NeSyMM model (De Smet et al. 2025). Intuitively, NeSyAM samples trajectories from the full joint distribution $p_{\theta}(\mathbf{S} \mid z_1, \mathbf{a}, \varphi)$ to infer and optimise Equation 4. It first draws N initial state samples $s_1^{(n)}$ from the predicted belief $p_{\theta}(S_1 \mid z_1)$. Then, it repeatedly computes $p_{\theta}(S_{t+1} \mid s_t^{(n)}, a_t, \varphi)$ (Equation 17) and $s_{t+1}^{(n)}$ until a full trajectory is sampled. The resulting trajectories $\{s^{(n)}\}_{n=1}^N$ are used in a Monte Carlo approximation of the maximum likelihood (Equation 4) with approximated gradients (Kool, van Hoof, and Welling 2019) (supplementary material)

Variational action model learning. Alternatively, we can substitute a variational family of approximations $q_{\lambda}(\mathbf{S} \mid z_1, \mathbf{a})$ into the ELBO (Equation 2) to target the posterior $p_{\theta}(\mathbf{S} \mid \mathbf{z}, f, \mathbf{a}, \varphi)$. The result is an ELBO for variational action model learning

$$\begin{aligned} & \sum_{i=1}^N \mathbb{E}_{q_{\lambda}(\mathbf{S} \mid z_1^{(i)}, \mathbf{a}^{(i)})} \left[\log p_{\theta}(\mathbf{z}_{2:T}^{(i)}, f^{(i)}, \varphi \mid \mathbf{S}, z_1^{(i)}) \right] \\ & - \text{KL} \left(q_{\lambda}(\mathbf{S} \mid z_1^{(i)}, \mathbf{a}^{(i)}) \parallel p_{\theta}(\mathbf{S} \mid z_1^{(i)}, \mathbf{a}^{(i)}, \varphi) \right), \end{aligned} \quad (18)$$

over a dataset of visual traces $\mathcal{D} = \{(\mathbf{z}^{(i)}, \mathbf{a}^{(i)}, f^{(i)})\}_{i=1}^N$. The default choice of $q_{\lambda}(\mathbf{S} \mid z_1, \mathbf{a})$ made by NeSyAM is to

use the parametrised prior, i.e.

$$q_{\lambda}(\mathcal{S} \mid z_1, \mathbf{a}) = p_{\theta}(\mathcal{S} \mid z_1, \mathbf{a}, \varphi), \quad (19)$$

which simplifies the ELBO to the expected log-likelihood

$$\sum_{i=1}^N \mathbb{E}_{p_{\theta}(\mathcal{S} \mid z_1^{(i)}, \mathbf{a}^{(i)}, \varphi)} \left[\log p_{\theta}(z_{2:T}^{(i)}, f^{(i)} \mid \mathcal{S}, z_1^{(i)}) \right]. \quad (20)$$

The variational perspective on action model learning (Equation 18) will be used to theoretically compare NeSyAM to ROSAME-I, the state-of-the-art action model learner of Xi, Gould, and Thiébaux (2024).

5 Related work with a variational flavour

Action-model learning has been studied in both stochastic and deterministic planning settings (Pasula, Zettlemoyer, and Kaelbling 2007; Aineto, Celorrio, and Onaindia 2019). Early and classical approaches learn from plan examples, noisy traces, or action traces using weighted MAX-SAT, logical inference, or relational model acquisition (Yang, Wu, and Jiang 2007; Zhuo et al. 2010; Zhuo and Kambhampati 2013; Cresswell, McCluskey, and West 2009, 2013). More recent work studies stronger formal guarantees, partial observability, noisy observations, missing action parameters, and lifted partial traces (Le, Juba, and Stern 2024; Lamanna and Serafini 2024; Aineto and Scala 2024; Balyo et al. 2024; Lamanna et al. 2025). These methods operate primarily over symbolic traces, while our setting requires visual traces.

Planning from images and representation learning for planning have explored how latent or symbolic representations can support planning (Asai et al. 2022; Konidaris, Kaelbling, and Lozano-Perez 2018). Xi, Gould, and Thiébaux (2026) address the problem of removing action supervision, with fully observed images, initial and final states, which is orthogonal to the partial state observability studied here. Closer to our observability setting, Jin et al. (2022) learn latent transition models from partially observed images without a declarative action model, and Zhu et al. (2025) induce action semantics with large language models in interactive, partially observed visual environments. None learn lifted probabilistic action models from offline visual traces with images that underdetermine the symbolic state.

Our probabilistic framing builds on hidden Markov models and probabilistic graphical models (Koller and Friedman 2009). Neurosymbolic AI combines neural perception with symbolic structure (De Raedt et al. 2016; Marra et al. 2024), which NeSyMMs extend to sequential probabilistic models (De Smet et al. 2025). NeSyAM adapts NeSyMMs to the problem of action-model learning from visual traces.

The current state of the art in neurosymbolic learning from visual traces, ROSAME-I, approximates a mean-field variational approach to action model learning. ROSAME-I relaxes the underlying model (Figure 1) in two immediate ways. First, it uses a fuzzy relaxation of the unconstrained transition function $p_{\theta_{AM}}(S_{t+1} \mid S_t, a_t)$, while the true model, and our approximation, computes the exact constrained transition function $p_{\theta_{AM}}(S_{t+1} \mid S_t, a_t, \varphi)$. Second, it removes the emission model $p_{\theta}(z_t \mid S_t)$ and, consequently, the maximisation of the likelihood of the images z . Instead, all images are used as inputs to the perception model $p_{\theta}(S_t \mid z_t)$ to form a “transition” loss function that compares the state transitions

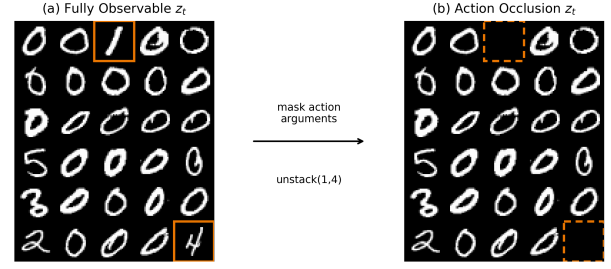


Figure 2: Action Occlusion in grid-based Blocks World. For *unstack(1,4)*, solid boxes mark the action arguments in the Fully observable case (O1) (left), while dashed boxes mark their masked locations under Action occlusion (O3) (right).

according to the relaxed $p_{\theta_{AM}}(S_{t+1} \mid S_t, a_t)$ with the perception’s predictions. A separate fuzzy “applicability” loss is then added to promote adherence to the STRIPS constraints φ , as well as a supervision loss for the final state S_T . While ROSAME-I does not frame itself as a variational approach, we can recover the foundational quantities underlying the losses by substituting the mean-field approximation $q_{\lambda}(\mathcal{S}) = \prod_{t=1}^T p_{\theta}(S_t \mid z_t)$ into the general action model learning ELBO (Equation 18) without emission likelihoods:

$$\sum_{i=1}^N \mathbb{E}_{p_{\theta}(S_T \mid z_T^{(i)})} \left[\log p_{\theta}(f^{(i)} \mid S_T, z_1^{(i)}) \right] + \mathbb{E}_{q_{\lambda}(\mathcal{S})} [\log p(\varphi \mid \mathcal{S})] - \sum_{t=1}^{T-1} \mathbb{E}_{p_{\theta}(S_t \mid z_t^{(i)})} \left[\text{KL} \left(p_{\theta}(S_{t+1} \mid z_{t+1}^{(i)}) \parallel p_{\theta_{AM}}(S_{t+1} \mid s_t) \right) \right], \quad (21)$$

where we have left out the dependency of $p_{\theta}(S_{t+1} \mid S_t)$ on $z_1^{(i)}$ and $\mathbf{a}^{(i)}$ on the final line for brevity. The three terms provide theoretical justification for the supervision loss, applicability loss and transition loss, respectively. It also shows why ROSAME-I is not expected to work well in partial observable environments; if the images z_i are incomplete or noisy, then each pairwise term in the transition loss only enforces local consistency on the noisy predictions from $p_{\theta}(S_t \mid z_t)$. In contrast, NeSyAM approximations explicitly model the sequential dependencies between the states S_t and aim to incorporate the observed images z and final state f (Equation 20). Hence, it can remain coherent, albeit more uncertain, if some images z_t are not observed or only contains partial information about the state S_t . This perspective gives a theoretical reason why NeSyAM improves upon ROSAME-I under partial observability that we empirically confirm next.

6 Experiments

Our experiments aim to answer the following questions.

(Q1) How do NeSyAM and ROSAME-I compare in lifted action-model recovery under partial observability?

(Q2) How does learning NeSyAM and ROSAME-I scale as the grounded planning problem grows?

(Q3) How does the number of sampled trajectories affect NeSyAM’s action-model recovery and training time?

Domains, data and modeling Following the setup of Xi, Gould, and Thiébaux (2024), we evaluate both methods

Domain	Method	$ C / C_{\text{rel}} $	Fully observed (All/Rel.)	Random occlusion (All/Rel.)	Action occlusion (All/Rel.)
Blocks World (grid world)	NeSyAM	26/18	$19.33 \pm 0.58 / \mathbf{18.00} \pm 0.00$	$\mathbf{20.00} \pm 0.00 / \mathbf{18.00} \pm 0.00$	$\mathbf{19.67} \pm 0.58 / \mathbf{18.00} \pm 0.00$
	ROSAME-I	26/18	$\mathbf{26.00} \pm 0.00 / \mathbf{18.00} \pm 0.00$	$15.67 \pm 3.06 / 7.67 \pm 3.06$	$18.33 \pm 2.89 / 10.33 \pm 2.89$
Gripper	NeSyAM	10/10	$\mathbf{10.00} \pm 0.00 / \mathbf{10.00} \pm 0.00$	$\mathbf{10.00} \pm 0.00 / \mathbf{10.00} \pm 0.00$	$\mathbf{10.00} \pm 0.00 / \mathbf{10.00} \pm 0.00$
	ROSAME-I	10/10	$\mathbf{10.00} \pm 0.00 / \mathbf{10.00} \pm 0.00$	$9.00 \pm 0.00 / 9.00 \pm 0.00$	$6.00 \pm 0.00 / 6.00 \pm 0.00$
Logistics	NeSyAM	18/18	$\mathbf{18.00} \pm 0.00 / \mathbf{18.00} \pm 0.00$	$\mathbf{17.00} \pm 1.73 / \mathbf{17.00} \pm 1.73$	$\mathbf{17.33} \pm 0.58 / \mathbf{17.33} \pm 0.58$
	ROSAME-I	18/18	$17.67 \pm 0.58 / 17.67 \pm 0.58$	$16.00 \pm 0.00 / 16.00 \pm 0.00$	$14.33 \pm 0.58 / 14.33 \pm 0.58$
Blocks World (synthesized)	NeSyAM	26/18	$19.33 \pm 0.58 / \mathbf{18.00} \pm 0.00$	$\mathbf{19.67} \pm 0.58 / \mathbf{18.00} \pm 0.00$	$19.00 \pm 0.00 / \mathbf{18.00} \pm 0.00$
	ROSAME-I	26/18	$\mathbf{26.00} \pm 0.00 / \mathbf{18.00} \pm 0.00$	$17.00 \pm 4.00 / 9.00 \pm 4.00$	$\mathbf{22.67} \pm 5.77 / 14.67 \pm 5.77$
Hanoi	NeSyAM	15/6	$8.33 \pm 0.58 / \mathbf{6.00} \pm 0.00$	$8.00 \pm 0.00 / \mathbf{6.00} \pm 0.00$	$7.67 \pm 0.58 / \mathbf{6.00} \pm 0.00$
	ROSAME-I	15/6	$\mathbf{12.67} \pm 2.08 / 4.33 \pm 1.53$	$\mathbf{12.67} \pm 2.08 / 4.33 \pm 1.53$	$\mathbf{13.00} \pm 1.73 / 4.67 \pm 1.15$
8-Puzzle	NeSyAM	96/20	$43.33 \pm 1.53 / \mathbf{20.00} \pm 0.00$	$\mathbf{50.00} \pm 3.46 / \mathbf{19.33} \pm 1.15$	$40.00 \pm 4.58 / \mathbf{20.00} \pm 0.00$
	ROSAME-I	96/20	$\mathbf{91.00} \pm 1.73 / 19.00 \pm 1.73$	$37.33 \pm 9.24 / 15.33 \pm 1.15$	$\mathbf{52.67} \pm 4.04 / 18.00 \pm 3.46$
Total recovery	NeSyAM	191/90	$118.33 \pm 1.53 / \mathbf{90.00} \pm 0.00$	$\mathbf{124.67} \pm 2.52 / \mathbf{88.33} \pm 2.89$	$113.67 \pm 3.21 / \mathbf{89.33} \pm 0.58$
	ROSAME-I	191/90	$\mathbf{183.33} \pm 4.04 / 87.00 \pm 3.61$	$107.67 \pm 2.52 / 61.33 \pm 8.14$	$\mathbf{127.00} \pm 6.56 / 68.00 \pm 13.00$

Table 1: Combined lifted action-model evaluation across observation regimes. Each entry reports the mean number of correctly assigned roles $\pm$ standard deviation over three seeds. The candidate-count column reports $|C|$ and $|C_{\text{rel}}|$. The highest mean is highlighted in bold for each evaluation scope with ties all highlighted.

on six visual planning domains: grid-based Blocks World (720/80 training/test traces), Gripper (900/100), Logistics (2250/250), synthesized-image Blocks World (100/100), Towers of Hanoi (70/100), and 8-Puzzle (300/100). Traces contain ten actions in both Blocks World domains and Logistics, and five actions otherwise. Both NeSyAM and ROSAME-I use identical PAM modules and perception models, while NeSyAM uses a neural emission model (supplementary material). NeSyAM maximises the approximate maximum likelihood objective and ROSAME-I utilises its originally proposed losses (hyperparameters in supplementary material).

Observation regimes We evaluate each domain under three observation regimes. **(O1) Fully observable** leaves all observations unchanged, **(O2) Random occlusion** randomly masks selected regions of each non-initial observation and **(O3) Action-occlusion** masks action-relevant regions based on the executed action or its visual effect (Figure 2). Both occlusion regimes keep maintain fully observed initial observations and final-state descriptions.

Action-model evaluation and evaluation scope For each action schema, we test whether a type-compatible predicate template is assigned its correct role by comparing the role with highest probability to the ground truth role. Two complementary scores are reported corresponding to different subsets of action-predicate pairs of interest. On the one hand, the full-candidate subset C includes every type-compatible action-predicate pair and therefore penalizes false positives on predicates not involved in an action. On the other hand, the relevant-role subset C_{rel} includes only pairs whose reference role is PRE, ADD, or DEL. It measures recovery of the predicates defining an action but ignores false positives among action-predicate pairs with NOT-INVOLVED as reference role.

A1: NeSyAM is robust to partial observations Table 1 shows action model recovery across all domains and observa-

tions regimes. Each entry reports full-candidate followed by relevant-role recovery, with cross-domain totals in the final rows. NeSyAM recovers 90.00 of 90 relevant roles in the fully observable case **(O1)**, 88.33 under Random occlusion **(O2)**, and 89.33 under Action occlusion **(O3)**. ROSAME-I instead declines from 87.00 to 61.33 and 68.00, respectively. Hence, NeSyAM outperforms ROSAME-I in every domain under both occlusion regimes in terms of relevant-role predicates. Both methods recover slightly more relevant roles under Action occlusion **(O3)** than Random occlusion **(O2)**, likely because the action-occluded masks reveal the action arguments and provide indirect supervision. Conversely, full-candidate recovery yields a mixed comparison. NeSyAM delivers relatively consistent scores across observation regimes and performs better under Random occlusion **(O2)**, but ROSAME-I outperforms NeSyAM under full observability **(O1)** and Action occlusion **(O3)**. In conclusion, NeSyAM performs significantly better on relevant role recovery under partial observability, but can be less accurate on NOT-INVOLVED roles.

A2: NeSyAM maintains action-model recovery as grounding grows We evaluate NeSyAM and ROSAME-I on Blocks World with an increasing number of blocks from five to eight under full observability **(O1)** (Table 2). As the number of blocks increases, the number of ground atoms, e.g. clear(1) and on(1,2), grows from 36 to 81. The number of ground actions grows from 50 to 128, while the action model remains unchanged as it is lifted. While ROSAME-I performs better when training at the default number of five blocks on full candidate recovery, NeSyAM provides stable full candidate recovery across all block numbers that surpasses ROSAME-I’s recovery from 7 blocks onwards. In fact, ROSAME-I degrades significantly in both full candidate and relevant-role recovery as the number of blocks increases. The decrease is mainly driven by an increasing number of mistakes on relevant-role recovery. In contrast, NeSyAM’s main-

Size	Method	Fully observed (All/Rel.)	Time (s)
5	NeSyAM	19.33 $\pm$ 0.58 / 18.00 $\pm$ 0.00	1887.94
	ROSAME-I	26.00 $\pm$ 0.00 / 18.00 $\pm$ 0.00	1473.62
6	NeSyAM	19.33 $\pm$ 0.58 / 18.00 $\pm$ 0.00	2289.39
	ROSAME-I	19.00 $\pm$ 0.00 / 11.00 $\pm$ 0.00	1499.36
7	NeSyAM	19.67 $\pm$ 0.58 / 18.00 $\pm$ 0.00	2817.42
	ROSAME-I	16.00 $\pm$ 0.00 / 8.00 $\pm$ 0.00	1711.72
8	NeSyAM	19.00 $\pm$ 0.00 / 18.00 $\pm$ 0.00	3352.89
	ROSAME-I	15.67 $\pm$ 0.58 / 7.67 $\pm$ 0.58	1856.98

Table 2: Scalability in Blocks World under full observability. Entries report the mean number of correctly recovered roles $\pm$ standard deviation across three seeds. Time is the mean training time in seconds across the same seeds.

N	Recovery (All/Rel.)	True-role probability (%)	Time (s)
2	20.00 $\pm$ 0.00 / 18.00 $\pm$ 0.00	69.85 $\pm$ 0.75	1180.18
8	19.33 $\pm$ 0.58 / 18.00 $\pm$ 0.00	67.01 $\pm$ 2.13	1212.52
32	19.67 $\pm$ 0.58 / 18.00 $\pm$ 0.00	68.38 $\pm$ 2.30	1203.42
128	19.67 $\pm$ 0.58 / 18.00 $\pm$ 0.00	68.70 $\pm$ 2.60	1963.48
256	19.33 $\pm$ 0.58 / 18.00 $\pm$ 0.00	67.70 $\pm$ 2.29	2951.03

Table 3: Effect of the number of sampled trajectories K on NeSyAM in five-block Blocks World under Action-Conditioned Occlusion. Recovery is the mean number of correctly recovered roles $\pm$ standard deviation across three seeds. True-role probability is the mean probability assigned to the reference roles, and Time is the mean training time in seconds.

tains fully correct relevant-role predictions across all domain sizes, as well as maintain its performance on full candidate predictions. NeSyAM thus better preserves action-model recovery as grounding grows, but its training time increases more sharply from 1887.94 to 3352.89 seconds, compared to 1473.62 to 1856.98 seconds for ROSAME-I.

A3: Sampling more trajectories increases cost without improving recovery We vary the training sampling budget $N \in \{2, 8, 32, 128, 256\}$ for NeSyAM on five-block Blocks World under Action Occlusion (O3). Evaluation does use 256 samples, keeping all other settings fixed. Table 3 shows that NeSyAM recovers all 18 relevant roles for every N , while full-candidate recovery remains between 19.33 and 20.00. True-role probability also shows no consistent improvement, ranging from 67.01% to 69.85%. Interestingly, $N = 2$ achieves the highest mean recovery and true-role probability with the lowest training time. Training time remains similar through $N = 32$ but rises to 1963.48 seconds at $N = 128$ and 2951.03 seconds at $N = 256$. Thus, two samples are sufficient for learning in this setting and larger budgets increase cost without improving recovery.

Discussion The results show that NeSyAM and ROSAME-I have different error profiles. NeSyAM recovers nearly all relevant relations and remains stable under both occlu-

sion regimes, whereas ROSAME-I is more accurate on NOT-INVOLVED roles. NeSyAM’s advantage should therefore be understood as stronger preservation of action-defining predicates rather than uniformly better action-model recovery. ROSAME-I’s relatively strong performance under Action occlusion may partly arise because the action-occluded masks reveal action arguments and provide indirect supervision.

7 Limitations

NeSyAM’s errors are mainly given by false positives among NOT-INVOLVED cases, which reflects an identifiability limitation of learning from positive traces. Positive traces show which predicates hold when an action was successfully executed, but not which predicates were required. If a predicate is true before every execution and remains true afterward, both PRE and NOT-INVOLVED explain the transition equally well. Without additional evidence or prior preference, these roles cannot be distinguished and so form a so-called reasoning shortcut (Marconato et al. 2023). ROSAME-I resolves the identifiability problem using a loss encoding an explicit bias for PRE conditions, whereas NeSyAM deliberately relies only on trace evidence. False-positive preconditions can make the learned action model overly restrictive, while false-positive effects can produce incorrect successor states. Future work could address this ambiguity through a minimality assumption, i.e. a prior preference, towards NOT-INVOLVED or through traces in which uninvolved predicates are sometimes false when the action is executed. Such traces would allow the observations to distinguish the two roles.

8 Conclusion

This paper presents NeSyAM, a probabilistic solution to the action model learning problem. NeSyAM integrates probabilistic predicate effects for any given action with the semantics of STRIPS into a relational neurosymbolic Markov model. It uses end-to-end differentiable sampling for either maximum likelihood or variational inference approximations to learn action models. The samples of NeSyAM represent fully consistent trajectories over time that adhere to the rules of STRIPS. This consistency over time is the main reason why NeSyAM can deal with partial observability where the state of the art struggles, as shown theoretically by viewing action model learning through the lens of variational inference. Empirically, across six domains and three observation regimes, NeSyAM preserves relevant-role recovery more consistently than ROSAME-I under occlusion, although false positives on NOT-INVOLVED roles remain a limitation.

References

- Aineto, D.; Celorrio, S. J.; and Onaindia, E. 2019. Learning action models with minimal observability. *Artificial Intelligence*, 275: 104–137.
- Aineto, D.; and Scala, E. 2024. Action Model Learning with Guarantees. In *Proceedings of the 21st International Conference on Principles of Knowledge Representation and Reasoning*, 801–811.

- Asai, M.; Kajino, H.; Fukunaga, A.; and Muise, C. 2022. Classical Planning in Deep Latent Space. *Journal of Artificial Intelligence Research*, 74: 1599–1686.
- Bäckström, C.; and Nebel, B. 1995. Complexity results for SAS+ planning. *Computational Intelligence*, 11(4): 625–655.
- Balyo, T.; Suda, M.; Chrupa, L.; Šafránek, D.; Gocht, S.; Dvořák, F.; Barták, R.; and Youngblood, G. M. 2024. Planning Domain Model Acquisition from State Traces without Action Parameters. In *Proceedings of the International Conference on Principles of Knowledge Representation and Reasoning*, volume 21, 812–822.
- Blei, D. M.; Kucukelbir, A.; and McAuliffe, J. D. 2017. Variational inference: A review for statisticians. *Journal of the American statistical Association*, 112(518): 859–877.
- Cresswell, S.; McCluskey, T.; and West, M. 2009. Acquisition of object-centred domain models from planning examples. In *Proceedings of the International Conference on Automated Planning and Scheduling*, volume 19, 338–341.
- Cresswell, S. N.; McCluskey, T. L.; and West, M. M. 2013. Acquiring planning domain models using LOCM. *The Knowledge Engineering Review*, 28(2): 195–213.
- De Raedt, L.; Kersting, K.; Natarajan, S.; and Poole, D. 2016. *Statistical relational artificial intelligence: Logic, probability, and computation*. Morgan & Claypool Publishers.
- De Smet, L.; Venturato, G.; De Raedt, L.; and Marra, G. 2025. Relational Neurosymbolic Markov Models. In *Proceedings of the 39th AAAI Conference on Artificial Intelligence*, volume 39, 16181–16189.
- Fikes, R. E.; and Nilsson, N. J. 1971. STRIPS: A New Approach to the Application of Theorem Proving to Problem Solving. *Artificial Intelligence*, 2(3–4): 189–208.
- Ghallab, M.; Nau, D.; and Traverso, P. 2004. *Automated Planning: theory and practice*. Elsevier.
- Jin, K.; Xiao, Z.; Zhuo, H. H.; Wan, H.; and Cai, J. 2022. Learning Visual Planning Models from Partially Observed Images. *arXiv preprint arXiv:2211.15666*.
- Jordan, M. I.; Ghahramani, Z.; Jaakkola, T. S.; and Saul, L. K. 1999. An Introduction to Variational Methods for Graphical Models. *Machine Learning*, 37(2): 183–233.
- Koller, D.; and Friedman, N. 2009. *Probabilistic graphical models: principles and techniques*. MIT press.
- Konidaris, G.; Kaelbling, L. P.; and Lozano-Perez, T. 2018. From skills to symbols: Learning symbolic representations for abstract high-level planning. *Journal of Artificial Intelligence Research*, 61: 215–289.
- Kool, W.; van Hoof, H.; and Welling, M. 2019. Buy 4 reinforce samples, get a baseline for free! *ICLR Deep RL Meets Structured Prediction Workshop*.
- Lamanna, L.; and Serafini, L. 2024. Action model learning from noisy traces: a probabilistic approach. In *Proceedings of the International Conference on Automated Planning and Scheduling*, volume 34, 342–350.
- Lamanna, L.; Serafini, L.; Saetti, A.; Gerevini, A. E.; and Traverso, P. 2025. Lifted action models learning from partial traces. *Artificial Intelligence*, 339: 104256.
- Le, H. S.; Juba, B.; and Stern, R. 2024. Learning safe action models with partial observability. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, 20159–20167.
- Marconato, E.; Teso, S.; Vergari, A.; and Passerini, A. 2023. Not all neuro-symbolic concepts are created equal: Analysis and mitigation of reasoning shortcuts. *Advances in Neural Information Processing Systems*, 36: 72507–72539.
- Marra, G.; Dumančić, S.; Manhaeve, R.; and De Raedt, L. 2024. From statistical relational to neurosymbolic artificial intelligence: A survey. *Artificial Intelligence*, 328: 104062.
- Pasula, H. M.; Zettlemoyer, L. S.; and Kaelbling, L. P. 2007. Learning symbolic models of stochastic domains. *Journal of Artificial Intelligence Research*, 29: 309–352.
- Ranganath, R.; Gerrish, S.; and Blei, D. 2014. Black box variational inference. In *Artificial intelligence and statistics*, 814–822. PMLR.
- Xi, K.; Gould, S.; and Thiébaux, S. 2024. Neuro-symbolic learning of lifted action models from visual traces. In *Proceedings of the International Conference on Automated Planning and Scheduling*, volume 34, 653–662.
- Xi, K.; Gould, S.; and Thiebaux, S. 2026. Learning Lifted Action Models from Unsupervised Visual Traces. In *Proceedings of the International Conference on Automated Planning and Scheduling*, volume 36, 687–696.
- Yang, Q.; Wu, K.; and Jiang, Y. 2007. Learning action models from plan examples using weighted MAX-SAT. *Artificial Intelligence*, 171(2-3): 107–143.
- Zhu, W. B.; Chai, M.; Singh, I.; Jia, R.; and Thomason, J. 2025. PSALM-V: Automating Symbolic Planning in Interactive Visual Environments with Large Language Models. *arXiv preprint arXiv:2506.20097*.
- Zhuo, H. H.; and Kambhampati, S. 2013. Action-model acquisition from noisy plan traces. In *IJCAI*, 2444–2450.
- Zhuo, H. H.; Yang, Q.; Hu, D. H.; and Li, L. 2010. Learning complex action models with quantifiers and logical implications. *Artificial Intelligence*, 174(18): 1540–1569.