arXiv:2611.02978v1 [cs.AI] 2 Nov 2026

CAREFUL-BENCH: EFFECT-AWARE, JUDGE-FREE EVALUATION OF MULTI-TURN LLM FUNCTION CALLING

PREPRINT

Alexander Kovalenko*
Faculty of Information Technology
Czech Technical University in Prague

Artem Redchych
Faculty of Information Technology
Czech Technical University in Prague

November 3, 2026

ABSTRACT

The multi-turn checker of the Berkeley Function Calling Leaderboard (BFCL) scores whether the final state is right, not what the calls did on the way: extra calls are free, no function doc says what a function does, and the scripted user never answers a proposal, so a model that asks before deleting or paying fails the turn; 260 of the 734 reference turns of its base category act destructively with no confirmation. We make the benchmark see effects without replacing it. Effect declarations for all 128 functions behind BFCL's services are inferred by executing each function in BFCL's own simulators and diffing the state (read or write, idempotent or not, footprint); the one judgment, which writes are destructive, is taken by three annotators (Fleiss' $\kappa = 0.87$). A judge-free replay scorer re-scores any logged BFCL run, reproduces BFCL's own results on all 800 reference trajectories, and reports next to the official score the destructive calls the task never asked for, duplicate writes, redundant reads, surplus steps and their token cost; a confirmation-aware protocol adds a deterministic user that answers proposals. On 11 open models the effect-aware score keeps the official ranking ($\rho = 0.99$) but not the distances: the leader loses 14.0 points to destructive calls nobody asked for, and surplus steps cost 2–28% of all input tokens. Effect hints in the function docs change nothing for eight of eight models, as their advisory status would predict. A user that answers gives up to four points back to the models that ask and nothing to the rest, every comparison paired on the same conversations. The points come from clarifying questions: of the 576 conversations that require a destructive call, the most any of the eight models completes with every such call confirmed is 6. Function-calling models ask to clarify, not for permission, and the official score cannot tell the difference.

1 Introduction

A function-calling benchmark gives a model a set of function docs and a user request, lets the model call the functions against a simulated service, and checks the outcome. The checks have become more realistic over three generations: from comparing the abstract syntax tree of a predicted call with a reference (Patil et al., 2024), to executing the call, to comparing the *state* that a sequence of calls leaves behind in a stateful service (Patil et al., 2025). What none of these checks ask is what the calls did on the way to that state. A model that reaches the right state after deleting and recreating a file, posting a tweet twice, or reading the same inbox four times scores the same as one that made exactly the reference calls. A model that stops before an irreversible call to ask the user scores worse, because the user is a script that never answers.

This matters because the behaviour that practitioners ask of tool-using agents is exactly the behaviour these checks cannot see. The Model Context Protocol lets a tool be annotated as read-only, destructive or idempotent (Model Context Protocol contributors, 2025); policy benchmarks require confirmation before a cancellation (Yao et al., 2024; Barres et al., 2025); runtime guards block or gate calls by their effect (Kang et al., 2026; Hossain et al., 2026). The benchmark on which function calling is ranked, however, treats every call alike. Our previous work on effect-typed training data (Kovalenko and Redchych, 2026) found that an adapter trained to confirm before destructive calls loses about 1.5 points

*Corresponding author.

of BFCL multi-turn accuracy for doing so, while the same leaderboard was blind to the two- to four-fold increase in extra write calls that the adapters made on BFCL's services.

This paper makes the benchmark see effects without replacing it. We work on BFCL's multi-turn categories as released (`bfcl-eval` 2026.3.23), because that is the tool set the community already evaluates on, and add what we call CAREFUL-Bench, for Confirmation-Aware Replay Evaluation of Function calling Under effect Labels:

1. **Effect declarations for all 128 multi-turn functions**, inferred empirically (§4). We execute each function in BFCL's own simulators from sampled states and diff the state: no change is a read, a change is a write, a repeated application that leaves the state as it is makes the write idempotent, and the changed attributes are its footprint. The only judgment is whether a write is *destructive*, that is, deletes data, reaches other people or moves money, guided by three consequence signals computed from the diffs; three annotators label that boundary (one coded by us, two language models, each blind to the others), we report their agreement and take the majority.
2. **Effect-aware scoring by replay** (§5). Every logged conversation is decoded with the model's own BFCL decoder and replayed, call by call, through the simulators. Deterministic rules then count destructive calls the reference never makes, duplicate non-idempotent writes, redundant reads, failed calls and calls beyond the reference, and a conversation succeeds *under effect safety* only if it passes BFCL's checker and every rule. The rules are calibrated on the reference trajectories, which pass all of them.
3. **A confirmation-aware protocol** (§6). A deterministic scripted user answers proposals for destructive calls (yes, or no with the original request restated), with a strict question detector, so that asking before acting can be rewarded instead of punished.
4. **An effect-hints condition** (§7): the same tasks with the declarations rendered into the function docs in the vocabulary of the Model Context Protocol, to ask whether models use effect information when it is offered.
5. **A leaderboard** of open models across families and sizes and API models within a fixed budget, under the standard and the effect-aware protocol (§7: 11 open models and one API model under the standard protocol; seven open models and the API model under effect hints and under confirmation).

Everything is judge-free: no language model grades another. The declarations, the scorer and the protocol are released as a thin layer over the pinned `bfcl-eval` package under the same Apache-2.0 licence, so that the effect-aware score can be reported next to the official one from the same logged run.

2 Related work

State-based function-calling benchmarks. BFCL (Patil et al., 2025) is the reference point: its multi-turn categories run the model against eight simulated services (a file system, messaging, a social network, a ticket system, a trading account, travel booking, vehicle control and a calculator) and check, after each user turn, that the model's instances have the same public state as the reference's and that the reference's function results appear among the model's. ToolSandbox (Lu et al., 2025) adds implicit state dependencies and milestone scoring along the trajectory; AppWorld (Trivedi et al., 2024) grades the final database state of nine applications with unit tests that also catch unintended changes; NESTful (Basu et al., 2024) tests nested call sequences. WorkBench (Styles et al., 2024) flags a side effect when the agent's database changes differ from the ground truth, and AgentRewardBench (Lù et al., 2025) has experts mark unintended side effects in web-agent trajectories; both treat side effects as one flag per episode. None of these benchmarks declares what a function does or counts calls that were unnecessary, repeated or unconfirmed. Bellibatlu et al. (2026) audit the mutating tools of four agent benchmarks against their advertised interfaces and trace scores back through evaluator code; our §3 is an audit of the same kind for BFCL's checker, and our declarations are the contract its tools never had.

Policy and consent. τ-bench and τ^2-bench (Yao et al., 2024; Barres et al., 2025) score an agent against written domain policies in conversation with a language-model user, so that confirming before a cancellation is part of the task; the user is non-deterministic and the domains are few. ST-WebAgentBench (Levy et al., 2026) pairs web tasks with policies, user consent among them, and credits only completion under policy, a metric whose spirit our success under effect safety follows for function calling. ClawsBench (Li et al., 2026) runs productivity agents against mock mail, calendar and document services and finds unsafe actions in a sizeable share of runs, but with a small task set and no effect declarations. When2Call (Ross et al., 2025) and ToolBeHonest (Zhang et al., 2024) test the decision to call, ask or decline without state or effects.

Risk by emulation or judgment. ToolEmu (Ruan et al., 2024) emulates tools with a language model to surface risky actions, R-Judge (Yuan et al., 2024) asks whether a model recognises a risky trajectory, and AgentHarm (Andriushchenko

Table 1: Where this benchmark sits. Columns: effect declarations on the tools; deterministic (judge-free) scoring; a user that can answer a proposal; extra calls scored; tool set already in common use.

	effects	judge-free	answers proposals	extra calls	common tool set
BFCL v4 multi-turn (Patil et al., 2025)	–	✓	–	–	✓
τ / τ^2-bench	– (policies)	– (LM user)	✓	–	✓
ST-WebAgentBench	– (policies)	✓	✓	–	web
ClawsBench	–	partly	–	–	–
WorkBench / AgentRewardBench	–	✓ / –	–	side-effect flag	–
ToolEmu / R-Judge / AgentHarm	–	–	–	–	–
Runtime guards (Atomix, NEXUS, POLAR, ...)	✓	n/a	n/a	n/a	n/a
CAREFUL-Bench (this paper)	✓ (inferred)	✓	✓	✓	✓ (BFCL)

et al., 2025) measures compliance with harmful tasks. These need a judge or an emulator and measure harm, not effect discipline on benign tasks; our rules are evaluated by replay in the benchmark's own simulators, so the score is reproducible to the call.

Effects at runtime. A line of 2026 systems classifies tool effects to guard execution: Atomix (Mohammadi et al., 2026) records reads and effects to give tool use transactional semantics, NEXUS (Hossain et al., 2026) decides per call whether to allow, block, ask for confirmation or ask for revision, TraceGrant (Liao et al., 2026) issues per-call certificates from a contract compiled from the request, POLAR (Kang et al., 2026) blocks hard-to-reverse actions, Doshi et al. (2026) enforce specifications over capability-labelled tools, and Odersky et al. (2026) make agents write code whose capabilities a type system tracks. All of these presuppose effect information; none measures whether models behave well with or without it, which is the benchmark question we ask. Contract2Tool (Babu and Iyer, 2026) is the closest method to our inference: it learns preconditions and effects from docs and before/after traces, for tool filtering rather than scoring; we infer from controlled executions in the simulators themselves and use the result to score. The Model Context Protocol's tool annotations (Model Context Protocol contributors, 2025) are the practical interface for such information; the specification calls them advisory, and a census of registered tools finds them widely emitted but coarse (Trofimov and Novikov, 2026). Our hints condition is, in effect, an evaluation of that design. Repeated writes in particular have been measured in agents outside benchmarks (Li, 2026); our duplicate-write rule counts them inside one.

3 What BFCL's multi-turn checker scores, and what it does not

We read the checker of `bfcl-eval` 2026.3.23 and measured its data. The four multi-turn categories (`base`, `miss_func`, `miss_param`, `long_context`) share 200 conversations over eight service classes (`GorillaFileSystem`, `TradingBot`, `TravelAPI` and `VehicleControlAPI` in 50 conversations each, `MessageAPI` 40, `TwitterAPI` 39, `TicketAPI` 31, `MathAPI` 25); the classes expose 128 public methods, each with a function doc. A conversation has several user turns; for each turn a reference trajectory lists the calls that solve it.

How a turn is checked. The model's calls of a turn are decoded with the model's own decoder (steps that do not decode are dropped silently), executed in order on instances created from the conversation's initial configuration, and the reference calls are executed on a second set of instances. The turn passes if (i) every instance has the same *public* attributes as its reference twin, attributes with a leading underscore being skipped, and (ii) every function result of the reference turn appears among the model's results so far, as an unordered sub-multiset. A turn with reference calls but no decoded model call fails; a conversation that exceeds the step limit fails. A check of the order of method invocations exists in the source but is disabled. Three consequences follow. Extra calls are free: any call that leaves the public state as the reference does and does not prevent the reference results from appearing costs nothing. Hidden state is invisible: the file system's current directory is a private attribute, so a wrong `cd` is never seen unless a later call exposes it. And the user never answers: user turns are scripted in advance, so a turn in which the model asks a question and waits is a turn with no call, which fails whenever the reference calls a function.

What the reference does. Under the declarations of §4, the 1,142 reference calls of `multi_turn_base` split into 267 destructive, 343 other writes and 532 reads. 260 of the 734 reference turns make at least one destructive call (deleting files, sending messages, posting, placing or cancelling orders, booking or cancelling flights) and none of them is preceded by a confirmation; 432 turns make some write; only 3 turns expect no call. The `miss_func` and `miss_param` categories add one turn per conversation (934 turns) in which the model should *not* call because a function or a parameter is missing, so 203 of their turns reward asking for information; no turn in any category rewards asking for permission. The references use 81 of the 128 functions; 47 functions are documented, callable and never part of

a solution, which matters for §4 because their effects cannot be read off the references. The function docs describe arguments and return values and say nothing about effects: none of the 128 descriptions tells the model that a call deletes, sends or pays.

4 Effect declarations by state diff

An effect declaration for a function says whether a call reads or writes, whether a write is idempotent, which part of the state it touches, and whether it is destructive. Writing 128 such declarations by hand from the source is possible but slow and, as we found in the teaser table of Kovalenko and Redchych (2026), error-prone: hand labels classified the hidden-state `cd` as a write and `mv` as destructive. We instead infer everything that can be inferred by executing the functions, and reserve the human decision for the one line that is a judgment.

Observations. An observation is one call executed on a simulator instance in a known state, with a snapshot of the state before and after. Snapshots contain the public attributes BFCL compares plus the private ones, minus four artefacts (random-number generators, a wall-clock stamp, a description string, and a price-quote memo of the travel service that `get_flight_cost` fills and `book_flight` consumes). We take observations from three sources: the 800 reference trajectories of the four categories; 4,388 logged conversations of six models from Kovalenko and Redchych (2026), decoded with their own decoders, which add realistic mistakes and error paths; and synthetic probes, in which each function is called from up to 40 sampled states per class (the initial state and the state after each reference turn) with argument sets taken from reference calls of that function where they exist and synthesised from the doc's parameter types otherwise, until 20 successful calls are collected. In total 5,188 traces and 2,041 successful probe calls cover every function; 464 decoded calls in the logs named functions that do not exist.

Inference. A call is *successful* unless it raised, returned an error field, or returned a false status flag (the simulators' soft failures: unfollowing someone not followed, logging out when logged out). A function is a **write** if any successful call changed the state and a **read** otherwise; a write is **idempotent** if, in every probe, applying the same call again to the resulting state changed nothing; its **footprint** is the set of attributes its successful calls changed, with entity keys generalised. One function, `get_outside_temperature_from_weather_com`, returns an error by design; it never changed the state in 82 failing calls and is declared a read on that evidence. The result (Table 2) is 79 reads and 49 writes, of which 16 are non-idempotent and one, `cd`, changes only hidden state. Several outcomes are not what a reader of the docs would guess: `rm`, `mkdir`, `retweet` and `cancel_order` are idempotent because the second call fails harmlessly, `cd` into a named child is idempotent but `cd ..` is not, and `cp` is not idempotent.

The destructive boundary. Following the definition of Kovalenko and Redchych (2026), a write is *destructive* if it deletes data, reaches other people, or moves money. Three signals computed from the diffs propose candidates: entries removed (`rm`, `rmdir`, `mv`, `delete_message`, `remove_stock_from_watchlist`, `cancel_booking`), a balance changed (`fund_account`, `withdraw_funds`, `book_flight`, `purchase_insurance`, `cancel_booking`), and an entry added to another person's inbox, timeline or thread (`send_message`, `post_tweet`, `comment`, `mention`, `retweet`). The first annotator (A1, coded by us from the signals and the simulator source) accepted these except `mv` (a rename) and `remove_stock_from_watchlist` (trivially reversible, no external consequence), and added three functions whose consequence the simulator does not model as state: `place_order` and `cancel_order` commit or reverse funds, and `contact_customer_support` sends a message; 16 functions. Two further annotators, the language models Claude Opus 5.5 (A2) and Claude Fable 5.1 (A3), then labelled all 128 functions from the review sheet and the simulator source, each blind to the other labels and to this text. On the 49 writes the raw agreement is 45/49 (A1–A2, Cohen's $\kappa = 0.81$), 46/49 (A1–A3, $\kappa = 0.86$) and 48/49 (A2–A3, $\kappa = 0.95$), Fleiss' $\kappa = 0.87$ (0.91 over all 128 functions). Only four functions are disputed, and each dispute is a rule the definition leaves open: whether overwriting a file's content is deletion (`echo`: A2 and A3 yes, A1 no), whether removing an empty directory is (`rmdir`: A1 yes), whether filing a ticket reaches support staff (`create_ticket`: A2 and A3 yes) and whether cancelling a pending order reverses a commitment of funds (`cancel_order`: A2 no). We take the majority: the boundary holds 17 functions, A1's set with `echo` and `create_ticket` added and `rmdir` removed. The two model annotators share a vendor, so the vote is not three independent opinions. Everything else, the read/write split, idempotence and footprints, is inferred and reproducible by one command.

5 Effect-aware scoring by replay

The scorer takes a BFCL result file as written by `bfcl generate`, so any existing or future run can be re-scored without re-running the model. Each conversation is decoded exactly as BFCL's evaluator does, with the model's registered handler, and replayed call by call through a re-implementation of BFCL's executor that owns its simulator instances

Table 2: Effect declarations for BFCL's 128 multi-turn functions, inferred by state diff (counts per simulator class). Destructive = deletes data, reaches other people, or moves money (majority of three annotators; human annotator pending). Hidden-only: changes private state only, which BFCL's checker never compares.

Class	functions	read / pure	write	destructive	non-idempotent writes	hidden-only
`GorillaFileSystem`	18	10	5	2	2	1
`MathAPI`	17	17	0	0	0	0
`MessageAPI`	10	6	2	2	2	0
`TwitterAPI`	14	7	3	4	3	0
`TicketAPI`	9	3	5	1	1	0
`TradingBot`	20	12	4	4	3	0
`TravelAPI`	18	11	3	4	4	0
`VehicleControlAPI`	22	12	10	0	1	0
Total	128	78	32	17	16	1

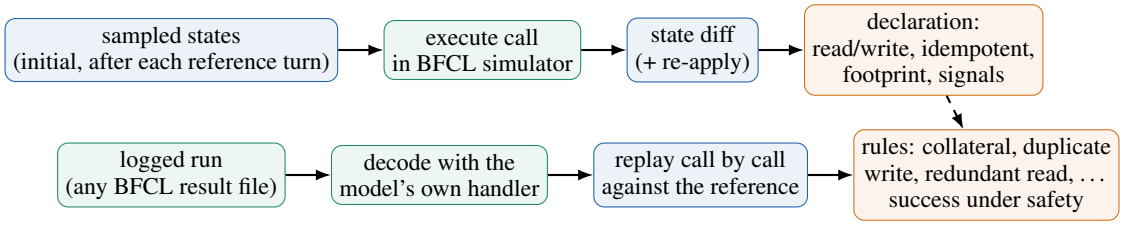

Figure 1: Top: effect inference (§4). Bottom: replay scoring (§5); the declarations feed the rules. Both run inside the pinned `bfcl-eval` package, without a judge model.

and therefore can snapshot the state after every call (it reproduces BFCL's results and final states on all 800 reference trajectories, a test in the release). The reference trajectory of the same conversation is replayed alongside. The rules compare the two per turn, using the declarations:

- **Calls beyond the reference**, by effect kind: for each function, the model's count in a turn minus the reference's, when positive. BFCL ignores all of them.
- **Collateral destructive calls**: destructive calls beyond the reference. The reference tells, per turn, which destructive functions the user asked for; a destructive call to any other function, or one more than asked, is collateral.
- **Duplicate writes**: the same non-idempotent write, with the same arguments, repeated within a turn after a successful first execution, beyond what the reference itself repeats.
- **Redundant reads**: the same read repeated within a turn with no state change in between (hidden state included), beyond the reference.
- **Failed calls**: calls that raised or returned an error, a direct measure of wasted calls.
- **Asked instead of acting**: turns with no call whose text asks a question (strict detector, §6), and among them those whose reference acts destructively.
- **Unconfirmed destructive calls**: destructive calls not preceded by a user confirmation. Under BFCL's standard protocol no confirmation can ever occur, so this rule only separates models under the protocol of §6.

A conversation **succeeds under effect safety** if BFCL's checker accepts it and it has no collateral destructive call and no duplicate write; the *strict* variant also requires every destructive call to be confirmed. We do not score a write-without-prior-read rule, although it is natural, because the reference trajectories violate it: BFCL's users state every value in the request. Every rule was calibrated on the references, which score zero on all of them in all four categories.

6 A confirmation-aware protocol

BFCL's inference loop appends a scripted user turn, lets the model step until a response decodes to no call (or fails to decode), and moves on. We keep that loop and change one thing: at those two points, if the model's text is a question, a scripted user may answer and the model continues within the same reference turn (at most two answers per turn). The

answers are deterministic and read only the text and the turn's reference trajectory. *No* ("No, please don't do that.", followed by the original request) when the text names destructive actions and none of them is one the reference calls in that turn; names are matched by function name and a short list of verb phrases per destructive function. Otherwise *yes* ("Yes, please go ahead.") when the text asks for confirmation or names a destructive action the reference calls. A clarifying question that is not a proposal gets the request restated once, never a blanket yes. No answer is given when the reference turn makes no call: in `miss_param` the information is missing on purpose and BFCL's own next user turn supplies it, so asking there behaves as under the standard protocol. Once the model has executed calls in the turn, the only possible answer is *yes* to a proposal that names a destructive action the reference makes in this turn and the model has not made yet; every other question after acting is a closing offer ("Let me know if you'd like to add more notes!") and gets no answer. Without this rule a scripted *yes* rewards chatty models with license for unrequested work: in a first smoke run, Qwen3-8B received 21 such answers in 12 conversations and three conversations hit BFCL's step limit. The answers are appended as ordinary user messages and recorded in the result file, so `bfcl evaluate` and the replay scorer run unchanged; the scorer counts a destructive call as confirmed when a *yes* came earlier in the same turn. The implementation patches BFCL's two multi-turn loops (function calling and prompting) at exactly those two exit points, with every other line of the loop unchanged, and is tested end to end with a scripted model on BFCL's own simulators.

Effect hints. The hints condition appends each function's declaration to its description in the vocabulary of Model Context Protocol tool annotations (`readOnlyHint`, `destructiveHint`, `idempotentHint`), including the functions that `miss_func` reveals later. Nothing else changes, and no instruction to use the hints is added: the condition asks whether models use effect information when it is offered, and doubles as a test of MCP's hint design.

Question detection. Both the user and the scorer rely on the same detector, so it has to be strict. The EffectWorld simulator of Kovalenko and Redchych (2026) treated any sentence containing *shall*, *should* or *would you like* as a question and read "the file should arrive shortly" as one; here a turn asks only if a sentence of its prose ends in a question mark or carries an explicit confirmation request ("please confirm", "shall I proceed", "would you like me to"), after tool-call blocks, code and URLs are removed. The detector ships with adversarial tests, and §7 reports how far the results depend on it and on the user script.

7 Experiments

Setup. We run BFCL's four multi-turn categories (200 conversations each) under its standard protocol with the pinned `bfcl-eval` 2026.3.23: each model is served by vLLM on one A100 40 GB in bfloat16 with the context length set to $\min(65\,536, \text{model context})$, and queried through its registered BFCL handler, so prompting, decoding and the official score are exactly BFCL's. Wave 1 covers seven open models of up to 8B parameters for which a handler exists and the weights are ungated: Qwen3-0.6B and Qwen3-8B, xLAM-2-3B and Llama-xLAM-2-8B, Hammer2.1-7B, Falcon3-7B-Instruct and Granite-3.2-8B-instruct. We add the logged standard-protocol runs of four base models from Kovalenko and Redchych (2026) († in the tables), produced with the same `bfcl-eval` version: Qwen3-4B-2507, Qwen3-1.7B, Phi-4-mini and Falcon3-3B. Conversations that BFCL aborts (step limit, or a prompt beyond the context window, which happens in 1–62 conversations per open model on `long_context`) count as failures in both scores. Open models are sampled at BFCL's default temperature of 0.001, but batched inference in vLLM is not deterministic and reasoning chains amplify the differences: between two runs of the same open model under conditions that turn out to change nothing, 22–147 of the 800 conversations change verdict (most for Qwen3-8B, which reasons before every call), and Claude's API accepts no temperature at all. We therefore never read a difference between conditions off the accuracy columns alone: every comparison between two runs of one model is paired on the 800 conversations, with an exact two-sided McNemar test on the conversations that pass in one run and fail in the other.

API models and budget. The budget for API models in this version of the benchmark was $100. We therefore evaluate one API model, Claude Haiku 5.5 (‡), through BFCL's own Claude handler with three changes the current API requires (no sampling temperature, an explicit output limit, and the full prompt logged as input tokens) and its prompt caching left on. Its full standard-protocol run took 8,696 requests over the 800 conversations, with 107M prompt tokens, 93% of them read from the cache, and 1.6M output tokens, and cost $2.75 at list prices ($12.21 under the conservative accounting of our spend guard, which bills cache reads at the full input price). A multi-turn benchmark is input-bound: every step re-sends the conversation, so the model reads about 68 tokens for each one it writes. Table 3 carries this measured volume over to the larger current Claude models at their list prices. With caching, one run costs $54 on Sonnet 5.5, $87 on Opus 5.5 and $193 on Fable 5.1, and the three conditions of this paper (standard, confirmation-aware, effect hints) take about $1,010 for the four models together, before reruns and the sensitivity checks. That is beyond this version's budget, so the leaderboard reports the larger API models as future work; the harness, the spend guard and the estimate are released so that others can add them at known cost.

Table 3: Estimated API cost of the benchmark (USD, list prices). Token volume measured on the full Claude Haiku 5.5 run (standard protocol, four multi-turn categories, 800 conversations) and assumed equal for the other models; tokenizers and thinking lengths differ, so the figures are estimates. Caching: cache reads and writes as billed by the API, with the prompt-caching markers that BFCL's Claude handler sets. Three conditions: standard, confirmation-aware and effect hints.

Model	one run (800 conversations)		3 conditions	
	no caching	caching	no caching	caching
Claude Haiku 5.5	$11	$3	$34	$8
Claude Sonnet 5.5	$229	$54	$687	$161
Claude Opus 5.5	$458	$87	$1,374	$262
Claude Fable 5.1	$1,145	$193	$3,436	$580
All four				$1,010

Table 4: Leaderboard under the standard protocol: BFCL accuracy and success under effect safety (%) per multi-turn category and their mean over the four categories. †: logged runs from Kovalenko and Redchych (2026); ‡: API model (the only one within the budget, §7); –: run not finished. Success under effect safety = BFCL-valid and no collateral destructive call and no duplicate non-idempotent write.

		base		miss_func		miss_param		long_context		mean	
Model	size	BFCL	safe	BFCL	safe	BFCL	safe	BFCL	safe	BFCL	safe
Qwen3-0.6B	0.6B	6.0	6.0	3.0	2.5	4.5	4.0	5.0	5.0	4.6	4.4
Qwen3-1.7B†	1.7B	15.0	13.5	13.0	9.5	16.0	13.5	10.0	8.5	13.5	11.2
xLAM-2-3B	3B	72.5	69.5	57.5	42.5	57.5	50.0	45.0	44.0	58.1	51.5
Falcon3-3B†	3B	2.0	2.0	0.5	0.0	0.0	0.0	1.5	0.5	1.0	0.6
Phi-4-mini†	3.8B	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Qwen3-4B-2507†	4B	26.0	24.5	20.5	18.5	15.5	12.5	25.5	24.5	21.9	20.0
Hammer2.1-7B	7B	24.0	23.0	27.0	23.0	21.0	20.0	13.0	11.5	21.2	19.4
Falcon3-7B	7B	6.5	6.0	3.0	3.0	2.5	2.0	4.5	4.5	4.1	3.9
Qwen3-8B	8B	52.0	48.0	46.5	39.5	35.5	31.5	31.5	29.5	41.4	37.1
Llama-xLAM-2-8B	8B	77.0	63.0	72.0	57.0	64.5	49.5	67.0	55.0	70.1	56.1
Granite-3.2-8B	8B	9.5	9.5	1.0	0.5	6.0	4.0	9.0	9.0	6.4	5.8
Claude Haiku 5.5‡	API	58.0	55.0	49.5	45.0	42.5	39.0	46.5	43.0	49.1	45.5

The ranking survives, the distances do not. Table 4 gives both scores. Across the 11 models with a complete `base` run the two rankings agree almost perfectly (Spearman $\rho = 0.99$; $\rho = 1.00$ on the four-category mean of the 11 complete runs): under the standard protocol the effect-aware score does not reorder models. What it changes is how far apart they are. Llama-xLAM-2-8B leads every category and keeps the lead, but gives up 14.0 points on `base` (43 collateral calls), 15.0 on `miss_func` (79) and 15.0 on `miss_param` (86); its 25-point lead over Qwen3-8B on `base` shrinks to 15.0, and the 3B xLAM loses 15.0 points on `miss_func` (94 collateral calls). The two xLAM models never ask outside `miss_param` (0 asked turns in the other three categories, 14 and 26 there) while Qwen3-8B asks in 22–129 turns per category and makes 21 collateral calls on `base`. The API model behaves like the careful end of this range: Claude Haiku 5.5 scores 58.0 on `base` and keeps 55.0 under effect safety (14 collateral calls), asks in 12–90 turns per category, and pays for its care in reads, with 423 reads beyond the reference on `base`, more than any wave-1 model. The missing function is the trigger: when the needed function is absent (`miss_func`) models substitute a destructive one (Granite 95 collateral calls at 1% accuracy, xLAM-2-3B 94, Llama-xLAM-2-8B 79), and Hammer2.1-7B makes 135 on `miss_param`. Whether careful behaviour can overtake is the question for the confirmation-aware protocol, where asking is answered rather than penalised (below).

Behaviour behind the scores. Table 5 lists the rule violations on `base`. Three failure modes are visible that the official score cannot separate from plain inaccuracy: substitution (collateral calls, above), looping (Falcon3-7B: 71 duplicate non-idempotent writes and 112 redundant reads; Falcon3-3B 334 redundant reads) and silence (Granite leaves 120 reference turns without a call; Phi-4-mini decodes to no call at all with its registered handler and answers 105 turns with a question, which is why the decoder is part of what a leaderboard measures and must be stated).

Tokens as a side effect. Every model step re-sends the whole context, so a step the task did not need costs its output tokens and a full prompt of input tokens. We attribute BFCL's logged per-step token counts to *surplus steps*, steps whose

Table 5: What the scores hide (`multi_turn_base`, 200 conversations, 1 142 reference calls). Collateral = destructive calls the reference never makes in that turn; beyond reference by effect kind; duplicate non-idempotent writes; redundant reads; failed calls; turns in which the model asked instead of calling; mean model steps per conversation; mean output tokens per conversation; share of output and of input tokens spent on surplus steps (steps whose calls are all beyond the reference).

		beyond reference								tokens		
Model	collateral	destr.	write	read	dup. writes	redund. reads	failed	asked	steps	output / conv.	surplus out %	surplus in %
Qwen3-0.6B	42	42	31	119	1	34	336	75	7.5	2748	8.9	10.2
Qwen3-1.7B†	116	116	258	266	27	82	521	30	10.4	3776	21.1	22.4
xLAM-2-3B	13	13	85	104	0	4	137	0	9.8	336	7.6	10.0
Falcon3-3B†	97	97	90	492	4	334	478	2	12.0	3289	43.7	27.9
Phi-4-mini†	0	0	0	0	0	0	0	105	3.7	510	0.0	0.0
Qwen3-4B-2507†	16	16	29	198	0	1	158	21	9.2	475	9.1	12.2
Hammer2.1-7B	56	56	159	314	2	43	327	0	9.8	260	26.3	22.1
Falcon3-7B	132	132	140	291	71	112	323	2	10.0	3606	19.7	18.5
Qwen3-8B	21	21	105	224	0	4	178	28	9.8	4086	17.4	17.9
Llama-xLAM-2-8B	43	43	95	67	0	2	166	0	9.9	316	9.8	10.4
Granite-3.2-8B	17	17	35	156	3	6	293	8	6.9	361	3.2	2.5
Claude Haiku 5.5‡	14	14	83	423	0	0	103	12	10.0	1583	14.0	14.9

decoded calls are all beyond the reference (first-come matching against the reference multiset of the turn, so the surplus total equals the calls-beyond-reference count). Raw totals differ fifteen-fold between families because the Qwen3 models reason before each call (about 400 output tokens per step against 30 for the xLAM models), but the surplus share is comparable and large across families: on `base` surplus steps take 3–44% of the output tokens and 2–28% of the input tokens (Table 5), and on the `miss_*` categories a comparable share for most models (Llama-xLAM-2-8B 16–17%, xLAM-2-3B 17–23%, Hammer2.1-7B 21–30%). For the leader this is about 7 400 input tokens per `base` conversation. The scorer reports the efficiency rules and the token bill side by side; a model that is both careful and economical has to earn both columns.

Effect hints are ignored. Rendering the declarations into the function docs in MCP vocabulary (§6) changes nothing measurable for any of the eight models run under it (Table 6). Mean BFCL accuracy moves by at most 1.9 points (Hammer2.1-7B, 38/23 conversations gained/lost, $p = 0.07$) and by less than one point for the other seven; no paired difference is significant ($p \geq 0.21$). Collateral destructive calls, the count the hints are meant to reduce, fall for two models (Granite 223 to 211 over the four categories; Haiku 119 to 97, unevenly: `long_context` 44 to 13, `base` 14 to 22) and rise or stay for the other six (Falcon3-7B 324 to 432, Qwen3-8B 186 to 229). Offered without an instruction to use them, effect annotations do not change what the models do, which is what the advisory status of MCP's hints would predict; whether an instruction would is a question for a further condition, not for this one.

A user that answers. Under the confirmation-aware protocol the models divide by whether they ask. Claude Haiku 5.5 gains in every category, 3.5, 2.0, 7.5 and 4.5 points (4.4 on the mean; 84 conversations gained, 49 lost, $p = 0.003$), and the gain sits where the protocol acted: of the 101 conversations in which the scripted user answered at least once (63 *yes*, 13 *no*, 40 restatements), 29 pass against 11 of the same conversations under the standard protocol (23 gained, 5 lost, $p < 0.001$), while the other 699 differ no more than two runs of one model do (61 gained, 44 lost, $p = 0.12$). Falcon3-7B (13 answers) and Granite-3.2-8B (83) gain 1.1 and 0.7 (14/5, $p = 0.06$; 11/5, $p = 0.21$). The three models that hardly ask, the two xLAM models and Hammer2.1-7B, received 0–3 answers and do not move ($p \geq 0.12$): they never give the user a chance. Two models that do ask gain nothing either. Qwen3-0.6B received 427 answers at 4% accuracy (11/14, $p = 0.69$) and made more collateral destructive calls, 326 against 286; Qwen3-8B, the open model that asks most, received 122 (38 *yes*, 15 *no*, 69 restatements) and ends at 71 gained, 74 lost ($p = 0.87$), `miss_param` up 5.0 points and `miss_func` down 6.5. An answer helps only a model that can act on it.

What the protocol does not change is *why* models ask. The scorer counts a destructive call as confirmed when a *yes* preceded it in the same turn. Under the confirmation-aware protocol that share is 4.8% for Haiku (52 of 1 075 destructive calls) and 0–1.6% for the seven other models; of Qwen3-8B's 38 *yes* answers, 11 were followed by the destructive call they licensed and 15 by no call at all, and of Qwen3-0.6B's 143, 13 and 110. The strict success column makes the same point in conversations. 224 of the 800 conversations need no destructive call, and almost every strict pass is one of them: of the 576 that do need one, the number a model completes with every destructive call confirmed is 6 for Haiku, 1 for Llama-xLAM-2-8B and 0 for the other six models, while the same models pass 23–399 of these conversations under BFCL's checker. Across eight models and three conditions, function-calling models ask to clarify, not for permission. A

Table 6: Conditions: the same models under BFCL's standard protocol, with effect hints in the function docs, and with the confirmation-aware scripted user (§6). BFCL accuracy (%) per category (b, mf, mp, lc) and mean; mean success under effect safety; sums over the four categories of collateral destructive calls, turns that asked instead of calling, and the scripted user's answers. Permission (confirm runs only, since no confirmation can occur otherwise): confirmed = share of destructive calls preceded by a *yes* in the same turn; strict = of the 576 conversations whose reference requires a destructive call, those passed with no collateral call and every destructive call confirmed (the other 224 conversations pass the strict rule trivially). vs standard: conversations (of 800) that pass in this condition and fail in the standard run, and the reverse, with an exact two-sided McNemar p.

		BFCL accuracy									permission		vs standard	
Model	condition	b	mf	mp	lc	mean	safe	collateral	asked	yes / no / restate	confirmed %	strict / 576	+ / −	p
Qwen3-0.6B	standard	6.0	3.0	4.5	5.0	4.6	4.4	286	397	–	–	–	–	–
	hints	5.5	1.0	5.5	3.5	3.9	3.8	344	427	–	–	–	8 / 14	0.29
	confirm	7.0	3.5	3.0	3.5	4.2	4.0	326	399	143 / 40 / 244	1.5	0	11 / 14	0.69
xLAM-2-3B	standard	72.5	57.5	57.5	45.0	58.1	51.5	182	14	–	–	–	–	–
	hints	70.5	59.0	57.0	44.0	57.6	51.1	180	18	–	–	–	28 / 32	0.70
	confirm	73.5	59.0	58.0	45.0	58.9	52.0	182	12	1 / 0 / 0	0.1	0	15 / 9	0.31
Hammer2.1-7B	standard	24.0	27.0	21.0	13.0	21.2	19.4	292	0	–	–	–	–	–
	hints	26.5	32.5	19.5	14.0	23.1	21.5	318	0	–	–	–	38 / 23	0.072
	confirm	23.0	28.0	20.5	13.5	21.3	19.4	286	0	0 / 0 / 0	0.0	0	9 / 9	1.00
Falcon3-7B	standard	6.5	3.0	2.5	4.5	4.1	3.9	324	18	–	–	–	–	–
	hints	6.0	2.0	5.5	5.0	4.6	3.6	432	15	–	–	–	17 / 13	0.58
	confirm	6.5	4.5	4.5	5.5	5.2	4.8	375	13	4 / 0 / 9	0.1	0	14 / 5	0.064
Qwen3-8B	standard	52.0	46.5	35.5	31.5	41.4	37.1	186	260	–	–	–	–	–
	hints	46.5	49.5	34.5	37.5	42.0	37.6	229	276	–	–	–	76 / 71	0.74
	confirm	52.0	40.0	40.5	31.5	41.0	36.5	188	200	38 / 15 / 69	0.9	0	71 / 74	0.87
Llama-xLAM-2-8B	standard	77.0	72.0	64.5	67.0	70.1	56.1	246	26	–	–	–	–	–
	hints	76.0	69.0	65.0	68.0	69.5	55.6	255	26	–	–	–	17 / 22	0.52
	confirm	77.0	73.5	66.5	67.0	71.0	56.8	246	24	2 / 0 / 1	0.2	1	11 / 4	0.12
Granite-3.2-8B	standard	9.5	1.0	6.0	9.0	6.4	5.8	223	100	–	–	–	–	–
	hints	11.0	0.5	8.0	9.5	7.2	6.8	211	107	–	–	–	15 / 8	0.21
	confirm	9.5	4.0	6.5	8.5	7.1	6.0	212	56	24 / 1 / 58	1.6	0	11 / 5	0.21
Claude Haiku 5.5‡	standard	58.0	49.5	42.5	46.5	49.1	45.5	119	143	–	–	–	–	–
	hints	56.5	51.0	39.5	46.5	48.4	44.9	97	160	–	–	–	54 / 60	0.64
	confirm	61.5	51.5	50.0	51.0	53.5	49.4	125	90	63 / 13 / 40	4.8	6	84 / 49	0.003

user that answers rewards the first; the strict column shows that the second is missing, and the official score reveals neither.

Sensitivity. The scripted user and the detector are rules, so we ask how much rests on them, without new runs. For the user script, every answer in the eight confirm runs was re-examined under two stricter scripts: one that withholds the *yes* from a text that reports a failure and names no destructive function (the case in which a closing offer after a failed read is read as a proposal), and one that gives a *yes* only when the asking sentences name a destructive function. Haiku received 63 *yes* answers; the first script withholds 12 and the second 16, but none of the 84 conversations Haiku gained and none of the 49 it lost contains a withheld answer under the first script, and two gained conversations do under the second (82 gained and 49 lost would still give $p < 0.01$). Qwen3-8B's null is as stable (4 of 71 gained and 3 of 74 lost in question). The generosity of the script matters only for Qwen3-0.6B, whose 143 *yes* answers include 93 to failure reports or closing offers: its answer count is inflated, its result is not. For the detector, the standard runs of the twelve leaderboard models were re-scored under three alternatives: question marks only (no confirmation phrases), the last sentence only, and the EffectWorld rule (a question mark or *shall*, *should*, *would you like* anywhere in the prose). Dropping the confirmation phrases removes 0–35% of the asked turns (Haiku 143 to 120, Qwen3-4B-2507 217 to 142 over the four categories) and reorders no models; the loose rule adds turns to the models that write *should* in prose (Falcon3-3B 10 to 62, Phi-4-mini 502 to 718, Haiku 143 to 186); the last-sentence rule removes most of Haiku's and Qwen3-8B's questions (143 to 16, 260 to 96), because these models ask and then go on with a closing sentence, which is why the detector reads every sentence. The models at the bottom stay there under every rule (Hammer2.1-7B 0 asked turns, the two xLAM models 14 and 26). For the destructive boundary, the same runs were re-scored under each annotator's own boundary instead of the majority (A1: `rmdir` in, `echo` and `create_ticket` out; A2: `cancel_order` out; A3 equals the majority). The rank correlation between the official and the effect-aware score is 0.99 on `base` and 1.00 on the four-category mean under every boundary, and the largest drop, Llama-xLAM-2-8B's 14 points on `base`, is 14 under all three. Collateral counts move most under A1, which drops `echo`, the file write models reach for most often

(Haiku 119 to 70, Qwen3-8B 186 to 97 over the four categories), without reordering the models; the one decision the human annotator can change materially is that one.

Pending. The larger API models (Table 3; a Sonnet 5.5 run is in progress within the budget), an independent human annotator on the destructive boundary, and an error taxonomy from the rule violations and BFCL's error types.

8 Limitations, datasheet and licence

What the simulators cannot show. Effects are inferred from the simulated state, so a consequence the simulator does not model is invisible: `contact_customer_support` changes nothing and `place_order` does not debit the balance. The human boundary exists for exactly these cases, and we list every such judgment with its reason in the released sheet. Idempotence is observed on sampled states, not proved.

The scripted user. A deterministic user can be gamed and can misfire. Its answers follow the reference at the level of functions, so a proposal to call a destructive function the reference does not call in that turn is refused, but a proposal that names the right function with the wrong arguments (the wrong file, the wrong recipient) is confirmed. We report sensitivity to the script and the detector rather than claim realism.

Annotation. The write/destructive line is a judgment; we constrain it with the three mechanical signals, report the agreement of three annotators (one coded by us, two language models of one vendor; an independent human annotator is pending) and release every label set with its reasons.

Licence and hosting. `bfcl-eval` is Apache-2.0; we pin version 2026.3.23, ship only our additions (declarations, scorer, protocol, scripts), state the modifications, and release under Apache-2.0 with attribution. [TODO: datasheet, hosting URL, DOI, maintenance plan, as required by the track.]

References

Maksym Andriushchenko, Alexandra Souly, Mateusz Dziemian, Derek Duenas, Maxwell Lin, Justin Wang, Dan Hendrycks, Andy Zou, Zico Kolter, Matt Fredrikson, Eric Winsor, Jerome Wynne, Yarin Gal, and Xander Davies. AgentHarm: A benchmark for measuring harmfulness of LLM agents. In *International Conference on Learning Representations (ICLR)*, 2025. arXiv:2410.09024.

Rahul Suresh Babu and Laxmipriya Ganesh Iyer. Contract2Tool: Learning preconditions and effects for reliable tool-augmented LLM agents. arXiv:2606.07904, 2026. Infers preconditions, effects and risk annotations from schemas, documentation and before/after execution traces; used for tool filtering.

Victor Barres, Honghua Dong, Soham Ray, Xujie Si, and Karthik Narasimhan. τ^2-bench: Evaluating conversational agents in a dual-control environment. arXiv:2506.07982, 2025.

Kinjal Basu et al. NESTFUL: A benchmark for evaluating LLMs on nested sequences of API calls. arXiv:2409.03797, 2024.

Rohith Reddy Bellibatlu, Zichong Wang, and Wenbin Zhang. Do agent benchmarks do what they say? An executable-contract audit of tool-using agent environments. arXiv:2609.37315, 2026. Audits 34 mutating tools across four benchmarks (AgentDojo, τ^2-bench, a clinical benchmark) against their advertised contracts and traces scores back through evaluator code.

Aarya Doshi, Yining Hong, Congying Xu, Eunsuk Kang, Alexandros Kapravelos, and Christian Kästner. Towards verifiably safe tool use for LLM agents. In *Proceedings of the IEEE/ACM International Conference on Software Engineering: New Ideas and Emerging Results (ICSE-NIER)*, 2026. arXiv:2601.08012.

Elias Hossain, Md Mehedi Hasan Nipu, Tasfia Nuzhat Ornee, Rajib Rana, and Niloofar Yousefi. NEXUS: Structured runtime safety for tool-using LLM agents. arXiv:2607.19356, 2026. Plan-level monitor that allows, blocks, requests confirmation or requests revision of tool calls.

Yunju Kang, Seonghyeon Cho, Irene Li, Yeo-Chan Yoon, and Chanjun Park. POLAR: Ontology-guided risk prevention for tool-calling LLM agents. In *Findings of the Association for Computational Linguistics: AACL-IJCNLP 2026*, 2026. arXiv:2610.08082.

Alexander Kovalenko and Artem Redchych. Small agents should know what their tools do. arXiv:2610.35981, 2026. EffectWorld: an executable world of effect-typed tools; the BFCL teaser table this paper replaces.

Ido Levy, Ben Wiesel, Sami Marreed, Alon Oved, Avi Yaeli, Nir Mashkif, and Segev Shlomov. ST-WebAgentBench: A benchmark for evaluating safety and trustworthiness in web agents. In *International Conference on Learning Representations (ICLR)*, 2026. arXiv:2410.06703. Completion under Policy (CuP); 222 tasks with policies, user consent among six dimensions.

Jiapeng Li. Where does exactly-once live? Model, harness, and tool-contract effects on duplicate side effects in LLM agents. arXiv:2609.29095, 2026.

Xiangyi Li, Kyoung Whan Choe, Yimin Liu, Xiaokun Chen, Chujun Tao, Bingran You, Wenbo Chen, Zonglin Di, Jiankai Sun, Shenghan Zheng, Jiajun Bao, Yuanli Wang, Weixiang Yan, Yiyuan Li, and Han-chung Lee. ClawsBench: Evaluating capability and safety of LLM productivity agents in simulated workspaces. arXiv:2604.05172, 2026.

Bohao Liao, Jingchao Wang, Qipeng Song, Jin Cao, Jieling Wang, and Boyu Deng. TraceGrant: A contract-governed security framework for the task-effect lifecycle of networked LLM agents. arXiv:2608.21126, 2026.

Jiarui Lu, Thomas Holleis, Yizhe Zhang, Bernhard Aumayer, Feng Nan, Felix Bai, Shuang Ma, Shen Ma, Mengyu Li, Guoli Yin, Zirui Wang, and Ruoming Pang. ToolSandbox: A stateful, conversational, interactive evaluation benchmark for LLM tool use capabilities. In *Findings of the Association for Computational Linguistics: NAACL 2025*, 2025. arXiv:2408.04682.

Xing Han Lù, Amirhossein Kazemnejad, Nicholas Meade, Arkil Patel, Dongchan Shin, Alejandra Zambrano, Karolina Stańczak, Peter Shaw, Christopher J. Pal, and Siva Reddy. AgentRewardBench: Evaluating automatic evaluations of web agent trajectories. arXiv:2504.08942, 2025.

Model Context Protocol contributors. Model context protocol specification: Tool annotations (readOnlyHint, destructiveHint, idempotentHint, openWorldHint). `https://modelcontextprotocol.io/specification`, 2025. Hints are advisory: the specification tells clients not to rely on them for security decisions.

Bardia Mohammadi, Nearchos Potamitis, Lars Klein, Akhil Arora, and Laurent Bindschaedler. Atomix: Timely, transactional tool use for reliable agentic workflows. arXiv:2602.14849, 2026.

Martin Odersky, Yaoyu Zhao, Yichen Xu, Oliver Bračevac, and Cao Nguyen Pham. Tracking capabilities for safer agents. arXiv:2603.00991, 2026.

Shishir G. Patil, Tianjun Zhang, Xin Wang, and Joseph E. Gonzalez. Gorilla: Large language model connected with massive APIs. In *Advances in Neural Information Processing Systems*, 2024.

Shishir G. Patil, Huanzhi Mao, Fanjia Yan, Charlie Cheng-Jie Ji, Vishnu Suresh, Ion Stoica, and Joseph E. Gonzalez. The Berkeley Function Calling Leaderboard (BFCL): From tool use to agentic evaluation of large language models. In *International Conference on Machine Learning*, pages 48371–48392, 2025.

Hayley Ross, Ameya Sunil Mahabaleshwarkar, and Yoshi Suhara. When2Call: When (not) to call tools. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics (NAACL)*, pages 3391–3409, 2025.

Yangjun Ruan, Honghua Dong, Andrew Wang, Silviu Pitis, Yongchao Zhou, Jimmy Ba, Yann Dubois, Chris J. Maddison, and Tatsunori Hashimoto. Identifying the risks of LM agents with an LM-emulated sandbox. In *International Conference on Learning Representations (ICLR)*, 2024. arXiv:2309.15817.

Olly Styles, Sam Miller, Patricio Cerda-Mardini, Tanaya Guha, Victor Sanchez, and Bertie Vidgen. WorkBench: a benchmark dataset for agents in a realistic workplace setting. arXiv:2405.00823, 2024.

Harsh Trivedi, Tushar Khot, Mareike Hartmann, Ruskin Manku, Vinty Dong, Edward Li, Shashank Gupta, Ashish Sabharwal, and Niranjan Balasubramanian. AppWorld: A controllable world of apps and people for benchmarking interactive coding agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 16022–16076, 2024. arXiv:2407.18901.

Artem Trofimov and Boris Novikov. When tool calls succeed but workflows fail: Anomalies at the agent-tool boundary. arXiv:2609.15397, 2026.

Shunyu Yao, Noah Shinn, Pedram Razavi, and Karthik Narasimhan. τ-bench: A benchmark for tool-agent-user interaction in real-world domains. arXiv:2406.12045, 2024.

Tongxin Yuan, Zhiwei He, Lingzhong Dong, Yiming Wang, Ruijie Zhao, Tian Xia, Lizhen Xu, Binglin Zhou, Fangqi Li, Zhuosheng Zhang, Rui Wang, and Gongshen Liu. R-judge: Benchmarking safety risk awareness for LLM agents. *arXiv preprint arXiv:2401.10019*, 2024.

Yuxiang Zhang, Jing Chen, Junjie Wang, Yaxin Liu, Cheng Yang, Chufan Shi, Xinyu Zhu, Zihao Lin, Hanwen Wan, Yujiu Yang, Tetsuya Sakai, Tian Feng, and Hayato Yamana. ToolBeHonest: A multi-level hallucination diagnostic benchmark for tool-augmented large language models. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 11388–11422, 2024.