

WHEN DOES ACTION CREDIT NEED UPDATING?

Hongye Yang

College of Computing
Georgia Institute of Technology
hyang783@gatech.edu

Boxiao Huang

College of Computing
Georgia Institute of Technology
bhuang361@gatech.edu

ABSTRACT

Tool-using agents are continually updated with new interaction data. After each policy update, however, previously estimated action credits may become stale. Recomputing them from scratch can require many additional tool calls and environment interactions, making repeated updates increasingly expensive. We ask a simple question: *when does historical action credit actually need to be updated?* Our key observation is that a change in action value does not necessarily imply a change in the decision. Historical credit can still be useful as long as policy-induced drift is too small to overturn the existing action ranking. Building on this idea, we introduce pairwise branch sensitivity to capture how strongly a policy update affects the downstream regions that distinguish two candidate actions. We then derive a first-order anchored credit-transport estimator that updates historical credit using old interventional trajectories, and propose a Decision-Sufficient Credit Gate (DSC-Gate) that chooses whether to reuse, transport, or resample credit. Experiments show that branch sensitivity explains credit drift substantially better than global policy distance. With sufficient historical data, credit transport reduces estimation error, while its benefit to decision making is concentrated on updates that affect action-distinguishing branches. On a fully independent test set, DSC-Gate changes mean regret by only $+0.00004$ relative to a gap-based gate while reducing mean new tool steps from 472 to 286, a 39.4% reduction. We observe the same pattern after a real tool-agent parameter update. Overall, our results show that agents do not need to recompute action credit after every policy update: much of the historical evidence can be reused or cheaply corrected, reducing the additional interaction required to keep action decisions up to date.

1 INTRODUCTION

Consider a retail support agent handling a refund request. Given the same user problem, it may first inspect the order status or first verify refund eligibility, before invoking downstream tools to complete the workflow. After many historical interactions, the agent has accumulated evidence about which route is more reliable. The policy is then updated, perhaps learning to recover from failed tool calls or handle exceptional orders more effectively. The downstream consequences of the original actions may therefore change. Must the agent now execute these routes again and recompute their credit from scratch?

Often, this is unnecessary. A policy update may improve downstream behavior shared by several action branches while leaving their relative ordering unchanged. Conversely, a much smaller update can matter immediately when it affects states reached primarily by one candidate action. Thus, neither global policy change nor numerical value drift alone determines whether historical credit has become unusable. What matters for the current decision is whether the induced change is large enough, and sufficiently aligned with the competing branches, to invalidate the existing action comparison.

This distinction is increasingly relevant for tool-using agents that improve through repeated interaction and tool-use training (Li et al., 2023). Stepwise evaluation has made the reliability of individual tool decisions increasingly measurable (Chen et al., 2024a), while large-scale benchmarks expose instability across tools and environments (Guo et al., 2024). Stateful evaluation further emphasizes that an early action is valuable only through the downstream behavior that follows it (Lu et al., 2025). Once the downstream policy changes, action credit estimated under an earlier policy can

therefore become stale. This dependence of return on the continuation policy is fundamental to credit assignment (Sutton, 1988), and recent tool-agent studies also report unstable tool preferences across settings (Faghih et al., 2025). Although off-policy evaluation provides principled ways to reuse historical trajectories under a changed policy (Dudík et al., 2014), re-evaluating every candidate action from scratch remains the most direct way to avoid stale credit and repeatedly incurs additional tool calls, environment interaction, and sampling. We therefore ask a more targeted question: *when does historical action credit actually need to be updated?*

Our starting point is to separate *credit drift* from *decision failure*. An action comparison can change numerically without changing the decision it supports. Whether this happens depends on both the existing action gap and where the policy update acts downstream. Updates concentrated in regions commonly visited by competing branches may largely cancel in their relative credit, whereas similarly sized updates aligned with branch differences can induce much larger drift. We capture this structure through *pairwise branch sensitivity*, which measures how strongly a policy update overlaps with downstream regions that distinguish two candidate actions.

Historical credit that has drifted also need not be discarded immediately. We derive a first-order anchored credit-transport estimator that uses historical interventional trajectories to estimate the policy-induced correction while retaining the old action comparison as an anchor. Building on this estimator, we introduce the *Decision-Sufficient Credit Gate* (DSC-Gate), which determines whether a comparison can be resolved by directly reusing historical credit, transporting it from old trajectories, or collecting new target-policy data. New execution is therefore reserved for comparisons that cannot be resolved from existing evidence. Figure 1 summarizes this pipeline end to end

We evaluate this framework through four controlled levels followed by a separate real-tool validation. L1 tests whether branch sensitivity explains credit drift when global update magnitude is controlled. L2 evaluates first-order transport under finite historical data. L3 asks when improved credit estimation actually improves action selection. L4 freezes the resulting gate and evaluates it on a fully independent test population. We then test whether the same mechanism appears after an actual parameter update of a tool-using language model. Across these experiments, pairwise branch sensitivity explains credit drift substantially better than global policy distance, while transport reduces credit-estimation error when sufficient historical data are available. Its decision-level benefit is concentrated on updates that can alter action rankings. On the independent L4 test set, DSC-Gate changes mean regret by only $+0.00004$ relative to a gap-based gate while reducing mean new tool steps from 472 to 286, a 39.4% reduction. The real model-weight update exhibits the same conditional pattern.

Our main contributions are:

- We distinguish credit drift from decision failure after a policy update, showing why numerical changes in action value alone do not determine whether historical credit should be refreshed.
- We introduce pairwise branch sensitivity, a local quantity that characterizes how strongly a policy update affects downstream regions that distinguish candidate actions.
- We derive a first-order anchored credit-transport estimator that updates historical action comparisons using existing interventional trajectories before requiring new target-policy execution.
- We introduce DSC-Gate, which combines the historical action gap, transported correction, and empirical uncertainty to adaptively choose among reuse, transport, and resampling.

Taken together, these results show that maintaining action credit after a policy update need not require recomputing every candidate action from scratch. Historical evidence can often be reused, and when it becomes partially stale, existing trajectories can frequently provide a useful correction before new execution is needed. This reduces repeated tool calls, environment interaction, and resampling, lowering the marginal cost of keeping agent decisions up to date as their policies evolve.

2 RELATED WORK

Off-policy evaluation and historical-data reuse. Off-policy evaluation (OPE) provides the statistical foundation for reusing trajectories after a policy changes. Doubly robust estimation combines a learned model with importance weighting to reduce evaluation error (Dudík et al., 2014). High-confidence OPE studies how finite samples affect whether a policy comparison can be trusted (Thomas

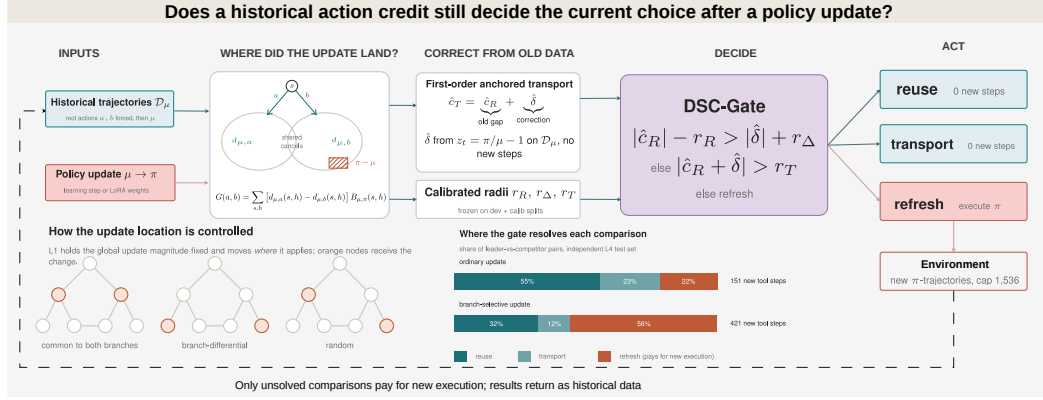


Figure 1: **Deciding when historical action credit must be refreshed.** Left to right: after a policy update $\mu \rightarrow \pi$, old interventional trajectories $\mathcal{D}_\mu$ collected under the previous policy are reused to compare two candidate root actions a and b . Pairwise branch sensitivity $G(a, b)$ weights the update by the visitation difference $d_{\mu,a} - d_{\mu,b}$, so changes in states that both branches visit cancel in the action difference, and only changes in branch-differential states drive relative drift. First-order anchored transport then corrects the historical gap as $\hat{c}_T = \hat{c}_R + \hat{\delta}$ from the same trajectories, without new execution. DSC-Gate combines $\hat{c}_R$, $\hat{\delta}$, and empirically calibrated radii r_R, r_Δ, r_T to resolve each leader-versus-competitor comparison by reuse, transport, or refresh; only refresh executes the target policy in the environment. The bars show how the gate shifts toward refresh when the update is concentrated on branch-differential states.

et al., 2015), while unequal-support analysis makes explicit when historical data cease to identify the target policy reliably (Thomas et al., 2017). More recently, cross-validated OPE has addressed estimator selection under practical finite-data conditions (Cief et al., 2025). OPE primarily targets target-policy value; our setting asks a narrower question—whether old evidence still resolves the particular action comparison needed for the current decision.

Pairwise comparison and adaptive evidence acquisition. Counterfactual learning shows how logged feedback can support decisions without replaying every alternative (Swaminathan et al., 2015). Best-arm and safe-improvement methods similarly allocate evidence toward unresolved comparisons rather than estimating every option equally (Simão et al., 2019). Recent agentic reward modeling also treats relative tool behavior as a useful learning target (Li et al., 2026). We adopt this comparison-first view, but add a structural condition specific to policy updates: the same global change can matter very differently depending on whether it occurs in states shared by two action branches or in states that distinguish them.

Tool-using agents under change. Tool-agent benchmarks increasingly emphasize multistep state consistency and downstream recovery (Lu et al., 2025). Tool preferences themselves can remain unstable across prompts and agent configurations (Faghih et al., 2025). Continual tool adaptation studies how agents cope when external documentation or tool interfaces evolve (Wu et al., 2026b), while continual pre-training has been used to improve function calling and adaptation to environmental feedback (Zhuang et al., 2025). These works establish policy and environment change as recurring features of deployed agents. Our focus is the lifecycle of evidence after such a change: which historical action comparisons remain usable, which can be corrected, and which require fresh execution.

Selective and cost-aware interaction. Recent work also treats tool use as a resource-allocation problem. CostBench explicitly evaluates whether agents can avoid unnecessary execution while preserving task performance (Liu et al., 2026). Adaptive tool-use methods learn when external tools are worth invoking (Li et al., 2025), and SMART targets tool overuse through capability-aware invocation (Qian et al., 2025). DSC-Gate applies the same selective-interaction principle to credit maintenance. Its decision is whether an update has made historical evidence insufficient enough to

justify new target-policy trajectories, connecting OPE-style reuse with pairwise decision sufficiency and execution cost.

3 CREDIT DRIFT AND DECISION SUFFICIENCY

3.1 PAIRWISE BRANCH SENSITIVITY

Fix a decision context and candidate root actions a and b . Let μ be the old downstream policy and π the target policy, with interpolation $\mu_\alpha = \mu + \alpha(\pi - \mu)$. Let $d_{\mu,a}(s, h)$ denote the downstream visitation probability of state s with remaining horizon h after forcing root action a . Define the local policy-update effect

$$B_{\mu,\pi}(s, h) = \sum_u [\pi(u | s, h) - \mu(u | s, h)] Q_\mu(s, h, u). \quad (1)$$

The first-order sensitivity of an action pair is

$$G(a, b) = \sum_{s, h} [d_{\mu,a}(s, h) - d_{\mu,b}(s, h)] B_{\mu,\pi}(s, h). \quad (2)$$

This signed inner product captures both *where* the policy changes and *where* the two action-conditioned branches differ. Updates in commonly visited regions can cancel in the pairwise difference, whereas similarly sized updates in branch-differential regions can induce substantial relative credit drift. Exact G is used only in the L1 mechanism analysis; later experiments estimate the needed quantities from finite historical trajectories.

3.2 FIRST-ORDER ANCHORED CREDIT TRANSPORT

For an old-policy trajectory generated after root action a , define the downstream ratio residual

$$z_t = \frac{\pi(A_t | S_t, h_t)}{\mu(A_t | S_t, h_t)} - 1, \quad (3)$$

excluding the forced root action from the policy ratio. A first-order expansion of the finite-horizon trajectory likelihood ratio yields an anchored correction. With a state-time baseline b_t fitted on the opposite cross-fitting fold, the trajectory-level quantity is

$$T_i(a) = R_i + \sum_t z_{it} [R_i - b_t(S_{it}, h_{it})], \quad (4)$$

leading to

$$\hat{Q}_T(a) = \frac{1}{N} \sum_{i=1}^N T_i(a), \quad \hat{c}_T(a, b) = \hat{Q}_T(a) - \hat{Q}_T(b). \quad (5)$$

The baseline reduces variance without changing the expectation of the first-order term when fitted independently of the evaluation trajectory. Transport keeps the historical credit as an anchor and estimates only the local policy-induced correction. Its bias grows with the omitted higher-order terms, while its variance depends on the amount and support of the old data. Appendix A.2 gives the trajectory derivation and Appendix A.3 details cross-fitting.

3.3 RANKING STABILITY

Let $c_\mu(a, b) = Q_\mu(a) - Q_\mu(b)$ and $\Delta c(a, b) = c_\pi(a, b) - c_\mu(a, b)$. For a non-tied pair, a sufficient condition for preserving the old ranking is

$$|\Delta c(a, b)| < |c_\mu(a, b)|. \quad (6)$$

This separates three quantities that are often conflated. Branch sensitivity governs the potential relative drift. The old action gap determines whether that drift can alter the choice. Finite-data uncertainty determines whether the updated ranking can be resolved reliably. Large numerical drift may therefore leave the selected action unchanged, while smaller directionally aligned drift can matter near a tight gap.

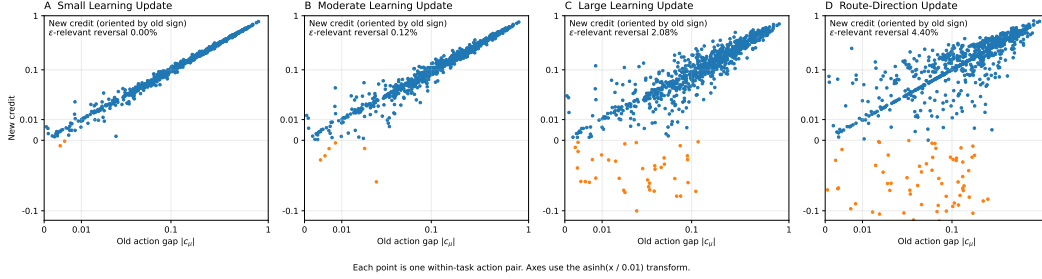


Figure 2: **Credit drift and ranking stability.** Each panel contains all 864 action pairs from the 288 L2–L3 confirmation tasks for a different update condition. Signs are oriented by old credit. Highlighted points are true ranking reversals; the annotated rate additionally requires the absolute new credit difference to exceed the prespecified relevance threshold.

3.4 DECISION-SUFFICIENT CREDIT GATE

Let $\hat{c}_R$ be the old action difference from direct reuse and $\hat{\delta}$ the first-order correction, with

$$\hat{c}_T = \hat{c}_R + \hat{\delta}. \quad (7)$$

We obtain frozen empirical radii r_R , r_Δ , and r_T from residual compensation on a development set followed by scale calibration on an independent calibration set. These radii summarize uncertainty in the old gap, the correction, and the transported gap. They are empirical calibration quantities; we do not claim distribution-free coverage or validity under arbitrary stopping.

DSC-Gate resolves a pair in three stages. It **reuses** historical credit when

$$|\hat{c}_R| - r_R > \left| \hat{\delta} \right| + r_\Delta, \quad (8)$$

so the conservative old gap exceeds the resolvable drift. If reuse fails, it **transports** when

$$|\hat{c}_T| > r_T, \quad (9)$$

so the transported difference is separated from zero. All remaining pairs enter **refresh**, where target-policy trajectories are executed until the necessary leader-versus-competitor comparisons are resolved or the 1,536-step cap is reached. With more than two candidate actions, the current leader is repeatedly compared with each competitor, and new execution is allocated only to routes still appearing in unresolved comparisons. The complete gate and allocation protocol is given in Appendix D.

4 EXPERIMENTAL DESIGN

We evaluate a sequence of increasingly deployment-oriented questions. The controlled hierarchy L1–L4 uses disjoint task splits where required, fixed seeds, shared old-data budgets, and paired evaluation. The final tool-agent experiment is external validation outside this confirmatory hierarchy. Full environment construction, estimator definitions, calibration, and statistical tests are in Appendices B–E.

4.1 L1: MECHANISM VALIDATION

L1 contains 120 development tasks, 120 transfer tasks, and 240 confirmation tasks spanning three semantic families, three workflow sizes, and three horizons. We match global occupancy-weighted KL and apply updates separately to commonly visited regions, branch-differential regions, and random regions. This intervention isolates update location while controlling overall magnitude. Natural finite-sample updates provide a second test, with small steps prespecified for the main analysis and larger steps reserved for boundary analysis. Exact dynamic programming is used only for mechanism tests and evaluation.

4.2 L2–L3: FINITE-DATA ESTIMATION AND DECISIONS

L2–L3 use 480 independently generated tasks split into 96 development, 96 calibration, and 288 confirmation tasks. The confirmation set contains 216 competing-route tasks and 72 serial controls. Each competing task exposes three candidate root routes followed by execution, failure, repair, and submission, with horizons of 6, 9, or 12. A frozen SmoLLM2-360M-Instruct model supplies the base behavior policy. Independent sets of 128 trajectories per root action generate the policy updates; evaluation uses nested old-data budgets of 16, 64, and 256 trajectories per action and five evaluation seeds.

We compare direct reuse, first-order credit transport, sequential doubly robust estimation (DR), and self-normalized importance sampling (WIS), together with uniform, adaptive, gap-based, and occupancy-sensitive refresh rules. All methods share the old data and the same latent stream of target-policy trajectories; a method may access only trajectories it has paid for and completed. L2 evaluates pairwise credit MSE. L3 evaluates normalized regret AUC over new-execution budgets from 0 to 1,536 steps. Primary comparisons use within-task pairing, stratified bootstrap resampling, and simultaneous confidence intervals.

4.3 L4 AND REAL-TOOL VALIDATION

L4 contains 360 new tasks with no overlap with L1–L3, including 270 competing-route tasks and 90 serial controls. Gate rules, the primary population, and the statistical protocol were frozen before L4 results were read. Each competing task includes ordinary small or moderate learning updates and branch-selective updates constructed from old-policy action-conditioned visitation differences while matching global occupancy-weighted KL. DSC-Gate, Gap-Gate, WIS-Gate, and DR-Gate share the same old data, target policies, calibration quantities, latent new-trajectory stream, and 1,536-step budget. Primary endpoints are terminal regret when the gate stops and actual new tool steps consumed; DSC-Gate is first tested for regret noninferiority to Gap-Gate with margin 0.0005 and then for lower execution cost.

For external validation, we use the retail environment of τ^3 -bench with Qwen3-4B-Instruct-2507 as the behavior policy. The target policy is obtained by LoRA-updating the same base model on non-overlapping training trajectories, while the user simulator, tools, system rules, and decoding settings remain fixed. For each test task, three valid root actions are fixed before downstream outcomes are observed, and each receives 64 behavior-policy trajectories. Because exact state visitation is unavailable, we use a trajectory-level first-order branch-sensitivity estimate and compare it with global policy KL. This experiment tests transfer of the mechanism to a real model-weight update; it is not part of the L1–L4 confirmatory hierarchy.

5 RESULTS

5.1 BRANCH SENSITIVITY EXPLAINS CREDIT DRIFT

After matching global KL, L1 updates concentrated in branch-differential regions produce substantially more pairwise drift than globally similar updates in common regions. Across tasks, the rank-correlation advantage of pairwise sensitivity $|G|$ over global KL for explaining absolute credit drift is 0.839 on average, with a 95% interval of $[0.830, 0.847]$. The first-order correction for local natural updates also passes the prespecified criterion that its error be less than half the error of direct reuse. Similar global update magnitudes therefore need not have similar consequences for a given action comparison.

5.2 TRANSPORT IMPROVES CREDIT ESTIMATES, SELECTIVELY IMPROVING DECISIONS

With competing routes, small or moderate learning updates, and 256 old trajectories per action, first-order transport yields pairwise credit MSE 0.001225 versus 0.001464 for direct reuse, a 16.3% reduction. DR reaches 0.001203 in the same slice. The transport advantage grows with old-data volume because the correction becomes less dominated by sampling noise. Under larger updates, the omitted higher-order remainder erodes this first-order advantage.

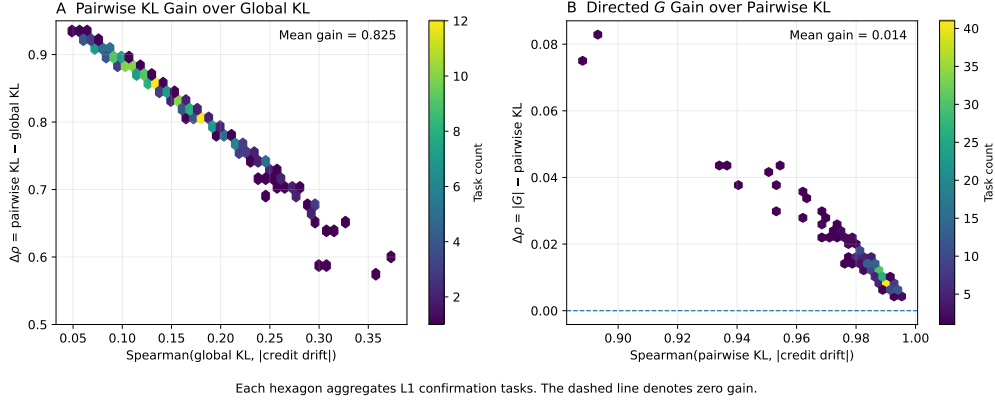


Figure 3: **Branch sensitivity and credit drift in L1.** Panel A shows the gain in Spearman correlation from replacing global KL with pairwise KL. Panel B shows the additional gain from directed branch sensitivity over pairwise KL. Each hexagon aggregates one or more confirmation tasks; the dashed line marks zero gain.

Table 1: **Primary L3 decision comparisons.** Differences are transport-adaptive minus the baseline; lower is better. Intervals are simultaneous for the three prespecified comparisons.

Baseline	Baseline AUC	Difference	Simultaneous interval
Adaptive DR	0.008462	-0.001583	[-0.002651, -0.000544]
Occupancy-sensitive	0.006525	+0.000354	[-0.000147, +0.000891]
Gap-based	0.006494	+0.000385	[-0.000124, +0.000950]

The decision results reveal a different boundary. In the prespecified L3 analysis, transport with adaptive refresh attains normalized regret AUC 0.006879, an 18.7% reduction relative to adaptive DR. The simultaneous interval supports this comparison, while the intervals against gap-based and occupancy-sensitive refresh cross zero. True relevance-filtered pairwise reversals are only 0% and 0.116% for small and moderate learning updates. Lower credit MSE therefore often leaves the selected action unchanged because the old ranking was already decision-sufficient. Under the single-route direction update, where change is concentrated on branch differences, transport and gap-based refresh obtain regret AUC 0.007897 and 0.011174, respectively, a descriptive 29.3% reduction.

5.3 DSC-GATE REDUCES NEW EXECUTION ON THE INDEPENDENT L4 TEST

In the frozen L4 population, mean terminal regret is 0.00673 for DSC-Gate and 0.00669 for Gap-Gate, a difference of +0.00004 with paired 95% interval $[-0.00010, +0.00018]$. The interval’s upper bound lies below the prespecified noninferiority margin of 0.0005. At the same time, DSC-Gate uses 286 new tool steps on average, compared with 472 for Gap-Gate, 521 for WIS-Gate, and 558 for DR-Gate, corresponding to reductions of 39.4%, 45.1%, and 48.7%. All three simultaneous cost-ratio intervals lie below 1.

The gate path changes with branch alignment. Under ordinary learning updates, 55.4% of instances resolve by reuse, 22.8% by transport, and 21.8% by refresh. Under branch-selective updates, the proportions shift to 31.8%, 12.3%, and 55.9%. The gate therefore spends new execution where the policy change is concentrated in downstream regions that differentiate the candidate actions.

5.4 A REAL MODEL-WEIGHT UPDATE SHOWS THE SAME CONDITIONAL PATTERN

The Qwen3-4B LoRA update raises held-out task success from 36.8% to 44.2%, with mean policy KL 0.087 under behavior-policy visitation. Across tasks, trajectory-level branch sensitivity has Spearman correlation 0.58 with reference absolute credit drift, compared with 0.21 for global KL; the difference is +0.37 with 95% bootstrap interval $[0.25, 0.48]$. With 64 old trajectories per action, pairwise MSE

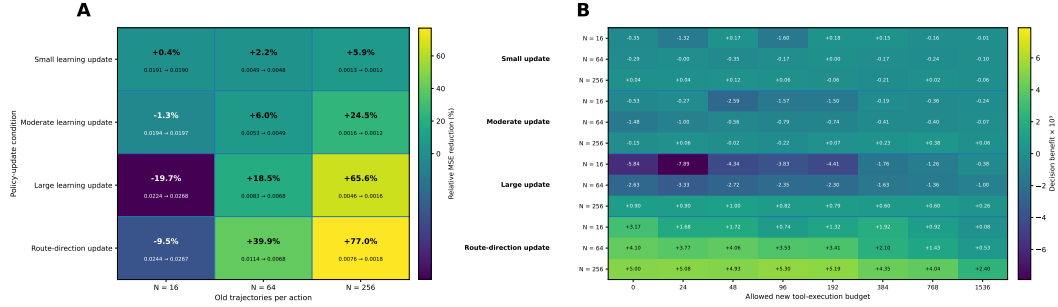


Figure 4: **From credit correction to decision benefit.** Panel A reports the relative reduction in pairwise credit MSE from transport over direct reuse across update conditions and old-data budgets. Panel B reports the corresponding decision benefit across old-data and new-execution budgets. Numerical improvement is most useful when the update can change the action ranking.

Table 2: **Gate results on the independent L4 test set.**

Method	Mean regret	$P(R > 0.02)$	New steps	Any refresh
DSC-Gate	0.00673	2.9%	286	38.9%
Gap-Gate	0.00669	3.0%	472	63.5%
WIS-Gate	0.00734	3.8%	521	69.4%
DR-Gate	0.00812	4.6%	558	72.6%
Reuse only	0.01284	8.1%	0	0%
Transport only	0.00803	4.7%	0	0%

is 0.0136 for direct reuse and 0.0111 for transport, an 18.4% reduction; DR and WIS obtain 0.0109 and 0.0124.

DSC-Gate reaches mean terminal regret 0.0291 versus 0.0288 for Gap-Gate while reducing mean new tool steps from 207 to 143, a 30.9% reduction. Refresh also increases monotonically with branch sensitivity: the lowest sensitivity quartile uses 72 new steps on average and refreshes 15.1% of instances, whereas the highest quartile uses 224 steps and refreshes 54.7%. These data provide external-validity evidence for the same mechanism under an actual parameter update and stateful tool use; they remain separate from the L1–L4 confirmatory claims.

6 DISCUSSION

The experiments support organizing credit management around the evidence needed for the current action comparison. Pairwise branch sensitivity explains why global policy distance can be a poor proxy for credit expiry: an update matters when it overlaps downstream states that the candidate root actions visit differently. First-order transport then offers a low-cost correction when the change is sufficiently local and the historical data can estimate that correction. The gate adds the remaining ingredient, the action gap, so numerical drift triggers new execution only when it can plausibly change the decision. This distinction also explains why improved credit MSE does not always yield improved regret.

The current scope sets clear boundaries on the claim. DSC-Gate uses empirically calibrated radii; the experiments do not establish distribution-free finite-sample coverage or guarantees under arbitrary adaptive stopping. The reported savings concern target-policy interaction and do not include the historical-data collection, model update, and calibration costs of the full training pipeline. The controlled hierarchy spans several semantic families, workflow scales, horizons, update magnitudes, and branch alignments, while the external validation uses one model configuration and one tool environment after a parameter update. Future work should test repeated model updates, broader tool domains, and longer credit lifecycles, including how historical credit accumulates, transfers, and expires across a sequence of policy changes.

7 CONCLUSION

We study when historical action credit remains sufficient after a policy update. Credit drift depends on how the update aligns with downstream branches, while the need for refresh further depends on the existing action gap and finite-data uncertainty. Pairwise branch sensitivity, anchored credit transport, and DSC-Gate operationalize these factors. On an independent test set, DSC-Gate substantially reduces new tool execution while preserving nearly identical regret, and a real tool-agent parameter update shows the same pattern. The results indicate that historical credit often remains useful after a policy update and can sometimes be corrected from existing trajectories before new execution is required. More broadly, continually updated agents need not rebuild all decision estimates after every policy change. Selective reuse, correction, and refresh can reduce repeated interaction while keeping decisions up to date.

AI USE STATEMENT

ChatGPT and Codex were used to assist with literature search, language polishing, code editing, translation, and related writing tasks. All AI-assisted content, including factual statements, analyses, and conclusions, was independently reviewed and verified by the authors. The authors take full responsibility for the accuracy and integrity of the manuscript.

REPRODUCIBILITY STATEMENT

Appendices A–G document the notation, first-order derivation, environment construction, fixed model and update protocols, estimators, calibration procedure, gate implementation, statistical tests, complete supplementary results, cost accounting, and reproducibility artifacts used in the study. The development, calibration, confirmation, and independent L4 test roles are explicitly separated, and the frozen L4 protocol is described in Appendix F.5 and Appendix G.

REFERENCES

- Angelopoulos, A. N., & Bates, S. Conformal Prediction: A Gentle Introduction. *Foundations and Trends in Machine Learning*, 16(4):494–591, 2023. doi: 10.1561/22000000101.
- Bottou, L., Peters, J., Quiñero-Candela, J., Charles, D. X., Chikering, D. M., Portugaly, E., Ray, D., Simard, P., & Snelson, E. Counterfactual Reasoning and Learning Systems: The Example of Computational Advertising. *Journal of Machine Learning Research*, 14:3207–3260, 2013. doi: 10.5555/2567709.2567766.
- Chandak, Y., Shankar, S., & Thomas, P. S. High-Confidence Off-Policy (or Counterfactual) Variance Estimation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2021. doi: 10.1609/aaai.v35i8.16855.
- Chen, Z., Du, W., Zhang, W., Liu, K., Liu, J., Zheng, M., Zhuo, J., Zhang, S., Lin, D., Chen, K., & Zhao, F. T-Eval: Evaluating the Tool Utilization Capability of Large Language Models Step by Step. *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024a. doi: 10.18653/v1/2024.acl-long.515.
- Chen, Z.-Y., Shen, S., Shen, G., Zhi, G., Chen, X., & Lin, Y. Towards Tool Use Alignment of Large Language Models. *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2024b. doi: 10.18653/v1/2024.emnlp-main.82.
- Cieľ, M., Kveton, B., & Kompan, M. Cross-Validated Off-Policy Evaluation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 39(15):16073–16081, 2025. doi: 10.1609/aaai.v39i15.33765.
- Dudík, M., Erhan, D., Langford, J., & Li, L. Doubly Robust Policy Evaluation and Optimization. *Statistical Science*, 29(4):485–511, 2014. doi: 10.1214/14-STS500.
- Efron, B. Bootstrap Methods: Another Look at the Jackknife. *The Annals of Statistics*, 7(1):1–26, 1979. doi: 10.1214/aos/1176344552.
- Engelen, K., Pérez, G. A., & Suilen, M. Data-Efficient Safe Policy Improvement Using Parametric Structure. *ECAI 2025, Frontiers in Artificial Intelligence and Applications*, 2025. doi: 10.3233/FAIA251392.
- Faghih, K., Wang, W., Cheng, Y., Bharti, S., Sriraman, G., Balasubramanian, S., Hosseini, P., & Feizi, S. Tool Preferences in Agentic LLMs are Unreliable. *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2025. doi: 10.18653/v1/2025.emnlp-main.1060.

- Faury, L., Tanielian, U., Dohmatob, E., Smirnova, E., & Vasile, F. Distributionally Robust Counterfactual Risk Minimization. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2020. doi: 10.1609/aaai.v34i04.5797.
- Goodall, A. W., Hamel-De Le Court, E., & Belardinelli, F. Behaviour Policy Optimization: Provably Lower Variance Return Estimates for Off-Policy Reinforcement Learning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2026. doi: 10.1609/aaai.v40i26.39278.
- Guo, Z., Cheng, S., Wang, H., Liang, S., Qin, Y., Li, P., Liu, Z., Sun, M., & Liu, Y. StableToolBench: Towards Stable Large-Scale Benchmarking on Tool Learning of Large Language Models. *Findings of the Association for Computational Linguistics: ACL 2024*, 2024. doi: 10.18653/v1/2024.findings-acl.664.
- Hanna, J., Stone, P., & Niekum, S. Bootstrapping with Models: Confidence Intervals for Off-Policy Evaluation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2017. doi: 10.1609/aaai.v31i1.11123.
- Hanna, J. P., Niekum, S., & Stone, P. Importance Sampling in Reinforcement Learning with an Estimated Behavior Policy. *Machine Learning*, 110:1267–1317, 2021. doi: 10.1007/s10994-020-05938-9.
- Holm, S. A Simple Sequentially Rejective Multiple Test Procedure. *Scandinavian Journal of Statistics*, 6(2):65–70, 1979. doi: 10.2307/4615733.
- Jain, A., Patil, G., Jain, A., Khetarpal, K., & Precup, D. Variance Penalized On-Policy and Off-Policy Actor-Critic. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2021. doi: 10.1609/aaai.v35i9.16964.
- Joshi, S., Zhang, J., & Bareinboim, E. Towards Safe Policy Learning under Partial Identifiability: A Causal Approach. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2024. doi: 10.1609/aaai.v38i12.29198.
- Karabag, M. O., & Topcu, U. On the Sample Complexity of Vanilla Model-Based Offline Reinforcement Learning with Dependent Samples. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2023. doi: 10.1609/aaai.v37i7.25989.
- Lei, J., G’Sell, M., Rinaldo, A., Tibshirani, R. J., & Wasserman, L. Distribution-Free Predictive Inference for Regression. *Journal of the American Statistical Association*, 113(523):1094–1111, 2018. doi: 10.1080/01621459.2017.1307116.
- Li, L., Chu, W., Langford, J., & Schapire, R. E. A Contextual-Bandit Approach to Personalized News Article Recommendation. *Proceedings of the 19th International Conference on World Wide Web (WWW)*, 2010. doi: 10.1145/1772690.1772758.
- Li, M., Zhao, Y., Yu, B., Song, F., Li, H., Yu, H., Li, Z., Huang, F., & Li, Y. API-Bank: A Comprehensive Benchmark for Tool-Augmented LLMs. *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2023. doi: 10.18653/v1/2023.emnlp-main.187.
- Li, R., Tu, J., Su, Y., Liu, Y., Huang, F., Alinejad-Rokny, H., Wong, D. F., Lin, J., & Yang, M. ToolRM: Towards Agentic Tool-Use Reward Modeling. *Findings of the Association for Computational Linguistics: ACL 2026*, 2026a. doi: 10.18653/v1/2026.findings-acl.419.
- Li, W., Li, D., Dong, K., Zhang, C., Zhang, H., Liu, W., Wang, Y., Tang, R., & Liu, Y. Adaptive Tool Use in Large Language Models with Meta-Cognition Trigger. *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (ACL)*, 2025. doi: 10.18653/v1/2025.acl-long.655.
- Li, Z., Wang, H., Zhao, Y., Chen, G., Li, Y., Chen, K., Cao, Y., Ye, G., Chai, H., & Yin, Z. Rethinking the Role of Entropy in Optimizing Tool-Use Behaviors for Large Language Model Agents. *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (ACL)*, 2026b. doi: 10.18653/v1/2026.acl-long.1288.
- Liu, J., Qian, C., Su, Z., Zong, Q., Huang, S., He, B., & Fung, Y. R. CostBench: Evaluating Multi-Turn Cost-Optimal Planning and Adaptation in Dynamic Environments for LLM Tool-Use Agents. *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (ACL)*, 2026. doi: 10.18653/v1/2026.acl-long.584.
- Lu, J., Holleis, T., Zhang, Y., Aumayer, B., Nan, F., Bai, H., Ma, S., Ma, S., Li, M., Yin, G., Wang, Z., & Pang, R. ToolSandbox: A Stateful, Conversational, Interactive Evaluation Benchmark for LLM Tool Use Capabilities. *Findings of the Association for Computational Linguistics: NAACL 2025*, 2025. doi: 10.18653/v1/2025.findings-naacl.65.
- Narita, Y., Okumura, K., Shimizu, A., & Yata, K. Counterfactual Learning with General Data-Generating Policies. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2023. doi: 10.1609/aaai.v37i8.26113.

- Peters, J., Mülling, K., & Altun, Y. Relative Entropy Policy Search. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2010. doi: 10.1609/aaai.v24i1.7727.
- Qian, C., Acikgoz, E. C., Wang, H., Chen, X., Sil, A., Hakkani-Tür, D., Tur, G., & Ji, H. SMART: Self-Aware Agent for Tool Overuse Mitigation. *Findings of the Association for Computational Linguistics: ACL 2025*, pp. 4604–4621, 2025. doi: 10.18653/v1/2025.findings-acl.239.
- Shapira, E., Madmon, O., Apel, R., Tennenholtz, M., & Reichart, R. Human Choice Prediction in Language-Based Persuasion Games: Simulation-Based Off-Policy Evaluation. *Transactions of the Association for Computational Linguistics*, 13:980–1006, 2025. doi: 10.1162/tacl.a.16.
- Shi, Z., Gao, S., Chen, X., Feng, Y., Yan, L., Shi, H., Yin, D., Ren, P., Verberne, S., & Ren, Z. Learning to Use Tools via Cooperative and Interactive Agents. *Findings of the Association for Computational Linguistics: EMNLP 2024*, 2024. doi: 10.18653/v1/2024.findings-emnlp.624.
- Simão, T. D., & Spaan, M. T. J. Safe Policy Improvement with Baseline Bootstrapping in Factored Environments. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2019. doi: 10.1609/aaai.v33i01.33014967.
- Simão, T. D., Suilen, M., & Jansen, N. Safe Policy Improvement for POMDPs via Finite-State Controllers. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2023. doi: 10.1609/aaai.v37i12.26763.
- Sullivan, M., Hartmann, M., & Koller, A. Procedural Environment Generation for Tool-Use Agents. *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2025. doi: 10.18653/v1/2025.emnlp-main.936.
- Sutton, R. S. Learning to Predict by the Methods of Temporal Differences. *Machine Learning*, 3:9–44, 1988. doi: 10.1007/BF00115009.
- Swaminathan, A., & Joachims, T. Counterfactual Risk Minimization. *Proceedings of the 24th International Conference on World Wide Web Companion*, 2015. doi: 10.1145/2740908.2742564.
- Tennenholtz, G., Shalit, U., & Mannor, S. Off-Policy Evaluation in Partially Observable Environments. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2020. doi: 10.1609/aaai.v34i06.6590.
- Thomas, P. S., & Brunskill, E. Importance Sampling with Unequal Support. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2017. doi: 10.1609/aaai.v31i1.10932.
- Thomas, P., Theocharous, G., & Ghavamzadeh, M. High-Confidence Off-Policy Evaluation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 2015. doi: 10.1609/aaai.v29i1.9541.
- Wang, B., Fang, H., Eisner, J., Van Durme, B., & Su, Y. LLMs in the Imaginarium: Tool Learning through Simulated Trial and Error. *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024. doi: 10.18653/v1/2024.acl-long.570.
- Wang, H., Huang, W., Wang, Y., Xi, Y., Lu, J., Zhang, H., Hu, N., Liu, Z., Pan, J. Z., & Wong, K.-F. Rethinking Stateful Tool Use in Multi-Turn Dialogues: Benchmarks and Challenges. *Findings of the Association for Computational Linguistics: ACL 2025*, 2025. doi: 10.18653/v1/2025.findings-acl.284.
- Williams, R. J. Simple Statistical Gradient-Following Algorithms for Connectionist Reinforcement Learning. *Machine Learning*, 8:229–256, 1992. doi: 10.1007/BF00992696.
- Wu, Z., Lou, X., Ma, X., Li, Y., Liu, W., Zhang, W., Wang, J., & Zhang, Z. Agent-Dice: Disentangling Knowledge Updates via Geometric Consensus for Agent Continual Learning. *Findings of the Association for Computational Linguistics: ACL 2026*, pp. 18245–18262, 2026a. doi: 10.18653/v1/2026.findings-acl.908.
- Wu, B., Meij, E., & Yilmaz, E. Beyond Static Toolsets: Self-Evolving LLM Tool Agents via Continual Documentation Adaptation. *Findings of the Association for Computational Linguistics: ACL 2026*, 2026. doi: 10.18653/v1/2026.findings-acl.1082.
- Xuan, W., Zeng, Q., Qi, H., Xiao, Y., Wang, J., & Yokoya, N. The Confidence Dichotomy: Analyzing and Mitigating Miscalibration in Tool-Use Agents. *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (ACL)*, 2026. doi: 10.18653/v1/2026.acl-long.520.
- Ye, J., Li, S., Li, G., Huang, C., Gao, S., Wu, Y., Zhang, Q., Gui, T., & Huang, X. ToolSword: Unveiling Safety Issues of Large Language Models in Tool Learning Across Three Stages. *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024a. doi: 10.18653/v1/2024.acl-long.119.

Ye, J., Wu, Y., Gao, S., Huang, C., Li, S., Li, G., Fan, X., Zhang, Q., Gui, T., & Huang, X. RoTBench: A Multi-Level Benchmark for Evaluating the Robustness of Large Language Models in Tool Learning. *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2024b. doi: 10.18653/v1/2024.emnlp-main.19.

Yu, X., King, I., & Lyu, M. R. Risk Control of Best Arm Identification in Multi-Armed Bandits via Successive Rejects. *2017 IEEE International Conference on Data Mining (ICDM)*, 2017. doi: 10.1109/ICDM.2017.153.

Zhuang, Y., Yang, J., Jiang, H., Liu, X., Cheng, K., Lokegaonkar, S., Gao, Y., Ping, Q., Liu, T., Huang, B., Li, Z., Wang, Z., Chen, P., Wang, R., Zhang, R., Zalmout, N., Nigam, P., Yin, B., & Zhang, C. Hephaestus: Improving Fundamental Agent Capabilities of Large Language Models through Continual Pre-Training. *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pp. 6041–6068, 2025. doi: 10.18653/v1/2025.naacl-long.308.

A DEFINITIONS AND DERIVATIONS

A.1 NOTATION AND INFORMATION BOUNDARIES

The context is fixed within each action comparison and omitted from the notation in the main text. Actions a and b are candidate root actions, μ is the downstream policy that generated the old data, π is the downstream policy to be deployed, and H is the total horizon including the root intervention. The terminal return is 1 for a successful submission and 0 otherwise. $Q_\pi(a)$ takes expectation over environment randomness and subsequent actions under π after the root action, and $c_\pi(a,b) = Q_\pi(a) - Q_\pi(b)$. L1 may contain multiple contexts and action pairs. Each L2-L3 task fixes three root routes and therefore contains three unordered action pairs. The task, rather than the trajectory or action pair, is the basic unit of statistical resampling.

The L2-L3 estimators receive only old trajectories and the known behavior- and target-policy tables. Dynamic-programming ground truth is used exclusively for evaluation and error decomposition. Prompts to the base language model describe stage-level success probabilities, but the trajectory-estimation and allocation interfaces do not receive simulator transition tables. The inputs to the behavior policy, the inputs to the estimator, and the ground truth available to the evaluator must remain distinct.

A.2 TRAJECTORY DERIVATION OF FIRST-ORDER TRANSPORT

Assume that the target policy is absolutely continuous on the support of the old policy and that the environment transition mechanism is unchanged. Conditional on root intervention a , the environmental probability factors cancel in the trajectory likelihood ratio. Along the interpolated policy μ_α , the trajectory ratio is the product of downstream policy ratios

$$\frac{P_{\mu_\alpha}}{P_\mu} = \prod_t (1 + \alpha z_t)$$

$$Q_\pi(a) = Q_\mu(a) + E_\mu[R \sum_t z_t] + r_a$$

Because the horizon is finite, the finite sum can be differentiated directly. At $\alpha = 0$, only terms containing a single z_t remain, yielding the directional derivative used in the main text. Setting $\alpha = 1$ shows that the higher-order remainder contains all products of two or more z_t terms. The remainder depends on both update magnitude and the joint occurrence of updates along the same trajectory; the first-order term cannot remove it.

Let $g(a) = \mathbb{E}_\mu[R \sum_t z_t | a]$, so $G(a,b) = g(a) - g(b)$. Conditioning each directional-derivative term on state and remaining horizon gives the visitation-difference inner product in the main text. A commonly visited region cancels only when it has the same weighted effect on both root branches; common visitation alone does not make the region invariant.

A.3 BASELINES AND CROSS-FITTING

For a baseline $b(S_t, h_t)$ fitted independently of the current evaluation trajectory, the action-conditional expectation satisfies $\sum_u \mu(u|s, h) [\pi(u|s, h) / \mu(u|s, h) - 1] b(s, h) = 0$ conditional on the state, horizon, and training fold. The baseline therefore leaves the expectation of the first-order correction unchanged. In our implementation, b is the old-policy-weighted state-time action-return estimate fitted on all visited downstream nodes in the opposite odd-even fold.

Cross-fitting prevents a trajectory from fitting its own baseline, although the two evaluation folds still share training information, so the naive variance of the pooled sample remains approximate. We address practical uncertainty with residual-variance compensation on the development set and scale factors from the calibration set. This construction does not imply strict finite-sample coverage.

A.4 RANKING STABILITY AND REGRET

When c_μ is nonzero, the true ranking is preserved if and only if $c_\mu c_\pi > 0$; equality indicates a tie under the new policy. The triangle inequality gives $|\Delta c| < |c_\mu|$ as a sufficient condition. Equivalently, ranking stability can be written as $\Delta c / c_\mu > -1$ when c_μ is nonzero. This ratio is unstable near zero old credit, so Figure 1 displays old and new credit directly and does not exclude near-ties through the ratio.

With two actions and no tie, the regret of an incorrect ranking is $|c_\pi|$. With multiple actions, reversing two suboptimal actions may leave the optimal choice unchanged. We therefore use true three-action decision regret rather than pairwise reversal rate as the decision endpoint. If every estimated action value has absolute error at most ϵ , the regret of the estimated best action is at most 2ϵ . This is a general stability fact, not a new certification guarantee introduced here.

B ENVIRONMENT AND POLICY PROTOCOL

B.1 L1 MECHANISM EXPERIMENTS

The confirmatory hypotheses, thresholds, and configuration for L1 are fixed in protocol.json. The model is HuggingFaceTB/SmolLM2-360M-Instruct at revision a10cc1512eabd3dde888204e902eca88bddb4951. The development, transfer, and confirmation splits contain 120, 120, and 240 tasks. Semantic families are build, data, and publish; workflow sizes are 4, 6, and 8; horizons are 6, 9, and 12; and each task contains 12 contexts.

The controlled experiment compares differential, common, and random update supports while matching update magnitude at the same target global occupancy-weighted KL. The four KL target fractions are 0.15, 0.35, 0.60, and 0.85, the maximum interpolation coefficient is 0.65, and the support fraction is 0.2. Natural updates use step sizes 0.5, 1, 2, 4, and 8. The first three form the main analysis and the last two probe the boundary. Update seeds are 11, 33, and 55, with $\text{update_rollouts} = 64$ and $\text{probe_rollouts} = 128$. Sign accuracy is computed on eligible action pairs using the protocol threshold $\text{sign_gap} = 0.05$ and must not be conflated with the $\epsilon = 0.02$ reversal statistic used in L2-L3.

The L1 environment is an n -node directed acyclic workflow. A bit mask records whether each artifact is valid. A node action is available only when every parent is valid. Success validates that node and invalidates all descendants; an unmet precondition or stochastic failure leaves the state unchanged. Submission terminates immediately and returns 1 only when every node is valid. A state query consumes one step. Node success probabilities are sampled independently from $\{0.6, 0.8, 1.0\}$. Development tasks are random nonchain DAGs, transfer tasks are chains, and the confirmation set is split evenly between chains and nonchains. DAGs are generated in a random topological order with edge probability 0.5, excluding exact chains. Combinations of task family, dependency structure, and success probabilities do not repeat. Operations correspond to generating modules, transforming tables, or producing pages, all governed by the same finite-workflow state structure.

Contexts are drawn from reachable states, four per horizon, preferentially requiring the shortest possible success path to lie in $[2, H]$. If necessary, remaining contexts are drawn from states from which success is still possible, and contexts may repeat when fewer than four candidates are available. Selection depends on feasibility and does not filter by value gap or method performance. Root

actions include every node action, submission, and state query. The base model reads the state, action descriptions, and remaining steps, then produces a policy from constrained action-label probabilities.

The support set is constructed from old-policy occupancy without querying action values. For each context and unordered action pair, D is the mean absolute occupancy difference and C is the mean smaller occupancy. Candidate nodes are state-horizon pairs with global occupancy above 10^{-12} . Support size is $\text{ceil}(0.2 \text{ times the number of candidates})$, capped at one third of the candidates. Differential support takes the largest D values; common support takes the same number from the remaining nodes ranked by $C/(D+10^{-9})$; random support samples without replacement. On the chosen support, the old policy is mixed with the tie-uniform greedy policy under exact old Q values. Global KL is $\text{KL}(\text{new} \parallel \text{old})$, normalized and weighted by mean downstream occupancy under the old root-action distribution. Each of the four targets is a specified fraction of the smallest KL attainable at $\alpha = 0.65$ across the three support types, and α is matched by 60 steps of binary search. Pairwise KL uses absolute occupancy difference to weight local KL and is not normalized in the same way.

Natural updates sample a return table $\text{Binomial}(64, Q_\mu)/64$ for every action at every candidate node, then form a mirror-descent update proportional to $\mu(\text{uls}, h) \exp[\eta \hat{A}(s, h, u)]$. An independent probe table $\text{Binomial}(128, Q_\mu)/128$ supplies local value changes for sampled G . Occupancy and the old-credit anchor remain exact. Sampled G is therefore a model-assisted diagnostic with finite return noise, rather than a pure trajectory-based off-policy estimator or evidence of realized execution savings. L2-L3 test the implementable procedure using transition-by-transition old trajectories and paid new data.

B.2 L2-L3 WORKFLOWS

The task-generation seed is 270917. Within each split, the three task families and horizons are assigned in a crossed design, and one quarter of tasks are serial controls. A competing-route task independently samples three route lengths, each containing two to four stages. Fast, careful, and repair success probabilities at each stage are sampled uniformly from $[0.35, 0.94]$, $[0.55, 0.96]$, and $[0.55, 0.98]$. Serial controls have route lengths 2, 3, and 4, share one set of probabilities across all stages, and draw the three probabilities from $[0.48, 0.90]$, $[0.60, 0.95]$, and $[0.65, 0.98]$. Route indices are randomly permuted, and tasks are not filtered by exact value.

In a normal stage, the agent can execute quickly or carefully. Success advances one stage; fast failure causes damage, whereas careful failure leaves the state unchanged. In a damaged state, repair is the only valid action. Successful repair restores the normal state, and failed repair leaves the state damaged. Submission becomes valid only after all stages are complete. Every tool consumes one step. A successful submission returns 1, and horizon exhaustion returns 0. Choosing the root route also consumes one step, so the shortest complete trajectory costs the number of route stages plus two. Shared dynamics in the serial controls do not imply that rankings remain exactly invariant after an arbitrary finite-sample learning update.

B.3 BASE POLICY AND INDEPENDENT UPDATES

The base-model revision matches L1. Given a static state snapshot and a valid-tool mask, the model outputs action propensities that are mixed with 15% uniform exploration over valid actions. It does not observe the remaining horizon. Downstream policy tables are indexed by remaining horizon and can therefore represent time-dependent tabular learning updates.

Each root route independently generates 128 trajectories under μ for policy updating; these trajectories are separate from the credit-estimation data. Terminal returns are aggregated by state, remaining horizon, and action. Action value is estimated as $(\text{successes} + 0.5)/(\text{visits} + 1)$, with unseen actions reverting to 0.5. The estimated advantage is multiplied by intensity η , used to multiplicatively reweight μ through a softmax, and then mixed with 10% μ . Values $\eta = 0.7, 1.5$, and 4 define small, moderate, and large updates.

For the single-route direction condition, the route and sign are fixed during task generation. Only that route receives log-weight offsets of ± 0.75 on fast and careful actions, followed by the same 10% mixture with the old policy. This condition isolates directional effects. It is not selected from observed gains and does not replace evidence from learning updates. The language-model weights remain fixed throughout these experiments.

C ESTIMATORS AND UNCERTAINTY

C.1 SHARED DATA AND FOUR ESTIMATORS

Evaluation seeds are 11, 22, 33, 44, and 55. For each task, seed, and route, we store up to 256 old trajectories; budgets of 16, 64, and 256 are nested prefixes. Each trajectory records downstream states, actions, behavior probabilities, terminal return, and length including the root action. The two-fold baseline uses visited nodes from all routes without sampling additional hidden-state returns.

Direct reuse estimates $Q_\mu(a)$ by its sample mean and substitutes that estimate for $Q_\pi(a)$. Transport adds the anchored correction from the main text. Sequential DR begins at the baseline target-policy state value and sums the cumulative importance weight times immediate return plus next-state baseline value minus current-action baseline value. The baseline action value is fitted from μ data, and the state baseline is weighted under π . With exact ratios and independent fitting, telescoping does not require the baseline to equal Q_π exactly.

WIS assigns each trajectory the product W of all downstream ratios and estimates value as $\text{sum}(WR)/\text{sum}(W)$. Its finite-sample bias is retained in evaluation. Effective sample size is $(\text{sum } W)^2/\text{sum}(W^2)$. WIS variance is the sample variance of the normalized influence quantity $W(R - \text{estimated mean})/\text{mean}(W)$, divided by N . Other estimators use the sample variance of their trajectory-level quantities divided by N . Every estimator includes a variance floor of $1/(4N^2)$. Raw L2 predictions are not clipped.

C.2 DEVELOPMENT AND CALIBRATION

For every update condition and root route, development and calibration tasks each receive 1,024 target-policy reference trajectories. On the development set, squared prediction error against the reference value is computed separately by old-data budget and estimator. The estimated sampling and reference variances are subtracted, and the remainder is clipped at zero to form additional residual variance. This calculation uses only the small and moderate primary updates, after which it is frozen for all conditions.

For action pair (a, b) , define the old credit, true credit drift, and target credit as

$$c_\mu(a, b), \Delta c(a, b) = c_\pi(a, b) - c_\mu(a, b), c_\pi(a, b).$$

The corresponding estimates are direct reuse $\hat{c}_R$, first-order correction $\hat{\delta}$, and transported credit

$$\hat{c}_T = \hat{c}_R + \hat{\delta}.$$

The three errors are therefore

$$e_R = \hat{c}_R - c_\mu, e_\Delta = \hat{\delta} - \Delta c, e_T = \hat{c}_T - c_\pi.$$

The development set separately estimates the residual variance in each error that is not explained by analytic sampling variance, and these estimates are then frozen for calibration. Here e_Δ contains both finite-sample error and the higher-order remainder of the first-order approximation.

On the independent calibration set, each error is standardized by its compensated standard error, and the maximum is taken over the prespecified action pairs, primary update conditions, and evaluation seeds within each task. At nominal level 0.95, the following order statistic is selected from the 96 calibration tasks

$$\lceil (96 + 1) \times 0.95 \rceil = 93$$

yielding the frozen scale factors

$$\kappa_R, \kappa_\Delta, \kappa_T.$$

These factors are used for both the empirical acceptance diagnostic in L2 and the decision radii in DSC-Gate. Because reference quantities contain sampling noise, cross-fitted estimates are dependent, and first-order transport includes a higher-order remainder, we interpret the procedure as empirical calibration and do not claim formal coverage.

C.3 DECISION-SUFFICIENCY RADII

Using the frozen scale factors from Section C.2, define $r_R = \kappa_R s_R$, $r_\Delta = \kappa_\Delta s_\Delta$, $r_T = \kappa_T s_T$, where s_R, s_Δ, s_T are the compensated standard errors for $\hat{c}_R, \hat{\delta}, \hat{c}_T$, respectively. Because $\hat{\delta} = \hat{c}_T - \hat{c}_R$, computation of s_Δ retains the covariance induced by the old trajectories shared between $\hat{c}_T$ and $\hat{c}_R$. The three radii correspond to $|\hat{c}_R - c_\mu|$, $|\hat{\delta} - \Delta c|$, $|\hat{c}_T - c_\pi|$.

When $|\hat{c}_R| - r_R > |\hat{\delta}| + r_\Delta$, the empirical lower bound on the old action gap exceeds the empirical upper bound on credit drift. If the corresponding empirical error events hold, this condition implies $|c_\mu| > |\Delta c|$, and therefore preserves the old ranking by Section A.4. If it fails but $|\hat{c}_T| > r_T$, the transported action difference is separated from zero and determines the ranking. All remaining comparisons enter the refresh set.

These radii define a frozen empirical decision rule. They do not provide distribution-free coverage or coverage under arbitrary stopping.

D BUDGETED REFRESH AND EVALUATION ALGORITHM

D.1 OLD-DATA PRIORS AND SAMPLING

For route a and estimator e , let m be the raw estimated mean, v the variance after development-set residual compensation, and N the old sample size. The pseudo-count is $\min(N, 0.25/\max(v, 10^{-12}))$, and prior successes equal the pseudo-count times m clipped to $[0, 1]$. Successes and counts from newly completed trajectories are added to this prior. Beta(0.5, 0.5) smoothing then gives the posterior mean and approximate variance.

The uniform rule prioritizes the route with the fewest completed new trajectories. The adaptive rule uses the current leader as reference, smooths each estimated gap by $\max(\text{estimated gap}, 0.02)$, and allocates in proportion to posterior variance divided by squared gap. For the leader, the gap to its closest competitor is used. The occupancy-sensitive baseline further multiplies this score by 1 plus pairwise local KL divided by mean pairwise local KL, where local KL is estimated from downstream visitation in the old trajectories. Sampling-score ties are broken at random. Final decisions are distributed uniformly among posterior maxima within a tolerance of 10^{-12} .

Uniform and adaptive transport share the same prior construction, as do the two DR variants. Gap-based and occupancy-sensitive refresh use the reuse prior. The two fresh variants use no old pseudo-data. Reuse-only selects from the old mean and always spends zero new steps. WIS uses adaptive allocation as an additional strong baseline.

D.2 EXECUTION AND INFORMATION ISOLATION

Algorithm 1 receives the old trajectories, μ and π , frozen calibration quantities, and the allowed budget grid. Cross-fitting first produces route-level means and variances for each estimator, which initialize the corresponding priors. In each round, the method selects a route using only the currently visible posterior and runs the target policy until the trajectory ends or the budget is exhausted. Transitions from an incomplete trajectory count against the budget, but its terminal outcome does not update the posterior. The current decision distribution and actual expenditure are saved at every budget point before execution continues. Only completed trajectories update the posterior. An independent evaluator finally computes regret and expected success.

All methods share a latent stream of route trajectories to reduce simulation noise in paired comparisons. Route length and future outcomes are unavailable before a sampling decision. Unpurchased trajectories in the pool are not learner data. Trajectories are generated through actual stepwise environment transitions rather than Bernoulli draws from exact Q .

D.3 DECISION-SUFFICIENCY AND BASELINE GATES

Using only old trajectories, DSC-Gate first computes the reuse difference $\hat{\mathbf{c}}_{\mathbf{R}}(\mathbf{a}, \mathbf{b})$, first-order correction $\hat{\delta}(\mathbf{a}, \mathbf{b})$, transported difference $\hat{\mathbf{c}}_{\mathbf{T}}(\mathbf{a}, \mathbf{b}) = \hat{\mathbf{c}}_{\mathbf{R}}(\mathbf{a}, \mathbf{b}) + \hat{\delta}(\mathbf{a}, \mathbf{b})$, and empirically calibrated radii $\mathbf{r}_{\mathbf{R}}, \mathbf{r}_{\Delta}, \mathbf{r}_{\mathbf{T}}$. These old-data quantities remain fixed throughout refresh. For each competitor to the current leading route, if

$$|\hat{\mathbf{c}}_{\mathbf{R}}| - \mathbf{r}_{\mathbf{R}} > |\hat{\delta}| + \mathbf{r}_{\Delta},$$

the comparison is marked reuse-resolved. If that condition fails but

$$|\hat{\mathbf{c}}_{\mathbf{T}}| > \mathbf{r}_{\mathbf{T}},$$

the comparison is marked transport-resolved. Every other comparison enters the refresh set.

For gate $\mathbf{e}$, let $\mathbf{m}_{\mathbf{t},\mathbf{e}}(\mathbf{a})$ and $\mathbf{v}_{\mathbf{t},\mathbf{e}}(\mathbf{a})$ denote the posterior mean and approximate variance of route $\mathbf{a}$ after refresh round $\mathbf{t}$. For an action pair in the refresh set, define

$$\hat{\mathbf{c}}_{\mathbf{t},\mathbf{e}}^{\mathbf{F}}(\mathbf{a}, \mathbf{b}) = \mathbf{m}_{\mathbf{t},\mathbf{e}}(\mathbf{a}) - \mathbf{m}_{\mathbf{t},\mathbf{e}}(\mathbf{b}).$$

Under the route-wise Beta posterior approximation in Section D.1, route posteriors are treated as conditionally independent, so the approximate standard error of the action difference is

$$\mathbf{s}_{\mathbf{t},\mathbf{e}}^{\mathbf{F}}(\mathbf{a}, \mathbf{b}) = \sqrt{\mathbf{v}_{\mathbf{t},\mathbf{e}}(\mathbf{a}) + \mathbf{v}_{\mathbf{t},\mathbf{e}}(\mathbf{b})}.$$

Using the frozen empirical scale factor $\kappa_{\mathbf{e}}$ for the corresponding estimator from Section C.2, define the refresh radius as

$$\mathbf{r}_{\mathbf{t},\mathbf{e}}^{\mathbf{F}}(\mathbf{a}, \mathbf{b}) = \kappa_{\mathbf{e}} \mathbf{s}_{\mathbf{t},\mathbf{e}}^{\mathbf{F}}(\mathbf{a}, \mathbf{b}).$$

When

$$|\hat{\mathbf{c}}_{\mathbf{t},\mathbf{e}}^{\mathbf{F}}(\mathbf{a}, \mathbf{b})| > \mathbf{r}_{\mathbf{t},\mathbf{e}}^{\mathbf{F}}(\mathbf{a}, \mathbf{b})$$

the comparison is marked refresh-resolved, with direction determined by the sign of $\hat{\mathbf{c}}_{\mathbf{t},\mathbf{e}}^{\mathbf{F}}(\mathbf{a}, \mathbf{b})$. Like the old-data radii, this criterion is an empirically calibrated stopping rule and carries no distribution-free finite-sample coverage guarantee.

Unresolved action pairs form a refresh graph, and only routes incident to that graph may receive new target-policy trajectories. Route allocation follows the variance-over-squared-gap rule from Section D.1. After each new trajectory completes, only that route's posterior mean and variance are updated. The current leader is then recomputed and compared with every competitor using reuse, transport, or refresh evidence. Execution stops as soon as every necessary comparison is resolved. At $\mathbf{B}_{\max} = 1536$, the procedure stops forcibly and selects from the current posterior.

D.4 METRICS

For L2 MSE, the three action pairs are first averaged within each task and then averaged over seeds and the specified conditions. An ϵ -relevant true reversal requires $c_{\mu}c_{\pi} < 0$ and $|c_{\pi}| > 0.02$. This statistic measures a change in true value and is distinct from an incorrect choice caused by estimation noise. The unseen fraction records the share of state-time-action tuples visited by evaluation trajectories that do not appear in the opposite training fold. The ESS ratio is normalized by N .

For each L3 task, update, seed, old-data budget, method, and new-execution budget, we save five metrics: expected regret, probability of selecting an action with regret above 0.02, expected success, new tool steps consumed, and new trajectories completed. The curve is integrated by the trapezoidal rule over $\log(1+B)$ and divided by the total horizontal width $\log(1537)$, yielding normalized AUC. L4

does not integrate the full budget curve. Instead, it records expected regret, $P(\text{regret} > 0.02)$, actual new tool steps, completed trajectories, any refresh, budget-cap incidence, and the final proportions of comparisons resolved by reuse, transport, and refresh when each gate stops.

E STATISTICAL ANALYSIS

The three prespecified L1 statistics are task-level $\log(\text{MSE}_{\text{differential}}/\text{MSE}_{\text{common}}) - \log(1.25)$; Spearman($|G|, \text{ldriftl}$) - Spearman(global KL, ldriftl) - 0.1; and $\text{MSE}_{\text{first-order}} - 0.5 \text{MSE}_{\text{reuse}}$. Each uses 10,000 task-level bootstrap resamples of the 240 confirmation tasks. The respective passing criteria are a lower interval bound above zero, a lower bound above zero, and an upper bound below zero. The mean task-level log ratio differs from the ratio of aggregated MSEs, so the L1-A value 6.7068 must not be described directly as a multiplicative drift factor.

The primary L3 population comprises 216 competing-route confirmation tasks, equally weighting small and moderate learning updates, three old-data budgets, and five seeds. Method differences are formed within the same task and seed. Tasks are then resampled within task-family and control-type strata, while seeds are resampled globally with shared indices to preserve pairing. We perform 10,000 bootstrap resamples. Each of the three primary comparisons uses two-sided $\alpha = 0.05/3$, corresponding to quantiles 0.05/6 and $1 - 0.05/6$, to form Bonferroni simultaneous intervals. The complete confirmation set contains 288 tasks; action pairs and trajectories are not treated as independent confirmation samples.

The original directional conclusion for L3 remains unchanged. Among the simultaneous intervals comparing transport with DR, occupancy-sensitive refresh, and gap-based refresh, only the DR comparison lies entirely below zero. The update-slice heat map, the 29.3% gain under direction updates, and the 16.3% numerical gain at the largest old-data budget are descriptive point estimates.

L4 uses an independent task set with no overlap with L1-L3 and defines a new confirmatory question. The prespecified primary population equally weights ordinary and branch-selective small or moderate learning updates on 270 competing-route tasks, then equally weights the three old-data budgets and five evaluation seeds. The first step tests whether terminal regret under DSC-Gate is noninferior to Gap-Gate at a fixed margin of 0.0005. Only after passing that test do we test whether DSC-Gate uses fewer new tool steps than Gap-Gate, WIS-Gate, and DR-Gate simultaneously. The original task is the bootstrap unit. Whenever a task is resampled, its ordinary and branch-selective updates remain paired. Tasks are resampled within task-family strata, and evaluation seeds use shared global indices. We perform 10,000 paired bootstrap resamples. After the regret noninferiority test passes, the three cost ratios are compared with 1 using Bonferroni simultaneous intervals.

F COMPLETE RESULTS AND SUPPLEMENTARY ANALYSES

F.1 L1 CONFIRMATION TESTS AND LARGE UPDATES

Table A1. Prespecified L1 confirmation tests. Statistics are defined in Appendix E; $n = 240$ for each test.

Test	Mean statistic	95% interval	Result
L1-A	6.706786	[5.872131, 7.521799]	Passed
L1-B	0.7387006	[0.7298759, 0.7472724]	Passed
L1-C	-0.001264017	[-0.001395845, -0.001137836]	Passed

Figure A1. Matched-KL results for controlled updates. Columns are update levels at matched global occupancy-weighted KL; cells contain mean pairwise drift MSE across confirmation tasks. Common, differential, and random regions are all retained. This aggregate is shown for interpretation; the formal L1-A statistic remains the task-level log ratio.

Table A2. L1 natural-update boundary by step size. Each row contains 240 tasks times 3 update seeds.

Common region	9.96e-05	2.59e-04	4.85e-04	7.34e-04
Differential region	2.20e-04	5.25e-04	9.10e-04	1.29e-03
Random region	3.98e-04	1.04e-03	1.96e-03	2.96e-03
	KL = 0.0130	KL = 0.0303	KL = 0.0520	KL = 0.0736

Step size	Reuse MSE	Exact first-order MSE	Sampled first-order MSE	Eligible-pair reversal rate
0.5	3.750e-04	1.443e-06	1.518e-06	0.0000%
1	1.688e-03	3.261e-05	3.288e-05	0.0000%
2	7.336e-03	8.734e-04	8.739e-04	0.0000%
4	2.180e-02	1.421e-02	1.420e-02	0.0040%
8	3.912e-02	4.105e-02	4.106e-02	0.0386%

The table reports mean MSE at each natural-update step size, not the mean task-level relative improvement. At step size 8, task-averaged first-order MSE exceeds reuse MSE, showing that the local approximation cannot be extrapolated directly to large updates. This result is compatible with a positive task-level relative improvement because the two summaries weight tasks differently.

F.2 ALL L2 ESTIMATORS AND NOISE DIAGNOSTICS

Table A3. Pairwise MSE on competing routes for all update conditions and old-data budgets. Predictions are raw and unclipped.

Update	Old N	Reuse	Transport	DR	WIS
Small learning update	16	0.019084	0.019003	0.025226	0.018989
Small learning update	64	0.004864	0.004758	0.005483	0.004767
Small learning update	256	0.001289	0.001213	0.001199	0.001216
Moderate learning update	16	0.019444	0.019702	0.026032	0.019536
Moderate learning update	64	0.005250	0.004933	0.005670	0.004952
Moderate learning update	256	0.001639	0.001238	0.001206	0.001250
Large learning update	16	0.022422	0.026844	0.035191	0.025206
Large learning update	64	0.008317	0.006775	0.007897	0.006962

Update	Old N	Reuse	Transport	DR	WIS
Large learning update	256	0.004622	0.001591	0.001514	0.001705
Route-direction update	16	0.024356	0.026677	0.044400	0.026311
Route-direction update	64	0.011379	0.006842	0.010116	0.008078
Route-direction update	256	0.007637	0.001754	0.001866	0.002044

Table A4. Empirical acceptance and data-support diagnostics for the primary updates. Small and moderate updates are equally weighted; post-acceptance error is the aggregated error numerator divided by the aggregated acceptance rate.

Old N	Estimator	Acceptance rate	Post-acceptance error	Unseen fraction	ESS/N
16	Reuse	5.74%	0.000%	23.36%	0.976
16	Transport	5.57%	0.000%	23.36%	0.976
16	DR	4.31%	0.000%	23.36%	0.976
16	WIS	4.32%	0.000%	23.36%	0.976
64	Reuse	30.43%	0.000%	5.16%	0.975
64	Transport	25.76%	0.000%	5.16%	0.975
64	DR	25.08%	0.000%	5.16%	0.975
64	WIS	25.11%	0.000%	5.16%	0.975
256	Reuse	42.41%	0.000%	0.53%	0.974
256	Transport	46.84%	0.000%	0.53%	0.974
256	DR	44.55%	0.000%	0.53%	0.974
256	WIS	46.53%	0.000%	0.53%	0.974

Acceptance and post-acceptance ranking error should be read together, so a low error obtained by accepting only a few cases is not mistaken for broad reuse reliability. The unseen fraction and ESS are data-support diagnostics and do not constitute formal coverage guarantees.

F.3 ALL L3 METHODS AND UPDATE CONDITIONS

Table A5. Normalized regret AUC for all methods on competing routes. Old-data budgets and seeds are equally weighted; the primary analysis averages small and moderate updates.

Method	Primary analysis	Small learning update	Moderate learning update	Large learning update	Route-direction update
Direct reuse	0.008471	0.008571	0.008371	0.008724	0.014458
Fresh uniform	0.067821	0.068636	0.067007	0.061789	0.069343
Fresh adaptive	0.065306	0.066243	0.064370	0.059589	0.066096
Gap-based refresh	0.006494	0.006602	0.006385	0.006808	0.011174
Occupancy-sensitive refresh	0.006525	0.006621	0.006429	0.006789	0.011080
Transport uniform	0.007236	0.007241	0.007232	0.009175	0.008080

Method	Primary analysis	Small learning update	Moderate learning update	Large learning update	Route-direction update
Transport adaptive	0.006879	0.006834	0.006923	0.008982	0.007897
DR uniform	0.008916	0.008917	0.008915	0.010164	0.010324
DR adaptive	0.008462	0.008339	0.008585	0.009919	0.009753
WIS adaptive	0.006866	0.006727	0.007005	0.008387	0.008131

Table A6. AUC by subgroup under small and moderate updates. Subgroups overlap and should not be summed; each slice is descriptive.

Population	Tasks	Gap-based refresh	Occupancy-sensitive refresh	Transport adaptive	DR adaptive
All	288	0.006067	0.006105	0.006469	0.007991
Competing routes	216	0.006494	0.006525	0.006879	0.008462
Serial controls	72	0.004789	0.004845	0.005240	0.006577
Horizon 6	96	0.006258	0.006280	0.006434	0.006647
Horizon 9	96	0.005424	0.005414	0.005989	0.008592
Horizon 12	96	0.006520	0.006620	0.006983	0.008733
Build	96	0.006390	0.006418	0.006794	0.008248
Data	96	0.005260	0.005297	0.005660	0.007600
Publish	96	0.006552	0.006600	0.006953	0.008124

Table A7. Exact error decomposition on the full confirmation set. Mean old value is 0.6823 in every row; the exact first-order remainder is diagnostic only.

Update	Drift MSE	Remainder MSE	ϵ -relevant reversal rate	New mean value
Small learning update	8.468e-05	3.317e-08	0.000%	0.6890
Moderate learning update	4.203e-04	8.169e-07	0.116%	0.6973
Large learning update	3.096e-03	4.660e-05	2.083%	0.7238
Route-direction update	6.257e-03	1.233e-04	4.398%	0.6876

In the error decomposition, mean success averages the true values of all three root actions. It is not task success after selecting the optimal root action. No task has all three candidate values equal to zero, but this does not imply that individual routes are free of failure risk.

F.4 QUALITY CROSSING AND NEW-EXECUTION BUDGETS

The prespecified quality target requires both mean regret ≤ 0.02 and probability of choosing an action with regret $> 0.02 \leq 0.05$. The quality crossing is the earliest point on the budget grid at which the target is met and remains met at every larger budget. We do not interpolate, and cases that never meet the target remain marked as not reached.

Table A8. Earliest allowed budget at which competing routes sustain the quality target. Unreached targets are retained.

Update	Old N	Gap	Occupancy	Transport	DR	Fresh uniform
Small learning update	16	Not reached	Not reached	Not reached	Not reached	Not reached
Small learning update	64	768	768	768	1536	Not reached
Small learning update	256	0	0	0	0	Not reached
Moderate learning update	16	Not reached	Not reached	Not reached	Not reached	Not reached
Moderate learning update	64	1536	1536	1536	1536	Not reached
Moderate learning update	256	0	0	0	0	Not reached
Large learning update	16	Not reached	Not reached	Not reached	Not reached	Not reached
Large learning update	64	1536	1536	Not reached	Not reached	Not reached
Large learning update	256	768	768	0	0	Not reached
Route-direction update	16	Not reached	1536	Not reached	Not reached	Not reached
Route-direction update	64	Not reached	1536	1536	1536	Not reached
Route-direction update	256	Not reached	Not reached	0	0	Not reached

These budgets are discrete point estimates, not savings rates with confidence guarantees. In particular, an AUC improvement does not imply at least 25% lower execution. That magnitude was only the target effect size in the original protocol.

F.5 INDEPENDENT L4 GATE TEST

Table A10 summarizes confirmatory comparisons in the primary population, which equally weights ordinary and branch-selective small or moderate updates under the prespecified protocol. The upper bound of the regret difference between DSC-Gate and Gap-Gate is +0.00018, below the 0.0005 noninferiority margin. Ratios of new tool steps relative to Gap-Gate, WIS-Gate, and DR-Gate are 0.606, 0.549, and 0.513, with all three simultaneous intervals below 1. Regret is also lower than under both WIS-Gate and DR-Gate.

Table A10. Confirmatory gate comparisons in the L4 primary population. A cost ratio below 1 indicates fewer new tool steps under DSC-Gate.

Comparison	Regret difference DSC - baseline	95% interval	Tool-step ratio	Simultaneous 95% interval
vs Gap-Gate	+0.00004	[-0.00010,+0.00018]	0.606	[0.550,0.668]
vs WIS-Gate	-0.00061	[-0.00089,-0.00034]	0.549	[0.500,0.604]
vs DR-Gate	-0.00139	[-0.00179,-0.00100]	0.513	[0.462,0.568]

Table A11 shows how the gate path changes with the update condition. Under ordinary updates, DSC-Gate resolves 55.4% of comparisons by reuse, 22.8% by transport, and 21.8% by refresh, using 151 new steps on average. Under branch-selective updates, the proportions are 31.8%, 12.3%, and 55.9%, with 421 new steps. Equal weighting of the two update classes gives the main-text refresh rate of 38.9% and mean cost of 286 new tool steps.

Table A11. Conditional gate paths under DSC-Gate.

Update condition	Reuse	Transport	Refresh	Mean new tool steps	Mean regret
Ordinary small or moderate	55.4%	22.8%	21.8%	151	0.00491
Branch-selective small or moderate	31.8%	12.3%	55.9%	421	0.00855
Equal-weight aggregate	43.6%	17.6%	38.9%	286	0.00673

G COST ACCOUNTING AND REPRODUCIBILITY MATERIALS

Table A9. L2-L3 cost accounting, aggregated across tasks. Shared data are counted once.

Item	Count	Unit
Policy-update trajectories	1,229,204	tool steps
Largest old-trajectory set	12,293,461	tool steps
Development and calibration references	15,741,039	tool steps
Target-pool simulation	41,824,782	tool steps
Model prompts	11,454	prompts

Old-data budgets are nested prefixes of the same largest trajectory set. Estimators share old data, policy updates, and the target pool, so costs must not be counted again for each budget or method. Development and calibration reference trajectories must be counted in full. Amortized once over the 288 confirmation tasks, they cost 54,656.39 tool steps per task. The 41,824,782 target-pool steps belong to counterfactual evaluation infrastructure and do not represent the online budget paid by any one learner. Actual new execution is recorded separately in the per-budget result tables.

Suppose the old data have already been paid for, reference quantities can be reused for later in-distribution decisions, and a chosen quality target saves $s > 0$ new steps per decision. The static number of decisions required to amortize the reference cost is then $\text{ceil}(15,741,039/s)$. This scenario depends on transferability and the reliability of the quality crossing; it is not an overall cost saving already demonstrated by the experiment.

The L1 materials include the locked protocol, task configurations, task-level summaries, compressed action-pair results, and confirmation tests. The L2-L3 lightweight materials include frozen configurations, model and dependency records, simulator and estimation-allocation-aggregation code, and the complete tensor of confirmation metrics. The metric tensor is indexed by task, update, seed, old-data budget, method, new-execution budget, and metric, with shape $288 \times 4 \times 5 \times 3 \times 10 \times 8$

x 5. The L2 tensor has shape $288 \times 4 \times 5 \times 3 \times 4 \times 6$. We also save exact old and new values and exact directional derivatives, enabling aggregation checks and regeneration of diagnostic plots. The lightweight package omits complete raw trajectories; trajectory-level reruns require either the full raw data or new simulation under the locked configuration. Figures 1-4 and Figure A1 use every corresponding record rather than selected representative trajectories. L4 uses `protocol_gate.json`, frozen before test results were read. It prespecifies the independent test tasks, the primary population equally weighting ordinary and branch-selective small or moderate updates, the three old-data budgets, five evaluation seeds, regret noninferiority margin of 0.0005, 1,536-tool-step cap, and stratified paired-bootstrap procedure. L4 artifacts retain task-level stopping states, actual new tool steps, final choices, pair-level gate states, and bootstrap indices for auditing the main text and Tables A10-A11. L4 tasks are disjoint from all L1-L3 development, calibration, and confirmation tasks. After freezing, gate rules, the primary population, and statistical thresholds were not adjusted in response to test regret, refresh cost, or between-method differences.