

Prompt-Robust Language Models: Which Training Strategies Work?

Frederic Sadrieh^{1,2} and Michal Štefánik³

¹Center for Information and Language Processing, LMU Munich

²Munich Center for Machine Learning (MCML)

³R&D Centre for Large Language Models, National Institute of Informatics, Japan

Correspondence to frederic.sadrieh@lmu.de

Abstract

Despite their strong performance, large language models remain highly sensitive to prompt formulation. Prior work addresses this through refined data construction or through dedicated robustness objectives. We reproduce and compare these strategies under controlled conditions, and measure how effective they are in addressing models’ prompt sensitivity. We find the current robustness finetuning methods improve over standard finetuning and in-context learning, but the best-to-worst prompt gap remains as high as 40–57% of performance. Moreover, the recent robustness-enhancing methods we test — COIN for contrastive alignment and PPCL for consistency regularization — often fail to outperform the simplest data construction strategy: training on one template per batch. Our diagnostics explain these results. The auxiliary objectives move the quantity they penalize, but do not *generalize*. Additionally, data construction strategies differ due to the conflicting signs of per-template gradients on 57–64% of parameters. Thus, batches that mix formulations force the optimizer to reconcile competing updates instead of finding a shared, prompt-agnostic one.¹

1 Introduction

Large language models (LLMs) are increasingly deployed in real-world decision-making pipelines, yet their performance remains highly sensitive to prompt formulation (Inger et al., 2025). Semantically equivalent prompts can yield drastically different outputs, making systems brittle and unreliable in practice (Cao et al., 2024). Addressing this at inference time through manual prompt engineering is labor-intensive and fundamentally does not scale (Schulhoff et al., 2025).

In contrast, train-time strategies build invariance directly into the model rather than patching sensi-

tivity post-hoc. Prior work has shown that tuning on multiple prompt formulations already outperforms standard single-prompt instruction finetuning (Wei et al., 2025, 2022), yet the design space remains poorly understood — it is unclear which data construction strategies matter, and whether more sophisticated robustness-enhancing methods provide meaningful gains on top.

We address this gap through a systematic study of train-time robustness methods improving on instruction finetuning (IFT) (Wei et al., 2022). We analyze IFT methods from three categories: (i) data construction strategies mixing different prompt formulations (Wei et al., 2025), (ii) consistency regularization methods (Qiang et al., 2024), and (iii) contrastive methods (Yan et al., 2024). Our main contributions can be summarized as:

- We compare data construction strategies for multi-template IFT, and trace template interference in the gradient space, where per-template updates conflict in sign on 57–64% of parameters;
- We reproduce COIN and PPCL and find both fail to reliably improve upon data construction strategies. Diagnostics of their loss objectives locate the cause in a failure to generalize;
- We scope the limits of current train-time robustness methods: a best-to-worst prompt gap of 40–57% survives every method we test.

Our work intends to be used as a guidance for engineers and researchers deciding which methods to prioritize when optimizing for prompt robustness.

2 Related Work

A large body of recent work documents that LLM performance remains highly sensitive to prompt formulation, regardless of model size and tasks (Habba et al., 2025; Sun et al., 2024; Zhu et al.,

¹Our experiments can be reproduced with: <https://github.com/FSadrieh/prompt-agnostic-llms>

2024; Sclar et al., 2024; Mizrahi et al., 2024). Prompt paraphrases or minor structural changes cause substantial performance swings (Chatterjee et al., 2024; He et al., 2024; Zhuo et al., 2024). Critically, IFT raises mean performance but leaves prompt sensitivity largely intact (Chatterjee et al., 2024; Wei et al., 2025).

Inference-time methods address brittleness through prompt optimization, model calibration, or model-based self-correction (Zhao et al., 2021; Hu et al., 2024; Shi et al., 2025; Zhan et al., 2024). While effective, these approaches add algorithmic overhead and do not generalize, requiring re-running at test time (Hu et al., 2024; Shi et al., 2025). **Train-time methods** instead build invariance directly into the model. Previous work experiments with multi-prompt IFT (Wei et al., 2025) and adding explicit robustness objectives such as consistency regularization (Qiang et al., 2024) and contrastive alignment (Yan et al., 2024) on top. However, these studies do not provide a systematic comparison of methods from different families under controlled conditions.

Two recent studies are closest to ours: Seleznyov et al. (2025) evaluate PPCL and multi-prompt IFT and Agrawal et al. (2025) include one consistency regularization method (Sun et al., 2024), but both test local perturbations (e.g. separators) and primarily focus on test-time approaches. Our study is the first to compare robustness training methods from three categories under major prompt perturbations.

3 Experimental setup

Problem definition Given a collection of datasets $\{\mathcal{D}_1, \dots, \mathcal{D}_n\}$, each containing samples $\mathcal{D}_i = \{(X_{i,1}, Y_{i,1}), \dots, (X_{i,m_i}, Y_{i,m_i})\}$ and associated with a set of verbalization templates $\mathcal{T}_i = \{\mathcal{T}_{i,1}, \dots, \mathcal{T}_{i,k_i}\}$, where each template maps a sample to a textual instruction and expected response, $\mathcal{T}_{i,l} : (X_{i,j}, Y_{i,j}) \mapsto (x_{i,j,l}, y_{i,j,l})$. We split the collection into a train $\mathcal{D}_{\text{tr}}$ and a test $\mathcal{D}_{\text{te}}$ part with disjoint tasks. Applying every template of $\mathcal{T}_i$ to every sample of every $\mathcal{D}_i \in \mathcal{D}_{\text{tr}}$ yields the instruction fine-tuning corpus $\mathcal{X}_{\text{IFT}} = \{(x_{i,j,l}, y_{i,j,l}) \mid \mathcal{D}_i \in \mathcal{D}_{\text{tr}}, j \leq m_i, l \leq k_i\}$. During training, we iteratively update the parameters θ of the model $\mathcal{M}_\theta$ on batches $\mathcal{B} \subset \mathcal{X}_{\text{IFT}}$ as $\theta \leftarrow \theta - \eta \nabla_\theta \mathcal{L}(\mathcal{B}; \theta)$. Previous work differs in which (i, j, l) triples are grouped into $\mathcal{B}$, or in which auxiliary terms are added to $\mathcal{L}$.

Our experiments compare the effectiveness of

these methods in achieving prompt robustness in $\mathcal{M}$. We employ each training method with $\mathcal{D}_{\text{tr}}$ and evaluate its resulting model on $\mathcal{D}_{\text{te}}$, for each $\mathcal{D}_i \in \mathcal{D}_{\text{te}}$ reporting performance with (i) the best-performing template $\mathcal{T}_{i,\text{best}}$, (ii) the worst-performing template $\mathcal{T}_{i,\text{worst}}$, and (iii) the average performance across all templates $\mathcal{T}_i$.

3.1 Training Methods

We study three categories of train-time methods to improve prompt robustness, all making use of the availability of multiple templates for each dataset.

(1) Data construction We test four strategies for how batches are constructed:

- **SINGLE** — Train on one template per dataset mirroring standard IFT (Wei et al., 2022)
- **ALL SHUFFLED** — All templates and examples are shuffled randomly into batches
- **ALL-IN-ONE-BATCH** — All templates for a given example are used in the same batch
- **ONE-AT-A-TIME** — Only one template is used per batch, mirroring Wei et al. (2025).

With these strategies we test how varying prompt diversity per batch affects the model’s robustness and assess the optimality of strategies applied in previous work.

(2) Consistency regularization — PPCL Consistency regularization methods add an auxiliary loss that penalizes divergence between the model’s output probabilities on semantically equivalent prompts. We select PPCL (Qiang et al., 2024) to represent this category, as it operates directly on the supervised finetuning objective and does not introduce other changes such as soft prompts (Sun et al., 2024) or unsupervised label construction (Zhou et al., 2022; Hejabi et al., 2026). PPCL augments the standard cross-entropy loss, calculated for both prompt formulations, with a Jensen–Shannon divergence term computed over the average token probabilities of outputs across prompt formulations:

$$\mathcal{L} = \lambda_1 \mathcal{L}_{CE_{\text{orig}}} + \lambda_2 \mathcal{L}_{CE_{\text{par}}} + \lambda_3 \cdot \mathcal{L}_{JSD} \quad (1)$$

where λ -s control the trade-off between instruction following and prompt robustness.

(3) Contrastive alignment — COIN Contrastive approaches align semantically equivalent prompts while separating those that are syntactically similar but semantically different. We select COIN (Yan et al., 2024) as it forms the basis of several subsequent approaches (Liu et al., 2025; Aissi et al., 2025). COIN adds a contrastive loss over the model’s internal representations:

$$\mathcal{L} = \mathcal{L}_{CE} + \lambda \cdot \mathcal{L}_{CoIN}, \quad (2)$$

where $\mathcal{L}_{CoIN}$ is the contrastive objective as defined in Yan et al. (2024).

3.2 Evaluation

Models We evaluate all methods on four models spanning two model families and two scales: Llama3.2-1B and Llama3.1-8B (Grattafiori et al., 2024) and Qwen3-0.6B and Qwen3-8B (Yang et al., 2025). Using two families allows us to assess whether findings generalize across architectures, while the two scales test whether robustness effects are consistent across model capacity. For all models we use the base variants, ensuring that observed robustness differences are attributable to our training methods rather than prior instruction tuning. For the 8B models we apply LoRA (Hu et al., 2022) to reduce computational cost. For each model and loss function we sweep a separate learning rate; full hyperparameter details are in Appendix C.

Datasets We replicate the data setup from Sanh et al. (2022) testing for strict generalization by training on 48 datasets and testing on 11 datasets from unseen tasks. We use the PromptSource collection for our templates (Bach et al., 2022). It covers paraphrasing and structural changes for all our datasets — the perturbation types models are most sensitive to (Chatterjee et al., 2024). We manually check all templates and filter templates which are inapplicable or change the task type. We detail the template structure and show examples in Appendix B. Datasets with only a single remaining template were removed, and each remaining dataset is capped at 10,240 training examples to balance contributions across tasks. For the full details on the datasets see Appendix A. COIN and PPCL require all prompt formulations to share the same label, so we sample the largest subset of templates whose expected labels agree. We call this the majority templates. COIN requires at least three majority templates per dataset, so we exclude all

datasets with less than 3 such templates from majority training. To measure how much this affects performance, we also train the ALL SHUFFLED method using only the majority templates.

Metrics Following Wang et al. (2022), we use Rouge-L (Lin, 2004) as our main metric. Each method is assessed on three metrics relative to IFT: average, worst-case and best-case template performance. In addition, we report rank classification accuracy, the original metric of the dataset from Sanh et al. (2022), in Appendix F. We rank all runs by score, take the top run as reference, and run a paired one-sided bootstrap test of reference-vs-competitor for every other run. Runs denoted as *statistically best* are the ones that are not significantly worse than the best-performing run ($\alpha = 0.05$).

4 Results

Impact of robustness training First we evaluate the impact of robustness training methods. In Table 6 we compare (i) the untuned base models, (ii) four-shot in-context learning (ICL), and (iii) the robustness-trained models. Compared to the base model, IFT achieves much higher performance (an average Rouge-L score of 0.479 vs. 0.051 on Llama3.2-1B). ICL improves upon the base model (0.192 on Llama3.2-1B), but on three of the four it fails to reach IFT’s performance level. The untuned Llama models in particular largely fail to follow the prompt format, so additional training is crucial. The exception is Qwen3-8B, whose base model is by far the strongest (0.434 average Rouge-L against 0.051–0.093). Here ICL surpasses IFT on average (0.660 vs. 0.634), but it still falls below the best multi-prompt IFT methods on average (0.673) and on the worst template (0.469 vs. 0.477–0.485). ICL is thus only competitive when the base model is already strong, and even then it does not win on robustness. The two strategies also differ in cost structure: robustness training is a one-time cost, whereas in-context learning adds a recurring cost to every inference call, so the choice depends on the strength of the base model and on the expected inference volume.

Across models, the evaluated multi-prompt IFT methods generally improve across all metrics relative to the IFT baseline (see Figure 4), showing the importance of a high prompt variance in training. To rule out that these gains stem solely from the additional training steps, we also train a step-matched IFT run for five epochs. Table 6 shows

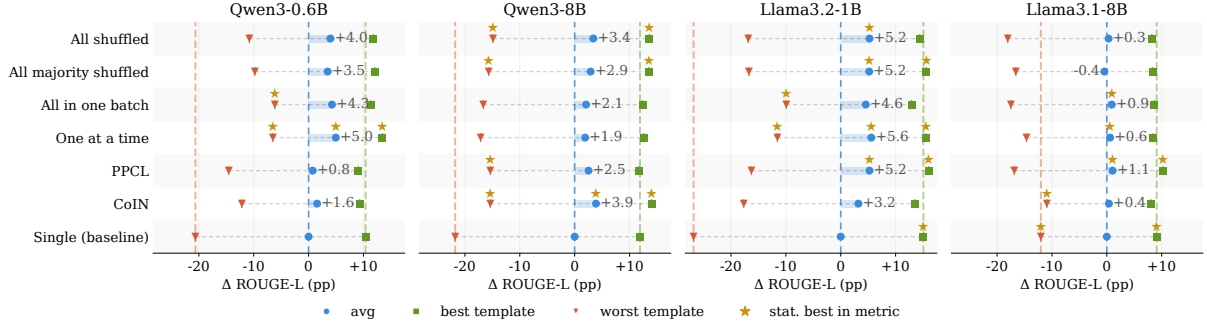


Figure 1: Performance of each method relative to IFT in percentage points across models. The circle, square, and triangle mark the average, best, and worst template score respectively; the dashed span reflects sensitivity to prompt variance. Vertical lines extending from IFT serve as reference. A star above a marker indicates membership in the statistically best group. The SINGLE reference points are avg Rouge-L of 0.514 for Qwen3-0.6B, 0.634 for Qwen3-8B, 0.479 for Llama3.2-1B and 0.639 for Llama3.1-8B. See Table 6 for all raw scores.

that it still underperforms. Still, all gains from multi-prompt IFT are modest relative to the remaining performance variance, which reaches 40–57% across methods (see Figure 4).

Impact of model choice Figure 1 reveals that smaller models are disproportionately sensitive to prompt formulation. For Llama3.2-1B, IFT yields a worst-to-best spread of 0.419 Rouge-L, indicating substantial instability. The larger models present a more nuanced picture: while Qwen3-8B exhibits a comparable variance span (0.337 vs. 0.310 Rouge-L), Llama3.1-8B displays considerably lower sensitivity to prompt formulation. On this model, several multi-prompt IFT methods instead produce statistically significant *decreases* in worst-case performance. We attribute this to two factors: (1) the model’s strong IFT performance reduces the ceiling for robustness gains, and (2) the validation performance improves mainly within the first 1,000 steps, with subsequent gains small and inconsistent (Appendix E).

RQ1: How does data construction affect robustness? Prior work constructs multi-prompt IFT-data using a sequential per-template schedule (Wei et al., 2025), but it is unclear whether this specific construction is necessary or optimal. Figure 1 shows that for smaller models, ONE-AT-A-TIME yields consistent improvements, achieving statistically best or equivalent-to-best performance across all metrics. The worst-template gains are the largest: from 0.210 to 0.363 Rouge-L on Llama3.2-1B and from 0.308 to 0.449 on Qwen3-0.6B. ALL-IN-ONE-BATCH narrows the performance spread across formulations compared to ONE-AT-A-TIME, but it does so primarily by degrading best-case per-

formance rather than lifting the worst case. Putting all templates of an example into the same update step, as done in ALL-IN-ONE-BATCH, leads to **interfering gradients** rather than the emergence of one prompt-agnostic shared update. We investigate this effect by separating the individual template gradients and measuring their interference. The resulting update vectors have a mean pairwise cosine similarity of 0.54 and a sign conflict (fraction of parameters in which template updates have conflicting signs) on 57–64% of weights. This interference is consistent throughout training and strongest in the earliest blocks, which are most dependent on the prompt formulation (Appendix H). In contrast, the methods with template-homogeneous batches never co-locate these conflicting gradients in one update and thus perform better. ALL SHUFFLED and ALL-MAJORITY-SHUFFLED perform comparably, since restricting training to the majority templates discards only a small fraction of the templates per dataset (Appendix A).

RQ2: Is the additional complexity of PPCL and CoIN justified? PPCL and CoIN both yield only modest gains compared to the baseline (Figure 4). These gains are consistently matched or exceeded by simpler data construction strategies (Figure 1). The sole exception is CoIN on Qwen3-8B, where it achieves the highest average performance of all evaluated methods; on all remaining models, CoIN and PPCL are either statistically indistinguishable from or inferior to the best data construction approach. The rank classification accuracy results mostly agree with these findings (see Appendix F). The exception is Llama3.1-8B, where PPCL attains the best average and worst-template

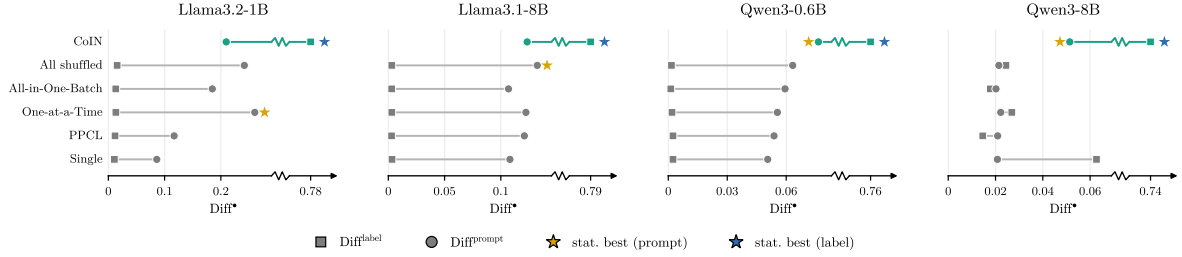


Figure 2: The hidden-state difference on the test split. Squares show the difference at the label readout, while circles show the difference at the prompt readout. A star next to a marker indicates membership in the statistically best group for that readout.

accuracy. It is also the only model whose multi-template methods do not consistently outperform single-template training on worst-template Rouge-L.

Why do PPCL and CoIN fail to improve?

We analyze whether the two auxiliary objectives achieve their intended effect: grouping semantically similar prompts in the hidden states for CoIN, and matching output distributions across templates for PPCL. We measure each at two positions: (1) the label readout over the label tokens, where the objectives are applied in training, and (2) the prompt readout at the last prompt token (Appendix G).

CoIN achieves the largest contrastive difference among all methods at the label readout: 0.74–0.79 against at most 0.063 for others (see Figure 2). Since the label readout is used in training, the objective shifts its target as intended, while all other methods stay near zero, consistently with findings of Aissi et al. (2025). However, at the prompt readout, this advantage shrinks to at most 0.03 on the Qwen models, and for the Llama models, CoIN separates prompts worse than the strongest data construction approaches. These findings demonstrate that CoIN can separate prompts when paired with their labels, but not the prompt alone.

PPCL attains the lowest cross-template JS-divergence of any method on the *validation* split for both Llama models (see Figure 5 and Table 10), thus succeeds in-distribution. However, on the held-out test split the advantage disappears: PPCL falls to the worst multi-template method on Llama3.2-1B. For the Qwen models PPCL is not even the lowest on the validation split. Unlike CoIN, PPCL never opens a comparable gap over the other multi-prompt IFT methods (25–214× vs. at most 1.19×). Every multi-template schedule already reduces divergence roughly two- to fivefold over single-

template training in validation, so an explicit consistency term adds little on top of simply training on varied templates. On the two small models, PPCL consequently shows the largest validation-to-test gap of any method, so its distribution alignment does not survive the shift. Ultimately, we find that **both objectives improve in the training setting, but this improvement does not generalize.**

5 Conclusion

This paper compares train-time strategies for improving the prompt robustness of LLMs. All multi-prompt IFT methods improve over IFT, yet the gains stay modest relative to the underlying variance caused by prompt formulation. Among data construction strategies the differences are subtle, but ONE-AT-A-TIME data selection, where only samples of the same template share a batch and therefore an update, provides the most reliable worst-case gains. In contrast, the ALL-IN-ONE-BATCH strategy, which collects all templates of a sample in a single batch, underperforms due to gradient interference: conflicting signs across templates cancel each other out. More sophisticated methods from prior work, concretely PPCL and CoIN, are mostly matched or outperformed by simple data construction, making their additional complexity difficult to justify. We find that their additional loss objectives fail to generalize beyond the training setting. Therefore, we advise practitioners to prioritize simple ONE-AT-A-TIME or ALL SHUFFLED schedules before investing in consistency regularization or contrastive objectives. Our results show that batch construction alone moves prompt robustness substantially, yet even the best train-time method we study leaves ample room for improvement.

Limitations

Model scale and family coverage. Our experiments are limited to models up to 8B parameters across two model families (Llama and Qwen), due to computational constraints. It remains an open question whether the observed patterns — in particular the advantage of ONE-AT-A-TIME scheduling and the marginal benefit of auxiliary loss objectives — hold at larger scales where models may be more capable of leveraging richer training signals. Expanding the evaluation to additional architectures would further strengthen the generalizability of our conclusions.

Benchmark scope and evaluation protocol. We adopt the training and evaluation split of Sanh et al. (2022), which, while well-established, consists predominantly of classification and short-answer tasks with closed label sets. In such settings, prompt sensitivity may manifest differently than in open-ended generation, so evaluating on more diverse benchmarks — including long-form generation and reasoning tasks — would provide a more complete picture of prompt robustness.

Method selection within each category. We evaluate a single representative method for each of the consistency regularization and contrastive alignment categories — PPCL and CoIN, respectively — selected based on their central standing in those categories. Alternative methods within these categories (Sun et al., 2024; Zhou et al., 2022; Hejabi et al., 2026; Liu et al., 2025; Aissi et al., 2025) may exhibit different trade-offs, and our conclusions should be interpreted as applying to the specific instantiations studied rather than to the broader methodological families.

Hyperparameter optimization. We swept the learning rate separately for every model and every loss function, so PPCL and CoIN received the same per-model tuning budget as the data-construction baselines (Table 4). The auxiliary loss weights, however, were not tuned per model. We swept the PPCL weight λ_3 on Llama3.2-1B and Qwen3-0.6B, selecting $\lambda_3 = 1$ on both, with performance being stable from 0.1 to 10 on Qwen3-0.6B (Table 5). The CoIN hyperparameters τ and λ were adopted from Yan et al. (2024) and not tuned at all. A full per-model sweep of every auxiliary-loss hyperparameter was prohibitive within our compute budget, and we cannot exclude

that it would narrow the gaps we report. Our diagnostics (Appendix G) argue against under-tuning as the sole explanation, since both objectives measurably move the quantity they penalize.

Acknowledgments

The project on which this report is based was funded by the Federal Ministry of Research, Technology and Space under the funding code “KI-Servicezentrum Berlin-Brandenburg” 16IS22092. Responsibility for the content of this publication remains with the author. We would like to thank Konstantin Dobler and Gerard de Melo for their continued support and feedback throughout this project.

References

- Aryan Agrawal, Lisa Alazraki, Shahin Honarvar, Thomas Mensink, and Marek Rei. 2025. [Enhancing LLM robustness to perturbed instructions: An empirical study](#). In *ICLR 2025 workshop on building trust in language models and applications*.
- Mohamed Salim Aissi, Clément Romic, Thomas Carta, Sylvain Lamprier, Pierre-Yves Oudeyer, Olivier Sigaud, Laure Soulier, and Nicolas Thome. 2025. [Reinforcement learning for aligning large language models agents with interactive environments: Quantifying and mitigating prompt overfitting](#). In *Findings of the association for computational linguistics: NAACL 2025*, pages 7030–7046, Albuquerque, New Mexico. Association for Computational Linguistics.
- Stephen H. Bach, Victor Sanh, Zheng-Xin Yong, Albert Webson, Colin Raffel, Nihal V. Nayak, Abheesht Sharma, Taewoon Kim, M Saiful Bari, Thibault Fevry, Zaid Alyafeai, Manan Dey, Andrea Santilli, Zhiqing Sun, Srulik Ben-David, Canwen Xu, Gunjan Chhablani, Han Wang, Jason Alan Fries, and 8 others. 2022. [PromptSource: An integrated development environment and repository for natural language prompts](#). In *Proceedings of the 60th annual meeting of the association for computational linguistics: System demonstrations*, pages 93–104, Dublin, Ireland. Association for Computational Linguistics.
- Bowen Cao, Deng Cai, Zhisong Zhang, Yuexian Zou, and Wai Lam. 2024. [On the worst prompt performance of large language models](#). In *Advances in neural information processing systems*, volume 37, pages 69022–69042. Curran Associates, Inc.
- Anwoy Chatterjee, H S V N S Kowndinya Renduchintala, Sumit Bhatia, and Tanmoy Chakraborty. 2024. [POSIX: a prompt sensitivity index for large language models](#). In *Findings of the association for computational linguistics: EMNLP 2024*, pages 14550–14565, Miami, Florida, USA. Association for Computational Linguistics.

- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, and 542 others. 2024. [The llama 3 herd of models](#). ArXiv: 2407.21783 [cs.AI].
- Eliya Habba, Ofir Arviv, Itay Itzhak, Yotam Perlitz, Elron Bandel, Leshem Choshen, Michal Shmueli-Scheuer, and Gabriel Stanovsky. 2025. [DOVE: a large-scale multi-dimensional predictions dataset towards meaningful LLM evaluation](#). In *Findings of the association for computational linguistics: ACL 2025*, pages 11744–11763. Association for Computational Linguistics.
- Jia He, Mukund Rungta, David Koleczek, Arshdeep Sekhon, Franklin X Wang, and Sadid Hasan. 2024. [Does prompt formatting have any impact on LLM performance?](#) ArXiv: 2411.10541 [cs.CL].
- Parsa Hejabi, Elnaz Rahmati, Alireza Salkhordeh Zibari, and Morteza Dehghani. 2026. [Flip-flop consistency: Unsupervised training for robustness to prompt perturbations in LLMs](#). In *Proceedings of the 64th annual meeting of the Association for Computational Linguistics (volume 1: Long papers)*, pages 1571–1587, San Diego, California, United States. Association for Computational Linguistics.
- Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. [LoRA: Low-rank adaptation of large language models](#). In *International conference on learning representations*.
- Wenyang Hu, Yao Shu, Zongmin Yu, Zhaoxuan Wu, Xiaoqiang Lin, Zhongxiang Dai, See-Kiong Ng, and Bryan Kian Hsiang Low. 2024. [Localized zeroth-order prompt optimization](#). In *Advances in neural information processing systems*, volume 37, pages 86309–86345. Curran Associates, Inc.
- Nurit Cohen Inger, Yehonatan Elisha, Bracha Shapira, Lior Rokach, and Seffi Cohen. 2025. [Forget what you know about LLMs evaluations - LLMs are like a chameleon](#). In *Proceedings of the 2025 conference on empirical methods in natural language processing*, pages 21664–21677, Suzhou, China. Association for Computational Linguistics.
- Chin-Yew Lin. 2004. [ROUGE: a package for automatic evaluation of summaries](#). In *Text summarization branches out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Shuhan Liu, Xing Hu, Kerui Huang, Xiaohu Yang, David Lo, and Xin Xia. 2025. [CREME: Robustness Enhancement of Code LLMs via Layer-Aware Model Editing](#). ArXiv:2507.16407 [cs.SE].
- Moran Mizrahi, Guy Kaplan, Dan Malkin, Rotem Dror, Dafna Shahaf, and Gabriel Stanovsky. 2024. [State of what art? A call for multi-prompt LLM evaluation](#). *Transactions of the Association for Computational Linguistics*, 12:933–949.
- Yao Qiang, Subhrangshu Nandi, Ninareh Mehrabi, Greg Ver Steeg, Anoop Kumar, Anna Rumshisky, and Aram Galstyan. 2024. [Prompt perturbation consistency learning for robust language models](#). In *Findings of the association for computational linguistics: EACL 2024*, pages 1357–1370, St. Julian’s, Malta. Association for Computational Linguistics.
- Olivier Roy and Martin Vetterli. 2007. The effective rank: A measure of effective dimensionality. In *2007 15th European signal processing conference*, pages 606–610. IEEE.
- Victor Sanh, Albert Webson, Colin Raffel, Stephen Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Arun Raja, Manan Dey, M Saiful Bari, Canwen Xu, Urmish Thakker, Shanya Sharma Sharma, Eliza Szczechla, Taewoon Kim, Gunjan Chhablani, Nihal Nayak, Debajyoti Datta, and 21 others. 2022. [Multitask prompted training enables zero-shot task generalization](#). In *International conference on learning representations*.
- Sander Schulhoff, Michael Ilie, Nishant Balepur, Konstantine Kahadze, Amanda Liu, Chenglei Si, Yin-heng Li, Aayush Gupta, Hyojung Han, Sevien Schulhoff, Pranav Sandeep Dulepet, Saurav Vidyadhara, Dayeon Ki, Sweta Agrawal, Chau Pham, Gerson Kroiz, Feileen Li, Hudson Tao, Ashay Srivastava, and 12 others. 2025. [The prompt report: a systematic survey of prompt engineering techniques](#). ArXiv: 2406.06608 [cs.CL].
- Melanie Sclar, Yejin Choi, Yulia Tsvetkov, and Alane Suhr. 2024. [Quantifying language Models’ Sensitivity to spurious features in prompt design or: How I learned to start worrying about prompt formatting](#). In *International conference on learning representations*, volume 2024, pages 25055–25083.
- Mikhail Seleznyov, Mikhail Chaichuk, Gleb Ershov, Alexander Panchenko, Elena Tutubalina, and Oleg Somov. 2025. [When punctuation matters: a large-scale comparison of prompt robustness methods for LLMs](#). In *Findings of the association for computational linguistics: EMNLP 2025*, pages 20370–20385, Suzhou, China. Association for Computational Linguistics.
- Zeru Shi, Zhenting Wang, Yongye Su, Weidi Luo, Hang Gao, Fan Yang, Ruixiang Tang, and Yongfeng Zhang. 2025. [Auto-prompt generation is not robust: Prompt optimization driven by pseudo gradient](#). ArXiv: 2412.18196 [cs.CL].
- Jiuding Sun, Chantal Shaib, and Byron Wallace. 2024. [Evaluating the zero-shot robustness of instruction-tuned language models](#). In *International conference on learning representations*, volume 2024, pages 48103–48141.
- Yizhong Wang, Swaroop Mishra, Pegah Alipoormolabashi, Yeganeh Kordi, Amirreza Mirzaei, Atharva

- Naik, Arjun Ashok, Arut Selvan Dhanasekaran, Anjana Arunkumar, David Stap, Eshaan Pathak, Gianis Karamanolakis, Haizhi Lai, Ishan Purohit, Ishani Mondal, Jacob Anderson, Kirby Kuznia, Krima Doshi, Kuntal Kumar Pal, and 16 others. 2022. [Super-NaturalInstructions: Generalization via declarative instructions on 1600+ NLP tasks](#). In *Proceedings of the 2022 conference on empirical methods in natural language processing*, pages 5085–5109, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Chenxing Wei, Mingwen Ou, Ying He, Yao Shu, and Fei Yu. 2025. [PAFT: Prompt-agnostic fine-tuning](#). In *Proceedings of the 2025 conference on empirical methods in natural language processing*, pages 694–717, Suzhou, China. Association for Computational Linguistics.
- Jason Wei, Maarten Bosma, Vincent Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V Le. 2022. [Finetuned language models are zero-shot learners](#). In *International conference on learning representations*.
- Tianyi Yan, Fei Wang, James Y. Huang, Wenxuan Zhou, Fan Yin, Aram Galstyan, Wenpeng Yin, and Muhao Chen. 2024. [Contrastive instruction tuning](#). In *Findings of the association for computational linguistics: ACL 2024*, pages 10288–10302, Bangkok, Thailand. Association for Computational Linguistics.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chujie Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, and 41 others. 2025. [Qwen3 technical report](#). ArXiv: 2505.09388 [cs.CL].
- Pengwei Zhan, Zhen Xu, Qian Tan, Jie Song, and Ru Xie. 2024. [Unveiling the lexical sensitivity of LLMs: Combinatorial optimization for prompt enhancement](#). In *Proceedings of the 2024 conference on empirical methods in natural language processing*, pages 5128–5154, Miami, Florida, USA. Association for Computational Linguistics.
- Zihao Zhao, Eric Wallace, Shi Feng, Dan Klein, and Sameer Singh. 2021. [Calibrate before use: Improving few-shot performance of language models](#). In *Proceedings of the 38th international conference on machine learning*, volume 139 of *Proceedings of machine learning research*, pages 12697–12706. PMLR.
- Chunting Zhou, Junxian He, Xuezhe Ma, Taylor Berg-Kirkpatrick, and Graham Neubig. 2022. [Prompt consistency for zero-shot task generalization](#). In *Findings of the association for computational linguistics: EMNLP 2022*, pages 2613–2626, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Kaijie Zhu, Qinlin Zhao, Hao Chen, Jindong Wang, and Xing Xie. 2024. [PromptBench: a unified library for evaluation of large language models](#). *Journal of Machine Learning Research*, 25(254):1–22.
- Jingming Zhuo, Songyang Zhang, Xinyu Fang, Haodong Duan, Dahua Lin, and Kai Chen. 2024. [ProSA: Assessing and understanding the prompt sensitivity of LLMs](#). In *Findings of the association for computational linguistics: EMNLP 2024*, pages 1950–1976, Miami, Florida, USA. Association for Computational Linguistics.

A Dataset statistics

Table 1 shows an overview of all training datasets mirroring the T0 (Sanh et al., 2022) training split. We replaced tydiqa with Zaid/coqa_expanded and gigaword with scitldr as the versions on Hugging Face were not compatible with most prompt templates in PromptSource.

Afterward we manually filter out all templates which are not applicable or change the task type. For example, some templates reformulated Hel-laSwag examples as topic classification problems, which would cause train/test leakage.

After removing these templates we needed to remove social_i_qa, riddle_sense, and wiki_bio as they did not have more than one template remaining. Note all changes in dataset selection only affected the training split.

B Template Structure and Examples

We use the PromptSource (Bach et al., 2022) templates associated with each dataset without modifying their functionality. Each template converts an input example into an instruction, x , and the verbalization of the expected answer, y . We change the wording, framing, and answer-option ordering of the prompt through the templates, while keeping the underlying task fixed. The number of templates per dataset before and after filtering is given in Table 1 and Table 2.

Figure 3 shows the eight filtered Super-GLUE (COPA) templates rendered on the same example. The four templates that were removed failed to render with the current version of the dataset on Hugging Face, so they are not shown here. This example illustrates the magnitude of perturbation covered by our benchmark in rephrasing the question and modifying the prompt structure.

C Hyperparameters

Table 3 lists the hyperparameters shared across all models and methods. Due to compute constraints we only sweep for the first 2,000

Table 1: The 48 training datasets grouped by task type. *Templates* is the total number of PromptSource templates per dataset. *Filtered* is the count after removing manually identified bad templates, and *Majority* is the size of the majority templates (see [subsection 3.2](#)). The number of samples is limited to 10,240 per dataset. We use the evaluation splits of the datasets for validation, with a sample limit of 512 and the same templates.

Task	Dataset	Samples	Templates	Filtered	Majority
Paraphrase	GLUE (MRPC)	3,668	7	5	4
	GLUE (QQP)	10,240	6	6	4
	PAWS	10,240	12	10	10
Extractive QA	HotpotQA	10,240	5	5	5
	TriviaQA	10,240	5	4	1
	WebQuestions	3,778	5	5	1
	WikiQA	10,240	11	5	4
	AdvQA (BiDAF)	10,000	5	4	4
	AdvQA (BERT)	10,000	5	4	4
	AdvQA (RoBERTa)	10,000	5	4	4
	DuoRC (Self)	10,240	9	5	1
	DuoRC (Paraphrase)	10,240	9	5	1
	ROPES	10,240	12	12	12
	SQuAD v2	10,240	12	4	2
	SuperGLUE (ReCoRD)	10,240	20	7	1
	Quoref	10,240	11	10	1
	CoQA	10,240	7	7	6
MC QA	ARC-Challenge	1,119	6	5	3
	ARC-Easy	2,251	6	5	3
	CoS-E	9,741	11	6	3
	CosmosQA	10,240	13	8	4
	DREAM	6,116	5	4	2
	OpenBookQA	4,957	7	7	6
	PIQA	10,240	11	6	3
	QASC	8,134	8	6	6
	QuAIL	10,240	13	11	6
	QuaRel	1,941	5	5	5
	QuaRTz	2,696	8	8	8
	RACE (High)	10,240	8	5	3
	RACE (Middle)	10,240	8	5	3
	SciQ	10,240	5	5	5
	SuperGLUE (BoolQ)	9,427	10	5	3
	SuperGLUE (MultiRC)	10,240	10	10	10
	WIQA	10,240	8	4	2
Sentiment	Amazon Polarity	10,240	9	9	3
	App Reviews	10,240	4	4	1
	IMDB	10,240	11	11	7
	Rotten Tomatoes	8,530	10	10	7
	Yelp Reviews	10,240	7	7	5
Summarization	CommonGen	10,240	9	7	7
	CNN/DailyMail	10,240	9	7	7
	SciTLDLDR	1,992	6	5	5
	MultiNews	10,236	6	5	5
	SAMSum	10,240	7	6	5
	XSum	10,240	10	10	10
Topic Classification	AG News	10,240	7	7	4
	DBpedia	10,240	4	4	4
	TREC	5,452	18	5	5
Total (48 datasets)		417,238			

Table 2: The 11 held-out test datasets grouped by task type. *Templates* is the total number of PromptSource templates per dataset. *Filtered* is the count after removing manually identified bad templates, and *Majority* is the size of the majority templates (see [subsection 3.2](#)).

Task	Dataset	Samples	Templates	Filtered	Majority
NLI	SuperGLUE (CB)	56	15	15	8
	SuperGLUE (RTE)	277	10	10	9
	ANLI (R1)	1,000	15	15	8
	ANLI (R2)	1,000	15	15	8
	ANLI (R3)	1,200	15	15	8
WSD	SuperGLUE (WiC)	638	10	10	9
Coreference	SuperGLUE (WSC)	104	10	10	7
Commonsense	WinoGrande	1,767	6	6	5
	SuperGLUE (COPA)	100	12	8	8
	StoryCloze	1,871	6	5	5
	HellaSwag	10,003	11	5	3
Total (11 datasets)		18,016			

training steps and take the best value from there. [Table 4](#) reports the learning rates selected per model and method via grid search over $\{10^{-5}, 3 \times 10^{-5}, 5 \times 10^{-5}, 7 \times 10^{-5}, 9 \times 10^{-5}, 10^{-4}\}$.

The λ_3 hyperparameter for PPCL was tuned over $\{0.1, 1, 10, 100\}$ on Llama3.2-1B. To check the robustness of this hyperparameter, we also tuned it on Qwen3-0.6B using the same protocol. [Table 5](#) reports the Qwen3-0.6B sweep: $\lambda_3 = 1$ falls in the statistically best group on all three metrics, and performance is stable from 0.1 to 10, collapsing only at 100. The CoIN hyperparameters τ and λ were set to the advised values from [Yan et al. \(2024\)](#) and not tuned further due to computational constraints.

All experiments are run on H200 GPUs, and we trained for roughly 2,800 GPU hours.

D Additional Results

Inference-time baselines The BASE MODEL and ICL rows of [Table 6](#) evaluate the untrained base checkpoints. No weights are loaded or updated in either case, so both isolate prompting from training and are scored exactly like every other test run. For ICL we prepend four demonstrations to each query. The demonstrations are drawn from the evaluation split itself, excluding the query example, since the eleven test tasks are held out from our training mixture and therefore have no in-task examples in it. Each demonstration is rendered with the *same* template as the query and inserted as a

prompt/answer turn pair carrying the gold label, so the entire context is verbalised consistently. We sample the four demonstrations once per example, using a seed derived from the dataset and example identifier, and reuse that draw for all templates of the example. Any variation in ICL across templates is therefore attributable to the template rather than to a different choice of demonstrations, which keeps the comparison with the trained models on equal footing. Drawing demonstrations from the evaluation split supplies ICL with in-distribution, gold-labelled examples of the target task. This favours the inference-time baseline, which we nevertheless find to stay below the best multi-template method on every model and on every metric.

E Validation Performance over Training

[Table 7](#) reports validation Rouge-L at every checkpoint during Llama3.1-8B instruction fine-tuning. Across all methods, the largest performance improvement comes in the first 1,000 steps. No run improves by more than four points after 1,000 steps, except ONE-AT-A-TIME, which oscillates by up to ten points without a trend, and no run climbs monotonically. While the base model largely fails to produce the required output format, the checkpoints after 1,000 steps follow the instruction format. Still LoRA tuning contributes little additional benefit afterwards.

Table 3: Shared hyperparameters for all experiments. [†]LoRA is only applied to the 8B models.

Hyperparameter	Value
Optimizer	AdamW (fused)
LR schedule	Constant with linear warmup
Warmup steps	100
Effective batch size	256
Epochs	1
Precision	bfloat16
Max train samples per dataset	10 240
LoRA rank [†]	16
LoRA alpha [†]	32
LoRA dropout [†]	0.0
LoRA target modules [†]	q_proj, v_proj, output_proj, MLP
CoIN τ	0.05
CoIN λ	1000
PPCL λ_1, λ_2	1, 1
PPCL λ_3	1

Table 4: Learning rates selected per model and method. All template variants (single, all, etc.) share the same standard loss function, therefore we tune the learning rate only once.

Model	Standard Loss	CoIN	PPCL
Llama-3.2-1B	5×10^{-5}	7×10^{-5}	3×10^{-5}
Llama-3.1-8B	5×10^{-5}	9×10^{-5}	10^{-4}
Qwen3-0.6B	3×10^{-5}	5×10^{-5}	10^{-5}
Qwen3-8B	10^{-5}	5×10^{-5}	10^{-5}

My view of the movie screen was blocked. What's the best option?

- The couple behind me was whispering
- A tall person was sitting in front of me
- We are looking for a cause

My view of the movie screen was blocked. Select the most plausible cause:

- The couple behind me was whispering
- A tall person was sitting in front of me

My view of the movie screen was blocked because... Choose between:

- The couple behind me was whispering
- A tall person was sitting in front of me

Exercise: choose the most plausible alternative. My view of the movie screen was blocked because...

- The couple behind me was whispering
- A tall person was sitting in front of me

Pick the more likely continuation to the following sentence: My view of the movie screen was blocked as a result of:

- The couple behind me was whispering
- A tall person was sitting in front of me

My view of the movie screen was blocked. This happened because... Help me pick the more plausible option:

- The couple behind me was whispering
- A tall person was sitting in front of me

My view of the movie screen was blocked. I am hesitating between two options. Help me choose the more likely cause:

- The couple behind me was whispering
- A tall person was sitting in front of me

“The couple behind me was whispering” or “A tall person was sitting in front of me”? My view of the movie screen was blocked, because

Figure 3: All filtered SuperGLUE (COPA) templates rendered on one example.

Table 5: PPCL loss-weight sweep on Qwen3-0.6B, Rouge-L on the test split. **Bold** values belong to the statistically best group per column.

Run	avg	best	worst
$\lambda_3 = 0.1$	0.5087	0.6391	0.3487
$\lambda_3 = 1.0$	0.5088	0.6385	0.3587
$\lambda_3 = 10.0$	0.4945	0.6309	0.3670
$\lambda_3 = 100.0$	0.3528	0.4517	0.1099

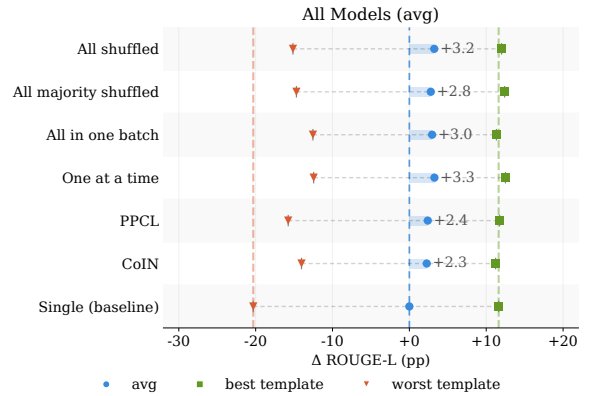


Figure 4: Performance of each method relative to IFT in percentage points averaged across models. The circle, square, and triangle mark the average, best, and worst template score respectively; the dashed span reflects sensitivity to prompt variance. Vertical lines extending from IFT serve as reference. A star above a marker indicates membership in the statistically best group.

Table 6: Raw Rouge-L scores on the test set. For each model we report the mean across all templates (*avg*), the best-template score (*best*), and the worst-template score (*worst*). The upper block lists the two references that require no robustness-oriented training: the untuned base checkpoints and 4-shot in-context learning (ICL) on those same checkpoints. *Single (5 ep.)* is the step-matched control, which trains the single-template baseline for five epochs to approximately match the optimizer-step count of the multi-template runs. It was run on the two small models only. **Bold** values belong to the statistically best group per column over the one-epoch trained methods, as in the main body of the paper.

Method	Qwen3-0.6B			Qwen3-8B			Llama3.2-1B			Llama3.1-8B		
	avg	best	worst	avg	best	worst	avg	best	worst	avg	best	worst
<i>No robustness training</i>												
Base model	0.093	0.218	0.025	0.434	0.640	0.191	0.051	0.089	0.030	0.060	0.138	0.024
ICL	0.457	0.579	0.296	0.660	0.769	0.469	0.192	0.291	0.056	0.375	0.483	0.211
<i>Trained</i>												
Single (baseline)	0.514	0.618	0.308	0.634	0.753	0.416	0.479	0.629	0.210	0.639	0.730	0.519
Single (5 ep.)	0.519	0.642	0.354	—	—	—	0.494	0.607	0.242	—	—	—
All shuffled	0.554	0.632	0.406	0.668	0.770	0.485	0.531	0.623	0.310	0.642	0.721	0.458
All majority shuffled	0.549	0.635	0.416	0.663	0.769	0.477	0.531	0.635	0.311	0.634	0.722	0.473
All in one batch	0.556	0.627	0.452	0.655	0.758	0.467	0.524	0.608	0.379	0.648	0.726	0.464
One at a time	0.563	0.648	0.449	0.653	0.760	0.462	0.534	0.634	0.363	0.645	0.723	0.493
PPCL	0.521	0.605	0.368	0.659	0.751	0.480	0.531	0.639	0.316	0.649	0.741	0.470
CoIN	0.529	0.607	0.392	0.673	0.774	0.480	0.511	0.613	0.302	0.643	0.720	0.530

Table 7: Validation Rouge-L ($\times 100$) per checkpoint for Llama3.1-8B. Dashes mark checkpoints beyond the end of a run: single-template training covers fewer optimizer steps than multi-template training, and the majority-template runs fewer than the all-template runs. The final checkpoints close to the next thousand steps are rounded up.

Step	Single	All shuffled	All maj. shuffled	One-at-a-Time	All-in-One-Batch	PPCL	CoIN
0	5.96	5.96	5.96	5.96	5.96	5.96	5.96
1,000	58.61	64.70	56.25	54.57	64.63	61.33	59.88
2,000	56.51	65.12	57.43	59.82	65.00	61.91	59.87
3,000	—	65.63	58.01	59.44	64.92	58.80	59.08
4,000	—	65.53	59.06	64.26	66.27	60.36	60.26
5,000	—	67.75	59.21	56.50	65.50	60.60	60.75
6,000	—	67.15	59.37	58.08	64.89	60.40	60.22
7,000	—	67.20	58.82	57.41	65.06	61.45	61.28
8,000	—	64.98	59.04	59.81	66.30	57.83	61.42
9,000	—	66.06	—	58.38	66.13	—	—
10,000	—	66.69	—	58.28	64.59	—	—

F Rank Classification Accuracy

The T0-benchmark was originally evaluated using rank classification accuracy. Therefore, making the generative Rouge-L our primary metric is a deliberate choice. First, in rank classification accuracy the model is handed the candidate set and is asked only for a relative ordering of it, it is not used in a generative setting. Second, it only requires that the correct option remains marginally more likely, while the model’s generative behavior could shift substantially across reformulations. Thus, a model can appear more prompt-robust under rank classification accuracy than under generative metrics. Third, constraining the model to a fixed candidate set compresses the differences between methods that our comparison depends on: on Qwen3-8B every method lands within 0.3 accuracy points of every other (see Table 8), leaving almost no signal to separate them. Fourth, rank classification accuracy only works for the test split of our dataset because the training and validation splits incorporate examples without concrete answer sets.

Table 8: Rank classification accuracy on the test split. *avg* is the mean across all templates, *best* and *worst* the best- and worst-template scores.

Method	avg	best	worst
<i>Llama3.2-1B</i>			
SINGLE (baseline)	0.4821	0.5447	0.4025
ALL SHUFFLED	0.4939	0.5564	0.3919
ALL-IN-ONE-BATCH	0.4706	0.5651	0.3500
ONE-AT-A-TIME	0.5043	0.5726	0.4178
PPCL	0.4799	0.5469	0.3837
CoIN	0.4835	0.5616	0.3969
<i>Llama3.1-8B</i>			
SINGLE (baseline)	0.5446	0.6514	0.4578
ALL SHUFFLED	0.5644	0.6474	0.4555
ALL-IN-ONE-BATCH	0.5469	0.6293	0.4365
ONE-AT-A-TIME	0.5520	0.6557	0.4491
PPCL	0.5873	0.6785	0.4871
CoIN	0.5649	0.6929	0.4493
<i>Qwen3-0.6B</i>			
SINGLE (baseline)	0.4776	0.5314	0.4286
ALL SHUFFLED	0.4849	0.5435	0.4309
ALL-IN-ONE-BATCH	0.4712	0.5092	0.4295
ONE-AT-A-TIME	0.4752	0.5195	0.4276
PPCL	0.4739	0.5287	0.4258
CoIN	0.4781	0.5256	0.4258
<i>Qwen3-8B</i>			
SINGLE (baseline)	0.4966	0.5295	0.4568
ALL SHUFFLED	0.4979	0.5298	0.4597
ALL-IN-ONE-BATCH	0.4963	0.5295	0.4579
ONE-AT-A-TIME	0.4982	0.5296	0.4619
PPCL	0.4956	0.5275	0.4580
CoIN	0.4979	0.5324	0.4603

G Why PPCL and CoIN Fail

Both auxiliary objectives fail to reliably improve on the average and worst-case performance compared to the far cheaper data-construction schedules. To determine whether they fail to optimize their objective or fail to generalize from it, we measure the quantity each loss penalizes directly, after training.

Measured quantities For CoIN we compute the contrastive difference between the same-example cross-template similarity and the average cross-example similarity over the model’s hidden states at a given readout position. This mirrors the contrastive target of CoIN without requiring its training-pair construction at evaluation time. A higher Diff indicates stronger semantic-over-lexical alignment, that is, exactly what CoIN optimizes for. For the label readout we check the hidden states of the last label token and for the prompt readout the last prompt token. The results are in Table 9.

For PPCL we compute the cross-template Jensen–Shannon divergence of the output distributions exactly matching its training objective. A lower JS corresponds to more consistent generation across templates. Again we read out either the average of all label tokens, as in the PPCL paper, or from the last prompt token. The results are in Table 10.

H Gradient Interference

Gradient Interference measurements During ALL-IN-ONE-BATCH training we compute per-template gradients and summarize their disagreement with four scale-invariant statistics:

- **Mean pairwise cosine similarity** over all template-gradient pairs (1 = collinear, 0 = orthogonal, negative = opposed), i.e. whether the templates share a common descent direction.
- **Coordinate-level sign conflict**: the fraction of parameters on which at least two template gradients disagree in sign (0 = every parameter agrees, 1 = every parameter contested).
- **Magnitude cancellation**: the fraction of the average per-template gradient norm that the naive gradient average fails to retain (0 = averaging keeps the full norm, 1 = gradients cancel entirely).

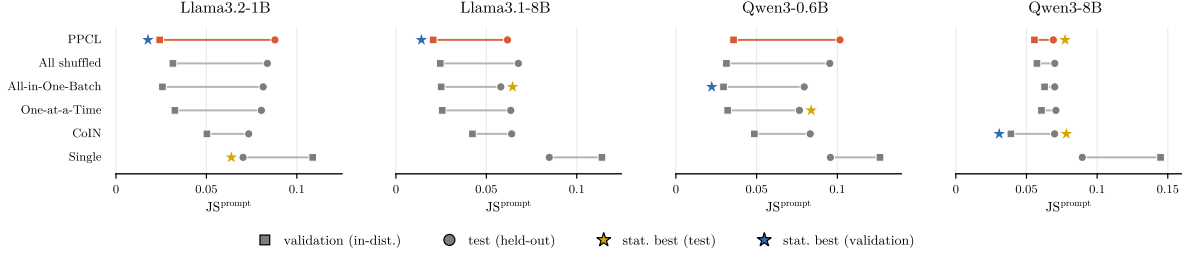


Figure 5: The cross-template Jensen–Shannon divergence of the output distributions on the prompt readout. Squares show the score on the validation split, while circles show the score on the test split. A star next to a marker indicates membership in the statistically best group for that readout. PPCL achieves for the Llama models substantially lower divergence in the validation set, but this advantage disappears in the held-out test set.

Table 9: CoIN diagnostic. Diff (higher = stronger semantic-over-lexical alignment) at the prompt (p) and label (l) readouts, on the held-out test split and the in-distribution validation split. CoIN dominates at the label readout, where its loss is applied, but not at the prompt readout, where generation begins.

Method	test		val	
	Diff ^p	Diff ^l	Diff ^p	Diff ^l
<i>Llama3.2-1B</i>				
SINGLE (baseline)	0.0861	0.0107	0.2051	0.0147
ALL SHUFFLED	0.2417	0.0156	0.4265	0.0186
ALL-IN-ONE-BATCH	0.1848	0.0132	0.3320	0.0174
ONE-AT-A-TIME	0.2603	0.0134	0.4141	0.0165
PPCL	0.1169	0.0119	0.2542	0.0154
CoIN	0.2095	0.7792	0.3684	0.7907
<i>Llama3.1-8B</i>				
SINGLE (baseline)	0.1081	0.0033	0.2405	0.0048
ALL SHUFFLED	0.1324	0.0031	0.3149	0.0045
ALL-IN-ONE-BATCH	0.1068	0.0030	0.2634	0.0043
ONE-AT-A-TIME	0.1223	0.0031	0.2944	0.0046
PPCL	0.1209	0.0029	0.2738	0.0042
CoIN	0.1234	0.7896	0.2843	0.8064
<i>Qwen3-0.6B</i>				
SINGLE (baseline)	0.0506	0.0024	0.1027	0.0035
ALL SHUFFLED	0.0633	0.0016	0.1351	0.0024
ALL-IN-ONE-BATCH	0.0594	0.0013	0.1283	0.0019
ONE-AT-A-TIME	0.0555	0.0019	0.1267	0.0028
PPCL	0.0538	0.0024	0.1070	0.0037
CoIN	0.0764	0.7572	0.1622	0.7924
<i>Qwen3-8B</i>				
SINGLE (baseline)	0.0208	0.0627	0.0298	0.0581
ALL SHUFFLED	0.0214	0.0244	0.0331	0.0259
ALL-IN-ONE-BATCH	0.0202	0.0178	0.0311	0.0194
ONE-AT-A-TIME	0.0222	0.0269	0.0339	0.0294
PPCL	0.0209	0.0146	0.0321	0.0157
CoIN	0.0514	0.7355	0.0582	0.7351

Table 10: PPCL diagnostic. Cross-template Jensen–Shannon divergence (lower = more consistent generation) at the prompt (p) and label (l) readouts. PPCL reaches the lowest validation JS on the Llama models, so its objective succeeds in-distribution, but the advantage does not transfer to the held-out test split, where it is the worst multi-template method on Llama3.2-1B and Qwen3-0.6B.

Method	test		val	
	JS ^p	JS ^l	JS ^p	JS ^l
<i>Llama3.2-1B</i>				
SINGLE (baseline)	0.0703	0.0325	0.1088	0.0466
ALL SHUFFLED	0.0837	0.0375	0.0315	0.0145
ALL-IN-ONE-BATCH	0.0814	0.0361	0.0257	0.0121
ONE-AT-A-TIME	0.0804	0.0344	0.0326	0.0148
PPCL	0.0879	0.0400	0.0242	0.0112
CoIN	0.0734	0.0307	0.0503	0.0240
<i>Llama3.1-8B</i>				
SINGLE (baseline)	0.0848	0.0379	0.1139	0.0450
ALL SHUFFLED	0.0677	0.0301	0.0245	0.0112
ALL-IN-ONE-BATCH	0.0580	0.0258	0.0250	0.0111
ONE-AT-A-TIME	0.0635	0.0278	0.0256	0.0115
PPCL	0.0617	0.0283	0.0206	0.0095
CoIN	0.0640	0.0286	0.0423	0.0198
<i>Qwen3-0.6B</i>				
SINGLE (baseline)	0.0957	0.0856	0.1264	0.0557
ALL SHUFFLED	0.0953	0.0770	0.0313	0.0144
ALL-IN-ONE-BATCH	0.0795	0.0660	0.0295	0.0135
ONE-AT-A-TIME	0.0765	0.0650	0.0321	0.0149
PPCL	0.1016	0.0913	0.0357	0.0167
CoIN	0.0832	0.0709	0.0486	0.0227
<i>Qwen3-8B</i>				
SINGLE (baseline)	0.0895	0.0814	0.1449	0.0739
ALL SHUFFLED	0.0700	0.0619	0.0574	0.0278
ALL-IN-ONE-BATCH	0.0700	0.0623	0.0628	0.0281
ONE-AT-A-TIME	0.0708	0.0630	0.0606	0.0299
PPCL	0.0690	0.0616	0.0556	0.0245
CoIN	0.0699	0.0632	0.0390	0.0170

- **Entropy-based effective rank:** how many distinct directions the per-template gradients span, from 1 (one shared direction) up to the number of templates T (Roy and Vetterli, 2007).

We compute these metrics every 1,000 steps for both Llama models (see Table 11). In addition, we report the per-layer pairwise cosine similarity and sign conflict for these models, see Table 12 and Table 13.

Results Per-template gradients agree only coarsely, at a mean cosine similarity of about 0.54 on both models, and the disagreement is pronounced at the coordinate level: templates push in opposite directions on 57% (Llama3.2-1B) and 64% (Llama3.1-8B) of the trainable parameters, roughly 18–20% of the gradient magnitude cancels under averaging, and the per-template gradients span about three effective directions rather than one. These values are stable across training (Table 11). Interference decreases with depth (Table 12, Table 13): sign conflict falls by roughly 23 points from the first to the last block of Llama3.1-8B, which is consistent with the conflict originating in the surface form of the prompt and dissipating as representations abstract away from wording. We observe no meaningful difference between the attention and feed-forward layers. Mixing templates within a batch forces the optimizer to reconcile several competing directions in a single update, whereas the template-homogeneous batches of ONE-AT-A-TIME never co-locate those conflicting gradients.

I Statement on AI use and Risks

The authors used AI-assisted writing tools for language editing. All content was verified by the authors.

The authors do not see direct risks from publishing the paper as all used data is from well-known benchmarks used before.

Table 11: Interference statistics over training for ALL-IN-ONE-BATCH. Avg. is the mean over all checkpoints for Llama3.2-1B. For Llama3.1-8B it excludes $t = 0$, which is an outlier due to the LoRA adapters being zero-initialized, and the measurement preceding any training.

Statistic	$t = 0$	1001	2002	3003	4004	5005	6006	Avg.
<i>Llama3.2-1B</i>								
cos	0.531	0.532	0.541	0.546	0.550	0.551	0.549	0.543
cos (min)	0.289	0.294	0.293	0.292	0.299	0.295	0.295	0.294
sign-conflict	0.615	0.571	0.564	0.565	0.566	0.560	0.561	0.572
cancellation	0.217	0.204	0.202	0.194	0.189	0.185	0.191	0.197
eff-rank	3.273	2.988	2.852	2.836	2.802	2.805	2.810	2.909
<i>Llama3.1-8B</i>								
cos	0.502	0.514	0.564	0.567	0.556	0.551	0.544	0.549
cos (min)	0.274	0.251	0.313	0.311	0.295	0.272	0.272	0.286
sign-conflict	0.379	0.667	0.640	0.634	0.634	0.629	0.630	0.639
cancellation	0.232	0.204	0.169	0.167	0.161	0.169	0.181	0.175
eff-rank	3.505	3.148	2.860	2.815	2.974	2.854	2.985	2.939

Table 12: Per-layer cosine similarity and sign conflict for the attention and feed-forward sublayers of Llama3.2-1B, averaged over training. Interference decreases with depth.

Layer	Attention		Feed-forward	
	cos	sign-conf.	cos	sign-conf.
0	0.483	0.714	0.499	0.687
1	0.485	0.710	0.547	0.692
2	0.480	0.715	0.484	0.694
3	0.495	0.704	0.491	0.690
4	0.502	0.703	0.500	0.685
5	0.512	0.692	0.507	0.681
6	0.526	0.683	0.512	0.680
7	0.536	0.683	0.519	0.676
8	0.543	0.675	0.534	0.664
9	0.561	0.662	0.550	0.644
10	0.566	0.648	0.560	0.628
11	0.572	0.635	0.583	0.610
12	0.587	0.620	0.591	0.601
13	0.609	0.609	0.600	0.587
14	0.605	0.604	0.627	0.568
15	0.626	0.579	0.646	0.543

Table 13: Per-layer cosine similarity and sign conflict for the attention and feed-forward sublayers of Llama3.1-8B, averaged over training. Layers 0–15 are shown on the left and 16–31 on the right. Interference decreases with depth.

Layer	Attention		Feed-forward		Layer	Attention		Feed-forward	
	cos	sign-conf.	cos	sign-conf.		cos	sign-conf.	cos	sign-conf.
0	0.347	0.811	0.336	0.780	16	0.519	0.661	0.543	0.651
1	0.343	0.783	0.450	0.767	17	0.528	0.658	0.539	0.644
2	0.353	0.788	0.374	0.765	18	0.510	0.655	0.536	0.642
3	0.365	0.776	0.368	0.767	19	0.511	0.655	0.540	0.634
4	0.382	0.776	0.371	0.764	20	0.529	0.641	0.540	0.631
5	0.381	0.767	0.383	0.757	21	0.539	0.640	0.544	0.628
6	0.422	0.748	0.404	0.748	22	0.524	0.640	0.549	0.623
7	0.449	0.733	0.438	0.730	23	0.537	0.633	0.546	0.620
8	0.465	0.718	0.454	0.719	24	0.536	0.634	0.551	0.622
9	0.475	0.715	0.468	0.708	25	0.539	0.629	0.550	0.616
10	0.490	0.700	0.495	0.693	26	0.558	0.616	0.557	0.611
11	0.511	0.683	0.513	0.684	27	0.559	0.611	0.570	0.603
12	0.507	0.684	0.525	0.679	28	0.566	0.605	0.575	0.595
13	0.521	0.676	0.538	0.667	29	0.580	0.593	0.589	0.586
14	0.528	0.668	0.539	0.663	30	0.566	0.595	0.603	0.574
15	0.523	0.666	0.550	0.656	31	0.600	0.573	0.616	0.550