

SIGNATURES OF SEMANTIC SEARCH IN THE ACTIVATIONS OF LARGE LANGUAGE MODELS

Luke Leckie^{1,2,3} Peter M. Todd^{2,4} Jacob G. Foster^{1,2,3,5}

¹Department of Informatics,
Luddy School of Informatics, Computing, and Engineering,
Indiana University, Bloomington, IN

²Cognitive Science Program, Indiana University, Bloomington, IN

³Center for Possible Minds, Indiana University, Bloomington, IN

⁴Department of Psychological and Brain Sciences,
Indiana University, Bloomington, IN

⁵Santa Fe Institute, Santa Fe, NM

Correspondence: lleckie@iu.edu

ABSTRACT

When recalling lists of concepts (e.g., animals) during the semantic fluency task (SFT), both humans and large language models (LLMs) organise their output into clusters of related items (e.g., sea animals) that are punctuated by strategic switches between clusters. In humans, this pattern can be explained by a semantic foraging process, whereby distinct neural and behavioural signatures accompany within-cluster production (“exploit”) and between-cluster switching (“explore”). Whether LLMs likewise represent these two search regimes within their internal states is unknown. Here, we apply a range of mechanistic interpretability techniques to provide evidence for this. In Study 1, we use the Jacobian lens (J-lens), which maps intermediate-layer residual-stream representations to token-level activations, to show that concept-level activations predict switching. First, we find that switching coincides with low next-token activations. Moreover, the probability of switching rises as the set of strongest J-lens activations (the J-space) becomes depleted of items from the category currently being produced, analogous to explore-exploit decision-making during patch foraging. We then show that middle-layer J-lens activations of abstract category-related labels (e.g., “water”) increase in anticipation of switching into that category. We confirm these representations to causally influence switching by deriving steering vectors that target category switching. In Study 2, we identify generic residual stream directions that are activated during and in anticipation of switching. By steering activations along these directions, we bias increased or decreased rates of switching. Our study extends the semantic foraging framework to artificial intelligences and provides evidence that LLMs maintain distinct representational signatures for exploration and exploitation as they verbalise conceptual information.

1 INTRODUCTION AND RELATED WORK

Searching for resources is a ubiquitous challenge faced by agents (Hills et al., 2015; Charnov, 1976; Todd et al., 2012). In search environments where resources are distributed patchily over space, agents must balance the local exploitation of known but depleting resources against global exploration for novel but uncertain resources (Charnov, 1976). This type of search problem is typified by animal patch foraging behaviours. During patch foraging, animals typically decide when to leave a depleting patch and explore for a new one based on the value of continued exploitation relative to expected opportunities available elsewhere (Charnov, 1976). Alternation between local exploitation and global exploration has been described across a wide diversity of organisms and contexts; it may

constitute a general solution to efficient search in structured environments (Marques et al., 2020; Nicolau Jr et al., 2009; Hogeveen et al., 2022; Todd et al., 2012; Buatois & Lihoreau, 2016).

Mounting evidence from human concept-list recollection studies suggests that the retrieval of semantic information from internal meaning spaces also operates according to a foraging process that balances local exploitation against global exploration (Hills et al., 2012; Lundin et al., 2023; Nour et al., 2023). Research has focused on the Semantic Fluency Task (SFT), in which individuals are tasked with naming as many concepts (e.g., animals) as they can within a short period of time. Concept recollection during the SFT is typically arranged into bouts of exploitative “clustering”, in which individuals name closely semantically related items (e.g., listing farm animals); these bouts are separated by strategic exploratory “switches” between clusters (e.g., farm animals → sea animals) (Troyer et al., 1997; Lundin et al., 2020). The semantic foraging framework is supported by studies showing that clustering and switching regimes are coupled to distinct behavioural and neural signatures. For instance, when switching, inter-item response latency increases (Hills et al., 2012) and both the posterior cerebellum and hippocampus experience heightened activation, with characteristic “ripple bursts” of activity travelling through the hippocampus (Lundin et al., 2023; Nour et al., 2023). Moreover, the activity of these two regions progressively increases (“ramping”) with the time spent naming items within a given cluster (Lundin et al., 2023). Finally, evidence for patch-like semantic representations comes from work showing that priming individuals with high-level category-related concepts (e.g., “river”) facilitates the retrieval of exemplar items (e.g., “crocodile”), suggesting that item-level retrieval depends on the activation of category-level semantic representations (Neely, 1977; Dirani & Pykkänen, 2023; Rissman & Lupyan, 2024). While SFT-performing Large Language Models (LLMs) similarly produce concept lists arranged into clusters and switches (Lacosse et al., 2026b) it is not presently known if this is related to a semantic foraging-like process—with distinct activation signatures for clustering and switching—or only bears superficial resemblances to human-produced text.

Recent mechanistic interpretability research provides evidence that LLMs maintain internal representations that track and influence the structure of generated language (Pal et al., 2023; Hendel et al., 2023; Todd et al., 2024; Dong et al., 2025). For example, research using sparse autoencoders to track changes in model activations when processing pre-created stories finds that activations strongly shift across event boundaries (Lubana et al., 2025). Furthermore, research examining LLM reasoning behaviours, such as back-tracking and expressing uncertainty, has found that these behaviours are coupled to specific directions in model activation space, which can be “steered” to bias the propensity for these behaviours (Venhoff et al., 2025). Other research provides evidence that models hold and act on anticipatory internal representations of future content. Specifically, LLMs writing rhyming poetry internally represent candidate end-of-line rhyming words before composing the line; editing these representations restructures the intervening text to cohere with the edited end-of-line word (Lindsey et al., 2025). More recently, work employing the “Jacobian-lens” (J-lens), which maps intermediate-layer activations to token-level activations, has found that LLMs can represent intermediate and higher-level concepts related to their current output in their mid-layers (e.g., the token “red” may have a high activation when the LLM is answering “The fourth planet from the sun is [Mars]”) (Gurnee et al., 2026). One recent study found that LLMs processing human-generated SFT lists assign low next-token probabilities to their switch events; these LLMs also have different residual stream activations when specifically prompted to generate a semantically similar versus different item to one provided (Lacosse et al., 2026b) and can collaborate with humans performing the SFT to enhance their concept retrieval (Lacosse et al., 2026a). Together, these findings link changes in generated language to identifiable internal representations. However, research has not yet directed mechanistic interpretability tools, such as the J-lens, to study or manipulate the dynamics of LLM activations as they naturally perform semantic foraging tasks. It is, therefore, unclear if the representations of LLMs support a foraging-like process that regulates transitions between exploitation and exploration during semantic retrieval. Understanding this is critical: The same area-restricted search dynamics that govern SFT production are hypothesised to extend into naturalistic speech (Leckie et al., 2026) and could also be shared across a range of search tasks that are central to the utility of LLMs, including searching for information over the internet (Nakano et al., 2022), selecting tools (Schick et al., 2023), navigating code (Yang et al., 2024), and retrieving information from context (Liu et al., 2024). Discovering latent explore-exploit dynamics in these behaviours and modulating the balance of exploration versus exploitation could enhance the efficiency of the search processes underpinning the effectiveness of these LLM behaviours.

In this paper, we apply a range of mechanistic interpretability techniques to study this. In Study 1, we examine how concepts are represented across different layers of LLMs during the SFT and ask if these representations signify participation in switching versus clustering behaviours. To do this, we first investigate how final-layer token probabilities differ preceding switching versus clustering events. We then test whether final-layer differences in concept activation are detectable in earlier layers, by applying the J-lens to internal layers of the residual stream. We find that switch events are preceded by low next-token probabilities and that, although all items show increased activation in anticipation of their verbalisation, this effect is lower for items participating in switches, as compared to clustering. Second, we use the J-lens to identify internal conceptual patches comprising the most strongly activated concepts. We find that as these patches become depleted with items from the same category that an LLM is presently verbalising from, LLMs become increasingly likely to switch to a novel category; this effect is greater than expected by depleting the overall pool of items in a category. Third, we show that the activations of higher-level category-related labels (e.g., “Africa”) increase in anticipation of switching into the corresponding category. We then demonstrate these item- and category-level activations to influence switching behaviour by using them to derive steering vectors that induce switching towards target categories. In Study 2, we identify generic directions in LLM activation space that predict switching behaviour and ramp in anticipation of switching. By steering SFT-performing LLMs along this direction, we bias increased or decreased likelihoods of switching. This study provides evidence that LLMs hold distinct representational signatures for exploration and exploitation as they search for conceptual resources, demonstrating semantic foraging-like search behaviour as a property of LLMs.

2 EXPERIMENTAL SET-UP

Our experiments were replicated across five open-weight instruction-tuned LLMs, ranging between 2-billion and 9-billion parameters: Gemma-2-9B (42 layers), Gemma-2-2B (25 layers), Llama-3.1-8B (32 layers), Llama-3.2-3B (28 layers), and Qwen2.5-7B (28 layers). We note that even the smallest models are effective at performing the SFT, given the simplicity of the task. For each model, we performed experiments analysing or steering model activations at regularly spaced residual stream layers (every second layer, from layer 2 to near-final depth: layers 2–40 for Gemma-2-9B, 2–24 for Gemma-2-2B, 2–26 for Qwen2.5-7B, 2–30 for Llama-3.1-8B, and 2–26 for Llama-3.2-3B). To ease model comparison, in our figures we report fractionalised layer depths, with 0 being the initial input layer and 1 being the final readout layer. For each model-layer combination, experiments were iterated over 100 different random seeds. All generations used nucleus sampling with temperature=0.9 and top-p=0.95, with a fixed random seed. All prompts were issued via each model’s own chat template, without a system prompt. Outputs were capped at 200 tokens.

All experiments tasked LLMs with performing the Semantic Fluency Task (SFT) (Fig. 1A). To do this, LLMs were prompted as follows: *“Name as many different animals as you can, one after another, separated by commas. Just the list.”*

We designated animal categories by using an extended version of the well-established Troyer category designations (Troyer et al., 1997). In these category designations, animals can participate in multiple categories (e.g., alligator belongs to both reptiles/amphibians and water). Switching is identified when a concept is named that shares none of the category labels with the preceding concept (see Appendix for further details).

3 STUDY 1: CONCEPT ACTIVATIONS INDICATE AND ANTICIPATE SWITCHING

3.1 ITEM ACTIVATIONS DIFFER BETWEEN CLUSTERING AND SWITCHING

In human semantic fluency, switching behaviour is thought to be tied to the exploration for new items and semantic categories (Hills et al., 2012). In Study 1, we aim to test for a similar exploratory process in SFT-performing LLMs by comparing the activations of individual concepts during clustering and switching. To do this, we first ask if the next-token probabilities for verbalised items, as computed at the final layer, differ at the token position immediately prior to a switching event, as compared to a clustering event (e.g., “shark” may have a different next-token probability in the context of a switch versus a cluster). Semantic foraging expects that next-token

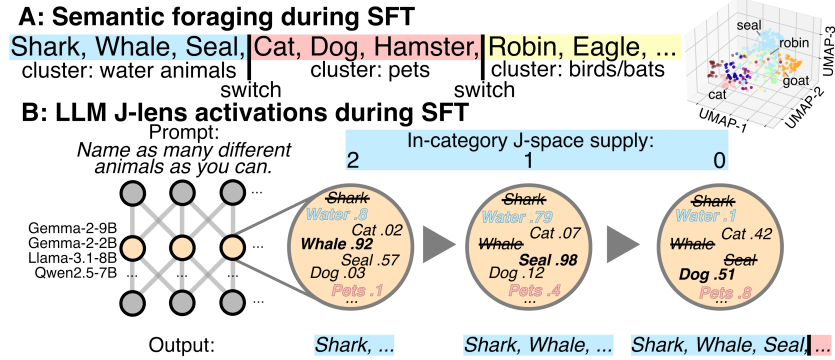


Figure 1: **Semantic fluency and LLM J-lens activations.** **A.** Left: Example Semantic Fluency Task (SFT) output. Cluster labels are given by colours and switches between clusters are indicated by vertical black lines in-between distinct clusters. Right: Uniform Manifold Approximation (UMAP) of Word2Vec embeddings of animal names. Colours indicate extended Troyer category designations. **B.** Illustration of LLM J-lens activations during SFT. Left neural network represents an LLM. Beige-highlighted layer represents residual stream representations of a layer under study by the J-lens. Beige circle containing concepts represents a set of concepts included within the J-space for that layer. Note that in our experiments we considered the J-space as the top-25 strongest J-lens activations. J-lens activations are indicated by numbers to the right of concepts. Items that have already been verbalised are indicated by strikethroughs. Higher-level abstract category-related labels (“water” and “pet”) are indicated in blue and red font, respectively. The in-category J-space supply is computed as the number of items (not including category-related labels) within the J-space that belong to the category from which the model is presently naming items but that have not been verbalised yet. In this example, as the LLM names water animals and depletes the in-category J-space supply for that category, it switches to naming animals within the pet category. Note that the J-lens activation for the abstract category-related “pet” label increases in anticipation of switching to that category (See Figure 3 for analysis).

probabilities should be lower in advance of switching, reflecting an exploratory search over next items. Consistent with this prediction and work examining this in human-produced SFTs (Lacoste et al., 2026b), next-token probabilities were significantly lower for switch-participating items, as compared to cluster-participating items (Fig. 2A, Linear Regression [LR], all models: $\chi^2 \geq 32.39$, $p < 0.0001$).

We then ask if switch-associated differences in final-layer model activations are detectable in earlier residual stream layers. To derive item-level activations from residual stream layers, we use model-specific Jacobian-lenses (J-lens). As described in other work (Gurnee et al., 2026), the J-lens allows the inference of item-level activations from intermediate residual stream layers by mapping intermediate representations to final-layer states. The J-lens activations of a concept roughly correspond to the tendency of a model to verbalise that concept, or items related to that concept (e.g., “sea” could be highly activated as the model prepares to say “dolphin”). We use pre-computed J-lenses, available on Neuronpedia (Lin, 2023). As Llama-3B does not have a precomputed J-lens, we did not perform J-lens experiments with this model.

Consistent with our token probability findings (Fig. 2A), we expect that the activations of switch-participating items should be lower than that of cluster-participating items. Indeed, we find that although the activations of both cluster and switch participating items increase in anticipation of their emission (Fig. 2B; Fig. S1), this effect is weaker for switching than for clustering (Fig. S1, Table S2) and activations are significantly lower for switch-participating items, as compared to cluster-participating items prior to their emission (Fig. 2C, Table S1, LR, all models from layer 8 up: $\chi^2 \geq 98.17$, $p < 0.0001$). For most models this effect is apparent from the early-middle layers and increases in potency up until the late layers (Fig. 2C). This result provides evidence that elevated next-item uncertainty, characterising semantic exploration, is represented throughout LLM layers.

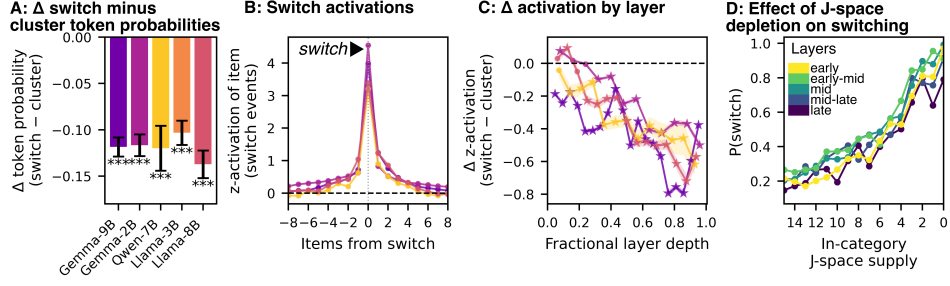


Figure 2: **Semantic fluency item activations and J-space depletion.** **A.** Comparison of next-token probabilities for items participating in clustering versus switching events across models. Coloured bars extend to the average difference in next token probabilities for switching events minus clustering events. Black whiskers extend to $\pm$ standard error (se). Next-token probabilities were significantly lower during switching (linear models, all $p < 0.0001^{***}$) for all models. **B.** Z-scored J-lens activations for items participating in switching, measured in advance (negative lag) and after (positive lag) their emission (lag=0). Points represent means across seeds and layers; shaded areas represent standard errors. **C.** Δ in Z-scored J-lens activations across fractionalised layers, as measured immediately prior to item emission (lag=-1). Points represent means across seeds and bars around points extend to $\pm$ se. Stars for means indicate significantly different activations ($p < 0.05$ after Benjamini-Hochberg [BH] correction) of item activations between items participating in switching versus clustering, as tested by linear models. **D.** The probability of switching to a new category as a function of the in-category J-space supply, averaged across layer blocks and models. More yellow points indicate earlier layer blocks and purple, later. Note that J-space supply *decreases* from left to right.

3.2 J-SPACE CONCEPT DEPLETION PREDICTS SWITCHING

The semantic foraging framework predicts that as a given category, or patch, of semantic information becomes depleted, a strategic decision to switch to a new category (“explore”) should become increasingly likely (Hills et al., 2012; Charnov, 1976). Therefore, we next ask if the J-lens can be used to identify conceptual patches within the activations of LLMs and whether their depletion predicts switching behaviour (Fig. 1). Previous work has defined the concepts corresponding to the top-25 strongest J-lens activations as comprising a “Jacobian-space” (J-space), which has been compared to the global workspace model of human cognition (Gurnee et al., 2026). In our experiments, we therefore test if the number of items in the J-space that belong to the current category and have not been verbalised predicts switching (Fig. 1B). If LLMs perform semantic foraging, then as the in-category J-space supply drops, the probability of switching to a new category should increase.

As expected by the semantic foraging framework, we find that the probability of switching increases sharply as the J-space supply drops (Fig. 2D, Table S3, LR, for all models in middle layer blocks: $r \leq 0.31$, $p < 0.0001$). Furthermore, the effect of J-space depletion on switching probability is significantly stronger than when considering the effect of depleting the overall pool of animals that could be named within a given category for all models except for Qwen (Table S4, LR, effect at layer block with strongest effect: $F \geq 19.94$, $p < 0.0001$). These effects are robust across tested J-space sizes (See Appendix, Table S5) and are generally most salient in the middle layers, consistent with previous work interpreting the J-space as emerging within this layer range (Gurnee et al., 2026).

3.3 ACTIVATION OF ABSTRACT CATEGORY-RELATED LABELS ANTICIPATES SWITCHING

During human semantic fluency, the retrieval of individual items that are members of a given category is thought to depend upon the activation of that category’s semantic representation (e.g., naming “shark” and “jellyfish” depends upon the (latent) activation of the “sea animal” category) (Neely, 1977; Dirani & Pykkänen, 2023; Rissman & Lupyan, 2024). Thus, we next ask if LLMs similarly demonstrate heightened activation of abstracted category-related labels while clustering within that category—or in anticipation of switching into that category. To do this, we identify a number of category-related labels (Fig. 3E) and: 1) compare their average J-lens activations during clustering within that category, as compared to clustering in an unrelated category (Fig. 3A); 2) measure their J-lens activations before and after switching into a target/non-target category (Fig. 3B-D).

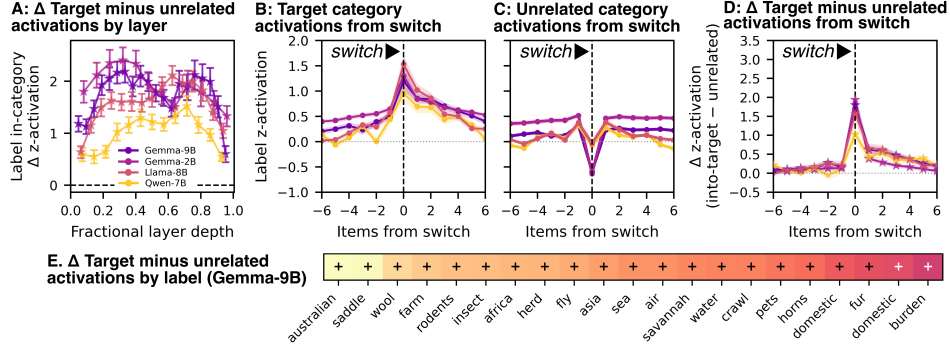


Figure 3: **J-lens activations of category-related labels during LLM semantic fluency.** **A.** Δ in the J-lens activations of category labels, subtracting the mean activation of each label during production of items in unrelated categories from mean activation during production of items in clusters with that category label (target category). Points indicate means across all tested labels and seeds. Bars extend to $\pm$ se. **B-D.** Layer-averaged J-lens activations of category labels preceding (negative x-values) and following a switch (positive x-values) into the target category (**B**) or an unrelated category (**C**), as well as the Δ between the two (target minus unrelated activation) (**D**). Points indicate means across seeds and layers; shaded areas indicate standard errors. **A** and **D**: Stars for means indicate significantly different activations ($p < 0.05$ after BH correction) of category-related labels between target and unrelated categories. **E.** Δ in target minus unrelated category label activations for each tested label (x-axis) for Gemma-2-9B, averaged across layers and seeds. More positive values (lighter cells) indicate stronger Δ activation of that label. Note that the first instance of “domestic” maps to the “domestic animals” category and the second maps to the “pets” category.

Consistent with the idea that category activation is coupled to the verbalisation of exemplar items in LLMs, we find that J-lens activation for category-related labels is heightened when models cluster within that target category as compared to unrelated categories; this effect is strongest in the middle layers (Fig. 3A, Table S6). The activation of labels progressively increases in anticipation of switching into their target category and spikes at the switch event, before progressively decreasing (Fig. 3B, LR, for all models, effect at switch into target category : $F \geq 848.35$, $p < 0.0001$). Interestingly, we observe that the activations of labels unrelated to the category being switched to also tend to increase in anticipation of switching (although this effect is weaker than for target labels S6), but that their activations drop sharply *at* the switch event before increasing again (Fig. 3C-D). This suggests that category selection during switching could be driven by competition between the activations of various categories. One category eventually receives higher relative activation and becomes the “winner” that gets switched to; the “losing” categories get suppressed (Fig. 3B-C-D).

3.4 CONCEPT ACTIVATIONS HAVE CAUSAL INFLUENCE ON SWITCHING

So far, our study provides evidence that the activations of LLMs show distinct signatures preceding switching events. This is true not only of the individual items that will be verbalised as part of the SFT (Fig. 2) but also for their higher-level category-related labels (Fig. 3). We next test if these signatures correspond to causal influences on switching behaviour during SFT. To do this, we create two different types of steering vectors (Fig. 4A): 1) *Item-level* steering vectors that average the residual stream activations of all individual items that fall within a target category; and 2) *Category-related* steering vectors that are the residual stream activations of one of the higher-order category-related labels used in the previous analysis. We create item-level steering vectors by identifying each single-token word, w , that falls within a given target category and computing the steering vector as $v_{w,L} = \text{normalize}(J[L]^T W_U[w]^T)$, where $W_U[w]$ is the word’s unembedding row vector, and $J[L]$ maps layer- L activations to the final residual stream via the J-lens. We obtain an item-level steering vector that broadly targets a category by averaging and then normalising the unit steering vectors for all member tokens in the parent category’s token set, T : $d_{T,L} = \text{normalize}\left(\frac{1}{|T|} \sum_{w \in T} v_{w,L}\right)$. To create category-related steering vectors, we use the same category-related labels as reported

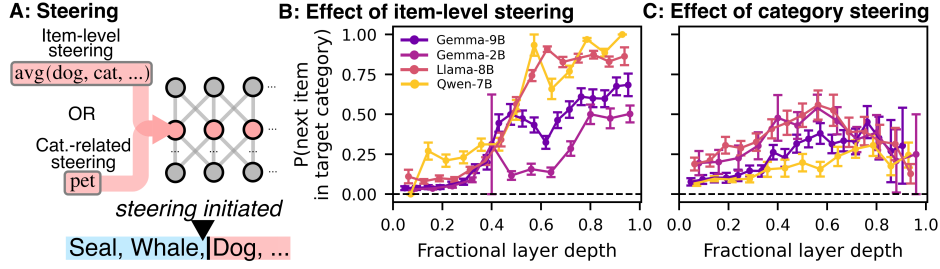


Figure 4: **Steering model activations to induce switching into target categories.** **A.** Models were induced to switch into target categories by steering vectors generated from averaging activations over item-level representations or from individual abstracted category-related labels. **B-C.** Effect of steering using item (**B**) or category-related (**C**) steering vectors. Points represent means across target-level probabilities computed across seeds and target categories tested and bars extend to $\pm$ se.

previously (Fig. 3E) and compute each label’s steering vector as $d_{c,L} = \text{normalize}(J[L]^\top W_U[c]^\top)$, where c is a single-token category-related label.

In our experiments, we apply a steering vector ($d_{T,L}$ for item-level steering or $d_{c,L}$ for category-related steering) during SFT generation, aiming to shift the model into the target category. We first generate an unsteered baseline sequence and then select a target token position at which the following hold: 1) the current item belongs to the same category as the preceding token (the model is clustering); 2) the target category is not among the item’s own categories. After identifying the target position, we task the model with continuing the SFT from that position while adding the steering vector to the residual-stream output of block L , such that $h_{L,t} \leftarrow h_{L,t} + s r_L d_L$, where $d_L = d_{T,L}$ for item-level steering and $d_L = d_{c,L}$ for category-related steering, t indexes the token position at which steering is applied, the steering coefficient s controls steering strength, and r_L is the mean residual norm at that layer, measured once per layer from a fixed reference generation. For all models and experiments, we used an s of 0.5, except for Qwen2.5-7B, which we found to be easily disrupted by steering; for this model, we used $s = 0.25$. After applying steering at a target token position, we see if the first concept produced in the continuation belongs to the target category (i.e., is a switch). This experiment was iterated 100 times for each target category.

Across all models, both modes of steering are effective at inducing switching into target categories (Fig. 4B-C), with the probability of switching into a target category for Gemma-9B reaching 0.68, for item-level steering (layer 40), and 0.45, for category-related steering (layer 32). While item-level steering tends to increase in potency up until the final tested layer (Fig. 4B), category-related steering is most potent when applied to the middle or mid-to-late layers of most models (Fig. 4C), supporting the idea that middle LLM layers are more important for representing abstract information (Skean et al., 2025; Cheng et al., 2025). These results confirm that concept activations at the item and category level have causal influence on LLM switch decision-making during the SFT.

4 STUDY 2: GENERIC SIGNATURES OF SWITCHING IN ACTIVATION SPACE

Our results so far show that the activations of individual concepts anticipate and causally influence switching into specific semantic categories. In Study 2, we ask if switching behaviour is coupled to *generic* directions in model activation space (i.e., directions that represent switching as such rather than switching into a particular category). If so, this would provide evidence for LLMs representing semantic exploration (switching) versus exploitation (clustering) as generic behaviors.

4.1 COMPARING RESIDUAL STREAM ACTIVATIONS BETWEEN CLUSTERING AND SWITCHING

We first compare model activations between switching and clustering events. We consider residual stream activations at two candidate positions in relation to each cluster/switch event (Fig. 5A). The *anticipatory* position considers activations at the token position immediately before switching (Fig. 5A). This position tests if there are activation signatures in advance of the model committing to

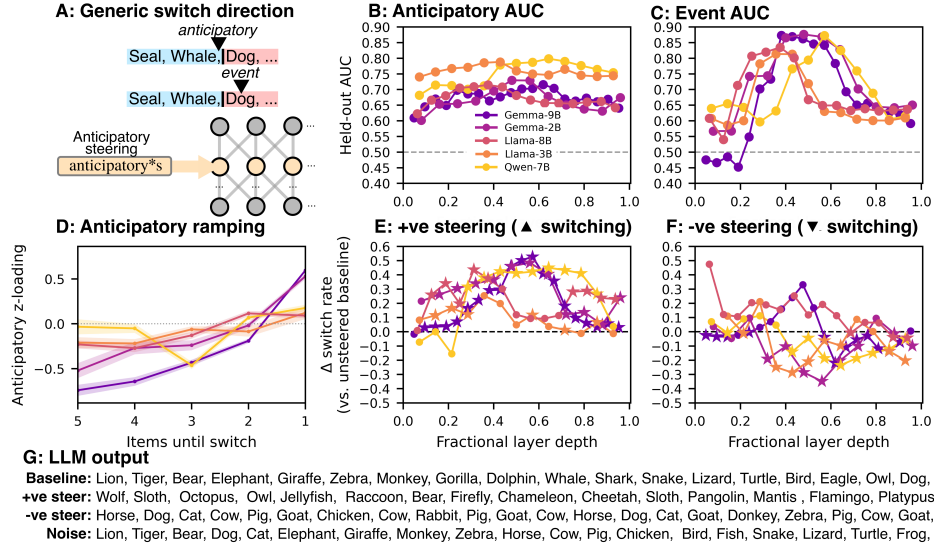


Figure 5: **Identifying and steering a generic direction for switching in model activation space.** **A.** Position of anticipatory and event tokens during SFT emission. Bottom neural net: anticipatory steering vectors, weighted by s , are used to bias switching. Positive s should bias increased switching and negative s , decreased. **B-C.** AUC from logistic regression models applied across layers and models for predicting switching versus clustering based on anticipatory (**B**) and event activations (**C**). **D.** Layer-averaged loading of model activations onto the anticipatory residual stream direction during clustering, up until switching. Anticipatory activations progressively ramp nearing a switch. Note that Qwen (orange) has the smallest mean cluster size in our experiments (2.4 ± 2.8). **E-F.** Average effect of positive (**E**) and negative steering (**F**) on switching across models and layers, relative to the average switch rate for each model. Points represent means across 100 SFTs. Stars for means indicate significant effects of steering as compared to noise. **G.** SFT output from Gemma-2-9B under baseline and each perturbation at layer 26.

switching. The *event* position considers residual stream states at the position of the switch event itself; this tests if clustering/switching are represented distinctively at the point of emission.

To evaluate the power of discovered directions, we initially generate 100 SFTs per model. Then, in a k -fold ($k=5$) cross-validation procedure, we take all layer L residual stream representations for each anticipatory or event position of items in our training set and perform Principal Component Analysis (PCA), to reduce their dimensionality to 30. Principal component loadings are used as predictors in L2-regularised logistic regression models (regulation strength=0.1), predicting whether the activations are paired with a switching or clustering event. This procedure is repeated for each fold, scoring the AUC for that layer. While an AUC of 0.50 would indicate that activations predict switching behaviour at chance, an AUC of 1 indicates perfect prediction. Cross-validation is performed such that no category appears in both training and test sets, minimising the influence of semantics.

As shown in Figure 5B-C, residual stream activations at both anticipatory and event positions are able to predict switching behaviour well above chance (Max AUC for Gemma-9B, anticipatory=0.72, layer 26; event=0.87, layer 16). Interestingly, while anticipatory predictive power is relatively consistent across model layers (Fig. 5B), prediction of switching at the event position is greatest for the middle layers (Fig. 5C). Furthermore, we find that as models produce more items within a given cluster, their activations load progressively more strongly onto the anticipatory direction (Fig. 5D, Table S7, LR, all models : $\chi^2 \geq 20.44$, $p < 0.0001$); this invites comparison with analogous ramping neural activations in humans during clustering (Lundin et al., 2023).

4.2 STEERING SEMANTIC EXPLORATION-EXPLOITATION

We now ask if these activations have a causal influence on switching by deriving generic “explore/switch” steering vectors for anticipatory positions. If so, then these steering vectors should

be able to bias models towards switching or clustering. We generate steering vectors by first fitting logistic regression on the full set of PCA loadings over layer- L anticipatory residual-stream vectors. We then use the 30 component loadings, $W \in \mathbb{R}^{D \times 30}$, in tandem with the logistic regression coefficients, $\beta \in \mathbb{R}^{30}$, to recover a direction in the original D -dimensional residual-stream space by projecting the logistic regression’s coefficients through the principal component loadings,

$$d_L = W\beta = \sum_{j=1}^{30} \beta_j w_j,$$

where w_j is the j -th column of W (the j -th principal component’s loading vector), and normalising to unit length, $\hat{d}_L = \frac{d_L}{\|d_L\|_2}$. The resulting vector, $\hat{d}_L$, is the generic switching direction at layer L .

After generating the anticipatory $\hat{d}_L$, we then use the vector to bias switching behaviour by injecting it into specific residual stream layers during SFT generation: $h_{L,t} \leftarrow h_{L,t} + s r_L \hat{d}_L$, where r_L is the average residual-stream norm at layer L , measured from an unsteered generation, and s is the steering coefficient, which controls the sign and magnitude of steering. Positive values of s should increase switch rate; negative values of s should decrease the switch rate. We use $s \in \{0.1, -0.1\}$ for Qwen-7B and $s \in \{0.5, -0.5\}$ for all other models.

Furthermore, to test if *any* residual stream perturbation of this magnitude induces changes to the switching rate, we additionally perform experiments in which $\hat{d}_L$ is substituted for a random direction in the residual stream, $\hat{d}_{\text{noise}}$, with its component along $\hat{d}_L$ removed via Gram–Schmidt orthogonalisation, and injected with the same norm and steering coefficient. For each steering manipulation, we statistically compare the effect of either positive or negative steering to corresponding noise manipulations (See Appendix).

Consistent with the hypothesis that anticipatory activations causally influence switching, we find that steering along this direction is effective at biasing the rate of switching, although the potency of this manipulation was model- and layer-dependent and the effect of positive steering was more consistent than for negative steering (Fig. 5E-F, Table S6, Fisher exact test, all models at most effective layers: $p < 0.0001$). For example, positive steering at layer 26 increases the switch rate of Gemma-9B from 0.29 to 0.70; negative steering at the same layer causes switch rate to fall to 0.07. Negative steering was less effective for Llama-3.2-8B (Fig. 5F). These results provides evidence for generic directions in activation space as governing the balance of semantic explore-exploit.

5 CONCLUSIONS

This study provides evidence that LLMs performing canonical semantic search tasks exhibit distinct representational signatures during exploration and exploitation search regimes. Our results reveal a number of striking parallels in the behaviours and representational dynamics of humans and LLMs. Namely, human SFT findings—elevated response latency during switching (Hills et al., 2012), activation of category semantic representations (Rissman & Lupy, 2024; Dirani & Pyllkänen, 2023), and neural ramping activation during clustering (Lundin et al., 2023)—are mirrored in LLMs by elevated uncertainty during switching, activation of category-related labels, and ramping activation of switch-associated activations during clustering. Understanding whether these similarities are superficial or reflect deep convergences in the computational processes governing semantic search is a promising avenue for further research.

These findings have several important implications for the use of LLMs. First, if these findings generalise from SFT to narrative generation (Leckie et al., 2026), then activation signatures similar to those identified here could be modulated to control the semantic pace, coherence, and coverage of generated text during routine LLM conversations. Moreover, if exploration-exploitation is similarly represented during more applied search tasks in LLMs (e.g., searching over solution space), it may be possible to steer such searches toward increased or decreased exploration as is useful.

Our study has several limitations and opens up several directions for future research. First, although the SFT allows for tightly controlled examinations of semantic recall dynamics, it is still unclear to what extent the dynamics reported here extend to naturalistic speech or to other search tasks (Hills et al., 2008). Future work could replicate our study in discourse or test the cross-task generality of

the switch-associated directions identified in this study. Second, while generic steering was effective at biasing switching in most models, it is unclear why some models (Llama-3.2-8B) were less susceptible to steering or why the potency of steering was selective across layers and coefficients. Finally, the models used here are relatively small in comparison to present frontier models; it is an open question as to whether these same dynamics emerge in these models.

Overall, this study provides evidence that LLMs search over internal conceptual spaces, representing exploration and exploitation. By extending the semantic foraging framework to artificial intelligences, our work suggests avenues for interpreting, modulating, and enhancing the myriad search tasks performed by LLMs.

6 AI-USE STATEMENT

In this work, we used generative AI tools to generate code (Claude code, Opus models). We have not used generative AI tools for writing or idea generation. LL checked all code manually for correctness and takes full responsibility for the final content of this work, including text, claims or artifacts produced with the aid of generative AI.

REFERENCES

- Alexis Buatois and Mathieu Lihoreau. Evidence of trapline foraging in honeybees. *Journal of Experimental Biology*, 219(16):2426–2429, 2016.
- Eric L Charnov. Optimal foraging, the marginal value theorem. *Theoretical population biology*, 9(2):129–136, 1976.
- Emily Cheng, Diego Doimo, Corentin Kervadec, Iuri Macocco, Lei Yu, Alessandro Laio, and Marco Baroni. Emergence of a high-dimensional abstraction phase in language transformers. In *International Conference on Learning Representations*, volume 2025, pp. 35389–35414, 2025.
- Julien Dirani and Liina Pykkänen. The time course of cross-modal representations of conceptual categories. *NeuroImage*, 277:120254, August 2023. ISSN 1053-8119. doi: 10.1016/j.neuroimage.2023.120254.
- Zhichen Dong, Zhanhui Zhou, Zhixuan Liu, Chao Yang, and Chaochao Lu. Emergent Response Planning in LLMs, August 2025. doi: 10.48550/arXiv.2502.06258.
- Wes Gurnee, Nicholas Sofroniew, Adam Pearce, Mateusz Piotrowski, Isaac Kauvar, Runjin Chen, Anna Soligo, Paul Bogdan, Euan Ong, Rowan Wang, Ben Thompson, David Abrahams, Subhash Kantamneni, Emmanuel Ameisen, Joshua Batson, and Jack Lindsey. Verbalizable representations form a global workspace in language models, 2026.
- Roe Hendel, Mor Geva, and Amir Globerson. In-Context Learning Creates Task Vectors. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Findings of the Association for Computational Linguistics: EMNLP 2023*, pp. 9318–9333, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-emnlp.624.
- Thomas T Hills, Peter M Todd, and Robert L Goldstone. Search in external and internal spaces: Evidence for generalized cognitive search processes. *Psychological science*, 19(8):802–808, 2008.
- Thomas T Hills, Michael N Jones, and Peter M Todd. Optimal foraging in semantic memory. *Psychological review*, 119(2):431, 2012.
- Thomas T. Hills, Peter M. Todd, David Lazer, A. David Redish, and Iain D. Couzin. Exploration versus exploitation in space, mind, and society. *Trends in Cognitive Sciences*, 19(1):46–54, January 2015. ISSN 1364-6613. doi: 10.1016/j.tics.2014.10.004.
- Jeremy Hogeveen, Teagan S. Mullins, John D. Romero, Elizabeth Eversole, Kimberly Rogge-Obando, Andrew R. Mayer, and Vincent D. Costa. The neurocomputational bases of explore-exploit decision-making. *Neuron*, 110(11):1869–1879.e5, June 2022. ISSN 0896-6273. doi: 10.1016/j.neuron.2022.03.014.

-
- Eric Lacosse, Mariana Duarte, Graham Todd, Peter M Todd, and Daniel C McNamee. Artificial intelligence models can predict and collaboratively modulate human memory search. *arXiv preprint arXiv:2608.26152 (Accepted in PNAS)*, 2026a.
- Eric Lacosse, Mariana Duarte, Peter M. Todd, and Daniel C. McNamee. Emerging Human-like Strategies for Semantic Memory Foraging in Large Language Models, March 2026b. doi: 10.48550/arXiv.2603.01822.
- Luke Leckie, Nancy B Lundin, Amanda Bolbecker, Joshua W Brown, William P Hetrick, Kyle S Minor, Brian F O'Donnell, Peter M Todd, and Jacob G Foster. Psychosis-associated disruptions to semantic foraging in narrative recollections: Integrating language model embeddings and topic modeling, March 2026. doi: https://osf.io/preprints/psyarxiv/26fcp_v1/.
- Johnny Lin. Neuronpedia: Interactive reference and tooling for analyzing neural networks, 2023.
- Jack Lindsey, Wes Gurnee, Emmanuel Ameisen, Brian Chen, Adam Pearce, Nicholas L. Turner, Craig Citro, David Abrahams, Shan Carter, Basil Hosmer, Jonathan Marcus, Michael Sklar, Adly Templeton, Trenton Bricken, Callum McDougall, Hoagy Cunningham, Thomas Henighan, Adam Jermyn, Andy Jones, Andrew Persic, Zhenyi Qi, T. Ben Thompson, Sam Zimmerman, Kelley Rivoire, Thomas Conerly, Chris Olah, and Joshua Batson. On the biology of a large language model. *Transformer Circuits Thread*, 2025.
- Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. Lost in the Middle: How Language Models Use Long Contexts. *Transactions of the Association for Computational Linguistics*, 12:157–173, 2024. doi: 10.1162/tacl_a-00638.
- Ekdeep Singh Lubana, Can Rager, Sai Sumedh R. Hindupur, Valerie Costa, Greta Tuckute, Oam Patel, Sonia Krishna Murthy, Thomas Fel, Daniel Wurgaft, Eric J. Bigelow, Johnny Lin, Demba Ba, Martin Wattenberg, Fernanda Viegas, Melanie Weber, and Aaron Mueller. Priors in Time: Missing Inductive Biases for Language Model Interpretability, November 2025. doi: 10.48550/arXiv.2511.01836.
- Nancy B Lundin, Peter M Todd, Michael N Jones, Johnathan E Avery, Brian F O'Donnell, and William P Hetrick. Semantic search in psychosis: Modeling local exploitation and global exploitation. *Schizophrenia bulletin open*, 1(1):sgaa011, 2020.
- Nancy B Lundin, Joshua W Brown, Brendan T Johns, Michael N Jones, John R Purcell, William P Hetrick, Brian F O'Donnell, and Peter M Todd. Neural evidence of switch processes during semantic and phonetic foraging in human memory. *Proceedings of the National Academy of Sciences*, 120(42):e2312462120, 2023.
- João C Marques, Meng Li, Diane Schaak, Drew N Robson, and Jennifer M Li. Internal state dynamics shape brainwide activity and foraging behaviour. *Nature*, 577(7789):239–243, 2020.
- Reiichiro Nakano, Jacob Hilton, Suchir Balaji, Jeff Wu, Long Ouyang, Christina Kim, Christopher Hesse, Shantanu Jain, Vineet Kosaraju, William Saunders, Xu Jiang, Karl Cobbe, Tyna Eloundou, Gretchen Krueger, Kevin Button, Matthew Knight, Benjamin Chess, and John Schulman. WebGPT: Browser-assisted question-answering with human feedback, June 2022. doi: 10.48550/arXiv.2112.09332.
- James H. Neely. Semantic priming and retrieval from lexical memory: Roles of inhibitionless spreading activation and limited-capacity attention. *Journal of Experimental Psychology: General*, 106(3):226–254, 1977. ISSN 1939-2222. doi: 10.1037/0096-3445.106.3.226.
- Dan V Nicolau Jr, Judith P Armitage, and Philip K Maini. Directional persistence and the optimality of run-and-tumble chemotaxis. *Computational Biology and Chemistry*, 33(4):269–274, 2009.
- Matthew M Nour, Daniel C McNamee, Yunzhe Liu, and Raymond J Dolan. Trajectories through semantic spaces in schizophrenia and the relationship to ripple bursts. *Proceedings of the National Academy of Sciences*, 120(42):e2305290120, 2023.

-
- Koyena Pal, Jiuding Sun, Andrew Yuan, Byron Wallace, and David Bau. Future Lens: Anticipating Subsequent Tokens from a Single Hidden State. In Jing Jiang, David Reitter, and Shumin Deng (eds.), *Proceedings of the 27th Conference on Computational Natural Language Learning (CoNLL)*, pp. 548–560, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.conll-1.37.
- Lilia Rissman and Gary Lupyan. Words do not just label concepts: Activating superordinate categories through labels, lists, and definitions. *Language, Cognition and Neuroscience*, 39(5):657–676, May 2024. ISSN 2327-3798. doi: 10.1080/23273798.2024.2350526.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language Models Can Teach Themselves to Use Tools, February 2023. doi: 10.48550/arXiv.2302.04761.
- Skipper Seabold and Josef Perktold. Statsmodels: Econometric and statistical modeling with python. In *9th Python in Science Conference*, 2010.
- Oscar SKEAN, Md Rifat Arefin, Dan Zhao, Niket Patel, Jalal Naghiyev, Yann LeCun, and Ravid Shwartz-Ziv. Layer by layer: Uncovering hidden representations in language models. *arXiv preprint arXiv:2502.02013*, 2025.
- David Thissen, Lynne Steinberg, and Daniel Kuang. Quick and easy implementation of the Benjamini-Hochberg procedure for controlling the false positive rate in multiple comparisons. *Journal of educational and behavioral statistics*, 27(1):77–83, 2002.
- Eric Todd, Millicent L. Li, Arnab Sen Sharma, Aaron Mueller, Byron C. Wallace, and David Bau. Function Vectors in Large Language Models, February 2024. doi: 10.48550/arXiv.2310.15213.
- Peter M Todd, Thomas Trenholm Hills, and Trevor W Robbins. *Cognitive Search: Evolution, Algorithms, and the Brain*, volume 9. MIT press, 2012.
- Angela K Troyer, Morris Moscovitch, and Gordon Winocur. Clustering and switching as two components of verbal fluency: Evidence from younger and older healthy adults. *neuropsychology*, 11(1):138, 1997.
- Constantin Venhoff, Iván Arcuschin, Philip Torr, Arthur Conmy, and Neel Nanda. Understanding Reasoning in Thinking Language Models via Steering Vectors, October 2025. doi: 10.48550/arXiv.2506.18167.
- John Yang, Carlos E. Jimenez, Alexander Wettig, Kilian Lieret, Shunyu Yao, Karthik Narasimhan, and Ofir Press. SWE-agent: Agent-Computer Interfaces Enable Automated Software Engineering, November 2024. doi: 10.48550/arXiv.2405.15793.

A APPENDIX

A.1 SWITCH/CLUSTER DESIGNATION

To ensure that switch/cluster designation was robust to an LLM naming a concept outside of our category labels, we omitted verbalised concepts that fell outside of our category labels from cluster-switch designation. However, this was a rare occurrence in our experiments (2.4% of named items across all models pooled, ranging from 0.0% for Gemma-2-9B to 5.5% for Qwen2.5-7B). Since some concepts can be multi-word, for experiments in which individual token-level activations were derived, we matched concepts to tokens based upon their first token. Only single-token concepts were used to construct steering vectors. The mean number of items recalled was 36.0 ± 5.2 for Gemma-2-9B, 41.1 ± 13.0 for Gemma-2-2B, 64.8 ± 8.4 for Llama-3.1-8B, 52.1 ± 11.3 for Llama-3.2-3B, and 39.3 ± 17.8 for Qwen2.5-7B. Mean cluster size was 3.2 ± 2.4 for Gemma-2-9B, 2.7 ± 2.4 for Gemma-2-2B, 2.9 ± 3.0 for Llama-3.1-8B, 2.2 ± 2.2 for Llama-3.2-3B, and 2.4 ± 2.8 for Qwen2.5-7B.

A.2 STATISTICS

Every significance test treated each seed as one unit of replication, that contributes a single observation at each tested point in statistical tests. For the results presented in Figures 2-3 and Figure 5, independent tests were performed for each model at either each layer/layer block (Fig. 2C-D, Fig. 5D-E) or at each lag value (Fig. 3D, effect averaged over layers). In these tests, we perform linear regression (LR) with Wald’s test (Python package: *statsmodels* Seabold & Perktold (2010)) to compare the per-seed paired difference in concept activations between clustering and switching (Fig. 2) or category-label activations when switching to a related versus unrelated cluster (Fig. 3). Tests are one-sided (Fig. 3D, Fig. 5E-F) or two-sided, as specified. Where reported, one-sided p-values are multiplied by two. Where tests were performed across multiple layers or lag values for a given model, we protect against multiple testing with Benjamini-Hochberg correction (Thissen et al., 2002).

To test if the effect of J-space in-category depletion on switching is greater than the effect of depleting the overall pool of animals within a given category depletion we computed the point-biserial correlation between the binary switch outcome and (i) J-space supply and (ii) the raw remaining pool size, using each seed’s SFT trials. For interpretability, we divided each model’s layers up into five approximately equal depth bins and performed this test at each depth bin, for each model. Within each depth bin, we then tested whether the J-space depletion correlation was significantly more negative than the raw-depletion correlation, by using the same LR approach described above.

When testing for the effect of anticipatory ramping (Fig. 5D), we performed LR testing for the association between the number of items remaining in a cluster and the loading onto the anticipatory direction (averaged across all layers). To compare the effect of steering to the effect of stochastic noise on switch rate (Fig. 5E-F), we pooled raw switch/no-switch counts across all seeds and categories at each layer and computed Fisher’s exact test comparing the steered condition against a magnitude-matched noise control. The test direction was chosen to match the sign of the steering scale (steer > noise for positive-scale steering, steer < noise for negative-scale steering).

A.3 ROBUSTNESS ANALYSIS

To test the robustness of the J-space depletion effect (Fig. 2D) to J-space size, we repeated our experiments on the Gemma models with J-space sizes of 5, and 15 tokens, in addition to the default size of 25 tokens. We did not test sizes larger than 25 since most Troyer categories contain fewer than 25 animals. As shown in Table S5, our results for Gemma-9B were robust across all tested J-space sizes and our findings for Gemma-2B were robust up until the smallest J-space size of 5.

A.4 NOISE INJECTION

We constructed random control steering vectors orthogonal to the corresponding unit steering direction d_L as follows:

$$d_{\text{noise},L} = \frac{r - (r^\top d_L)d_L}{\|r - (r^\top d_L)d_L\|_2}, \quad r \sim \mathcal{N}(0, I_D),$$

where D is the residual-stream dimension. We injected these control vectors using the same layer-specific residual norm r_L and steering coefficient s as for the corresponding constructed steering vectors, giving an identical perturbation norm of $|s|r_L$.

A.5 SUPPLEMENTARY FIGURES

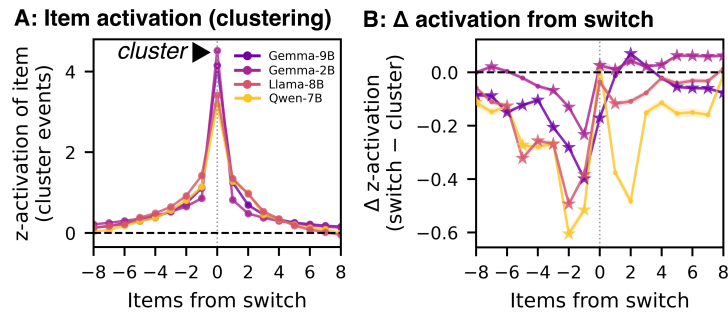


Figure S1: **A.** Z-scored J-lens activations for items participating in clustering, measured in advance (negative lag) and after (positive lag) their emission (lag=0). Points represent means across seeds and layers and shaded areas, standard errors. **C.** Δ in Z-scored J-lens activations for switching minus clustering. Points represent means and shaded areas, standard errors (note that standard errors are very narrow). Stars indicate significant comparisons between switch- and cluster- associated activations.

A.6 SUPPLEMENTARY TABLES

Table S1: Statistics comparing J-lens activations of items participating in clustering or switching across layers (Fig. 2C).

model	layer	beta	F	df	p	sig
Gemma-9B	2	-0.187	242.080	1	2.84E-28	TRUE
Gemma-9B	4	-0.244	263.261	1	1.51E-29	TRUE
Gemma-9B	6	-0.176	130.854	1	8.64E-20	TRUE
Gemma-9B	8	-0.259	544.888	1	8.83E-42	TRUE
Gemma-9B	10	-0.415	951.408	1	4.04E-52	TRUE
Gemma-9B	12	-0.411	1011.960	1	2.94E-53	TRUE
Gemma-9B	14	-0.389	647.727	1	6.96E-45	TRUE
Gemma-9B	16	-0.304	310.668	1	3.59E-32	TRUE
Gemma-9B	18	-0.155	72.541	1	1.85E-13	TRUE
Gemma-9B	20	-0.287	457.983	1	1.07E-38	TRUE
Gemma-9B	22	-0.502	642.140	1	9.09E-45	TRUE
Gemma-9B	24	-0.354	223.009	1	4.69E-27	TRUE
Gemma-9B	26	-0.463	366.078	1	7.63E-35	TRUE
Gemma-9B	28	-0.490	821.303	1	2.48E-49	TRUE
Gemma-9B	30	-0.567	1453.269	1	2.80E-60	TRUE
Gemma-9B	32	-0.795	2279.001	1	7.49E-69	TRUE
Gemma-9B	34	-0.756	1662.956	1	1.05E-62	TRUE
Gemma-9B	36	-0.793	1611.530	1	3.05E-62	TRUE
Gemma-9B	38	-0.596	1081.406	1	1.75E-54	TRUE
Gemma-9B	40	-0.377	354.221	1	2.55E-34	TRUE
Gemma-2B	2	0.077	64.162	1	2.90E-12	TRUE
Gemma-2B	4	0.018	3.132	1	8.71E-2	FALSE
Gemma-2B	6	-0.004	0.115	1	7.35E-	FALSE
Gemma-2B	8	-0.098	98.177	1	2.87E-16	TRUE
Gemma-2B	10	-0.080	65.834	1	1.93E-12	TRUE
Gemma-2B	12	-0.246	369.993	1	9.65E-35	TRUE
Gemma-2B	14	-0.219	267.830	1	1.50E-29	TRUE
Gemma-2B	16	-0.406	661.402	1	1.38E-44	TRUE
Gemma-2B	18	-0.427	847.678	1	5.84E-49	TRUE
Gemma-2B	20	-0.363	387.246	1	1.96E-35	TRUE
Gemma-2B	22	-0.369	511.008	1	4.66E-40	TRUE
Gemma-2B	24	-0.500	491.088	1	1.79E-39	TRUE
Qwen-7B	2	-0.042	0.992	1	2.23E-1	FALSE
Qwen-7B	4	-0.179	13.834	1	4.90E-4	TRUE
Qwen-7B	6	-0.153	16.619	1	1.83E-4	TRUE
Qwen-7B	8	-0.114	16.094	1	2.07E-4	TRUE
Qwen-7B	10	-0.375	105.316	1	1.53E-13	TRUE
Qwen-7B	12	-0.358	81.342	1	4.01E-12	TRUE
Qwen-7B	14	-0.349	85.948	1	2.06E-12	TRUE
Qwen-7B	16	-0.464	72.395	1	2.25E-11	TRUE
Qwen-7B	18	-0.379	54.639	1	1.39E-09	TRUE
Qwen-7B	20	-0.424	46.903	1	9.77E-09	TRUE
Qwen-7B	22	-0.469	32.364	1	7.17E-07	TRUE
Qwen-7B	24	-0.457	18.501	1	9.53E-05	TRUE
Qwen-7B	26	-0.617	92.662	1	8.12E-13	TRUE
Llama-8B	2	0.030	1.293	1	2.58E-1	FALSE
Llama-8B	4	0.095	22.290	1	9.11E-06	TRUE
Llama-8B	6	-0.050	3.266	1	7.91E-2	FALSE
Llama-8B	8	-0.228	55.423	1	4.98E-11	TRUE
Llama-8B	10	-0.249	89.535	1	2.92E-15	TRUE
Llama-8B	12	-0.216	88.239	1	3.73E-15	TRUE
Llama-8B	14	-0.209	121.252	1	1.49E-18	TRUE
Llama-8B	16	-0.351	147.041	1	8.17E-21	TRUE
Llama-8B	18	-0.484	327.454	1	5.57E-32	TRUE
Llama-8B	20	-0.480	375.362	1	6.14E-34	TRUE
Llama-8B	22	-0.503	287.428	1	3.45E-30	TRUE
Llama-8B	24	-0.497	229.206	1	6.83E-27	TRUE
Llama-8B	26	-0.614	305.371	1	5.00E-31	TRUE
Llama-8B	28	-0.719	243.439	1	1.02E-27	TRUE
Llama-8B	30	-0.571	132.399	1	1.47E-19	TRUE

Table S2: Statistics comparing J-lens activations of items participating in clustering or switching across lag values from their emission, averaged over layers (Fig. S1B).

model	item lag	beta	F	df	p	sig
Gemma-9B	-10	0.009	0.245	1	6.51E-01	FALSE
Gemma-9B	-9	0.016	0.768	1	4.47E-01	FALSE
Gemma-9B	-8	-0.066	11.302	1	1.93E-03	TRUE
Gemma-9B	-7	-0.079	16.463	1	2.08E-04	TRUE
Gemma-9B	-6	-0.148	59.068	1	4.72E-11	TRUE
Gemma-9B	-5	-0.124	42.628	1	8.58E-09	TRUE
Gemma-9B	-4	-0.097	43.818	1	6.56E-09	TRUE
Gemma-9B	-3	-0.201	228.004	1	1.37E-26	TRUE
Gemma-9B	-2	-0.274	470.084	1	2.33E-38	TRUE
Gemma-9B	-1	-0.394	2671.882	1	4.05E-72	TRUE
Gemma-9B	0	-0.168	107.145	1	9.86E-17	TRUE
Gemma-9B	1	-0.004	0.206	1	6.51E-01	FALSE
Gemma-9B	2	0.085	36.602	1	6.80E-08	TRUE
Gemma-9B	3	0.037	4.126	1	5.55E-02	FALSE
Gemma-9B	4	-0.014	0.637	1	4.71E-01	FALSE
Gemma-9B	5	-0.044	7.18	1	1.13E-02	TRUE
Gemma-9B	6	-0.052	10.794	1	2.28E-03	TRUE
Gemma-9B	7	-0.055	8.933	1	5.30E-03	TRUE
Gemma-9B	8	-0.076	15.738	1	2.63E-04	TRUE
Gemma-9B	9	-0.054	8.059	1	7.69E-03	TRUE
Gemma-9B	10	-0.083	16.534	1	2.08E-04	TRUE
Gemma-2B	-10	0.032	3.766	1	6.82E-02	FALSE
Gemma-2B	-9	0.024	1.928	1	1.78E-01	FALSE
Gemma-2B	-8	0.023	1.918	1	1.78E-01	FALSE
Gemma-2B	-7	0.041	8.99	1	4.82E-03	TRUE
Gemma-2B	-6	0.026	2.29	1	1.56E-01	FALSE
Gemma-2B	-5	0.004	0.068	1	7.94E-01	FALSE
Gemma-2B	-4	-0.028	4.318	1	5.29E-02	FALSE
Gemma-2B	-3	-0.043	13.571	1	5.65E-04	TRUE
Gemma-2B	-2	-0.106	145.214	1	4.92E-20	TRUE
Gemma-2B	-1	-0.208	775.117	1	5.13E-47	TRUE
Gemma-2B	0	0.052	17.543	1	1.17E-04	TRUE
Gemma-2B	1	0.041	26.075	1	4.24E-06	TRUE
Gemma-2B	2	0.078	41.449	1	3.15E-08	TRUE
Gemma-2B	3	0.056	18.202	1	9.63E-05	TRUE
Gemma-2B	4	0.066	19.887	1	5.11E-05	TRUE
Gemma-2B	5	0.095	34.362	1	3.24E-07	TRUE
Gemma-2B	6	0.089	29.852	1	1.24E-06	TRUE
Gemma-2B	7	0.08	32.369	1	5.56E-07	TRUE
Gemma-2B	8	0.08	15.309	1	2.95E-04	TRUE
Gemma-2B	9	0.082	13.864	1	5.30E-04	TRUE
Gemma-2B	10	0.123	28.293	1	1.98E-06	TRUE
Qwen-7B	-10	-0.098	2.619	1	2.32E-01	FALSE
Qwen-7B	-9	-0.043	0.808	1	4.88E-01	FALSE
Qwen-7B	-8	-0.143	7.433	1	4.39E-02	TRUE
Qwen-7B	-7	0	0	1	9.96E-01	FALSE
Qwen-7B	-6	-0.123	2.9	1	2.20E-01	FALSE
Qwen-7B	-5	-0.171	8.523	1	3.51E-02	TRUE
Qwen-7B	-4	-0.122	4.627	1	1.22E-01	FALSE
Qwen-7B	-3	-0.153	7.005	1	4.39E-02	TRUE
Qwen-7B	-2	-0.366	52.617	1	1.15E-08	TRUE
Qwen-7B	-1	-0.309	72.551	1	1.76E-10	TRUE
Qwen-7B	0	-0.074	2.47	1	2.32E-01	FALSE
Qwen-7B	1	-0.031	0.733	1	4.88E-01	FALSE
Qwen-7B	2	-0.096	4.384	1	1.22E-01	FALSE
Qwen-7B	3	0.058	0.827	1	4.88E-01	FALSE
Qwen-7B	4	0.053	1.111	1	4.78E-01	FALSE

Qwen-7B	5	-0.003	0.002	1	9.96E-01	FALSE
Qwen-7B	6	0.036	0.282	1	6.60E-01	FALSE
Qwen-7B	7	-0.044	0.529	1	5.48E-01	FALSE
Qwen-7B	8	0.104	1.953	1	2.93E-01	FALSE
Qwen-7B	9	-0.116	3.291	1	1.97E-01	FALSE
Qwen-7B	10	0.063	0.991	1	4.86E-01	FALSE
Llama-8B	-10	0.043	1.805	1	2.94E-01	FALSE
Llama-8B	-9	-0.024	0.799	1	5.23E-01	FALSE
Llama-8B	-8	-0.045	2.554	1	2.16E-01	FALSE
Llama-8B	-7	-0.068	5.082	1	6.94E-02	FALSE
Llama-8B	-6	-0.087	9.324	1	8.76E-03	TRUE
Llama-8B	-5	-0.285	86.335	1	3.18E-14	TRUE
Llama-8B	-4	-0.191	33.069	1	4.33E-07	TRUE
Llama-8B	-3	-0.225	68.183	1	3.99E-12	TRUE
Llama-8B	-2	-0.445	191.017	1	1.24E-23	TRUE
Llama-8B	-1	-0.358	413.825	1	1.91E-35	TRUE
Llama-8B	0	-0.017	0.367	1	6.37E-01	FALSE
Llama-8B	1	-0.068	16.039	1	4.26E-04	TRUE
Llama-8B	2	-0.046	3.626	1	1.26E-01	FALSE
Llama-8B	3	-0.005	0.034	1	8.66E-01	FALSE
Llama-8B	4	0.04	2.385	1	2.20E-01	FALSE
Llama-8B	5	0.018	0.41	1	6.37E-01	FALSE
Llama-8B	6	0.012	0.207	1	7.19E-01	FALSE
Llama-8B	7	0.018	0.472	1	6.37E-01	FALSE
Llama-8B	8	0.036	1.288	1	3.89E-01	FALSE
Llama-8B	9	-0.004	0.029	1	8.66E-01	FALSE
Llama-8B	10	0.072	3.618	1	1.26E-01	FALSE

Table S3: Statistics to accompany Fig. 2D. Pooled correlation coefficients (r) are tested against 0 with one-sample t-tests.

model	depth range	r	t	df	p	sig
Gemma-9B	0.00-0.20	-0.367	-30.358	1	1.47E-51	TRUE
Gemma-9B	0.20-0.40	-0.402	-26.220	1	2.99E-46	TRUE
Gemma-9B	0.40-0.60	-0.390	-31.876	1	3.66E-53	TRUE
Gemma-9B	0.60-0.80	-0.362	-17.728	1	1.74E-32	TRUE
Gemma-9B	0.80-1.00	-0.306	-27.619	1	4.29E-48	TRUE
Gemma-2B	0.00-0.20	-0.336	-18.451	1	1.19E-33	TRUE
Gemma-2B	0.20-0.40	-0.360	-21.623	1	1.10E-38	TRUE
Gemma-2B	0.40-0.60	-0.341	-19.582	1	1.50E-35	TRUE
Gemma-2B	0.60-0.80	-0.376	-21.293	1	2.55E-38	TRUE
Gemma-2B	0.80-1.00	-0.385	-23.401	1	3.32E-41	TRUE
Qwen-7B	0.00-0.20	-0.326	-1.651	1	1.05E-01	FALSE
Qwen-7B	0.20-0.40	-0.355	-4.014	1	3.27E-04	TRUE
Qwen-7B	0.40-0.60	-0.332	-4.046	1	3.27E-04	TRUE
Qwen-7B	0.60-0.80	-0.317	-8.427	1	1.57E-10	TRUE
Qwen-7B	0.80-1.00	-0.380	-1.905	1	7.80E-02	FALSE
Llama-8B	0.00-0.20	-0.377	-18.379	1	4.83E-33	TRUE
Llama-8B	0.20-0.40	-0.387	-18.563	1	2.87E-33	TRUE
Llama-8B	0.40-0.60	-0.405	-18.688	1	2.31E-33	TRUE
Llama-8B	0.60-0.80	-0.425	-19.329	1	2.73E-34	TRUE
Llama-8B	0.80-1.00	-0.500	-22.711	1	1.81E-39	TRUE

Table S4: Statistical comparisons testing the effect of J-space in-category depletion on switching probability, as compared to depletion of the overall category pool.

model	depth range	beta	F	df	p	sig
Gemma-9B	0.00-0.20	-0.091	82.890	1	1.64E-14	TRUE
Gemma-9B	0.20-0.40	-0.137	131.235	1	1.89E-19	TRUE
Gemma-9B	0.40-0.60	-0.140	202.842	1	5.26E-25	TRUE
Gemma-9B	0.60-0.80	-0.059	24.841	1	3.31E-06	TRUE
Gemma-9B	0.80-1.00	-0.016	1.987	1	1.62E-01	FALSE
Gemma-2B	0.00-0.20	-0.039	3.717	1	9.46E-02	FALSE
Gemma-2B	0.20-0.40	-0.028	1.648	1	2.33E-01	FALSE
Gemma-2B	0.40-0.60	-0.027	1.441	1	2.33E-01	FALSE
Gemma-2B	0.60-0.80	-0.049	4.348	1	9.46E-02	FALSE
Gemma-2B	0.80-1.00	-0.080	19.940	1	1.07E-04	TRUE
Qwen-7B	0.00-0.20	0.027	0.503	1	1.00E+00	FALSE
Qwen-7B	0.20-0.40	-0.067	5.371	1	6.13E-02	FALSE
Qwen-7B	0.40-0.60	-0.076	6.139	1	6.13E-02	FALSE
Qwen-7B	0.60-0.80	-0.064	2.781	1	1.69E-01	FALSE
Qwen-7B	0.80-1.00	-0.038	1.619	1	2.61E-01	FALSE
Llama-8B	0.00-0.20	0.038	16.786	1	1.00E+00	FALSE
Llama-8B	0.20-0.40	0.026	4.100	1	1.00E+00	FALSE
Llama-8B	0.40-0.60	0.010	0.699	1	1.00E+00	FALSE
Llama-8B	0.60-0.80	-0.012	0.648	1	1.00E+00	FALSE
Llama-8B	0.80-1.00	-0.062	21.517	1	5.60E-05	TRUE

Table S5: Robustness analyses testing the effect of J-space size on the comparisons reported in S4 for Gemma models. Sizes of 5, 15, and 25 were tested.

model	J-space size	depth range	beta	F	df	p	sig
Gemma-9B	5	0.00-0.20	0.033	4.530	1	1.00E+00	FALSE
Gemma-9B	5	0.20-0.40	-0.061	15.266	1	2.85E-04	TRUE
Gemma-9B	5	0.40-0.60	-0.060	16.248	1	2.73E-04	TRUE
Gemma-9B	5	0.60-0.80	-0.069	17.788	1	2.73E-04	TRUE
Gemma-9B	5	0.80-1.00	0.064	16.907	1	1.00E+00	FALSE
Gemma-9B	15	0.00-0.20	-0.043	16.140	1	1.43E-04	TRUE
Gemma-9B	15	0.20-0.40	-0.134	129.976	1	2.48E-19	TRUE
Gemma-9B	15	0.40-0.60	-0.146	217.233	1	5.19E-26	TRUE
Gemma-9B	15	0.60-0.80	-0.105	84.051	1	1.19E-14	TRUE
Gemma-9B	15	0.80-1.00	-0.011	1.163	1	2.83E-01	FALSE
Gemma-9B	25 (default)	0.00-0.20	-0.091	82.890	1	1.64E-14	TRUE
Gemma-9B	25 (default)	0.20-0.40	-0.137	131.235	1	1.89E-19	TRUE
Gemma-9B	25 (default)	0.40-0.60	-0.140	202.842	1	5.26E-25	TRUE
Gemma-9B	25 (default)	0.60-0.80	-0.059	24.841	1	3.31E-06	TRUE
Gemma-9B	25 (default)	0.80-1.00	-0.016	1.987	1	1.62E-01	FALSE
Gemma-2B	5	0.00-0.20	0.099	21.880	1	1.00E+00	FALSE
Gemma-2B	5	0.20-0.40	0.033	2.394	1	1.00E+00	FALSE
Gemma-2B	5	0.40-0.60	0.049	5.200	1	1.00E+00	FALSE
Gemma-2B	5	0.60-0.80	0.065	10.575	1	1.00E+00	FALSE
Gemma-2B	5	0.80-1.00	0.118	27.536	1	1.00E+00	FALSE
Gemma-2B	15	0.00-0.20	-0.031	3.479	1	6.51E-02	FALSE
Gemma-2B	15	0.20-0.40	-0.062	12.812	1	1.34E-03	TRUE
Gemma-2B	15	0.40-0.60	-0.054	9.813	1	3.14E-03	TRUE
Gemma-2B	15	0.60-0.80	-0.054	9.620	1	3.14E-03	TRUE
Gemma-2B	15	0.80-1.00	-0.068	16.848	1	4.19E-04	TRUE
Gemma-2B	25 (default)	0.00-0.20	-0.039	3.717	1	9.46E-02	FALSE
Gemma-2B	25 (default)	0.20-0.40	-0.028	1.648	1	2.33E-01	FALSE
Gemma-2B	25 (default)	0.40-0.60	-0.027	1.441	1	2.33E-01	FALSE
Gemma-2B	25 (default)	0.60-0.80	-0.049	4.348	1	9.46E-02	FALSE
Gemma-2B	25 (default)	0.80-1.00	-0.080	19.940	1	1.07E-04	TRUE

Table S6: Statistics for Figure 3D, comparing the activation of category-related labels before and after switching into a target category, versus an unrelated category

model	item	beta	F	df	p	sig
Gemma-9B	-6	0.107	23.676	1	4.31E-06	TRUE
Gemma-9B	-5	0.123	61.405	1	6.35E-12	TRUE
Gemma-9B	-4	0.154	71.636	1	3.13E-13	TRUE
Gemma-9B	-3	0.113	41.314	1	4.97E-09	TRUE
Gemma-9B	-2	0.266	165.96	1	1.12E-22	TRUE
Gemma-9B	-1	0.158	344.957	1	1.08E-33	TRUE
Gemma-9B	0	1.712	16928.534	1	2.29E-111	TRUE
Gemma-9B	1	0.6	3100.687	1	1.01E-75	TRUE
Gemma-9B	2	0.548	1819.107	1	6.81E-65	TRUE
Gemma-9B	3	0.466	896.722	1	6.51E-51	TRUE
Gemma-9B	4	0.363	572.918	1	1.53E-42	TRUE
Gemma-9B	5	0.271	178.355	1	1.32E-23	TRUE
Gemma-9B	6	0.193	73.819	1	1.84E-13	TRUE
Gemma-2B	-6	0.03	3.003	1	8.62E-02	FALSE
Gemma-2B	-5	0.05	8.545	1	4.66E-03	TRUE
Gemma-2B	-4	0.069	21.05	1	1.72E-05	TRUE
Gemma-2B	-3	0.087	31.561	1	2.62E-07	TRUE
Gemma-2B	-2	0.119	68.154	1	1.34E-12	TRUE
Gemma-2B	-1	0.117	172.203	1	6.81E-23	TRUE
Gemma-2B	0	1.779	6370.834	1	7.28E-90	TRUE
Gemma-2B	1	0.355	1894.557	1	4.24E-65	TRUE
Gemma-2B	2	0.276	486.139	1	3.91E-39	TRUE
Gemma-2B	3	0.202	207.11	1	2.14E-25	TRUE
Gemma-2B	4	0.167	130.421	1	2.25E-19	TRUE
Gemma-2B	5	0.123	47.62	1	8.37E-10	TRUE
Gemma-2B	6	0.065	10.149	1	2.29E-03	TRUE
Qwen-7B	-6	0.208	20.058	1	5.09E-05	TRUE
Qwen-7B	-5	0.056	1.574	1	3.08E-01	FALSE
Qwen-7B	-4	-0.162	8.396	1	1.00E+00	FALSE
Qwen-7B	-3	0.235	36.128	1	1.50E-07	TRUE
Qwen-7B	-2	-0.24	11.925	1	1.00E+00	FALSE
Qwen-7B	-1	-0.166	6.875	1	1.00E+00	FALSE
Qwen-7B	0	1.1	848.435	1	1.47E-44	TRUE
Qwen-7B	1	0.135	5.667	1	3.18E-02	TRUE
Qwen-7B	2	0.205	7.36	1	1.50E-02	TRUE
Qwen-7B	3	0.353	24.876	1	8.75E-06	TRUE
Qwen-7B	4	0.516	87.216	1	9.91E-14	TRUE
Qwen-7B	5	0.315	38.556	1	9.02E-08	TRUE
Qwen-7B	6	0.045	0.487	1	6.33E-01	FALSE
Llama-8B	-6	-0.021	0.591	1	1.00E+00	FALSE
Llama-8B	-5	0.07	5.649	1	2.10E-02	TRUE
Llama-8B	-4	0.102	12.769	1	6.46E-04	TRUE
Llama-8B	-3	0.155	39.192	1	1.61E-08	TRUE
Llama-8B	-2	0.272	127.172	1	3.98E-19	TRUE
Llama-8B	-1	0.267	236.164	1	1.87E-27	TRUE
Llama-8B	0	1.478	2826.097	1	1.72E-73	TRUE
Llama-8B	1	0.666	985.609	1	1.88E-52	TRUE
Llama-8B	2	0.573	315.491	1	6.53E-32	TRUE
Llama-8B	3	0.418	164.376	1	2.42E-22	TRUE
Llama-8B	4	0.312	79.037	1	5.33E-14	TRUE
Llama-8B	5	0.162	19.22	1	3.78E-05	TRUE
Llama-8B	6	0.151	19.336	1	3.78E-05	TRUE

Table S7: Statistics to accompany Figure 5D. Linear models testing the association between number of items until a cluster and activation of anticipatory loading

model	beta	chi2	p	sig
Gemma-9B	-0.316	525.373	1.43E-115	TRUE
Gemma-2B	-0.239	179.959	1.24E-40	TRUE
Qwen-7B	-0.105	30.040	5.29E-08	TRUE
Llama-3B	-0.079	20.439	6.16E-06	TRUE
Llama-8B	-0.104	67.895	2.87E-16	TRUE

Table S8: Statistics to accompany Figure 5E. Fisher tests comparing switch rates during positive steering against noise.

model	layer	base switch rate	steer switch rate	noise switch rate	p
Gemma-9B	2	0.29	0.27	0.27	1.00E+00
Gemma-9B	4	0.29	0.32	0.26	1.15E-12
Gemma-9B	6	0.29	0.32	0.27	1.93E-11
Gemma-9B	8	0.29	0.32	0.28	4.34E-09
Gemma-9B	10	0.29	0.36	0.30	5.06E-11
Gemma-9B	12	0.29	0.45	0.34	1.15E-31
Gemma-9B	14	0.29	0.51	0.36	4.67E-50
Gemma-9B	16	0.29	0.58	0.42	6.26E-51
Gemma-9B	18	0.29	0.58	0.34	2.25E-121
Gemma-9B	20	0.29	0.75	0.31	3.84E-292
Gemma-9B	22	0.29	0.79	0.35	5.00E-301
Gemma-9B	24	0.29	0.81	0.37	5.43E-241
Gemma-9B	26	0.29	0.70	0.29	0.00E+00
Gemma-9B	28	0.29	0.64	0.28	5.32E-298
Gemma-9B	30	0.29	0.47	0.28	9.18E-110
Gemma-9B	32	0.29	0.38	0.26	2.88E-63
Gemma-9B	34	0.29	0.35	0.22	1.24E-70
Gemma-9B	36	0.29	0.32	0.22	1.95E-37
Gemma-9B	38	0.29	0.34	0.26	5.91E-22
Gemma-9B	40	0.29	0.32	0.29	1.98E-04
Gemma-2B	2	0.35	0.57	0.54	1.66E-01
Gemma-2B	4	0.35	0.61	0.41	4.94E-42
Gemma-2B	6	0.35	0.66	0.62	8.63E-02
Gemma-2B	8	0.35	0.69	0.48	1.26E-41
Gemma-2B	10	0.35	0.72	0.43	5.91E-111
Gemma-2B	12	0.35	0.81	0.42	8.24E-142
Gemma-2B	14	0.35	0.83	0.23	1.07E-190
Gemma-2B	16	0.35	0.76	0.31	4.77E-209
Gemma-2B	18	0.35	0.47	0.21	4.92E-182
Gemma-2B	20	0.35	0.49	0.30	1.05E-63
Gemma-2B	22	0.35	0.40	0.34	1.77E-08
Gemma-2B	24	0.35	0.59	0.39	6.22E-57
Qwen-7B	2	0.40	0.32	0.33	1.00E+00
Qwen-7B	4	0.40	0.40	0.21	1.05E-51
Qwen-7B	6	0.40	0.24	0.22	1.45E-01
Qwen-7B	8	0.40	0.71	0.48	3.10E-46
Qwen-7B	10	0.40	0.78	0.57	1.07E-24
Qwen-7B	12	0.40	0.82	0.59	4.34E-43
Qwen-7B	14	0.40	0.81	0.27	2.11E-241
Qwen-7B	16	0.40	0.82	0.34	1.78E-193
Qwen-7B	18	0.40	0.85	0.33	8.99E-244
Qwen-7B	20	0.40	0.83	0.62	4.44E-44
Qwen-7B	22	0.40	0.81	0.55	5.98E-61
Qwen-7B	24	0.40	0.66	0.58	1.10E-08
Qwen-7B	26	0.40	0.44	0.51	1.00E+00
Llama-8B	2	0.32	0.33	0.44	1.00E+00
Llama-8B	4	0.32	0.58	0.35	1.92E-88

Llama-8B	6	0.32	0.66	0.37	1.50E-109
Llama-8B	8	0.32	0.52	0.48	3.22E-03
Llama-8B	10	0.32	0.76	0.61	2.07E-47
Llama-8B	12	0.32	0.70	0.62	1.41E-06
Llama-8B	14	0.32	0.63	0.60	2.06E-01
Llama-8B	16	0.32	0.44	0.44	8.33E-01
Llama-8B	18	0.32	0.42	0.45	1.00E+00
Llama-8B	20	0.32	0.42	0.56	1.00E+00
Llama-8B	22	0.32	0.44	0.44	1.00E+00
Llama-8B	24	0.32	0.61	0.48	1.47E-24
Llama-8B	26	0.32	0.61	0.43	1.68E-57
Llama-8B	28	0.32	0.56	0.44	2.53E-26
Llama-8B	30	0.32	0.55	0.47	8.83E-17
Llama-3B	2	0.54	0.63	0.53	8.86E-01
Llama-3B	4	0.54	0.66	0.44	3.66E-12
Llama-3B	6	0.54	0.71	0.61	2.74E-03
Llama-3B	8	0.54	0.66	0.57	2.68E-03
Llama-3B	10	0.54	0.80	0.75	2.56E-01
Llama-3B	12	0.54	0.74	0.71	5.83E-01
Llama-3B	14	0.54	0.59	0.73	1.00E+00
Llama-3B	16	0.54	0.66	0.41	6.11E-21
Llama-3B	18	0.54	0.58	0.59	1.00E+00
Llama-3B	20	0.54	0.56	0.44	4.83E-10
Llama-3B	22	0.54	0.53	0.53	8.71E-01
Llama-3B	24	0.54	0.61	0.49	3.68E-10
Llama-3B	26	0.54	0.53	0.52	4.43E-01

Table S9: Statistics to accompany Figure 5F. Fisher tests comparing switch rates during negative steering against noise

model	layer	base switch rate	steer switch rate	noise switch rate	p
Gemma-9B	2	0.29	0.26	0.28	3.30E-02
Gemma-9B	4	0.29	0.25	0.28	1.51E-05
Gemma-9B	6	0.29	0.25	0.29	1.70E-06
Gemma-9B	8	0.29	0.26	0.28	1.15E-01
Gemma-9B	10	0.29	0.28	0.32	4.17E-05
Gemma-9B	12	0.29	0.32	0.32	7.75E-01
Gemma-9B	14	0.29	0.36	0.31	1.00E+00
Gemma-9B	16	0.29	0.45	0.37	1.00E+00
Gemma-9B	18	0.29	0.53	0.29	1.00E+00
Gemma-9B	20	0.29	0.62	0.46	1.00E+00
Gemma-9B	22	0.29	0.46	0.45	1.00E+00
Gemma-9B	24	0.29	0.25	0.40	1.26E-40
Gemma-9B	26	0.29	0.07	0.32	1.17E-274
Gemma-9B	28	0.29	0.18	0.42	2.20E-160
Gemma-9B	30	0.29	0.23	0.46	1.62E-166
Gemma-9B	32	0.29	0.26	0.36	3.48E-42
Gemma-9B	34	0.29	0.17	0.31	1.23E-102
Gemma-9B	36	0.29	0.15	0.25	2.86E-78
Gemma-9B	38	0.29	0.21	0.29	2.48E-30
Gemma-9B	40	0.29	0.29	0.29	1.00E+00
Gemma-2B	2	0.35	0.39	0.26	1.00E+00
Gemma-2B	4	0.35	0.30	0.29	1.00E+00
Gemma-2B	6	0.35	0.45	0.54	5.21E-16
Gemma-2B	8	0.35	0.16	0.41	7.74E-153
Gemma-2B	10	0.35	0.25	0.47	1.94E-87
Gemma-2B	12	0.35	0.06	0.61	0.00E+00
Gemma-2B	14	0.35	0.00	0.64	0.00E+00
Gemma-2B	16	0.35	0.15	0.61	8.03E-264
Gemma-2B	18	0.35	0.25	0.53	3.80E-95
Gemma-2B	20	0.35	0.44	0.47	8.07E-02
Gemma-2B	22	0.35	0.34	0.43	2.86E-10
Gemma-2B	24	0.35	0.25	0.42	2.18E-57
Qwen-7B	2	0.40	0.47	0.48	4.23E-01
Qwen-7B	4	0.40	0.39	0.42	3.92E-02
Qwen-7B	6	0.40	0.49	0.56	4.50E-07
Qwen-7B	8	0.40	0.51	0.56	5.54E-04
Qwen-7B	10	0.40	0.44	0.66	1.28E-52
Qwen-7B	12	0.40	0.26	0.36	9.82E-19
Qwen-7B	14	0.40	0.35	0.51	4.78E-33
Qwen-7B	16	0.40	0.21	0.60	4.50E-200
Qwen-7B	18	0.40	0.16	0.47	7.17E-173
Qwen-7B	20	0.40	0.21	0.25	2.39E-06
Qwen-7B	22	0.40	0.25	0.33	1.79E-13
Qwen-7B	24	0.40	0.27	0.34	1.25E-08
Qwen-7B	26	0.40	0.35	0.42	5.56E-09
Llama-8B	2	0.32	0.80	0.35	1.00E+00
Llama-8B	4	0.32	0.45	0.65	4.79E-19
Llama-8B	6	0.32	0.43	0.67	1.07E-66
Llama-8B	8	0.32	0.53	0.63	2.30E-14
Llama-8B	10	0.32	0.51	0.56	6.82E-03
Llama-8B	12	0.32	0.48	0.55	8.91E-06
Llama-8B	14	0.32	0.58	0.31	1.00E+00
Llama-8B	16	0.32	0.44	0.43	1.00E+00
Llama-8B	18	0.32	0.52	0.56	3.08E-03
Llama-8B	20	0.32	0.44	0.50	1.66E-04
Llama-8B	22	0.32	0.32	0.44	7.64E-21
Llama-8B	24	0.32	0.39	0.47	1.82E-10
Llama-8B	26	0.32	0.39	0.44	2.05E-05

Llama-8B	28	0.32	0.29	0.36	7.93E-12
Llama-8B	30	0.32	0.28	0.36	4.38E-15
Llama-3B	2	0.54		0.57	NA
Llama-3B	4	0.54	0.65	0.46	1.00E+00
Llama-3B	6	0.54	0.53	0.57	8.12E-02
Llama-3B	8	0.54	0.75	0.60	1.00E+00
Llama-3B	10	0.54	0.29	0.60	2.04E-36
Llama-3B	12	0.54	0.26	0.45	3.10E-47
Llama-3B	14	0.54	0.33	0.65	1.16E-124
Llama-3B	16	0.54	0.48	0.65	4.83E-33
Llama-3B	18	0.54	0.44	0.62	6.81E-45
Llama-3B	20	0.54	0.63	0.61	1.00E+00
Llama-3B	22	0.54	0.54	0.52	1.00E+00
Llama-3B	24	0.54	0.41	0.51	4.52E-13
Llama-3B	26	0.54	0.34	0.57	1.82E-36