

VISTA: Value-Informed Event Appraisal for Multimodal Emotion Conflict

Jiale Dai^{1,*}, Liuxian Ma^{2,*}, Xiaoke Niu¹, Wenjing Zhang³,
Huiying Zhao³, Zhaoxiang Liu³, Shiguo Lian³, Guojie Song^{1,†}

¹State Key Laboratory of General Artificial Intelligence, School of Intelligence Science and Technology, Peking University

²College of Artificial Intelligence, Tsinghua University

³China United Network Communications Group Co., Ltd.

*Strictly equal contribution; either author order is equally valid.

†Corresponding author.

Conflicting emotional cues can be individually valid: a subdued voice may reflect a blocked goal while a smile satisfies a social obligation. Their interpretation depends on what the event means to the person. We introduce VISTA (Value-Informed Semantic Trust Arbitration), a learned seven-field appraisal interface that conditions modality arbitration on concerns, event relations, and expression conditions while retaining a joint-evidence residual. A log-odds decomposition separates emotion expectation from cue diagnosticity, motivating an interface that lets appraisal change how evidence is interpreted. With a shared Qwen2.5-Omni-7B backbone and matched training examples and steps, VISTA reaches 64.5% conflict accuracy on CA-MER, improving on modality gating by 2.5 percentage points on conflict and 0.2 on consistency. Shuffling appraisal across scenes or removing its decision connection reduces this benefit. A common frozen-backbone probe reaches 0.600 macro CCC for appraisal readout, compared with 0.505 for emotion-only fine-tuning. Evaluations across five benchmarks connect recognition under increasing conflict with appraisal readout and downstream decision use. Together, the analyses and experiments support scene-specific appraisal as an intermediate representation that helps interpret conflicting emotional evidence.

Keywords: Multimodal emotion recognition, cross-modal conflict, value-informed appraisal

Contact: ✉ daijiale26@stu.pku.edu.cn ✉ gjsong@pku.edu.cn



北京大学
PEKING UNIVERSITY



清华大学
Tsinghua University



中国联通
China unicom

1 Introduction

An unsuccessful candidate smiles and says “Congratulations” to the winner, yet speaks in a subdued voice. The words and smile may perform public courtesy, while the voice reflects a blocked goal (Figure 1). The recognition problem is to interpret conflicting emotional evidence about the same person.

A measurable source of recognition difficulty. Cross-modal affective disagreement affects a substantial portion of annotated data. Our audit of the public CH-SIMS labels finds different sentiment polarities across text, audio, and vision in **1,117 of 2,281 clips (49.0%)** under a fixed three-class mapping (Yu et al., 2020; Zhang et al., 2021). In social-media image–text data, Pan & Meng (2024) report 42.5% inconsistency on filtered MVSA-Single. These observations motivate an explicit boundary between broad affective disagreement and strong conflict.

Defining conflict. We identify pairwise conflict from modality-specific affect annotations for the same target and event. For at least two annotated modalities $\mathcal{M}$, annotations q^m , discrepancy d , and a fixed threshold τ , define

$$\kappa_\tau(X) = \mathbf{1} \left\{ \max_{m < n, m, n \in \mathcal{M}} d(q^m, q^n) > \tau \right\}. \quad (1)$$

For categorical affect, $d(u, v) = \mathbf{1}\{u \neq v\}$ and $\tau = 0$ encode disagreement, including neutral versus non-neutral polarity. Strong scalar conflict instead uses $d(u, v) = |u - v|$ and $\tau = 1$ on $[-1, 1]$ (Wang & Wu, 2025). Our primary CA-MER evaluation retains its fixed partitions: exactly one unimodal label agrees with the multimodal reference; the other disagrees (Han et al., 2025). EmoMM compares modality polarity to a joint reference (Sun et al., 2026a). Appendix E.1 gives the label audit, benchmark boundaries, and their relation to the reported conflict-strength groups.

Multimodal recognition must determine both which observations to trust and what those observations imply. Cross-modal attention and shared/private representations organize complementary evidence, while balanced optimization addresses unequal use of modalities (Tsai et al., 2019; Hazarika et al., 2020; Peng et al., 2022). Conflict-aware evaluation further asks which stream agrees with the affective reference (Han et al., 2025; Sun et al., 2026a). Yet a clearly observed cue can support different emotions in different circumstances: a smile accompanying rejection may express courtesy, relief, or satisfaction. Assessing signal reliability alone leaves this interpretive question open. The challenge is to connect a cue to the person’s relation to the event, so that its diagnostic role can change with the scene. The expressions serve different roles: congratulations address the colleague, while vocal tone can reflect the candidate’s own outcome. Their disagreement can therefore inform how private concerns are managed publicly.

Appraisal theory provides that connection through goals, expectations, agency, coping, and norms (Lazarus, 1991; Scherer, 2001). Values describe broader priorities, such as achievement or maintaining relationships (Schwartz, 2012); a concern specifies what the person seeks to attain or protect in this event. Wanting the role makes rejection a setback, while public courtesy can explain the accompanying smile. The relevant reference is local to the event; a person’s broader priorities need not be inferred as a fixed profile. These relations suggest an explicit interface between multimodal evidence and affect prediction: represent the event relative to the person’s concerns, then use that representation when interpreting its emotional cues.

We introduce VISTA, *Value-Informed Semantic Trust Arbitration*. Its seven-field appraisal organizes concerns, event relations, and expression conditions to condition both modality arbitration and affect prediction (Figure 2). This interface makes the scene’s evaluative meaning available where conflicting evidence is interpreted.


The contributions form a single argument. **Design rationale:** separating emotion expectation from cue diagnosticity motivates appraisal-dependent interpretation; representation refinement specifies when an explicit interface can help. **Learned interface:** VISTA connects event appraisal to arbitration and prediction. **Discriminating evidence:** matched controls locate the gain in conflict, while shuffling, generic bottlenecks, removed decision access, and paired interventions examine its source. Five benchmarks distinguish conflict resolution, appraisal readout, and recognition scope; the appendix retains complete supervision and cost results.

2 Background and Related Work

Multimodal learning under disagreement. DiffEmo operationalizes strong sentiment conflict through unimodal annotation gaps (Wang & Wu, 2025); CA-MER and EmoMM extend evaluation to categorical conflict and polarity disagreement, with MoSEAR and CHASE as associated methods (Han et al., 2025; Sun et al., 2026a). CHASE uses conflict to steer attention, whereas VISTA supplies an explicit concern-relative interpretation to both arbitration and prediction. Our controlled gate comparison tests this decision role on a common backbone.

Appraisal and value representations. Appraisal theory relates emotion to goals, expectations, agency, coping, and norms (Lazarus, 1991; Scherer, 2001); regulation shapes the observable response (Gross, 1998). Early work proposed inferring appraisal from nonverbal signals (Mortillaro et al., 2015). ValueNet uses value representations for emotion classification, and ValueEval studies values in arguments (Qiu et al., 2022; Kiesel et al., 2023). CAREBench evaluates appraisal reasoning and interventions (Sun et al., 2026b); ECFlow uses appraisal for emotion–cause extraction (Liang et al., 2026); THERADIA supplies human audiovisual appraisal annotations (Fournier et al., 2025). Expectation-based appraisal predicts emotion labels and shifts (Wang et al., 2026); AG-CTR² instead organizes appraisal chains for support retrieval (Chu et al., 2026).

One scene. Different concerns. Different cue meanings.

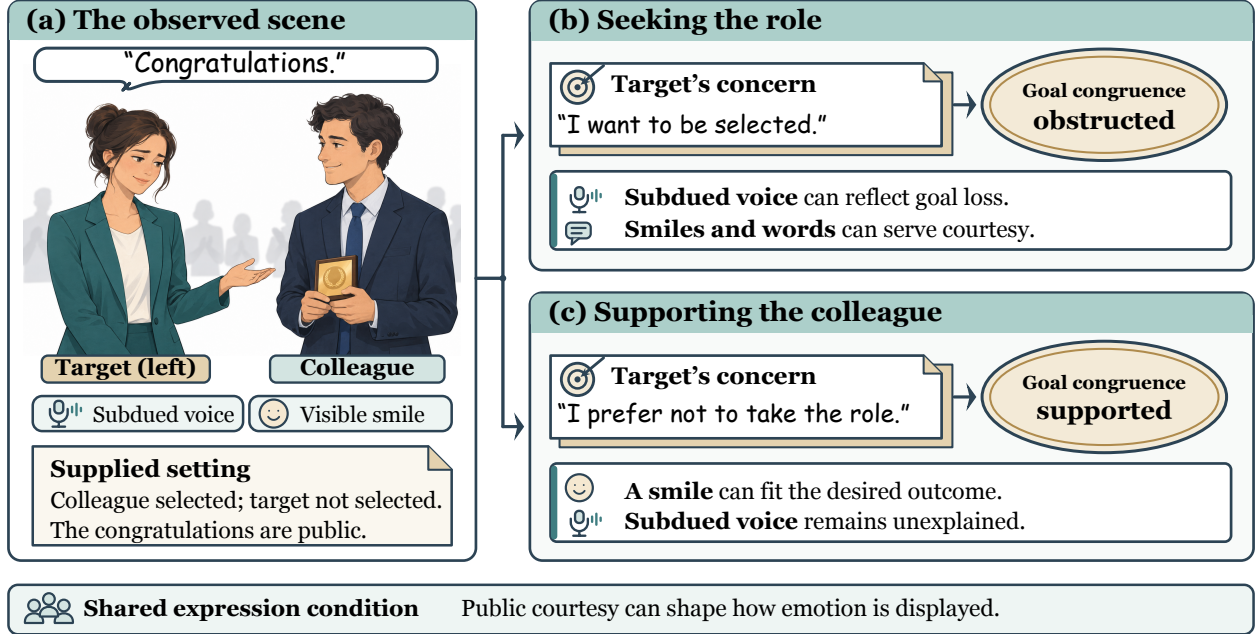

Constructed comparison; supplied context; conditional readings, not model predictions.

Figure 1: The same cues can have different meanings under different concerns. This constructed comparison holds the observed event and cues fixed while changing the supplied goal of the candidate on the left. Goal congruence changes with that goal; the shared public setting supplies a condition on expression. The interpretations are conditional readings, not model predictions.

These tasks emphasize what appraisal predicts or retrieves. Table 6 in Appendix A contrasts these roles with recognition-time cue interpretation. VISTA uses it to condition the interpretation of conflicting sensory evidence: concerns and expression conditions inform arbitration and prediction, while correspondence and connection tests examine the interface’s contribution.

Intermediate concepts and explanations. Concept bottlenecks support concept supervision and intervention (Koh et al., 2020); post-hoc variants enable concept-level model edits (Yuksekgonul et al., 2023). VISTA retains a direct evidence pathway, making appraisal an auxiliary decision interface. Explanation faithfulness is a separate question (Turpin et al., 2023): dependence on internal appraisal, the content of a displayed rationale, and the semantic role of a computational route require distinct evidence.

3 Value-Informed Semantic Trust Arbitration

3.1 Scene meaning and the diagnosticity of emotional cues

VISTA uses event meaning to interpret and combine emotional evidence. We derive how appraisal changes cue diagnosticity, implement this interaction through modality arbitration, and analyze its representational role. Let $X = (x^t, x^a, x^v, C)$ denote text, audio, video, and recognition-time context; y is the affective target. A cue is *diagnostic* when it distinguishes affective hypotheses within a scene.

For hypotheses y_1, y_0 , cue u , and appraisal z , define posterior log odds $L(u, z) = \log[P(y_1 | u, z)/P(y_0 | u, z)]$. Bayes’ rule gives, for positive probabilities,

$$L(u, z) = \underbrace{\log \frac{P(y_1 | z)}{P(y_0 | z)}}_{b(z): \text{emotion expectation}} + \underbrace{\log \frac{P(u | y_1, z)}{P(u | y_0, z)}}_{\ell(u, z): \text{cue diagnosticity}}, \quad (2)$$

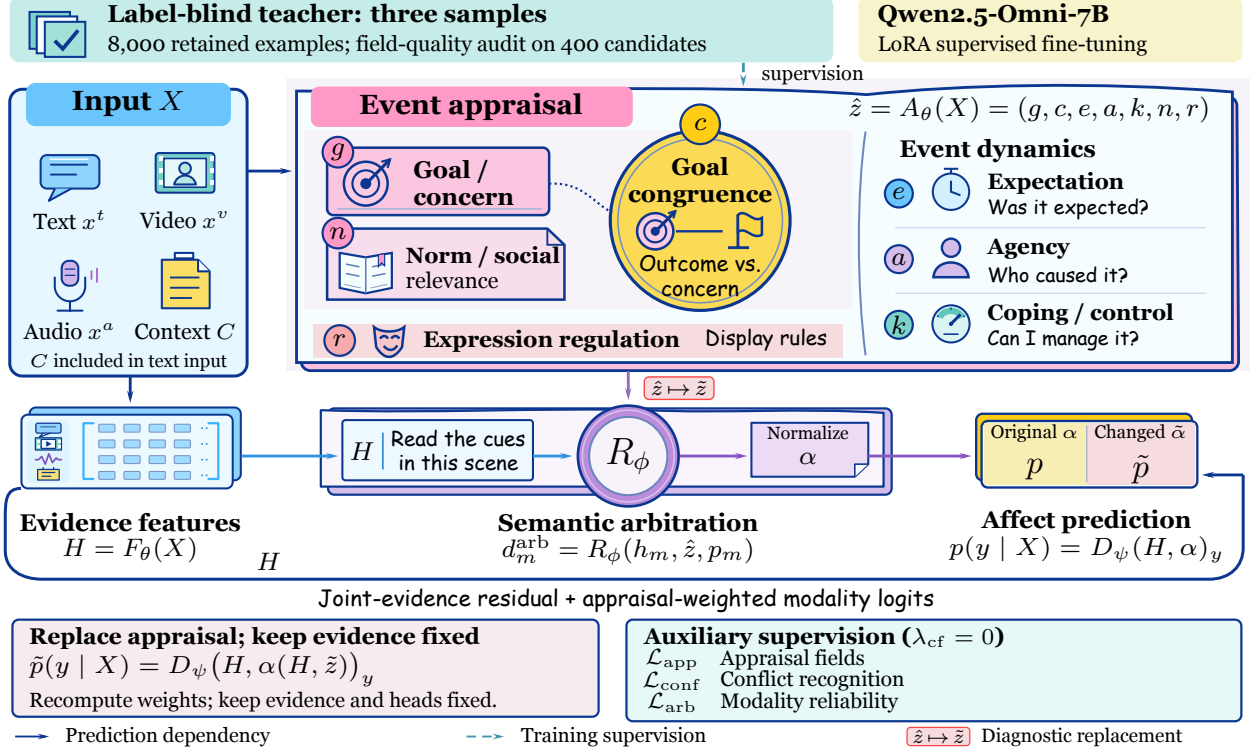


Figure 2: An explicit appraisal interface for multimodal recognition. Appraisal sets modality weights α ; prediction combines weighted unimodal logits with joint evidence. Replacing appraisal at fixed evidence produces the readout $\tilde{p}$. The lower panels show this diagnostic and the supervision roles.

A blocked goal can change b ; a courtesy obligation can change a smile’s contribution ℓ . At fixed b , the latter alone can cross the binary zero-one boundary $b + \ell = 0$. For four supported cue-appraisal conditions, contrast two cues across two appraisals:

$$\begin{aligned} \mathcal{I} &= [L(u_1, z_1) - L(u_0, z_1)] - [L(u_1, z_0) - L(u_0, z_0)] \\ &= [\ell(u_1, z_1) - \ell(u_0, z_1)] - [\ell(u_1, z_0) - \ell(u_0, z_0)]. \end{aligned} \quad (3)$$

Both b terms cancel: nonzero $\mathcal{I}$ rules out an additive representation $L(u, z) = s(u) + t(z)$ and motivates cue-appraisal interactions. Appendix C derives this restriction and a smile/courtesy example. Here z is conceptual; predicted $\hat{z} = A(X)$ can itself depend on the cue, so $b(\hat{z})$ need not exclude cue information. This decomposition supplies a design criterion: the decision pathway should allow appraisal to change the interpretation of a cue, beyond shifting an emotion prior.

The event-level appraisal state is

$$z = (g, c, e, a, k, n, r), \quad (4)$$

where the fields denote goal/concern, goal congruence, expectation, agency, coping/control, norm/social relevance, and expression regulation. Concern identifies what matters; congruence relates the outcome to it. Expectation, agency, and control distinguish anticipation, cause, and available remedies; norms and regulation distinguish social standards from emotional display.

Here *value-informed* refers to the evaluative reference supplied by g and n : c records goal support, while r describes expression conditions. Each field stores its value, confidence, evidence, and validity mask; Appendix A specifies the field types and missing-value rules. Section 4.3 tests removing r .

3.2 The appraisal-conditioned decision pathway

Let $H = F_\theta(X) = \{h_T, h_A, h_V, h_{AVT}\}$ contain separate unimodal forward passes and a joint pass. Each representation is read at the input-end position of the Thinker’s final layer, after final normalization and before appraisal generation. For classification, the predicted state $\hat{z} = A_\theta(X)$ conditions the modality scores:

$$\begin{aligned} u_m &= W_m h_m, & p_m &= \text{softmax}(u_m), \\ d_m^{\text{arb}} &= R_\phi(h_m, \hat{z}, p_m), & \alpha_m(H, \hat{z}) &= \frac{b_m e^{d_m^{\text{arb}}}}{\sum_j b_j e^{d_j^{\text{arb}}}}. \end{aligned} \quad (5)$$

where $m \in \{T, A, V\}$, $b_m \in \{0, 1\}$ indicates availability, and at least one modality is available. The classifier combines logits before normalization:

$$p_\Theta(y \mid X) = D_\psi(H, \alpha(H, \hat{z}))_y = \text{softmax} \left(W_f h_{AVT} + \sum_m \alpha_m(H, \hat{z}) u_m \right)_y. \quad (6)$$

Appraisal changes prediction through the weights, while the residual retains joint evidence. This coupling implements the cue-appraisal interaction motivated by Equation 3: at fixed H and availability, an appraisal change gives $\Delta \log(p_y/p_{y'}) = \sum_m \Delta \alpha_m (u_{m,y} - u_{m,y'})$, with $\sum_m \Delta \alpha_m = 0$. Equal branch margins therefore cancel, while greater disagreement gives scene-matched reweighting more scope to change a class preference; Appendix D.4 proves the identity and bounds this change by the margin range. The internal α allocates weight among unimodal branches; the residual contributes separately. These weights differ from the predictive posterior and input-masking diagnostic α_{diag} .

3.3 Learning and interventions

The system uses Qwen2.5-Omni-7B with LoRA supervised fine-tuning (Xu et al., 2025; Hu et al., 2022). Three label-blind samples from the same teacher provide seven-field pseudo-appraisals; filtering and adjudication retain 8,000 of 10,256 candidates, including partially masked field targets. A separate 400-candidate audit measures field coverage, sampling consistency, and grounding (Appendix J). Inference uses predicted appraisal; human appraisal is reserved for an oracle comparison.

In the isolated label-visible condition, copying is 21.0% versus 3.0% under label-blind supervision, while grounding is 67.0% versus 73.0%, despite higher field consistency. This distinction supports scene grounding as a criterion for appraisal supervision (Appendix J).

Training combines final-task and unimodal losses with appraisal, conflict, and arbitration supervision, using coefficients (1, 1, 0.5, 0.5, 0.5) (Equation 52). Field-type losses are normalized within fields and then over valid fields; supervision masks retain partial labels. The counterfactual coefficient is $\lambda_{\text{cf}} = 0$, so paired interventions evaluate learned responses to changed meaning. Appendix M specifies the training configuration and loss normalization.

At fixed evidence and availability, replacing $\hat{z}$ by $\tilde{z}$ gives

$$p_\Theta(y \mid X; \tilde{z}) = D_\psi(H, \alpha(H, \tilde{z}))_y. \quad (7)$$

Shuffling tests scene correspondence; within-emotion shuffling restricts donors by emotion as an offline diagnostic. The connection ablation retains appraisal supervision and removes z from arbitration, whereas rewriting an external explanation holds H , z , and α fixed. Section 4.3 reports these variants; Appendix D distinguishes fixed-checkpoint replacement from retraining.

3.4 Decision-relevant representation refinement

Appraisal can recover decision distinctions omitted by a compressed H , while remaining a function of the same input X .

Table 1: CA-MER accuracy (%). Conflict averages the video-aligned and audio-aligned subsets. The four trained models share their common-stage examples and optimization schedule. Complete output-validity results and protocol-reassessed external methods are in Appendix G.

Method	Video-aligned	Audio-aligned	Conflict	Consistent	Overall
Qwen2.5-Omni Base	49.0	60.0	54.5	68.0	59.0
Emotion-SFT	55.0	65.0	60.0	73.0	64.3
Generic-CoT-SFT	57.0	66.0	61.5	74.0	65.7
Modality-Gate-SFT	58.0	66.0	62.0	74.0	66.0
VISTA	61.0	68.0	64.5	74.2	67.7

Proposition 1 (Decision-relevant representation refinement). *For fixed deterministic $H = F(X)$ and $\hat{Z} = A(X)$ with finite labels, let $\mathcal{R}^*(U) = 1 - \mathbb{E}[\max_y P(Y = y | U)]$ denote Bayes zero-one risk. Then*

$$\mathcal{R}^*(H, \hat{Z}) \leq \mathcal{R}^*(H), \quad \mathcal{R}^*(X, \hat{Z}) = \mathcal{R}^*(X). \quad (8)$$

The first inequality is strict exactly when, for a positive-probability set of h , no label maximizes the refined posteriors almost surely under $\hat{Z} | H = h$.

Proof sketch. Let $v_y = P(Y = y | H, \hat{Z})$ and y_H be a Bayes label given H . The tower property gives $P(Y = y | H) = \mathbb{E}[v_y | H]$, hence

$$\Delta_{\text{repr}} := \mathcal{R}^*(H) - \mathcal{R}^*(H, \hat{Z}) = \mathbb{E}[\max_y v_y - v_{y_H}] \geq 0. \quad (9)$$

Equality holds exactly when y_H remains optimal almost surely; $(X, A(X))$ and X carry the same information. Positive Bayes-risk reduction requires a decision distinction, not merely changed confidence. If $\hat{Z}$ is already determined by H , this gain is zero. Appendix C.3 gives the full proof, including ties. For an analytical binary example, let a constant H merge equally likely appraisal states with class-1 posteriors 0.8 and 0.2. Preserving this distinction lowers Bayes error from 0.5 to 0.2 (Appendix C.3).

For fixed H and $\hat{Z}$, let f_U be a learned classifier with risk $\mathcal{R}(f_U) = \mathcal{R}^*(U) + \epsilon_U$, where $\epsilon_U \geq 0$. Substitution for $U = H$ and $(H, \hat{Z})$ yields

$$\mathcal{R}(f_H) - \mathcal{R}(f_{H, \hat{Z}}) = \Delta_{\text{repr}} + \epsilon_H - \epsilon_{H, \hat{Z}}. \quad (10)$$

Improvement occurs exactly when $\epsilon_{H, \hat{Z}} - \epsilon_H < \Delta_{\text{repr}}$: appraisal can help through decision distinctions or lower readout error. Section 4.3 tests intermediate organization and scene correspondence through generic and shuffled appraisal. The decomposition separates representational opportunity from the readout that realizes it; Equation 6 accesses appraisal through its constrained weighting function. Matched recognition and connection contrasts assess the resulting decision behavior. Appendix C.3 derives the excess-risk posterior form; Appendix C.2 bounds appraisal-error propagation.

4 Experiments

The design in Section 3 makes a specific prediction: appraisal should help most when a cue admits competing emotional interpretations. We first test where the recognition gain occurs, then use correspondence and connection controls to examine what the interface contributes. Interventions and complementary tasks test the resulting account beyond the primary comparison.

4.1 Evaluation design

Tasks and evaluation modes. CA-MER provides video-aligned, audio-aligned, and consistent subsets (Han et al., 2025). We normalize outputs and average the first two accuracies for conflict. On EmoMM, we evaluate common-stage checkpoints without adaptation (Sun et al., 2026a). We adapt to CH-SIMS v2 and MELD for sentiment accuracy across train-defined conflict groups and seven-class emotion recognition, respectively (Liu et al., 2022; Poria et al., 2019). On THERADIA, we separately evaluate frozen-backbone appraisal probes and downstream emotion-intensity regression (Fournier et al., 2025). Appendix E details the protocols and shared corpus sources.

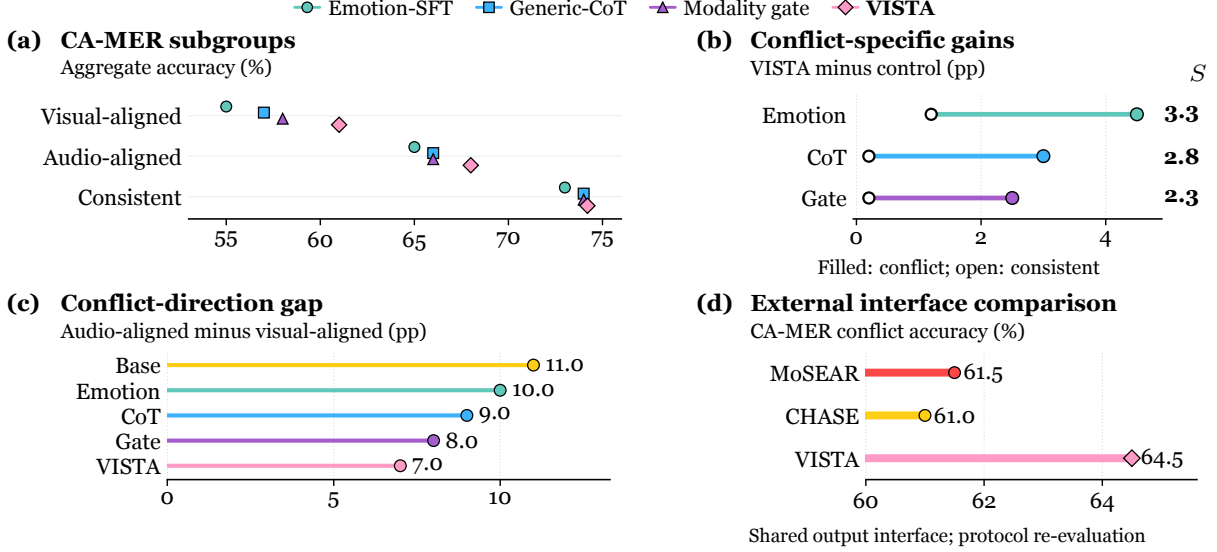


Figure 3: Conflict resolution beyond stronger reasoning and gating. (a) Subgroup accuracy. (b) Conflict and consistent gains; S is their difference. (c) The audio–video accuracy gap. (d) External methods re-evaluated under the common output interface. Points show aggregate scores; gains and gaps use percentage points.

Matched common training. The four trained models share Qwen2.5-Omni-7B, 8,000 examples, and the optimization schedule in Section 3.3; Base is frozen. Generic-CoT-SFT and VISTA both average 360 target tokens. The gate and VISTA have 12.19M and 12.39M trainable parameters. Scores are aggregates; contrasts use unrounded values. Appendices N and K give the configuration and compute record.

Conflict specificity. For a comparator B , define

$$S(B) = \underbrace{\text{Acc}_{\text{conf}}(\text{VISTA}) - \text{Acc}_{\text{conf}}(B)}_{\Delta_{\text{conf}}(B)} - \underbrace{\text{Acc}_{\text{cons}}(\text{VISTA}) - \text{Acc}_{\text{cons}}(B)}_{\Delta_{\text{cons}}(B)}. \quad (11)$$

Positive S means that improvement is larger on the observed conflict subsets than on consistent inputs. This descriptive contrast complements absolute accuracy; all group scores and differences appear in Appendix F.

4.2 The improvement concentrates on conflicting evidence

VISTA reaches **64.5%** conflict and **67.7%** overall accuracy (Table 1). Against Modality-Gate-SFT, the 2.5-point conflict gain accompanies a 0.2-point consistency gain ($S = 2.3$), locating the benefit where the streams disagree.

Against generic reasoning, visual- and audio-aligned gains of 4.0 and 2.0 points contrast with 0.2 on consistency, giving $S = 2.8$; against Emotion-SFT, $S = 3.3$. Figure 3 separates these effects. Under the common normalized interface, MoSEAR and CHASE reach 61.5% and 61.0% conflict accuracy, respectively, placing VISTA 3.0 and 3.5 points higher. These protocol-reassessed scores are distinct from published results.

Emotion-SFT tests label training, Generic-CoT-SFT supplies reasoning at the same mean target length, and Modality-Gate-SFT tests learned weighting. The latter two nearly match VISTA on consistency but separate on conflict; gains in both alignment directions extend to cases favoring either stream. The next tests examine which properties of appraisal accompany this advantage.

4.3 Scene correspondence and decision access strengthen recognition

Higher accuracy alone does not establish why appraisal helps. Figure 4 therefore separates decision access, semantic content, and scene correspondence. Retaining appraisal supervision but removing its forward decision

Table 2: Directed response and selective stability. Direction is agreement with the annotated target-probability direction; class change counts label flips. Both use 150 relevant pairs; stability uses 150 irrelevant rewrites. Rates are percentages; Δp and Δ log-odds retain native scales.

Method	Direction	Class change	Δp	Δ log-odds	Stability
Emotion-SFT	62.0	24.0	0.050	0.201	91.0
Generic-CoT-SFT	66.0	28.0	0.070	0.281	90.0
Modality-Gate-SFT	63.0	25.0	0.055	0.221	91.0
VISTA	75.0	36.0	0.120	0.484	92.0

Table 3: Recognition across conditions and tasks (%). EmoMM uses no benchmark-specific adaptation; CH-SIMS v2 and MELD use task-adapted models (Base is zero-shot). Acc2 is binary accuracy, Q4 the highest-conflict group, and wF1 weighted F1.

Method	EmoMM accuracy		CH-SIMS v2 Acc2		MELD
	Conflict	Conflict + missing	Overall	Q4	wF1
Qwen2.5-Omni Base	46.5	38.0	79.4	70.0	59.55
Emotion-SFT	47.5	38.0	84.0	77.0	65.49
Generic-CoT-SFT	48.0	38.6	84.3	77.8	65.69
Modality-Gate-SFT	49.0	40.0	84.8	79.2	65.74
VISTA	52.0	43.5	85.9	81.5	66.94

connection gives 62.5% conflict accuracy, versus 64.5% for full VISTA. A generic semantic bottleneck reaches 63.2%, while renaming the appraisal fields retains 64.2%. These controls associate the additional benefit with the organized appraisal input used by prediction.

Scene correspondence provides a further distinction. Cross-sample shuffling gives 62.0%, whereas restricting donors to the same emotion class gives 63.7%. The latter preserves the donor’s emotion category but loses 0.8 points, supporting information tied to the particular event. Removing expression regulation gives 63.6%. Removing appraisal, conflict, or reliability supervision gives 63.2%, 63.5%, or 63.0%, respectively; Table 19 retains every variant.

The interface also differs from a displayed explanation. Editing the external rationale with internal state fixed leaves accuracy at 64.5%; corrupting internal appraisal while preserving the explanation gives 62.0%. Native visual/audio weights change from 0.42/0.30 on video-aligned inputs to 0.25/0.47 on audio-aligned inputs. These conditional means complement the replacement tests; together, the contrasts connect the representation analysis in Section 3.4 to a scene-matched input that participates in prediction.

4.4 Relevant changes elicit directed, selective responses

The preceding tests remove or disrupt information. A complementary test asks whether changing relevant meaning produces a directed response while irrelevant reformulations preserve the decision. Table 2 reports 150 relevant intervention pairs and 150 separate irrelevant-rewrite pairs. Direction agreement concerns the target probability; label change concerns the predicted class.

The reported results combine 75.0% direction agreement with 92.0% rewrite stability. The 36.0% label-change rate distinguishes directed probability movements from those large enough to cross a class boundary.

Input masking gives a +0.040 target-modality diagnostic shift (controls: +0.015–+0.020), distinct from native α . These are behavioral evaluations of the learned interface: the final configuration uses $\lambda_{cf} = 0$. Appendix H.1 gives the complete paired record.

4.5 The pattern extends across conflict strength and evaluation modes


Table 3 and Figure 5 extend the evaluation to increasing conflict strength, missing evidence, and ordinary emotion recognition.

(a) Appraisal content and decision access

Loss from full VISTA: 64.5 / 74.2 (conflict / consistent)

	Conflict	Consistent
Within-emotion shuffle	0.8	0.2
Cross-sample shuffle	2.5	0.7
Randomized field names	0.3	0.0
No decision connection	2.0	0.2
No expression regulation	0.9	0.2
Generic semantic bottleneck	1.3	0.1
External rationale edited	0.0	0.0
Internal z corrupted	2.5	0.7
No appraisal loss ($\lambda_z = 0$)	1.3	0.2
No conflict loss ($\lambda_c = 0$)	1.0	0.1
No reliability loss ($\lambda_a = 0$)	1.5	0.2

0 2.5
Accuracy loss (pp): light = low, dark = high

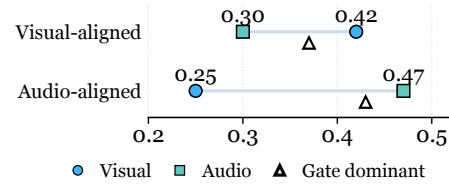(b) Condition-dependent weightsNative modality weights α **(c) Intervention response**

Direction / label change / irrelevant stability (%)

	Dir.	Change	Stable
Emotion	62	24	91
CoT	66	28	90
Gate	63	25	91
VISTA	75	36	92

150 valid pairs; 150 irrelevant rewrites

Figure 4: From scene-specific appraisal to selective responses. (a) Accuracy losses under appraisal and training variants. (b) Native modality weights; triangles show the gate’s dominant-modality weight. (c) Direction agreement, label changes, and irrelevant-rewrite stability on two separate 150-pair sets. Native weights are distinct from masking-derived diagnostics.

Conflicting and absent evidence. EmoMM conflict and conflict-plus-missingness accuracy reach 52.0% and 43.5%, gains of 4.0 and 4.9 points over Generic-CoT-SFT. The consistency-to-conflict drop is 4.3 points, versus 6.6–7.5 for trained controls. Appendix G gives all conditions and the CHASE comparison, whose router used EmoMM supervision.

Greater conflict, greater benefit. On CH-SIMS v2, the gain over Emotion-SFT grows from 0.2 points in Q1 to 4.5 in Q4. Q4 accuracy reaches 81.5% and MAE falls from 0.365 to 0.315. This progression strengthens the conflict-specific account across training-defined intensity groups (Figure 5a).

From readable appraisal to useful appraisal. Identical frozen-backbone probes yield THERADIA macro CCC 0.600 for VISTA versus 0.505 for Emotion-SFT. Downstream ten-emotion CCC is 0.390 without appraisal, 0.415 with disconnected auxiliary supervision, 0.450 with generated appraisal, and 0.480 with human appraisal. The 0.035 gain over auxiliary-only training complements the CA-MER connection contrast: readable appraisal also supports prediction (Appendix I).

Recognition scope and practical cost. MELD weighted-F1 improves by 1.46 points over Emotion-SFT, with higher recall in all seven classes (Table 3). VISTA uses 72 GPU-hours per seed and 15.5s median latency, versus 40 hours/13.5s for equal-length Generic-CoT and 64 hours/6.0s for gating. Appendices K and L retain full resources and class results.

The role of learning. Frozen appraisal prompting gives 56.0% conflict accuracy versus 56.4% for generic reasoning; training reverses this ordering (64.5% versus 61.5%), supporting the learned interface. Appendices G and J retain the prompting and supervision audits.

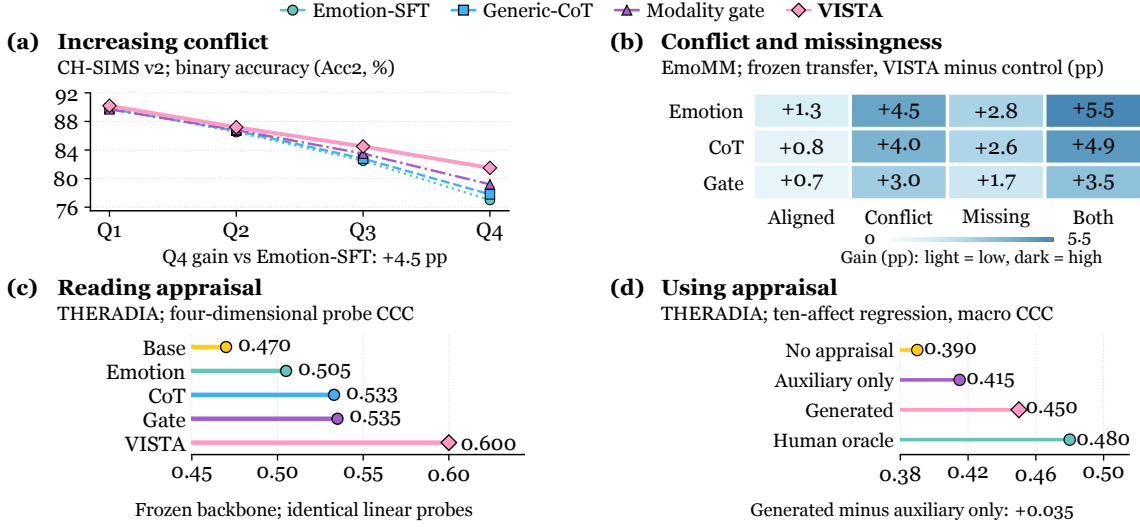


Figure 5: Conflict strength, frozen evaluation, and appraisal readout. (a) Task-adapted CH-SIMS v2 binary accuracy by conflict group. (b) EmoMM gains without benchmark-specific adaptation. (c) THERADIA four-dimensional probe CCC on frozen backbones. (d) Ten-label emotion-intensity regression CCC with different appraisal access; human appraisal is an oracle.

5 Discussion and Conclusion

VISTA connects what an event means to a person with how its emotional evidence is used. Distinguishing emotion expectation from cue diagnosticity motivates a concern-relative appraisal that reweights modality logits alongside joint evidence. Recognition gains concentrate on conflict; correspondence, connection, and intervention tests connect this benefit to the scene-specific interface. The analysis explains when reweighting can alter a class preference and when appraisal can refine a compressed representation. Together, these results establish a concrete route from scene meaning to conflict-sensitive emotion recognition.

AI use statement

We used AI assistants in two roles. First, for manuscript preparation, including grammar checking, text polishing, and assistance with conceptual framing, mathematical arguments, result interpretation, and figure preparation. Second, for routine coding assistance during implementation, including annotation processing and visualization. The illustrative scene in Figure 1 was AI-generated; model-generated appraisal supervision is described in Section 3.3. The method, experimental design, and all implementation decisions affecting the reported results were finalized by the authors, who verified all AI-assisted output and take full responsibility for this paper.

Ethics statement

Appraisal is a contextual hypothesis about an event, rather than a durable personal attribute or a judgment of moral worth. Goals, norms, and expression vary across people and settings. Consequential uses require context-specific validation and human review; conversational and audiovisual data require attention to participant privacy and dataset access conditions. Appendix N discusses responsible interpretation.

Reproducibility statement

Appendix C gives the analytical assumptions and full derivations. Appendix E describes datasets and conflict protocols, Appendix J records supervision, and Appendix M specifies common training and task adaptation. Appendix N maps the complete experimental evidence. The appendices report the complete experimental results, scoring conventions, and links between the analyses, tables, and figures. For the independent public-label prevalence audit, Appendix E.1 specifies the label mapping, exact comparison rule, sample counts, and data provenance.

References

- Yuqi Chu, Lizi Liao, Jinggui Liang, Boyang Li, and Richang Hong. Beyond semantic similarity: Appraisal-guided chain-of-thought reasoning and retrieval for multimodal emotional support conversations. In *Findings of the Association for Computational Linguistics: ACL 2026*, pp. 17104–17119. Association for Computational Linguistics, 2026. doi: 10.18653/v1/2026.findings-acl.844. URL <https://aclanthology.org/2026.findings-acl.844/>.
- Quanqi Du, Loic De Langhe, Els Lefever, and Veronique Hoste. Sentiment analysis on video transcripts: Comparing the value of textual and multimodal annotations. In *Proceedings of the Tenth Workshop on Noisy and User-generated Text*, pp. 10–15. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.wnut-1.2. URL <https://aclanthology.org/2025.wnut-1.2/>.
- Hippolyte Fournier, Sina Alisamir, Safaa Azzakhnini, Isabella Zsoldos, Eléonore Trân, Gérard Bailly, Frédéric Elisei, Béatrice Bouchot, Brice Varini, Patrick Constant, Joan Fruitet, Franck Tarpin-Bernard, Solange Rossato, François Portet, Olivier Koenig, Hanna Chainay, and Fabien Ringeval. THERADIA WoZ: An ecological corpus for appraisal-based affect research in healthcare. *IEEE Transactions on Affective Computing*, 16(3):2233–2244, 2025. doi: 10.1109/TAFFC.2025.3557465. URL <https://arxiv.org/abs/2405.06728>.
- James J. Gross. The emerging field of emotion regulation: An integrative review. *Review of General Psychology*, 2(3):271–299, 1998. doi: 10.1037/1089-2680.2.3.271. URL <https://journals.sagepub.com/doi/10.1037/1089-2680.2.3.271>.
- Zhiyuan Han, Beier Zhu, Yanlong Xu, Peipei Song, and Xun Yang. Benchmarking and bridging emotion conflicts for multimodal emotion reasoning. In *Proceedings of the 33rd ACM International Conference on Multimedia*, pp. 5528–5537, 2025. doi: 10.1145/3746027.3754856. URL <https://arxiv.org/abs/2508.01181>.
- Devamanyu Hazarika, Roger Zimmermann, and Soujanya Poria. MISA: Modality-invariant and -specific representations for multimodal sentiment analysis. In *Proceedings of the 28th ACM International Conference on Multimedia*, pp. 1122–1131, 2020. doi: 10.1145/3394171.3413678. URL <https://arxiv.org/abs/2005.03545>.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=nZeVKeeFYf9>.
- Johannes Kiesel, Milad Alshomary, Nailia Mirzakhmedova, Maximilian Heinrich, Nicolas Handke, Henning Wachsmuth, and Benno Stein. SemEval-2023 task 4: ValueEval: Identification of human values behind arguments. In *Proceedings of the 17th International Workshop on Semantic Evaluation (SemEval-2023)*, pp. 2287–2303. Association for Computational Linguistics, 2023. doi: 10.18653/v1/2023.semeval-1.313. URL <https://aclanthology.org/2023.semeval-1.313/>.
- Pang Wei Koh, Thao Nguyen, Yew Siang Tang, Stephen Mussmann, Emma Pierson, Been Kim, and Percy Liang. Concept bottleneck models. In *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pp. 5338–5348, 2020. URL <https://proceedings.mlr.press/v119/koh20a.html>.
- Richard S. Lazarus. *Emotion and Adaptation*. Oxford University Press, 1991. doi: 10.1093/oso/9780195069945.001.0001. URL <https://academic.oup.com/book/53474>.
- Qiao Liang, Ying Shen, Yao Liu, Tiantian Chen, and Lin Zhang. Why do emotions change? appraisal-guided reasoning for emotion-cause triplet extraction in conversations. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 11750–11772. Association for Computational Linguistics, 2026. doi: 10.18653/v1/2026.acl-long.539. URL <https://aclanthology.org/2026.acl-long.539/>.
- Yihe Liu, Ziqi Yuan, Huisheng Mao, Zhiyun Liang, Wanqiuyue Yang, Yuanzhe Qiu, Tie Cheng, Xiaoteng Li, Hua Xu, and Kai Gao. Make acoustic and visual cues matter: CH-SIMS v2.0 dataset and AV-Mixup consistent module. In *Proceedings of the 2022 International Conference on Multimodal Interaction*, pp. 247–258, 2022. doi: 10.1145/3536221.3556630. URL <https://arxiv.org/abs/2209.02604>.
- Marcello Mortillaro, Ben Meuleman, and Klaus R. Scherer. Automated recognition of emotion appraisals. In Jordi Vallverdú (ed.), *Handbook of Research on Synthesizing Human Emotion in Intelligent Systems and Robotics*, pp. 338–351. Information Science Reference, 2015. doi: 10.4018/978-1-4666-7278-9.ch016. URL <https://archive-ouverte.unige.ch/unige:97396>.
- Qiuyu Pan and Zuqiang Meng. Hybrid uncertainty calibration for multimodal sentiment analysis. *Electronics*, 13(3): 662, 2024. doi: 10.3390/electronics13030662. URL <https://doi.org/10.3390/electronics13030662>.

- Xiaokang Peng, Yake Wei, Andong Deng, Dong Wang, and Di Hu. Balanced multimodal learning via on-the-fly gradient modulation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 8238–8247, 2022. URL https://openaccess.thecvf.com/content/CVPR2022/html/Peng_Balanced_Multimodal_Learning_via_On-the-Fly_Gradient_Modulation_CVPR_2022_paper.html.
- Soujanya Poria, Devamanyu Hazarika, Navonil Majumder, Gautam Naik, Erik Cambria, and Rada Mihalcea. MELD: A multimodal multi-party dataset for emotion recognition in conversations. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 527–536. Association for Computational Linguistics, 2019. doi: 10.18653/v1/P19-1050. URL <https://aclanthology.org/P19-1050/>.
- Liang Qiu, Yizhou Zhao, Jinchao Li, Pan Lu, Baolin Peng, Jianfeng Gao, and Song-Chun Zhu. ValueNet: A new dataset for human value driven dialogue system. *Proceedings of the AAAI Conference on Artificial Intelligence*, 36(10):11183–11191, 2022. doi: 10.1609/aaai.v36i10.21368. URL <https://ojs.aaai.org/index.php/AAAI/article/view/21368>.
- Klaus R. Scherer. Appraisal considered as a process of multilevel sequential checking. In Klaus R. Scherer, Angela Schorr, and Tom Johnstone (eds.), *Appraisal Processes in Emotion: Theory, Methods, Research*, pp. 92–120. Oxford University Press, 2001. doi: 10.1093/oso/9780195130072.003.0005. URL <https://academic.oup.com/book/53557/chapter/422115725>.
- Shalom H. Schwartz. An overview of the Schwartz theory of basic values. *Online Readings in Psychology and Culture*, 2(1), 2012. doi: 10.9707/2307-0919.1116. URL <https://scholarworks.gvsu.edu/orpc/vol2/iss1/11/>.
- Yueru Sun, Yimeng Zhang, Haoyu Gu, Nuo Chen, Dong She, Xianrong Yao, Yang Gao, and Zhanpeng Jin. EmoMM: Benchmarking and steering MLLM for multimodal emotion recognition under conflict and missingness. In *Findings of the Association for Computational Linguistics: ACL 2026*, pp. 20351–20371. Association for Computational Linguistics, 2026a. doi: 10.18653/v1/2026.findings-acl.1018. URL <https://aclanthology.org/2026.findings-acl.1018/>.
- Zhaoyue Sun, Hainiu Xu, Andero Uusberg, James J. Gross, Petr Slovak, and Yulan He. CAREBench: Evaluating LLMs’ emotion understanding by assessing cognitive appraisal reasoning. *arXiv preprint arXiv:2605.17176*, 2026b. URL <https://arxiv.org/abs/2605.17176>.
- Yao-Hung Hubert Tsai, Shaojie Bai, Paul Pu Liang, J. Zico Kolter, Louis-Philippe Morency, and Ruslan Salakhutdinov. Multimodal transformer for unaligned multimodal language sequences. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 6558–6569. Association for Computational Linguistics, 2019. doi: 10.18653/v1/P19-1656. URL <https://aclanthology.org/P19-1656/>.
- Miles Turpin, Julian Michael, Ethan Perez, and Samuel Bowman. Language models don’t always say what they think: Unfaithful explanations in chain-of-thought prompting. In *Advances in Neural Information Processing Systems*, volume 36, pp. 74952–74965, 2023. doi: 10.52202/075280-3275. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/ed3fea9033a80fea1376299fa7863f4a-Abstract.html.
- Xiaowei Wang, Jayant Teotia, Rui Mao, Wandeep Kaur Ratan Singh, Sabrina Binti Tiun, and Erik Cambria. Appraisal theory-informed emotion prediction. In *Proceedings of the Fifteenth Language Resources and Evaluation Conference*, pp. 11345–11358. ELRA Language Resource Association, 2026. doi: 10.63317/3rx3wu7m6cgn. URL <https://aclanthology.org/2026.lrec-1.887/>.
- Yufei Wang and Mengyue Wu. Evaluation of data inconsistency for multi-modal sentiment analysis. In *Man-Machine Speech Communication*, volume 2312 of *Communications in Computer and Information Science*, pp. 299–310. Springer, 2025. doi: 10.1007/978-981-96-1045-7_25. URL <https://arxiv.org/abs/2406.03004>.
- Jin Xu, Zhifang Guo, Jinzheng He, Hangrui Hu, Ting He, Shuai Bai, Keqin Chen, Jialin Wang, Yang Fan, Kai Dang, Bin Zhang, Xiong Wang, Yunfei Chu, and Junyang Lin. Qwen2.5-Omni technical report. *arXiv preprint arXiv:2503.20215*, 2025. URL <https://arxiv.org/abs/2503.20215>.
- Wenmeng Yu, Hua Xu, Fanyang Meng, Yilin Zhu, Yixiao Ma, Jiele Wu, Jiyun Zou, and Kaicheng Yang. CH-SIMS: A chinese multimodal sentiment analysis dataset with fine-grained annotation of modality. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 3718–3727. Association for Computational Linguistics, 2020. doi: 10.18653/v1/2020.acl-main.343. URL <https://aclanthology.org/2020.acl-main.343/>.
- Mert Yuksekgonul, Maggie Wang, and James Zou. Post-hoc concept bottleneck models. In *International Conference on Learning Representations*, 2023. URL <https://openreview.net/forum?id=nA5AZ8CEyow>.
- Sheng Zhang, Min Chen, Jincal Chen, Yuan-Fang Li, Yiling Wu, Minglei Li, and Chuanbo Zhu. Combining cross-modal knowledge transfer and semi-supervised learning for speech emotion recognition. *Knowledge-Based Systems*, 229: 107340, 2021. doi: 10.1016/j.knosys.2021.107340. URL <https://doi.org/10.1016/j.knosys.2021.107340>.

Appendix

VISTA

Value-Informed Event Appraisal for Multimodal Emotion Conflict

Concepts and evaluation

A The seven appraisal fields	14
A.1 Field types and missing labels	14
A.2 Appraisal unit and evidence	14
A.3 Evidence anchors	15
A.4 Underspecified scenes	16
A.5 Related appraisal interfaces	16
B Paired scene interpretations	16
B.1 Outcome and concern	17
B.2 Public and private expression	17
B.3 Agency, norms, and blame	17
C Cue meaning and representation	18
C.1 Emotion priors and cue meaning	18
C.2 Appraisal uncertainty	20
C.3 Representation refinement	21
D Appraisal and scene interventions	22
D.1 Correspondence, access, content	22
D.2 Scene and representation edits	23
D.3 Response versus label change	23
D.4 Appraisal and weighted readout	23
D.5 Semantic organization	25
D.6 Grounding in observed context	25
E Datasets and scoring conventions	26
E.1 Conflict definitions and error burden	26
E.2 Benchmark metrics and scoring	29
E.3 Complementary evaluation settings	30
F Conflict specificity	31
F.1 Both conflict directions	31

Results and experimental record

G Recognition and mechanism tests	32
G.1 CA-MER and output validity	32
G.2 EmoMM: conflict and missingness	32
G.3 CH-SIMS v2: conflict intensity	32
G.4 Appraisal and training ablations	33
G.5 Frozen prompts and explanations	34
H Counterfactual response	35
H.1 Paired tests and success criteria	35
H.2 Diagnostic modality weights	36
I Appraisal readout and use	37
I.1 Frozen-backbone appraisal probes	37
I.2 Appraisal in emotion prediction	37
J Appraisal supervision and quality	38
J.1 Teacher generation and masks	38
J.2 Data selection and retention	39
J.3 Seven-field quality audit	39
J.4 Label-visibility diagnostic	40
J.5 Second-pass explanation audit	41
K Resources and remaining errors	41
K.1 Training and inference costs	41
K.2 Corrected, introduced, shared errors	42
L MELD and class recall	43
M Training and task adaptation	43
M.1 Common training controls	43
M.2 Training loss and valid labels	44
M.3 Checkpoint use and adaptation	45
M.4 Cross-task result overview	45
N Reporting and evidence map	45
N.1 Units, denominators, and precision	45
N.2 Complete evidence map	46

A Reading the seven appraisal fields

The appraisal schema gives the model a reference for interpreting an event: what the person seeks to attain or protect, how the outcome bears on that concern, and how the situation shapes its expression. Its usefulness depends on preserving these relations. An outcome description such as “the candidate was not selected” records what happened. Goal congruence additionally asks whether that outcome obstructed something the candidate wanted. A smile records an expression; expression regulation concerns the conditions under which that expression was produced. This distinction between an observation and its event-relative interpretation organizes the seven fields.

A.1 Field types and missing supervision

Each field stores four components: **value**, **confidence**, **evidence**, and **mask**. Table 4 specifies the value space. Evidence anchors connect a field to the input; confidence records the certainty of that judgment, while the mask determines whether it supplies a valid supervision target. Confidence is recorded separately from supervision weights.

Table 4: Typed appraisal interface. These value spaces distinguish scene semantics, expressive conditions, and missing information. Each norm bit has its own validity mask.

Field	Type	Values
g	Short text	Goal or concern supported by the scene
c	Categorical	promotes, obstructs, irrelevant
e	Categorical	expected, violated, uncertain
a	Categorical	self, other, environment, shared, unknown
k	Continuous	$[0, 1]$ coping/control value
n	Four binary entries	politeness, identity, status, relationship
r	Categorical	none, suppressed, masked, exaggerated, social_maintenance

A missing field is stored as **null** and excluded by its mask; it is not replaced with numerical zero. The output state $a = \text{unknown}$ is retained when applicable but does not provide a valid agency target. Each bit of n is set to **false** only when the input supports a negative judgment; absent evidence leaves that bit missing. Thus, missing coping information is distinct from $k = 0$, and an unresolved norm is distinct from an explicitly absent one. Appraisal losses follow these types and normalize over valid supervision, as specified in Appendix M.

A.2 The unit of appraisal and its evidence

An appraisal is indexed by a recognition target, an event, and the time at which the response is interpreted. Write this unit as (p, ω, τ) , where p is the person whose affect is being recognized and ω is the relevant outcome or interaction. This indexing supplies a semantic contract for Equation 4; it is not an additional model input. In a selection scene, the candidate’s unsuccessful application and the colleague’s successful application concern the same announcement but different target–event relations. After an appeal becomes possible, the candidate’s control can change even though the original outcome does not.

The fields answer different types of question. The concern g identifies an object to attain or protect. Congruence c evaluates the relation between that object and ω . Expectation e concerns what was anticipated before ω ; agency a concerns its attributed cause. Control k concerns available responses after or during the event. Norms n identify standards relevant to the event or interaction, and regulation r concerns how the resulting response is displayed. These semantic types explain why the seven entries cannot be replaced by seven interchangeable positive–negative scores.

For example, let $\mathcal{O}$ be the event outcomes described in the available context and let $\succeq_{p,g}$ denote the target’s stated or context-supported preference ordering relative to concern g . Comparing the observed outcome $o \in \mathcal{O}$

with the pertinent alternative o_0 gives a conceptual reading of congruence:

$$o \succ_{p,g} o_0 : \text{supports } g, \quad o \prec_{p,g} o_0 : \text{obstructs } g. \quad (12)$$

The alternative o_0 is fixed by the comparison, such as receiving versus not receiving the position. Holding that comparison fixed while changing the concern isolates its evaluative role. An unestablished preference relation leaves the judgment unresolved; it does not imply indifference. This ordering is a semantic device rather than an implemented utility function. It makes the role of concern precise: changing g can change the ordering while the event fact o remains fixed.

A linked interpretation rather than seven independent observations. An evidence anchor and the inference made from it play different roles. “I applied because I wanted to lead the project” supports the concern; “the position went to someone else” establishes the outcome; their relation supports obstruction. A final-decision announcement also bears on immediate control, while the presence of the selected colleague bears on expressive obligations. These conclusions reuse observations, so agreement among fields is not independent corroboration. Their value is in making the dependencies explicit: congruence must refer to the stated concern, agency to the appraised event, and regulation to the observed display under the relevant interaction conditions. A coherent goal edit can therefore require a congruence edit, as developed in Appendix D.

A.3 Evidence anchors and inferential distinctions

Table 5 describes how to read each field from available context. An evidence anchor is material in the scene that bears on the question; it need not directly state the appraisal. For instance, a prior request to join a committee can support an inference about the relevant goal, while the committee’s decision establishes the outcome. Relating those two observations supplies the congruence judgment.

Table 5: A semantic reading guide for the seven fields. Evidence anchors identify relevant observations; the final column specifies the relation to interpret.

Field	Evidence anchor	Distinction to preserve
Goal / concern	Requests, commitments, prior choices, or stated priorities in the available context	The current object of concern, such as obtaining this role, is more specific than a general value such as achievement.
Goal congruence	The observed outcome together with evidence about the relevant goal	Whether the event supports or obstructs the goal; the same external outcome can have different signs for different concerns.
Expectation	Prior plans, predictions, promises, or established patterns	Expectedness concerns anticipation. An undesired event can be expected, and a desirable event can be surprising.
Agency	Actions, decisions, attributions, and identified participants	Who or what produced the outcome; identifying a responsible agent does not by itself establish intent or blame.
Coping / control	Available remedies, remaining choices, resources, or finality of the decision	The person’s capacity to alter or manage the consequences, distinct from responsibility for causing them.
Norm / social relevance	Roles, relationships, agreed procedures, audience, and obligations	Which interpersonal standards bear on this situation, including whether an outcome or an expression is socially expected.
Expression regulation	Expression in relation to the event, audience, and other cues	Whether suppression, masking, or exaggeration helps explain the display; a visible smile alone does not establish masking.

Binding appraisal to the person and event. A useful concern is specific enough to relate to the outcome. “Protecting an important relationship” becomes informative when the relationship and the threatened interaction are identifiable. The same scene can contain several people with different concerns, so a successful

Table 6 : Related approaches by decision role. Selected methods organized by the information used, the decision it informs, and the evaluation target.

Approach	Organizing signal	Decision role	Evaluation focus
Wang et al. (2026)	Expectations and their violations	Predict emotion labels and shifts	Emotion labels and transition dynamics
AG-CTR ² (Chu et al., 2026)	Event understanding, appraisal, and coping	Retrieve support using appraisal chains	Support generation and retrieval-query quality
CHASE (Sun et al., 2026a)	Modality hidden states and attention preferences	Detect conflict and steer head-level attention	Recognition under conflict and missingness
VISTA	Concerns, event relations, and expression conditions	Condition modality arbitration and affect prediction	Conflict gains, correspondence, and decision access

outcome for one person need not be successful for the recognition target. It can also involve more than one concern for that person: losing a competition may obstruct achievement while an appropriate congratulation preserves a relationship. The schema organizes this coexistence without requiring a one-to-one mapping from a value category to an emotion.

Keeping related fields distinct. Agency and control occupy different positions in an account of the event. A committee may make a decision that the candidate can appeal, or make a decision that is final. Conversely, the candidate may have caused a problem that another person now controls. Norms and regulation are similarly related but distinct. A norm can judge the event itself, such as whether a selection procedure was fair, or prescribe an appropriate response. A public occasion can create an obligation to be courteous; whether a particular display serves that obligation is a further question about regulation. Separating these questions prevents a single contextual fact from being counted as several independent reasons for an emotion label.

A.4 Underspecified scenes and unresolved appraisals

A short clip may reveal the outcome while omitting the concern, the expectation, or the available response. In this semantic guide, an unresolved field remains an open question. Lack of evidence for obstruction does not imply that a goal was supported, and lack of a visible attempt to intervene does not establish low control. Likewise, an unspecified expectation cannot be filled by assuming that every negative outcome was surprising. The missing-value and validity rules in Appendix A.1 preserve these distinctions in the training targets.

The other fields can remain informative when one question is unresolved. A clear announcement of a final decision can support low immediate control even when the candidate’s expectations are unknown. A formal public exchange can establish an expressive obligation without establishing the private emotional response. Such partial interpretations preserve useful evidence while keeping the final affective judgment responsive to the full multimodal input.

A.5 Appraisal interfaces and their decision roles


Table 6 complements Section 2 by distinguishing the information organized by each interface, the decision it informs, and the corresponding evaluation target.

B Paired scenes for concern-relative interpretation

These constructed analytical illustrations examine three distinct roles of appraisal: identifying what an outcome means, interpreting a public display, and distinguishing disappointment from blame. They are not benchmark samples, model outputs, or members of the counterfactual evaluation. Contextual premises are supplied explicitly; the resulting interpretations are plausible rather than uniquely determined emotion labels.

Three relations behind a conflicting display

Constructed scene pairs

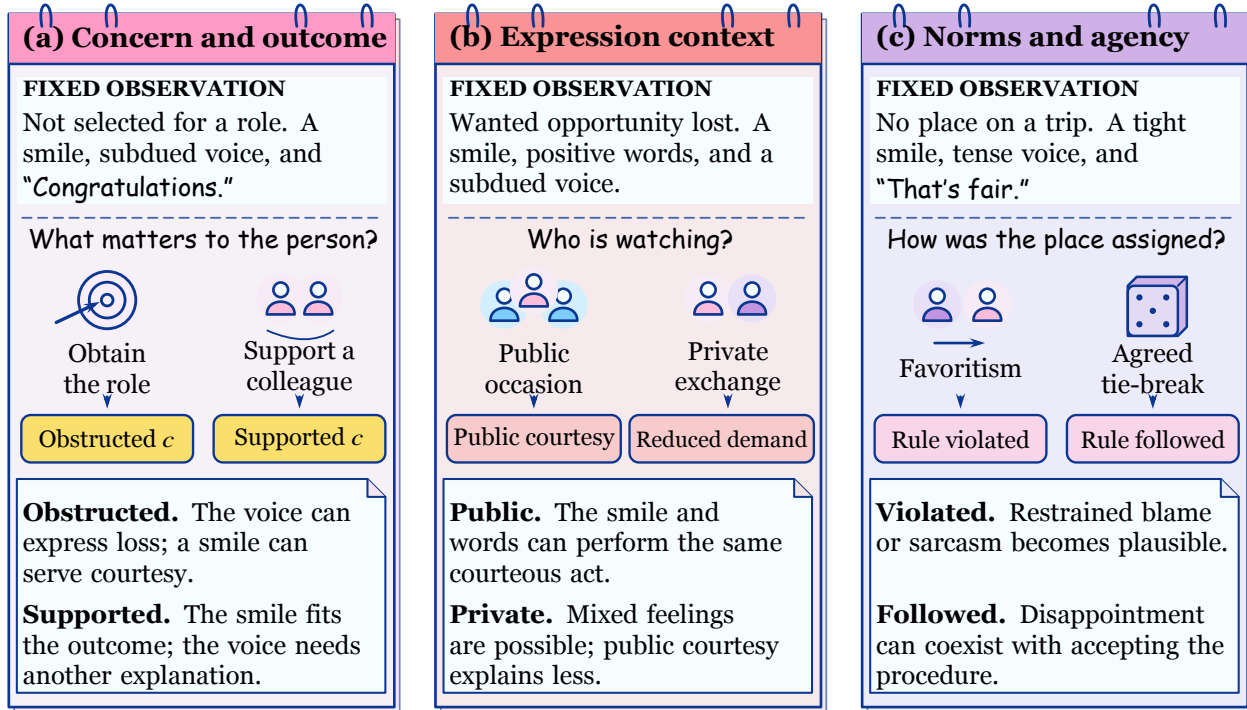

Supplied premises define coherent comparisons, not benchmark examples, unique emotion labels, or isolated causal effects.

Figure 6 : The context changes what a cue can mean. Each constructed pair holds the described surface observation fixed while changing the goal, audience, or allocation rule. The contrasts illustrate appraisal relations; they are not evaluated predictions.

B.1 The same outcome can support different concerns

A candidate is not selected for a role. They smile, say "Congratulations," and speak in a subdued voice. If they actively sought the position, the outcome obstructs their goal; courtesy can explain why the positive display coexists with disappointment. If they entered to support a colleague and preferred to avoid the responsibility, the same outcome supports their stated purpose. The subdued voice then needs another explanation, such as fatigue, if the context supports it. Goal congruence thus relates an event to a concern: "not selected" alone does not determine whether the outcome is unfavorable. Identifying the concern changes the coherent explanations of the cues even when the final emotion remains uncertain.

B.2 The same setback can be expressed under different social demands

After losing a wanted opportunity, a person smiles and says "I'm happy for them" in a subdued voice. In front of the selected colleague and an audience, the smile and words can perform the same courteous act. Their agreement need not outweigh the subdued prosody: two cues may share an expressive purpose. In a private conversation with a trusted friend, that public demand is reduced. The same words might express happiness for the colleague alongside personal disappointment, or an attempt at self-regulation. The setting changes the available explanations without choosing one automatically. Norm and regulation fields connect the setback to the conditions under which its response becomes observable.

B.3 Agency and norms distinguish disappointment from blame

A person denied a wanted place on a trip says "That's fair" with a tight smile and tense voice. If a manager bypassed an agreed procedure to favor a friend, sarcasm or restrained blame becomes plausible. If an agreed

random tie-break was followed, the sentence can acknowledge the rule while the voice expresses disappointment. Agency locates responsibility; norms supply the standard for evaluating the allocation. Neither replaces goal congruence: a fair procedure can still yield an unwanted outcome. This pair changes agency and norms together, illustrating a coherent scene contrast rather than a single-coordinate intervention.

C Cue diagnosticity and representational interpretation

C.1 Emotion expectation and cue diagnosticity

This section develops the log-odds decomposition in Equation 2. For two affective hypotheses y_1, y_0 , a cue event $E = e$, and appraisal $Z = z$, Bayes' rule gives, whenever the conditioning probabilities and denominators are positive,

$$\frac{P(y_1 | e, z)}{P(y_0 | e, z)} = \underbrace{\frac{P(y_1 | z)}{P(y_0 | z)}}_{\text{emotion expectation}} \underbrace{\frac{P(e | y_1, z)}{P(e | y_0, z)}}_{\text{cue diagnosticity}}. \quad (13)$$

The first factor concerns which emotion fits the event appraisal. The second concerns how much the cue distinguishes the two emotions within that appraisal. A blocked goal can make disappointment more plausible; a courtesy obligation can make a smile compatible with disappointment, changing the smile's diagnostic role. Improving the first factor alone would not demonstrate improved cue interpretation. These semantic roles do not map one-to-one onto the branches in Equation 6: Appraisal-conditioned weights can reflect both expected affect and changing cue diagnosticity, while the joint residual preserves evidence beyond the schema. Path interventions locate a computational dependency; identifying its semantic role additionally requires examining how cue use changes with appraisal.

Equation 13 is a conditional-probability identity, not a likelihood model fitted by VISTA. It assumes no independence between modalities and supplies no causal effect. Here z is a conceptual conditioning state; the predicted appraisal $\hat{z} = A(X)$ can itself depend on the cue, so its first factor is not an estimate made with that cue excluded. It adds no independent observation beyond X . The following analysis characterizes possible uses of this information, without assuming that VISTA implements a Bayes module.

How a fixed cue can cross the decision boundary. Write $b(z)$ for the log prior odds, $\ell(e, z)$ for the log likelihood ratio, and $L(e, z)$ for the log posterior odds. Equation 13 becomes

$$\begin{aligned} L(e, z) &= b(z) + \ell(e, z), \\ L(e, z') - L(e, z) &= b(z') - b(z) + \ell(e, z') - \ell(e, z). \end{aligned} \quad (14)$$

For binary zero-one decisions, y_1 is preferred exactly when $\ell(e, z) > -b(z)$. Thus even at a fixed emotional expectation, a change in cue likelihood can move the posterior across the boundary. Conversely, a prior change can move the decision while leaving cue diagnosticity fixed. The two mechanisms produce the same kind of final-label change but explain it differently.

Figure 7 gives exact arithmetic for a constructed example. Let y_1 be satisfaction, y_0 disappointment, and e a positive display. Two expression conditions, z_f (ordinary expression) and z_c (courtesy), share $P(y_1 | z) = 0.4$ and $P(e | y_1, z) = 0.8$. Set $P(e | y_0, z_f) = 0.2$ and $P(e | y_0, z_c) = 0.6$. Then

$$\begin{aligned} P(y_1 | e, z_f) &= \frac{0.4 \cdot 0.8}{0.4 \cdot 0.8 + 0.6 \cdot 0.2} = \frac{8}{11}, \\ P(y_1 | e, z_c) &= \frac{0.4 \cdot 0.8}{0.4 \cdot 0.8 + 0.6 \cdot 0.6} = \frac{8}{17}. \end{aligned} \quad (15)$$

The display remains more likely under satisfaction in both conditions, but its likelihood ratio decreases from 4 to 4/3. With prior odds 2/3, this is enough to change the preferred hypothesis. The example illustrates reduced diagnosticity rather than declaring a courteous display intrinsically negative.

The same cue can cross a decision boundary

Analytical example

e = positive display; $Y = 1$ satisfaction; $Y = 0$ disappointment.

$$\text{logit } P(Y = 1 | e, z) = b(z) + \ell(e, z), \quad b = \text{logit } P(Y = 1 | z), \quad \ell = \log \frac{P(e | 1, z)}{P(e | 0, z)}$$

(a) Fixed cue and prior

Ordinary expression z_f

$$P(e | Y = 1, z_f) = 0.8$$

$$P(e | Y = 0, z_f) = 0.2$$

$$\text{Ratio } 4 \quad P(Y = 1 | e, z_f) = 8/11 \approx 0.727$$

Courtesy-constrained expression z_c


$$P(e | Y = 1, z_c) = 0.8$$

$$P(e | Y = 0, z_c) = 0.6$$

$$\text{Ratio } 4/3 \quad P(Y = 1 | e, z_c) = 8/17 \approx 0.471$$

Same prior: $P(Y = 1 | z) = 0.4$.

(b) Changed diagnosticity

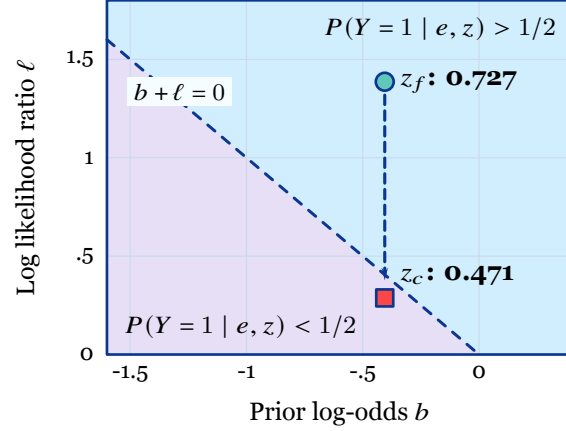

Courtesy makes a positive display compatible with disappointment. The example moves ℓ at fixed b ; a different concern can also move b . Specified probabilities, not fitted outputs.

Figure 7: A context-dependent cue in a constructed probability model. Both conditions have prior satisfaction probability 0.4 and positive-display likelihood 0.8 under satisfaction. The likelihood under disappointment changes from 0.2 to 0.6, giving posteriors 8/11 and 8/17. The log-odds plane separates emotional expectation from cue diagnosticity; its boundary is $b + \ell = 0$. These are exact analytical calculations, not model predictions or fitted probabilities.

A cue contrast removes a purely contextual prior shift. At a fixed appraisal, compare two cue events e_1, e_0 and define

$$T(z) = L(e_1, z) - L(e_0, z) = \ell(e_1, z) - \ell(e_0, z). \quad (16)$$

Subtracting again across appraisals gives $T(z') - T(z)$, the mixed contrast $\mathcal{I}$ in Equation 3, in which both prior terms cancel. Under this probability model, a nonzero contrast establishes that the relative contribution of the two cues depends on appraisal; a context-only additive prior shift cannot produce it. This is a sharper semantic question than whether the final prediction changes after replacing appraisal. In an empirical test, the cue and appraisal contrasts would also need a common log-odds response scale and coherent conditioning states. The reported aggregate interventions do not supply this four-condition cue comparison.

Additive scores and cue-appraisal interactions. The contrast also characterizes the restriction imposed by an additive score. On a product domain of cue and appraisal values with positive conditional probabilities, fix a reference pair (u_0, z_0) . Define

$$\begin{aligned} s(u) &= L(u, z_0) - L(u_0, z_0), & t(z) &= L(u_0, z), \\ J(u, z) &= L(u, z) - L(u_0, z) - L(u, z_0) + L(u_0, z_0). \end{aligned} \quad (17)$$

Direct substitution yields

$$L(u, z) = s(u) + t(z) + J(u, z). \quad (18)$$

Thus all anchored contrasts vanish if and only if the log-odds surface is additively separable. A nonzero J cannot be absorbed into any context-only offset while keeping the cue score context-independent. The need for an interaction concerns reproducing the conditional score: an additive model can still predict the same labels on some examples despite having different scores. The product-domain assumption matters because all four conditional states must be defined; unsupported cue-scene combinations do not supply an identifiable contrast.

This gives a design reason to expose evidence and appraisal jointly to a predictor. Equation 6 permits that dependence through appraisal-conditioned modality weights, while $D(H, \alpha)$ preserves the joint-evidence residual. The argument does not select a unique architecture or assign prior and diagnosticity terms to separate neural branches. With predicted appraisal, an empirical four-condition test would additionally distinguish recomputing $A(X)$ after a cue change from replacing its output while fixing the evidence.

The same constructed model makes this contrast explicit without introducing additional parameters. Take e_1 to be a positive display and e_0 its absence. Under ordinary expression, the two likelihood ratios are 4 and $(1 - 0.8)/(1 - 0.2) = 1/4$; under courtesy they are $4/3$ and $(1 - 0.8)/(1 - 0.6) = 1/2$. Consequently,

$$T(z_f) = \log 16, \quad T(z_c) = \log(8/3), \quad T(z_c) - T(z_f) = -\log 6. \quad (19)$$

Courtesy reduces the contrast between displaying and withholding a positive response, while the contextual prior remains fixed. These exact quantities concern the constructed distribution in Equation 15; they are not measured effects of VISTA’s interventions.

Agreement between modalities need not multiply the evidence. For two observed cues e_t, e_v , the exact joint likelihood ratio factors as

$$\frac{P(e_t, e_v \mid y_1, z)}{P(e_t, e_v \mid y_0, z)} = \frac{P(e_t \mid y_1, z)}{P(e_t \mid y_0, z)} \frac{P(e_v \mid e_t, y_1, z)}{P(e_v \mid e_t, y_0, z)}. \quad (20)$$

The second factor measures what the visual cue adds after the text cue is known. If a smile and a congratulation serve a shared courtesy act, they can be strongly dependent given the affective hypothesis and appraisal. Multiplying their marginal likelihood ratios can then double-count shared information. Equation 20 neither privileges text nor assumes a processing order: the chain rule can be written in either order. It explains why agreement among modalities and independent evidence for an emotion are different properties.

C.2 Uncertain and imperfect appraisal

A partially specified event can support several appraisal hypotheses. To make their use explicit, consider an analytical setting with residual scene evidence $W = w$, a cue $E = e$, and finitely many states z . Define the pre-cue weights $\rho_z = P(z \mid w)$ and posterior weights $\pi_z = P(z \mid e, w)$. The law of total probability gives

$$\begin{aligned} p(y \mid e, w) &= \sum_z K_z(y) \pi_z, & K_z(y) &= P(y \mid e, z, w), \\ \pi_z &= \frac{P(e \mid z, w) \rho_z}{\sum_{z'} P(e \mid z', w) \rho_{z'}}. \end{aligned} \quad (21)$$

Uncertainty is therefore averaged at the probability level, with weights conditioned on the evidence being explained. Averaging log odds, taking the most likely state first, or averaging with pre-cue weights generally gives another prediction.

For example, assign equal pre-cue weight to the two constructed states in Equation 15. Their display probabilities are 0.44 and 0.68, so observing the display changes the appraisal weights to $11/28$ and $17/28$. The resulting satisfaction probability is

$$\frac{11}{28} \frac{8}{11} + \frac{17}{28} \frac{8}{17} = \frac{4}{7} \simeq 0.5714. \quad (22)$$

An unweighted average of the two conditional posteriors would instead be approximately 0.5989. The calculation shows exactly where evidence about expression conditions enters a coherent uncertain interpretation. It does not prescribe a posterior representation or marginalization procedure for the implemented model.

Proposition 2 (Propagation of appraisal uncertainty). *In the finite-state analytical model of Equation 21, let $p = \sum_z \pi_z K_z$ and $\tilde{p} = \sum_z \tilde{\pi}_z \tilde{K}_z$ be two affect distributions. With total variation $\text{TV}(u, v) = \frac{1}{2} \sum_j |u_j - v_j|$, define*

$$\delta = \text{TV}(\pi, \tilde{\pi}), \quad \eta = \sum_z \tilde{\pi}_z \text{TV}(K_z, \tilde{K}_z). \quad (23)$$

Then $\text{TV}(p, \tilde{p}) \leq \delta + \eta$. If p has maximizing label y^ with margin $\gamma = p(y^*) - \max_{y \neq y^*} p(y)$, its decision is preserved whenever $\gamma > 2(\delta + \eta)$.*

Proof. Insert $\sum_z \tilde{\pi}_z K_z$ between the two mixtures and apply the triangle inequality. Since every K_z sums to one,

$$\begin{aligned} \text{TV}(p, \tilde{p}) &\leq \frac{1}{2} \sum_y \left| \sum_z (\pi_z - \tilde{\pi}_z) K_z(y) \right| + \sum_z \tilde{\pi}_z \text{TV}(K_z, \tilde{K}_z) \\ &\leq \frac{1}{2} \sum_z |\pi_z - \tilde{\pi}_z| + \eta = \delta + \eta. \end{aligned} \quad (24)$$

Each label probability changes by at most this total variation. Hence the gap between y^* and any competitor decreases by at most $2(\delta + \eta)$, proving the margin statement. $\square$

The two terms separate misallocating probability among scene interpretations from misreading the cues within an interpretation. When the kernels are shared, $\eta = 0$: uncertain appraisal can be harmless to a high-margin decision and consequential near a boundary. A wrong point estimate can also matter little if its induced affect distribution resembles that of the correct state. Field agreement alone does not determine either term. This links the semantic audit to recognition: the relevant question is which appraisal errors alter the competing affective explanations, not how many field names differ.

C.3 What a predicted representation can contribute

Because $\hat{Z} = A(X)$ is computed from the recognition input, it introduces no new observation beyond X . Its potential benefit is representational: the schema can retain distinctions omitted by a compressed evidence representation $H = F(X)$, or make existing distinctions easier for a learned decision rule to use. Proposition 1 makes the distinction precise for finite-label classification with zero-one loss. The continuous appraisal and affect-regression evaluations use their respective prediction losses and CCC metrics.

Assumptions and conditioning. The maps F and A are fixed when risks are evaluated, as after training. Conditional posteriors are understood up to probability-zero states; a fixed ordering of the finite labels resolves ties. The analysis imposes neither conditional independence among modalities nor a sufficiency assumption on H . In particular, it does not require the semantic appraisal to be correct: any additional deterministic representation obeys the Bayes-risk inequality, while its decision value depends on the distinctions it retains.

Proof of Proposition 1. Write $v_y(h, z) = P(Y = y \mid H = h, \hat{Z} = z)$ and select a coarse Bayes label $y_h \in \arg \max_y P(Y = y \mid H = h)$. The tower property gives $P(Y = y \mid H = h) = \mathbb{E}[v_y(h, \hat{Z}) \mid H = h]$. Since the maximum of finitely many coordinates is convex,

$$\max_y \mathbb{E}[v_y(h, \hat{Z}) \mid h] \leq \mathbb{E}[\max_y v_y(h, \hat{Z}) \mid h]. \quad (25)$$

Averaging and subtracting from one proves the inequality. More explicitly, the exact gain is

$$\Delta_{\text{repr}} = \mathbb{E} \left[\max_y v_y(H, \hat{Z}) - v_{y_H}(H, \hat{Z}) \right]. \quad (26)$$

The integrand is nonnegative. The gain vanishes exactly when y_H is also a maximizing label of the refined posterior almost surely. Equivalently, for almost every h , there is a label that maximizes the posteriors for almost every z under $\hat{Z} \mid H = h$. If such a common maximizer fails to exist on a set of h with positive probability, the conditional nonnegative gap is positive there and so is its expectation. This proves both the equality and strictness conditions, including posterior ties. Finally, X and $(X, A(X))$ generate the same information, so their conditional label distributions, and hence Bayes risks, agree. $\square$

For a concrete strict case, suppose $H = h_0$ is constant and two equiprobable appraisal states have class-1 probabilities 0.8 and 0.2. The coarse posterior is 0.5 and its Bayes error is 0.5; retaining the state gives error 0.2. If the probabilities are instead 0.6 and 0.9, both states favor class 1 and both representations have error 0.25. Posterior variation matters to classification exactly when it reveals a decision distinction. If $\hat{Z}$ is already determined by H , the common-maximizer condition holds automatically.

How much a collapsed appraisal distinction can cost. The strictness condition has a closed form for two binary-label appraisal states within a fixed evidence state $H = h$. Let $P(\hat{Z} = z_+ | h) = q \in (0, 1)$, and let $p_+ > 1/2 > p_-$ be the class-1 posteriors in the two states. Write their opposing decision margins as $m_+ = 2p_+ - 1 > 0$ and $m_- = 1 - 2p_- > 0$. The coarse posterior is $\bar{p} = qp_+ + (1 - q)p_-$, so the conditional Bayes-risk reduction is

$$\begin{aligned}\Delta(h) &= \min\{\bar{p}, 1 - \bar{p}\} - q(1 - p_+) - (1 - q)p_- \\ &= \min\{q m_+, (1 - q)m_-\}.\end{aligned}\tag{27}$$

If the coarse classifier selects class 1, its excess conditional error occurs in state z_- and equals $(1 - q)m_-$. If it selects class 0, the corresponding cost is qm_+ . The coarse Bayes rule chooses the smaller of these costs, which proves the formula and includes the case $\bar{p} = 1/2$. The gain is therefore controlled jointly by the frequency and decision margin of the distinction being collapsed. In this two-state setting, averaging $\Delta(h)$ over H recovers Equation 9; for $q = 1/2$, $p_+ = 0.8$, $p_- = 0.2$, the gain is 0.3. If both states share an optimal label, the gain is zero instead, as in the 0.6/0.9 example above. These are analytical distributions, not estimated appraisal posteriors.

From representation opportunity to trained risk. For any readout f_U , its excess zero-one risk has the posterior form

$$\epsilon_U = \mathbb{E} \left[\max_y P(Y = y | U) - P(Y = f_U(U) | U) \right] \geq 0.\tag{28}$$

Substituting $\mathcal{R}(f_U) = \mathcal{R}^*(U) + \epsilon_U$ for $U = H$ and $U = (H, \hat{Z})$ gives Equation 10. Hence the refined readout improves exactly when $\epsilon_{H, \hat{Z}} - \epsilon_H < \Delta_{\text{repr}}$. A positive representation opportunity can absorb some additional readout error; a sufficiently large increase in that error can instead offset it. Even when $\Delta_{\text{repr}} = 0$, an explicit schema can help a trained predictor if it makes the same Bayes decision easier to learn, reducing excess risk. When $\hat{Z}$ is a function of H , this latter route is the only one of the two available.

For the 0.8/0.2 construction, an optimal coarse readout has risk 0.5. A refined readout that ignores appraisal and always predicts class 1 has the same risk: its excess risk 0.3 exactly offsets the representation gain. A refined readout that selects the wrong label in each state has risk 0.8 and excess risk 0.6; the correct refined Bayes readout has risk 0.2 and excess risk zero. The same representation opportunity can therefore yield improvement, equality, or deterioration according to how the readout uses it.

Connection to the experimental comparisons. Generic semantics versus structured appraisal tests the choice of intermediate organization; cross-sample and within-emotion shuffling probe scene correspondence. These comparisons examine design consequences for learned behavior. Equation 10 compares readouts of fixed H and $(H, \hat{Z})$; separately trained common-backbone systems need not share the same learned F . Their aggregate accuracies therefore do not identify Δ_{repr} or either excess-risk term. Likewise, appraisal replacement changes the arbitration weights and does not by itself estimate the cue interaction in Equation 3. The theory specifies why joint conditioning and decision-relevant distinctions can matter; the experiments assess their benefit in the observed conflict settings.

D A guide to appraisal and scene interventions

The contrasts distinguish whether appraisal belongs to the current scene, whether the decision uses it, and how prediction responds when scene meaning changes.

D.1 Correspondence, connection, and content

For a fixed input, write

$$q_X(z) = D_\psi(H, \alpha(H, z)), \quad H = F_\theta(X).\tag{29}$$

The usual prediction evaluates this function at the predicted appraisal $\hat{z} = A_\theta(X)$. An alternative appraisal supplies a different reference for interpreting the same evidence. Table 7 organizes the reported contrast families by the dependency they target.

Table 7: Interpretive roles of the intervention families. Each row identifies a distinct question about the appraisal-conditioned decision pathway.

Contrast	Reference retained	Dependency examined
Cross-sample shuffle	The current input and recognition task	Does another sample’s appraisal supply the same useful interpretation as the scene’s own appraisal?
Within-emotion shuffle	The current input and the donor’s emotion identity	Does event-specific correspondence matter beyond the donor appraisal’s association with the same class?
Appraisal with no decision connection	Auxiliary appraisal supervision	Does appraisal improve prediction when its forward connection to the decision is removed?
Generic semantic bottleneck	An intermediate semantic route to the same recognition task	Does organizing content as event appraisal contribute beyond the supplied semantic alternative?
Rationale / internal-state corruption	One of verbal presentation and internal appraisal is retained while the other is altered	Is the observed dependence stronger on displayed explanation text or on the internal appraisal information?
Relevant change / irrelevant paraphrase	The pairing identifies what event meaning should change or remain invariant	Does the response follow a relevant change while remaining stable to a reformulation of the same meaning?

Within-emotion shuffling preserves a donor’s emotion identity while changing its relation to the current scene. Scenes that share an emotion can differ in their concerns, responsible agents, and expression conditions. Cross-sample shuffling relaxes even that class-level constraint. When strata use test gold labels, within-emotion shuffling is a gold-stratified offline mechanism diagnostic. Both replacements keep the checkpoint fixed and exchange the complete state. The connection ablation preserves auxiliary appraisal supervision while removing z from arbitration; the ablated model is retrained. It asks whether predicting appraisal is sufficient without using it to select modality weights. Stop-gradient retains the forward information and changes its learning path, so it is a distinct operation.

D.2 Scene edits and representation replacement

A scene edit can change both $H = F(X)$ and $A(X)$. Direct replacement of z in $q_X(z)$ holds the evidence representation fixed. A training-term ablation changes the learned system. These intervention channels examine different dependencies even when they concern the same field.

Scene coherence also matters. If the goal changes while the outcome stays fixed, goal congruence may need to change with it. If the setting becomes public, the norm and expression-regulation interpretation may change together. A single-coordinate substitution can be useful as a representation probe, while a coherent event edit may involve several related fields. The paired scenes in Appendix B illustrate the latter relation between event facts and appraisal.

D.3 Relevant response and label change are separate judgments

A relevant event change need not force a new final label. An appeal can increase perceived control while leaving disappointment plausible; a formal congratulation can change a smile’s diagnostic role without changing the strongest affective interpretation. Pair evaluation therefore distinguishes changes in appraisal, cue interpretation, and final prediction. Irrelevant paraphrases provide the complementary test: wording changes while the concern, outcome, and expression conditions are preserved.

D.4 How appraisal changes the weighted readout


The classification pathway makes the response to appraisal replacement explicit. Fix the checkpoint, every representation in H , and the availability mask b . Let $\mathcal{M}_b = \{m : b_m = 1\}$ be the nonempty set of available

modalities. For a reference appraisal z and replacement $\tilde{z}$, write $\alpha = \alpha(H, z)$, $\tilde{\alpha} = \alpha(H, \tilde{z})$, and $\Delta\alpha = \tilde{\alpha} - \alpha$. The branch logits $u_m = W_m h_m$ and residual $\rho = W_f h_{AVT}$ remain fixed. The two final logit vectors are


$$v(z) = \rho + \sum_{m \in \mathcal{M}_b} \alpha_m u_m, \quad v(\tilde{z}) = \rho + \sum_{m \in \mathcal{M}_b} \tilde{\alpha}_m u_m. \quad (30)$$

Figure 8 illustrates this comparison. Appraisal changes the allocation among the fixed branch logits; the shared residual cancels when taking their difference.

(a) Keep evidence, heads, and available modalities fixed

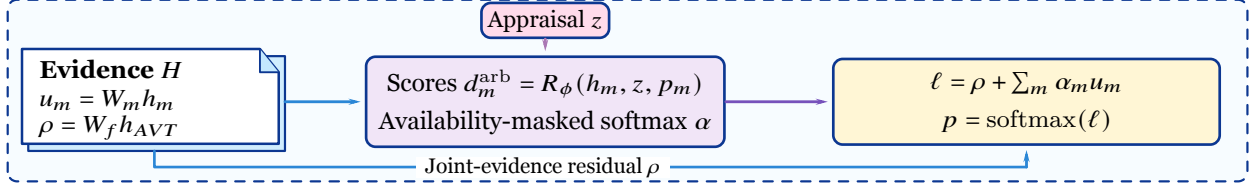

(b) Replace appraisal; compare the weights

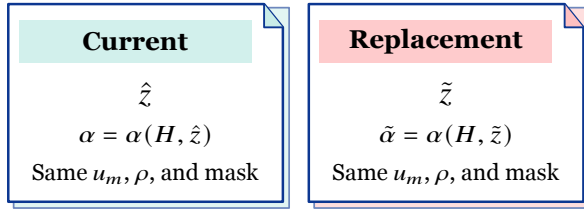

(c) Account for a class-pair margin

$$\begin{aligned} d_m^{y,y'} &= u_{m,y} - u_{m,y'}, \quad \Delta\alpha = \tilde{\alpha} - \alpha \\ M_{y,y'} &= \log(p_y/p_{y'}), \quad \sum_m \Delta\alpha_m = 0 \\ \Delta M_{y,y'} &= \sum_m \Delta\alpha_m d_m^{y,y'} \\ |\Delta M_{y,y'}| &\leq \frac{\max_m d_m^{y,y'} - \min_m d_m^{y,y'}}{2} \|\Delta\alpha\|_1 \end{aligned}$$

Exact identity and range bound; analytical quantities.

Appraisal reweighting acts on disagreement among modality margins. Identical margins cancel under a weight change; the joint residual cancels in the fixed-evidence contrast.

Figure 8: Appraisal replacement in the implemented weighted readout. With the checkpoint, all evidence representations H , and available modalities fixed, reference and replacement appraisals produce different weights over the same unimodal logits. The joint-evidence residual is shared. For any class pair, the resulting logit-margin change is the weight change dotted with the branch margins; its magnitude is bounded by their range times half the ℓ_1 weight change. The comparison describes how appraisal-dependent arbitration changes a class preference.

Exact margin change. For two classes y, y' , define each branch’s margin $d_m^{y,y'} = u_{m,y} - u_{m,y'}$ and the final margin $M_{y,y'}(z) = v_y(z) - v_{y'}(z)$. Since the final probabilities are a softmax, this also equals $\log[q_X(z)(y)/q_X(z)(y')]$. Subtraction in Equation 30 gives

$$M_{y,y'}(\tilde{z}) - M_{y,y'}(z) = \sum_{m \in \mathcal{M}_b} \Delta\alpha_m d_m^{y,y'}, \quad \sum_{m \in \mathcal{M}_b} \Delta\alpha_m = 0. \quad (31)$$

The second identity follows because both weight vectors sum to one. Thus, moving weight from a branch with a smaller y - y' margin to one with a larger margin increases the final preference for y relative to y' . Opposing branch margins give appraisal a concrete means of changing which interpretation is favored. If all available branches have the same margin for this class pair, every redistribution leaves that margin unchanged.

A bound governed by branch disagreement. Let $d_{\max} = \max_{m \in \mathcal{M}_b} d_m^{y,y'}$ and $d_{\min} = \min_{m \in \mathcal{M}_b} d_m^{y,y'}$. The zero-sum identity yields the range bound

$$|M_{y,y'}(\tilde{z}) - M_{y,y'}(z)| \leq \frac{d_{\max} - d_{\min}}{2} \|\Delta\alpha\|_1. \quad (32)$$

To prove it, subtract $c = (d_{\max} + d_{\min})/2$ inside the sum in Equation 31. This leaves the sum unchanged, and $|d_m^{y,y'} - c| \leq (d_{\max} - d_{\min})/2$. The triangle inequality completes the proof. Equivalently, the total positive

and negative weight changes each have mass $\|\Delta\alpha\|_1/2$. The bound is attained when that mass is transferred between branches at the two extreme margins, whenever the corresponding weights are feasible.

These identities connect arbitration to conflicting evidence: appraisal can affect a class comparison when available branches differ in their support for that comparison. The sign of the weighted change determines which class is favored; the bound does not prescribe that sign or guarantee higher accuracy. The shared residual affects the reference margin and hence whether a given change crosses a decision boundary. In a multiclass task, identifying the new predicted label requires comparing the final logits across all classes.

The fixed- H comparison isolates the implemented forward use of appraisal. Scene edits can also change branch logits and the residual, while retraining the connection ablation can change the whole predictor. Aggregate shuffle accuracies measure recognition after replacement; estimating Equation 31 per example additionally requires the paired internal weights and logits. External explanations are evaluated separately by holding H , z , and α fixed while rewriting the displayed text.

D.5 Semantic organization and evaluative references

The tested variants separate field names, represented content, scene correspondence, and decision access. Randomized field names retain 64.2% conflict accuracy, close to the complete system’s 64.5%; a generic semantic bottleneck gives 63.2%. The difference is associated with the organized appraisal content rather than the literal names of the fields. The goal and norm fields provide its evaluative reference, while expression regulation relates that reference to the observed display.

Goal congruence is defined relative to the person’s concern. Consequently, coherent appraisal edits can involve more than one field: a changed goal can change congruence, and a changed audience can change social relevance and regulation. The constructed scenes in Appendix B make these dependencies explicit. The empirical intervention categories in Appendix H.1 test directed responses to relevant changes, while unrelated reformulations test stability.

D.6 Grounding the interface in observed context

Context C contains information available at recognition time. The goal and setting in Figure 1 are supplied premises; the illustration establishes a conditional interpretation of the same cue. In data, grounding asks whether utterances, visible events, or conversation history support the predicted field.

The field audit evaluates 400 candidates, recording coverage, sampling consistency, and adequate evidence separately. A field can be consistent across teacher samples yet poorly grounded; label-visible supervision makes this distinction concrete in Appendix J. Partial-field masking retains supported relations without treating every field as observed. Likewise, a wrong goal, an unsupported regulation inference, and a perceptual failure belong to different error categories. The grouped error analysis in Appendix K connects these interpretive distinctions to the final recognition outcomes.

E Dataset roles and scoring conventions

Table 8: Public dataset context and the role of each evaluation. Dataset composition and the evaluation question are listed separately.

Dataset	Public context	Role in this paper
CA-MER	1,500 examples: 500 video-aligned, 500 audio-aligned, 500 consistent	Primary comparison of conflict and consistent performance
EmoMM	4,000 base examples from Chinese CH-SIMS v2.0 and English CMU-MOSI; multimodal and unimodal sentiment annotations	Alignment, conflict, missingness, and their combination
CH-SIMS v2.0	4,402 labeled and 10,161 unlabeled Chinese clips, with multimodal and unimodal sentiment information	Binary accuracy (Acc2) across four conflict groups
THERADIA	2,735 affect-annotated clips from interactions during cognitive exercises, with appraisal annotations	Frozen-representation appraisal probes and emotion-intensity regression
MELD	13,708 utterances across 1,433 dialogues; official train/development/test sizes of 9,989/1,109/2,610	Ordinary seven-class conversational emotion recognition

CA-MER and the evaluation interface. CA-MER supplies three annotation-defined groups, each with 500 examples: video-aligned conflict, audio-aligned conflict, and consistency (Han et al., 2025). The present experiment uses a normalized output interface for all compared systems. Conflict Avg is the macro average of the two conflict accuracies; consistent accuracy, overall accuracy, and invalid-output rate are reported separately. MoSEAR and CHASE are evaluated through this same interface (Table 15). These local scores are distinguished from their original papers’ open-vocabulary evaluation scores. The public benchmark’s semantic set-matching convention is illustrated below as metric context, not used to reinterpret the present accuracy columns.

Nine-class output parsing. The canonical vocabulary is **angry, happy, surprise, fear, sad, worry, neutral, doubt, and contempt**. The parser first strictly parses JSON and extracts a unique string-valued **final_label**. It then applies Unicode NFKC normalization, trims leading and trailing whitespace, lowercases the string, applies the fixed synonyms in Table 9, and checks the canonical vocabulary. A missing field, multiple answers, refusal, or unknown category is invalid and counts as an error in the main accuracy denominator. The output parser does not select an answer manually from explanatory prose.

Table 9: Fixed synonym normalization for the CA-MER interface. Canonical labels pass through unchanged. The mapping is applied after JSON extraction and string normalization.

Input	Canonical	Input	Canonical
anger	angry	sadness	sad
happiness	happy	worried	worry
surprised	surprise	doubtful	doubt
fearful; afraid	fear	contemptuous	contempt

E.1 Conflict definitions and error burden

Equation 1 separates the affect annotations used to define a conflict from the model whose recognition performance is evaluated. An eligible comparison concerns the same person, event, and temporal unit, with at least two available, affect-annotated modalities. Recognition-time context C can explain a disagreement, but is not a fourth independently annotated affect channel. In particular, an error made by VISTA does not determine membership in the conflict subset.

Scalar sentiment: a specified scale and strict cutoff. For modality-only ratings $s_i^m \in [-1, 1]$, the maximum pairwise gap has the equivalent range form

$$\delta_i = \max_{m < n} |s_i^m - s_i^n| = \max_m s_i^m - \min_m s_i^m, \quad \kappa_\tau(X_i) = \mathbf{1}\{\delta_i > \tau\}. \quad (33)$$

The strong-conflict screening rule in Wang & Wu (2025) fixes $\tau = 1$. It operates on the original rating scale supplied by separate modality annotations (Liu et al., 2022), and uses strict $>$: a gap exactly equal to 1 does not qualify. It should not be applied to arbitrary numeric category identifiers. The 661/4,402 count refers to the labeled CH-SIMS v2.0 corpus before severe cases are selected for the DiffEmo test. Table 11 keeps that corpus denominator separate from the test and error-audit denominators.

Categorical affect: agreement classes and benchmark eligibility. Let $\equiv$ denote the benchmark’s affect-label equivalence. A categorical pair has $d(q^m, q^n) = \mathbf{1}\{q^m \not\equiv q^n\}$, with $\tau = 0$. For our audit of the original CH-SIMS release (Yu et al., 2020), we use the fixed sentiment mapping in Zhang et al. (2021):

$$q(s) = \begin{cases} -1, & s < -0.1, \\ 0, & -0.1 \leq s \leq 0.1, \\ +1, & s > 0.1. \end{cases} \quad K_i = \mathbf{1}\{|\{q(s_i^t), q(s_i^a), q(s_i^v)\}| > 1\}. \quad (34)$$

All 2,281 released clips have complete modality ratings and unique video-clip identifier pairs; none is excluded. Summing K_i gives 1,117/2,281, or 48.97% (49.0% in the introduction). This is a fresh descriptive count from public annotations, independent of VISTA predictions. It includes 455 clips with both positive and negative modalities, and 662 additional clips whose disagreement involves neutral and one non-neutral polarity. Each clip is counted once, even if multiple modality pairs disagree. The release contains movie, television-series, and variety-show clips (Yu et al., 2020); the frequency characterizes this corpus. Table 10 gives pairwise and split-level counts. All counts follow Equation 34, comparing the original decimal annotations directly with the stated thresholds.

Table 10: Public-label audit of cross-modal disagreement on CH-SIMS. All rows use Equation 34, with a restricted modality pair for the three pairwise rows. Pairwise rows overlap and are not summed. The final three rows partition the full corpus by the released split.

Comparison / population	Disagreement	Eligible clips	Rate (%)
Any text-audio-video pair	1,117	2,281	48.97
Text-audio	800	2,281	35.07
Text-video	945	2,281	41.43
Audio-video	602	2,281	26.39
Any pair: train	676	1,368	49.42
Any pair: validation	231	456	50.66
Any pair: test	210	457	45.95

For CA-MER’s audio, video, and multimodal construction labels (q^a, q^v, q^{av}), the evaluated groups are

$$\begin{aligned} \mathcal{D}_v &= \{i : q_i^v \equiv q_i^{av}, q_i^a \not\equiv q_i^{av}\}, \\ \mathcal{D}_a &= \{i : q_i^a \equiv q_i^{av}, q_i^v \not\equiv q_i^{av}\}, \\ \mathcal{D}_0 &= \{i : q_i^a \equiv q_i^v \equiv q_i^{av}\}. \end{aligned} \quad (35)$$

Thus $\mathcal{D}_{\text{conf}} = \mathcal{D}_v \cup \mathcal{D}_a$ and $\mathcal{D}_{\text{cons}} = \mathcal{D}_0$. These are the public, annotator-checked partitions (Han et al., 2025). Cases with all three labels different lie outside this three-group evaluation. The fixed category membership is independent of the evaluated model’s confidence and output parser. “Aligned” describes agreement with the multimodal reference, not temporal synchronization.

Complementary definitions and ordered severity. EmoMM defines conflict when at least one available modality’s annotated polarity differs from the multimodal reference; missingness is a separate controlled

condition (Sun et al., 2026a). Writing pol for the polarity mapping, its reference-based predicate is $\kappa_{\text{ref}}(X) = \mathbf{1}\{\exists m : \text{pol}(q^m) \neq \text{pol}(q^{\text{joint}})\}$. It can flag a case even when unimodal polarities agree with each other but disagree with the joint reference. Polarity also differs from fine-grained affect categories: anger and sadness can be categorically distinct yet both negative. The CH-SIMS v2.0 Q1–Q4 results in Table 17 use conflict strength calculated from unimodal labels, with group boundaries fixed on the training set. Equation 33 documents the literature’s separate strong-conflict prevalence criterion; the label-visibility diagnostic additionally uses the reported threshold $C \geq 2$ (Appendix J). These named evaluation rules are not interchangeable.

Evidence across settings. In filtered Twitter image–text data, Pan & Meng (2024) report 42.5% inconsistency in MVSA-Single and 26.0% in MVSA-Multiple; their rule counts neutral versus positive/negative labels after opposite-polarity pairs have been removed. For user-generated video reviews, Du et al. (2025) report 63.69% agreement between textual and multimodal sentiment labels on UniC, hence 36.31% disagreement. These complementary observations establish substantial cross-modal variation across data settings; the comparison target, annotation granularity, and corpus sampling determine which frequency is measured.

Table 11: Quantitative motivation with explicit denominators. A public-label audit, published corpus analyses, and selected evaluation subsets answer different questions. Arithmetic gaps are calculated from the cited values.

Quantity	Reported evidence	Population and interpretation
Three-modal disagreement	48.97% (1,117/2,281)	Our public-label audit of CH-SIMS: at least two unimodal polarity labels differ; Table 10.
Image–text inconsistency	42.5% / 26.0%	Filtered MVSA-Single / Multiple; neutral versus positive or negative modality labels (Pan & Meng, 2024).
Text–joint disagreement	36.31%	UniC video reviews: complement of 63.69% text-only versus multimodal label agreement (Du et al., 2025).
Strong-conflict prevalence	15.0% (661/4,402)	Labeled CH-SIMS v2.0 clips screened at $\delta > 1$; corpus frequency (Wang & Wu, 2025).
Conflict difficulty	23.53 pp	MuT binary accuracy: 89.13% aligned, 65.60% conflict; selected DiffEmo tests, 173 examples per group (Wang & Wu, 2025).
Primary benchmark mix	1,000/1,500 conflict	CA-MER’s equal allocation across two conflict directions and consistency; evaluation design (Han et al., 2025).

Three distinct error questions. For a common evaluation population, let $E_i = \mathbf{1}\{\hat{y}_i \neq y_i\}$ denote a specified single-label prediction error and $K_i = \kappa_{\tau}(X_i)$. Conflict prevalence is $\pi = P(K = 1)$; conditional error rates are $e_1 = P(E = 1 \mid K = 1)$ and $e_0 = P(E = 1 \mid K = 0)$. Bayes’ rule gives the fraction of errors that occur on conflict inputs:

$$\rho = P(K = 1 \mid E = 1) = \frac{\pi e_1}{\pi e_1 + (1 - \pi)e_0}, \quad P(E = 1) > 0. \quad (36)$$

This is a concentration of errors within a common sampling frame. Causal attribution additionally asks which errors would change under a specified conflict-resolution intervention. An error-category audit supplies a different descriptive quantity. For an error group G and category k , write

$$\eta(k \mid G) = \frac{\#\{\text{reviewed errors in } G \text{ assigned category } k\}}{\#\{\text{reviewed errors in } G\}}. \quad (37)$$

The final error analysis instead conditions on three paired-model groups: errors made only by Emotion-SFT, errors made only by VISTA, and errors shared by both models. Table 31 preserves these separate denominators. A category share within one of these groups is neither a corpus conflict prevalence nor the fraction of all recognition errors caused by conflict.

Equation 36 requires prevalence and both conditional rates from the same population. The corpus screening frequency and severity-selected DiffEmo test rates therefore remain separate measurements.

Threshold sensitivity and a reproducible audit. For a fixed eligible sample and a common rating scale,

$$\hat{\pi}(\tau) = \frac{1}{N} \sum_{i=1}^N \mathbf{1}\{\delta_i > \tau\}, \quad \tau_1 < \tau_2 \implies \hat{\pi}(\tau_2) \leq \hat{\pi}(\tau_1). \quad (38)$$

A threshold changes which severity levels are counted; monotonic prevalence does not imply monotonic model error. A reproducible analysis stores sample IDs, independently obtained modality labels, missingness, rating normalization, the fixed comparison rule, prediction and reference labels, and any audit category. It reports the eligible count, conflict count, and error count together. Threshold selection uses annotation semantics or validation data and is fixed before examining test performance; a sensitivity curve can then report how prevalence and recognition change across cutoffs. These definitions specify the records needed to reproduce prevalence and error-burden estimates.

E.2 Public benchmark metrics and the normalized interface

Let $\mathcal{P}_i$ and $\mathcal{G}_i$ denote predicted and reference emotion sets after semantic matching in the public CA-MER protocol. With $t_i = |\mathcal{P}_i \cap \mathcal{G}_i|$, $p_i = |\mathcal{P}_i|$, and $g_i = |\mathcal{G}_i|$, its nonempty-set metrics are

$$a_i = \frac{t_i}{p_i}, \quad r_i = \frac{t_i}{g_i}, \quad b_i = \frac{a_i + r_i}{2}. \quad (39)$$

These quantities explain why a published open-vocabulary score and a local normalized-interface accuracy can differ. In particular, the public Acc is precision-like for multiple predicted labels. Figure 9 gives an exact constructed illustration. It contains no trained-model evaluation results.

(a) Read the matched label sets

Constructed example; after semantic matching

	Clip 1	Clip 2	Clip 3
	Gold G Pred. P	Gold G Pred. P	Gold G Pred. P
Sadness	☒	☐	☒
Disappointment	☒	☐	☐
Anger	☐	☐	☒
Happiness	☐	☒	☐
Fear	☐	☐	☒
Per clip	$ P \cap G = 1$	$ P \cap G = 1$	$ P \cap G = 2$
	$A_1 = 1/3, R_1 = 1/2$	$A_2 = 1, R_2 = 1$	$A_3 = 1, R_3 = 2/3$

(b) Choose the averaging unit

Same clips, different weights.

Sample macro	Equal clip weights	Pooled micro	Label totals
$\bar{A} = 7/9, \bar{R} = 13/18, (\bar{A} + \bar{R})/2 = 3/4$		$A_{\text{micro}} = 4/6, R_{\text{micro}} = 4/6$	

☒ Matched
 ☒ Missed reference
 ☒ Extra prediction
 ☐ Absent

Figure 9: A constructed illustration of the public set-matching metric. After semantic matching, three illustrative clips give equal-clip Acc 7/9, recall 13/18, and their arithmetic mean 3/4. Pooling memberships instead gives 2/3 for both metrics. This public-protocol example is separate from the normalized-interface experiments reported in this paper.

Equal-clip averages and pooled memberships assign different weights:

$$a_{\text{pool}} = \frac{\sum_i t_i}{\sum_i p_i} = \sum_i \frac{p_i}{\sum_j p_j} a_i, \quad r_{\text{pool}} = \frac{\sum_i t_i}{\sum_i g_i} = \sum_i \frac{g_i}{\sum_j g_j} r_i. \quad (40)$$

Accordingly, the present work compares MoSEAR, CHASE, and VISTA only under their shared normalized interface; their original published scores remain distinct comparison contexts.

Conflict and overall subset weights. CA-MER’s two conflict directions receive equal weight in Conflict Avg. Across the three equally sized groups,

$$A_{\text{conf}} = \frac{A_v + A_a}{2}, \quad A_{\text{all}} = \frac{A_v + A_a + A_{\text{cons}}}{3} = \frac{2}{3}A_{\text{conf}} + \frac{1}{3}A_{\text{cons}}. \quad (41)$$

For VISTA, the displayed subgroup means give $(61.0 + 68.0 + 74.2)/3 \approx 67.7\%$, matching the reported overall accuracy after rounding. The conflict gain and conflict specificity ask complementary questions: how much recognition improves under conflict, and how much of that improvement exceeds the consistent-condition gain.

E.3 Complementary evaluation settings

EmoMM: evaluation without benchmark-specific adaptation. EmoMM draws 2,000 Chinese and 2,000 English base examples and constructs conflict and missing-modality conditions (Sun et al., 2026a). Our evaluation follows the source-level test split with 800 sources; a source can generate multiple condition-specific inputs, so this source count is distinct from the input count for any condition. In our evaluation, all five core models transfer without EmoMM adaptation. Conflict-plus-missing inputs overlap with the missing condition, so the four-condition macro average is an equally weighted condition summary rather than full-sample accuracy. CHASE is listed separately because its original router used EmoMM supervision. EmoMM and the common training pool share CH-SIMS v2 source material. Freezing specifies the absence of EmoMM-specific updates; sample disjointness requires a separate source-identity comparison.

CH-SIMS v2.0: task adaptation and conflict severity. Trained models receive CH-SIMS-specific adaptation; Base is evaluated zero-shot. On complete text, audio, and video labels $y_i^T, y_i^A, y_i^V \in [-1, 1]$, conflict intensity is

$$\begin{aligned} C_i &= |y_i^T - y_i^A| + |y_i^T - y_i^V| + |y_i^A - y_i^V| \\ &= 2 \left(\max_{m \in \{T, A, V\}} y_i^m - \min_{m \in \{T, A, V\}} y_i^m \right) \in [0, 4]. \end{aligned} \quad (42)$$

Thus $C_i \geq 2$ means a unimodal range of at least 1. It measures label disagreement on the original scale; a missing modality label is not replaced by zero.

Our protocol specifies train/development/test sizes of 2,722/647/1,034.¹ The training split defines Q1–Q4 by lexicographically sorting the pair (C_i, h_i) , where h_i is a stable-ID hash used to break ties. With 2,722 complete training examples, the cut keys are at ranks 680, 1,361, and 2,041. For a test key $q = (C, h)$ and ordered cut keys b_1, b_2, b_3 , the groups are $q \leq b_1$, $b_1 < q \leq b_2$, $b_2 < q \leq b_3$, and $q > b_3$. Training-defined keys are applied unchanged to test inputs; rounding the conflict values alone would discard the tie rule.

Acc2 includes zero-valued reference labels and splits sentiment into ≤ 0 and > 0 . MAE uses the $[-1, 1]$ target scale. An invalid generated output counts as incorrect for Acc2 and receives an absolute-error penalty of 2 for MAE. Table 17 reports Acc2 for all four groups, overall Acc2, and Q4 MAE. Unlabeled public clips are not added to a labeled evaluation denominator.

THERADIA: representation and downstream use. The THERADIA WoZ split contains 1,110 training, 851 development, and 774 test video entries; field-valid sample counts depend on the annotation required by each task. For our appraisal probe, each backbone is frozen and receives the same four-dimensional linear readout. Novelty, intrinsic pleasantness, goal conduciveness, and coping are the available human appraisal dimensions (Fournier et al., 2025). Novelty is not identified with VISTA’s Expectation field, and these labels do not cover the entire seven-field schema. A separate regression predicts the intensities of ten named emotions to evaluate whether appraisal improves downstream prediction (Appendix I).

MELD: ordinary recognition. In our evaluation, trained models receive MELD-specific adaptation; Base uses zero-shot evaluation. Weighted-F1, macro-F1, and accuracy assess seven-class conversational emotion recognition (Poria et al., 2019). Table 32 and Appendix L report the aggregate and available class-specific results.

¹These supplied split sizes sum to 4,403, whereas the public corpus description gives 4,402 labeled clips. We retain the protocol split counts and public corpus size separately.

F Conflict specificity and directional improvement

Let $A_{\text{conf}}(M)$ and $A_{\text{cons}}(M)$ denote the conflict and consistent scores of model M under a shared evaluation. Relative to a comparator B , specificity has two equivalent readings:

$$\begin{aligned} S(\text{VISTA}, B) &= [A_{\text{conf}}(\text{VISTA}) - A_{\text{conf}}(B)] - [A_{\text{cons}}(\text{VISTA}) - A_{\text{cons}}(B)] \\ &= [A_{\text{cons}}(B) - A_{\text{conf}}(B)] - [A_{\text{cons}}(\text{VISTA}) - A_{\text{conf}}(\text{VISTA})]. \end{aligned} \quad (43)$$

It measures the excess gain on conflict inputs, or equivalently the contraction of the conflict deficit. Emotion-SFT has a $73.0 - 60.0 = 13.0$ pp deficit and VISTA a $74.2 - 64.5 = 9.7$ pp deficit, yielding $S = 3.3$ pp. Against Generic-CoT-SFT and the learned gate, VISTA’s conflict gains remain larger than its consistent gains (Table 12).

Table 12: CA-MER conflict specificity (pp). The same comparator is used for both gains. Contrasts are calculated before rounding the displayed accuracies.

Comparator	Δ_{conf}	Δ_{cons}	S
Emotion-SFT	4.5	1.2	3.3
Generic-CoT-SFT	3.0	0.2	2.8
Modality-Gate-SFT	2.5	0.2	2.3

F.1 Improvement in both conflict directions

Write $\Delta_v = A_v(\text{VISTA}) - A_v(B)$ and $\Delta_a = A_a(\text{VISTA}) - A_a(B)$. Their mean and half-difference are

$$\begin{aligned} \mu_B &= \frac{\Delta_v + \Delta_a}{2}, & d_B &= \frac{\Delta_v - \Delta_a}{2}, \\ (\Delta_v, \Delta_a) &= (\mu_B + d_B, \mu_B - d_B). \end{aligned} \quad (44)$$

Both directions improve precisely when $\mu_B > |d_B|$. Subtracting the same consistent gain gives

$$S_v = \Delta_v - \Delta_{\text{cons}}, \quad S_a = \Delta_a - \Delta_{\text{cons}}, \quad \frac{S_v + S_a}{2} = S. \quad (45)$$

Table 13 shows positive gains and positive directional specificity against all three trained controls. Thus the average conflict improvement is shared by both annotation-defined conflict directions.

Table 13: Directional control contrasts (pp). Calculated from the displayed subgroup means in Table 14. The final column is the reduction in the audio-minus-video disparity.

Comparator	Δ_v	Δ_a	Δ_{cons}	S_v	S_a	$2d_B$
Emotion-SFT	6.0	3.0	1.2	4.8	1.8	3.0
Generic-CoT-SFT	4.0	2.0	0.2	3.8	1.8	2.0
Modality-Gate-SFT	3.0	2.0	0.2	2.8	1.8	1.0

Specificity under representation interventions. The full system has $S = 3.3$ pp against Emotion-SFT. Cross-sample shuffling and cutting appraisal’s decision connection each give $S = 1.5$ pp; same-emotion shuffling gives $S = 2.7$ pp. The paired contrast identity

$$d_{\text{conf}}(V) - d_{\text{cons}}(V) = S(\text{VISTA}, B) - S(V, B), \quad d_u(V) = A_u(\text{VISTA}) - A_u(V), \quad (46)$$

connects the ablations to the conflict-specific gain. For cross-sample shuffling, the conflict and consistent decreases are 2.5 and 0.7 pp, giving a 1.8 pp loss of specificity. For same-emotion shuffling they are 0.8 and 0.2 pp, giving 0.6 pp. These descriptive contrasts assess how much the observed advantage depends on the

supplied appraisal state, without interpreting a share of accuracy gain as a fraction of causally attributable errors.

Specificity is reported together with absolute accuracies because a positive difference in gains alone need not imply improvement. The present comparisons have both. These aggregate scores and contrasts are descriptive; they do not establish statistical significance or formal non-inferiority.

G Complete recognition results and mechanism controls

G.1 CA-MER: all subsets and output validity

Table 14 supplies every subset, aggregate, and output-validity measurement. Conflict Avg gives equal weight to the visual and audio conflict directions. The main-text comparison emphasizes conflict specificity; the full table also reports overall accuracy and output validity for every model.

Table 14: Complete CA-MER results (%). All five core models use Qwen2.5-Omni-7B and the same normalized output interface. Conflict Avg is $(A_v + A_a)/2$.

Method	Visual	Audio	Conflict Avg	Consistent	Overall	Invalid
Base	49.0	60.0	54.5	68.0	59.0	0.5
Emotion-SFT	55.0	65.0	60.0	73.0	64.3	0.2
Generic-CoT-SFT	57.0	66.0	61.5	74.0	65.7	0.4
Modality-Gate-SFT	58.0	66.0	62.0	74.0	66.0	0.4
VISTA	61.0	68.0	64.5	74.2	67.7	0.7

Table 15: External methods under the normalized CA-MER interface. These reevaluations are separate from the methods’ originally published open-vocabulary scores. Differences are in pp.

Method	Conflict Avg (%)	VISTA gain
MoSEAR	61.5	3.0
CHASE	61.0	3.5
VISTA	64.5	—

G.2 EmoMM: conflict, missingness, and their intersection

VISTA transfers to EmoMM without additional adaptation. Relative to Generic-CoT-SFT, its gains are 4.0 pp under conflict and 4.9 pp under conflict plus missingness. The consistent-to-conflict decrease is 4.3 pp for VISTA, compared with 7.5, 7.5, and 6.6 pp for Emotion-SFT, Generic-CoT-SFT, and Modality-Gate-SFT. Table 16 also includes CHASE’s protocol reevaluation. Its original router used EmoMM supervision; it attains higher accuracy than VISTA under missingness (49.3 versus 46.8) and combined conflict and missingness (44.5 versus 43.5). This comparison distinguishes conflict transfer from the additional challenge of recovering absent evidence.

G.3 CH-SIMS v2.0: increasing conflict intensity

The adapted VISTA model gains 0.2, 0.7, 2.0, and 4.5 pp over Emotion-SFT from Q1 to Q4. The highest-conflict group’s MAE falls from 0.365 to 0.315. Table 17 includes zero-shot Base, the complete quartile profile, overall binary accuracy, and Q4 regression error.

A common trend under all three controls. Define $g_q(B) = A_q(\text{VISTA}) - A_q(B)$. The endpoint contrast and the descriptive least-squares slope across ordered group indices are

$$E_B = g_4(B) - g_1(B), \quad \beta_B = \frac{\sum_{q=1}^4 (q - 2.5)g_q(B)}{5}. \quad (47)$$

Table 16: Complete EmoMM accuracy (%). The five core models use frozen transfer. CHASE is a separate protocol reevaluation with prior EmoMM supervision. Macro Avg weights conditions equally; overlapping missingness conditions prevent interpreting it as full-sample overall accuracy.

Method	Consistent	Conflict	Missing	Conflict + missing	Macro Avg
Base	52.1	46.5	43.3	38.0	45.0
Emotion-SFT	55.0	47.5	44.0	38.0	46.1
Generic-CoT-SFT	55.5	48.0	44.2	38.6	46.6
Modality-Gate-SFT	55.6	49.0	45.1	40.0	47.4
VISTA	56.3	52.0	46.8	43.5	49.7
CHASE (reevaluated)	53.2	51.3	49.3	44.5	49.6

Table 17: CH-SIMS v2.0 by conflict strength. Q1–Q4 use increasing conflict intensity with boundaries set on training data. Acc2 is binary accuracy in percent; Q4 MAE retains its original scale. Base is zero-shot; the four trained methods receive task adaptation.

Method	Q1	Q2	Q3	Q4	Overall Acc2	Q4 MAE ↓
Base	87.5	82.5	77.5	70.0	79.4	0.460
Emotion-SFT	90.0	86.5	82.5	77.0	84.0	0.365
Generic-CoT-SFT	89.8	86.7	82.8	77.8	84.3	0.355
Modality-Gate-SFT	89.7	86.8	83.5	79.2	84.8	0.337
VISTA	90.2	87.2	84.5	81.5	85.9	0.315

All three comparisons have their largest gain in Q4 and a positive endpoint contrast (Table 18); the gain over Emotion-SFT increases at every group. Group indices express severity order, not equal measured increments of conflict; these slopes summarize the four aggregate gains rather than an individual-level causal response.

Table 18: CH-SIMS gains calculated from Table 17. Gains and endpoint contrasts are in pp; slopes are in pp per group index.

Comparator	g_1	g_2	g_3	g_4	E_B	β_B
Emotion-SFT	0.2	0.7	2.0	4.5	4.3	1.42
Generic-CoT-SFT	0.4	0.5	1.7	3.7	3.3	1.11
Modality-Gate-SFT	0.5	0.4	1.0	2.3	1.8	0.60

G.4 The complete appraisal and training ablations

Table 19 separates the content of appraisal, its connection to the decision, and its supervision. Cross-sample shuffling reduces conflict accuracy by 2.5 pp, whereas shuffling within the same emotion class reduces it by 0.8 pp. Randomizing field names changes the score by 0.3 pp; replacing the representation with a generic semantic bottleneck changes it by 1.3 pp. The combination favors informative scene-specific content and decision access over the names of the fields alone.

Changing the external explanation while holding the internal state fixed leaves the reported accuracies unchanged. Corrupting the internal appraisal while retaining the explanation reproduces the cross-sample-shuffle scores. VISTA uses $\lambda_{cf} = 0$: its counterfactual evaluation is therefore a behavioral test, not an ablation of an active counterfactual training loss. Removing appraisal, conflict, and reliability supervision gives conflict reductions of 1.3, 1.0, and 1.5 pp, respectively.

Native modality weights. VISTA’s visual weight exceeds its audio weight on visual-aligned conflict, and the ordering reverses on audio-aligned conflict (Table 20). The gate’s corresponding dominant weights are 0.37 and 0.43. These subset means describe conditional weighting behavior. They are distinct from the shared masking diagnostic α_{diag} used for the interventions in Appendix H.

Table 19: Complete CA-MER mechanism controls. Accuracy is in percent; changes and specificity are in pp. S is always relative to Emotion-SFT. “Auxiliary only” retains appraisal supervision but cuts its decision connection. The $\lambda_{cf} = 0$ row repeats the full configuration.

Condition	Conflict	Consistent	Δ_{conf}	S
Full VISTA	64.5	74.2	0.0	3.3
Within-emotion appraisal shuffle	63.7	74.0	−0.8	2.7
Cross-sample appraisal shuffle	62.0	73.5	−2.5	1.5
Field-name randomization	64.2	74.2	−0.3	3.0
Auxiliary only; decision connection cut	62.5	74.0	−2.0	1.5
No expression regulation r	63.6	74.0	−0.9	2.6
Generic semantic bottleneck	63.2	74.1	−1.3	2.1
External explanation changed; internal z fixed	64.5	74.2	0.0	3.3
Internal z corrupted; external explanation retained	62.0	73.5	−2.5	1.5
No appraisal supervision ($\lambda_z = 0$)	63.2	74.0	−1.3	2.2
No conflict supervision ($\lambda_c = 0$)	63.5	74.1	−1.0	2.4
No reliability supervision ($\lambda_a = 0$)	63.0	74.0	−1.5	2.0
$\lambda_{cf} = 0$ (full configuration)	64.5	74.2	0.0	3.3

Table 20: Reported native modality weights α . Dashes mark gate weights for which no separate value is available; these entries are not inferred from normalization. These are weights on their original scale.

Method	Conflict subset	Visual weight	Audio weight
Modality-Gate-SFT	Visual-aligned	0.37	—
Modality-Gate-SFT	Audio-aligned	—	0.43
VISTA	Visual-aligned	0.42	0.30
VISTA	Audio-aligned	0.25	0.47

G.5 Frozen-backbone prompts and explanation quality

All four prompting conditions hold the backbone frozen. Appraisal prompting improves Conflict Avg from 54.5 to 56.0% relative to direct prediction, while generic conflict CoT reaches 56.4%. Appraisal prompting also produces the longest outputs and the largest invalid-output rate (Table 21). Thus the trained system’s improvement is not explained by a superior appraisal prompt alone.


Table 21: Complete frozen-model prompt comparison. Recognition and invalid-output rates are percentages; output length is the mean token count.

Prompt	Conflict Avg	Consistent	Invalid	Output tokens
Direct	54.5	68.0	0.5	8
Modality decomposition	55.8	69.0	0.8	210
Generic conflict CoT	56.4	69.0	1.0	290
Appraisal prompt	56.0	68.5	1.8	440

The independent second-pass audit evaluates explanations after the emotion label has been locked. Grounded-appraisal rates are 52.0% for Direct and 60.0% for Appraisal prompt. This measures explanation quality under the audit protocol, separately from the first-pass recognition scores. More grounded explanations do not by themselves imply that the corresponding appraisal prompt has higher conflict accuracy than every alternative.

(a) Frozen prompts: recognition and generation

Only the prompt changes; backbone weights remain fixed

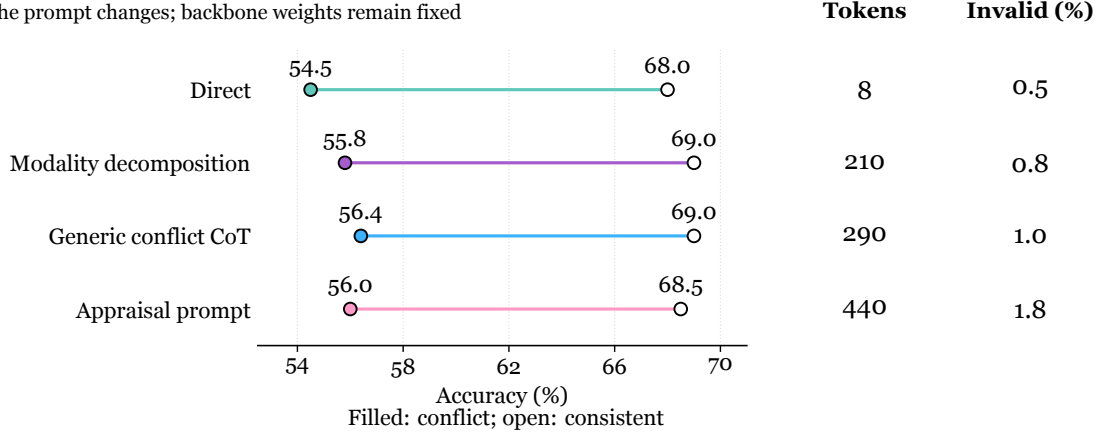

(b) Independent explanation audit

Grounded appraisal after the emotion label is locked



Figure 10 : What prompting supplies before training. (a) Conflict and consistent accuracy of four frozen-backbone prompts, with output length and invalid-output rates. (b) Grounded-appraisal rates of 52.0% for Direct and 60.0% for Appraisal prompt in a separate explanation audit. That audit locks the predicted label before eliciting the second-pass explanation.

H Counterfactual response and irrelevant rewrites

H.1 Two paired tests with different success criteria

The evaluation contains 150 valid intervention pairs and a separate set of 150 irrelevant-rewrite pairs. A valid intervention changes information relevant to the affective interpretation; its direction score asks whether the target-category probability moves in the annotated direction. An irrelevant rewrite tests whether the predicted label remains unchanged. These criteria distinguish sensitivity to a meaningful change from stability under a semantically irrelevant one. The paired-input test changes X and can therefore change both evidence H and appraisal z ; a state-only replacement with fixed X is a separate intervention.

For a fixed set of paired predictions with target category y_i^* , paired inputs (X_i, X'_i) , and annotated direction $d_i \in \{-1, +1\}$, the direction criterion is

$$\text{Dir} = \frac{1}{N} \sum_{i=1}^N \mathbf{1}\{d_i [p(y_i^* | X'_i) - p(y_i^* | X_i)] > 0\}. \quad (48)$$

The target category and direction are fixed before either prediction is scored. A zero directional change is a failure, and invalid model outputs remain failures in the fixed direction-score denominator. A label can remain the most likely class while its probability moves in the appropriate direction. The valid-intervention label-change rate,

$$\text{Change} = \frac{1}{N} \sum_i \mathbf{1}\{\hat{y}(X'_i) \neq \hat{y}(X_i)\}, \quad (49)$$

is therefore a separate measurement, not a substitute for direction compliance. Irrelevant-rewrite stability uses the complementary equality criterion on its own pair set. The signed probability difference averages $d_i [p(y_i^* | X'_i) - p(y_i^* | X_i)]$. The signed log-odds difference uses the same target and direction, with probabilities clipped to $[10^{-6}, 1 - 10^{-6}]$ for numerical stability. These continuous summaries use pairs with defined probabilities; their valid count is distinct from the fixed binary-score denominator.

Tables 22 and 23 retain the source-reported aggregate precision. These aggregate percentages are not converted into integer per-run counts or reconstructed uncertainty estimates.

Table 22: Complete paired intervention results. Direction, label change, and rewrite stability are percentages. Probability and log-odds differences retain their original scales. Valid interventions and irrelevant rewrites each contain 150 pairs.

Method	Direction	Label change	Δp	$\Delta \log\text{-odds}$	Rewrite stability
Emotion-SFT	62.0	24.0	0.050	0.201	91.0
Generic-CoT-SFT	66.0	28.0	0.070	0.281	90.0
Modality-Gate-SFT	63.0	25.0	0.055	0.221	91.0
VISTA	75.0	36.0	0.120	0.484	92.0

The reported paired measurements combine sensitivity to meaningful changes with stability under irrelevant rewrites. VISTA’s target-probability and log-odds differences are 0.120 and 0.484, compared with 0.070 and 0.281 for Generic-CoT-SFT; its valid-intervention label-change rate is 36.0% and irrelevant-rewrite stability is 92.0%. The final training configuration does not use a counterfactual loss ($\lambda_{\text{cf}} = 0$).

H.2 Intervention dimensions and diagnostic weighting

The six intervention types are goal/concern (g), goal congruence (c), Expectation (e), coping/control (k), norm/social relevance (n), and expression regulation (r), each containing 25 pairs. Table 23 gives the four available type-specific direction-compliance rates; goal/concern and Expectation have no separately reported rates. This field set differs from the six-field mutual-information diagnostic, which includes agency and excludes free-text goal/concern.

Table 23: Available VISTA intervention-type results. Each of the six types has 25 pairs; type-specific percentages are available for the four listed types. The remaining two types contribute to the 150-pair aggregate but have no separately reported rates.

Intervention type	Pairs	Direction compliance (%)
Goal congruence	25	84.0
Expression regulation	25	81.0
Coping / control	25	68.0
Social norm	25	69.0

A common masking diagnostic. Fix the original input’s predicted class $y_0 = \hat{y}(X)$ and measure the positive probability drop after masking modality m :

$$\delta_m = \max\{0, p(y_0 | X) - p(y_0 | X_{\setminus m})\}, \quad \alpha_{\text{diag}, m} = \frac{\delta_m + 0.01}{\sum_{j \in \{V, A, T\}} \delta_j + 0.03}. \quad (50)$$

Video masking retains the audio track; audio masking retains text; text masking removes both the transcript and dialogue history. Each masked input is evaluated by a fresh forward pass. With all three modalities included, zero drops yield uniform diagnostic weights of $1/3$. For a diagnostic over M available modalities, the smoothing total is $0.01M$.

The target-modality change in this diagnostic is $+0.040$ for VISTA, compared with the reported control range of $+0.015$ – $+0.020$. These diagnostic weights are distinct from the model-native α in Table 20: they summarize output changes across fresh masked-input evaluations and can reflect the fusion residual, the arbitration branch, and their interactions. They describe perturbation response without assigning the full prediction’s causal contribution to an individual branch.

I Appraisal representation and downstream prediction

I.1 A shared linear probe on frozen representations

THERADIA supplies human appraisal annotations for four dimensions. Every core model freezes its backbone and trains the same Linear(3584, 4) + sigmoid probe. The probe has $3584 \times 4 + 4 = 14,340$ parameters, so probe capacity is fixed across the five models. The evaluation asks how well those appraisal judgments can be read from each representation, using the concordance correlation coefficient (CCC).

The four targets are novelty, intrinsic pleasantness, goal conduciveness, and coping. Features are standardized with training-set statistics alone. Probe training minimizes mean squared error with learning rate 5×10^{-4} , batch size 64, at most 50 epochs, and early-stopping patience 5; the checkpoint is selected by development-set macro CCC. The backbone remains frozen throughout this probe fit.

Table 24: THERADIA appraisal readout: CCC by dimension. All models use the same four-output linear probe on a frozen backbone. Macro CCC averages the four dimensions.

Method	Novelty	Pleasantness	Goal	Coping	Macro CCC
Base	0.400	0.470	0.490	0.520	0.470
Emotion-SFT	0.440	0.500	0.530	0.550	0.505
Generic-CoT-SFT	0.470	0.530	0.560	0.570	0.533
Modality-Gate-SFT	0.470	0.530	0.560	0.580	0.535
VISTA	0.540	0.590	0.620	0.650	0.600

VISTA raises macro CCC by 0.095 over Emotion-SFT and improves all four dimensions. Its aggregate MAE, RMSE, Pearson correlation, and Spearman correlation are 0.086, 0.111, 0.658, and 0.625, respectively (Table 25). Novelty and Expectation remain different constructs: the four-dimensional probe evaluates the available human dimensions, not complete seven-field correctness.

Table 25: Aggregate VISTA appraisal-probe metrics on THERADIA. All quantities retain their native numerical scale.

Macro CCC $\uparrow$	MAE $\downarrow$	RMSE $\downarrow$	Pearson $\uparrow$	Spearman $\uparrow$
0.600	0.086	0.111	0.658	0.625

I.2 Using appraisal to predict ten emotion intensities

The downstream task predicts intensities for ten named emotions: annoyed, anxious, confident, desperate, frustrated, happy, interested, relaxed, satisfied, and surprised. These are the THERADIA core emotion labels, rather than general core-affect axes. Auxiliary appraisal supervision alone gives 0.415 macro CCC, compared with 0.390 without appraisal. Connecting model-generated appraisal to the decision raises CCC to 0.450, a further 0.035 improvement over auxiliary-only training and 0.060 over no appraisal. Human appraisal supplies privileged information and reaches 0.480 (Table 26). The four-output probe and ten-output downstream task have distinct targets; the probe’s architecture and fitting schedule describe the appraisal-readout experiment.

Table 26: THERADIA downstream emotion-intensity regression. The task predicts ten named emotion intensities; the metric is macro CCC. Human appraisal is an oracle condition, separate from inference using model-generated appraisal.

Appraisal condition	Macro CCC	Gain over none
No appraisal	0.390	0.000
Auxiliary only; decision connection cut	0.415	0.025
Model-generated appraisal	0.450	0.060
Human appraisal (oracle)	0.480	0.090

(a) Four human-annotated appraisal dimensions

Frozen representations; identical Linear(3584, 4) + sigmoid probes

	Novelty	Pleasantness	Goal	Coping	Macro CCC
Base	0.400	0.470	0.490	0.520	0.470
Emotion-SFT	0.440	0.500	0.530	0.550	0.505
Generic-CoT	0.470	0.530	0.560	0.570	0.533
Modality gate	0.470	0.530	0.560	0.580	0.535
VISTA	0.540	0.590	0.620	0.650	0.600

VISTA: MAE 0.086 · RMSE 0.111 · Pearson 0.658 · Spearman 0.625

CCC color scale: 0.35 (light) to 0.65 (dark). Novelty is distinct from expectation.

(b) Appraisal in downstream affect regression

Ten emotion-label intensities; macro CCC

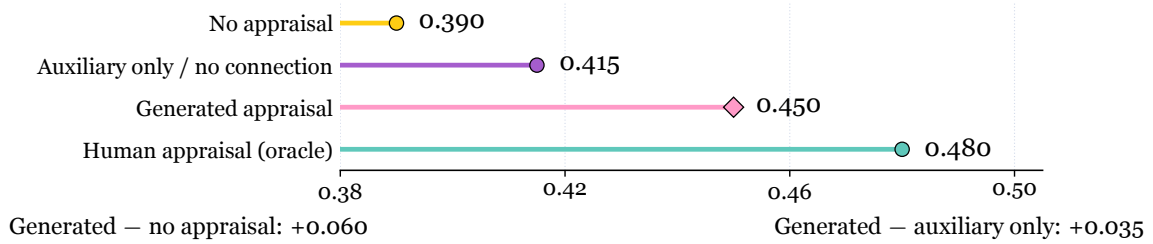


Figure 11 : From readable appraisal to useful appraisal. (a) Five frozen backbone representations under a common four-dimensional linear probe, evaluated by dimension-wise and macro CCC. (b) Downstream regression of ten emotion intensities under four appraisal conditions. Model-generated appraisal gives 0.450 macro CCC, versus 0.415 with auxiliary supervision alone; human appraisal is a privileged test-time reference.

The probe and downstream experiment serve different purposes. The former measures the readability of human appraisal dimensions at matched probe capacity; the latter tests the usefulness of an appraisal input to affect prediction. Together they support a representation that is both aligned with the available appraisal labels and useful when connected to the downstream predictor. The remaining 0.030 CCC gap quantifies the distance from generated appraisal to the privileged human-appraisal condition.

J Supervision construction, field quality, and label visibility

J.1 Teacher generation and field masks

One Qwen2.5-Omni-7B teacher generates three samples per input with temperature 0.7, top- p 0.9, a maximum of 512 output tokens, and seeds 101, 102, and 103. These repeated samples measure sampling consistency within the same teacher. The fixed template has SHA256

```
c2812f36f754d70875bd69c25534eab6
97d57c9f88c34d486b4d6d74c432caa3
```

Each field stores its value, confidence, evidence, and validity mask separately. Missing values remain null; confidence does not automatically become a supervision weight. Agency value **unknown** can appear in an output but is masked for supervision. The four binary social-relevance components—politeness, identity, status, and relationship—each have their own mask. A component receives **false** when evidence supports a negative judgment; absent evidence leaves it missing. This representation supports partial supervision at the level of individual fields and social-relevance components.

J.2 From candidate pool to retained training set

The candidate pool contains 10,256 examples. The final common training set retains 8,000: 2,123 from CH-SIMS v2.0, 866 from THERADIA, and 5,011 from MELD. The retention process yields 2,872 automatically accepted examples, 1,231 accepted after human adjudication, and 3,897 retained with partial-field masking; 2,256 candidates are rejected (Table 27). These counts describe the complete candidate disposition. The separate 400-example field audit below is not the count of all human-adjudicated examples.

Table 27: Complete pseudo-appraisal data accounting. The left block partitions all candidates; the right block partitions the retained training set by source. Partial masking retains an example while masking unsupported fields.

Candidate disposition	Count	Retained source	Count
Automatically accepted	2,872	CH-SIMS v2.0	2,123
Accepted after human adjudication	1,231	THERADIA	866
Retained with partial-field masking	3,897	MELD	5,011
Rejected	2,256		
All candidates	10,256	All retained	8,000

J.3 Seven-field audit on 400 candidates

The audit samples 106 CH-SIMS, 43 THERADIA, and 251 MELD candidates, covering conflict, ambiguity, and consistency strata within each source. Two raters independently assess the candidates, with method names and teacher conditions blinded; a third rater adjudicates disagreements. Human agreement refers to the two original judgments before adjudication, whereas teacher sampling consistency concerns the three generated samples.

Coverage uses all 400 audited candidates as its denominator: for example, goal congruence is valid for 296 examples, giving $296/400 = 74.0\%$. Fields can coexist within a candidate, so their valid counts are not additive. Sampling consistency uses the candidates with sufficiently many valid samples for that field as its denominator. For goal text g , semantic comparison uses a frozen goal/concern categorization. Table 28 summarizes quality at the field level. The social-norm row records 136 available fields out of 400 candidates (34.0% coverage); each of its four binary components retains its own validity mask, so this aggregate is distinct from component-specific coverage.


Grounding judgments have three outcomes: *yes* for explicit input support, *no* for unsupported or contradicted content, and *uncertain* when the evidence does not settle the judgment. The grounded proportion is the number of *yes* judgments divided by all non-missing generated fields; *uncertain* remains in this denominator and is a separate judgment category. Agency and goal congruence have grounded proportions of 84.0% and 81.0%; expectation, social norm, and expression regulation have coverage of 43.0%, 34.0%, and 43.0%. The schema therefore combines broadly supported event judgments with more selectively available contextual ones.

Table 28: Seven-field audit. Coverage is the valid count divided by 400 candidates. Sampling consistency and grounded proportion are percentages with their field-specific denominators. Multiple fields may be valid in the same example; n retains the reported field-level aggregate.

Field	Valid N	Coverage	Sampling consistency	Grounded
Goal / concern g	240	60.0	80.0	76.0
Goal congruence c	296	74.0	85.0	81.0
Expectation e	172	43.0	76.0	67.0
Agency a	260	65.0	86.0	84.0
Coping / control k	192	48.0	81.0	73.0
Social norm n	136	34.0	78.0	68.0
Expression regulation r	172	43.0	80.0	72.0

Coverage and utility are distinct. Expression regulation is valid in 43.0% of audited candidates, while removing the field reduces conflict accuracy by 0.9 pp in the mechanism comparison. Partial-field masking preserves examples without forcing every field to be inferred from insufficient evidence.

(a) Field audit: coverage and semantic support

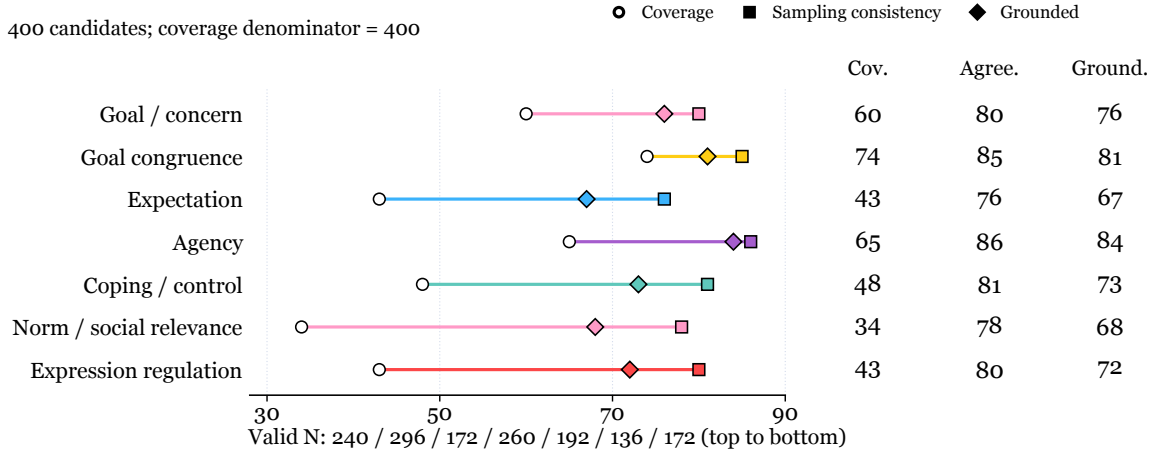

(b) Candidate selection and retained sources



(c) Isolated label-visibility diagnostic

	Field agree.	Grounded	Copying	MI (bits)	Dev Acc2	Conflict Acc2
Label-blind	0.53	73.0	3.0	0.120	84.5	80.5
Label-visible	0.65	67.0	21.0	0.240	85.0	81.2

No ground-truth labels at evaluation; conflict subset: $C \geq 2$.

Figure 12: Supervision from selection to decision quality. (a) Coverage, sampling consistency, grounded proportion, and valid count for all seven fields in the 400-candidate audit. (b) Disposition of all 10,256 candidates and dataset sources of the 8,000 retained examples. (c) Label-blind versus label-visible teacher diagnostics, with the latter trained in an isolated copy. Percentages, field-consistency scores, and mutual information retain their distinct units.

J.4 An isolated label-visibility diagnostic

The main pipeline generates appraisal without revealing the true emotion label to the teacher. A label-visible comparison uses an isolated training copy. Both are evaluated on CH-SIMS development examples without supplying true labels at evaluation, and the conflict subset uses $C \geq 2$.

Label-copy rate counts field outputs containing a predefined target-label term or synonym, divided by all auditable outputs; quotations from the input evidence are recorded separately. Grounding, copying, and sampling consistency describe complementary properties of generated supervision. Human agreement is computed from the raters’ original decisions and is distinct from the field-consistency score reported in Table 29.

The mutual-information diagnostic uses $\mathcal{F} = \{c, e, a, k, n, r\}$ and the CH-SIMS binary sentiment label Y . Goal text g is excluded. Coping k is discretized into five fixed equal-width bins, n is encoded as a four-bit combination, and missing states are represented separately; agency **unknown** is not a valid attribution category. Each field-label contingency table uses Dirichlet 0.5 smoothing, with information measured in bits. For each field, 1,000 label permutations estimate the finite-sample bias:

$$I_f^{\text{corr}} = \max \left\{ 0, I(Z_f; Y) - \frac{1}{1000} \sum_{b=1}^{1000} I(Z_f; Y^{(b)}) \right\}, \quad I_{\text{app}} = \frac{1}{6} \sum_{f \in \mathcal{F}} I_f^{\text{corr}}. \quad (51)$$

Thus the reported MI is an equal-weight mean of six bias-corrected field scores.

Table 29: Label-visibility diagnostic. Field consistency retains the reported score scale; grounded proportion, copying, and Acc2 are percentages. MI is the mean bias-corrected field-label mutual information in bits (Equation 51). Both development evaluations hide true labels.

Teacher condition	Consistency	Grounded	Copying	MI (bits)	Dev Acc2	Conflict Acc2
Label-blind	0.53	73.0	3.0	0.120	84.5	80.5
Label-visible, isolated	0.65	67.0	21.0	0.240	85.0	81.2

Making the teacher label-aware increases field consistency from 0.53 to 0.65 and appraisal-label MI from 0.120 to 0.240 bits, while copying rises from 3.0% to 21.0% and grounding falls from 73.0% to 67.0%. Development accuracy increases by 0.5 pp overall and 0.7 pp on the conflict subset. Higher label association and higher scene grounding are consequently different properties. The observed MI increase alone neither establishes source leakage nor replaces a grounding assessment; the isolated label-visible condition is a diagnostic of supervision design.

J.5 Second-pass explanation audit

A separate pilot audit uses 150 examples, with 50 examples in each of its three strata. The first prediction is locked before a second-pass explanation is generated. The grounded-appraisal rates are 52.0% for Direct and 60.0% for Appraisal prompt (Figure 10). This protocol measures explanation quality after the recognition decision; the second pass does not update that decision.

K Computation and the structure of remaining errors

K.1 Training and inference resources

Table 30 compares training and inference resources for the four methods. The four methods share 8,000 training examples, three epochs, 375 optimization steps, effective batch size 64, LoRA rank 16, and seeds 42, 43, and 44. Their auxiliary heads yield different trainable parameter counts. Generic-CoT-SFT and VISTA share a mean target length of 360 tokens, allowing computation to be compared at matched average output length.

Table 30: Complete resource accounting. Training columns concern the common stage; inference is measured on one A100 at batch size 1. GPU-hours are per seed and peak memory is GiB per GPU. P50 and P95 are inference latency percentiles in seconds.

Method	Params (M)	GPU-h	Peak GiB	P50 (s)	P95 (s)	Tokens
Emotion-SFT	10.12	32.0	42.0	1.2	4.0	8
Generic-CoT-SFT	10.12	40.0	45.0	13.5	26.0	360
Modality-Gate-SFT	12.19	64.0	52.0	6.0	13.0	96
VISTA	12.39	72.0	56.0	15.5	31.0	360

VISTA uses 72 GPU-h per seed versus 40 for Generic-CoT-SFT, and has P50 latency 15.5 s versus 13.5 s. Its three-seed common training totals 216 GPU-h. That total excludes teacher generation, separate task adaptation, ablations, and extra diagnostic calls. The resources measure the cost of the evaluated systems, rather than claiming identical auxiliary capacity or total computation across methods.

(a) Common-stage resources and inference cost

Common training stage; inference: one A100, batch size 1

	Emotion-SFT	Generic-CoT	Modality gate	VISTA
Trainable parameters (M)	10.12	10.12	12.19	12.39
GPU-hours / seed	32.0	40.0	64.0	72.0
Peak VRAM (GiB / GPU)	42.0	45.0	52.0	56.0
Inference P50 (s)	1.2	13.5	6.0	15.5
Inference P95 (s)	4.0	26.0	13.0	31.0
Output tokens	8	360	96	360

VISTA common-stage total: 216 GPU-hours for three seeds.

(b) Error-group composition

Each group has its own denominator; only reported categories are shown

Emotion-SFT only	VISTA only	Both models
Conflict-source error 24%	Goal / concern 11%	Insufficient context 20%
Expression / sarcasm 22%	Congruence / expectation 12%	

Shared bar scale: 0–30% within the named error group.

Figure 13: Resources and error groups. (a) All six reported training and inference resource measurements for the four trained methods. (b) The five available error-category shares, separated by the three paired-model error groups that define their denominators. These shares are not a complete error partition and are not pooled across groups.

K.2 Errors corrected, introduced, and shared

The paired error analysis groups examples by whether Emotion-SFT, VISTA, or both make an error. Within examples where only Emotion-SFT errs, conflict-source mistakes account for 24.0% and expression-regulation/sarcasm mistakes for 22.0%. Within examples where only VISTA errs, goal/concern mistakes account for 11.0% and congruence/Expectation mistakes for 12.0%. Among examples where both models err, insufficient context accounts for 20.0% (Table 31).

This grouping links the method’s gain to concrete interpretation problems without obscuring errors introduced by the intermediate appraisal. It also separates an absent contextual cue from a failure to interpret an available one: better arbitration can improve the latter, while the former requires information beyond the observed input.

Table 31: Available paired-error audit results. Each percentage uses the group in its first column as the denominator. The table lists the reported categories rather than a full partition; entries must not be summed across error groups or interpreted as corpus prevalence.

Error group	Reported error category	Share (%)
Only Emotion-SFT wrong	Conflict-source identification	24.0
Only Emotion-SFT wrong	Expression regulation / sarcasm	22.0
Only VISTA wrong	Goal / concern	11.0
Only VISTA wrong	Goal congruence / Expectation	12.0
Both models wrong	Insufficient context	20.0

L Ordinary conversational recognition and class recall

MELD tests whether the conflict-oriented representation remains useful for ordinary seven-class conversational emotion recognition. Trained models receive the task-specific adaptation described in Appendix M; Base is evaluated zero-shot. VISTA reaches 66.94% weighted-F1, 52.89% macro-F1, and 67.85% accuracy (Table 32). Its reported weighted-F1 gain over Emotion-SFT is 1.46 pp, computed from the unrounded scores.

Table 32: Complete MELD results (%). Differences are in pp relative to Emotion-SFT and are calculated before rounding, so they need not equal subtraction of the displayed rounded means.

Method	Weighted-F1	Macro-F1	Accuracy	Δ wF1
Base	59.55	43.73	60.59	−5.93
Emotion-SFT	65.49	50.65	66.48	0.00
Generic-CoT-SFT	65.69	51.12	66.64	+0.20
Modality-Gate-SFT	65.74	50.84	66.73	+0.25
VISTA	66.94	52.89	67.85	+1.46

The final evaluation reports increased recall in all seven emotion classes relative to Emotion-SFT. Table 33 gives the available class-specific measurements: disgust rises from 18.0 to 21.0%, fear from 20.0 to 23.0%, and sadness from 39.0 to 41.5%. VISTA’s neutral recall is 81.7%. These improvements accompany substantial remaining differences among emotion classes, which weighted-F1 alone does not display.

Table 33: Available MELD class-recall measurements (%). The table includes the available numerical recall values; a dash marks an unreported comparator value.

Emotion	Emotion-SFT	VISTA
Disgust	18.0	21.0
Fear	20.0	23.0
Sadness	39.0	41.5
Neutral	—	81.7

The ordinary-recognition result complements the conflict gains rather than imposing a separate non-inferiority test. The final aggregate report does not supply uncertainty intervals, and the paper makes no formal significance or non-inferiority determination from the displayed differences.

M Shared training and task adaptation

M.1 What is held fixed across the core comparison

All five core models use Qwen2.5-Omni-7B. Base is the frozen pretrained model. Emotion-SFT learns the final emotion or sentiment label; Generic-CoT-SFT adds generic reasoning; Modality-Gate-SFT learns modality

gating; VISTA combines structured appraisal, conflict recognition, and semantic arbitration. The four trained methods share the common-stage conditions in Table 34. Auxiliary heads differ, as reflected in the parameter counts in Table 30.

Table 34: Common-stage training configuration. These settings apply to all four trained core methods. Additional task adaptation and the common THERADIA probe are specified separately.

Setting	Final configuration
Backbone	Qwen2.5-Omni-7B Thinker
Frozen components	Audio encoder, visual encoder, and Talker
Retained training examples	8,000
Epochs / optimization steps	3 / 375
Effective batch size	64
LoRA targets	q_proj , k_proj , v_proj , o_proj in 28 layers
LoRA rank / alpha / dropout	16 / 32 / 0.05
Optimizer	AdamW; $\beta = (0.9, 0.95)$; weight decay 0.01
Learning rates	LoRA: 5×10^{-5} ; added heads: 10^{-4}
Schedule	Cosine; warmup for 5% of optimizer steps
Numerical configuration	bf16; gradient-norm clipping at 1
Input budget	8,192 total tokens; 1,024 text tokens; at most 16 video frames
Decoding	Greedy; maximum 512 generated tokens, apart from Base’s short classification interface
Random seeds	42, 43, 44
Generic-CoT / VISTA mean target length	360 / 360 tokens
VISTA counterfactual coefficient	$\lambda_{cf} = 0$

The pretrained weight revision is ae9e1690543ffd5c0221dc27f79834d0294cba00. The common-stage step count is $8,000 \times 3/64 = 375$; downstream task adaptation is a separate optimization stage. Checkpoint selection maximizes the equally weighted mean of MELD development accuracy and CH-SIMS development Acc2 after putting both on the same numerical scale; a tie selects the earlier checkpoint. The development criteria are separate from the held-out test measurements.

M.2 Training objective and missing supervision

The final training objective combines the emotion task, unimodal tasks, appraisal fields, conflict recognition, and arbitration:

$$\mathcal{L} = \mathcal{L}_{\text{emo}} + 1.0\mathcal{L}_{\text{uni}} + 0.5\mathcal{L}_{\text{app}} + 0.5\mathcal{L}_{\text{conf}} + 0.5\mathcal{L}_{\text{arb}}, \quad \lambda_{cf} = 0. \quad (52)$$

The ablation notation uses the aliases $\mathcal{L}_z = \mathcal{L}_{\text{app}}$, $\mathcal{L}_c = \mathcal{L}_{\text{conf}}$, and $\mathcal{L}_a = \mathcal{L}_{\text{arb}}$. Classification targets use cross-entropy and continuous targets use mean squared error; a unimodal task contributes only when that modality has a valid target. Every supervised component is normalized over its valid targets. For component j ,

$$\mathcal{L}_j = \frac{\sum_i w_i M_{ij} \ell_{ij}}{\sum_i w_i M_{ij} + \epsilon}, \quad w_i = \begin{cases} 1 + 0.5C_i, & \text{a valid conflict label is available,} \\ 1, & \text{otherwise,} \end{cases} \quad (53)$$

where M_{ij} is the supervision-validity mask and ϵ stabilizes the denominator. The conflict quantity C_i is defined in Equation 42. A missing target contributes neither a loss nor a denominator weight.

Within appraisal, c, e, a, r use categorical losses, k uses regression, and the four n indicators use individually masked binary cross-entropy. The goal/concern field g uses a text loss divided by its number of valid target tokens. Each field is first normalized internally; the sample-level appraisal loss then averages its valid fields. A sample with no valid appraisal fields is excluded from the appraisal denominator. Thus target length and the number of social-relevance bits do not implicitly determine field weight. Missing values remain null, agency **unknown** is excluded as a supervision target, and an n bit is false only when negative evidence supports it. Confidence and validity masks are separate quantities; confidence is not automatically used as a loss weight.

M.3 Checkpoint use across evaluation tasks

Table 35 distinguishes direct evaluation, task adaptation, and probing. EmoMM evaluates the common-stage checkpoint without additional adaptation; CH-SIMS and MELD use adapted task predictors, while THERADIA compares frozen representations at equal probe capacity. These checkpoint roles describe optimization stages; source-corpus relationships are specified in Appendix E.

Table 35: Evaluation-stage use of the core models. The labels identify distinct experimental protocols rather than a single checkpoint condition for every task.

Evaluation	Base	Four trained methods
CA-MER	Frozen Base	Common-stage trained models; normalized output interface
EmoMM	Frozen Base	Common-stage checkpoint; no EmoMM adaptation
CH-SIMS v2.0	Zero-shot	Separate task adaptation; train-defined conflict groups
MELD	Zero-shot	Separate task adaptation for seven emotion classes
THERADIA probe	Frozen backbone + common probe	Frozen backbone + common probe

M.4 The complete cross-task result overview

Table 36 places the six reported headline measurements together. The comparisons retain each task’s metric and evaluation protocol. They are not averaged into an artificial universal score: conflict accuracy, appraisal CCC, and ordinary weighted-F1 answer different parts of the scientific question.

Table 36: Complete six-metric overview. Classification and F1 values are percentages; THERADIA CCC retains its native scale. CA-MER conflict is the macro average of its two directions, CH-SIMS Q4 is binary accuracy, and THERADIA is the four-dimensional probe macro CCC.

Method	CA conflict	CA consistent	EmoMM conflict	SIMS Q4	CCC	MELD wF1
Base	54.5	68.0	46.5	70.0	0.470	59.55
Emotion-SFT	60.0	73.0	47.5	77.0	0.505	65.49
Generic-CoT-SFT	61.5	74.0	48.0	77.8	0.533	65.69
Modality-Gate-SFT	62.0	74.0	49.0	79.2	0.535	65.74
VISTA	64.5	74.2	52.0	81.5	0.600	66.94

N Reporting conventions and reproducibility map

N.1 Quantities, denominators, and precision

Appraisal z is an event-level state containing goal/concern, goal congruence, Expectation, agency, coping/control, social norm, and expression regulation. Classification accuracy, F1, recall, and other rates are percentages; their differences are percentage points. CCC, MAE, RMSE, correlations, probability differences, and modality weights retain their native scales. Appendix M specifies training and adaptation.

For the recognition and readout comparisons, the reporting rule computes each metric from the unrounded predictions of seeds 42, 43, and 44 separately, averages the three seed-level metrics equally, and rounds once for display. In particular, F1 and CCC are computed within each seed before averaging. Teacher sampling, shuffling, and bootstrap randomness do not create additional independent training runs. Reported contrasts use the unrounded evaluation values: MELD’s VISTA–Emotion-SFT weighted-F1 gain is 1.46 pp, versus 1.45 pp from the rounded means. Newly derived contrasts (Table 18) use displayed values. The paired analyses

retain the aggregate precision specified in Appendix H. Aggregate scores alone do not determine seed standard deviations, confidence intervals, significance tests, or non-inferiority decisions.

Denominators are 10,256 candidates for selection; 8,000 retained examples for source counts; 400 candidates for coverage; 150 pairs each for valid interventions and irrelevant rewrites; and the corresponding error group for each error share. The six intervention types each have 25 pairs; aggregate rates are not inverted into per-run counts. For direction compliance, invalid model outputs are failures in the fixed evaluation denominator. Continuous probability and log-odds summaries require defined probabilities and use their own valid counts. Native α and masking-based α_{diag} remain distinct.

Training history and source identity. Common training, task adaptation, and development-set checkpoint selection define different uses of a sample. Source identity spans those stages and can differ from a dataset’s local clip ID: two differently named examples may share a video, dialogue, session, subject, or overlapping media interval. A source-disjointness claim therefore requires a canonical source comparison as well as exact clip/media matching. No EmoMM-specific adaptation, as used here, describes the optimization protocol; it does not establish source disjointness from the shared CH-SIMS v2 training material.

N.2 A complete map of the final experimental evidence

Table 37 locates all experiments, including the output-validity, prompt, external-method, class-recall, and resource analyses that complement the main comparisons.

Table 37: A guide to the complete experimental evidence. All experiment families and their numerical results.

Evidence family	Question and complete contents	Location
Core settings and definitions	Backbone, shared training, task adaptation, units, and six-metric overview	Tables 34–36; this section
CA-MER recognition	All subsets, overall accuracy, invalid output, external reevaluations	Tables 14, 15
Conflict specificity	All three control contrasts and directional decomposition	Tables 12, 13
EmoMM	All four conditions and CHASE reevaluation	Table 16
CH-SIMS v2.0	All conflict groups, overall Acc2, Q4 MAE	Table 17
MELD	Weighted-F1, macro-F1, accuracy, unrounded differences, class recall	Tables 32, 33
THERADIA	All five four-dimensional probes, aggregate metrics, downstream conditions	Tables 24–26
Mechanism controls	All 13 appraisal/training configurations and native weights	Tables 19, 20
Counterfactual behavior	All five paired metrics, available type rates, masking diagnostic	Tables 22, 23; Appendix H
Frozen prompting	All four prompts, length, invalid output, second-pass grounding audit	Table 21; Figure 10
Supervision	Candidate/source counts, all seven fields, six label-visibility metrics	Tables 27–29
Resources and errors	All six cost metrics and five reported group-specific error shares	Tables 30, 31

Public-label prevalence is an independent analysis. The public CH-SIMS audit uses a fixed sentiment mapping on all 2,281 released clips, finding 1,117 conflicts independently of VISTA predictions and training selection (Appendix E.1). Appendix E.1 specifies the released data, fixed label mapping, exact comparison rule, and split-level counts.

Scope of each empirical claim. The comparisons support conflict gains, appraisal readout and downstream utility, and intervention sensitivity. Prompting, missingness, class recall, and latency characterize their operating conditions. These aggregates do not separately estimate the Bayes-risk terms or fixed-evidence logit contrasts developed in Appendices C.3 and D.4.

Responsible interpretation of event appraisal. Appraisal is an event-specific hypothesis, not a durable personal attribute or moral judgment. Goals, norms, and expression vary across people and settings; unsupported fields should remain uncertain or masked. Consequential applications require context-specific validation and human review. Conversational and audiovisual data require participant privacy and compliance with dataset access conditions.