

UNIOPSD: UNIFYING OUTCOME AND HINDSIGHT FEEDBACK FOR AGENTIC REINFORCEMENT LEARNING

Zenghuang Fu^{1,2,*} Zhaoyang Li^{3,*} Qiuyuan Ai^{3,*}
 Xiaofeng Han^{1,2} Zelong Zheng^{1,2} Haoyu Wu⁴ Tianyu Fu⁴
 Chenxu Zhao⁴ Minghui Wu⁴ Guannan He^{3,†} Changwei Wang^{5,6,†}

¹University of Chinese Academy of Sciences

²Institute of Automation, Chinese Academy of Sciences

³Peking University ⁴Mininglamp Technology

⁵Key Laboratory of Computing Power Network and Information Security,

Ministry of Education; Shandong Computer Science Center,

Qilu University of Technology (Shandong Academy of Sciences)

⁶Key Laboratory of Computing Power Internet and Service Computing,
 Shandong Fundamental Research Center for Computer Science

*Equal contribution. †Corresponding authors.

ABSTRACT

Reinforcement learning has become an effective approach to training language model agents, but sparse and delayed outcome rewards provide limited guidance for credit assignment across long interaction sequences. Recent work on on-policy self-distillation (OPSD) offers complementary supervision by evaluating a policy’s sampled responses under privileged training-time context. However, our diagnostics show that positive average agreement between outcome and hindsight feedback coexists with substantial local disagreement, raising the question of how to allocate influence between them at each decision. We introduce UniOPSD (Unified On-Policy Self-Distillation), which unifies these feedback sources through adaptive local credit arbitration. UniOPSD constructs comparable credit estimates from environmental returns and successful-peer hindsight at shared interaction anchors. Historical agreement determines the global mixing level, while current signal availability and relative precision adjust each source’s influence at individual decisions. The episode-level outcome contribution is retained, and bounded token modulation refines the fused step credit for policy optimization. With Qwen2.5-3B-Instruct and Qwen2.5-7B-Instruct, UniOPSD achieves ALFWorld success rates of 82.8% and 83.6%, WebShop success rates of 75.0% and 82.0%, and Search-QA aggregate accuracies of 45.3% and 49.8%, respectively. On 3B WebShop, UniOPSD improves over SDAR by 7.0 percentage points. Our code is available at <https://github.com/Zenghuang-Fu/Uniopsd>.

1 INTRODUCTION

Interactive language agents must coordinate multiple decisions before receiving a task outcome, whether manipulating a household environment, selecting a product, or searching for evidence (Shridhar et al., 2021; Yao et al., 2022; Jin et al., 2025). A failed trajectory may contain useful intermediate actions, while a successful one may include unnecessary steps. Assigning the same outcome signal to every decision obscures these differences. The challenge is to extract informative local supervision from complete interactions without assuming that every available signal measures the same aspect of action quality.

Outcome feedback and hindsight provide complementary information for learning interactive language-model policies. Outcome feedback relates behavior to task returns: group-relative policy optimization compares sampled trajectories, and GiGPO additionally compares decisions at repeated interaction anchors (Shao et al., 2024; Feng et al., 2025). These local comparisons can be limited by singleton anchors or identical observed returns, leaving little information with which to distinguish

actions. Hindsight can supply another perspective by allowing the policy to reconsider a sampled response in light of a successful trajectory. Existing self-distillation methods already exploit privileged feedback: SDAR and StepOPSD use privileged contexts for agent learning, while AgentOPSD constructs turn-level hindsight evidence (Lu et al., 2026; Zhang et al., 2026b; Wang et al., 2026c). Such feedback can expose useful action patterns that a small set of outcome comparisons fails to distinguish. The potential complementarity motivates using both sources, with environmental returns grounding the update and hindsight supplying additional information about local decisions.

Complementary supervision, however, does not imply consistent local credit. At the same anchor, a sampled action may receive positive hindsight-derived credit and negative outcome-derived credit, because the two assessments rely on different evidence. Hindsight support can reflect imitation or wording preferences as well as useful behavior (Kara & Ersoy, 2026; Nicolicioiu et al., 2026), while outcome credit depends on the continuations actually sampled. Fixed mixing cannot adapt its balance to this changing evidence, and weighting by local stability alone can favor a consistent but return-irrelevant teacher. Existing work addresses parts of this problem: StepOPSD shapes sampled-action advantages with hindsight gaps, and ADRS relates teacher confidence to returns, including within GiGPO anchors, to construct token modulation (Zhang et al., 2026b;a). We focus on the allocation of influence between two explicit local credit estimates before token modulation.

Our training diagnostics show why average agreement is insufficient. Over updates 1–150, ALFWorld-3B has mean within-batch correlation 0.315, but mean sign disagreement reaches 37.8% among rows carrying both signals; joint coverage averages only 32.8% (Appendix C). Positive association thus coexists with local disagreement and missing evidence. These batch-level summaries motivate separating historical agreement from the availability and relative precision of current evidence. This raises the central question: *when outcome and hindsight credit disagree, which signal should an agent trust, and by how much?*

We introduce UniOPSD (Unified On-Policy Self-Distillation), which unifies outcome and hindsight feedback by adaptively arbitrating between their local credit estimates. The two estimates are GiGPO’s weighted, mean-centered return-to-go and a hindsight branch obtained by centering and scale-matching the frozen behavior policy’s log-probability gaps at the same anchors. Historical agreement provides a reliability proxy that sets the global mixing level, while current signal availability and relative precision adjust each step’s weight. Convex fusion expresses the resulting allocation of influence. The episode-level outcome term remains numerically fixed, and bounded token modulation refines the arbitrated step credit before PPO, as illustrated in Figure 1. We evaluate UniOPSD on ALFWorld, WebShop, and Search-QA with Qwen2.5-3B-Instruct and Qwen2.5-7B-Instruct. The benchmark results show competitive performance across these domains, including a 7.0-percentage-point improvement in 3B WebShop success over the strongest reported baseline in Table 1. Credit-signal analysis reveals substantial local disagreement despite positive average association, connecting the empirical setting to the arbitration problem.

Our contributions are threefold:

- **A formulation of local credit arbitration.** We express outcome and hindsight supervision as comparable step-credit branches at matched anchors, making disagreement and unequal evidence availability explicit while retaining the native episode term.
- **Arbitration using historical and local evidence.** We develop the `corr` rule, which uses historical agreement to set a global mixing level and local precision proxies and availability to adjust each step’s weight, followed by bounded token refinement.
- **Empirical evaluation and analysis.** We report benchmark results across three agent domains and two model scales, together with component ablations and diagnostics of local disagreement, evidence coverage, and learning trajectories. A token-perturbation bound and exact reductions separate the roles of step arbitration and token refinement.

2 RELATED WORK

Agent reinforcement learning. Policy-gradient methods provide trajectory- and step-level learning signals (Schulman et al., 2015; 2017; Shao et al., 2024; Feng et al., 2025). Hindsight, rollout graphs, and pivot supervision refine credit assignment (Harutyunyan et al., 2019; Tan et al., 2026; Cheng et al., 2026; Liu et al., 2026a), while ActFocus reweights action tokens (He et al., 2026). PCGrad and

CAGrad address task-gradient conflicts (Yu et al., 2020; Liu et al., 2021); UniOPSD instead allocates outcome and hindsight credit for individual decisions.

On-policy self-distillation. Distillation supplies teacher supervision, including on student-generated responses (Hinton et al., 2015; Agarwal et al., 2024); privileged contexts and temporal curricula extend this approach to reasoning and interaction (Zhao et al., 2026; Wang et al., 2026b; Lu et al., 2026; Zhang et al., 2026b). RLSD, SDPG, and PBSO connect distillation to advantage reweighting, verifier-based updates, and preference optimization, respectively (Yang et al., 2026; Liu et al., 2026b; Yu et al., 2026). Feedback alignment and diversity studies reveal limitations of demonstration-conditioned supervision (Kara & Ersoy, 2026; Nicolicioiu et al., 2026). UniOPSD explicitly arbitrates between comparable outcome and hindsight step credits before token refinement.

Memory and self-evolving agents. ReAct couples reasoning with action; Reflexion and Voyager retain feedback and skills (Yao et al., 2023; Shinn et al., 2023; Wang et al., 2023). Skill-SD supplies teacher-only skill context (Wang et al., 2026a). Cognitive Scaffold, CoEvoKG, and SESA develop persistent graph memory or evolving task and skill stores (Ai et al., 2026; Li et al., 2026; Fu et al., 2026). UniOPSD uses peers within the current rollout group, making credit arbitration complementary to persistent memory.

3 BACKGROUND AND NOTATION

For a task x , the behavior policy π_b samples trajectories $\{\tau_i\}_{i \in \mathcal{I}_x}$ from the same initial environment state. Trajectory i receives total return $G_i = \sum_{\ell=1}^{T_i} r_{i,\ell}$. We index an individual response by k , write its trajectory as $i(k)$, its interaction step as $\ell(k)$, its visible history as h_k , and its valid tokens as $y_{k,1:L_k}$. Its discounted return-to-go is $R_k = \sum_{\ell=\ell(k)}^{T_{i(k)}} \gamma^{\ell-\ell(k)} r_{i(k),\ell}$, where $\gamma \in (0, 1]$. An anchor group $g(k)$ collects responses assigned to the same comparison state within a task, following GiGPO (Feng et al., 2025). The comparison state can be an observation representation rather than the agent’s complete history, so matching an anchor does not itself assert identical latent states or continuation distributions.

GiGPO estimates relative advantages at two levels: complete trajectories are compared within a task, and actions are compared within an anchor group. Let $\mathcal{R}_x^E = (G_j)_{j \in \mathcal{I}_x}$ and $\mathcal{R}_k^S = (R_j)_{j \in g(k)}$ denote the corresponding return collections. Following its original formulation (Feng et al., 2025),

$$A^E(\tau_i) = \frac{G_i - \text{mean}(\mathcal{R}_x^E)}{F_{\text{norm}}(\mathcal{R}_x^E)}, \quad A^S(a_k) = \frac{R_k - \text{mean}(\mathcal{R}_k^S)}{F_{\text{norm}}(\mathcal{R}_k^S)}, \quad (1)$$

where a_k denotes the action response and F_{norm} is either the group standard deviation or the constant one. The episode term evaluates the trajectory as a whole and is shared across its responses; the step term distinguishes actions through their subsequent returns. GiGPO combines them as

$$A^{\text{GiGPO}}(a_k) = A^E(\tau_{i(k)}) + \omega A^S(a_k), \quad (2)$$

where $\omega \geq 0$ controls the step contribution. All reported runs use $F_{\text{norm}} \equiv 1$, the mean-centered variant. In the Method, A_k^E denotes the episode contribution supplied by the backbone and A_k^S denotes the weighted step contribution $\omega A^S(a_k)$. UniOPSD retains the former and arbitrates between the latter and hindsight credit. Appendix A.2 specifies the reported backbone’s episode-baseline and reward conventions relative to the trajectory-level definition above.

Anchor centering defines a relative comparison. It does not supply missing counterfactual rollouts. In particular, a response can have $A_k^S = 0$ even when other returns in its group vary, because its return equals the group mean. We therefore distinguish a zero-valued branch from a group without return variation. This distinction determines the availability masks used below and prevents a numerical zero from automatically being interpreted as missing environmental evidence.

4 METHOD

UniOPSD assigns influence to outcome and hindsight credit using evidence at two scales. Historical association sets the global mixing level, and current availability and relative precision determine

the local allocation. The main variant implements this arbitration through the `corr` weighting rule and the `fusion` construction, retaining the backbone’s episode contribution A_k^E while replacing its weighted step contribution A_k^S . Its inputs are sampled trajectories, rewards, anchor assignments, and log probabilities from a frozen behavior checkpoint. No additional teacher parameters are fitted for the update. Figure 1 summarizes the training pipeline.

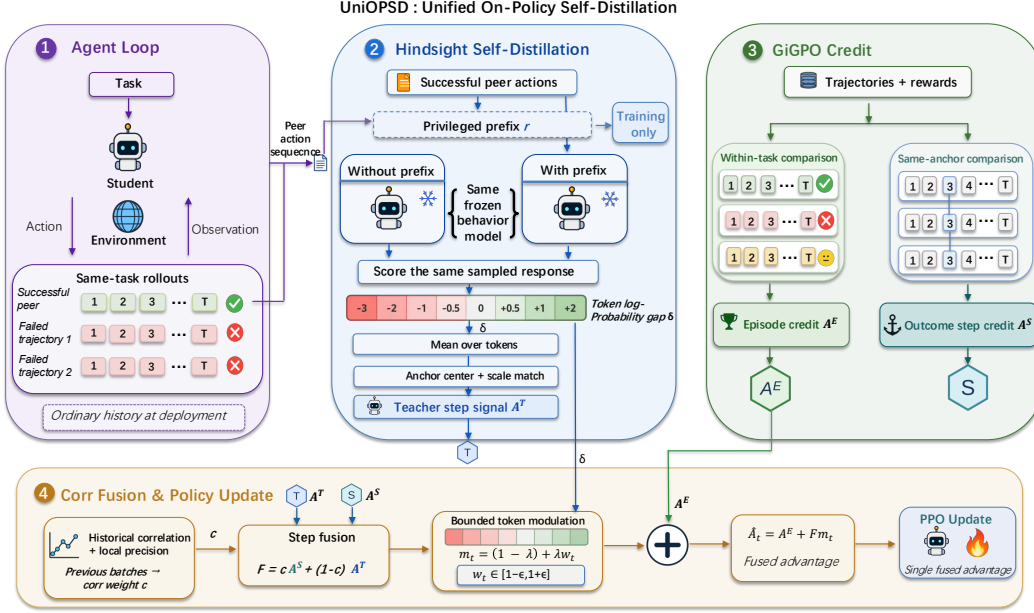


Figure 1: UniOPSD arbitrates between outcome and hindsight step credit at matched anchors. Historical agreement sets a global mixing level, and local evidence adjusts each step’s weight. The episode term is retained explicitly; bounded token modulation $b_{k,t} = 1 - \lambda_m + \lambda_m w_{k,t}$ refines the arbitrated step term before PPO. Privileged peer context is restricted to training.

4.1 COMPARABLE LOCAL CREDIT ESTIMATES

Hindsight signal construction. For each failed trajectory, we select the first successful peer in the same rollout task group and extract its ordered action sequence as a privileged prefix r_k . This follows the peer-hindsight construction used by StepOPSD (Zhang et al., 2026b). The teacher scores the student’s already sampled response, rather than generating a replacement action. Both scores use the same frozen behavior checkpoint:

$$\delta_{k,t} = \log \pi_b(y_{k,t} \mid r_k, h_k, y_{k,<t}) - \log \pi_b(y_{k,t} \mid h_k, y_{k,<t}), \quad \bar{\delta}_k = \frac{1}{L_k} \sum_{t=1}^{L_k} \delta_{k,t}. \quad (3)$$

Successful trajectories and failed trajectories without a usable successful peer receive no prefix. Their teacher inputs coincide with the student inputs, yielding a zero gap. This policy makes teacher coverage a property of the sampled group, rather than a uniformly available supervision source.

To compare this hindsight feedback with native outcome credit, we first center the row-mean gaps over all rows in the corresponding anchor group, including rows with zero gaps. We then match the spread of the two step branches on the set of taught rows:

$$d_k = \bar{\delta}_k - \frac{1}{|g(k)|} \sum_{j \in g(k)} \bar{\delta}_j, \quad A_k^T = s d_k, \quad s = \frac{\text{std}_{k \in \mathcal{T}}(A_k^S)}{\text{std}_{k \in \mathcal{T}}(d_k) + \varepsilon}. \quad (4)$$

Here $\varepsilon > 0$ is a numerical stability constant and $\mathcal{T} = \{k : \sum_t |\delta_{k,t}| > 0\}$ is the set of taught rows. We set $s = 0$ if fewer than two taught rows exist or their centered gaps have standard deviation at most ε . The scale population is $\mathcal{T}$, even when some taught anchors lack return variation. Common centering makes the comparisons consistent, and scale matching controls their numerical magnitude. These operations do not establish that the branches estimate the same true advantage.

Availability and relative precision. Local arbitration depends on whether each signal is available and how much its observations vary. Let $n_k = |g(k)|$, let v_k^R be the sample variance of returns in that anchor, and let $v_k^\delta = L_k^{-1} \sum_t (\delta_{k,t} - \bar{\delta}_k)^2$. We define

$$\mathcal{E} = \{k : n_k \geq 2, v_k^R > 0\}, \quad \mathcal{B} = \mathcal{E} \cap \mathcal{T}, \quad p_k^S = \frac{n_k}{\max(v_k^R, \varepsilon)}, \quad p_k^T = \frac{1}{\max(s^2 v_k^\delta / L_k, \varepsilon)}. \quad (5)$$

The respective proxy is set to zero outside its availability set. Each positive proxy is divided by its own median over $\mathcal{B}$, producing z_k^S and z_k^T . If $\mathcal{B}$ is empty, each median uses that source's own available rows. Empty populations use a unit denominator, and denominators are floored by ε . These are batch-relative precision proxies: small observed scatter is neither a measurement of bias nor a guarantee of useful supervision.

4.2 ARBITRATION FROM HISTORICAL AND LOCAL EVIDENCE

Local stability does not establish relevance to returns: a teacher can produce consistent credit without agreeing with outcome comparisons. Conversely, historical association cannot determine how much evidence supports each current step. UniOPSD therefore uses historical agreement to set a global mixing level and relative local precision to adjust the allocation on rows with both sources. On each valid batch, we compute Pearson correlation between A^S and A^T over $\mathcal{B}$, provided both vectors have nonzero variance. An exponential moving average with decay $\beta \in [0, 1)$ stores these measurements. The current batch uses the previous stored value; its measurement updates the state only after the weights have been formed.

Let $\bar{\rho}_{m-1}$ denote the available historical average and n_{prev} the row count of its most recent valid measurement. We use

$$\hat{\rho}_m = \max \left(0, \bar{\rho}_{m-1} - \frac{\kappa}{\sqrt{H \max(n_{\text{prev}}, 1)}} \right), \quad q_m = \min\{\hat{\rho}_m^2, u(1 - \eta)\}, \quad (6)$$

Here $\kappa \geq 0$ controls shrinkage, $H = (1 - \beta)^{-1}$ is a heuristic averaging horizon, and $\eta \in (0, 1)$ is a numerical margin that keeps q_m below u . We set $\hat{\rho}_m = 0$ before the first valid measurement. Because rows and batches share trajectories and changing policies, the subtracted quantity is not a calibrated confidence bound. The sensitivity parameter $u \in (0, 1]$ is a design choice rather than measured reliability. Table 4 in Appendix B lists the parameter values used for credit-signal analysis.

The global outcome weight and the row-specific fusion weight are

$$\bar{c}_m = \frac{u(u - q_m)}{u^2 - 2uq_m + q_m}, \quad (7)$$

$$c_k = \begin{cases} \frac{a_m z_k^S}{a_m z_k^S + z_k^T}, & k \in \mathcal{B}, \\ \bar{c}_m, & k \in \mathcal{T} \setminus \mathcal{E}, \\ 1, & k \notin \mathcal{T}, \end{cases} \quad a_m = \frac{\bar{c}_m}{1 - \bar{c}_m}, \quad F_k = c_k A_k^S + (1 - c_k) A_k^T. \quad (8)$$

We set $\bar{c}_m = 1$ when its denominator is nonpositive and clip it to $[0, 1]$. If $\bar{c}_m \geq 1 - \eta$, all rows use $c_k = 1$, avoiding the odds ratio. Remaining numerical denominators are floored by ε and final weights clipped to $[0, 1]$.

The coefficient c_k expresses how much influence the outcome estimate receives, and $1 - c_k$ is the hindsight share. These weights are assigned continuously, including when the estimates agree; the rule has no separate sign-conflict trigger. On teacher-only rows, $F_k = (1 - \bar{c}_m) A_k^T$ because $A_k^S = 0$. Rows without a teacher retain A_k^S , even if anchor centering gives their intermediate d_k a nonzero value. A nonpositive shrunken correlation rejects the teacher step branch but does not remove token modulation. Historical agreement and relative precision are reliability proxies; the arbitration rule carries no optimal-estimation guarantee.

For jointly available branches, the interior rule has the odds form $c_k / (1 - c_k) = [\bar{c}_m / (1 - \bar{c}_m)] (z_k^S / z_k^T)$. Equal normalized precision proxies retain the historical allocation, while a larger outcome-to-hindsight precision ratio increases the outcome share. When $A_k^S > 0 > A_k^T$, the fused

credit is positive exactly when $c_k > -A_k^T/(A_k^S - A_k^T)$. The corresponding threshold therefore depends on the magnitudes of the conflicting estimates as well as their signs. This explains how one historical mixing level can support different decisions within a batch: local precision changes the allocation, and the two credit magnitudes determine the resulting direction.

4.3 BOUNDED TOKEN MODULATION AND POLICY UPDATE

After allocating step credit, we use the token gap for a bounded refinement within the sampled response:

$$w_{k,t} = \text{clip}(\exp\{\text{sign}(F_k)\delta_{k,t}\}, 1 - \epsilon_w, 1 + \epsilon_w), \quad (9)$$

$$\hat{A}_{k,t} = A_k^E + F_k[(1 - \lambda_m) + \lambda_m w_{k,t}], \quad \lambda_m = \lambda_0 \max\left(1 - \frac{m}{T_{\text{decay}}}, 0\right). \quad (10)$$

Here $\lambda_0 \in [0, 1]$ is the initial modulation strength, $T_{\text{decay}} > 0$ is the decay duration in policy updates, and $\epsilon_w \in [0, 1]$ is the clipping radius of the token weight. The multiplier depends on the direction of F_k and acts only on its contribution. Its initial relative effect is bounded by $\lambda_0 \epsilon_w$ and decays to zero over the schedule, while step arbitration remains active. The frozen gaps, group statistics, and resulting advantages are held fixed during the policy update.

With token ratio $r_{k,t}(\theta) = \pi_\theta(y_{k,t} \mid h_k, y_{k,<t})/\pi_b(y_{k,t} \mid h_k, y_{k,<t})$, the PPO surrogate is

$$J_{\text{clip}}(\theta) = \mathbb{E}_{k,t} \left[\min\left(r_{k,t}(\theta)\hat{A}_{k,t}, \text{clip}(r_{k,t}(\theta), 1 - \epsilon_{\text{PPO}}, 1 + \epsilon_{\text{PPO}})\hat{A}_{k,t}\right) \right]. \quad (11)$$

Here ϵ_{PPO} is the policy-ratio clipping radius, distinct from the token-weight radius ϵ_w . This is the core clipped surrogate with the substituted advantage (Schulman et al., 2017). The implementation also uses a dual-clipping floor for negative advantages, detailed in Appendix B. The training configuration retains its reference-policy KL control, entropy regularization, and invalid-action penalties. These inherited choices must be held fixed in controlled comparisons. At deployment, the policy uses ordinary interaction histories without peer hindsight.

4.4 PROPERTIES AND CONTROLLED REDUCTIONS

Proposition 1. For $c_k, \lambda_m \in [0, 1]$ and $0 \leq \epsilon_w < 1$, the fused step value lies between A_k^S and A_k^T , and

$$\left| \hat{A}_{k,t} - (A_k^E + F_k) \right| \leq \lambda_m \epsilon_w |F_k|. \quad (12)$$

Setting $c_k = 1$ and $\lambda_m = 0$ recovers $A_k^E + A_k^S$. The proof is in Appendix A.5.

The reductions distinguish two interventions. Setting $c_k = 1$ removes step fusion but retains token modulation, whereas setting $\lambda_m = 0$ removes token modulation but retains step fusion. An untaught row has $c_k = 1$ and $w_{k,t} = 1$, so it recovers the underlying advantage directly. Keeping A_k^E fixed places no conservation constraint on total trajectory credit and does not preserve the sign of the total advantage. These distinctions define interpretable controls for the experiments.

5 EXPERIMENTS

5.1 EVALUATION SETTING

We evaluate UniOPSD on ALFWorld, WebShop, and Search-QA, covering household interaction, product selection, and retrieval-based question answering (Shridhar et al., 2021; Yao et al., 2022; Jin et al., 2025). The policies are Qwen2.5-3B-Instruct and Qwen2.5-7B-Instruct (Qwen et al., 2024). UniOPSD uses successful-peer trajectories from the same rollout group as training-time hindsight, without externally supplied skill descriptions. ALFWorld reports task success rates. WebShop reports both the mean task score, which includes partial credit, and the fraction of fully successful tasks. Search-QA reports accuracy on Natural Questions (NQ), TriviaQA (Triv), PopQA (Pop), HotpotQA (Hotp), 2Wiki (2Wk), MuSiQue (MuS), and Bamboogle (Bam).

For credit-signal analysis, we use correlation-guided peer fusion with eight rollouts per task and the mean-centered GiGPO backbone. The maximum interaction lengths are 50, 15, and 4 turns for

Table 1: Performance comparison of UniOPSD and baselines on ALFWorld, Search-QA, and WebShop. ALFWorld reports success rate, Search-QA reports accuracy, and WebShop reports score and accuracy (all in %). * denotes validation with skills. Purple/bold and blue mark the highest and second-highest values, respectively, within each model and metric; ties share a color.

Method	ALFWorld					Search-QA										WebShop	
	Pick	Look	Clean	Heat	Cool	Pick2	Avg	NQ	Triv	Pop	Hotp	2Wk	MuS	Bam	Avg	Score	Acc
<i>Qwen2.5-3B-Instruct</i>																	
Vanilla	44.4	11.1	6.2	15.4	28.6	12.5	21.9	24.6	48.1	31.0	26.3	25.3	7.2	59.7	31.7	6.7	0.8
Skill-Prompt*	51.7	66.7	48.4	0.0	4.3	10.0	28.9	23.7	46.2	30.6	24.4	22.1	7.5	12.5	23.9	0.2	0.8
OPSD	48.8	41.7	16.7	0.0	15.8	16.7	28.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	11.3	3.1
GRPO	91.2	62.5	96.2	61.9	65.0	47.4	75.0	39.3	60.6	41.1	37.4	34.6	15.4	26.4	36.4	79.8	63.3
Skill-GRPO	88.9	71.4	58.8	70.6	40.7	29.2	60.2	43.5	58.8	43.0	36.8	32.2	11.7	12.5	34.1	77.3	60.9
Skill-GRPO*	94.3	57.1	100	66.7	73.1	57.1	80.5	44.3	59.6	44.3	39.0	36.1	14.5	14.9	36.1	76.3	66.4
GRPO+OPSD	100	82.4	85.7	75.0	70.0	60.0	81.2	44.9	61.2	45.2	40.4	38.5	16.0	66.1	44.6	77.8	66.4
Skill-SD	88.2	50.0	96.2	52.4	65.0	57.9	73.4	44.4	60.4	44.0	39.5	40.4	15.4	64.9	44.1	75.9	64.0
RLSD	87.9	75.0	90.9	75.0	73.1	68.4	79.7	41.5	58.6	42.3	40.4	40.2	16.8	66.9	43.8	84.4	66.4
SDAR	97.1	62.5	100	61.9	75.0	84.2	84.4	44.8	58.1	44.3	38.6	36.2	15.7	66.1	43.4	85.0	68.0
StepOPSD	82.4	66.7	82.6	52.2	73.7	75.0	73.4	43.6	61.2	43.8	39.2	38.1	15.8	64.5	43.7	82.4	66.4
UniOPSD	94.7	64.3	96.3	100.0	44.4	77.8	82.8	43.8	61.2	46.0	39.0	39.8	14.9	66.1	45.3	87.4	75.0
<i>Qwen2.5-7B-Instruct</i>																	
Vanilla	36.1	22.2	3.1	0.0	0.0	0.0	12.5	25.2	50.8	29.5	29.0	29.0	10.4	63.7	33.9	5.9	1.6
Skill-Prompt*	51.7	50.0	32.3	5.3	4.3	0.0	23.4	30.9	52.1	32.7	32.7	27.9	12.7	66.1	36.4	1.7	0.8
OPSD	50.0	60.0	22.7	21.4	17.6	9.5	32.8	8.8	8.6	17.5	2.5	4.2	0.5	1.2	6.2	4.5	2.3
GRPO	91.2	87.5	96.2	81.0	65.0	57.9	81.2	45.1	63.7	44.0	43.6	43.2	16.8	37.6	42.0	80.9	72.6
Skill-GRPO	88.5	66.7	65.2	61.1	57.7	73.1	69.5	45.2	63.7	45.7	43.1	43.3	19.6	21.4	40.3	80.4	71.9
Skill-GRPO*	100	83.3	96.4	83.3	75.0	78.9	88.3	44.8	63.0	45.1	43.7	43.7	20.5	71.4	47.5	87.0	81.2
GRPO+OPSD	91.4	61.5	100	87.5	76.5	52.2	80.4	47.3	64.5	46.9	43.8	39.3	18.0	69.4	47.0	86.8	76.5
Skill-SD	93.9	93.8	90.9	100	69.2	68.4	85.1	47.1	64.5	47.8	44.2	42.1	20.2	69.0	47.8	86.1	76.5
RLSD	100	87.5	92.3	58.8	80.0	65.2	82.0	46.8	63.0	44.4	45.5	48.9	21.5	73.0	49.0	87.4	77.3
SDAR	94.7	75.0	100	86.7	68.2	78.9	85.9	46.3	63.5	48.2	43.8	48.4	19.6	73.0	49.0	89.4	82.8
StepOPSD	98.1	75.0	100	90.5	80.0	63.2	88.4	45.3	64.6	45.1	44.5	44.4	19.3	69.8	48.2	87.2	78.1
UniOPSD	89.7	90.0	94.7	88.2	66.7	72.0	83.6	48.2	64.8	49.1	44.7	46.0	20.0	72.8	49.8	88.8	82.0

ALFWorld, WebShop, and Search-QA. Token modulation initially changes the fused step term by at most ten percent and decays to zero over T_{decay} updates, while step arbitration continues. Search-QA diagnostics use the NQ/HotpotQA validation mixture, which differs from the seven-dataset benchmark comparison. Appendix B records the diagnostic settings, and Table 4 gives the shared method parameters.

5.2 MAIN RESULTS

UniOPSD achieves ALFWorld success rates of 82.8% and 83.6% with the 3B and 7B models, respectively. The 3B result ranks second among the methods in Table 1, behind SDAR’s 84.4%; the 7B result is below StepOPSD’s 88.4%. On WebShop, the 3B model reaches a score of 87.4 and success rate of 75.0%, exceeding SDAR’s 85.0 and 68.0% by 2.4 score points and 7.0 percentage points. Both metrics are the highest in the 3B comparison. The 7B model reaches 88.8 and 82.0%, ranking second on both metrics, within 0.6 score points and 0.8 percentage points of SDAR. Thus the largest aggregate improvement over the reported baselines occurs in 3B WebShop, while performance on ALFWorld remains below the strongest baseline at each scale.

Search-QA shows complementary strengths across the constituent datasets. The 3B model attains the highest PopQA accuracy of 46.0% and ties the highest TriviaQA accuracy at 61.2%. The 7B model leads on NQ, TriviaQA, and PopQA with 48.2%, 64.8%, and 49.1%, respectively, and ranks second on HotpotQA and Bamboogle. The reported aggregate accuracies are 45.3% and 49.8%. Without externally supplied skill descriptions, UniOPSD outperforms most compared methods on the aggregate metrics reported in Table 1. On WebShop, the 3B model achieves a success rate of 75.0%,

Table 2: Component ablations using overall benchmark results (%). ALFWorld and WebShop report success rates; Search-QA reports aggregate accuracy. The UniOPSD row reproduces Table 1 for reference; the frozen variant fixes $\rho_0 = 0.25$.

Variant	Qwen2.5-3B-Instruct			Qwen2.5-7B-Instruct		
	ALFWorld	Search-QA	WebShop	ALFWorld	Search-QA	WebShop
w/o step grouping (GRPO)	75.0	36.4	63.3	81.2	42.0	72.6
w/o teacher (GiGPO)	76.6	39.8	70.3	79.7	45.6	75.0
w/o correlation (<i>invvar</i>)	78.9	41.3	71.9	78.1	46.3	76.6
w/ frozen ρ	80.5	42.8	73.4	82.0	47.5	78.9
UniOPSD	82.8	45.3	75.0	83.6	49.8	82.0

exceeding the strongest reported baseline by 7.0 percentage points. Table 2 compares UniOPSD with outcome-only backbones and simplified fusion rules.

5.3 COMPONENT ABLATIONS

Table 2 compares five configurations that examine outcome credit, hindsight supervision, and the fusion rule. Removing the teacher sets $c_k \equiv 1$ and $\lambda_m \equiv 0$, recovering GiGPO and removing both the hindsight step branch and token modulation. GRPO provides a trajectory-only backbone reference by additionally removing anchor-relative step credit from this outcome-only learner. Replacing correlation-guided fusion with inverse-variance weighting (*invvar*) retains the two credit branches and local precision adjustment, but removes the historical correlation prior. The frozen-correlation variant retains the correlation-to-weight mapping and local adjustment while fixing the correlation input to ρ_0 throughout training, with $\rho_0 = 0.25$. This distinguishes a fixed correlation input from an evolving historical signal. Appendix A.6 gives the ablation definitions.

UniOPSD has the highest aggregate result in all six model–benchmark settings in Table 2. Its gains over GiGPO range from 3.9 to 7.0 percentage points. Relative to inverse-variance fusion, UniOPSD is higher by 3.9, 4.0, and 3.1 points on ALFWorld, Search-QA, and WebShop with the 3B model, and by 5.5, 3.5, and 5.4 points with the 7B model. The frozen-correlation variant falls between inverse-variance fusion and UniOPSD in every setting, with UniOPSD ahead by 1.6–3.1 points. For example, 7B WebShop success is 76.6% with inverse-variance fusion, 78.9% with a fixed correlation input, and 82.0% for UniOPSD.

Figure 2 complements the aggregate comparison with 7B training curves on ALFWorld and WebShop. On WebShop, UniOPSD reaches 82.0% success at update 150, while GRPO and GiGPO both finish at 71.1%. On ALFWorld, UniOPSD reaches 83.6% during training and finishes at 79.7%, compared with 80.5% for GRPO and 71.9% for GiGPO at the final update.

5.4 TRAINING DYNAMICS

Figure 3 presents the learning curves of Qwen2.5-3B-Instruct and Qwen2.5-7B-Instruct across the three environments over 150 training updates. We evaluate the policy every five updates. ALFWorld and WebShop use 128 validation samples with sampling temperature 0.4, while Search-QA uses 512 samples with deterministic decoding. ALFWorld uses the in-distribution evaluation split.

Both model scales improve across the three environments, with earlier gains on ALFWorld and WebShop and more gradual improvement on Search-QA. The 3B ALFWorld curve reaches 82.8% at update 125 and ends at 75.0% at update 150, illustrating that peak performance and the final checkpoint need not coincide.

Over 150 retained ALFWorld-3B updates, UniOPSD uses 5.7% fewer student tokens and 4.7% less training time per update than our local SDAR reproduction (accounting exclusions: Appendix B).

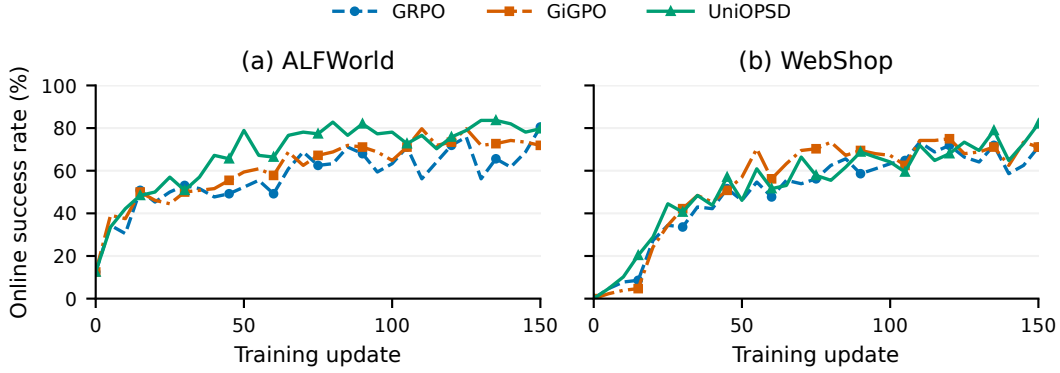


Figure 2: Online validation success rates of GRPO, GiGPO, and UniOPSD with Qwen2.5-7B-Instruct on ALFWorld and WebShop, measured every five training updates. UniOPSD uses successful-peer hindsight with correlation-guided fusion (`corr`).



Figure 3: UniOPSD validation success rates for Qwen2.5-3B/7B-Instruct. ALFWorld and WebShop 7B curves match Figure 2 and use correlation-guided fusion (`corr`).

5.5 LOCAL DISAGREEMENT AND EVIDENCE COVERAGE

We measure agreement and evidence coverage throughout training. Over updates 1–150, mean within-batch correlation on rows carrying both signals is 0.315 for ALFWorld-3B and 0.308 for ALFWorld-7B, while sign-disagreement fractions are 37.8% and 36.8%. Disagreement includes zero versus nonzero signs as well as opposing nonzero signs. Both signals are available on 32.8% and 27.0% of rows on average. Thus, positive average association coexists with substantial local disagreement and incomplete coverage. Fusion also assigns nonzero step credit to some responses whose outcome-step credit is zero: the fraction satisfying $A_k^S = 0$ and $F_k \neq 0$ averages 5.6% and 4.7%. Appendix C gives definitions and results for all domains.

WebShop further separates coverage from conditional disagreement: both signals are available on 10.1% and 12.9% of rows for the 3B and 7B models, yet disagree on 26.9% and 30.0% of those rows. The all-row mean outcome weights, 0.976 and 0.974, include rows without teacher feedback, where the outcome weight is one. These averages therefore do not imply negligible hindsight influence wherever it is available. Coverage and conditional agreement together clarify where arbitration can change the update.

6 CONCLUSION

UniOPSD unifies outcome and hindsight supervision through adaptive local credit arbitration. Historical agreement sets the global mixing level, while current availability and relative precision determine each decision’s allocation before bounded token refinement. Experiments with 3B and 7B policies show competitive performance across ALFWorld, WebShop, and Search-QA. Component compar-

isons favor UniOPSD over inverse-variance and frozen-correlation fusion, while diagnostics reveal positive average agreement alongside substantial local disagreement. Together, these results support conditioning the influence of hindsight on both historical and current evidence.

AI ASSISTANCE DISCLOSURE

Generative AI tools were used solely to assist with language polishing and to improve the clarity, grammar, and readability of author-written text. They were not used to generate research ideas, design the methodology or experiments, derive mathematical claims, or interpret experimental results. All AI-assisted edits were carefully reviewed and verified by the authors, who take full responsibility for the final content of the paper.

REPRODUCIBILITY STATEMENT

Appendix A details the algorithm, implementation conventions, and proofs. Appendix B documents training and evaluation settings, including the use of eight NVIDIA A100 GPUs, and the provenance of reported measurements. Appendix C defines the diagnostic statistics, while Appendix D provides interaction prompts and qualitative examples. The code and configurations required to reproduce our experiments are available at <https://github.com/Zenghuang-Fu/Uniopsd>.

REFERENCES

- Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos, Matthieu Geist, and Olivier Bachem. On-Policy Distillation of Language Models: Learning from Self-Generated Mistakes. In *International Conference on Learning Representations*, 2024. doi: 10.48550/arXiv.2306.13649. URL <https://arxiv.org/abs/2306.13649>.
- Qiuyuan Ai, Zenghuang Fu, Zhaoyang Li, Ping Jiang, Haoyu Wu, Jie Song, and Guannan He. Cognitive Scaffold: From Fluid Context to Crystallized Memory for Long-Horizon DeepResearch Agents. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 25526–25542, 2026. doi: 10.18653/v1/2026.acl-long.1170. URL <https://aclanthology.org/2026.acl-long.1170/>.
- Xin Cheng, Shuo He, Lang Feng, HaiYang Xu, Ming Yan, Lei Feng, and Bo An. Beyond Trajectory-Level Attribution: Graph-Based Credit Assignment for Agentic Reinforcement Learning. *arXiv preprint arXiv:2605.26684*, 2026. doi: 10.48550/arXiv.2605.26684. URL <https://arxiv.org/abs/2605.26684>.
- Lang Feng, Zhenghai Xue, Tingcong Liu, and Bo An. Group-in-Group Policy Optimization for LLM Agent Training. In *Advances in Neural Information Processing Systems*, 2025. doi: 10.48550/arXiv.2505.10978. URL <https://arxiv.org/abs/2505.10978>.
- Zenghuang Fu, Zhaoyang Li, Qiuyuan Ai, Haoyu Wu, Minghui Wu, Chenxu Zhao, Ante Wang, Guannan He, and Changwei Wang. Self-Play Meets Skill Evolution: Self-Evolving Search Agents that Pose, Solve, and Remember. *arXiv preprint arXiv:2607.29468*, 2026. doi: 10.48550/arXiv.2607.29468. URL <https://arxiv.org/abs/2607.29468>.
- Anna Harutyunyan, Will Dabney, Thomas Mesnard, Mohammad Azar, Bilal Piot, Nicolas Heess, Hado van Hasselt, Greg Wayne, Satinder Singh, Doina Precup, and Remi Munos. Hindsight Credit Assignment. In *Advances in Neural Information Processing Systems*, 2019. doi: 10.48550/arXiv.1912.02503. URL <https://arxiv.org/abs/1912.02503>.
- Langzhou He, Junyou Zhu, Yue Zhou, Zhengyao Gu, Junhua Liu, Wei-Chieh Huang, Henry Peng Zou, David Wipf, Philip S. Yu, and Qitian Wu. Resolving Action Bottleneck: Agentic Reinforcement Learning Informed by Token-Level Energy. *arXiv preprint arXiv:2605.14558*, 2026. doi: 10.48550/arXiv.2605.14558. URL <https://arxiv.org/abs/2605.14558>.
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the Knowledge in a Neural Network. *arXiv preprint arXiv:1503.02531*, 2015. doi: 10.48550/arXiv.1503.02531. URL <https://arxiv.org/abs/1503.02531>.
- Bowen Jin, Hansi Zeng, Zhenrui Yue, Jinsung Yoon, Sercan Arik, Dong Wang, Hamed Zamani, and Jiawei Han. Search-R1: Training LLMs to Reason and Leverage Search Engines with Reinforcement Learning. *arXiv preprint arXiv:2503.09516*, 2025. doi: 10.48550/arXiv.2503.09516. URL <https://arxiv.org/abs/2503.09516>.

-
- Semih Kara and Oğuzhan Ersoy. The Role of Feedback Alignment in Self-Distillation. *arXiv preprint arXiv:2606.11173*, 2026. doi: 10.48550/arXiv.2606.11173. URL <https://arxiv.org/abs/2606.11173>.
- Zhaoyang Li, Zenghuang Fu, Qiuyuan Ai, Ping Jiang, Haoyu Wu, Minghui Wu, Chenxu Zhao, Jie Song, and Guannan He. CoEvoKG: Co-Evolving Knowledge Graphs with Self-Evolving Search Agents. *arXiv preprint arXiv:2608.01904*, 2026. doi: 10.48550/arXiv.2608.01904. URL <https://arxiv.org/abs/2608.01904>.
- Bo Liu, Xingchao Liu, Xiaojie Jin, Peter Stone, and Qiang Liu. Conflict-Averse Gradient Descent for Multi-task Learning. In *Advances in Neural Information Processing Systems*, 2021. doi: 10.48550/arXiv.2110.14048. URL <https://arxiv.org/abs/2110.14048>.
- Dongyi Liu, Yifan Niu, Qinwen Wang, Han Xiao, and Jia Li. PiCA: Pivot-Based Credit Assignment for Search Agentic Reinforcement Learning. *arXiv preprint arXiv:2605.09287*, 2026a. doi: 10.48550/arXiv.2605.09287. URL <https://arxiv.org/abs/2605.09287>.
- Yifeng Liu, Shiyuan Zhang, Yifan Zhang, and Quanquan Gu. Self-Distilled Policy Gradient. *arXiv preprint arXiv:2606.04036*, 2026b. doi: 10.48550/arXiv.2606.04036. URL <https://arxiv.org/abs/2606.04036>.
- Zhengxi Lu, Zhiyuan Yao, Zhuowen Han, Zi-Han Wang, Jinyang Wu, Qi Gu, Xunliang Cai, Weiming Lu, Jun Xiao, Yueting Zhuang, and Yongliang Shen. Self-Distilled Agentic Reinforcement Learning. *arXiv preprint arXiv:2605.15155*, 2026. doi: 10.48550/arXiv.2605.15155. URL <https://arxiv.org/abs/2605.15155>.
- Andrei Liviu Nicolicioiu, Mohammad Pezeshki, and Aaron Courville. On-Policy Self-Distillation with Sampled Demonstrations Reduces Output Diversity. *arXiv preprint arXiv:2606.26091*, 2026. doi: 10.48550/arXiv.2606.26091. URL <https://arxiv.org/abs/2606.26091>.
- Qwen, An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tianyi Tang, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yu Wan, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, and Zihan Qiu. Qwen2.5 Technical Report. *arXiv preprint arXiv:2412.15115*, 2024. doi: 10.48550/arXiv.2412.15115. URL <https://arxiv.org/abs/2412.15115>.
- John Schulman, Philipp Moritz, Sergey Levine, Michael Jordan, and Pieter Abbeel. High-Dimensional Continuous Control Using Generalized Advantage Estimation. *arXiv preprint arXiv:1506.02438*, 2015. doi: 10.48550/arXiv.1506.02438. URL <https://arxiv.org/abs/1506.02438>.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal Policy Optimization Algorithms. *arXiv preprint arXiv:1707.06347*, 2017. doi: 10.48550/arXiv.1707.06347. URL <https://arxiv.org/abs/1707.06347>.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. DeepSeekMath: Pushing the Limits of Mathematical Reasoning in Open Language Models. *arXiv preprint arXiv:2402.03300*, 2024. doi: 10.48550/arXiv.2402.03300. URL <https://arxiv.org/abs/2402.03300>.
- Noah Shinn, Federico Cassano, Edward Berman, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language Agents with Verbal Reinforcement Learning. *arXiv preprint arXiv:2303.11366*, 2023. doi: 10.48550/arXiv.2303.11366. URL <https://arxiv.org/abs/2303.11366>.
- Mohit Shridhar, Xingdi Yuan, Marc-Alexandre Côté, Yonatan Bisk, Adam Trischler, and Matthew Hausknecht. ALFWorld: Aligning Text and Embodied Environments for Interactive Learning. In *International Conference on Learning Representations*, 2021. doi: 10.48550/arXiv.2010.03768. URL <https://arxiv.org/abs/2010.03768>.

-
- Hui-Ze Tan, Xiao-Wen Yang, Hao Chen, Jie-Jing Shao, Yi Wen, Yuteng Shen, Weihong Luo, Xiku Du, Lan-Zhe Guo, and Yu-Feng Li. Hindsight Credit Assignment for Long-Horizon LLM Agents. *arXiv preprint arXiv:2603.08754*, 2026. doi: 10.48550/arXiv.2603.08754. URL <https://arxiv.org/abs/2603.08754>.
- Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandilekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An Open-Ended Embodied Agent with Large Language Models. *arXiv preprint arXiv:2305.16291*, 2023. doi: 10.48550/arXiv.2305.16291. URL <https://arxiv.org/abs/2305.16291>.
- Hao Wang, Guozhi Wang, Han Xiao, Yufeng Zhou, Yue Pan, Jichao Wang, Ke Xu, Yafei Wen, Xiaohu Ruan, Xiaoxin Chen, and Honggang Qi. Skill-SD: Skill-Conditioned Self-Distillation for Multi-turn LLM Agents. *arXiv preprint arXiv:2604.10674*, 2026a. doi: 10.48550/arXiv.2604.10674. URL <https://arxiv.org/abs/2604.10674>.
- Jiaqi Wang, Wenhao Zhang, Weijie Shi, Yaliang Li, and James Cheng. TCOd: Exploring Temporal Curriculum in On-Policy Distillation for Multi-turn Autonomous Agents. *arXiv preprint arXiv:2604.24005*, 2026b. doi: 10.48550/arXiv.2604.24005. URL <https://arxiv.org/abs/2604.24005>.
- Zi-Han Wang, Zhengxi Lu, Zhiyuan Yao, Jinyang Wu, Jie Wu, Zhengzhou Cai, Yueqing Sun, Ziang Ye, Linji Hao, Qi Gu, Xunliang Cai, Yongliang Shen, and Yujiu Yang. AgentOPSD: Recursive Self-Distillation for Agentic Reinforcement Learning. *arXiv preprint arXiv:2608.05987*, 2026c. doi: 10.48550/arXiv.2608.05987. URL <https://arxiv.org/abs/2608.05987>.
- Chenxu Yang, Chuanyu Qin, Qingyi Si, Minghui Chen, Naibin Gu, Dingyu Yao, Zheng Lin, Weiping Wang, Jiaqi Wang, and Nan Duan. Self-Distilled RLVR. *arXiv preprint arXiv:2604.03128*, 2026. doi: 10.48550/arXiv.2604.03128. URL <https://arxiv.org/abs/2604.03128>.
- Shunyu Yao, Howard Chen, John Yang, and Karthik Narasimhan. WebShop: Towards Scalable Real-World Web Interaction with Grounded Language Agents. *arXiv preprint arXiv:2207.01206*, 2022. doi: 10.48550/arXiv.2207.01206. URL <https://arxiv.org/abs/2207.01206>.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing Reasoning and Acting in Language Models. In *International Conference on Learning Representations*, 2023. doi: 10.48550/arXiv.2210.03629. URL <https://arxiv.org/abs/2210.03629>.
- Tianhe Yu, Saurabh Kumar, Abhishek Gupta, Sergey Levine, Karol Hausman, and Chelsea Finn. Gradient Surgery for Multi-Task Learning. In *Advances in Neural Information Processing Systems*, 2020. doi: 10.48550/arXiv.2001.06782. URL <https://arxiv.org/abs/2001.06782>.
- Xin Yu, Liuchen Liao, Yiwen Zhang, Yingchen Yu, Lingzhou Xue, and Qinzhen Guo. Preference-Based Self-Distillation: Beyond KL Matching via Reward Regularization. *arXiv preprint arXiv:2605.05040*, 2026. doi: 10.48550/arXiv.2605.05040. URL <https://arxiv.org/abs/2605.05040>.
- Ranxu Zhang, Guinan Chen, Chenshaodong, Jinghao Lin, Xiaozhou Xu, Sunzhe, Yanyong Zhang, and Chao Wang. Agentic Reinforcement Learning with Self-Distilled Reward Shaping. *arXiv preprint arXiv:2608.03223*, 2026a. doi: 10.48550/arXiv.2608.03223. URL <https://arxiv.org/abs/2608.03223>.
- Yanfei Zhang, Xu Lin, and Chenglin Wu. StepOPSD: Step-Aware Online Preference Self-Distillation for Agent Reinforcement Learning. *arXiv preprint arXiv:2605.27140*, 2026b. doi: 10.48550/arXiv.2605.27140. URL <https://arxiv.org/abs/2605.27140>.
- Siyan Zhao, Zhihui Xie, Mengchen Liu, Jing Huang, Guan Pang, Feiyu Chen, and Aditya Grover. Self-Distilled Reasoner: On-Policy Self-Distillation for Large Language Models. *arXiv preprint arXiv:2601.18734*, 2026. doi: 10.48550/arXiv.2601.18734. URL <https://arxiv.org/abs/2601.18734>.

Table 3: One UniOPSD iteration. All teacher scoring and advantage construction are performed without gradients. $\bar{\rho}$ and n_{prev} denote the stored historical state.

1	Freeze the behavior checkpoint π_b and sample trajectory groups for the current tasks. Record trajectory returns, discounted step returns, anchor assignments, response masks, and student log probabilities.
2	Select a successful peer for each task group. Give its extracted action sequence to failed trajectories only. Score the same sampled tokens with π_b under this prefix and compute Eq. (3).
3	Construct A_k^E and the weighted A_k^S using Appendix A.2. Compute d_k over every row of each anchor and the scale s over $\mathcal{T}$. Form A^T using Eq. (4).
4	Construct $\mathcal{E}$, $\mathcal{T}$, and $\mathcal{B}$. Compute the precision proxies and their separate median normalizations, with source-specific fallback populations.
5	Read the stored correlation state. Compute $\hat{\rho}_m$, $\bar{c}_m$, and c_k , including the all-outcome endpoint. Form the fused step value F_k .
6	If the current $\mathcal{B}$ yields a valid Pearson correlation, update $\bar{\rho}$ and n_{prev} for the next iteration. This update does not change the already formed c_k .
7	Compute the scheduled token weights and $\hat{A}_{k,t}$ from Eqs. (9)–(10), retaining the response mask.
8	Optimize the clipped policy surrogate with the configured reward penalties and regularization. Keep the stored log probabilities, gaps, and advantages fixed during this update.

A METHOD SPECIFICATION AND ADDITIONAL ANALYSIS

A.1 TRAINING PROCEDURE

Table 3 specifies one training iteration. All comparisons use the current rollout batch, whereas the global correlation state is inherited from earlier valid batches. A batch with fewer than two jointly available rows, or zero variance in either comparison vector, supplies no valid correlation measurement. In that case, the stored average and its associated row count remain unchanged. The first valid measurement initializes the average directly. Later valid measurements update it as $\bar{\rho} \leftarrow \beta \bar{\rho} + (1 - \beta)\rho$, using the EMA decay defined in Section 4.2. The row count is that of the latest valid batch, not a cumulative sample count.

A.2 BACKBONE NORMALIZATION AND EPISODE-BASELINE CONVENTIONS

All six reported runs set `algorithm.gigpo.mode=mean_norm`, which selects $F_{\text{norm}} \equiv 1$ for both GIGPO branches, and use $\omega = 1$. The alternative `mean_std_norm` divides the centered values by their group standard deviations and is not used in these runs. The coefficient ω is absorbed into A_k^S throughout the Method, including teacher scale matching, so it must not be applied a second time in the fusion formula.

The trajectory-level episode definition in Eq. (1) compares each trajectory once. The inherited implementation instead computes its default episode baseline across flattened response rows within each task. Let $\mathcal{J}_x$ contain these rows and let e_k be the sum of token rewards supplied to the episode branch for row k . The actual backbone contributions used by the reported runs are

$$A_k^E = e_k - b_x, \quad b_x = \begin{cases} \frac{1}{|\mathcal{J}_x|} \sum_{j \in \mathcal{J}_x} e_j, & |\mathcal{J}_x| \geq 2, \\ 0, & |\mathcal{J}_x| = 1, \end{cases} \quad A_k^S = \omega \left(R_k - \frac{1}{|g(k)|} \sum_{j \in g(k)} R_j \right). \quad (13)$$

Here R_k is the discounted return-to-go after any configured row-level invalid-action penalty. Both scalar contributions are repeated over the response’s valid tokens. If $e_k = G_{i(k)}$, a trajectory represented by M_i rows contributes M_i copies of its return to b_x , giving $b_x = \sum_{i \in \mathcal{I}_x} M_i G_i / \sum_{i \in \mathcal{I}_x} M_i$ for a nonsingleton task group. Thus this baseline can differ from the equal-trajectory mean even though both use $F_{\text{norm}} \equiv 1$. Row-level penalties can also make e_k vary within a trajectory. UniOPSD leaves this supplied episode contribution unchanged; the algebraic properties in Section 4.4 hold

for either baseline convention. Controlled comparisons must retain the same sampling, reward, and baseline conventions.

A.3 MASKING, POPULATIONS, AND NUMERICAL CONVENTIONS

The three populations in the method have different purposes. $\mathcal{E}$ measures whether an anchor offers at least two rows with nonzero return variance. $\mathcal{T}$ detects a nonzero token gap, so a supplied prefix that leaves every token score unchanged does not create teacher availability. Their intersection $\mathcal{B}$ is the population on which both proxies are normalized and their correlation is measured. In contrast, scale matching uses all of $\mathcal{T}$. Replacing that population by $\mathcal{B}$ changes the algorithm whenever taught rows lack return variation.

Peer extraction uses action-bearing spans in trajectory order and excludes the peer’s full intermediate reasoning. Where responses use search and answer tags, those tagged spans supply the corresponding action text. Repeated copies of a trajectory step created by batch padding are removed from the peer action list. A peer without extractable actions yields no usable prefix. Prefix limits and prompt truncation determine what the teacher actually sees. Together with the extracted peer actions and sampled response tokens, they specify the information used to form the gap before fusion.

The anchor mean for d_k includes untaught rows. Therefore, an untaught row with $\bar{\delta}_k = 0$ can have $d_k \neq 0$ if other rows in its anchor have nonzero gaps. Its availability mask still forces $c_k = 1$, preventing this centering effect from creating a teacher contribution on that row. This also means that the effective teacher contribution $(1 - c_k)A_k^T$ need not sum to zero within an anchor, even though the unweighted d_k does. Neither anchor centering nor retention of the episode term implies conservation of total credit.

For $n_k \geq 2$, anchor return variance uses the sample denominator $n_k - 1$. Token-gap variance instead uses the population denominator L_k over valid response tokens. The standard deviations in Eq. (4) use sample conventions. Response padding is excluded from each token reduction. A singleton anchor has zero return variance and zero centered teacher gap. If the scale cannot be estimated, setting $s = 0$ makes every teacher step value zero, but teacher availability remains determined by the original gap. In particular, availability refers to the presence of the input signal, not a proof that the processed branch is informative.

A zero scale does not automatically restore the outcome-only step branch. If a nonzero gap keeps a row in $\mathcal{T}$ and stored correlation gives $c_k < 1$, then $A_k^T = 0$ yields $F_k = c_k A_k^S$. The rule can therefore attenuate a nonzero outcome step value without contributing nonzero teacher step credit.

The median normalizations divide each source by a typical value in the same jointly available population. This avoids directly comparing quantities with incompatible raw units. When that population is empty, the environmental denominator uses $\mathcal{E}$ and the teacher denominator uses $\mathcal{T}$. If a source is entirely absent, its normalized proxy remains zero. The medians are computed over rows, as in the implementation, so an anchor with more rows can contribute repeatedly to the environmental proxy distribution. Group-weighted normalization would be a distinct variant.

A.4 INTERPRETATION OF THE CORRELATION RULE

The correlation rule imposes a particular response to observed association. At zero shrunken correlation, $q_m = 0$ and $\bar{c}_m = 1$. Step fusion then selects the outcome branch everywhere. The nonnegative truncation treats negative association as a reason to reject the teacher step contribution, rather than reverse its sign. With $u = 0.5$, Eq. (7) simplifies to $\bar{c}_m = 1 - 2q_m$ before endpoint handling. Increasing positive association consequently reduces the nominal outcome weight in this setting. Neither this monotonic behavior nor the squared-correlation form estimates causal usefulness.

Within $\mathcal{B}$, the proxy ratio changes the row weight around this global setting. If $z_k^S = z_k^T$, the resulting c_k equals $\bar{c}_m$. Separate median normalization does not require these two normalized values to coincide on any particular row, and it does not guarantee that the batch median of c_k equals $\bar{c}_m$. On teacher-only rows, the method applies the global shrinkage directly because there is no nonzero environmental precision with which to arbitrate. The same global decision can therefore have different effects on the jointly available and teacher-only populations.

The uncertainty subtraction in Eq. (6) is deliberately described as heuristic. The averaging horizon H does not count independent replications, and the most recent row count does not measure the effective sample size of the average. Rows share trajectories, peers, and often anchors, while successive policies and task mixtures can change the correlation. The current correlation measurement must not be mistaken for the lagged value used to construct the current weights.

A.5 PROOF OF THE STATED PROPERTIES

For any two real values A_k^S, A_k^T and $c_k \in [0, 1]$, their convex combination satisfies

$$\min(A_k^S, A_k^T) \leq F_k \leq \max(A_k^S, A_k^T). \quad (14)$$

The clipped token weight obeys $|w_{k,t} - 1| \leq \epsilon_w$. Subtracting the unmodulated advantage gives

$$\hat{A}_{k,t} - (A_k^E + F_k) = \lambda_m F_k (w_{k,t} - 1). \quad (15)$$

Taking absolute values proves Eq. (12). Setting $c_k = 1$ gives $F_k = A_k^S$, and additionally setting $\lambda_m = 0$ removes the multiplier, proving recovery of $A_k^E + A_k^S$. These statements concern the constructed advantage. They require no distributional assumptions and imply no equivalence between the optimized policy and an outcome-only optimum.

The distinction between branch direction and total advantage matters even under the perturbation bound. For example, let $A_k^E = 0.95$, $F_k = -1$, $\lambda_m = 0.5$, and $w_{k,t} = 0.8$. The unmodulated total is -0.05 , while the modulated total is 0.05 . Thus a bounded multiplier can reverse the total advantage near cancellation, even though its positive factor leaves the direction of the fused step contribution unchanged. Similarly, step fusion can change the total advantage whenever the two branches differ. No total-sign guarantee follows from Proposition 1.

A.6 ABLATION CONFIGURATIONS

The outcome-only control in Table 2 sets both $c_k \equiv 1$ and $\lambda_m \equiv 0$, recovering GiGPO. Its episode and anchor-relative step terms remain active, while the hindsight branch and token modulation are removed. GRPO retains only the trajectory-level outcome comparison. The inverse-variance variant retains hindsight credit and token modulation, but removes the historical correlation prior. With unit prior and no extra gate, it uses $c_k = z_k^S / (z_k^S + z_k^T)$ when either source is available, with the deterministic all-absent fallback. These definitions distinguish removal of the teacher from a change in how the two local estimates are combined.

The frozen-correlation control replaces the effective correlation input $\hat{\rho}_m$ in Eq. (6) by ρ_0 at every update, with $\rho_0 = 0.25$. It retains the same u , the mapping in Eq. (7), local precision adjustment, availability masks, and token schedule. Thus the global correlation input is fixed, while the row weights c_k can still vary with local evidence.

B EXPERIMENTAL DETAILS AND PROVENANCE

Implementation settings. Training was conducted on eight NVIDIA A100 GPUs. ALFWorld and WebShop use exact anchor grouping within each task; Search-QA uses the backbone’s similarity grouping with threshold 0.9. For credit-signal analysis, we use $F_{\text{norm}} \equiv 1$ (mean_norm) and $\omega = 1$, with the episode-baseline convention specified in Appendix A.2. The shared UniOPSD parameters are in Table 4. The actor learning rate is 10^{-6} , with one PPO epoch per update and PPO clipping radius $\epsilon_{\text{PPO}} = 0.2$. Rollout temperature is 1.0. ALFWorld and WebShop validation uses sampling at temperature 0.4; Search-QA validation disables sampling with temperature zero. Training starts from the corresponding instruction-tuned Qwen2.5 model. The peer teacher is a conditional branch of the behavior policy; it is not a separately trained checkpoint. The training objective also retains the implementation’s reference-policy KL, entropy, and invalid-action terms. These regularizers are distinct from a privileged-teacher auxiliary distillation loss.

Loss aggregation and dual clipping. The actor aggregates valid-token losses by their mean. If $\ell_{k,t}$ denotes the minimum inside Eq. (11), the configured implementation replaces it by $\max(\ell_{k,t}, 3\hat{A}_{k,t})$ when $\hat{A}_{k,t} < 0$, and leaves it unchanged otherwise. This dual-clipping floor, together with the regularizers above, is inherited from the training backbone and should be matched across ablations.

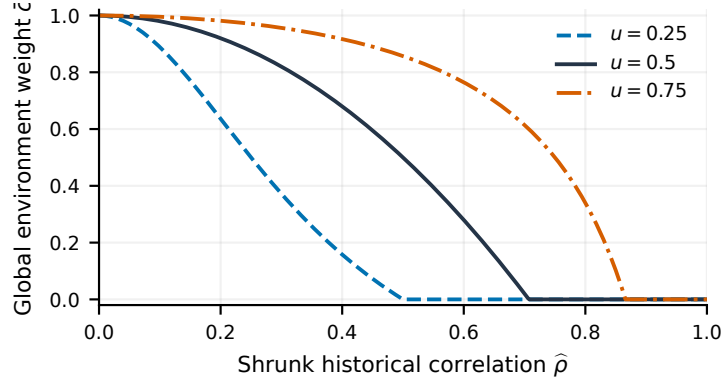


Figure 4: Analytic response of the global correlation controller, not empirical performance. The main method uses $u = 0.5$; alternative settings illustrate its sensitivity. The squared correlation is capped below u as specified in the algorithm. Row-level precision ratios further modify these global weights.

Table 4: UniOPSD parameter settings for credit-signal analysis. The horizon H is derived from the EMA decay; the numerical margin η and stability constant ε serve different roles despite having the same value.

Parameter	Symbol	Value
Global sensitivity	u	0.5
Correlation EMA decay	β	0.9
Correlation shrinkage strength	κ	2.33
Derived averaging horizon	$H = (1 - \beta)^{-1}$	10
Initial token modulation	λ_0	0.5
Token modulation decay duration	T_{decay}	100 updates
Token-weight clipping radius	ϵ_w	0.2
Numerical stability constant	ε	10^{-6}
Numerical endpoint margin	η	10^{-6}

Table 5: Training settings for credit-signal analysis at both model scales within each environment. Prompt and response lengths are token limits per model call. The PPO minibatch size counts flattened training rows rather than complete episodes.

Setting	ALFWorld	WebShop	Search-QA
Training tasks per batch	16	16	128
Rollouts per task	8	8	8
Validation batch size	128	128	512
Maximum interaction turns	50	15	4
History length	2	2	4
Maximum prompt tokens	2048	4096	4096
Maximum response tokens	512	512	512
PPO minibatch size	256	64	256
Reference KL coefficient	0.01	0.01	0.001
Entropy coefficient	0.001	0.001	0.001
Invalid-action coefficient	0.1	0.1	0.01
Validation interval (updates)	5	5	5
Validation temperature	0.4	0.4	0
Similarity-based anchors	No	No	Yes (0.9)

Task and teacher information. ALFWorld uses the configured in-distribution split and WebShop uses the implementation’s small-catalog setting. Search-QA uses the configured Natural Questions and HotpotQA validation mixture with top-three retrieval and at most four interaction turns. The

Table 6: Runtime comparison with a local SDAR reproduction on ALFWorld-3B over 150 retained updates. Student tokens total the prompt and response tokens in the training batches. Training time excludes validation and checkpoint saving. Reductions use SDAR as the reference.

Method	Student tokens (M, cumulative)	Teacher-stage time (s/update)	Training time (s/update)
SDAR	432.61	59.22	427.63
UniOPSD	407.76	22.11	407.43
Reduction (%)	5.7	62.7	4.7

successful peer’s action sequence is retained for interactive environments. For Search-QA, both search queries and the successful final answer are present in the training teacher context. The student rollout and validation policy receive neither this hindsight prefix nor the peer answer. Nevertheless, answer-containing teacher context is a stronger training information source than search queries alone.

Evaluation and aggregation. Learning curves display raw online validation measurements at five-update intervals. Credit-signal statistics average valid batch-level measurements over updates 1–150, using the populations defined in Appendix C. Benchmark aggregates in Table 1 and the online validation curves summarize their respective evaluation records. Since the source values are rounded console outputs, the reported rates and diagnostic means should not be interpreted as higher-precision episode-level estimates.

Runtime comparison with SDAR. Table 6 compares the ALFWorld-3B UniOPSD run in Figure 3 with our local reproduction of SDAR (Lu et al., 2026). Both use Qwen2.5-3B-Instruct, eight NVIDIA A100-SXM4-80GB GPUs, 16 tasks per batch, eight rollouts per task, and environment seed zero. Model, data, environment, learning rate, minibatch size, and parallelism settings match. SDAR retains its GRPO backbone and gated distillation loss, while UniOPSD uses GiGPO with correlation-guided peer fusion.

Statistics cover the 150 updates retained in each training path. SDAR combines original updates 1–45 with updates 46–150 after resuming from checkpoint 45. The discarded original updates 46–59 and time outside the recorded updates are excluded. Within each update, we subtract validation and checkpoint-saving time from the logged iteration time.

The teacher stage includes prefix construction, tokenization, and likelihood scoring. Student token totals include repeated history and rows copied for batch divisibility, but exclude privileged teacher prefixes and repeated forward or backward passes. Each method has one historical training path, executed on different dates. The comparison describes observed costs of the two methods; it does not isolate the effect of the teacher source or establish convergence efficiency at matched success rates across training seeds.

C DEFINITIONS OF THE DIAGNOSTIC MEASUREMENTS

Let $\mathcal{B}_m$ contain rows with a teacher gap and a nondegenerate anchor return group at update m . The logged step correlation is the Pearson correlation of A^S and A^T restricted to $\mathcal{B}_m$, when both vectors have nonzero variance. Sign disagreement is the fraction of these rows with $\text{sign}(A_k^S) \neq \text{sign}(A_k^T)$. Table 7 averages each logged statistic over updates 1–150; when a statistic is undefined at an update it is omitted rather than set to zero. These are means of batch statistics, not a pooled correlation or a pooled episode-level frequency.

The log also measures the fraction of all rows satisfying $A_k^S = 0$ and $F_k \neq 0$. This counts algebraic activation of a previously zero step term. It neither measures additional correct actions nor proves improvement in return estimation. Similarly, a large correlation can reflect shared rollout selection and common outcomes. Source-level association, evidence availability, and downstream learning benefit must be measured separately.

Table 7: Step-signal statistics across model scales and environments over updates 1–150. Availability is the fraction of rows in $\mathcal{B}_m$; disagreement is conditional on that set. The final column is the all-row mean environment mixing weight and consequently includes rows without a teacher.

Environment	Model	Correlation	Disagreement (%)	Availability (%)	Mean c_k
ALFWorld	3B	0.315	37.8	32.8	0.897
ALFWorld	7B	0.308	36.8	27.0	0.928
WebShop	3B	0.302	26.9	10.1	0.976
WebShop	7B	0.272	30.0	12.9	0.974
Search-QA	3B	0.371	26.8	11.7	0.950
Search-QA	7B	0.446	20.6	9.9	0.949

D PROMPT TEMPLATES AND QUALITATIVE EXAMPLES

We provide the interaction prompts used by the agent and the privileged prefix used by the training teacher, followed by selected successful validation excerpts. The interaction templates come from the shared agent backbone. Braced fields are populated by the environment; line wrapping and typography are normalized for readability. The examples show observable decisions without introducing additional performance measures.

D.1 STUDENT INTERACTION PROMPTS

The following are the history-bearing templates. At the first interaction, the corresponding initial template omits the history; ALFWorld’s initial observation also contains the task description. The student sees its own interaction context and the available environment actions.

ALFWorld Interaction Prompt

You are an expert agent operating in the ALFRED Embodied Environment. Your task is to:

`{task_description}`

Prior to this step, you have already taken `{step_count}` step(s). Below are the most recent

`{history_length}` observations and the corresponding actions you took: `{action_history}`

You are now at step `{current_step}` and your current observation is: `{current_observation}`

Your admissible actions of the current situation are: `[{admissible_actions}]`.

Now it’s your turn to take an action.

You should first reason step-by-step about the current situation. This reasoning process MUST be enclosed within `<think>` `</think>` tags.

Once you’ve finished your reasoning, you should choose an admissible action for current step and present it within `<action>` `</action>` tags.

WebShop Interaction Prompt

You are an expert autonomous agent operating in the WebShop e-commerce environment.

Your task is to: `{task_description}`.

Prior to this step, you have already taken `{step_count}` step(s). Below are the most recent

`{history_length}` observations and the corresponding actions you took: `{action_history}`

You are now at step `{current_step}` and your current observation is: `{current_observation}`.

Your admissible actions of the current situation are:

`[{available_actions}]`.

Now it’s your turn to take one action for the current step.

You should first reason step-by-step about the current situation, then think carefully which admissible action best advances the shopping goal. This reasoning process MUST be enclosed within `<think>` `</think>` tags.

Once you’ve finished your reasoning, you should choose an admissible action for current step and present it within `<action>` `</action>` tags.

Search-QA Interaction Prompt

You are an expert agent tasked with answering the given question step-by-step.

Your question: {task_description}

Prior to this step, you have already taken {step_count} step(s). Below is the interaction history where `<search>` wrapped your past search queries and `<information>` wrapped the corresponding search results returned by the external search engine. History:

{memory_context}

Now it's your turn to respond for the current step.

You should first conduct reasoning process. This process MUST be enclosed within `<think>` tags.

After completing your reasoning, choose only one of the following actions (do not perform both):

(1) If you find you lack some knowledge, you can call a search engine to get more external information using format: `<search>` your query `</search>`.

(2) If you have enough knowledge to answer the question confidently, provide your final answer within `<answer>` tags, without detailed illustrations. For example, `<answer>`Beijing`</answer>`.

D.2 PRIVILEGED TEACHER CONTEXT

During training, UniOPSD selects the first successful peer from the same task group and constructs the prefix below for failed trajectories. The numbered entries are placeholders for the peer's extracted actions, in interaction order. ALFWorld and WebShop retain the command text inside each `<action>` span; Search-QA retains the `<search>` or `<answer>` span, including the successful final answer. Peer reasoning and retrieved document contents are not copied into this prefix.

Privileged Hindsight Prefix

[Privileged Hindsight Information]

Another attempt at this exact task succeeded. Its action sequence was:

1. {first_peer_action}
 2. {second_peer_action}
 - ...
 - {n}. {last_peer_action}
-

The teacher input concatenates this prefix with the student's original serialized prompt and scores the same sampled response. Both likelihood evaluations use the frozen behavior checkpoint. Successful trajectories and task groups without a usable successful peer keep the original student input. The prefix is restricted to teacher scoring during training; rollout and validation use the student interaction prompts above, without peer hindsight or an external skill bank. Thus, the additional context changes the evidence available for evaluating a decision, while the sampled decision itself remains fixed.

Table 8: ALFWorld: cleaning an object before placing it at the target.

ALFWorld Successful Interaction
Task: <i>put a clean lettuce in countertop.</i>
Earlier action: clean lettuce 1 with sinkbasin 1
Observation: You clean the lettuce 1 using the sinkbasin 1.
Earlier action: go to countertop 1
Observation: You arrive at countertop 1. ...
<think> Given the current situation, I have already cleaned the lettuce 1 using the sinkbasin 1. The next step should be to move the cleaned lettuce 1 to the countertop 1. The countertop 1 contains various items, but the lettuce 1 is not currently there. I need to move the lettuce 1 to the countertop 1 to complete the task. </think>
<action> move lettuce 1 to countertop 1 </action>

Table 9: WebShop: selecting the requested color and size before purchase.

WebShop Successful Interaction
Task: <i>Find me machine wash men’s t-shirts with long sleeve with color: swamp, and size: 3x-large big tall, and price lower than 70.00 dollars.</i>
Earlier action: click[swamp]
Earlier action: click[3x-large big tall]
Observation: ... Legendary Whitetails Men’s Non-Typical Long Sleeve T-Shirt ... Price: \$10.52 to \$40.5 ... Buy Now.
<think> Based on the current observation, the search results show men’s t-shirts with the color ‘swamp’ and size ‘3x-large big tall’. The price range is \$10.52 to \$40.50. The task is to find a t-shirt within this price range. The current action of clicking on ‘swamp’ and ‘3x-large big tall’ is the first step. The next logical action would be to click on ‘buy now’ to purchase the t-shirt. I will now click on ‘buy now’ to initiate the purchase process. </think>
<action> click[buy now] </action>

Table 10: Search-QA: retrieving evidence about both entities before answering.

Search-QA Successful Interaction
Question: <i>Vocelli Pizza and Noble Roman’s serve which kind of food?</i>
<search> Vocelli Pizza and Noble Roman’s serve which kind of food </search>
<information> Doc 1 (Title: “Noble Roman’s”) Noble Roman’s is a pizza company based in Indianapolis, Indiana. ... </information>
<search> Vocelli Pizza food type </search>
<information> Doc 1 (Title: “Vocelli Pizza”) Vocelli Pizza (formerly Pizza Outlet) is a pizzeria based in Pittsburgh, Pennsylvania. ... </information>
<think> From the information provided, we know that Noble Roman’s is a pizza company. Similarly, Vocelli Pizza is also described as a pizzeria. Therefore, both of these establishments serve pizza. </think>
<answer> pizza </answer>

D.3 SELECTED SUCCESSFUL EXAMPLES

The following transcripts show selected successful Qwen2.5-3B-Instruct UniOPSD validation episodes. Each presents the task, retained interaction history, and final response. Shaded passages reproduce the model’s logged final-step reasoning; colored tags distinguish reasoning, actions, retrieved information, and answers. Observations are shortened with ellipses, and earlier actions are shown only where retained in the log.