

Overfitting Mitigation via Singular Value Decomposition in Minimum Bayes Risk Decoding

Riza Setiawan Soetedjo¹, Yusuke Sakai¹, Hidetaka Kamigaito¹,
Katsuhiko Hayashi^{1,2}, Taro Watanabe¹

¹Nara Institute of Science and Technology (NAIST) ²The University of Tokyo

riza.setiawan_soetedjo.rs6@naist.ac.jp

{sakai.yusuke.sr9, kamigaito.h, taro.watanabe}@is.naist.jp

katsuhiko-hayashi@g.ecc.u-tokyo.ac.jp

Abstract

Minimum Bayes Risk (MBR) decoding enables high-quality text generation by selecting the hypothesis that maximizes a utility metric over sampled pseudo-references. However, it is highly susceptible to metric overfitting: it can irregularly inflate the chosen utility metric at the direct expense of other unoptimized evaluation metrics. To mitigate this, we introduce SVD-MBR, which frames the pairwise utility matrix as a noisy information signal. By computing a low-rank approximation via Singular Value Decomposition (SVD) and retaining only the top- k components, we effectively decouple true consensus from metric noise. Experiments demonstrate that SVD-MBR successfully regularizes decoding, yielding substantial gains across a range of generalized metrics. Furthermore, we reveal that this denoising is metric-dependent: neural metrics encode a robust low-rank consensus ideal for SVD, whereas surface-level metrics struggle to separate signal from metric noise. Our code is available at <https://github.com/naist-nlp/mbr-svd>.

1 Introduction

Text generation remains a fundamental yet challenging task. Typically, models rely on maximum a posteriori (MAP) decoding, which generates a high-probability sequence conditioned on the preceding context. However, recent studies have demonstrated superior performance using sampling-based generation methods (Eikema and Aziz, 2020; Suzgun et al., 2023), including Minimum Bayes Risk (MBR) decoding (Kumar and Byrne, 2004).

MBR decoding chooses the optimal hypothesis out of the samples based on two assumptions: (1) the model’s distribution adequately approximates the true distribution; (2) the selected text exhibits the highest consensus with the other samples. This process requires a candidate pool, a set of pseudo-references to act as guides, and a utility function

Source	The committee decided to postpone the meeting until next week.		
Reference	Der Ausschuss beschloss, die Sitzung auf nächste Woche zu verschieben.		
MAP	Der Ausschuss beschloss, die Sitzung auf nächste Woche zu verschieben.		
MBR	Das Komitee hat entschieden das Treffen bis zur nächsten Woche zu postponieren.		
Utility Function	chrF (Popović, 2015)		
Evaluation	Metric	MAP	MBR
	chrF	52.8	54.2 (↑)
	COMET	77.3	76.3 (↓)
	BLEURT	56.5	56.4 (↓)

Table 1: Illustration of metric overfitting in MBR decoding. While MBR decoding improves performance on the utility function metric, i.e., chrF (Popović, 2015), it degrades performance on other evaluation metrics.

to evaluate them. Ideally, pseudo-references reliably reflect the true distribution, and the utility function is resistant to noise. In practice, however, pseudo-references are noisy, and metrics struggle to discern subtle variations. We formally define this “noise” as the metric bias that causes MBR decoding to overfit when it excessively maximizes the utility function. Consequently, the calculation of expected scores is highly susceptible to this overfitting, where outlier scores in the pairwise matrix cause the selection to inherit specific biases of the utility metric (Freitag et al., 2023).

Previous studies have empirically reported this overfitting problem. Freitag et al. (2022) evaluated multiple metrics as utility functions given the observation that while scores for the specific metric used as the utility function increased compared to beam search, unoptimized metrics stagnated or degraded. We illustrated this issue in Table 1. Deguchi et al. (2024) observed a similar tendency, showing that across multiple MBR variants, the selected text consistently improves the most with the target utility

metric at the expense of other metrics.

In this study, we address this gap by a novel, intrinsic approach to mitigate metric overfitting. We hypothesize that metric overfitting is driven by noise within the internal $N \times M$ pairwise utility matrix. To counter this, we introduce SVD-MBR, which utilizes Singular Value Decomposition (SVD) to denoise the matrix prior to hypothesis selection. We demonstrate that metric overfitting is an inherent limitation rather than a byproduct of specific datasets, MBR variants, or utility metrics. Our empirical evaluation for SVD-MBR under MT and Summarization tasks shows that applying a low-rank approximation successfully filters out metric hallucinations, reinforcing our proposed method to denoise the pairwise matrix using SVD as an effective solution to the overfitting problem.

2 Background and Related Work

MBR decoding. The goal of MBR decoding is to select the hypothesis that maximizes the expected utility over pseudo-references. Given a candidate set of hypotheses $\mathcal{H} = \{h_1, \dots, h_{|\mathcal{H}|}\}$ and a set of pseudo-references $\mathcal{Y} = \{y_1, \dots, y_{|\mathcal{Y}|}\}$ sampled from a generation model θ conditioned on a source input x , we rely on a Monte Carlo (MC) estimate, as the exact expected risk over the full model distribution is intractable. We define an evaluation metric serves as the utility function $u(h, y)$ to evaluate each candidate against each pseudo-reference, yielding a pairwise utility matrix $\mathbf{M} \in \mathbb{R}^{|\mathcal{H}| \times |\mathcal{Y}|}$ where $m_{i,j} = u(h_i, y_j)$, expressed as:

$$\mathbf{M} = \begin{bmatrix} m_{1,1} & m_{1,2} & \cdots & m_{1,|\mathcal{Y}|} \\ m_{2,1} & m_{2,2} & \cdots & m_{2,|\mathcal{Y}|} \\ \vdots & \vdots & \ddots & \vdots \\ m_{|\mathcal{H}|,1} & m_{|\mathcal{H}|,2} & \cdots & m_{|\mathcal{H}|,|\mathcal{Y}|} \end{bmatrix}. \quad (1)$$

The decision rule selects the optimal hypothesis h^* that maximizes this expected utility:

$$h^* = \arg \max_{h_i \in \mathcal{H}} \frac{1}{|\mathcal{Y}|} \sum_{j=1}^{|\mathcal{Y}|} m_{i,j}. \quad (2)$$

Ideally, the pseudo-reference set $\mathcal{Y}$ would perfectly capture the true distribution, allowing $\mathbf{M}$ to yield an unbiased estimate of the expected utility. In practice, a finite sample cannot fully represent this distribution, inherently introducing noise into the calculation. Previous studies (Freitag et al., 2023;

Kamigaito et al., 2025) have demonstrated that this MC estimation is highly sensitive to the chosen sampling method and utility function. Crucially, these components dictate the topology of the pairwise matrix $\mathbf{M}$, and consequently, its susceptibility to the metric overfitting problem.

Overfitting in MBR decoding. MBR has resurfaced as a strong alternative to MAP decoding, largely because MAP’s reliance on maximizing sequence probability often fails to reflect the true distribution learned by the model (Eikema and Aziz, 2020). However, recent literature highlights that MBR decoding tends to overfitting toward the utility metric. Müller and Sennrich (2021) demonstrated that MBR inherits metric biases, and Freitag et al. (2023) confirmed this problem persists when examining various sampling methods. While Kovacs et al. (2024) have attempted to mitigate this by ensembling Quality Estimation (QE) with MBR, such approaches act as external workarounds to metric bias rather than addressing the internal noise of the pairwise utility matrix itself.

MBR matrix is low-rank. Standard MBR decoding is computationally intensive, requiring utility calculations between every hypothesis and pseudo-reference ($\mathcal{O}(N \times M)$). This bottleneck has prompted multiple studies to focus on decoding efficiency. For instance, Eikema and Aziz (2022) reduced the computational cost to $\mathcal{O}(N \times k)$ by filtering the number of pseudo-references. More fundamentally, Trabelsi et al. (2024) observed that the pairwise matrix exhibits an inherently low-rank structure, justifying a method to subsample candidates and approximate the matrix in fewer iterations. However, prior literature has exclusively exploited this low-rank property for computational speedups. Although matrix factorization techniques such as SVD and Non-Negative Matrix Factorization (NMF) are foundational for denoising and filtering in fields like recommender systems (Wang et al., 2025; Del Corso and Romani, 2019), their application to denoising the MBR matrix has the potential to mitigate metric overfitting.

3 Preliminary Analysis: Overfitting in MBR Decoding

While prior work has identified metric overfitting as a tendency in MBR decoding (§2), its exact behavior across different decoding configurations remains largely under-explored. In this section,

we empirically quantify this overfitting problem by systematically evaluating multiple MBR variants, utility functions, and reference pool sizes.

3.1 Experimental Setup

Datasets. We conducted our experiments on the WMT-22 English-to-German (En→De) test set (Kocmi et al., 2022). We selected this benchmark because it is a standard evaluation dataset widely adopted in recent MBR decoding literature (Trabelsi et al., 2024; Kamigaito et al., 2025). Furthermore, to demonstrate the generalizability of our findings, experiments on additional language directions (De→En) and alternative text generation tasks (XSum) are detailed in Appendix D.

Models and hypotheses generation. We generated all hypotheses for the translation tasks using the M2M100 model (418M parameters) (Fan et al., 2020). To evaluate the scaling behavior of MBR, we generated candidate pools of varying sizes using ϵ -sampling (Hewitt et al., 2022) with $\epsilon = 0.02$. Specifically, we fixed the candidate set size at $|\mathcal{H}| = 256$ and evaluated against pseudo-reference sets of sizes $|\mathcal{Y}| \in \{4, 32, 256\}$. In addition to standard MBR, we experimented with multiple decoding variants, including Model-based MBR (Jinnai et al., 2024) and Probabilistic MBR (PMBR) (Trabelsi et al., 2024). For Model-based MBR, we utilized the normalized log-probabilities of the generation model and fixed both sets at 256 ($|\mathcal{H}| = |\mathcal{Y}| = 256$). Finally, we evaluated the raw ϵ -sampled outputs without MBR as our baseline.

Utility function and evaluation metrics. To comprehensively evaluate generation quality, we employed six distinct metrics: BLEU (Papineni et al., 2002), chrF (Popović, 2015), BLEURT (Sellam et al., 2020), COMET (Rei et al., 2020), COMETKiwi (Rei et al., 2022), and BERTScore (Zhang et al., 2020). To investigate overfitting behaviors across different metrics, we tested every metric except the reference-free COMETKiwi, as the MBR utility function. We define the evaluation metrics not selected as the utility function as *off-target* metrics. To quantify the extent of metric overfitting, we standardize evaluation scores across MBR variants and define $\bar{Z}_{other}$ as the average of these standardized scores for all off-target metrics. This isolates unoptimized performance to quantify generalized quality, allowing us to observe the distinct effects of optimizing for surface-level versus neural-based metrics. Finally,

to establish an upper bound for our evaluations, we include an *Oracle* baseline. It is computed independently for each individual evaluation metric.

3.2 Results

Observation 1: Overfitting occurs across all utility metrics. Table 2 empirically confirms metric overfitting across all evaluated utility functions. Hypotheses consistently achieve relatively higher scores on the utility metric compared to off-target evaluations. For instance, MBR ($|\mathcal{Y}| = 256$) with COMET utility yields a massive +8.004 improvement in COMET relative to the MAP ϵ baseline, yet simultaneously degrades BLEU by -0.500. Furthermore, this collateral damage systematically divides along metric architectures. Optimizing for neural metrics consistently results in a broad degradation of surface-level scores (e.g., dropping BLEU by up to -2.649 under BLEURT utility). Conversely, optimizing for lexical overlap frequently suppresses or degrades improvements measured by neural metrics like COMETKiwi. This divergence demonstrates that the decoding process forces hypotheses to overfit to the specific lexical or semantic features favored by the evaluator’s family, unbalancing overall generation quality.

Observation 2: Overfitting persists across MBR variants. Crucially, the results reveal that metric overfitting is an inherent limitation, not exclusive to standard MBR. When observing alternative decoding strategies, namely PMBR and Model-based MBR, the exact same pattern of utility metric inflation and off-target degradation emerges. For example, PMBR utilizing BLEURT as the utility function ($|\mathcal{Y}| = 256$) substantially boosts its own evaluation by +6.863, but heavily penalizes BLEU (-1.401) compared to the baseline. Similarly, Model-based MBR optimizing for COMET inflates its score by +8.049 while degrading BLEU by -0.813. This confirms that merely altering the sampling mechanism or expectation estimator is insufficient to prevent overfitting to the utility metric.

Observation 3: Scaling the reference size improves baseline quality. Beyond the observed overfitting trends, increasing the pseudo-reference pool ($|\mathcal{Y}|$) consistently leads to improved performance to all evaluation metrics, including both the target utility and off-target scores. For example, in standard MBR utilizing chrF as the utility function, scaling the references from 4 to 256 not only improves chrF from 50.364 to 52.494, but also si-

Decoding Method	Util. Function	$ \mathcal{Y} $	BLEU	chrF	BLEURT	COMET	BERTScore	COMETKiwi	Z_{other}	
MAP ϵ	N/A	-	23.165	50.448	53.758	75.112	78.042	74.082	0.018	
MBR	BLEU	4	21.472 (-1.693)	48.987 (-1.461)	52.098 (-1.660)	72.736 (-2.375)	78.249 (+0.207)	71.689 (-2.392)	-0.708 (-0.726)	
		32	23.462 (+0.297)	50.591 (+0.143)	53.204 (-0.554)	74.598 (-0.514)	78.668 (+0.627)	73.199 (-0.882)	-0.096 (-0.114)	
		256	24.065 (+0.900)	51.024 (+0.575)	53.643 (-0.115)	74.926 (-0.186)	78.819 (+0.777)	73.576 (-0.505)	0.078 (+0.060)	
	chrF	4	21.209 (-1.957)	50.364 (-0.084)	53.334 (-0.424)	73.625 (-1.486)	78.541 (+0.499)	72.626 (-1.456)	-0.352 (-0.370)	
		32	22.958 (-0.207)	52.235 (+1.786)	54.484 (+0.726)	75.415 (+0.304)	79.096 (+1.054)	74.434 (+0.353)	0.336 (+0.318)	
		256	23.254 (+0.089)	52.494 (+2.045)	54.726 (+0.968)	75.715 (+0.603)	79.169 (+1.127)	74.635 (+0.554)	0.442 (+0.424)	
	BLEURT	4	20.516 (-2.649)	49.069 (-1.380)	59.185 (+5.427)	76.338 (+1.226)	78.508 (+0.466)	74.383 (+0.301)	-0.203 (-0.221)	
		32	21.640 (-1.525)	50.192 (-0.257)	60.921 (+7.163)	77.057 (+1.946)	78.873 (+0.831)	75.283 (+1.202)	0.299 (+0.281)	
		256	21.786 (-1.380)	50.364 (-0.085)	61.119 (+7.361)	77.152 (+2.041)	78.906 (+0.864)	75.311 (+1.230)	0.357 (+0.339)	
	COMET	4	21.876 (-1.289)	50.220 (-0.228)	56.463 (+2.705)	82.338 (+7.226)	78.802 (+0.761)	78.414 (+4.333)	0.549 (+0.531)	
		32	22.444 (-0.721)	50.939 (+0.490)	57.109 (+3.351)	83.075 (+7.963)	78.956 (+0.914)	78.839 (+4.757)	0.834 (+0.816)	
		256	22.665 (-0.500)	50.993 (+0.545)	57.101 (+3.343)	83.116 (+8.004)	78.981 (+0.940)	78.945 (+4.863)	0.884 (+0.866)	
	BERTScore	4	21.156 (-2.009)	49.651 (-0.797)	53.021 (-0.737)	73.227 (-1.884)	79.066 (+1.024)	72.225 (-1.856)	-0.428 (-0.446)	
		32	22.947 (-0.218)	51.276 (+0.828)	54.457 (+0.699)	74.745 (-0.367)	79.841 (+1.799)	73.697 (-0.385)	0.291 (+0.273)	
		256	23.200 (+0.035)	51.475 (+1.027)	54.685 (+0.927)	75.051 (-0.060)	79.963 (+1.921)	73.964 (-0.118)	0.399 (+0.382)	
	Probabilistic MBR	BLEU	4	20.116 (-3.049)	47.730 (-2.718)	51.033 (-2.725)	70.590 (-4.521)	77.688 (-0.354)	69.419 (-4.663)	-1.383 (-1.401)
			32	21.606 (-1.559)	48.792 (-1.657)	51.635 (-2.123)	71.691 (-3.421)	78.058 (+0.016)	70.690 (-3.392)	-0.947 (-0.965)
			256	23.182 (+0.017)	50.189 (-0.259)	52.543 (-1.216)	72.919 (-2.192)	78.557 (+0.515)	71.635 (-2.447)	-0.424 (-0.441)
		chrF	4	19.417 (-3.748)	48.145 (-2.304)	51.052 (-2.706)	70.402 (-4.710)	77.749 (-0.293)	69.246 (-4.835)	-1.376 (-1.394)
			32	20.422 (-2.743)	49.419 (-1.029)	51.880 (-1.878)	71.636 (-3.476)	78.143 (+0.102)	70.652 (-3.429)	-0.910 (-0.928)
			256	21.228 (-1.937)	50.275 (-0.173)	52.635 (-1.123)	72.534 (-2.578)	78.398 (+0.356)	71.508 (-2.573)	-0.574 (-0.592)
		BLEURT	4	18.610 (-4.556)	47.140 (-3.309)	53.821 (+0.063)	71.771 (-3.340)	77.540 (-0.502)	70.692 (-3.389)	-1.491 (-1.509)
			32	20.244 (-2.921)	48.763 (-1.685)	57.546 (+3.788)	75.063 (-0.048)	78.274 (+0.233)	73.812 (-0.270)	-0.456 (-0.474)
			256	21.764 (-1.401)	50.382 (-0.067)	60.621 (+6.863)	77.114 (+2.002)	78.948 (+0.907)	75.236 (+1.154)	0.362 (+0.344)
COMET		4	18.422 (-4.743)	46.782 (-3.666)	51.579 (-2.179)	73.141 (-1.971)	77.349 (-0.692)	71.096 (-2.985)	-1.613 (-1.631)	
		32	19.774 (-3.391)	48.443 (-2.005)	54.324 (+0.566)	78.953 (+3.841)	78.093 (+0.052)	75.909 (+1.827)	-0.482 (-0.500)	
		256	22.292 (-0.873)	50.756 (+0.307)	56.967 (+3.209)	82.694 (+7.582)	78.990 (+0.948)	78.687 (+4.605)	0.780 (+0.763)	
BERTScore		4	18.550 (-4.615)	46.751 (-3.697)	50.458 (-3.300)	69.418 (-5.693)	77.578 (-0.464)	68.539 (-5.543)	-1.768 (-1.786)	
		32	19.591 (-3.574)	48.034 (-2.414)	51.578 (-2.180)	70.842 (-4.270)	78.214 (+0.172)	69.763 (-4.318)	-1.233 (-1.250)	
		256	22.613 (-0.552)	50.861 (+0.413)	54.123 (+0.364)	74.409 (-0.702)	79.686 (+1.644)	73.284 (-0.797)	0.126 (+0.108)	
Model-based MBR		BLEU	256	23.972 (+0.807)	50.988 (+0.540)	53.624 (-0.134)	74.840 (-0.272)	78.779 (+0.737)	73.414 (-0.667)	0.044 (+0.026)
		chrF	256	22.955 (-0.210)	52.433 (+1.984)	54.752 (+0.994)	75.662 (+0.551)	79.210 (+1.168)	74.623 (+0.541)	0.414 (+0.396)
		BLEURT	256	21.347 (-1.818)	50.257 (-0.191)	61.244 (+7.486)	77.086 (+1.974)	78.884 (+0.842)	75.262 (+1.180)	0.273 (+0.255)
		COMET	256	22.352 (-0.813)	50.978 (+0.529)	57.194 (+3.436)	83.161 (+8.049)	79.015 (+0.974)	79.005 (+4.924)	0.862 (+0.844)
		BERTScore	256	23.105 (-0.060)	51.483 (+1.034)	54.740 (+0.982)	75.050 (-0.061)	79.963 (+1.921)	73.863 (-0.218)	0.385 (+0.367)
Oracle		N/A	-	41.875	65.930	67.723	85.800	85.050	82.773	3.628

Table 2: Performance of decoding variants on WMT22 En→De ($|\mathcal{H}| = 256$). Absolute differences (in parentheses) are relative to the MAP ϵ baseline. Color gradation indicates the relative magnitude of improvement or degradation.

multaneously lifts the COMET score from 73.625 to 75.715, and BLEU from 21.209 to 23.254. This trend indicates that providing MBR with a larger reference size universally raises the baseline quality of the selected hypotheses, mitigating the most severe score degradations observed at extremely low reference counts. This aligns with findings from previous studies (Eikema and Aziz, 2022; Kamigaito et al., 2025).

Summary. Our preliminary analysis demonstrates that *metric overfitting is a persistent limitation in MBR decoding*. It is not merely an artifact of a specific utility function; rather, it is a bias that persists regardless of the underlying MBR variant employed. Furthermore, while scaling the pseudo-reference pool size generally improves baseline translation quality, generating and evaluating massive candidate pools is computationally prohibitive. More critically, expanding this search space simultaneously provides the decoding algorithm with greater opportunities to exploit the mathematical quirks of the utility metric, thereby exacerbating the overfitting effect. Consequently, a more robust intervention is required to decouple the true consensus from these metric biases. Moreover, we fur-

ther investigated this tendency across domains and tasks, e.g., summarization, in Appendix D. These results also confirmed that metric overfitting is a universal issue. Regardless of the specific utility functions employed, the result consistently overfit to the designated utility metric. These results definitively demonstrate that the tendency of the decoding algorithm to exploit metric biases is an inherent issue in standard MBR across entirely different domains and metric landscapes.

4 Proposed Method: SVD-MBR

§3 demonstrated that metric overfitting is a problem in MBR decoding. We hypothesize that this phenomenon occurs because the raw expected scores are highly sensitive to microscopic variances and erratic outliers within the evaluation metrics. To counter this, we introduce Singular Value Decomposition MBR (SVD-MBR) decoding, a novel approach that applies denoising to the pairwise matrix prior to candidate selection.

Formally, we reframe the pairwise utility matrix $\mathbf{M}$ as an information signal. The true consensus between hypotheses and pseudo-references forms a low-rank pattern, whereas metric biases and out-

liers manifest as noise. We apply SVD to factorize the matrix $\mathbf{M}$:

$$\mathbf{M} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^\top, \quad (3)$$

where $\mathbf{U} \in \mathbb{R}^{|\mathcal{H}| \times |\mathcal{H}|}$ is the orthogonal matrix of left singular vectors, $\mathbf{\Sigma} \in \mathbb{R}^{|\mathcal{H}| \times |\mathcal{Y}|}$ is the diagonal matrix containing the singular values in descending order, and $\mathbf{V} \in \mathbb{R}^{|\mathcal{Y}| \times |\mathcal{Y}|}$ is the orthogonal matrix of right singular vectors. The matrices $\mathbf{U}$ and $\mathbf{V}$ represent the latent structures of the hypotheses and pseudo-references, respectively.

To filter out the noise, we extract only the top- k components by their singular values. We truncate the decomposed matrices to $\mathbf{U}_k \in \mathbb{R}^{|\mathcal{H}| \times k}$, $\mathbf{\Sigma}_k \in \mathbb{R}^{k \times k}$, and $\mathbf{V}_k \in \mathbb{R}^{|\mathcal{Y}| \times k}$. Finally, we reconstruct a low-rank approximation of the original matrix:

$$\hat{\mathbf{M}} = \mathbf{U}_k \mathbf{\Sigma}_k \mathbf{V}_k^\top, \quad (4)$$

where $\hat{\mathbf{M}}$ represents the smoothed pairwise utility matrix devoid of the noise. We then substitute this denoised matrix $\hat{\mathbf{M}}$ back into Equation 2 to compute the expected scores and extract the optimal hypothesis. Figure 1 visualizes this entire process.

In our preliminary studies, we applied SVD directly to the raw pairwise utility matrix. However, because evaluation metrics operate on arbitrary numerical scales with high variance, direct decomposition often disproportionately weights mean magnitude over intrinsic consensus. To stabilize the decomposition and center the distribution, we standardize the pairwise matrix by applying z-score normalization prior to factorization. We apply this normalization element-wise to prevent it from altering the relative ranking of the expected utility scores. We empirically verify that this transformation does not change the indices in Appendix A.

5 Experiments

5.1 Experiment Setup

We retain the experimental configuration detailed in §3. We evaluate top- k truncation using three small integers. This design choice is grounded in prior literature (Trabelsi et al., 2024), which establishes that the consensus within an MBR pairwise matrix is inherently a low-rank signal. In addition, we provide our empirical analysis to support this design choice in Appendix B. We further employ the previously defined $\bar{Z}_{other}$ score to compare the generalized translation quality of SVD-MBR

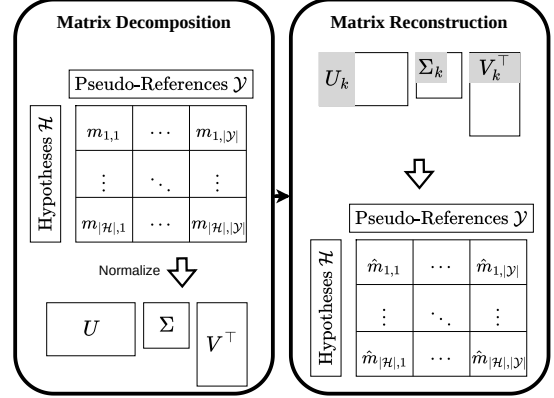


Figure 1: SVD-MBR Methodology

against standard MBR. Finally, statistical significance is verified via paired bootstrap resampling with 10,000 iterations (KoeHN, 2004).

5.2 Experiment Results

Finding 1: SVD-MBR prevents metric overfitting. As shown in Table 3, SVD-MBR successfully mitigates the metric overfitting observed in the MBR baseline. Specifically, when employing BLEURT as the utility function, SVD-MBR ($k = 1$) significantly improves generalized translation quality, achieving a substantial gain of +0.210 in the aggregate $\bar{Z}_{other}$ score. At rank $k = 2$, we observe significant improvements across almost all utility functions. With the exception of BLEU, optimizing for any other metric yields a statistically significant increase in both the off-target metrics and the $\bar{Z}_{other}$ score, particularly when BLEURT or COMET are used as the utility function. This demonstrates that our overfitting mitigation approach provides a robust solution, successfully preventing the utility function from hijacking the selection process and yielding genuine improvements in overall generation quality.

Finding 2: Excessive k reintroduces metric overfitting. Our results empirically justify the decision to keep k extremely small. By tracking the performance trajectory from $k = 1$ through $k = 3$, it becomes evident that retaining higher singular components simply reintroduces the noise responsible for overfitting. For instance, when optimizing for BLEURT ($|\mathcal{Y}| = 256$), the improvement for $\bar{Z}_{other}$ steadily diminishes as k increases, dropping from +0.210 at $k = 1$, down to +0.124 at $k = 2$, and finally to +0.063 at $k = 3$. However, the widespread degradation observed at $k = 1$, particu-

Decoding Method	Util. Function	$ \mathcal{D} $	BLEU	chrF	BLEURT	COMET	BERTScore	COMETKiwi	$\bar{Z}_{other}$
MBR	BLEU	4	21.472	48.987	52.098	72.736	78.249	71.689	-1.394
		32	23.462	50.591	53.204	74.598	78.668	73.199	-0.547
		256	24.065	51.024	53.643	74.926	78.819	73.576	-0.304
	chrF	4	21.209	50.364	53.334	73.625	78.541	72.626	-0.924
		32	22.958	52.235	54.484	75.415	79.096	74.434	0.036
		256	23.254	52.494	54.726	75.715	79.169	74.635	0.183
	BLEURT	4	20.516	49.069	59.185	76.338	78.508	74.383	-0.920
		32	21.640	50.192	60.921	77.057	78.873	75.283	-0.171
		256	21.786	50.364	61.119	77.152	78.906	75.311	-0.083
	COMET	4	21.876	50.220	56.463	82.338	78.802	78.414	0.158
		32	22.444	50.939	57.109	83.075	78.956	78.839	0.577
		256	22.665	50.993	57.101	83.116	78.981	78.945	0.653
	BERTScore	4	21.156	49.651	53.021	73.227	79.066	72.225	-1.037
		32	22.947	51.276	54.457	74.745	79.841	73.697	-0.018
		256	23.200	51.475	54.685	75.051	79.963	73.964	0.132
SVD-MBR ($k = 1$)	BLEU	4	21.466 (-0.01)	48.954 (-0.03)	52.013 (-0.08)	72.443 (-0.29)	78.168 (-0.08)	71.316 (-0.37)	-1.494 (-0.100)
		32	23.382 (-0.08)	50.529 (-0.06)	53.094 (-0.11)	74.369 (-0.23)	78.588 (-0.08)	72.978 (-0.22)	-0.639 (-0.091)
		256	23.917 (-0.15)	50.917 (-0.11)	53.492 (-0.15)	74.706 (-0.22)	78.789 (-0.03)	73.285 (-0.29)	-0.389 (-0.085)
	chrF	4	21.093 (-0.12)	49.807 (-0.56)	52.774 (-0.56)	73.363 (-0.26)	78.339 (-0.20)	72.315 (-0.31)	-1.125 (-0.201)
		32	23.279 (+0.32)*	51.723 (-0.51)	54.177 (-0.31)	75.233 (-0.18)	78.990 (-0.11)	74.163 (-0.27)	-0.005 (-0.041)
		256	23.507 (+0.25)*	51.962 (-0.53)	54.256 (-0.47)	75.399 (-0.32)	78.986 (-0.18)	74.294 (-0.34)	0.067 (-0.116)
	BLEURT	4	20.780 (+0.26)	49.069 (+0.00)	57.909 (-1.28)	76.071 (-0.27)	78.412 (-0.10)	74.239 (-0.14)	-0.940 (-0.019)
		32	22.053 (+0.41)*	50.226 (+0.03)	59.828 (-1.09)	77.051 (-0.01)	78.839 (-0.03)	75.336 (+0.05)	-0.092 (+0.079)
		256	22.348 (+0.56)*	50.570 (+0.21)	60.107 (-1.01)	77.266 (+0.11)	78.976 (+0.07)	75.474 (+0.16)	0.127 (+0.210)*
	COMET	4	21.805 (-0.07)	50.169 (-0.05)	56.291 (-0.17)	82.089 (-0.25)	78.729 (-0.07)	78.321 (-0.09)	0.078 (-0.080)
		32	22.605 (+0.16)	51.032 (+0.09)	57.020 (-0.09)	82.945 (-0.13)	78.986 (+0.03)	78.786 (-0.05)	0.631 (+0.055)
		256	22.624 (-0.04)	51.034 (+0.04)	57.066 (-0.04)	83.047 (-0.07)	79.004 (+0.02)	78.973 (+0.03)	0.663 (+0.010)
	BERTScore	4	20.684 (-0.47)	49.189 (-0.46)	52.836 (-0.19)	73.067 (-0.16)	78.666 (-0.40)	72.095 (-0.13)	-1.262 (-0.225)
		32	22.840 (-0.11)	51.067 (-0.21)	54.254 (-0.20)	74.878 (+0.13)	79.524 (-0.32)	73.748 (+0.05)	-0.085 (-0.067)
		256	23.400 (+0.20)	51.558 (+0.08)	54.713 (+0.03)	75.247 (+0.20)	79.704 (-0.26)	74.141 (+0.18)	0.219 (+0.086)*
SVD-MBR ($k = 2$)	BLEU	4	21.097 (-0.38)	48.772 (-0.22)	51.915 (-0.18)	72.534 (-0.20)	78.131 (-0.12)	71.405 (-0.28)	-1.543 (-0.149)
		32	23.346 (-0.12)	50.513 (-0.08)	53.122 (-0.08)	74.418 (-0.18)	78.604 (-0.06)	72.897 (-0.30)	-0.636 (-0.089)
		256	23.899 (-0.17)	50.878 (-0.15)	53.454 (-0.19)	74.661 (-0.27)	78.752 (-0.07)	73.253 (-0.32)	-0.423 (-0.119)
	chrF	4	21.164 (-0.04)	50.267 (-0.10)	53.081 (-0.25)	73.453 (-0.17)	78.498 (-0.04)	72.498 (-0.13)	-0.993 (-0.069)
		32	22.794 (-0.16)	52.107 (-0.13)	54.657 (+0.17)*	75.521 (+0.11)	79.072 (-0.02)	74.561 (+0.13)	0.022 (-0.014)
		256	23.337 (+0.08)	52.504 (+0.01)	54.869 (+0.14)*	75.858 (+0.14)	79.177 (+0.01)	74.872 (+0.24)*	0.243 (+0.060)*
	BLEURT	4	20.751 (+0.23)*	49.196 (+0.13)	58.983 (-0.20)	76.282 (-0.06)	78.523 (+0.01)	74.376 (-0.01)	-0.844 (+0.077)
		32	21.773 (+0.13)	50.299 (+0.11)	60.747 (-0.17)	77.193 (+0.14)*	78.904 (+0.03)	75.463 (+0.18)*	-0.084 (+0.087)*
		256	21.958 (+0.17)*	50.540 (+0.18)*	61.055 (-0.06)	77.276 (+0.12)*	78.972 (+0.07)*	75.485 (+0.17)*	0.041 (+0.124)*
	COMET	4	22.014 (+0.14)*	50.249 (+0.03)	56.464 (+0.00)	82.308 (-0.03)	78.809 (+0.01)	78.428 (+0.01)	0.196 (+0.038)
		32	22.510 (+0.07)	51.030 (+0.09)	57.251 (+0.14)*	83.171 (+0.10)*	79.027 (+0.07)*	78.912 (+0.07)*	0.658 (+0.082)*
		256	22.618 (-0.05)	51.033 (+0.04)	57.229 (+0.13)*	83.285 (+0.17)*	79.010 (+0.03)	79.065 (+0.12)*	0.685 (+0.032)*
	BERTScore	4	20.973 (-0.18)	49.494 (-0.16)	52.963 (-0.06)	73.339 (+0.11)	78.924 (-0.14)	72.331 (+0.11)	-1.095 (-0.058)
		32	22.906 (-0.04)	51.248 (-0.03)	54.315 (-0.14)	74.883 (+0.14)	79.698 (-0.14)	73.789 (+0.09)	-0.026 (-0.008)
		256	23.226 (+0.03)	51.482 (+0.01)	54.683 (-0.00)	75.273 (+0.22)*	79.854 (-0.11)	74.184 (+0.22)*	0.171 (+0.039)*
SVD-MBR ($k = 3$)	BLEU	4	21.264 (-0.21)	48.871 (-0.12)	51.997 (-0.10)	72.640 (-0.10)	78.178 (-0.07)	71.574 (-0.12)	-1.474 (-0.080)
		32	23.360 (-0.10)	50.490 (-0.10)	53.000 (-0.20)	74.246 (-0.35)	78.622 (-0.05)	72.782 (-0.42)	-0.662 (-0.114)
		256	23.979 (-0.09)	51.003 (-0.02)	53.536 (-0.11)	74.828 (-0.10)	78.797 (-0.02)	73.418 (-0.16)	-0.346 (-0.042)
	chrF	4	21.097 (-0.11)	50.209 (-0.16)	53.157 (-0.18)	73.593 (-0.03)	78.483 (-0.06)	72.602 (-0.02)	-0.990 (-0.067)
		32	22.817 (-0.14)	52.148 (-0.09)	54.528 (+0.04)	75.430 (+0.02)	79.048 (-0.05)	74.342 (-0.09)	-0.019 (-0.055)
		256	23.285 (+0.03)	52.555 (+0.06)	54.836 (+0.11)	75.717 (+0.00)	79.166 (-0.00)	74.642 (+0.01)	0.197 (+0.014)
	BLEURT	4	20.698 (+0.18)*	49.169 (+0.10)*	59.253 (+0.07)*	76.418 (+0.08)*	78.548 (+0.04)*	74.393 (+0.01)	-0.839 (+0.018)*
		32	21.739 (+0.10)	50.244 (+0.05)	60.881 (-0.04)	77.090 (+0.03)	78.889 (+0.02)	75.294 (+0.01)	-0.130 (+0.041)
		256	21.908 (+0.12)*	50.494 (+0.13)*	61.101 (-0.02)	77.162 (+0.01)	78.930 (+0.02)	75.306 (-0.00)	-0.020 (+0.063)
	COMET	4	21.884 (+0.01)	50.252 (+0.03)	56.467 (+0.00)	82.319 (-0.02)	78.808 (+0.01)	78.450 (+0.04)	0.172 (+0.014)
		32	22.466 (+0.02)	50.992 (+0.05)	57.181 (+0.07)	83.094 (+0.02)	79.002 (+0.05)*	78.874 (+0.04)	0.622 (+0.045)*
		256	22.585 (-0.08)	51.020 (+0.03)	57.154 (+0.05)	83.222 (+0.11)*	78.988 (+0.01)	78.958 (+0.01)	0.650 (-0.003)
	BERTScore	4	21.042 (-0.11)	49.624 (-0.03)	53.019 (-0.00)	73.231 (+0.00)	79.016 (-0.05)	72.255 (+0.03)	-1.063 (-0.026)
		32	22.966 (+0.02)	51.256 (-0.02)	54.528 (+0.07)	74.982 (+0.24)*	79.793 (-0.05)	73.885 (+0.19)*	0.017 (+0.035)*
		256	23.311 (+0.11)*	51.564 (+0.09)	54.735 (+0.05)	75.156 (+0.11)*	79.944 (-0.02)	74.073 (+0.11)*	0.192 (+0.060)*
Oracle	N/A	-	41.875	65.930	67.723	85.800	85.050	82.773	4.927

Table 3: Performance of MBR vs. SVD-MBR. $\bar{Z}_{other}$ represents the mean z-score of all non-utility function evaluation metrics. Values in parentheses are absolute differences against MBR, with colors indicating relative improvement or degradation. Statistical significance ($p < 0.05$) is marked with *.

larly for utility functions like chrF and BERTScore, suggests that $k = 1$ can sometimes be overly aggressive, discarding valuable information alongside the noise. Relaxing the approximation to $k = 2$ allows the reconstruction to capture the remainder of this underlying signal, as evidenced by the significant recovery of COMET and COMETKiwi scores, before the noise begins to dominate again at higher ranks. Ultimately, expanding the rank causes the performance to rapidly regress toward the MBR baseline, validating the hypothesis that consensus

information is strictly a low-rank signal.

Finding 3: Denoising robustness varies by metric architecture. Finally, our experiments reveal that SVD denoising behaves fundamentally differently depending on the underlying utility function. When applied to MBR matrices constructed using surface-level metrics, separating the noise from the true information proves exceedingly difficult. For instance, when utilizing BLEU as the utility function, the $\bar{Z}_{other}$ scores stagnate even as the rank is expanded up to $k = 3$. Similarly, chrF exhibits un-

stable behavior: it suffers massive degradation under a $k = 1$ approximation, yields positive gains at $k = 2$, but diminishes again by $k = 3$. Conversely, neural metrics yields more robust denoising outcomes. Metrics like COMET and BLEURT display generally positive trends when retaining the top two components ($k = 2$). Meanwhile, BERTScore demonstrates a distinct pattern, yielding notable mean improvements under both $k = 1$ and $k = 3$. We hypothesize that neural metrics, which rely on dense continuous embeddings, inherently encode a richer, low-rank consensus that SVD can effectively isolate. In contrast, character- and n -gram-level overlap metrics construct highly localized and entangled pairwise distributions. Consequently, forcing them into a strict low-rank approximation inadvertently discards critical discriminating information alongside the noise.

Finding 4: SVD-MBR generalizes across domains and tasks. Similar to §3, we further investigate the generalizability of our method across domains and tasks, e.g., summarization, in Appendix D. Consistent with our primary findings, the supplementary results confirm that metric overfitting remains a universal issue. Applying SVD-MBR mitigates this overfitting effectively for neural metrics, demonstrating the broad compatibility of low-rank matrix approximations with dense continuous embeddings. On the other hand, these evaluations also reaffirm that applying low-rank denoising to surface-level metrics is highly unstable and struggles to produce robust, generalized impacts.

Summary. Our results demonstrate that **SVD-MBR is an effective method for mitigating metric overfitting in MBR decoding**. By strictly enforcing a low-rank approximation, SVD-MBR successfully decouples the true consensus from high-frequency metric noise, yielding significant gains in generalized generation quality ($\bar{Z}_{other}$). Crucially, retaining higher singular components simply reintroduces the noise responsible for overfitting, validating that true consensus is inherently a low-rank signal. Furthermore, the efficacy of the denoising method is fundamentally tied to the architecture of the utility function: while neural metrics, such as COMET, BLEURT, and BERTScore, encode a low-rank structure ideal for SVD decomposition, surface-level metrics, e.g., BLEU and chrF, construct highly entangled distributions where noise cannot be cleanly separated. Finally, our investi-

gation across domains and tasks in Appendix D confirm that metric overfitting is a universal issue and SVD-MBR consistently solved this issue.

6 Quality Analysis

6.1 Error Analysis

To further investigate the mechanics of how SVD-MBR mitigates metric overfitting, we conducted an analysis connecting the intrinsic metric variance across the hypotheses (σ^2) to the evaluation score deltas between MBR and SVD-MBR ($\Delta = \text{Score}_{\text{SVD-MBR}} - \text{Score}_{\text{MBR}}$). We report the Spearman correlation (ρ) between the variance of the evaluation metric scores across the hypothesis pool per source document. We measure this relationship across two dimensions:

- **Dir. (Directional Change):** Calculates ρ between σ^2 and Δ . This measures whether higher inherent variance correlates with a net positive or negative score improvement against standard MBR.
- **Mag. (Magnitude Sensitivity):** Calculates ρ between σ^2 and $|\Delta|$. This evaluates how strongly the variance dictates the score shift, regardless of its improvement.

As shown in Table 4, SVD-MBR consistently increases the aggregate off-target scores ($\bar{Z}_{other}$) while simultaneously regularizing the inflated utility metric. However, this efficacy is heavily dependent on the specific utility function employed.

Crucially, the success of SVD in filtering the noise correlates with the intrinsic variance of the utility function. For example, COMET exhibits the highest variance and provides the clearest evidence of noise mitigation: it yields a notable positive gain in off-target metrics (+0.05) while restricting the utility metric’s inflation. Similarly, BLEURT and chrF possess comparable variance levels, and both exhibit proportional increases in their $\bar{Z}_{other}$ scores ($|\mathcal{Y}| = 256$). Interestingly, despite possessing the lowest intrinsic variance of the evaluated metrics, BERTScore still yields significant positive gains for the off-target average. These variance-dependent characteristic generalize across domains, as detailed in Appendix D.

Further analysis of each evaluation metric (Appendix C) also shows that some utility functions distribute performance gains equally across all metrics, whereas others concentrate improvements

Util. Function	$\mathcal{V}$	Top- k	Util. Metric		$\bar{Z}_{other}$ ($\sigma^2 = 0.186$)	
			Dir.	Mag.	Dir.	Mag.
BLEU ($\sigma^2 = 79.972$)	4	$k = 1$	+0.02	0.10*	+0.02	-0.03
		$k = 2$	-0.04	0.05*	-0.01	0.05*
		$k = 3$	-0.03	0.01	-0.03	0.02
	32	$k = 1$	+0.02	0.06*	+0.01	0.02
		$k = 2$	-0.03	0.04	-0.01	0.08*
		$k = 3$	-0.02	0.02	-0.02	0.11*
	256	$k = 1$	+0.01	0.03	+0.00	0.02
		$k = 2$	+0.01	-0.01	-0.02	0.05*
		$k = 3$	+0.02	-0.03	-0.01	0.11*
chrF ($\sigma^2 = 70.045$)	4	$k = 1$	+0.00	0.11*	+0.01	0.08*
		$k = 2$	+0.02	0.08*	+0.01	0.06*
		$k = 3$	-0.01	0.03	+0.01	0.03
	32	$k = 1$	+0.00	0.11*	+0.01	0.08*
		$k = 2$	-0.02	0.12*	+0.01	0.09*
		$k = 3$	-0.02	0.08*	-0.02	0.07*
	256	$k = 1$	+0.04	0.10*	+0.06*	0.11*
		$k = 2$	+0.01	0.14*	+0.07*	0.12*
		$k = 3$	-0.02	0.09*	+0.04	0.08*
BLEURT ($\sigma^2 = 71.421$)	4	$k = 1$	-0.05*	0.12*	+0.00	0.13*
		$k = 2$	-0.03	0.07*	+0.00	0.09*
		$k = 3$	+0.04	0.01	+0.04	0.03
	32	$k = 1$	+0.01	0.11*	+0.03	0.21*
		$k = 2$	+0.03	0.10*	+0.02	0.13*
		$k = 3$	-0.01	0.05*	+0.02	0.10*
	256	$k = 1$	-0.04	0.14*	+0.04	0.20*
		$k = 2$	+0.00	0.11*	+0.03	0.10*
		$k = 3$	-0.01	0.06*	+0.02	0.10*
COMET ($\sigma^2 = 94.773$)	4	$k = 1$	+0.01	-0.07	+0.05	0.20*
		$k = 2$	-0.04	-0.02	+0.05	0.17*
		$k = 3$	-0.04	-0.02	+0.04	0.15*
	32	$k = 1$	+0.10	-0.06	-0.03	0.14*
		$k = 2$	+0.01	0.01	-0.01	0.14*
		$k = 3$	+0.01	0.01	-0.02	0.12
	256	$k = 1$	+0.01*	-0.11*	+0.05*	0.25*
		$k = 2$	-0.05	-0.05	+0.08*	0.14
		$k = 3$	-0.07	-0.05	+0.07	0.15*
BERTScore ($\sigma^2 = 12.698$)	4	$k = 1$	+0.02	0.09*	+0.02	0.08*
		$k = 2$	-0.02	0.08*	+0.02	0.05*
		$k = 3$	+0.00	0.05*	+0.00	-0.00
	32	$k = 1$	+0.03	0.17*	+0.02	0.14*
		$k = 2$	+0.00	0.20*	+0.01	0.12*
		$k = 3$	+0.01	0.15*	+0.02	0.09*
	256	$k = 1$	+0.03	0.16*	+0.06*	0.11*
		$k = 2$	-0.03	0.19*	+0.03	0.12*
		$k = 3$	+0.02	0.10*	+0.05*	0.03

Table 4: Spearman correlation (ρ) between hypotheses oracle variance and evaluation score differences. The Util. Metric is the metric used as utility function, while $\bar{Z}_{other}$ is the mean z-score of all non-utility function evaluation metrics. The hypotheses variance (σ^2) is indicated beneath each corresponding utility function and in $\bar{Z}_{other}$. *Dir.* measures directional improvement (+ / -), and *Mag.* measures absolute score sensitivity. Significance ($p < 0.05$) is denoted by *.

within specific metrics. Moreover, consistent with our findings in §5.2, applying SVD when using BLEU as the utility function yields no improvement for $\bar{Z}_{other}$, despite BLEU demonstrating high variance. This further implies that while pairwise BLEU scores are noisy, their localized, n -gram-

based noise cannot be cleanly decoupled from the true consensus using a low-rank approximation.

6.2 Qualitative Analysis

To further understand how SVD-MBR mitigates metric overfitting in practice, we conduct a qualitative analysis at the sentence level. By examining individual translations, we can observe exactly how SVD-MBR alters the final hypothesis selection. To this end, we highlight two specific scenarios in Table 5: a success case where SVD-MBR ($k = 1$) outperforms MBR (using COMET as the utility function), and a failure case where it underperforms (using BLEU as the utility function). To contextualize these individual examples within the broader decoding behavior, we also present a Win Difference analysis comparing SVD-MBR against MBR for both the target utility metric and the aggregate off-target score ($\bar{Z}_{other}$), illustrated in Figure 2.

Qualitative inspection reveals that when SVD-MBR diverges from MBR, the resulting differences in translation quality can be substantial. In the COMET success case, SVD-MBR yields improvements across all metrics, providing massive gains for metrics like BLEU and BLEURT. Notably, even while regularizing the overfitting behavior, the COMET score remains higher than that of the MBR baseline. Conversely, the failure case demonstrates a similar magnitude of divergence in the opposite direction, with MBR strictly outperforming the SVD-MBR selection across all metrics.

The Win Difference analysis in Figure 2 corroborates these sentence-level observations on a macro scale. For most utility functions, SVD-MBR consistently improves $\bar{Z}_{other}$ while appropriately regularizing the inflated target utility metric. Furthermore, optimizing for COMET proves uniquely robust, frequently yielding simultaneous wins for both the utility metric and off-target evaluations. However, further analysis (Appendix C) demonstrates that SVD-MBR is a conservative regularizer, yielding gains only when the pairwise utility matrix exhibits exploitable noise. Consequently, utilizing surface-level metrics like BLEU (and certain configurations of chrF) fails to yield off-target improvements, reaffirming that not all metric spaces are equally amenable to low-rank regularization.

7 Conclusion

In this study, we first highlighted metric overfitting as a problem in Minimum Bayes Risk (MBR) de-

Case 1: COMET as Util. Function			Case 2: BLEU as Util. Function		
Source: My water heater is set pretty low.			Source: Do I have to pay any duties or customs?		
Reference: Mein Wassererhitzer ist ziemlich niedrig eingestellt.			Reference: Muss ich Zollgebühren zahlen?		
MBR: Meine Wassertemperatur ist ziemlich niedrig			MBR: Muss ich Gebühren oder Zölle bezahlen?		
SVD-MBR: Der Wasserheater ist ziemlich niedrig eingestellt.			SVD-MBR: Muss ich Zölle oder Zölle bezahlen?		
Metric	MBR	SVD-MBR	Metric	MBR	SVD-MBR
COMET (Util)	87.5	95.7 (↑)	COMET	94.1	59.4 (↓)
BLEURT	38.2	68.3 (↑)	BLEURT	62.3	35.7 (↓)
BERTScore	77.4	86.2 (↑)	BERTScore	83.6	74.0 (↓)
chrF	52.1	76.2 (↑)	chrF	56.1	46.0 (↓)
BLEU	26.7	61.5 (↑)	BLEU (Util)	14.5	14.5
COMETKiwi	80.5	81.2 (↑)	COMETKiwi	87.5	67.6 (↓)

Table 5: Sentence comparison of MBR and SVD-MBR ($k = 1$, $|\mathcal{Y}| = 256$). **Case 1** uses COMET as the utility function and **Case 2** uses BLEU as the utility function.

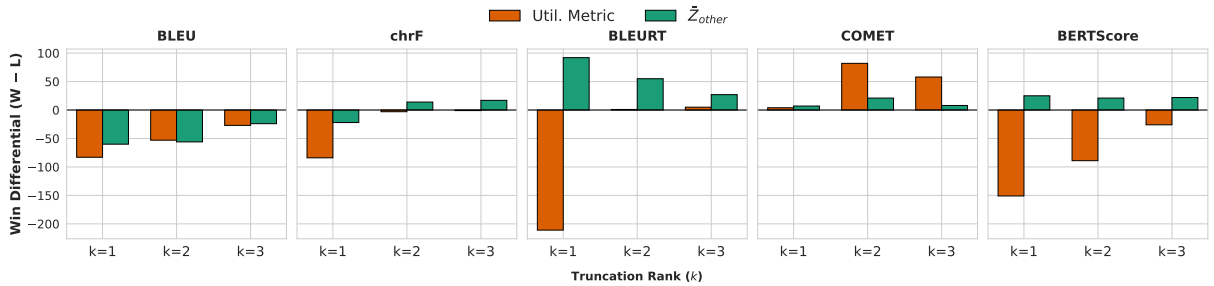


Figure 2: Sentence-level win difference (Wins – Losses) of SVD-MBR compared to the MBR for $|\mathcal{Y}| = 256$. The Util. Metric is the metric used as utility function, while $\bar{Z}_{other}$ is the mean z-score of all non-utility function evaluation metrics.

coding. We demonstrated that **MBR inflates the target utility metric while causing unoptimized metrics to stagnate or severely degrade**. Crucially, our evaluations show that this phenomenon is not isolated to a single utility function, but is a persistent issue across multiple MBR variants.

To mitigate this issue, we proposed SVD-MBR, a novel decoding approach that applies Singular Value Decomposition (SVD) to the pairwise utility matrix. By reconstructing the matrix using only the top- k components, we effectively decouple the underlying consensus from metric noise. Our quantitative results prove that a strict low-rank approximation, e.g., $k = 1$ or $k = 2$, successfully regularizes this overfitting issue, particularly for neural metrics like COMET and BLEURT.

Moreover, our error analysis confirms that the efficacy of SVD denoising is strongly correlated with the intrinsic variance of the evaluator, solidifying its role as a robust regularizer. In practice, qualitative sentence-level analysis corroborates that

SVD-MBR successfully redirects the selection to hypotheses that yield substantial gains across the entire evaluation suite.

Our supplementary experiments confirm that this metric overfitting issue is universal and SVD-MBR consistently mitigates it across different domains and metrics. Ultimately, this demonstrates that *surface-level metrics are mathematically resistant to low-rank denoising, and we advise practitioners, supported by our findings, to pair efficient, low-rank MBR approximations specifically with neural metrics for the best generation quality.*

Limitations

While SVD-MBR successfully mitigates metric overfitting and improves generalized translation quality, we identify several limitations to our current approach.

First, the application of SVD introduces additional computational complexity. MBR is already bottlenecked by its $\mathcal{O}(N \times M)$ pairwise evalua-

tion cost. Decomposing the resulting matrix adds an $\mathcal{O}(\min(N^2M, NM^2))$ operation per sentence. However, our primary objective in this work is to establish SVD as a robust mechanism for outlier mitigation and metric regularization, rather than to optimize for decoding latency. We demonstrate that overfitting is a tendency that can be neutralized by our method. Consequently, we view our approach as a complementary component that can be combined with existing efficient MBR frameworks to address throughput constraints in future research.

Second, our experimental analysis relies on automated metrics. This is a deliberate choice based on our objective in investigating and mitigating the tendency of MBR decoding to overfit, rather than to pursue the incremental performance gains that requires human preference. Since our results demonstrate that SVD effectively reduces this overfitting and restores alignment across various metrics, it is sufficient for establishing the efficacy of our method. Future work may incorporate human evaluation, such as Multidimensional Quality Metrics (MQM), to assess the qualitative impact of this denoising on translation fluency and adequacy. However, this issue is also raised widely in other MBR decoding researches.

Finally, our experimental scope is constrained to ϵ -sampling for candidate generation and SVD for denoising. Rather than expanding the generation methods or denoising algorithms, we prioritized an extensive sweep across a set of variables, including k -values, utility functions, datasets, and pseudo-reference counts, to comprehensively characterize the overfitting problem. We justify this design because our results consistently demonstrate that SVD-MBR successfully mitigates metric overfitting across this diverse variables, thereby establishing the robustness of our method. Future work may build upon this framework to explore whether alternative generation methods or denoising algorithms, such as NMF, provide complementary benefits.

Ethical Considerations

This study fully complies with the ACL Ethics Policy and addresses all relevant items in the Responsible Research Checklist. All resources used in this work are publicly available and properly licensed, with no concerns regarding licensing. The study does not involve or produce any harmful content. Although AI assistants were utilized for minor writ-

ing support, such as rephrasing and spell-checking, all original content was manually created by the authors. Given these points, we affirm that this work raises no ethical concerns.

Acknowledgment

We thank Kazuki Hayashi for reviewing the initial draft of this manuscript and providing valuable feedback on the structure of the paper from a fresh perspective. We also thank the anonymous reviewers for their constructive feedback and insightful suggestions that helped improve the final version of this paper. This work was partly supported by JSPS Kakenhi Grant Number JP24K02993, JP25K24369, and JP26H02537.

References

- Hiroyuki Deguchi, Yusuke Sakai, Hidetaka Kamigaito, and Taro Watanabe. 2024. [mbrs: A library for minimum Bayes risk decoding](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 351–362, Miami, Florida, USA. Association for Computational Linguistics.
- Gianna M. Del Corso and Francesco Romani. 2019. [Adaptive nonnegative matrix factorization and measure comparisons for recommender systems](#). *Applied Mathematics and Computation*, 354:164–179.
- Bryan Eikema and Wilker Aziz. 2020. [Is MAP decoding all you need? the inadequacy of the mode in neural machine translation](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 4506–4520, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Bryan Eikema and Wilker Aziz. 2022. [Sampling-based approximations to minimum Bayes risk decoding for neural machine translation](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 10978–10993, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Angela Fan, Shruti Bhosale, Holger Schwenk, Zhiyi Ma, Ahmed El-Kishky, Siddharth Goyal, Man-deep Baines, Onur Celebi, Guillaume Wenzek, Vishrav Chaudhary, Naman Goyal, Tom Birch, Vitaliy Liptchinsky, Sergey Edunov, Edouard Grave, Michael Auli, and Armand Joulin. 2020. [Beyond english-centric multilingual machine translation](#). *Preprint*, arXiv:2010.11125.
- Markus Freitag, Behrooz Ghorbani, and Patrick Fernandes. 2023. [Epsilon sampling rocks: Investigating sampling strategies for minimum Bayes risk decoding for machine translation](#). In *Findings of the Association for Computational Linguistics: EMNLP*

- 2023, pages 9198–9209, Singapore. Association for Computational Linguistics.
- Markus Freitag, David Grangier, Qijun Tan, and Bowen Liang. 2022. [High quality rather than high model probability: Minimum bayes risk decoding with neural metrics](#). *Transactions of the Association for Computational Linguistics*, 10:811–825.
- John Hewitt, Christopher Manning, and Percy Liang. 2022. [Truncation sampling as language model desmoothing](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 3414–3427, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Yuu Jinnai, Tetsuro Morimura, Ukyo Honda, Kaito Ariu, and Kenshi Abe. 2024. [Model-based minimum bayes risk decoding for text generation](#). *Preprint*, arXiv:2311.05263.
- Hidetaka Kamigaito, Hiroyuki Deguchi, Yusuke Sakai, Katsuhiko Hayashi, and Taro Watanabe. 2025. [Diversity explains inference scaling laws: Through a case study of minimum Bayes risk decoding](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 29060–29094, Vienna, Austria. Association for Computational Linguistics.
- Tom Kocmi, Rachel Bawden, Ondřej Bojar, Anton Dvorkovich, Christian Federmann, Mark Fishel, Thamme Gowda, Yvette Graham, Roman Grundkiewicz, Barry Haddow, Rebecca Knowles, Philipp Koehn, Christof Monz, Makoto Morishita, Masaaki Nagata, Toshiaki Nakazawa, Michal Novák, Martin Popel, and Maja Popović. 2022. [Findings of the 2022 conference on machine translation \(WMT22\)](#). In *Proceedings of the Seventh Conference on Machine Translation (WMT)*, pages 1–45, Abu Dhabi, United Arab Emirates (Hybrid). Association for Computational Linguistics.
- Philipp Koehn. 2004. [Statistical significance tests for machine translation evaluation](#). In *Proceedings of the 2004 Conference on Empirical Methods in Natural Language Processing*, pages 388–395, Barcelona, Spain. Association for Computational Linguistics.
- Geza Kovacs, Daniel Deutsch, and Markus Freitag. 2024. [Mitigating metric bias in minimum Bayes risk decoding](#). In *Proceedings of the Ninth Conference on Machine Translation*, pages 1063–1094, Miami, Florida, USA. Association for Computational Linguistics.
- Shankar Kumar and William Byrne. 2004. [Minimum Bayes-risk decoding for statistical machine translation](#). In *Proceedings of the Human Language Technology Conference of the North American Chapter of the Association for Computational Linguistics: HLT-NAACL 2004*, pages 169–176, Boston, Massachusetts, USA. Association for Computational Linguistics.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Mathias Müller and Rico Sennrich. 2021. [Understanding the properties of minimum Bayes risk decoding in neural machine translation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 259–272, Online. Association for Computational Linguistics.
- Shashi Narayan, Shay B. Cohen, and Mirella Lapata. 2018. [Don’t give me the details, just the summary! topic-aware convolutional neural networks for extreme summarization](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 1797–1807, Brussels, Belgium. Association for Computational Linguistics.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. [Bleu: a method for automatic evaluation of machine translation](#). In *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics*, pages 311–318, Philadelphia, Pennsylvania, USA. Association for Computational Linguistics.
- Maja Popović. 2015. [chrF: character n-gram F-score for automatic MT evaluation](#). In *Proceedings of the Tenth Workshop on Statistical Machine Translation*, pages 392–395, Lisbon, Portugal. Association for Computational Linguistics.
- Ricardo Rei, Craig Stewart, Ana C Farinha, and Alon Lavie. 2020. [COMET: A neural framework for MT evaluation](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2685–2702, Online. Association for Computational Linguistics.
- Ricardo Rei, Marcos Treviso, Nuno M. Guerreiro, Chrysoula Zerva, Ana C Farinha, Christine Maroti, José G. C. de Souza, Taisiya Glushkova, Duarte Alves, Luisa Coheur, Alon Lavie, and André F. T. Martins. 2022. [CometKiwi: IST-unbabel 2022 submission for the quality estimation shared task](#). In *Proceedings of the Seventh Conference on Machine Translation (WMT)*, pages 634–645, Abu Dhabi, United Arab Emirates (Hybrid). Association for Computational Linguistics.
- Thibault Sellam, Dipanjan Das, and Ankur Parikh. 2020. [BLEURT: Learning robust metrics for text generation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7881–7892, Online. Association for Computational Linguistics.
- Mirac Suzgun, Luke Melas-Kyriazi, and Dan Jurafsky. 2023. [Follow the wisdom of the crowd: Effective text generation via minimum Bayes risk decoding](#). In *Findings of the Association for Computational*

Linguistics: ACL 2023, pages 4265–4293, Toronto, Canada. Association for Computational Linguistics.

Firas Trabelsi, David Vilar, Mara Finkelstein, and Markus Freitag. 2024. [Efficient minimum bayes risk decoding using low-rank matrix completion algorithms](#). In *Advances in Neural Information Processing Systems*, volume 37, pages 54714–54733. Curran Associates, Inc.

Liping Wang, Shichao Li, Hui Wang, Yuyan Gao, and Mingyao Wei. 2025. [SVD-GCL: A noise-augmented hybrid graph contrastive learning framework for recommendation](#). In *Proceedings of the 31st International Conference on Computational Linguistics*, pages 529–539, Abu Dhabi, UAE. Association for Computational Linguistics.

Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q. Weinberger, and Yoav Artzi. 2020. [Bertscore: Evaluating text generation with BERT](#). In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.

A MBR vs Normalized MBR

In our methodology, we preprocess the pairwise utility matrix using z-score normalization. Crucially, this standardization is performed element-wise (globally) across the entire $N \times M$ matrix for each source document, rather than row-wise or column-wise. The choice of the normalization axis fundamentally impacts the MBR objective: (1) Row-wise normalization (per-hypothesis) forces every row to have a mean of 0, which destroys the MBR ranking by mathematically forcing all hypotheses to tie; (2) Column-wise normalization (per-reference) centers the data per column, which alters the voting power of the pseudo-references and shifts the objective toward a maximum-variance selection similar to Principal Component Analysis (PCA); (3) Global normalization utilizes a single scalar mean (μ) and standard deviation (σ) across the entire matrix.

The element-wise transformation is calculated as:

$$z_{i,j} = \frac{m_{i,j} - \mu}{\sigma}. \quad (5)$$

When calculating the MBR row mean on this globally standardized matrix (without applying SVD), the decision rule simplifies to:

$$\arg \max_i \left(\frac{\bar{m}_i - \mu}{\sigma} \right). \quad (6)$$

Because μ and σ are global constants for a given matrix, this transformation is perfectly monotonic.

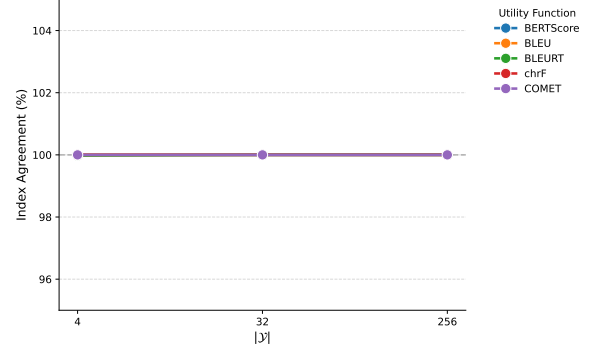


Figure 3: Selected sentence agreement between MBR and Normalized MBR. The grey line indicates 100% threshold.

It perfectly preserves the relative expected utility and the relative distances between candidate scores, ensuring that the fundamental MBR consensus objective remains mathematically unchanged.

To empirically verify that global normalization does not alter the hypothesis selection, we compared the selected indices of the best candidates chosen by standard MBR against those chosen by Normalized MBR (Equation 6, without SVD). We evaluated this on the WMT-22 En→De dataset across varying reference pool sizes ($|\mathcal{Y}| \in \{4, 32, 256\}$). As visualized in Figure 3, the results demonstrate a 100% index agreement between the two methods across all utility functions. This confirms that the step strictly standardizes the scale of the metric scores without altering the underlying MBR ranking prior to rank truncation.

B MBR Matrix is Low-Rank

We extracted and retained the generated singular values during the Singular Value Decomposition (SVD) of the pairwise utility matrix for each source document. To quantify the information captured by each singular value, we first average these values across all documents in the dataset. We then calculate the explained variance for each component index k using the squared averaged singular values, normalized by the total sum of the squared values:

$$V_k = \frac{\bar{\sigma}_k^2}{\sum_i \bar{\sigma}_i^2} \quad (7)$$

where $\bar{\sigma}$ represents the averaged singular values.

For this analysis, we specifically examine matrices generated with a reference pool size of $|\mathcal{Y}| = 256$. Figure 4 visualizes the explained variance for the BLEU and COMET utility functions on the

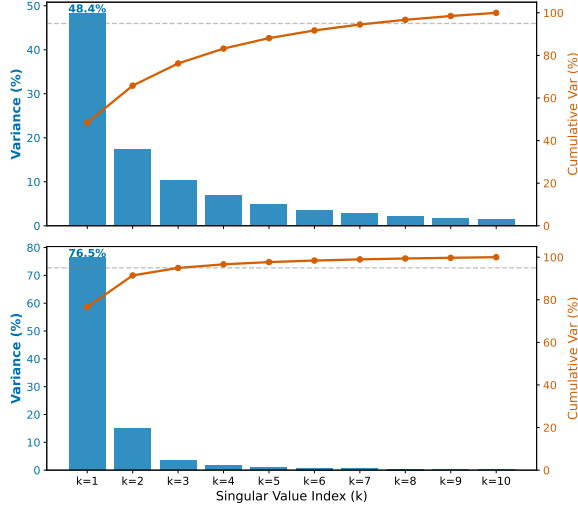


Figure 4: Cumulative variance and individual variance explained by the Top-10 singular values (k) for BLEU (top) and COMET (bottom) on WMT22 En→De. The grey line indicates 95% threshold.

WMT22-EnDe dataset. We selected these as representative examples of lexical and neural metrics, respectively; other evaluated metrics exhibit similar structural patterns.

As illustrated in Figure 4, **the variance is heavily concentrated in the first singular value** ($k = 1$), which accounts for 48.4% of the variance for BLEU and 76.5% for COMET. This dominant initial peak is followed by a steep decrease at $k = 2$, after which the explained variance diminishes gradually and flattens out.

This extreme concentration of variance empirically confirms that the **MBR pairwise matrix is inherently low-rank**. Consequently, we restrict our tested truncation ranks to small values ($k \in \{1, 2, 3\}$). Retaining components beyond $k = 3$ captures negligible additional variance and expanding the rank beyond this threshold simply reintroduces the high-frequency metric noise responsible for overfitting, validating our design choice to aggressively truncate the matrix to isolate the true semantic consensus.

C Detailed Results

C.1 Error Analysis

While §6.1 establishes the relationship between a utility function’s inherent variance (σ^2) and the generalized performance of SVD-MBR ($\bar{Z}_{\text{other}}$), Table 6 allows for a granular inspection of how specific metric families interact under denoising. By tracking the individual directional shifts (Dir)

across each evaluation metric, two nuanced phenomena emerge.

The expanded data reveals that **utility functions distribute their denoising benefits in fundamentally different ways**. Certain metrics, when regularized, distribute their performance gains broadly and equally across evaluation metrics. For example, utilizing BLEURT as the utility function ($|\mathcal{Y}| = 256, k = 1$) yields balanced directional improvements across both lexical metrics (BLEU +0.06*, chrF +0.04) and neural metrics (COMET +0.05*, COMETKiwi +0.04). Conversely, other utility functions concentrate their improvements into specific metrics. When optimizing for COMET ($|\mathcal{Y}| = 256, k = 2$), the denoising does not yield uniform gains. BLEURT (−0.01) is slightly degraded while driving massive improvements in BLEU (+0.13*) and chrF (+0.11*). Furthermore, this behavior exposes a strong intra-family synergy: because COMET and COMETKiwi share foundational architectural and semantic spaces, filtering the noise from the COMET pairwise matrix results in regularization to COMETKiwi scores (−0.04*).

Although the main text groups surface-level metrics together due to their resistance to low-rank approximation, Table 6 highlights **a distinct divergence in behavior between BLEU and chrF**. When BLEU is employed as the utility function, SVD-MBR consistently fails to generate significant directional improvements across any other metric. Even at maximum reference size ($|\mathcal{Y}| = 256$), the off-target directional shifts remain stagnant or near zero, reinforcing that BLEU’s strict, sparse n -gram matching completely lacks a compressible, low-rank semantic signal. However, chrF exhibits a uniquely different tendency. Likely due to its character-level n -gram smoothing, the chrF pairwise matrix retains a slightly more extractable continuous structure. Specifically, at $|\mathcal{Y}| = 32$ and $k = 1$, employing chrF as the utility function cascades positive directional improvements across the entirety of the off-target neural metric suite (BLEURT +0.05*, COMET +0.01, BERTScore +0.03, COMETKiwi +0.00). This indicates that while surface-level metrics are generally resistant to SVD, sub-word smoothing algorithms like chrF encode just enough structural consensus to benefit from denoising under optimal rank configurations.

To further investigate how SVD denoise the MBR pairwise matrix, we conducted a correlation analysis mirroring our previous variance study.

Util. Function	$ \mathcal{Y} $	Top- k	BLEU ($\sigma^2 = 79.972$)		chrF ($\sigma^2 = 70.045$)		BLEURT ($\sigma^2 = 71.421$)		COMET ($\sigma^2 = 94.773$)		BERTScore ($\sigma^2 = 12.698$)		COMETKiwi ($\sigma^2 = 87.765$)		$\bar{Z}_{other}$ ($\sigma^2 = 0.186$)	
			<i>Dir.</i>		<i>Dir.</i>		<i>Dir.</i>		<i>Dir.</i>		<i>Dir.</i>		<i>Dir.</i>		<i>Dir.</i>	
			<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>	<i>Mag.</i>
BLEU	4	$k = 1$	+0.02	0.10*	+0.02	-0.01	+0.02	0.01	+0.00	0.03	+0.02	-0.03	-0.01	-0.01	+0.02	-0.03
		$k = 2$	-0.04	0.05*	-0.02	0.06*	-0.01	0.05*	+0.01	0.08*	-0.02	0.05*	+0.01	0.06*	-0.01	0.05*
		$k = 3$	-0.03	0.01	-0.05*	0.04	-0.01	-0.01	-0.01	0.01	-0.02	0.02	-0.01	0.03	-0.03	0.02
	32	$k = 1$	+0.02	0.06*	+0.02	0.01	-0.01	0.03	-0.01	0.06*	-0.02	-0.00	+0.00	0.04	+0.01	0.02
		$k = 2$	-0.03	0.04	-0.01	0.04*	+0.00	0.09*	+0.00	0.11*	+0.00	0.08*	-0.03	0.09*	-0.01	0.08*
		$k = 3$	-0.02	0.02	-0.02	0.05*	-0.03	0.10*	+0.01	0.14*	+0.00	0.10*	-0.02	0.13*	-0.02	0.11*
	256	$k = 1$	+0.01	0.03	-0.02	-0.02	+0.00	0.03	+0.01	0.06*	+0.00	0.04	+0.01	0.03	+0.00	0.02
		$k = 2$	+0.01	-0.01	+0.00	0.02	-0.01	0.06*	-0.01	0.05*	+0.02	0.07*	-0.02	0.03	-0.02	0.05*
		$k = 3$	+0.02	-0.03	-0.01	0.06*	-0.03	0.10*	-0.04	0.09*	+0.02	0.11*	-0.01	0.09*	-0.01	0.11*
chrF	4	$k = 1$	+0.01	0.11*	+0.00	0.11*	-0.05*	0.11*	-0.03	0.09*	-0.02	0.09*	-0.02	0.06*	+0.01	0.08*
		$k = 2$	-0.01	0.05*	+0.02	0.08*	-0.02	0.08*	+0.01	0.07*	+0.00	0.07*	+0.01	0.07*	+0.01	0.06*
		$k = 3$	+0.02	-0.02	-0.01	0.03	-0.02	0.06*	+0.05*	0.07*	+0.00	0.03	+0.01	0.08*	+0.01	0.03
	32	$k = 1$	-0.01	0.06*	+0.00	0.11*	-0.02	0.10*	+0.00	0.10*	-0.04	0.11*	-0.01	0.10*	+0.01	0.08*
		$k = 2$	-0.04	0.02	-0.02	0.12*	+0.02	0.08*	+0.01	0.09*	-0.01	0.13*	+0.00	0.12*	+0.01	0.09*
		$k = 3$	-0.05*	0.01	-0.02	0.08*	-0.02	0.06*	+0.03	0.06*	-0.04*	0.10*	+0.01	0.07*	-0.02	0.07*
	256	$k = 1$	+0.03	0.05*	+0.04	0.10*	+0.02	0.14*	+0.01	0.15*	+0.02	0.15*	+0.03	0.15*	+0.06*	0.11*
		$k = 2$	-0.01	0.04*	+0.01	0.14*	+0.05*	0.15*	+0.03	0.13*	+0.04	0.14*	+0.06*	0.14*	+0.07*	0.12*
		$k = 3$	+0.00	0.04*	-0.02	0.09*	+0.02	0.10*	+0.02	0.10*	+0.00	0.11*	+0.01	0.10*	+0.04	0.08*
BLEURT	4	$k = 1$	+0.03	0.07*	+0.01	0.16*	-0.05*	0.12*	-0.01	0.09*	+0.00	0.16*	+0.00	0.14*	+0.00	0.13*
		$k = 2$	+0.03	0.02	+0.03	0.11*	-0.03	0.07*	-0.01	0.07*	+0.02	0.09*	+0.01	0.09*	+0.00	0.09*
		$k = 3$	+0.02	0.04	+0.02	0.05*	+0.04	0.01	+0.01	0.01	+0.03	0.05*	+0.02	0.03	+0.04	0.03
	32	$k = 1$	+0.08*	0.12*	+0.02	0.22*	+0.01	0.11*	+0.02	0.12*	-0.01	0.23*	+0.00	0.16*	+0.03	0.21*
		$k = 2$	+0.04	0.06*	+0.01	0.14*	+0.03	0.10*	+0.04*	0.07*	+0.00	0.17*	+0.03	0.09*	+0.02	0.13*
		$k = 3$	+0.02	0.05*	+0.02	0.10*	-0.01	0.05*	+0.02	0.03	-0.01	0.11*	+0.00	0.06*	+0.02	0.10*
	256	$k = 1$	+0.06*	0.10*	+0.04	0.23*	-0.04	0.14*	+0.05*	0.13*	+0.01	0.22*	+0.04	0.16*	+0.04	0.20*
		$k = 2$	+0.03	0.04	+0.01	0.13*	+0.00	0.11*	-0.02	0.05*	-0.01	0.15*	+0.01	0.10*	+0.03	0.10*
		$k = 3$	+0.03	0.06*	+0.02	0.09*	-0.01	0.06*	+0.01	0.03	-0.02	0.11*	+0.03	0.06*	+0.02	0.10*
COMET	4	$k = 1$	+0.10*	0.34*	+0.04*	0.26*	-0.01	0.08	+0.01	-0.07	+0.03	0.19*	+0.01	-0.02*	+0.05	0.20*
		$k = 2$	+0.12	0.24*	+0.05	0.20*	-0.02	0.08	-0.04	-0.02	+0.02	0.18*	-0.01	0.03	+0.05	0.17*
		$k = 3$	+0.10	0.24*	+0.05	0.20*	-0.01	0.07	-0.04	-0.02	+0.02	0.16*	-0.01	0.03	+0.04	0.15*
	32	$k = 1$	-0.04	0.14	-0.05	0.16*	+0.02	0.06	+0.10	-0.06	-0.03	0.15*	+0.07	-0.02*	-0.03	0.14*
		$k = 2$	-0.02	0.13	-0.03	0.13	+0.00	0.07	+0.01	0.01	+0.00	0.13*	+0.04	0.03	-0.01	0.14*
		$k = 3$	-0.03	0.13	-0.04	0.12	+0.00	0.06	+0.01	0.01	-0.01	0.11	+0.02	0.02	-0.02	0.12
	256	$k = 1$	+0.12	0.36*	+0.09	0.28*	+0.00	0.10*	+0.01*	-0.11*	+0.03*	0.21*	-0.01*	-0.07	+0.05*	0.25*
		$k = 2$	+0.13*	0.20	+0.11*	0.16*	-0.01	0.05	-0.05	-0.05	+0.06*	0.10	-0.04*	-0.03	+0.08*	0.14
		$k = 3$	+0.12	0.21	+0.10	0.16*	-0.01	0.05	-0.07	-0.05	+0.06*	0.11*	-0.05	-0.03	+0.07	0.15*
BERTScore	4	$k = 1$	+0.00	0.10*	+0.05*	0.06*	+0.02	0.09*	+0.00	0.10*	+0.02	0.09*	+0.01	0.10*	+0.02	0.08*
		$k = 2$	-0.02	0.04	+0.02	0.06*	+0.03	0.04	+0.03	0.06*	-0.02	0.08*	+0.08*	0.09*	+0.02	0.05*
		$k = 3$	-0.01	-0.04	+0.04	0.00	+0.00	0.03	+0.03	0.02	+0.00	0.05*	+0.01	0.03	+0.00	-0.00
	32	$k = 1$	-0.03	0.12*	+0.02	0.14*	-0.01	0.18*	+0.02	0.17*	+0.03	0.17*	+0.04	0.16*	+0.02	0.14*
		$k = 2$	-0.02	0.06*	+0.03	0.14*	-0.03	0.14*	+0.01	0.12*	+0.00	0.20*	+0.03	0.13*	+0.01	0.12*
		$k = 3$	-0.01	0.02	+0.03	0.09*	+0.02	0.10*	+0.03	0.10*	+0.01	0.15*	+0.03	0.11*	+0.02	0.09*
	256	$k = 1$	+0.02	0.07*	+0.04	0.11*	+0.01	0.15*	+0.05*	0.15*	+0.03	0.16*	+0.01	0.14*	+0.06*	0.11*
		$k = 2$	+0.01	0.02	+0.00	0.12*	+0.01	0.14*	+0.02	0.13*	-0.03	0.19*	+0.02	0.13*	+0.03	0.12*
		$k = 3$	+0.01	-0.01	+0.03	0.03	+0.02	0.03	+0.00	0.06*	+0.02	0.10*	+0.03	0.05*	+0.05*	0.03

Table 6: Spearman correlation (ρ) between inherent hypotheses oracle variance and evaluation score differences across varying pseudo-reference pool sizes ($|\mathcal{Y}|$) on WMT22 En $\rightarrow$ De. The hypothesis pool variance (σ^2) for each evaluation metric is displayed in the respective column headers. *Dir.* (Directional Change) measures score improvements, highlighted as positive and negative impacts. *Mag.* (Magnitude Sensitivity) measures absolute score variance, with blue highlighting metric sensitivity. Statistical significance ($p < 0.05$) is denoted by an asterisk (*).

However, rather than evaluating inherent variance, we calculated the correlation between the matrix reconstruction error and the evaluation score differences between SVD-MBR and MBR. Our primary objective is to mathematically determine whether the information discarded by the low-rank approximation represents noise or valuable signal. To quantify this error, we computed the Frobenius norm of the difference between the normalized pairwise utility matrix (used in MBR) and the reconstructed low-rank matrix utilized by SVD-MBR.

Table 7 reveals that **the discarded information**

depends heavily on the metric used as utility function. For neural metrics, specifically COMET and BLEURT, the information discarded by SVD is demonstrably noise; a higher reconstruction error correlates with positive gains across most off-target metrics, even in instances where the utility metric itself degrades. Conversely, BERTScore and chrF exhibit a more muted response, showing minimal generalized improvements ($\bar{Z}_{other}$) except at specific reference size (e.g., $|\mathcal{Y}| = 32$), where positive gains become more pronounced. Finally, BLEU stands out as the only metric where reconstruction

Util. Function	$\mathcal{V}$	Top- k	BLEU		chrF		BLEURT		COMET		BERTScore		COMETKiwi		$\bar{Z}_{\text{other}}$	
			Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.
BLEU	4	$k = 1$	-0.02	0.25*	-0.03	0.23*	-0.01	0.21*	+0.01	0.21*	-0.02	0.22*	+0.03	0.22*	+0.01	0.21*
		$k = 2$	-0.01	0.23*	-0.01	0.22*	+0.01	0.21*	+0.00	0.22*	-0.02	0.21*	-0.01	0.22*	+0.00	0.21*
		$k = 3$	-0.05*	0.20*	-0.02	0.20*	-0.03	0.20*	-0.03	0.19*	-0.04	0.19*	-0.01	0.19*	-0.04	0.19*
	32	$k = 1$	+0.03	0.21*	+0.00	0.18*	+0.01	0.16*	+0.00	0.16*	+0.01	0.16*	-0.02	0.18*	-0.01	0.16*
		$k = 2$	+0.03	0.24*	+0.00	0.22*	+0.01	0.22*	-0.02	0.22*	-0.02	0.20*	-0.02	0.23*	-0.02	0.21*
		$k = 3$	-0.01	0.22*	-0.01	0.21*	-0.02	0.20*	-0.04	0.21*	-0.03	0.18*	-0.09*	0.21*	-0.07*	0.18*
	256	$k = 1$	-0.05*	0.16*	-0.02	0.15*	-0.02	0.14*	-0.03	0.15*	+0.01	0.13*	-0.03	0.15*	-0.02	0.13*
		$k = 2$	-0.05*	0.19*	-0.05*	0.19*	-0.02	0.19*	-0.04	0.20*	+0.01	0.15*	-0.05*	0.19*	-0.02	0.16*
		$k = 3$	-0.03	0.16*	-0.01	0.16*	+0.00	0.15*	-0.02	0.15*	+0.00	0.12*	-0.01	0.15*	+0.00	0.12*
chrF	4	$k = 1$	-0.06*	0.23*	-0.05*	0.21*	-0.04	0.19*	-0.06*	0.21*	-0.03	0.19*	-0.05*	0.21*	-0.06*	0.20*
		$k = 2$	+0.01	0.24*	-0.04	0.24*	-0.05*	0.23*	+0.00	0.24*	-0.01	0.23*	-0.03	0.24*	-0.01	0.23*
		$k = 3$	-0.03	0.16*	-0.04	0.16*	-0.02	0.16*	+0.03	0.16*	-0.03	0.15*	+0.00	0.16*	+0.00	0.16*
	32	$k = 1$	+0.04	0.13*	+0.04	0.12*	+0.05*	0.10*	+0.01	0.11*	+0.03	0.09*	+0.00	0.12*	+0.02	0.09*
		$k = 2$	-0.03	0.15*	+0.01	0.16*	+0.04	0.15*	+0.01	0.16*	-0.01	0.12*	+0.05*	0.16*	+0.01	0.12*
		$k = 3$	+0.01	0.11*	+0.00	0.11*	+0.04*	0.10*	-0.01	0.11*	+0.00	0.06*	+0.03	0.11*	+0.01	0.06*
	256	$k = 1$	-0.01	0.09*	+0.02	0.07*	+0.00	0.06*	-0.03	0.09*	-0.01	0.05*	-0.02	0.09*	+0.00	0.06*
		$k = 2$	-0.02	0.14*	+0.01	0.13*	-0.01	0.13*	-0.04	0.14*	-0.03	0.10*	-0.04	0.14*	-0.02	0.11*
		$k = 3$	+0.00	0.10*	+0.02	0.09*	-0.01	0.09*	-0.01	0.09*	+0.01	0.05*	-0.02	0.09*	+0.00	0.05*
BLEURT	4	$k = 1$	+0.02	0.32*	+0.03	0.34*	-0.14*	0.35*	+0.01	0.35*	+0.00	0.34*	+0.01	0.35*	-0.01	0.35*
		$k = 2$	+0.04	0.16*	+0.04	0.18*	-0.09*	0.19*	-0.01	0.19*	+0.00	0.18*	+0.01	0.18*	-0.01	0.18*
		$k = 3$	+0.05*	0.08*	+0.04	0.09*	+0.03	0.09*	+0.04	0.09*	+0.06*	0.09*	+0.02	0.10*	+0.03	0.09*
	32	$k = 1$	+0.00	0.24*	-0.01	0.28*	-0.14*	0.29*	+0.02	0.28*	-0.03	0.27*	+0.03	0.27*	+0.02	0.27*
		$k = 2$	+0.01	0.12*	+0.01	0.15*	-0.02	0.15*	+0.00	0.15*	+0.01	0.14*	+0.08*	0.14*	+0.04	0.14*
		$k = 3$	+0.01	0.05*	-0.02	0.06*	+0.00	0.06*	+0.00	0.06*	+0.00	0.04	+0.02	0.06*	+0.01	0.04
	256	$k = 1$	-0.02	0.19*	-0.03	0.21*	-0.15*	0.23*	-0.02	0.22*	-0.05*	0.21*	+0.02	0.22*	-0.03	0.21*
		$k = 2$	+0.03	0.07*	-0.01	0.08*	-0.01	0.09*	+0.02	0.09*	+0.02	0.07*	+0.04	0.08*	+0.01	0.07*
		$k = 3$	+0.00	0.01	-0.03	0.01	+0.00	0.02	+0.00	0.02	+0.01	-0.02	+0.00	0.02	-0.02	-0.02
COMET	4	$k = 1$	+0.03	-0.06*	+0.02	-0.08	+0.06	-0.06	+0.12*	-0.02*	+0.02	-0.08	+0.11*	-0.02*	+0.07	-0.05*
		$k = 2$	+0.02	0.04	+0.00	0.03	+0.01	0.04	+0.05	0.08*	+0.00	0.03	+0.03	0.07*	+0.02	0.04
		$k = 3$	+0.02	0.02	+0.00	0.00	+0.03	0.02	+0.04	0.06	+0.00	0.00	+0.04	0.05	+0.03	0.02
	32	$k = 1$	-0.03	0.14*	-0.03	0.15*	-0.06	0.15*	-0.15*	0.19*	-0.03	0.14*	-0.07	0.17*	-0.06	0.15*
		$k = 2$	-0.01	0.05	+0.00	0.05	+0.00	0.05	-0.03	0.10*	-0.01	0.04	-0.04	0.08*	-0.02	0.06
		$k = 3$	-0.01	0.03	+0.01	0.04	-0.01	0.03	-0.04	0.08*	+0.00	0.02	-0.05	0.07*	-0.02	0.04
	256	$k = 1$	+0.04	0.01*	+0.03	-0.01*	+0.05	-0.00	+0.13*	0.05*	+0.01	-0.00	+0.12*	0.03*	+0.07*	0.01*
		$k = 2$	+0.03	0.11*	+0.04	0.09*	+0.03	0.07	+0.11	0.13*	+0.02	0.08*	+0.11*	0.12*	+0.07	0.10*
		$k = 3$	+0.03	0.08*	+0.03	0.07*	+0.04	0.05	+0.11	0.11*	+0.02	0.06	+0.10	0.10*	+0.07	0.09*
BERTScore	4	$k = 1$	-0.05*	0.19*	-0.05*	0.19*	-0.04	0.17*	-0.06*	0.20*	-0.06*	0.17*	-0.01	0.21*	-0.06*	0.18*
		$k = 2$	-0.04	0.18*	-0.01	0.21*	+0.01	0.20*	+0.02	0.21*	-0.05*	0.18*	+0.02	0.21*	+0.01	0.20*
		$k = 3$	-0.01	0.14*	-0.04	0.15*	+0.03	0.15*	-0.02	0.15*	-0.05*	0.08*	-0.01	0.15*	-0.03	0.15*
	32	$k = 1$	+0.03	0.13*	-0.01	0.12*	+0.00	0.12*	+0.01	0.14*	-0.01	0.10*	-0.03	0.13*	+0.01	0.12*
		$k = 2$	+0.03	0.24*	+0.00	0.24*	-0.03	0.25*	+0.04	0.25*	-0.06*	0.20*	+0.01	0.24*	+0.00	0.24*
		$k = 3$	+0.02	0.11*	+0.02	0.11*	-0.01	0.11*	+0.05*	0.11*	-0.01	0.04	+0.04	0.11*	+0.03	0.11*
	256	$k = 1$	-0.01	0.09*	-0.05*	0.05*	-0.02	0.06*	-0.03	0.08*	-0.03	0.04	+0.02	0.08*	-0.03	0.06*
		$k = 2$	+0.01	0.14*	-0.03	0.13*	-0.01	0.13*	-0.02	0.13*	-0.03	0.06*	-0.02	0.13*	-0.02	0.13*
		$k = 3$	+0.02	0.07*	-0.03	0.05*	-0.01	0.04	-0.01	0.04	-0.04	-0.06*	-0.03	0.04	-0.04	0.04

Table 7: Spearman correlation (ρ) between matrix reconstruction errors and evaluation score differences across varying reference pool sizes ($|\mathcal{V}|$) on WMT22 En $\rightarrow$ De. *Dir.* (Directional Change) measures score improvements, highlighted as positive and negative impacts. *Mag.* (Magnitude Sensitivity) measures absolute score variance, with blue highlighting metric sensitivity to matrix modifications. Statistical significance ($p < 0.05$) is denoted by an asterisk (*).

error yields almost no improvement to off-target metrics, further confirming that truncating BLEU matrices destroys uncompressible signals rather than filtering noise.

Looking at the absolute magnitude of change (*Mag.*), there exist multiple instances of statistically significant relationship to matrix reconstruction error and evaluation scores. Across the vast majority of configurations, higher reconstruction errors correlate heavily with larger absolute differences in the metrics. This indicates that the **reconstruction error acts as a reliable indicator for the scale of the SVD’s intervention: when the matrix has a high reconstruction**

error, SVD-MBR aggressively alters hypothesis selection, driving substantial changes in the overall evaluation scores. Conversely, when the reconstruction error is minimal, SVD-MBR’s behavior closely mirrors standard MBR, resulting in only marginal shifts in the final scores.

C.2 Qualitative Analysis

In §6.2, our analysis focused on the net win-loss differential specifically at the highest reference size ($|\mathcal{V}| = 256$). To provide a comprehensive view of the hypothesis selection dynamics, Table 8 expands this analysis to include the full Win/Tie/Loss (W/T/L) distributions across all evaluated utility functions, pseudo-reference sizes, and truncation

Util. Function	$ \mathcal{Y} $	Top- k	BLEU	chrF	BLEURT	COMET	BERTScore	COMETKiwi	$\bar{Z}_{other}$
BLEU	4	$k=1$	419 / 1169 / 449	493 / 1053 / 491	480 / 1050 / 507	486 / 1048 / 503	492 / 1043 / 502	475 / 1050 / 512	478 / 1041 / 518
		$k=2$	223 / 1543 / 271	259 / 1482 / 296	260 / 1479 / 298	256 / 1480 / 301	255 / 1475 / 307	257 / 1481 / 299	250 / 1472 / 315
		$k=3$	71 / 1858 / 108	109 / 1819 / 109	91 / 1817 / 129	99 / 1817 / 121	95 / 1814 / 128	99 / 1817 / 121	98 / 1811 / 128
		$k=1$	381 / 1280 / 376	434 / 1155 / 448	438 / 1147 / 452	423 / 1147 / 467	455 / 1135 / 447	399 / 1151 / 487	452 / 1118 / 467
		$k=2$	259 / 1507 / 271	301 / 1412 / 324	300 / 1403 / 334	295 / 1404 / 338	312 / 1394 / 331	282 / 1409 / 346	313 / 1375 / 349
		$k=3$	175 / 1669 / 193	207 / 1605 / 225	198 / 1597 / 242	192 / 1598 / 247	217 / 1586 / 234	188 / 1601 / 248	220 / 1564 / 253
	256	$k=1$	199 / 1556 / 282	269 / 1458 / 310	279 / 1451 / 307	268 / 1449 / 320	303 / 1435 / 299	276 / 1454 / 307	276 / 1425 / 336
		$k=2$	120 / 1744 / 173	145 / 1676 / 216	169 / 1670 / 198	153 / 1668 / 216	189 / 1653 / 195	168 / 1670 / 199	175 / 1631 / 231
		$k=3$	81 / 1848 / 108	106 / 1788 / 143	120 / 1778 / 139	119 / 1778 / 140	137 / 1758 / 142	119 / 1781 / 137	135 / 1743 / 159
chrF	4	$k=1$	434 / 1119 / 484	443 / 998 / 596	464 / 993 / 580	500 / 992 / 545	487 / 992 / 558	496 / 995 / 546	476 / 990 / 571
		$k=2$	185 / 1672 / 180	190 / 1625 / 222	182 / 1622 / 233	204 / 1621 / 212	195 / 1618 / 224	183 / 1622 / 232	201 / 1615 / 221
		$k=3$	49 / 1903 / 85	55 / 1879 / 103	71 / 1879 / 87	80 / 1878 / 79	60 / 1877 / 100	70 / 1878 / 89	73 / 1874 / 90
		$k=1$	444 / 1256 / 337	405 / 1127 / 505	445 / 1118 / 474	450 / 1120 / 467	450 / 1110 / 477	460 / 1125 / 452	459 / 1096 / 482
		$k=2$	168 / 1676 / 193	212 / 1583 / 242	254 / 1572 / 211	245 / 1572 / 220	227 / 1559 / 251	253 / 1574 / 210	254 / 1542 / 241
		$k=3$	113 / 1797 / 127	139 / 1741 / 157	148 / 1734 / 155	150 / 1735 / 152	137 / 1721 / 179	149 / 1735 / 153	154 / 1703 / 180
	256	$k=1$	378 / 1365 / 294	343 / 1267 / 427	357 / 1260 / 420	368 / 1263 / 406	383 / 1258 / 396	359 / 1268 / 410	384 / 1247 / 406
		$k=2$	191 / 1653 / 193	226 / 1582 / 229	239 / 1578 / 220	242 / 1578 / 217	229 / 1569 / 239	247 / 1584 / 206	247 / 1557 / 233
		$k=3$	124 / 1792 / 121	147 / 1742 / 148	160 / 1736 / 141	159 / 1737 / 141	156 / 1724 / 157	152 / 1740 / 145	172 / 1710 / 155
BLEURT	4	$k=1$	277 / 1511 / 249	316 / 1448 / 273	187 / 1440 / 410	288 / 1441 / 308	298 / 1439 / 300	289 / 1443 / 305	306 / 1439 / 292
		$k=2$	98 / 1859 / 80	120 / 1832 / 85	84 / 1829 / 124	97 / 1830 / 110	110 / 1828 / 99	100 / 1831 / 106	107 / 1827 / 103
		$k=3$	42 / 1968 / 27	53 / 1955 / 29	51 / 1954 / 32	44 / 1954 / 39	53 / 1953 / 31	44 / 1955 / 38	48 / 1952 / 37
		$k=1$	249 / 1591 / 197	282 / 1517 / 238	145 / 1511 / 381	284 / 1510 / 243	285 / 1501 / 251	268 / 1511 / 258	300 / 1496 / 241
		$k=2$	100 / 1856 / 81	120 / 1823 / 94	99 / 1823 / 115	124 / 1824 / 89	128 / 1814 / 95	133 / 1825 / 79	142 / 1808 / 87
		$k=3$	59 / 1920 / 58	65 / 1906 / 66	65 / 1905 / 67	70 / 1905 / 62	75 / 1897 / 65	69 / 1905 / 63	81 / 1891 / 65
	256	$k=1$	273 / 1571 / 193	325 / 1486 / 226	173 / 1480 / 384	302 / 1481 / 254	321 / 1480 / 236	305 / 1483 / 249	327 / 1475 / 235
		$k=2$	99 / 1860 / 78	115 / 1834 / 88	102 / 1834 / 101	114 / 1834 / 89	123 / 1826 / 88	123 / 1835 / 79	137 / 1818 / 82
		$k=3$	63 / 1930 / 44	70 / 1916 / 51	63 / 1916 / 58	63 / 1917 / 57	73 / 1909 / 55	66 / 1916 / 55	82 / 1900 / 55
COMET	4	$k=1$	163 / 1723 / 151	170 / 1687 / 180	165 / 1686 / 186	167 / 1687 / 183	162 / 1682 / 193	166 / 1687 / 184	164 / 1679 / 194
		$k=2$	62 / 1920 / 55	65 / 1900 / 72	69 / 1900 / 68	73 / 1902 / 62	72 / 1898 / 67	68 / 1902 / 67	76 / 1895 / 66
		$k=3$	27 / 1981 / 29	31 / 1977 / 29	27 / 1976 / 34	32 / 1977 / 28	33 / 1974 / 30	36 / 1976 / 25	35 / 1971 / 31
		$k=1$	149 / 1783 / 105	159 / 1746 / 132	156 / 1741 / 140	139 / 1744 / 154	160 / 1734 / 143	162 / 1742 / 133	160 / 1725 / 152
		$k=2$	87 / 1883 / 67	89 / 1871 / 77	100 / 1871 / 66	107 / 1872 / 58	95 / 1863 / 79	106 / 1870 / 61	107 / 1850 / 80
		$k=3$	49 / 1947 / 41	58 / 1939 / 40	57 / 1939 / 41	57 / 1939 / 41	61 / 1931 / 45	62 / 1939 / 36	68 / 1921 / 48
	256	$k=1$	117 / 1810 / 110	129 / 1784 / 124	132 / 1780 / 125	129 / 1783 / 125	143 / 1776 / 118	129 / 1788 / 120	138 / 1768 / 131
		$k=2$	82 / 1879 / 76	91 / 1861 / 85	103 / 1861 / 73	129 / 1861 / 47	95 / 1854 / 88	106 / 1865 / 66	107 / 1844 / 86
		$k=3$	48 / 1933 / 56	59 / 1918 / 60	67 / 1919 / 51	87 / 1921 / 29	61 / 1911 / 65	66 / 1921 / 50	73 / 1899 / 65
BERTScore	4	$k=1$	399 / 1151 / 487	460 / 1026 / 551	499 / 1017 / 521	508 / 1021 / 508	420 / 1006 / 611	516 / 1025 / 496	482 / 1016 / 539
		$k=2$	164 / 1691 / 182	201 / 1609 / 227	205 / 1607 / 225	223 / 1608 / 206	179 / 1596 / 262	224 / 1611 / 202	214 / 1607 / 216
		$k=3$	56 / 1909 / 72	67 / 1876 / 94	82 / 1874 / 81	82 / 1874 / 81	70 / 1862 / 105	82 / 1875 / 80	79 / 1874 / 84
		$k=1$	401 / 1238 / 398	442 / 1083 / 512	456 / 1079 / 502	497 / 1077 / 463	399 / 1052 / 586	476 / 1084 / 477	485 / 1074 / 478
		$k=2$	196 / 1656 / 185	226 / 1572 / 239	213 / 1566 / 258	252 / 1567 / 218	209 / 1547 / 281	237 / 1575 / 225	233 / 1566 / 238
		$k=3$	106 / 1842 / 89	125 / 1787 / 125	126 / 1786 / 125	138 / 1785 / 114	117 / 1764 / 156	142 / 1787 / 108	143 / 1785 / 109
	256	$k=1$	339 / 1360 / 338	390 / 1215 / 432	412 / 1203 / 422	440 / 1208 / 389	353 / 1180 / 504	425 / 1209 / 403	430 / 1202 / 405
		$k=2$	122 / 1784 / 131	149 / 1719 / 169	158 / 1709 / 170	186 / 1711 / 140	133 / 1682 / 222	179 / 1713 / 145	175 / 1708 / 154
		$k=3$	78 / 1900 / 59	89 / 1860 / 88	92 / 1857 / 88	109 / 1857 / 71	92 / 1827 / 118	99 / 1861 / 77	101 / 1857 / 79

Table 8: Sentence-level comparison between SVD-MBR and MBR on the WMT22 En→De. Cells are formatted as **W / T / L**, indicating the number of sentences where SVD-MBR achieved a higher score (Win), an identical score (Tie), or a lower score (Loss). The rightmost column, $\bar{Z}_{other}$, aggregates the net win rate across all off-target evaluation metrics. **Positive** and **Negative** win rate for SVD-MBR is indicated by the color of the cells.

ranks (k).

The complete W/T/L distributions reveal a critical characteristic regarding SVD-MBR: it is highly conservative in its interventions. Across most configurations, the vast majority of sentence-level comparison result in a "Tie," indicating that SVD-MBR and MBR ultimately select the exact same hypothesis or hypotheses with identical metric scores. For example, when using COMET as utility function, $|\mathcal{Y}| = 256$, and $k = 1$; the methods agreed on approximately 1,780 sentences out of 2,037 sentences on average across all metrics. This high agreement is desirable; it demonstrates that **SVD-MBR operates strictly as a regularization mechanism, preserving the consensus-finding strengths of MBR while only intervening when the pairwise matrix exhibits exploitable noise.**

When SVD-MBR does override the baseline decision (resulting in a Win or a Loss), the frequency of these interventions is generally symmetrical for most metrics. The sheer number of Wins and Losses remains relatively close, suggesting that while **SVD-MBR trades specific local translations, it generally maintains a stable baseline of quality.** However, notable exceptions occur where metric overfitting is most severe. Specifically, when utilizing neural metrics like BLEURT as utility function, $|\mathcal{Y}| = 256$, and $k = 1$; a pronounced asymmetry emerges. For the BLEURT configuration, SVD-MBR achieved 327 wins against only 235 losses on the aggregate off-target evaluation ($\bar{Z}_{other}$). This shows that with metrics that contain noise, SVD-MBR systematically removes it, resulting in a substantial surplus of "Wins" as the

algorithm consistently selects superior hypotheses over utility function-biased hypotheses.

D Additional Experiments

To further examine whether overfitting in MBR and the success of our SVD-MBR approach in mitigating the overfitting is not an occurrence of a single dataset, we expand our experiment using two datasets, the WMT-22 De→En and XSum (Narayan et al., 2018).

D.1 WMT22 De→En

Table 9 presents the overfitting results for the WMT-22 De→En dataset. **Consistent with our findings on the En→De direction, we observe persistent metric overfitting across all evaluated utility functions.** To assess the generalizability of our mitigation strategy, we applied SVD-MBR to this dataset, with the comparative performance detailed in Table 10.

Interestingly, SVD-MBR yields mixed results on surface-level metrics for this language pair. When optimizing for BLEU at a high reference count ($|\mathcal{Y}| = 256$) with a rank-1 approximation ($k = 1$), we observe a significant increase in the off-target BLEURT score. However, optimizing for chrF yields no generalized improvement under any configuration. This instability further solidifies our hypothesis that surface-level metrics lack a robust, low-rank structural consensus, making them highly unreliable candidates for SVD denoising.

Conversely, neural metrics exhibit the same consistent, positive denoising behavior observed previously. **One notable divergence from the En→De dataset is the exceptional performance of BERTScore on De→En.** When utilized as the utility function, BERTScore demonstrates significant improvements across all off-target metrics even under the most aggressive rank truncation ($k = 1$), further reinforcing the compatibility between dense semantic embeddings and low-rank matrix approximation.

We further conducted a Spearman correlation analysis for the WMT22 De→En dataset, following the methodology established in Appendix C.1. Tables 11 and 12 present the correlations of the hypothesis oracle variance and the matrix reconstruction error against the score differences, respectively. Interestingly, **the intrinsic variance of the metrics diverges notably from the En→De dataset.** Specifically, the variances for COMET ($\sigma^2 =$

39.038) and BLEURT ($\sigma^2 = 34.042$) are substantially lower, whereas BERTScore ($\sigma^2 = 16.240$) exhibits slightly increased variance. This shift theoretically explains why BERTScore emerges as the utility function with the most consistent off-target improvements for this specific language pair. Furthermore, despite their reduced variance, optimizing for both COMET and BLEURT still yields predominantly positive performance gains. Conversely, the correlations for surface-level metrics like BLEU and chrF remain unstable, mirroring the poor generalizability observed in the baseline performance comparisons.

Analyzing the matrix reconstruction error against the score differences (Table 12) yields a nuanced result. While the correlation magnitude (*Mag.*) shows a highly significant positive relationship with the aggregated off-target metrics ($\bar{Z}_{\text{other}}$), the directional correlation (*Dir.*) is frequently negative. This indicates a strong inverse relationship: higher matrix reconstruction errors reliably correlate with negative performance deltas (score degradation). Consequently, **for the De→En task, forcing an inaccurate low-rank approximation on the matrix directly harms the final selection quality.**

Furthermore, Table 13 presents the complete sentence-level Win/Tie/Loss (WTL) distribution for the WMT22 De→En dataset. Consistent with our primary findings on the En→De task, the vast majority of SVD-MBR selections result in a Tie, reaffirming that **SVD-MBR acts as a safe, non-destructive regularizer regardless of the language direction.** Reflecting the aggregate performance results from Table 10, the most substantial and consistent net win rates across the off-target metrics ($\bar{Z}_{\text{other}}$) occur when optimizing for BERTScore, followed closely by COMET and BLEURT. Conversely, the surface-level metric chrF rarely yields a net positive win rate, failing to improve generalized quality except in specific edge cases (e.g., $|\mathcal{Y}| = 4, k = 2$ and $|\mathcal{Y}| = 32, k = 3$). Interestingly, BLEU demonstrates a slightly more favorable distribution than chrF on this dataset, achieving positive net wins under several configurations, particularly at the largest reference pool size ($|\mathcal{Y}| = 256$).

These quantitative patterns are supported by the qualitative examples in Table 14, which align with our En→De results. When SVD-MBR utilizes COMET as the utility function, we **observe consistent improvements across all metrics**, including

Decoding Method	Util. Function	$ \mathcal{Y} $	BLEU	chrF	BLEURT	COMET	BERTScore	COMETKiwi	$\bar{Z}_{\text{other}}$
MAP ϵ	N/A	-	26.284	51.041	61.281	78.400	79.477	75.565	0.313
MBR	BLEU	4	24.491 (-1.793)	49.240 (-1.801)	59.936 (-1.346)	77.427 (-0.973)	79.056 (-0.420)	74.187 (-1.378)	-0.663 (-0.976)
		32	26.332 (+0.048)	50.648 (-0.393)	60.723 (-0.558)	78.231 (-0.169)	79.492 (+0.015)	75.094 (-0.471)	-0.048 (-0.361)
		256	26.590 (+0.306)	50.983 (-0.058)	60.865 (-0.416)	78.396 (-0.004)	79.623 (+0.146)	75.265 (-0.300)	0.090 (-0.223)
	chrF	4	24.586 (-1.698)	50.614 (-0.427)	60.505 (-0.776)	77.573 (-0.827)	79.170 (-0.307)	74.577 (-0.988)	-0.395 (-0.708)
		32	26.359 (+0.075)	52.263 (+1.223)	61.624 (+0.343)	78.861 (+0.461)	79.885 (+0.408)	75.869 (+0.304)	0.481 (+0.168)
		256	26.726 (+0.442)	52.620 (+1.580)	61.807 (+0.526)	78.921 (+0.521)	79.961 (+0.484)	75.915 (+0.350)	0.586 (+0.273)
	BLEURT	4	23.838 (-2.446)	49.318 (-1.723)	62.451 (+1.170)	78.596 (+0.196)	79.345 (-0.131)	75.603 (+0.038)	-0.213 (-0.527)
		32	25.343 (-0.941)	50.677 (-0.364)	63.578 (+2.297)	79.295 (+0.894)	79.725 (+0.249)	76.252 (+0.687)	0.426 (+0.113)
		256	25.543 (-0.741)	50.802 (-0.239)	63.851 (+2.570)	79.422 (+1.021)	79.873 (+0.396)	76.420 (+0.855)	0.542 (+0.229)
	COMET	4	24.643 (-1.641)	49.911 (-1.130)	61.730 (+0.449)	81.730 (+3.330)	80.274 (+0.797)	77.467 (+1.902)	0.543 (+0.230)
		32	25.396 (-0.888)	50.738 (-0.303)	62.324 (+1.042)	82.505 (+4.104)	80.625 (+1.149)	78.099 (+2.534)	1.006 (+0.693)
		256	25.846 (-0.438)	51.086 (+0.045)	62.449 (+1.168)	82.599 (+4.198)	80.635 (+1.159)	78.118 (+2.553)	1.135 (+0.822)
	BERTScore	4	23.910 (-2.374)	49.154 (-1.887)	60.145 (-1.136)	77.929 (-0.471)	79.689 (+0.212)	74.879 (-0.686)	-0.483 (-0.796)
		32	25.407 (-0.877)	50.479 (-0.562)	61.017 (-0.264)	78.741 (+0.340)	80.389 (+0.913)	75.752 (+0.187)	0.219 (-0.094)
		256	25.576 (-0.708)	50.782 (-0.259)	61.251 (-0.030)	78.892 (+0.491)	80.554 (+1.077)	75.812 (+0.247)	0.340 (+0.027)
Probabilistic MBR	BLEU	4	23.280 (-3.004)	48.254 (-2.787)	59.120 (-2.161)	76.333 (-2.068)	78.285 (-1.192)	73.118 (-2.448)	-1.360 (-1.673)
		32	24.849 (-1.435)	49.428 (-1.613)	59.834 (-1.447)	77.072 (-1.328)	78.817 (-0.659)	73.892 (-1.674)	-0.788 (-1.101)
		256	25.636 (-0.648)	50.253 (-0.788)	60.478 (-0.803)	77.708 (-0.692)	79.271 (-0.205)	74.447 (-1.118)	-0.333 (-0.646)
	chrF	4	22.695 (-3.589)	48.425 (-2.615)	59.085 (-2.196)	76.187 (-2.214)	78.145 (-1.332)	73.020 (-2.545)	-1.449 (-1.762)
		32	23.656 (-2.628)	49.743 (-1.298)	59.770 (-1.511)	77.025 (-1.375)	78.689 (-0.787)	73.895 (-1.670)	-0.887 (-1.200)
		256	24.266 (-2.018)	50.506 (-0.535)	60.301 (-0.980)	77.442 (-0.958)	78.954 (-0.522)	74.220 (-1.345)	-0.580 (-0.893)
	BLEURT	4	21.255 (-5.029)	46.917 (-4.124)	59.314 (-1.967)	76.254 (-2.146)	77.910 (-1.566)	73.119 (-2.447)	-1.819 (-2.132)
		32	23.781 (-2.503)	49.260 (-1.781)	61.716 (+0.434)	78.200 (-0.200)	79.214 (-0.262)	75.081 (-0.484)	-0.374 (-0.687)
		256	25.323 (-0.961)	50.612 (-0.429)	63.497 (+2.216)	79.143 (+0.743)	79.774 (+0.298)	76.221 (+0.655)	0.406 (+0.093)
	COMET	4	21.605 (-4.679)	47.101 (-3.939)	59.000 (-2.281)	77.077 (-1.324)	78.110 (-1.366)	73.515 (-2.050)	-1.670 (-1.984)
		32	22.646 (-3.639)	48.262 (-2.779)	60.229 (-1.052)	79.408 (+1.008)	79.148 (-0.328)	75.548 (-0.018)	-0.682 (-0.995)
		256	25.857 (-0.427)	51.061 (+0.021)	62.423 (+1.141)	82.242 (+3.841)	80.568 (+1.091)	77.958 (+2.393)	1.092 (+0.779)
	BERTScore	4	21.477 (-4.807)	46.839 (-4.202)	58.535 (-2.746)	75.970 (-2.430)	78.088 (-1.388)	72.760 (-2.806)	-1.838 (-2.151)
		32	22.241 (-4.043)	47.718 (-3.322)	59.301 (-1.981)	76.824 (-1.576)	78.782 (-0.695)	73.852 (-1.713)	-1.273 (-1.586)
		256	25.359 (-0.925)	50.363 (-0.678)	61.143 (-0.138)	78.764 (+0.364)	80.330 (+0.854)	75.720 (+0.155)	0.213 (-0.100)
Model-based MBR	BLEU	256	26.468 (+0.184)	50.997 (-0.044)	60.809 (-0.473)	78.372 (-0.028)	79.701 (+0.225)	75.211 (-0.354)	0.093 (-0.220)
	chrF	256	26.236 (-0.048)	52.665 (+1.624)	61.659 (+0.377)	78.723 (+0.323)	79.937 (+0.461)	75.765 (+0.200)	0.453 (+0.140)
	BLEURT	256	24.993 (-1.291)	50.481 (-0.560)	64.023 (+2.742)	79.380 (+0.979)	79.826 (+0.349)	76.455 (+0.890)	0.414 (+0.101)
	COMET	256	25.334 (-0.950)	50.928 (-0.113)	62.471 (+1.190)	82.704 (+4.303)	80.661 (+1.184)	78.186 (+2.621)	1.065 (+0.751)
	BERTScore	256	25.119 (-1.165)	50.652 (-0.388)	61.194 (-0.087)	78.912 (+0.512)	80.643 (+1.167)	75.891 (+0.326)	0.267 (-0.046)
Oracle	N/A	-	45.472	65.771	70.205	85.631	85.226	81.385	4.001

Table 9: Performance of decoding variants on the WMT22 De $\rightarrow$ En ($|\mathcal{H}| = 256$). Absolute differences (in parentheses) are relative to the MAP ϵ baseline. Color gradation indicates the relative magnitude of improvement or degradation.

COMET itself. In contrast, using BLEU as the utility function results in performance degradation across all metrics, underscoring the metric’s failure to provide a meaningful consensus signal in this denoising paradigm.

D.2 XSum

To evaluate the generalizability of our findings, we extend our analysis to a different text generation domain: abstractive summarization. For this experiment, we utilize the XSum dataset and adapt our experimental setup accordingly, employing a BART-Large model fine-tuned on XSum for hypothesis generation. To capture both dense semantic similarity and surface-level lexical overlap, we evaluate performance using two metric families: BERTScore and ROUGE (Lin, 2004) (specifically ROUGE-1, ROUGE-2, and ROUGE-L). As MBR utility functions, we test BERTScore, ROUGE-1, ROUGE-2, and an unweighted macro-average of the evaluated ROUGE variants, which we denote as ROUGE.

Table 15 presents the overfitting results for the XSum dataset. **The observed trends closely mir-**

ror our translation findings: candidate hypotheses consistently overfit to the specifically designated utility metric. For instance, in standard MBR ($|\mathcal{Y}| = 256$), optimizing for ROUGE-1 disproportionately inflates the ROUGE-1 evaluation score (+2.965), while off-target metrics like BERTScore experience only marginal collateral gains (+0.662). Conversely, optimizing for BERTScore actively suppresses or degrades specific lexical overlaps, as evidenced by the degradation in ROUGE-2 (−0.112). Interestingly, when the aggregated ROUGE metric is employed as the utility function, this narrow metric exploitation is noticeably mitigated, yielding a more balanced and harmonious improvement across all individual ROUGE variants.

Table 16 compares the performance of SVD-MBR against standard MBR on the XSum dataset. Consistent with the results from the translation tasks, employing BERTScore as the utility function yields significant performance increases, particularly at $|\mathcal{Y}| = 256$ and $k = 2$. Interestingly, SVD-MBR also achieves a significant increase in aggregated off-target performance ($\bar{Z}_{\text{other}}$) when

Decoding Method	Util. Function	$ \mathcal{Y} $	BLEU	chrF	BLEURT	COMET	BERTScore	COMETKiwi	$\bar{Z}_{\text{other}}$
MBR	BLEU	4	24.491	49.240	59.936	77.427	79.056	74.187	-1.449
		32	26.332	50.648	60.723	78.231	79.492	75.094	-0.576
		256	26.590	50.983	60.865	78.396	79.623	75.265	-0.377
	chrF	4	24.586	50.614	60.505	77.573	79.170	74.577	-1.097
		32	26.359	52.263	61.624	78.861	79.885	75.869	0.164
		256	26.726	52.620	61.807	78.921	79.961	75.915	0.324
	BLEURT	4	23.838	49.318	62.451	78.596	79.345	75.603	-0.965
		32	25.343	50.677	63.578	79.295	79.725	76.252	0.005
		256	25.543	50.802	63.851	79.422	79.873	76.420	0.177
	COMET	4	24.643	49.911	61.730	81.730	80.274	77.467	0.133
		32	25.396	50.738	62.324	82.505	80.625	78.099	0.832
		256	25.846	51.086	62.449	82.599	80.635	78.118	1.036
	BERTScore	4	23.910	49.154	60.145	77.929	79.689	74.879	-1.253
		32	25.407	50.479	61.017	78.741	80.389	75.752	-0.224
		256	25.576	50.782	61.251	78.892	80.554	75.812	-0.049
SVD-MBR ($k = 1$)	BLEU	4	24.577 (+0.09)	49.359 (+0.12)	59.899 (-0.04)	77.332 (-0.10)	79.027 (-0.03)	74.214 (+0.03)	-1.449 (-0.000)
		32	26.417 (+0.08)	50.794 (+0.15)	60.765 (+0.04)	78.153 (-0.08)	79.532 (+0.04)	75.024 (-0.07)	-0.543 (+0.032)
		256	26.730 (+0.14)	51.079 (+0.10)	61.016 (+0.15)*	78.353 (-0.04)	79.659 (+0.04)	75.227 (-0.04)	-0.327 (+0.050)
	chrF	4	24.497 (-0.09)	50.172 (-0.44)	60.414 (-0.09)	77.694 (+0.12)	79.133 (-0.04)	74.575 (-0.00)	-1.133 (-0.036)
		32	26.085 (-0.27)	51.576 (-0.69)	61.255 (-0.37)	78.559 (-0.30)	79.761 (-0.12)	75.617 (-0.25)	-0.095 (-0.259)
		256	26.693 (-0.03)	51.977 (-0.64)	61.479 (-0.33)	78.789 (-0.13)	79.871 (-0.09)	75.752 (-0.16)	0.176 (-0.148)
	BLEURT	4	23.925 (+0.09)	49.333 (+0.02)	61.724 (-0.73)	78.457 (-0.14)	79.328 (-0.02)	75.375 (-0.23)	-1.006 (-0.041)
		32	25.372 (+0.03)	50.601 (-0.08)	62.844 (-0.73)	79.310 (+0.01)	79.815 (+0.09)*	76.311 (+0.06)	0.041 (+0.037)
		256	25.676 (+0.13)	50.891 (+0.09)	63.113 (-0.74)	79.318 (-0.10)	79.916 (+0.04)	76.415 (-0.00)	0.229 (+0.051)
	COMET	4	24.350 (-0.29)	49.642 (-0.27)	61.518 (-0.21)	81.140 (-0.59)	80.111 (-0.16)	77.190 (-0.28)	-0.139 (-0.272)
		32	25.461 (+0.06)	50.876 (+0.14)	62.193 (-0.13)	82.127 (-0.38)	80.610 (-0.02)	77.933 (-0.17)	0.816 (-0.015)
		256	25.861 (+0.01)	51.099 (+0.01)	62.361 (-0.09)	82.274 (-0.32)	80.638 (+0.00)	78.043 (-0.08)	1.014 (-0.022)
	BERTScore	4	24.033 (+0.12)	49.103 (-0.05)	60.319 (+0.17)*	77.925 (-0.00)	79.522 (-0.17)	74.920 (+0.04)	-1.198 (+0.055)
		32	25.760 (+0.35)*	50.869 (+0.39)*	61.310 (+0.29)*	79.178 (+0.44)*	80.440 (+0.05)	76.274 (+0.52)*	0.137 (+0.361)*
		256	25.990 (+0.41)*	51.081 (+0.30)*	61.505 (+0.25)*	79.311 (+0.42)*	80.538 (-0.02)	76.320 (+0.51)*	0.294 (+0.343)*
SVD-MBR ($k = 2$)	BLEU	4	24.143 (-0.35)	48.881 (-0.36)	59.849 (-0.09)	77.340 (-0.09)	78.980 (-0.08)	74.134 (-0.05)	-1.591 (-0.143)
		32	26.173 (-0.16)	50.565 (-0.08)	60.765 (+0.04)	78.200 (-0.03)	79.503 (+0.01)	75.056 (-0.04)	-0.592 (-0.016)
		256	26.462 (-0.13)	50.918 (-0.07)	60.920 (+0.06)	78.399 (+0.00)	79.634 (+0.01)	75.303 (+0.04)	-0.370 (+0.008)
	chrF	4	24.527 (-0.06)	50.481 (-0.13)	60.547 (+0.04)	77.602 (+0.03)	79.161 (-0.01)	74.617 (+0.04)	-1.095 (+0.002)
		32	26.293 (-0.07)	52.146 (-0.12)	61.524 (-0.10)	78.774 (-0.09)	79.819 (-0.07)	75.797 (-0.07)	0.082 (-0.082)
		256	26.817 (+0.09)	52.577 (-0.04)	61.777 (-0.03)	78.810 (-0.11)	79.945 (-0.02)	75.821 (-0.09)	0.302 (-0.022)
	BLEURT	4	23.737 (-0.10)	49.326 (+0.01)	62.288 (-0.16)	78.522 (-0.07)	79.267 (-0.08)	75.570 (-0.03)	-1.031 (-0.066)
		32	25.436 (+0.09)	50.761 (+0.08)	63.524 (-0.05)	79.303 (+0.01)	79.749 (+0.02)	76.355 (+0.10)*	0.071 (+0.066)
		256	25.579 (+0.04)	50.892 (+0.09)	63.796 (-0.06)	79.420 (-0.00)	79.882 (+0.01)	76.505 (+0.09)	0.223 (+0.045)
	COMET	4	24.579 (-0.06)	49.904 (-0.01)	61.693 (-0.04)	81.637 (-0.09)	80.262 (-0.01)	77.396 (-0.07)	0.094 (-0.040)
		32	25.518 (+0.12)	50.862 (+0.12)	62.360 (+0.04)	82.527 (+0.02)	80.699 (+0.07)*	78.175 (+0.08)*	0.933 (+0.102)*
		256	25.817 (-0.03)	51.156 (+0.07)	62.529 (+0.08)*	82.651 (+0.05)*	80.742 (+0.11)*	78.211 (+0.09)*	1.116 (+0.081)*
	BERTScore	4	23.991 (+0.08)	49.081 (-0.07)	60.197 (+0.05)	77.981 (+0.05)	79.626 (-0.06)	74.914 (+0.04)	-1.228 (+0.024)
		32	25.472 (+0.07)	50.525 (+0.05)	61.062 (+0.05)	78.757 (+0.02)	80.359 (-0.03)	75.870 (+0.12)*	-0.169 (+0.055)
		256	25.839 (+0.26)*	50.928 (+0.15)*	61.308 (+0.06)	79.072 (+0.18)*	80.545 (-0.01)	76.004 (+0.19)*	0.107 (+0.156)*
SVD-MBR ($k = 3$)	BLEU	4	24.237 (-0.25)	49.056 (-0.18)	59.806 (-0.13)	77.279 (-0.15)	79.016 (-0.04)	74.083 (-0.10)	-1.564 (-0.115)
		32	26.054 (-0.28)	50.526 (-0.12)	60.663 (-0.06)	78.195 (-0.04)	79.462 (-0.03)	75.138 (+0.04)	-0.622 (-0.046)
		256	26.519 (-0.07)	50.962 (-0.02)	60.845 (-0.02)	78.412 (+0.02)	79.602 (-0.02)	75.274 (+0.01)	-0.390 (-0.013)
	chrF	4	24.474 (-0.11)	50.517 (-0.10)	60.472 (-0.03)	77.528 (-0.04)	79.135 (-0.03)	74.565 (-0.01)	-1.149 (-0.052)
		32	26.361 (+0.00)	52.259 (-0.00)	61.613 (-0.01)	78.847 (-0.01)	79.898 (+0.01)	75.939 (+0.07)	0.178 (+0.014)
		256	26.693 (-0.03)	52.645 (+0.02)	61.766 (-0.04)	78.810 (-0.11)	79.931 (-0.03)	75.847 (-0.07)	0.272 (-0.052)
	BLEURT	4	23.900 (+0.06)	49.392 (+0.07)	62.448 (-0.00)	78.588 (-0.01)	79.334 (-0.01)	75.552 (-0.05)	-0.950 (+0.015)
		32	25.455 (+0.11)*	50.768 (+0.09)	63.616 (+0.04)	79.363 (+0.07)*	79.772 (+0.05)*	76.327 (+0.08)*	0.088 (+0.084)*
		256	25.526 (-0.02)	50.847 (+0.05)	63.801 (-0.05)	79.447 (+0.03)	79.868 (-0.00)	76.461 (+0.04)	0.192 (+0.015)
	COMET	4	24.731 (+0.09)	50.007 (+0.10)*	61.740 (+0.01)	81.705 (-0.03)	80.274 (+0.00)	77.437 (-0.03)	0.170 (+0.037)
		32	25.416 (+0.02)	50.805 (+0.07)	62.377 (+0.05)	82.545 (+0.04)	80.678 (+0.05)*	78.170 (+0.07)*	0.893 (+0.061)*
		256	25.840 (-0.01)	51.114 (+0.03)	62.481 (+0.03)	82.650 (+0.05)*	80.687 (+0.05)*	78.180 (+0.06)*	1.077 (+0.041)*
	BERTScore	4	24.007 (+0.10)*	49.195 (+0.04)	60.166 (+0.02)	77.920 (-0.01)	79.683 (-0.01)	74.838 (-0.04)	-1.227 (+0.026)
		32	25.456 (+0.05)	50.533 (+0.05)	61.058 (+0.04)	78.805 (+0.06)	80.381 (-0.01)	75.883 (+0.13)*	-0.163 (+0.061)*
		256	25.605 (+0.03)	50.875 (+0.09)	61.253 (+0.00)	78.935 (+0.04)	80.552 (-0.00)	75.931 (+0.12)*	0.003 (+0.053)*
Oracle	N/A	-	45.472	65.771	70.205	85.631	85.226	81.385	5.528

Table 10: Performance of MBR vs. SVD-MBR on WMT22 De→En ($|\mathcal{H}| = 256$). $\bar{Z}_{\text{other}}$ represents the mean z-score of all non-utility function evaluation metrics. Values in parentheses are absolute differences against MBR, with colors indicating relative improvement or degradation. Statistical significance ($p < 0.05$) is marked with *.

utilizing ROUGE-1 at $|\mathcal{Y}| = 256$ and $k = 3$. This further demonstrates that our method can mitigate overfitting even when applied to surface-level metrics, although its efficacy remains more unstable compared to neural metrics.

The Spearman correlations between the performance deltas and both the inherent hypothesis oracle variance and the matrix reconstruction error are presented in Tables 17 and 18, respectively. Surprisingly, the variance correlation analysis reveals that for both BERTScore and the ROUGE vari-

ants, nearly all configurations achieve a significant positive correlation with the $\bar{Z}_{\text{other}}$ score, regardless of the overall intrinsic variance of each metric. This indicates that **SVD-MBR successfully improves outputs in high-variance scenarios while maintaining parity with standard MBR when variance is low**. Conversely, the correlation between matrix reconstruction error and evaluation score differences shows a negative trajectory for $\bar{Z}_{\text{other}}$. This suggests that although higher inherent variance leads to better denoising performance

Util. Function	$\mathcal{Y}$	Top- k	BLEU ($\sigma^2 = 96.972$)		chrF ($\sigma^2 = 76.595$)		BLEURT ($\sigma^2 = 34.042$)		COMET ($\sigma^2 = 39.038$)		BERTScore ($\sigma^2 = 16.240$)		COMETKiwi ($\sigma^2 = 44.653$)		$\bar{Z}_{\text{other}}$ ($\sigma^2 = 0.174$)	
			Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.
BLEU	4	$k = 1$	+0.03	0.08*	+0.02	0.01	+0.02	0.01	+0.00	0.07*	+0.07*	0.02	+0.03	0.09*	+0.04	0.02
		$k = 2$	-0.03	0.01	-0.01	0.03	-0.01	0.02	+0.01	0.04*	+0.06*	0.02	+0.01	0.06*	-0.01	0.02
		$k = 3$	-0.04*	-0.02	-0.06*	0.00	-0.01	0.00	-0.02	0.04	+0.01	0.01	+0.02	0.04	-0.02	0.01
	32	$k = 1$	+0.00	0.01	+0.01	-0.06*	+0.06*	0.01	+0.03	0.08*	+0.03	0.01	+0.00	0.13*	+0.06*	0.02
		$k = 2$	-0.04	0.04	-0.02	0.04	+0.02	0.05*	+0.03	0.11*	+0.02	0.08*	-0.01	0.13*	+0.00	0.08*
		$k = 3$	-0.03	-0.03	-0.02	0.01	+0.01	0.05*	+0.03	0.12*	+0.01	0.10*	+0.00	0.14*	+0.00	0.07*
	256	$k = 1$	+0.04	0.01	+0.05*	-0.01	+0.00	0.02	-0.02	0.07*	+0.01	0.06*	+0.01	0.08*	+0.00	0.04
		$k = 2$	-0.03	-0.03	+0.00	0.01	+0.02	0.03	-0.01	0.09*	+0.00	0.06*	+0.00	0.08*	+0.00	0.06*
		$k = 3$	+0.02	-0.01	-0.02	0.05*	-0.02	0.04	-0.01	0.05*	-0.02	0.08*	+0.01	0.06*	-0.01	0.07*
chrF	4	$k = 1$	+0.02	0.10*	+0.01	0.09*	+0.01	0.09*	+0.03	0.13*	+0.04	0.10*	+0.00	0.18*	+0.05*	0.09*
		$k = 2$	-0.02	0.03	-0.02	0.05*	+0.04	0.06*	+0.05*	0.07*	+0.01	0.06*	+0.00	0.10*	+0.04	0.06*
		$k = 3$	+0.00	-0.01	-0.05*	-0.00	+0.00	0.04	+0.00	0.05*	+0.02	0.02	-0.03	0.06*	+0.00	0.03
	32	$k = 1$	+0.03	0.07*	+0.06*	0.07*	-0.02	0.12*	+0.02	0.16*	-0.01	0.14*	-0.01	0.16*	+0.00	0.11*
		$k = 2$	-0.02	-0.01	-0.01	0.05*	-0.01	0.06*	+0.02	0.12*	+0.00	0.11*	+0.00	0.14*	+0.01	0.08*
		$k = 3$	+0.02	0.01	+0.00	0.07*	+0.03	0.09*	+0.03	0.14*	-0.01	0.12*	+0.00	0.12*	+0.03	0.10*
	256	$k = 1$	-0.01	0.05*	+0.02	0.08*	+0.00	0.12*	-0.01	0.17*	-0.05*	0.14*	-0.04*	0.18*	-0.02	0.12*
		$k = 2$	+0.01	0.02	+0.00	0.09*	+0.02	0.11*	-0.01	0.14*	+0.01	0.11*	+0.00	0.14*	+0.00	0.11*
		$k = 3$	+0.00	-0.01	+0.00	0.05*	+0.00	0.08*	+0.02	0.11*	+0.00	0.11*	+0.02	0.10*	+0.00	0.09*
BLEURT	4	$k = 1$	+0.00	0.06*	+0.02	0.08*	+0.00	0.08*	-0.02	0.11*	+0.04	0.11*	+0.02	0.13*	+0.02	0.08*
		$k = 2$	+0.01	0.03	+0.04	0.06*	-0.04	0.03	-0.07*	0.07*	-0.02	0.05*	-0.03	0.07*	+0.00	0.06*
		$k = 3$	+0.02	0.00	+0.04	0.05*	-0.03	0.04	-0.01	0.07*	-0.02	0.04	-0.02	0.06*	+0.01	0.06*
	32	$k = 1$	+0.01	0.05*	+0.03	0.09*	+0.01	0.11*	+0.05*	0.15*	+0.01	0.13*	+0.08*	0.16*	+0.05*	0.10*
		$k = 2$	-0.01	0.03	+0.05*	0.08*	+0.02	0.09*	+0.03	0.11*	+0.02	0.09*	+0.04	0.12*	+0.01	0.09*
		$k = 3$	+0.01	0.01	+0.01	0.03	-0.02	0.05*	+0.02	0.06*	+0.00	0.09*	+0.02	0.07*	+0.01	0.06*
	256	$k = 1$	-0.01	0.08*	+0.01	0.13*	+0.01	0.16*	+0.04	0.20*	-0.01	0.18*	+0.04	0.20*	+0.02	0.17*
		$k = 2$	+0.00	0.03	+0.00	0.10*	+0.03	0.11*	+0.02	0.14*	-0.04	0.13*	-0.02	0.14*	-0.02	0.12*
		$k = 3$	+0.01	-0.02	+0.01	0.05*	+0.02	0.03	+0.05*	0.09*	-0.03	0.10*	-0.02	0.09*	+0.00	0.08*
COMET	4	$k = 1$	-0.02	0.13*	+0.00	0.14*	-0.01	0.10*	-0.01	0.11*	-0.01	0.15*	-0.01	0.09*	+0.00	0.14*
		$k = 2$	-0.01	0.01	+0.02	0.01	-0.01	0.02	-0.02	0.05*	+0.00	0.06*	-0.01	0.05*	-0.02	0.03
		$k = 3$	+0.01	-0.01	+0.01	-0.03	-0.03	0.00	-0.03	0.00	+0.00	0.03	-0.01	0.00	+0.00	0.01
	32	$k = 1$	+0.00	0.06*	+0.02	0.08*	+0.02	0.08*	-0.01	0.08*	-0.02	0.07*	-0.05*	0.08*	-0.01	0.08*
		$k = 2$	-0.02	0.01	+0.02	0.01	+0.00	-0.01	+0.02	0.01	+0.02	0.01	-0.01	0.01	+0.01	0.00
		$k = 3$	-0.03	-0.02	-0.01	-0.01	+0.03	-0.02	+0.04	0.03	-0.01	0.00	-0.02	0.04	+0.01	-0.00
	256	$k = 1$	+0.03	0.05*	+0.02	0.09*	+0.03	0.09*	+0.03	0.09*	+0.01	0.11*	-0.03	0.10*	+0.02	0.11*
		$k = 2$	-0.02	0.04	+0.00	0.05*	+0.03	0.02	+0.04*	0.03	+0.04	0.05*	-0.03	0.02	+0.03	0.05*
		$k = 3$	+0.00	0.02	+0.01	0.04*	+0.03	-0.00	+0.08*	0.05*	+0.01	0.04	+0.01	0.04	+0.03	0.04*
BERTScore	4	$k = 1$	+0.01	0.15*	+0.00	0.11*	+0.02	0.10*	+0.01	0.14*	+0.02	0.11*	+0.05*	0.15*	+0.04	0.11*
		$k = 2$	+0.02	0.02	-0.01	0.05*	+0.01	0.06*	+0.01	0.10*	+0.00	0.11*	+0.00	0.10*	+0.03	0.07*
		$k = 3$	-0.01	-0.01	+0.01	0.01	+0.00	0.02	+0.04	0.06*	+0.02	0.05*	+0.01	0.06*	+0.05*	0.04
	32	$k = 1$	+0.01	0.08*	+0.03	0.06*	+0.00	0.09*	+0.03	0.14*	+0.04	0.14*	+0.03	0.17*	+0.01	0.08*
		$k = 2$	+0.01	0.01	+0.04	0.04	+0.01	0.09*	+0.03	0.14*	+0.01	0.13*	+0.01	0.12*	+0.01	0.09*
		$k = 3$	+0.04	-0.03	+0.05*	0.02	+0.03	0.08*	+0.01	0.11*	-0.01	0.13*	+0.02	0.11*	+0.02	0.08*
	256	$k = 1$	+0.04	0.10*	+0.03	0.10*	+0.01	0.14*	+0.05*	0.20*	+0.05*	0.19*	+0.06*	0.18*	+0.03	0.14*
		$k = 2$	+0.03	0.05*	+0.01	0.09*	+0.04	0.11*	+0.04	0.14*	+0.02	0.15*	+0.04	0.14*	+0.02	0.13*
		$k = 3$	+0.03	0.02	+0.01	0.04*	+0.00	0.07*	+0.01	0.10*	+0.01	0.10*	+0.03	0.08*	+0.01	0.09*

Table 11: Spearman correlation (ρ) between inherent hypotheses oracle variance and evaluation score differences across varying pseudo-reference pool sizes ($|\mathcal{Y}|$) on WMT22 De $\rightarrow$ En. The hypothesis pool variance (σ^2) for each evaluation metric is displayed in the respective column headers. *Dir.* (Directional Change) measures score improvements, highlighted as positive and negative impacts. *Mag.* (Magnitude Sensitivity) measures absolute score variance, with blue highlighting metric sensitivity. Statistical significance ($p < 0.05$) is denoted by an asterisk (*).

by SVD-MBR, this improvement does not directly mathematically translate from larger matrix reconstruction errors in this specific domain.

Furthermore, our sentence-level Win/Tie/Loss (WTL) comparison in Table 19 mirrors the aggregate performance scores observed in Table 16. The data demonstrates that our method is highly effective when utilizing BERTScore and ROUGE-1 as utility functions, but yields less consistent improvements across the remaining metrics. Finally, the qualitative examples in Table 20, selected using the BERTScore and ROUGE-1 configurations, high-

light that sentence-level generations can differ substantially. For example, in the success case utilizing BERTScore, the performance gains across all off-target metrics are exceptionally high. Conversely, the failure case utilizing ROUGE-1 illustrates a severe degradation, marked by significant decreases in both ROUGE-2 and ROUGE-L scores.

Util. Function	$\mathcal{V}$	Top- k	BLEU		chrF		BLEURT		COMET		BERTScore		COMETKiwi		$\hat{Z}_{\text{other}}$	
			Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.
BLEU	4	$k = 1$	-0.06*	0.28*	-0.02	0.27*	-0.01	0.26*	-0.02	0.28*	-0.03	0.28*	-0.04	0.28*	-0.03	0.27*
		$k = 2$	-0.03	0.23*	-0.03	0.23*	-0.01	0.23*	-0.02	0.24*	-0.02	0.23*	-0.06*	0.24*	-0.03	0.23*
		$k = 3$	-0.03	0.20*	-0.01	0.19*	-0.03	0.19*	-0.04	0.19*	-0.01	0.19*	-0.03	0.19*	-0.04	0.19*
	32	$k = 1$	+0.03	0.24*	+0.03	0.24*	-0.02	0.20*	+0.03	0.22*	+0.01	0.22*	+0.00	0.22*	+0.01	0.21*
		$k = 2$	-0.03	0.24*	-0.01	0.25*	-0.01	0.22*	-0.01	0.25*	+0.03	0.23*	+0.00	0.24*	+0.00	0.22*
		$k = 3$	-0.05*	0.25*	-0.01	0.26*	-0.04	0.23*	+0.02	0.25*	+0.01	0.23*	+0.01	0.25*	+0.00	0.22*
	256	$k = 1$	-0.04	0.23*	+0.01	0.22*	+0.02	0.22*	-0.03	0.23*	+0.00	0.21*	-0.02	0.22*	+0.00	0.20*
		$k = 2$	+0.00	0.22*	-0.01	0.22*	+0.03	0.21*	-0.02	0.21*	+0.01	0.19*	+0.01	0.22*	+0.01	0.18*
		$k = 3$	-0.02	0.17*	+0.00	0.17*	-0.02	0.14*	-0.02	0.16*	-0.04	0.12*	+0.00	0.16*	-0.04	0.11*
chrF	4	$k = 1$	-0.07*	0.23*	-0.05*	0.23*	-0.03	0.21*	-0.03	0.23*	-0.04	0.22*	-0.02	0.24*	-0.06*	0.22*
		$k = 2$	+0.02	0.24*	+0.01	0.24*	+0.01	0.23*	+0.03	0.23*	+0.04	0.24*	-0.01	0.24*	+0.02	0.23*
		$k = 3$	-0.01	0.18*	+0.02	0.19*	+0.03	0.18*	+0.00	0.18*	+0.00	0.18*	+0.01	0.18*	+0.00	0.19*
	32	$k = 1$	-0.02	0.18*	-0.05*	0.18*	+0.01	0.17*	+0.00	0.17*	+0.00	0.16*	+0.01	0.18*	+0.00	0.16*
		$k = 2$	-0.01	0.18*	-0.02	0.21*	+0.00	0.20*	+0.00	0.21*	+0.01	0.20*	-0.01	0.21*	-0.01	0.19*
		$k = 3$	+0.00	0.14*	+0.00	0.15*	-0.02	0.13*	+0.00	0.14*	+0.01	0.12*	+0.00	0.16*	-0.02	0.11*
	256	$k = 1$	+0.03	0.13*	-0.03	0.12*	+0.00	0.10*	+0.00	0.12*	+0.02	0.09*	+0.02	0.13*	+0.00	0.10*
		$k = 2$	+0.00	0.16*	-0.02	0.16*	-0.02	0.15*	-0.05*	0.16*	-0.01	0.14*	-0.02	0.16*	-0.04	0.14*
		$k = 3$	+0.01	0.12*	+0.01	0.13*	+0.00	0.11*	+0.01	0.11*	+0.01	0.09*	-0.02	0.12*	-0.01	0.09*
BLEURT	4	$k = 1$	+0.02	0.27*	+0.00	0.29*	-0.11*	0.30*	-0.04	0.30*	-0.02	0.29*	-0.02	0.30*	-0.02	0.29*
		$k = 2$	+0.02	0.20*	+0.02	0.21*	-0.06*	0.21*	-0.04	0.21*	-0.02	0.20*	-0.04	0.21*	-0.01	0.20*
		$k = 3$	+0.00	0.12*	+0.02	0.11*	+0.00	0.10*	+0.02	0.10*	-0.04	0.10*	-0.04	0.10*	+0.00	0.10*
	32	$k = 1$	+0.01	0.15*	+0.02	0.17*	-0.05*	0.18*	+0.02	0.18*	+0.05*	0.18*	+0.03	0.19*	+0.01	0.17*
		$k = 2$	+0.04	0.16*	+0.03	0.17*	-0.04	0.17*	+0.01	0.17*	+0.01	0.16*	-0.01	0.18*	+0.01	0.16*
		$k = 3$	+0.00	0.12*	+0.01	0.11*	+0.03	0.10*	+0.02	0.11*	+0.04	0.09*	+0.02	0.11*	+0.02	0.08*
	256	$k = 1$	+0.02	0.05*	+0.03	0.05*	-0.01	0.05*	+0.01	0.06*	+0.01	0.04	-0.02	0.06*	+0.02	0.04
		$k = 2$	+0.00	0.09*	+0.02	0.10*	-0.02	0.09*	+0.02	0.10*	+0.01	0.08*	-0.04	0.11*	+0.00	0.08*
		$k = 3$	-0.03	0.07*	-0.04	0.06*	-0.03	0.05*	-0.05*	0.05*	+0.00	0.04	+0.00	0.06*	-0.02	0.03
COMET	4	$k = 1$	-0.02	0.30*	-0.03	0.33*	-0.08*	0.34*	-0.16*	0.35*	-0.06*	0.34*	-0.07*	0.35*	-0.07*	0.33*
		$k = 2$	-0.04	0.18*	-0.01	0.20*	-0.08*	0.20*	-0.07*	0.20*	-0.04	0.20*	-0.05*	0.20*	-0.05*	0.20*
		$k = 3$	+0.04	0.14*	+0.06*	0.14*	+0.00	0.13*	-0.02	0.14*	+0.00	0.13*	+0.01	0.14*	+0.00	0.13*
	32	$k = 1$	+0.00	0.20*	+0.02	0.21*	-0.02	0.22*	-0.08*	0.22*	-0.01	0.21*	-0.01	0.22*	-0.02	0.21*
		$k = 2$	+0.02	0.13*	+0.01	0.14*	-0.01	0.14*	+0.00	0.15*	+0.03	0.14*	+0.05*	0.14*	+0.02	0.13*
		$k = 3$	+0.04	0.11*	+0.04	0.11*	+0.02	0.12*	+0.04	0.12*	+0.03	0.09*	+0.03	0.12*	+0.02	0.09*
	256	$k = 1$	-0.03	0.17*	-0.01	0.18*	-0.04*	0.18*	-0.10*	0.20*	-0.01	0.18*	+0.00	0.20*	-0.02	0.18*
		$k = 2$	-0.04	0.10*	-0.02	0.11*	-0.01	0.10*	-0.01	0.12*	+0.06*	0.11*	+0.03	0.12*	+0.00	0.10*
		$k = 3$	-0.01	0.05*	+0.00	0.06*	+0.01	0.04	-0.01	0.06*	+0.02	0.04	+0.02	0.07*	-0.01	0.02
BERTScore	4	$k = 1$	-0.02	0.19*	-0.01	0.20*	+0.00	0.20*	+0.01	0.24*	-0.04	0.22*	+0.00	0.26*	-0.01	0.20*
		$k = 2$	-0.05*	0.21*	-0.06*	0.22*	-0.02	0.21*	-0.03	0.22*	-0.09*	0.20*	+0.00	0.23*	-0.05*	0.20*
		$k = 3$	+0.02	0.15*	+0.01	0.16*	+0.00	0.10*	-0.03	0.14*	-0.01	0.06*	-0.06*	0.15*	-0.04	0.09*
	32	$k = 1$	+0.00	0.09*	-0.01	0.09*	-0.02	0.10*	+0.01	0.13*	+0.04	0.11*	+0.00	0.14*	-0.01	0.09*
		$k = 2$	+0.01	0.17*	-0.01	0.18*	+0.02	0.17*	-0.01	0.19*	-0.01	0.16*	+0.01	0.20*	+0.00	0.16*
		$k = 3$	-0.06*	0.10*	-0.04	0.11*	+0.02	0.07*	-0.01	0.11*	+0.00	0.03	+0.01	0.11*	+0.01	0.07*
	256	$k = 1$	-0.02	0.11*	-0.02	0.09*	-0.03	0.10*	+0.03	0.13*	+0.04	0.11*	+0.03	0.15*	+0.01	0.09*
		$k = 2$	+0.02	0.16*	+0.00	0.17*	-0.03	0.13*	-0.01	0.18*	-0.02	0.12*	+0.03	0.18*	+0.01	0.13*
		$k = 3$	-0.02	0.08*	-0.02	0.08*	-0.04	0.02	-0.01	0.07*	-0.02	-0.00	+0.02	0.09*	-0.03	0.01

Table 12: Spearman correlation (ρ) between matrix reconstruction errors and evaluation score differences across varying reference pool sizes ($|\mathcal{V}|$) on WMT22 De $\rightarrow$ En. *Dir.* (Directional Change) measures score improvements, highlighted as **positive** and **negative** impacts. *Mag.* (Magnitude Sensitivity) measures absolute score variance, with **blue** highlighting metric sensitivity to matrix modifications. Statistical significance ($p < 0.05$) is denoted by an asterisk (*).

Util. Function	$ \mathcal{Y} $	Top- k	BLEU	chrF	BLEURT	COMET	BERTScore	COMETKiwi	$\bar{Z}_{\text{other}}$
BLEU	4	$k = 1$	440 / 1076 / 468	491 / 992 / 501	500 / 989 / 495	477 / 993 / 514	467 / 987 / 530	467 / 995 / 522	486 / 987 / 511
		$k = 2$	210 / 1507 / 267	233 / 1446 / 305	245 / 1447 / 292	252 / 1448 / 284	241 / 1444 / 299	244 / 1451 / 289	241 / 1444 / 299
		$k = 3$	97 / 1769 / 118	114 / 1732 / 138	111 / 1729 / 144	97 / 1733 / 154	117 / 1729 / 138	111 / 1731 / 142	105 / 1729 / 150
	32	$k = 1$	350 / 1294 / 340	412 / 1174 / 398	399 / 1160 / 425	426 / 1167 / 391	410 / 1153 / 421	391 / 1174 / 419	426 / 1133 / 425
		$k = 2$	233 / 1472 / 279	282 / 1391 / 311	297 / 1366 / 321	280 / 1385 / 319	308 / 1366 / 310	280 / 1391 / 313	310 / 1339 / 335
		$k = 3$	168 / 1614 / 202	208 / 1556 / 220	233 / 1525 / 226	215 / 1544 / 225	225 / 1533 / 226	202 / 1549 / 233	236 / 1503 / 245
	256	$k = 1$	226 / 1498 / 260	277 / 1433 / 274	311 / 1425 / 248	267 / 1429 / 288	275 / 1419 / 290	276 / 1433 / 275	294 / 1404 / 286
		$k = 2$	137 / 1682 / 165	172 / 1628 / 184	193 / 1613 / 178	169 / 1617 / 198	175 / 1611 / 198	178 / 1629 / 177	192 / 1587 / 205
		$k = 3$	93 / 1782 / 109	129 / 1739 / 116	137 / 1718 / 129	130 / 1730 / 124	122 / 1716 / 146	131 / 1732 / 121	150 / 1685 / 149
chrF	4	$k = 1$	420 / 1100 / 464	437 / 1014 / 533	453 / 1012 / 519	476 / 1014 / 494	455 / 1009 / 520	471 / 1019 / 494	451 / 1009 / 524
		$k = 2$	215 / 1572 / 197	224 / 1525 / 235	224 / 1522 / 238	248 / 1521 / 215	233 / 1520 / 231	233 / 1528 / 223	239 / 1519 / 226
		$k = 3$	80 / 1821 / 83	93 / 1796 / 95	85 / 1793 / 106	92 / 1794 / 98	89 / 1792 / 103	92 / 1797 / 95	92 / 1791 / 101
	32	$k = 1$	362 / 1249 / 373	355 / 1146 / 483	376 / 1132 / 476	384 / 1146 / 454	407 / 1128 / 449	392 / 1151 / 441	392 / 1115 / 477
		$k = 2$	192 / 1578 / 214	216 / 1511 / 257	232 / 1493 / 259	224 / 1503 / 257	228 / 1493 / 263	237 / 1513 / 234	232 / 1471 / 281
		$k = 3$	122 / 1724 / 138	139 / 1686 / 159	156 / 1664 / 164	164 / 1674 / 146	166 / 1666 / 152	157 / 1686 / 141	175 / 1638 / 171
	256	$k = 1$	324 / 1375 / 285	281 / 1295 / 408	306 / 1282 / 396	304 / 1292 / 388	337 / 1279 / 368	299 / 1295 / 390	320 / 1267 / 397
		$k = 2$	200 / 1590 / 194	208 / 1532 / 244	229 / 1512 / 243	225 / 1518 / 241	229 / 1509 / 246	219 / 1527 / 238	236 / 1490 / 258
		$k = 3$	122 / 1720 / 142	134 / 1680 / 170	150 / 1663 / 171	151 / 1668 / 165	151 / 1659 / 174	145 / 1675 / 164	158 / 1643 / 183
BLEURT	4	$k = 1$	312 / 1352 / 320	338 / 1288 / 358	234 / 1286 / 464	325 / 1286 / 373	352 / 1281 / 351	310 / 1289 / 385	333 / 1279 / 372
		$k = 2$	115 / 1738 / 131	144 / 1710 / 130	109 / 1707 / 168	134 / 1710 / 140	127 / 1706 / 151	123 / 1709 / 152	130 / 1704 / 150
		$k = 3$	40 / 1900 / 44	59 / 1884 / 41	52 / 1882 / 50	61 / 1882 / 41	52 / 1881 / 51	49 / 1884 / 51	59 / 1880 / 45
	32	$k = 1$	332 / 1338 / 314	349 / 1268 / 367	226 / 1252 / 506	335 / 1260 / 389	377 / 1250 / 357	357 / 1266 / 361	371 / 1244 / 369
		$k = 2$	137 / 1730 / 117	155 / 1693 / 136	145 / 1674 / 165	141 / 1687 / 156	147 / 1675 / 162	155 / 1689 / 140	162 / 1665 / 157
		$k = 3$	75 / 1847 / 62	86 / 1827 / 71	84 / 1809 / 91	84 / 1822 / 78	93 / 1809 / 82	91 / 1825 / 68	104 / 1796 / 84
	256	$k = 1$	362 / 1351 / 271	369 / 1261 / 354	232 / 1248 / 504	350 / 1255 / 379	375 / 1242 / 367	358 / 1262 / 364	384 / 1237 / 363
		$k = 2$	157 / 1697 / 130	176 / 1641 / 167	170 / 1627 / 187	169 / 1634 / 181	167 / 1626 / 191	183 / 1638 / 163	177 / 1622 / 185
		$k = 3$	83 / 1823 / 78	102 / 1793 / 89	101 / 1780 / 103	103 / 1788 / 93	97 / 1781 / 106	100 / 1792 / 92	103 / 1771 / 110
COMET	4	$k = 1$	220 / 1496 / 268	247 / 1451 / 286	238 / 1443 / 303	191 / 1445 / 348	241 / 1443 / 300	241 / 1448 / 295	235 / 1440 / 309
		$k = 2$	79 / 1803 / 102	96 / 1783 / 105	95 / 1778 / 111	90 / 1780 / 114	101 / 1778 / 105	94 / 1781 / 109	101 / 1775 / 108
		$k = 3$	38 / 1913 / 33	46 / 1906 / 32	43 / 1903 / 38	34 / 1904 / 46	41 / 1903 / 40	41 / 1906 / 37	43 / 1899 / 42
	32	$k = 1$	215 / 1574 / 195	235 / 1524 / 225	211 / 1514 / 259	163 / 1523 / 298	254 / 1514 / 216	227 / 1530 / 227	242 / 1499 / 243
		$k = 2$	107 / 1794 / 83	112 / 1766 / 106	120 / 1758 / 106	109 / 1765 / 110	135 / 1761 / 88	125 / 1769 / 90	134 / 1742 / 108
		$k = 3$	72 / 1855 / 57	71 / 1849 / 64	80 / 1841 / 63	80 / 1847 / 57	85 / 1842 / 57	79 / 1852 / 53	88 / 1819 / 77
	256	$k = 1$	193 / 1613 / 178	215 / 1556 / 213	218 / 1542 / 224	169 / 1550 / 265	241 / 1548 / 195	213 / 1557 / 214	239 / 1533 / 212
		$k = 2$	83 / 1808 / 93	104 / 1772 / 108	128 / 1760 / 96	123 / 1767 / 94	135 / 1762 / 87	127 / 1773 / 84	140 / 1746 / 98
		$k = 3$	52 / 1876 / 56	56 / 1861 / 67	74 / 1849 / 61	67 / 1861 / 56	78 / 1857 / 49	69 / 1864 / 51	87 / 1835 / 62
BERTScore	4	$k = 1$	453 / 1081 / 450	474 / 984 / 526	533 / 958 / 493	501 / 973 / 510	471 / 954 / 559	500 / 988 / 496	515 / 955 / 514
		$k = 2$	173 / 1640 / 171	171 / 1603 / 210	204 / 1579 / 201	200 / 1595 / 189	177 / 1583 / 224	187 / 1604 / 193	209 / 1575 / 200
		$k = 3$	63 / 1884 / 37	56 / 1874 / 54	69 / 1848 / 67	58 / 1868 / 58	69 / 1845 / 70	44 / 1873 / 67	70 / 1843 / 71
	32	$k = 1$	463 / 1087 / 434	551 / 974 / 459	575 / 941 / 468	603 / 968 / 413	524 / 936 / 524	597 / 979 / 408	606 / 929 / 449
		$k = 2$	185 / 1611 / 188	206 / 1567 / 211	240 / 1528 / 216	218 / 1562 / 204	225 / 1524 / 235	239 / 1566 / 179	233 / 1522 / 229
		$k = 3$	93 / 1781 / 110	113 / 1755 / 116	152 / 1700 / 132	130 / 1744 / 110	117 / 1708 / 159	136 / 1752 / 96	149 / 1695 / 140
	256	$k = 1$	420 / 1159 / 405	491 / 1046 / 447	542 / 1009 / 433	571 / 1032 / 381	507 / 1005 / 472	566 / 1047 / 371	576 / 995 / 413
		$k = 2$	162 / 1670 / 152	193 / 1620 / 171	210 / 1574 / 200	228 / 1605 / 151	208 / 1587 / 189	223 / 1618 / 143	238 / 1565 / 181
		$k = 3$	78 / 1810 / 96	108 / 1780 / 96	126 / 1735 / 123	115 / 1763 / 106	125 / 1745 / 114	127 / 1777 / 80	141 / 1724 / 119

Table 13: Sentence-level comparison between SVD-MBR and MBR on the WMT22 De→En. Cells are formatted as **W / T / L**, indicating the number of sentences where SVD-MBR achieved a higher score (Win), an identical score (Tie), or a lower score (Loss). The rightmost column, $\bar{Z}_{\text{other}}$, aggregates the net win rate across all off-target evaluation metrics. **Positive** and **Negative** win rate for SVD-MBR is indicated by the color of the cells.

Case 1: COMET as Util. Function			Case 2: BLEU as Util. Function		
Source: Weder ServusTV noch ORF tun das.			Source: geht das bei ihnen?		
Reference: Neither ServusTV nor ORF do this.			Reference: does that work for you?		
MBR: Neither TV nor ARF do that.			MBR: Does that happen to them?		
SVD-MBR: Neither Servus TV nor ORF do that.			SVD-MBR: Is it going to them?		
Metric	MBR	SVD-MBR	Metric	MBR	SVD-MBR
BLEU	9.3	23.4 (↑)	BLEU (Util)	9.7	8.1 (↓)
chrF	42.6	88.8 (↑)	chrF	27.6	8.2 (↓)
BLEURT	63.6	83.6 (↑)	BLEURT	61.7	43.6 (↓)
COMET (Util)	91.8	96.5 (↑)	COMET	70.2	49.8 (↓)
BERTScore	82.2	86.8 (↑)	BERTScore	68.3	59.2 (↓)
COMETKiwi	60.6	85.1 (↑)	COMETKiwi	77.8	50.0 (↓)

Table 14: Sentence comparison of MBR and SVD-MBR ($k = 1$) using $|\mathcal{Y}| = 256$. **Case 1** demonstrates the comparison using COMET as the utility function and **Case 2** demonstrates the comparison using BLEU as the utility function.

Decoding Method	Util. Function	$ \mathcal{Y} $	BERTScore	ROUGE-1	ROUGE-2	ROUGE-L	$\bar{Z}_{\text{other}}$
MAP ϵ	N/A	-	75.631	43.643	21.490	36.184	-0.093
MBR	BERTScore	4	76.450 (+0.819)	42.777 (-0.866)	19.882 (-1.609)	35.218 (-0.966)	-0.641 (-0.549)
		32	77.345 (+1.714)	44.057 (+0.414)	21.110 (-0.380)	36.600 (+0.416)	0.123 (+0.216)
		256	77.501 (+1.870)	44.376 (+0.733)	21.378 (-0.112)	36.937 (+0.754)	0.304 (+0.397)
	ROUGE-1	4	75.533 (-0.098)	43.863 (+0.220)	20.121 (-1.369)	35.398 (-0.785)	-0.535 (-0.443)
		32	76.138 (+0.507)	46.114 (+2.471)	21.680 (+0.190)	37.093 (+0.909)	0.379 (+0.472)
		256	76.293 (+0.662)	46.608 (+2.965)	22.126 (+0.636)	37.594 (+1.411)	0.637 (+0.730)
	ROUGE-2	4	75.447 (-0.183)	42.894 (-0.749)	20.435 (-1.056)	35.299 (-0.885)	-0.624 (-0.531)
		32	76.170 (+0.539)	44.885 (+1.242)	22.654 (+1.163)	37.367 (+1.183)	0.459 (+0.552)
		256	76.285 (+0.655)	45.246 (+1.603)	23.005 (+1.515)	37.746 (+1.562)	0.650 (+0.743)
	ROUGE	4	75.545 (-0.086)	43.310 (-0.333)	20.373 (-1.117)	35.655 (-0.529)	-0.418 (-0.325)
		32	76.299 (+0.668)	45.445 (+1.802)	22.297 (+0.807)	37.722 (+1.539)	0.721 (+0.814)
		256	76.423 (+0.792)	45.860 (+2.217)	22.711 (+1.220)	38.142 (+1.958)	0.944 (+1.037)
Probabilistic MBR	BERTScore	4	74.431 (-1.200)	39.545 (-4.098)	16.882 (-4.608)	31.959 (-4.225)	-2.503 (-2.411)
		32	75.468 (-0.162)	40.893 (-2.750)	18.038 (-3.452)	33.243 (-2.941)	-1.761 (-1.669)
		256	77.215 (+1.585)	43.993 (+0.350)	20.985 (-0.505)	36.522 (+0.339)	0.070 (+0.163)
	ROUGE-1	4	74.743 (-0.887)	41.543 (-2.100)	18.393 (-3.097)	33.442 (-2.742)	-1.615 (-1.522)
		32	75.496 (-0.135)	43.720 (+0.077)	20.035 (-1.455)	35.328 (-0.856)	-0.583 (-0.490)
		256	76.154 (+0.524)	46.041 (+2.398)	21.814 (+0.323)	37.237 (+1.053)	0.443 (+0.535)
	ROUGE-2	4	74.883 (-0.748)	41.468 (-2.175)	19.037 (-2.453)	33.856 (-2.328)	-1.411 (-1.319)
		32	75.572 (-0.059)	43.195 (-0.448)	20.876 (-0.615)	35.741 (-0.443)	-0.427 (-0.335)
		256	76.065 (+0.435)	44.622 (+0.978)	22.474 (+0.984)	37.146 (+0.962)	0.323 (+0.416)
	ROUGE	4	74.896 (-0.734)	41.505 (-2.138)	18.839 (-2.651)	33.959 (-2.224)	-1.362 (-1.269)
		32	75.600 (-0.030)	43.265 (-0.378)	20.359 (-1.131)	35.642 (-0.541)	-0.410 (-0.317)
		256	76.231 (+0.600)	45.278 (+1.635)	22.202 (+0.712)	37.593 (+1.410)	0.643 (+0.736)
Model-based MBR	BERTScore	256	77.483 (+1.853)	44.444 (+0.801)	21.473 (-0.018)	37.024 (+0.840)	0.353 (+0.446)
	ROUGE-1	256	76.307 (+0.677)	46.551 (+2.908)	22.129 (+0.639)	37.604 (+1.421)	0.646 (+0.738)
	ROUGE-2	256	76.281 (+0.650)	45.189 (+1.545)	22.973 (+1.483)	37.688 (+1.504)	0.626 (+0.719)
	ROUGE	256	76.429 (+0.798)	45.794 (+2.151)	22.698 (+1.207)	38.106 (+1.922)	0.930 (+1.022)
Oracle	N/A	-	83.108	63.274	42.572	57.403	9.210

Table 15: Performance of decoding variants on the XSum ($|\mathcal{H}| = 256$). Absolute differences (in parentheses) are relative to the MAP ϵ baseline. Color gradation indicates the relative magnitude of improvement or degradation .

Decoding Method	Util. Function	$ \mathcal{V} $	BERTScore	ROUGE-1	ROUGE-2	ROUGE-L	$\bar{Z}_{\text{other}}$
MBR	BERTScore	4	76.450	42.777	19.882	35.218	-1.288
		32	77.345	44.057	21.110	36.600	-0.129
		256	77.501	44.376	21.378	36.937	0.147
	ROUGE-1	4	75.533	43.863	20.121	35.398	-1.112
		32	76.138	46.114	21.680	37.093	0.228
		256	76.293	46.608	22.126	37.594	0.607
	ROUGE-2	4	75.447	42.894	20.435	35.299	-1.190
		32	76.170	44.885	22.654	37.367	0.395
		256	76.285	45.246	23.005	37.746	0.675
	ROUGE	4	75.545	43.310	20.373	35.655	-0.912
		32	76.299	45.445	22.297	37.722	0.764
		256	76.423	45.860	22.711	38.142	1.094
SVD-MBR ($k = 1$)	BERTScore	4	75.921 (-0.53)	42.152 (-0.62)	19.458 (-0.42)	34.721 (-0.50)	-1.745 (-0.457)
		32	76.939 (-0.41)	43.848 (-0.21)	21.185 (+0.08)	36.573 (-0.03)	-0.171 (-0.042)
		256	77.118 (-0.38)	44.220 (-0.16)	21.575 (+0.20)*	36.951 (+0.01)	0.169 (+0.022)
	ROUGE-1	4	75.294 (-0.24)	42.689 (-1.17)	19.731 (-0.39)	34.855 (-0.54)	-1.533 (-0.421)
		32	76.116 (-0.02)	45.108 (-1.01)	21.746 (+0.07)	37.002 (-0.09)	0.208 (-0.020)
		256	76.259 (-0.03)	45.544 (-1.06)	22.129 (+0.00)	37.393 (-0.20)	0.526 (-0.080)
	ROUGE-2	4	75.319 (-0.13)	42.328 (-0.57)	20.057 (-0.38)	34.948 (-0.35)	-1.524 (-0.334)
		32	76.052 (-0.12)	44.237 (-0.65)	22.210 (-0.44)	36.979 (-0.39)	0.032 (-0.363)
		256	76.171 (-0.11)	44.605 (-0.64)	22.568 (-0.44)	37.373 (-0.37)	0.321 (-0.354)
	ROUGE	4	75.376 (-0.17)	42.436 (-0.87)	19.960 (-0.41)	35.093 (-0.56)	-1.388 (-0.476)
		32	76.161 (-0.14)	44.504 (-0.94)	21.931 (-0.37)	37.191 (-0.53)	0.305 (-0.459)
		256	76.280 (-0.14)	44.847 (-1.01)	22.348 (-0.36)	37.579 (-0.56)	0.612 (-0.482)
SVD-MBR ($k = 2$)	BERTScore	4	76.274 (-0.18)	42.600 (-0.18)	19.725 (-0.16)	35.052 (-0.17)	-1.437 (-0.148)
		32	77.173 (-0.17)	43.920 (-0.14)	21.062 (-0.05)	36.491 (-0.11)	-0.215 (-0.086)
		256	77.407 (-0.09)	44.400 (+0.02)	21.513 (+0.13)*	37.004 (+0.07)	0.215 (+0.069)*
	ROUGE-1	4	75.428 (-0.10)	43.340 (-0.52)	19.848 (-0.27)	35.083 (-0.32)	-1.352 (-0.240)
		32	76.097 (-0.04)	45.483 (-0.63)	21.606 (-0.07)	36.902 (-0.19)	0.123 (-0.104)
		256	76.319 (+0.03)	46.201 (-0.41)	22.210 (+0.08)	37.574 (+0.02)	0.641 (+0.034)
	ROUGE-2	4	75.335 (-0.11)	42.454 (-0.44)	20.032 (-0.40)	34.973 (-0.33)	-1.473 (-0.283)
		32	76.047 (-0.12)	44.320 (-0.56)	22.190 (-0.46)	36.962 (-0.41)	0.047 (-0.348)
		256	76.241 (-0.04)	44.915 (-0.33)	22.816 (-0.19)	37.564 (-0.18)	0.504 (-0.172)
	ROUGE	4	75.416 (-0.13)	42.712 (-0.60)	19.972 (-0.40)	35.139 (-0.52)	-1.301 (-0.389)
		32	76.160 (-0.14)	44.763 (-0.68)	21.975 (-0.32)	37.242 (-0.48)	0.380 (-0.384)
		256	76.396 (-0.03)	45.405 (-0.46)	22.645 (-0.07)	37.938 (-0.20)	0.926 (-0.167)
SVD-MBR ($k = 3$)	BERTScore	4	76.411 (-0.04)	42.735 (-0.04)	19.863 (-0.02)	35.157 (-0.06)	-1.324 (-0.036)
		32	77.303 (-0.04)	44.050 (-0.01)	21.114 (+0.00)	36.605 (+0.01)	-0.128 (+0.001)
		256	77.467 (-0.03)	44.387 (+0.01)	21.442 (+0.06)*	36.958 (+0.02)	0.176 (+0.029)
	ROUGE-1	4	75.516 (-0.02)	43.781 (-0.08)	20.081 (-0.04)	35.365 (-0.03)	-1.144 (-0.032)
		32	76.143 (+0.01)	45.850 (-0.26)	21.675 (-0.00)	37.065 (-0.03)	0.220 (-0.007)
		256	76.325 (+0.03)*	46.450 (-0.16)	22.224 (+0.10)*	37.639 (+0.04)	0.668 (+0.061)*
	ROUGE-2	4	75.387 (-0.06)	42.729 (-0.17)	20.267 (-0.17)	35.137 (-0.16)	-1.319 (-0.129)
		32	76.092 (-0.08)	44.491 (-0.39)	22.338 (-0.32)	37.062 (-0.30)	0.150 (-0.246)
		256	76.274 (-0.01)	45.068 (-0.18)	22.903 (-0.10)	37.645 (-0.10)	0.589 (-0.086)
	ROUGE	4	75.498 (-0.05)	43.171 (-0.14)	20.268 (-0.10)	35.504 (-0.15)	-1.019 (-0.107)
		32	76.233 (-0.07)	45.039 (-0.41)	22.117 (-0.18)	37.443 (-0.28)	0.547 (-0.217)
		256	76.425 (+0.00)	45.643 (-0.22)	22.711 (+0.00)	38.061 (-0.08)	1.031 (-0.063)
Oracle	N/A	-	83.108	63.274	42.572	57.403	13.320

Table 16: Performance of MBR vs. SVD-MBR on XSum ($|\mathcal{H}| = 256$). $\bar{Z}_{\text{other}}$ represents the mean z-score of all non-utility function evaluation metrics. Values in parentheses are absolute differences against MBR, with colors indicating relative improvement or degradation. Statistical significance ($p < 0.05$) is marked with *.

Util. Function	$\mathcal{Y}$	Top- k	BERTScore ($\sigma^2 = 13.815$)		ROUGE-1 ($\sigma^2 = 78.896$)		ROUGE-2 ($\sigma^2 = 72.118$)		ROUGE-L ($\sigma^2 = 83.027$)		$\bar{Z}_{\text{other}}$ ($\sigma^2 = 0.302$)	
			Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.
BERTScore	4	$k = 1$	+0.03*	0.07*	-0.02	0.07*	-0.01	0.17*	-0.01	0.09*	-0.01	0.10*
		$k = 2$	+0.01	0.03*	-0.02*	0.03*	-0.01	0.07*	-0.01	0.03*	-0.02*	0.03*
		$k = 3$	+0.00	0.01	-0.01	0.01	+0.01	0.04*	-0.01	0.02*	-0.01	0.02
	32	$k = 1$	+0.09*	0.09*	+0.03*	0.09*	+0.02*	0.19*	+0.03*	0.12*	+0.03*	0.12*
		$k = 2$	+0.04*	0.07*	+0.01	0.05*	+0.00	0.09*	+0.02*	0.05*	+0.02	0.05*
		$k = 3$	+0.04*	0.03*	+0.01	0.02	+0.00	0.04*	+0.01	0.02*	+0.01	0.02
	256	$k = 1$	+0.09*	0.10*	+0.04*	0.11*	+0.04*	0.17*	+0.04*	0.11*	+0.04*	0.12*
		$k = 2$	+0.07*	0.06*	+0.02*	0.05*	+0.04*	0.06*	+0.04*	0.03*	+0.03*	0.03*
		$k = 3$	+0.04*	0.02	+0.01	0.02*	+0.01	0.04*	+0.01	0.02	+0.02	0.02
ROUGE-1	4	$k = 1$	+0.01	0.07*	+0.02	0.07*	-0.01	0.19*	+0.02	0.09*	+0.02	0.10*
		$k = 2$	-0.01	0.02*	+0.00	0.05*	-0.03*	0.08*	-0.01	0.03*	-0.01	0.03*
		$k = 3$	-0.01	0.01	+0.02	0.02	-0.01	0.04*	+0.01	0.01	+0.00	0.01
	32	$k = 1$	+0.03*	0.10*	+0.06*	0.09*	+0.03*	0.18*	+0.04*	0.11*	+0.05*	0.12*
		$k = 2$	+0.01	0.07*	+0.03*	0.06*	+0.00	0.09*	+0.00	0.04*	+0.00	0.05*
		$k = 3$	+0.02	0.02	+0.02*	0.02*	+0.00	0.04*	+0.00	0.00	+0.00	0.00
	256	$k = 1$	+0.04*	0.11*	+0.07*	0.08*	+0.03*	0.15*	+0.05*	0.09*	+0.05*	0.10*
		$k = 2$	+0.03*	0.06*	+0.06*	0.05*	+0.03*	0.06*	+0.04*	0.03*	+0.04*	0.03*
		$k = 3$	+0.02*	0.03*	+0.05*	0.03*	+0.03*	0.04*	+0.03*	0.01	+0.03*	0.01
ROUGE-2	4	$k = 1$	+0.00	0.04*	-0.01	0.06*	+0.00	0.15*	+0.00	0.08*	+0.00	0.07*
		$k = 2$	-0.02	0.03*	-0.03*	0.04*	-0.03*	0.07*	-0.02*	0.03*	-0.02	0.03*
		$k = 3$	-0.01	-0.00	+0.00	0.01	-0.01	0.02*	+0.00	-0.00	-0.01	0.00
	32	$k = 1$	+0.01	0.05*	+0.02	0.06*	+0.00	0.14*	+0.03*	0.07*	+0.04*	0.07*
		$k = 2$	+0.00	0.05*	+0.01	0.05*	-0.01	0.10*	+0.00	0.05*	+0.01	0.05*
		$k = 3$	-0.01	0.03*	+0.00	0.02*	+0.00	0.03*	+0.01	-0.01	+0.01	0.01
	256	$k = 1$	+0.01	0.06*	+0.02*	0.05*	+0.00	0.09*	+0.00	0.04*	+0.02*	0.05*
		$k = 2$	+0.01	0.03*	+0.01	0.02*	+0.01	0.05*	+0.00	0.00	+0.02	0.01
		$k = 3$	+0.01	0.02	+0.02	0.01	+0.01	0.01	+0.01	-0.02*	+0.01	-0.01
ROUGE	4	$k = 1$	+0.01	0.05*	+0.01	0.07*	+0.01	0.16*	+0.01	0.08*	+0.02*	0.08*
		$k = 2$	-0.01	0.02	-0.01	0.03*	-0.01	0.07*	-0.01	0.03*	+0.00	0.03*
		$k = 3$	+0.00	0.01	+0.01	0.02*	-0.01	0.02*	+0.00	0.01	+0.00	0.01
	32	$k = 1$	+0.02*	0.08*	+0.02*	0.08*	-0.01	0.16*	+0.02	0.09*	+0.03*	0.10*
		$k = 2$	+0.00	0.05*	+0.01	0.05*	-0.01	0.09*	+0.01	0.03*	+0.02*	0.04*
		$k = 3$	+0.02	0.02*	+0.01	0.03*	+0.00	0.04*	+0.00	0.00	+0.01	0.00
	256	$k = 1$	+0.00	0.08*	+0.02*	0.07*	-0.01	0.11*	+0.01	0.06*	+0.03*	0.06*
		$k = 2$	+0.02*	0.06*	+0.03*	0.04*	+0.01	0.04*	+0.03*	0.01	+0.04*	0.02
		$k = 3$	+0.01	0.05*	+0.03*	0.03*	+0.00	0.02*	+0.02*	-0.01	+0.02*	0.00

Table 17: Spearman correlation (ρ) between inherent hypotheses oracle variance and evaluation score differences across varying pseudo-reference pool sizes ($|\mathcal{Y}|$) on XSum. The hypothesis pool variance (σ^2) for each evaluation metric is displayed in the respective column headers. *Dir.* (Directional Change) measures score improvements, highlighted as positive and negative impacts. *Mag.* (Magnitude Sensitivity) measures absolute score variance, with blue highlighting metric sensitivity. Statistical significance ($p < 0.05$) is denoted by an asterisk (*).

Utility	$ \mathcal{Y} $	Top- k	BERTScore		ROUGE-1		ROUGE-2		ROUGE-L		$\bar{Z}_{\text{other}}$	
			Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.	Dir.	Mag.
BERTScore	4	$k = 1$	-0.05*	0.22*	-0.03*	0.20*	-0.03*	0.18*	-0.04*	0.20*	-0.04*	0.20*
		$k = 2$	-0.06*	0.23*	-0.01	0.23*	-0.02*	0.21*	-0.02*	0.23*	-0.02*	0.23*
		$k = 3$	-0.01	0.13*	-0.01	0.16*	-0.01	0.15*	-0.01	0.16*	-0.01	0.16*
	32	$k = 1$	+0.03*	0.07*	+0.02	0.07*	+0.01	0.05*	+0.00	0.06*	+0.01	0.06*
		$k = 2$	-0.05*	0.19*	-0.01	0.21*	-0.02	0.19*	-0.01	0.20*	-0.02	0.20*
		$k = 3$	-0.01	0.06*	+0.00	0.09*	-0.01	0.09*	-0.01	0.09*	-0.01	0.09*
	256	$k = 1$	+0.01	0.06*	+0.00	0.06*	-0.02	0.04*	-0.02	0.07*	-0.01	0.06*
		$k = 2$	-0.02*	0.14*	+0.00	0.16*	+0.00	0.15*	-0.01	0.16*	-0.01	0.16*
		$k = 3$	-0.01	0.06*	+0.00	0.10*	+0.00	0.09*	-0.01	0.10*	-0.01	0.10*
ROUGE-1	4	$k = 1$	-0.04*	0.18*	-0.06*	0.19*	-0.03*	0.15*	-0.04*	0.17*	-0.05*	0.16*
		$k = 2$	-0.02	0.22*	-0.03*	0.22*	-0.01	0.21*	+0.00	0.22*	-0.02	0.21*
		$k = 3$	-0.01	0.18*	-0.01	0.19*	+0.02	0.17*	+0.01	0.18*	+0.01	0.18*
	32	$k = 1$	+0.01	0.11*	-0.01	0.12*	+0.00	0.07*	+0.00	0.10*	+0.00	0.09*
		$k = 2$	+0.00	0.17*	-0.02	0.18*	+0.00	0.14*	+0.01	0.16*	+0.01	0.16*
		$k = 3$	+0.02*	0.14*	+0.00	0.16*	+0.01	0.13*	+0.02*	0.15*	+0.02	0.14*
	256	$k = 1$	+0.01	0.11*	-0.03*	0.11*	-0.02*	0.06*	-0.02	0.10*	-0.01	0.08*
		$k = 2$	+0.00	0.14*	-0.04*	0.15*	+0.00	0.11*	-0.02	0.14*	-0.01	0.13*
		$k = 3$	-0.01	0.09*	-0.02*	0.11*	-0.01	0.08*	-0.01	0.10*	-0.01	0.08*
ROUGE-2	4	$k = 1$	-0.02*	0.21*	-0.03*	0.20*	-0.03*	0.20*	-0.03*	0.21*	-0.03*	0.21*
		$k = 2$	+0.00	0.25*	-0.01	0.24*	-0.02	0.23*	-0.01	0.24*	-0.01	0.24*
		$k = 3$	-0.01	0.23*	-0.02*	0.23*	-0.02*	0.22*	+0.00	0.23*	-0.01	0.22*
	32	$k = 1$	+0.00	0.17*	-0.01	0.18*	+0.00	0.14*	+0.00	0.17*	+0.00	0.16*
		$k = 2$	+0.00	0.21*	-0.03*	0.21*	-0.02*	0.18*	-0.01	0.21*	-0.02	0.20*
		$k = 3$	-0.02	0.24*	-0.03*	0.26*	-0.02*	0.22*	-0.01	0.25*	-0.02*	0.24*
	256	$k = 1$	+0.01	0.17*	-0.01	0.18*	-0.01	0.13*	+0.01	0.17*	+0.01	0.16*
		$k = 2$	+0.01	0.18*	-0.01	0.19*	+0.00	0.14*	+0.00	0.19*	+0.00	0.17*
		$k = 3$	+0.02	0.19*	-0.02	0.21*	-0.01	0.17*	-0.01	0.21*	+0.00	0.19*
ROUGE	4	$k = 1$	-0.02*	0.20*	-0.03*	0.20*	-0.03*	0.16*	-0.03*	0.20*	-0.04*	0.19*
		$k = 2$	-0.02*	0.24*	-0.04*	0.24*	-0.02	0.23*	-0.03*	0.24*	-0.04*	0.24*
		$k = 3$	+0.00	0.21*	-0.03*	0.21*	+0.00	0.20*	-0.03*	0.21*	-0.02*	0.21*
	32	$k = 1$	+0.00	0.17*	+0.00	0.17*	+0.00	0.14*	+0.00	0.18*	+0.00	0.16*
		$k = 2$	-0.01	0.22*	-0.03*	0.22*	-0.01	0.18*	-0.02*	0.21*	-0.03*	0.20*
		$k = 3$	-0.01	0.20*	-0.03*	0.21*	-0.02*	0.17*	-0.02	0.21*	-0.03*	0.19*
	256	$k = 1$	+0.00	0.19*	-0.04*	0.18*	-0.01	0.14*	-0.02	0.18*	-0.02*	0.17*
		$k = 2$	+0.00	0.19*	-0.03*	0.20*	+0.00	0.16*	-0.01	0.19*	-0.02	0.18*
		$k = 3$	+0.01	0.18*	-0.02*	0.20*	+0.01	0.16*	+0.00	0.19*	+0.00	0.17*

Table 18: Spearman correlation (ρ) between matrix reconstruction errors and evaluation score differences across varying reference pool sizes ($|\mathcal{Y}|$) on XSum. *Dir.* (Directional Change) measures score improvements, highlighted as positive and negative impacts. *Mag.* (Magnitude Sensitivity) measures absolute score variance, with blue highlighting metric sensitivity to matrix modifications. Statistical significance ($p < 0.05$) is denoted by an asterisk (*).

Util. Function	$ \mathcal{Y} $	Top- k	BERTScore	ROUGE-1	ROUGE-2	ROUGE-L	$\bar{Z}_{\text{other}}$
BERTScore	4	$k = 1$	2333 / 4992 / 4008	2724 / 5314 / 3295	2583 / 5729 / 3021	2785 / 5324 / 3224	2823 / 5169 / 3341
		$k = 2$	1038 / 8666 / 1629	1164 / 8823 / 1346	1059 / 9004 / 1270	1153 / 8830 / 1350	1167 / 8761 / 1405
		$k = 3$	422 / 10368 / 543	421 / 10452 / 460	393 / 10515 / 425	400 / 10451 / 482	429 / 10426 / 478
	32	$k = 1$	2485 / 4693 / 4155	3035 / 5117 / 3181	2941 / 5560 / 2832	3069 / 5162 / 3102	3123 / 4969 / 3241
		$k = 2$	1278 / 8140 / 1915	1424 / 8335 / 1574	1380 / 8518 / 1435	1452 / 8358 / 1523	1465 / 8271 / 1597
		$k = 3$	741 / 9638 / 954	757 / 9784 / 792	745 / 9868 / 720	761 / 9795 / 777	783 / 9742 / 808
	256	$k = 1$	2335 / 5108 / 3890	2842 / 5546 / 2945	2788 / 5976 / 2569	2873 / 5590 / 2870	2946 / 5411 / 2976
		$k = 2$	1174 / 8587 / 1572	1298 / 8772 / 1263	1255 / 8960 / 1118	1325 / 8793 / 1215	1361 / 8720 / 1252
		$k = 3$	702 / 9791 / 840	717 / 9921 / 695	683 / 10027 / 623	714 / 9932 / 687	738 / 9896 / 699
ROUGE-1	4	$k = 1$	3199 / 4293 / 3841	2803 / 4578 / 3952	2990 / 5048 / 3295	3126 / 4559 / 3648	3193 / 4291 / 3849
		$k = 2$	1653 / 7680 / 2000	1470 / 7862 / 2001	1493 / 8128 / 1712	1576 / 7857 / 1900	1626 / 7678 / 2029
		$k = 3$	680 / 9875 / 778	644 / 9979 / 710	589 / 10094 / 650	646 / 9975 / 712	691 / 9873 / 769
	32	$k = 1$	3546 / 4158 / 3629	2825 / 4535 / 3973	3320 / 4993 / 3020	3385 / 4561 / 3387	3557 / 4142 / 3634
		$k = 2$	2234 / 6688 / 2411	1851 / 6902 / 2580	2027 / 7218 / 2088	2110 / 6907 / 2316	2234 / 6662 / 2437
		$k = 3$	1440 / 8446 / 1447	1180 / 8624 / 1529	1264 / 8811 / 1258	1334 / 8599 / 1400	1424 / 8422 / 1487
	256	$k = 1$	3334 / 4586 / 3413	2612 / 4953 / 3768	3132 / 5378 / 2823	3112 / 4977 / 3244	3283 / 4575 / 3475
		$k = 2$	2050 / 7270 / 2013	1654 / 7513 / 2166	1881 / 7787 / 1665	1913 / 7523 / 1897	2045 / 7255 / 2033
		$k = 3$	1268 / 8878 / 1187	1060 / 9027 / 1246	1146 / 9200 / 987	1208 / 9030 / 1095	1277 / 8859 / 1197
ROUGE-2	4	$k = 1$	2981 / 5035 / 3317	2746 / 5257 / 3330	2616 / 5676 / 3041	2792 / 5299 / 3242	2918 / 5034 / 3381
		$k = 2$	1856 / 7442 / 2035	1682 / 7625 / 2026	1520 / 7882 / 1931	1704 / 7633 / 1996	1776 / 7441 / 2116
		$k = 3$	804 / 9650 / 879	720 / 9725 / 888	648 / 9854 / 831	738 / 9730 / 865	751 / 9648 / 934
	32	$k = 1$	2884 / 5146 / 3303	2536 / 5557 / 3240	2485 / 5997 / 2851	2720 / 5563 / 3050	2796 / 5121 / 3416
		$k = 2$	2256 / 6491 / 2586	1997 / 6766 / 2570	1917 / 7103 / 2313	2109 / 6778 / 2446	2181 / 6453 / 2699
		$k = 3$	1622 / 7880 / 1831	1407 / 8107 / 1819	1335 / 8376 / 1622	1481 / 8104 / 1748	1568 / 7835 / 1930
	256	$k = 1$	2513 / 6009 / 2811	2137 / 6369 / 2827	2185 / 6740 / 2408	2354 / 6366 / 2613	2403 / 5986 / 2944
		$k = 2$	1851 / 7562 / 1920	1550 / 7842 / 1941	1548 / 8152 / 1633	1678 / 7831 / 1824	1774 / 7529 / 2030
		$k = 3$	1364 / 8625 / 1344	1142 / 8819 / 1372	1109 / 9062 / 1162	1198 / 8828 / 1307	1313 / 8588 / 1432
ROUGE	4	$k = 1$	3076 / 4827 / 3430	2654 / 5083 / 3596	2662 / 5539 / 3132	2786 / 5106 / 3441	2873 / 4827 / 3633
		$k = 2$	1717 / 7562 / 2054	1486 / 7728 / 2119	1482 / 8002 / 1849	1535 / 7739 / 2059	1579 / 7559 / 2195
		$k = 3$	753 / 9740 / 840	658 / 9829 / 846	657 / 9950 / 726	666 / 9830 / 837	705 / 9736 / 892
	32	$k = 1$	3078 / 4761 / 3494	2561 / 5151 / 3621	2720 / 5622 / 2991	2780 / 5188 / 3365	2892 / 4735 / 3706
		$k = 2$	2210 / 6525 / 2598	1887 / 6810 / 2636	1986 / 7156 / 2191	2046 / 6812 / 2475	2114 / 6496 / 2723
		$k = 3$	1473 / 8204 / 1656	1210 / 8396 / 1727	1255 / 8660 / 1418	1352 / 8406 / 1575	1388 / 8171 / 1774
	256	$k = 1$	2772 / 5387 / 3174	2237 / 5768 / 3328	2476 / 6226 / 2631	2494 / 5800 / 3039	2601 / 5367 / 3365
		$k = 2$	1930 / 7391 / 2012	1591 / 7665 / 2077	1719 / 7962 / 1652	1772 / 7690 / 1871	1881 / 7365 / 2087
		$k = 3$	1289 / 8731 / 1313	1112 / 8901 / 1320	1153 / 9108 / 1072	1188 / 8908 / 1237	1284 / 8695 / 1354

Table 19: Sentence-level comparison between SVD-MBR and MBR on the XSum. Cells are formatted as **W / T / L**, indicating the number of sentences where SVD-MBR achieved a higher score (Win), an identical score (Tie), or a lower score (Loss). The rightmost column, $\bar{Z}_{\text{other}}$, aggregates the net win rate across all off-target evaluation metrics. Positive and Negative win rate for SVD-MBR is indicated by the color of the cells.

Case 1: BERTScore as Util. Function			Case 2: ROUGE-1 as Util. Function		
Source: Charlie Walker’s deflected free-kick put the hosts ahead, before Giorgio Rasulo’s shot doubled the lead.Grimsby then took a 3-2 lead with goals from Padraig Amond, Omar Bogle and Nathan Arnold, before Rhys Browne fired in an equaliser for Aldershot.But Jon Nolan’s cross went over Shots keeper Phil Smith and into the net to earn the Mariners all three points.The result keeps Paul Hurst’s Grimsby side third in the table, seven points above sixth-placed Braintree.Aldershot Town boss Barry Smith told BBC Surrey:Media playback is not supported on this device"I am just disappointed with the goals we conceded, but I thought the first-half the players showed that commitment and desire. The passing football we like to do and like to play made us score two great goals."In the second half we still played some good stuff and the boys still worked hard, but lapses of concentration in our box cost us."The players know who they are picking up in the box. Phil Smith has held his hand up for two goals and feels he could’ve done better, which is credit to him, but it’s lapses of concentration."Grimsby Town manager Paul Hurst told BBC Radio Humberside:Media playback is not supported on this device"First-half going in at 2-0 was very concerning because I asked them some questions and they were quiet."To drag themselves back into the game and get in front and then have the disappointment of going 3-3, but clearly there was some luck in the end with the winning goal from Jon Nolan."We’ve certainly earned some luck, we haven’t had it recently and I’m hoping that’s a change in that fortune. What a fantastic three points and reward for the fans that were not happy at half-time as we all weren’t." Reference: Grimsby fought back from two goals down to beat Aldershot and boost their National League play-off hopes. MBR: Grimsby secured their third National League win of the season with a late winner at Aldershot. SVD-MBR: Grimsby came from two goals down to beat Aldershot and increase their National League play-off hopes.			Source: The Loyalist Community Council (LCC) has created the flag to commemorate the centenary of the World War One battle.It says the flag is supported by three paramilitary groups, the Ulster Defence Association (UDA), the Ulster Volunteer Force (UVF) and the Red Hand Commando."We hope this is the only flag that is flown along arterial routes alongside the Union flag and the Ulster flag," Winston Irvine of the LCC said."I think this flag will hopefully reduce the amount of perceived paramilitary flags."Mr Irvine said he did not expect nationalists "to be screaming in support of the flag from the rooftops".But he added: "I do hope people see this is an attempt to lessen the impact of flags and to command a wider support for the respectful and dignified commemoration to mark the anniversary of the Somme."The Somme means something to everyone, regardless of your community background, both in Northern Ireland and in the Republic of Ireland, given the scale and severity of that battle on the people of this island."Members of the 36th Ulster Division were among 100,000 Allied soldiers who fought at the Somme in 1916.A private benefactor has paid for the purchase of the flags.The group has also drawn up a set of protocols for the flying of flags.Mr Irvine said people were "fed up with torn and tattered flags flying from lamp posts and buildings".The protocols give guidance on the period of time flags should be flown, suggesting a three-month spell starting in June.Assistant Chief Constable Stephen Martin of the Police Service of Northern Ireland said the flying of flags in public places "provokes a range of strong responses and very different viewpoints".He added: "We hope [the LCC’s new flag and its protocols] can be a positive development in improving the overall context in which flags are flown." Reference: A new flag to mark the Battle of the Somme has been unfurled in Belfast. MBR: A Loyalist community group in Belfast has unveiled a new flag to mark the Battle of the Somme. SVD-MBR: A Loyalist community group has launched a "Somme flag" to "reduce the number of perceived paramilitary flags" in Northern Ireland.		
Metric	MBR	SVD-MBR	Metric	MBR	SVD-MBR
BERTScore (Util)	78.1	93.8 (↑)	BERTScore	82.4	63.0 (↓)
ROUGE-1	29.4	85.7 (↑)	ROUGE-1 (Util)	78.8	45.7 (↓)
ROUGE-2	6.2	72.7 (↑)	ROUGE-2	64.5	6.1 (↓)
ROUGE-L	23.5	85.7 (↑)	ROUGE-L	60.6	34.3 (↓)

Table 20: Sentence comparison of MBR and SVD-MBR ($k = 1$) using $|\mathcal{Y}| = 256$. **Case 1** demonstrates the comparison using BERTScore as the utility function and **Case 2** demonstrates the comparison using ROUGE-1 as the utility function.