

Compact Language, Complex Model Shifts: How and Where Ambiguity and Underspecification Affect LLMs

Michaela Regneri

HAW Hamburg

Hamburg, Germany

michaela.regneri@haw-hamburg.de

Nina Scheller

Universität Hamburg

Hamburg, Germany

{firstname.lastname}@uni-hamburg.de

Sören Laue

Abstract

We analyze how lexical ambiguity and underspecification affect language model training. We create artificial homonyms and artificial hypernyms as pseudowords and analyze the generative performance of language models as they are trained with increasing amounts of these ambiguous or underspecified pseudoword types. We further analyze whether the models disambiguate ambiguous or underspecified statements and provide a first mechanistic account of how ambiguity and disambiguation are represented internally. Our main results show that both ambiguity and underspecification increase model performance in ways that scale with their influence on the language’s type-token ratio. However, the accuracy of generating sequences containing ambiguous words or their synonyms decreases compared to other texts. We also show that internal representations of pseudowords reflect disambiguation of pseudo-homonyms, but underspecification of pseudo-hypernyms is maintained during the generative process.

1 Introduction

Ambiguity and related phenomena like underspecification are fundamental mechanisms of natural language. These phenomena have always been a main strand of research in theoretical linguistics (Pinkal, 1996), language philosophy (Khatchadourian, 1962), and computational linguistics (Hobbs and Shieber, 1987; Reyle, 1993). Ambiguity makes language more efficient, because it allows a smaller vocabulary to express a wider range of meanings (cf. the optimality theory of language, Piantadosi et al., 2012). The very same mechanism then also makes language more complex, because ambiguity or underspecification has to be resolved at the levels of words, sentences, and whole discourse segments.

While much of the research on computational language understanding focused on modeling and

resolving different kinds of ambiguity, the advent of large language models (LLMs) changed this discussion rapidly. Transformer models (Vaswani et al., 2017), the most common architecture for modern LLMs, were specifically designed to handle ambiguity through the attention mechanism. This mechanism applies context to resolve token-level ambiguities and does so hierarchically across increasingly large units of text. The impressive performance of such models seems to confirm this promise: good performance in language understanding and generation requires effective ambiguity handling, and state-of-the-art LLMs seem to handle many such cases successfully. However, the question of whether and how LLMs model ambiguity successfully is still a subject of active research, and a consequential one. Recent studies (Liu et al., 2023; Gehring and Roth, 2025) have shown that LLMs actually do fall short in handling ambiguity, even if there is evidence that their parameters encode it (Karamolegkou et al., 2025).

Understanding such mechanisms matters for several reasons: On one hand, it is relevant for mitigating and avoiding *bias and discrimination* in LLMs: if, e.g., a word is underspecified with respect to gender or nationality, a fair model needs to be capable of handling rare readings as well as frequent ones. On the other hand, ambiguity and underspecification make language more complex to process, while they also have the potential to compress it (as for human language processing). Given that LLMs require vast amounts of data and energy (Strubell et al., 2019), any additional complexity in language might make them *less sustainable* if that complexity also requires more powerful models. On the other hand, language compression while maintaining performance would be utterly desirable for sustainable models. Taken together, ambiguity and underspecification as potential contributors to the cost and societal impact of LLMs should be analyzed thoroughly, and models

need to process them reliably and efficiently.

Our research aims to answer whether ambiguity and underspecification in language add complexity to language model training, and how this interacts with potential effects of language compression. To assess this, we train multiple small transformer models on corpora that we modify by increasing the number of artificial homonyms and hypernyms. We then measure the models’ performance both overall and on the newly introduced ambiguous or underspecified words. We find that, in general, neither ambiguity nor underspecification harms the models’ performance. Our experiments also distinguish between setups in which we either delete synonyms of the newly introduced pseudowords or, as in natural language, maintain them, and show that the presence of synonyms harms performance, for generating both ambiguous words and their synonyms. We also give a first account showing localization of ambiguity in the model parameters, demonstrating an increased entropy in the models’ MLP layers when ambiguity or underspecification increases. In a second step, we evaluate whether the models internally disambiguate artificial homonyms and whether they resolve the underspecification of artificial hypernyms. Our experiments show that while ambiguous terms are disambiguated in the respective context, abstract terms remain underspecified. Overall, our results can inform further research that looks at model complexity, but also on bias and model mistakes with disambiguation.

Our main contributions are as follows:

- We analyze the influence of ambiguity on the performance of transformer models, distinguishing between ambiguous and underspecified words. We show that both greater ambiguity and greater abstraction increase model performance linearly with the decrease in type-token ratio. We also localize the increased ambiguity and underspecification in the models’ MLP layers.
- We analyze the models’ specific capability of generating ambiguous or abstract words, and show that performance on generating ambiguous expressions decreases with more ambiguity, while abstract expressions can be generated more stably.
- By activation analysis, we show that ambiguity and underspecification differ markedly

in terms of resolution: While artificial homonyms are disambiguated in the model, artificial hypernyms retain their underspecified representations.

To the best of our knowledge, this is the first study to relate ambiguity and abstraction, as sources of linguistic complexity, to language model performance, and to show how model training can benefit or suffer from them. We provide code and data for all our experiments.¹

2 Background and Related Work

2.1 Ambiguity and Underspecification

We analyze how ambiguity and underspecification affect language model performance. Concretely, we create corpora with artificial homonyms, train language models on them, and evaluate their performance as a function of the number of homonyms. We conduct analogous experiments using artificial hypernyms and compare the results. This setup draws on and contributes to several lines of research in linguistics and machine learning.

Ambiguity in LLMs has been studied extensively, particularly at the word level. A first line of work investigates how models represent ambiguity internally. [Beekhuizen et al. \(2021\)](#) studied the differences between homonyms and polysemes in static word embeddings. We adapt some of their homonymy measures to filter and modify our corpora when introducing artificial homonyms. [Haber and Poesio \(2021, 2024\)](#) extended the analysis of homonyms and polysemes to LLMs, showing that their difference is predictable from the models’ embedding layers. Other work has found clear evidence that ambiguity is encoded in the models’ parameters ([Park and Kim, 2025](#)), and models can also be tuned to handle ambiguity explicitly with alignment algorithms ([Kim et al., 2024](#)), supporting the hypothesis that they can encode ambiguity in principle. A second line of work evaluates how models perform on ambiguity-related tasks. LLMs perform well on many tasks related to standard word sense disambiguation ([Sumanathilaka et al., 2024](#)), but still fall short in particularly challenging settings ([Gehring and Roth, 2025](#)). [Liu et al. \(2023\)](#) provide a dataset with various types of ambiguity, and their

¹https://github.com/mregneri/ambiguity_abstraction_llms/

experiments show how ambiguity affects entailment handling in LLMs, concluding that ambiguity is not properly modeled. Even when ambiguity is encoded in the parameters, models do not perform well when prompted to use it (Karamolegkou et al., 2025), and they often fall short in standard settings even after alignment tuning (Kim et al., 2024). This gap might be due to LLMs failing to recognize relevant ambiguity in user prompts (Zhang et al., 2024).

Underspecification in LLMs is, in our case, operationalized as taxonomic abstraction through hypernymy at the word level. Research on abstraction in LLMs is comparatively sparser than on ambiguity. Some studies focus on performance, e.g., showing the limits of LLMs’ conceptual knowledge (Peng et al., 2022) and demonstrating that incorporating taxonomic relationships improves LLM reasoning (Torres-Moreno and Hermosillo-Valadez, 2026). Models can also be prompted to produce taxonomic hierarchies, but the concept hierarchies encoded in earlier models like BERT seem to differ from human ones (Dalvi et al., 2022). As with ambiguity, taxonomic abstraction is recoverable to some degree from LLM parameters (Regneri et al., 2024). Beyond lexical abstraction, there are also studies on LLMs and scope underspecification (Wildenburg et al., 2024), which show that LLMs can detect underspecification and partially resolve it.

Pseudowords in LLMs have been used to assess varying linguistic phenomena, and we use them to study the effect of ambiguity and abstraction on LLMs. Pseudowords were originally invented to create datasets for word sense disambiguation (Schütze, 1998). A pseudoword is an artificial term created by picking a word pair from a corpus, creating a new word similar to both original words, and then replacing occurrences of the original words with the new pseudoword. While annotated datasets for word sense disambiguation exist by now, pseudowords are still used, e.g., to study language change (Shoemark et al., 2019) and to show how word sense disambiguation is reflected in LLMs (Karidi et al., 2021). Crucially for our setup, even unknown pseudowords are processable by LLMs (de Varda et al., 2024). Using arbitrary strings like "wd134x" would introduce out-of-distribution tokens bearing no subword-level similarity to any natural word, potentially creating unwanted confounds. Pseudowords avoid

this problem because they are composed of familiar subword tokens.

3 Dataset Creation

The following describes how we create our datasets for model training to measure the effects of ambiguity and underspecification.

3.1 Homonyms and Hypernyms

We investigate word-level ambiguity and underspecification, concretely through homonyms and hypernyms. Homonyms are ambiguous words that have two disjoint readings (*bat*, *bank*), as opposed to polysemes, whose readings have semantic overlap to varying degrees (e.g., *crane*, *paper*). A hypernym is a word whose meaning encompasses that of more specific words, its hyponyms (*animal* (hypernym) – *dog* (hyponym)), and can have multiple hyponyms. Comparing homonyms with hypernyms lets us contrast the effects of ambiguous words with semantically divergent readings against words with varying levels of underspecification. In vector space terms, this means we compare words that have close neighbors in very different regions of the space (cf. Sec. 3.4).

3.2 Corpora

To study the effects of ambiguity and underspecification, we chose to train *small* language models on *narrow-domain* language corpora. Our objectives were twofold: to isolate the effects of ambiguity and abstraction by starting with corpora that contain as little ambiguity as possible, and to keep the experiments computationally tractable.

Since even highly domain-specific corpora typically retain some lexical ambiguity (e.g., *scale* in cooking still has readings related to measurement and fish skin), we cannot fully eliminate homonymy but aim to reduce it by restricting the domain. We settled on two corpora that met two additional criteria: in their unmodified state, the difference between homonyms and monosemes was clearly measurable by semantic neighborhood distance (cf. Tab. 1), and both use common, everyday language rather than specialized jargon, which supports the generalizability of our findings. The two corpora are (1) RecipeNLG (Bieñ et al., 2020), containing cooking recipes (1.9 mio documents, 63k word types, 195 mio tokens), and (2) TinyStories (Eldan and Li, 2023), containing short LLM-generated children’s stories in simple

language (2.1 mio documents, 24k word types, 437 mio tokens). While RecipeNLG is more domain-specific, its vocabulary contains almost three times as many word types as Tiny Stories but only half as many tokens. For a language model, Tiny Stories, with its much lower type-token ratio, is easier to learn.

3.3 Modifying Corpora with Pseudowords

We modify each corpus with pseudowords that constitute either pseudo-homonyms or pseudo-hypernyms. Each corpus is modified with its own set of pseudowords, whose components are word pairs drawn from the respective corpus. The key variable underlying both types of pseudowords is the cosine distance between the components' embeddings: pseudo-homonyms are constructed from maximally dissimilar pairs, while pseudo-hypernyms are constructed from maximally similar ones (which are additionally filtered by taxonomic relatedness). This allows us to study whether the effects we observe depend on the semantic distance between the words that a pseudoword replaces. We proceed as follows: First, we compute the cosine distance for all word pairs in each corpus. We retain only pairs whose components each occur in at least 300 documents and whose frequencies differ by at most a factor of 10. We further require that each word appears as a component in at most one pseudoword, so that the resulting sets are non-overlapping. For pseudo-homonyms, we select the 50 most *dissimilar* non-overlapping word pairs, representing words with semantically divergent readings (e.g., *structure* and *marmelade*). For pseudo-hypernyms, we select the most *similar* non-overlapping word pairs and manually filter them for pairs that share a common category, i.e., pairs whose components could plausibly share a common ancestor in a taxonomy such as WordNet (e.g., *mango* and *papaya* are both fruit). This yields a list of 50 pseudo-hypernyms per corpus. From each pair, we construct a pseudoword and manually create a name that is not part of the existing vocabulary, but remains reasonably similar to both components (e.g., *marmelade* and *structure* become *structalade*). We verify that no pseudoword name occurs anywhere in the corpus, even as an incidental string.

3.4 Pseudowords in Semantic Space

To verify that our pseudowords behave as expected, we compute the neighborhood distance for

Ambiguity Type	RECIPE	TINY
homonyms	0.28	0.32
polysemes	0.24	0.30
monosemes	0.21	0.28
pseudo-homonyms	0.36	0.40
pseudo-hypernyms	0.29	0.29

Table 1: Mean neighborhood distance (20 nearest neighbors, Word2Vec) for standard homonyms, polysemes, and monosemes, and our pseudowords. A larger distance means that a word's neighbors are more spread out in semantic space.

our pseudowords and compare them with standard monosemes, polysemes, and homonyms. For this, we use the list of homonyms, monosemes, and polysemes that Beekhuizen et al. (2021) derived from the WordSmyth dictionary. To distinguish the three word types, Beekhuizen et al. measure the average pairwise cosine distance between a word and its nearest neighbors in a Word2Vec space (Mikolov et al., 2013). The core idea is that monosemes should have tight neighbor clusters with low average distance, while more ambiguous words will show higher average distances, because their readings have close neighbors in multiple regions of the semantic space. In their experiments, homonyms show the largest distances, which we can confirm in our corpora. Table 1 shows the average neighborhood distances using the 20 nearest neighbors for these word classes, and compares them with our pseudo-homonyms (HOM*) and pseudo-hypernyms (HYP*). As expected, our pseudo-homonyms show a neighborhood distance even larger than that of standard homonyms. The pseudo-hypernyms show a neighborhood distance comparable to that of natural homonyms in the recipe dataset: in Tiny Stories, it is closer to that of monosemes. This likely reflects the richer and more specialized vocabulary of the cooking domain, where co-hyponyms such as *fridge* and *oven* take on highly distinct functional roles and thus diverge more in semantic space than they would in a more general context.

3.5 Corpus Variants for Ablations

We create multiple variants of our base datasets by replacing the component word pairs with pseudowords. We vary (1) the number of pseudoword types included (1, 10, 20, 30, 40, 50), (2) the type of pseudowords (pseudo-homonyms, "HOM"

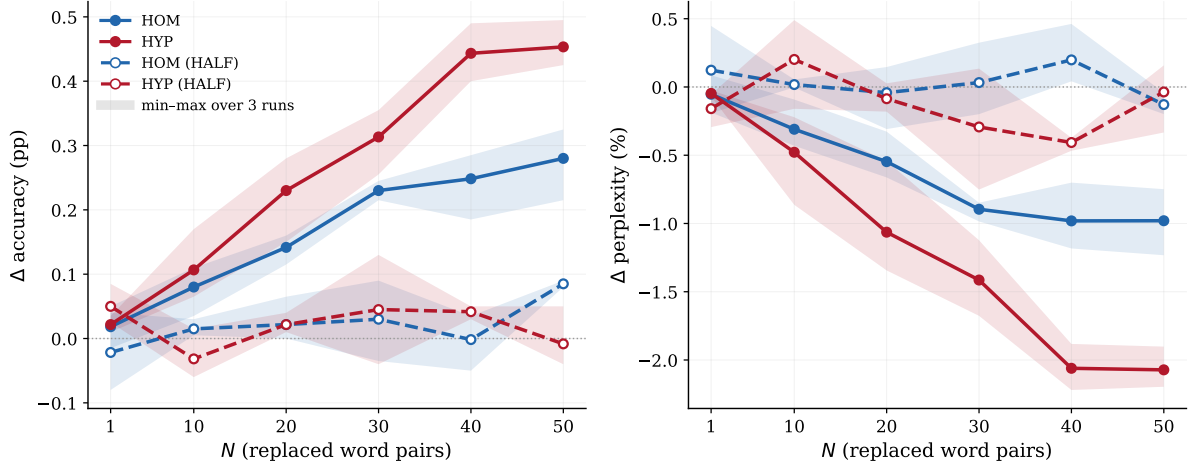


Figure 1: Changes in accuracy (left) and perplexity (right) compared to the unmodified base corpora after introducing N pseudo-homonyms (HOM) and pseudo-hypernyms (HYP), with 1–50 pseudoword types. Results are averaged over both corpora; regions indicate min/max over 3 runs. Changes for models with full component replacement are significant ($p < 0.01$) from $N=20$, HALF models do not show significant changes.

vs. pseudo-hypernyms, "HYP"), (3) whether we replace all occurrences of both components or only 50% (HALF, with half the occurrences of each component being replaced), and (4) the base dataset. The HALF-condition creates a scenario closer to natural ambiguity and underspecification: in standard texts, many homonyms coexist with synonyms (e.g., *bat* and *club*), and hypernyms are used alongside their hyponyms. By including this condition, we can disentangle the effects of ambiguity and abstraction per se from the additional complexity introduced by the continued presence of the original component words. Overall, this yields 48 modified corpus variants and the two unmodified base corpora, for a total of 50 datasets, each serving as a training corpus for an individual language model. We show all pseudowords and their components along with word frequencies and cosine similarity in Appendix A.

4 Experiments and Evaluation

4.1 Models and Parameters

For each of the 50 corpus variants (including the two unmodified base corpora), we train a GPT-2 model from scratch². We emphasize that these are not fine-tuned from a pretrained checkpoint but trained from scratch on our corpora alone, so that any effect we observe can be attributed to the training data. For tokenization, we use the standard

² $n_{\text{layers}}=6$, $n_{\text{head}}=6$, $n_{\text{embed}}=384$, $\text{dropout}=0.2$, $\text{learning_rate}=0.001$, $\text{batch_size}=64$, $\text{block_size}=256$, $\text{grad_clip}=1.0$

pre-trained GPT-2 BPE tokenizer across all models. Hyperparameters are kept identical across all models to avoid confounds. We train three runs per model configuration to account for variance. Using one NVIDIA A6000 GPU, each training run took between 25 and 40 minutes, for a total of approximately 75 GPU hours. We evaluate each model by measuring next-token prediction accuracy on a held-out validation set. Each corpus variant has its own training, validation, and test split (80%/15%5%), with the pseudoword modifications applied throughout. We first train and evaluate the baseline models on the unmodified corpora, then train individual models for each experimental condition and compare their next-token prediction accuracy. Significance is tested with a one-tailed t-test, averaging over the three runs per configuration; when aggregating conditions, we average over all runs within the group.

4.2 Increasing Ambiguity and Underspecification

In our first set of experiments, we successively introduce pseudo-homonyms and pseudo-hypernyms into each dataset, replacing all occurrences of the component words. We increase the number of pseudoword types starting with 1, then from 10 to 50 in increments of 10. This simulates increased ambiguity and underspecification in the models' language and allows us to compare the two. Apart from the first word (where we use the most similar component word pair for HYP

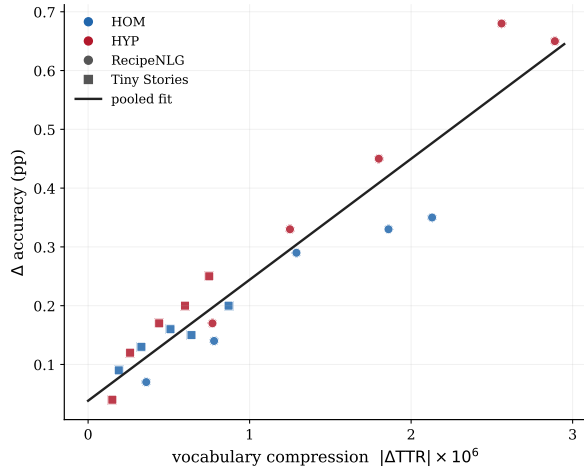


Figure 2: Linear regression predicting changes in LM accuracy from TTR for all models; regression coefficient for TTR change is 0.86.

and the most dissimilar one for HOM), the average cosine distance of the pseudoword components is constant across all models.

Figure 1 shows the results for all runs, averaged over both corpora (cf. App. B for individual corpus results). The introduction of greater ambiguity and underspecification improves performance if the new words replace both components (i.e., there is only "papango" left in the corpus, and both "mango" and "papaya" are replaced in all occurrences). If we retain the components (equivalent to synonyms for the pseudo-homonyms and hyponyms for the pseudo-hypernyms), there are no significant performance changes.

Changing the level of ambiguity or underspecification also changes the type-token ratio (TTR) of the underlying corpus (more pseudoword types $\rightarrow$ smaller TTR). According to the optimality theory of language, this vocabulary compression licenses ambiguity as a means of efficiency. To test whether this also predicts model performance, we compute TTR based on the corpus tokenized with the BPE-tokenizer used to train the models, defined as the ratio of unique types to the total number of tokens. We then train a linear regression model to predict the increase in LM accuracy from the reduction in TTR. Fig. 2 shows the results.

We find that we can almost perfectly predict the change in accuracy from the change in TTR, which also explains the differences between HOM and HYP. Across all models and conditions, the regression coefficient is 0.86; excluding the HALF models (which show no significant change in ac-

curacy), the coefficient is even higher at 0.96.

Note that the change in TTR is driven not only by the reduction in token types but also by an increase in the absolute number of tokens (cf. App. B), because the pseudowords are all tokenized by the BPE tokenizer. Our setup thus does not gain resource efficiency for generation, just a more compact vocabulary. Exploring whether using in-vocabulary words rather than pseudowords could provide a valid mechanism for model compression is a subject for future work.

Takeaways: We see linguistic optimality theory reflected in overall model performance: By compressing the language using homonyms and hypernyms, models become more effective. Neither ambiguity nor abstraction adds complexity that outweighs the gains from a smaller type-token ratio.

4.3 Pseudowords and Their Components

While the previous experiment showed that the presence of synonyms and hyponyms (in the HALF models) makes the language harder for the model to learn, overall performance did not decrease. We want to explore the results in more detail, assessing how well the pseudowords and their synonyms (or hyponyms) can be generated. For this, we separate the validation batches into three groups: (1) batches containing at least one pseudoword, (2) batches containing at least one pseudoword component but no pseudoword (for the HALF models only), and (3) batches containing neither. This lets us assess whether the model can reliably generate pseudowords, whether accuracy on surrounding tokens is affected, and whether component words become harder to generate when competing with a pseudo-homonym or pseudo-hypernym. Note that we do not directly compare the accuracy of producing pseudowords or their components, since single-word accuracy is difficult to match with adequate controls. Instead, we use the accuracy on batches containing the target words as a proxy for the model's ability to generate them. Figure 3 shows the results. We report the difference in accuracy between pseudoword batches or component batches (HALF models only) with batches containing no pseudowords or components ("neither"). Batches containing pseudo-homonyms or their components show significantly lower accuracy than batches without them. Pseudo-hypernyms, by contrast, perform *better* on both pseudoword batches and component batches, with significant increases for

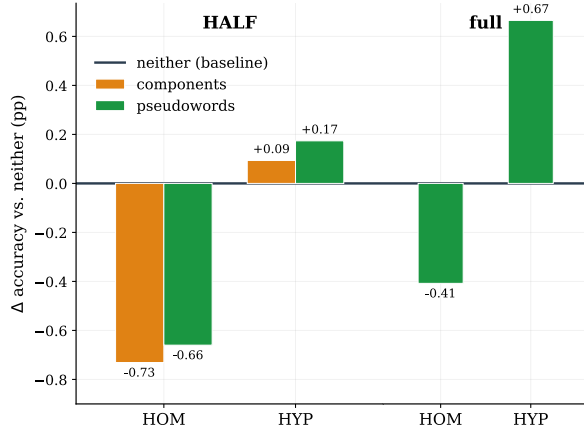


Figure 3: Comparing accuracy for batches containing pseudowords or components with batches containing neither of them, averaged over both corpora and either all HALF-models (left) or models with full replacement (right), measured as delta with other batches ("neither"). All results, except HYP in HALF models, are significant ($p < 0.01$).

pseudo-hypernyms in the full replacement strategy. In all cases, the presence of synonyms or hyponyms of the pseudowords lowers performance, with the component words performing even worse than the pseudowords themselves. This mechanism could, at a larger scale, contribute to bias — for instance, introducing a general term like *president* could make more specific terms like *chairman* or *chairwoman* harder to learn.

Takeaways: Pseudo-homonyms are hard to learn, but pseudo-hypernyms can be generated reliably. In all cases, the presence of component words lowers performance. While ambiguity is not challenging per se, its integration in language with synonyms adds complexity.

4.4 Findings on localization

In addition to measuring model performance, we analyzed model parameters to provide a mechanistic account of ambiguity and underspecification. We examine whether any geometric measures vary linearly with the number of pseudowords. We mainly focused on Von Neumann Entropy (VNE), which is the Shannon Entropy of a matrix’s eigenvalues. We hypothesized that greater ambiguity or underspecification would increase entropy, showing higher uncertainty in the model. We indeed found that the effective rank of the first weight matrix (usually denoted W_1) in the Multilayer Perceptron (MLP) increases linearly with the number of pseudowords (details in App. C). This increase

is independent of type-token ratio: It happens in the HALF-models and in all HOM and HYP models. Recent studies have identified MLP layers as effective predictors of diverse semantic relations (Xue and Andrzejak, 2026). However, we find significant effects only for RecipeNLG, not for Tiny Stories (where changes in TTR and performance were also much smaller than for RecipeNLG). While we consider this a preliminary finding, the localization in the mid-layers aligns well with previous work and our own insights into disambiguation (cf. Sec. 4.5): Most of the changes in VNE were observable in the middle layers, where we also observe disambiguation. We found no difference in the input embeddings, neither in VNE nor in the spread of the vector space used. While other measures might reveal more fine-grained differences here, we assume that the parameters change only where actual disambiguation occurs.

4.5 Disambiguation and Specification

With probing experiments, we want to learn whether the internal processing of ambiguity differs from that of underspecification, and whether we can locate the disambiguation and sense specification within the model activations. We probe the four *50-HALF models using the pseudowords and their component words for disambiguation or specification. For this, we use lexical patterns with either ambiguous or disambiguated sentences. We measure whether the model-internal activations change when we add the component word that disambiguates the sense (a synonym) or specifies it (a hyponym). E.g., a neutral pattern is *This is another [structalade], like the other one.* (inserting the pseudoword), and the corresponding disambiguated pattern would be *This is another [structalade], like the other [marmelade].* (inserting both pseudoword and one of the component words). As a reference for component-word activation, we use the neutral pattern and insert the component word in place of the pseudoword (e.g., *This is another [marmelade], like the other one.*)

We use 5 different pattern pairs (cf. App. D) and compute the internal activations for the sequences at the sentence-end position after each layer. We then measure how much the activation of the neutral pseudoword pattern shifts toward the neutral component-word patterns upon disambiguation by calculating the differential diff as follows, with x denoting pseudowords, y denoting components,

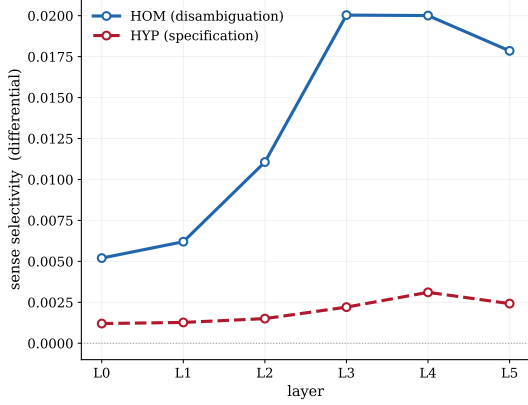


Figure 4: Sense selectivity in the 50-HALF models. Pseudo-homonyms are disambiguated; pseudo-hypernyms remain underspecified.

and n denoting the neutral (0) pattern or the pattern disambiguated with components 1 or 2.

$$\text{diff} = \frac{1}{2}[(\cos(\mathbf{x}_{y_1}, \mathbf{y}_1) - \cos(\mathbf{x}_0, \mathbf{y}_1)) + (\cos(\mathbf{x}_{y_2}, \mathbf{y}_2) - \cos(\mathbf{x}_0, \mathbf{y}_2))] \quad (1)$$

The results are shown in Figure 4. The activations for the pseudo-hypernyms do not change at all in the context of one of their hyponyms. The pseudo-homonyms, in contrast, are disambiguated in the middle layers, decreasing the distance to the most similar sense of their synonym component. More detailed inspections also reveal that the pseudo-homonyms, as expected, show a sense bias toward the more frequent component, measured as the cosine similarity between the neutral patterns of the pseudowords and the same pattern instantiated with the component word (cf. App. D). This means that the pseudo-hypernyms hardly ever shift and remain underspecified. This could be either because the component words are very similar to the pseudo-hypernym (making the difference hard to detect) or because a model-internal mechanism retains underspecification when further specification does not influence follow-up generation. While we cannot conclude that hypernyms are never specified in the model (we did see that hyponyms can be reliably generated, cf. Sec. 4.3), it might mean that for the model, disambiguation is always necessary, while underspecification can be retained. Future work addressing bias arising from abstraction errors could explore and manipulate this mechanism to avoid potentially harmful underspecification.

Takeaways: Disambiguation of homonyms is

reflected in the model activations (especially in the middle layers), while hypernyms remain underspecified.

5 Conclusion

Our study has shown how increasing ambiguity or underspecification changes the behavior of language models trained on this data, and how these two phenomena differ. We evaluated changes in LM performance by using pseudo-homonyms or pseudo-hypernyms. We showed that increasing either ambiguity or underspecification improves overall model performance, a pattern that can be directly predicted from the decrease in the type-token ratio. In that respect, ambiguity and underspecification have similar effects in language models compared to those predicted for human language processing. However, we find that in settings where synonyms or individual hyponyms still occur in the training corpus, both the pseudowords and their component words are generated less reliably than other vocabulary. We also provided a preliminary mechanistic account of ambiguity, underspecification, and disambiguation: more ambiguous or underspecified language increases Von-Neumann Entropy in the model’s MLP layer parameters. Further, activation-based disambiguation analysis shows that the readings of pseudo-homonyms are resolved, but underspecification for pseudo-hypernyms is retained.

We observed significant effects with concrete implications for responsible LLM design. On the one hand, model vocabulary can be compressed by reducing vocabulary diversity through abstraction, leading to higher overall performance. On the other hand, ambiguity can harm performance for both the underspecified expressions and their hyponyms or individual readings.

In future work, we aim to explore the effects of ambiguity on a larger scale, and provide more measures for localizing ambiguity within the model. Further, we aim to dig deeper into the processes of resolving ambiguity and underspecification, giving a more precise account of when a resolution happens and when it does not. Those studies can then help to anchor bias research in mechanistic interpretability for fairer and more reliable LLMs.

Limitations

Our experiments comprise many individual language models based on several modifications of two base corpora. While this provides an in-depth analysis, the scope is limited in several respects:

Model choice: All our models are GPT-2 models trained from scratch. While we believe that our results carry over to other model families, this remains to be verified. Further, to avoid confounders, we did not optimize hyperparameters individually for each run; some effects might change with hyperparameter tuning.

Ambiguity and abstraction: With pseudohomonyms and pseudohypernyms, we study only one type of ambiguity and one type of abstraction. Both phenomena occur at multiple linguistic levels that interact with each other, and we have only examined a small subset that we could cover with pseudowords. Future work will need to present experimental setups that accommodate different types of ambiguity, such as syntactic or discourse-level ambiguity.

Scaling and evaluation: To isolate effects of small language changes, we used small language models and restricted corpora. Future work needs to scale our findings to larger models, different domain-specific corpora, and more general corpora. In those settings, established benchmarks (e.g., HellaSwag) can be used to test the impact of ambiguity; such benchmarks are not meaningful for our small models, so we rely on next-token prediction accuracy as our sole evaluation metric. Scaling up will also show whether our assumption holds that models compressed through pseudohypernyms still perform well on downstream tasks.

Ethical Considerations

Our research can contribute to more sustainable model development: we provide initial evidence that linguistically motivated compression of LLMs is feasible, showing that pseudohypernyms can reduce vocabulary variety and improve performance, especially for domain-specific models. If these findings scale, they could reduce the computational resources and energy required for model training. We also believe our results can inform research on fairness, since we show that the introduction of ambiguous or underspecified terms can degrade accuracy not only for those terms but

also for their related words — a mechanism that, at scale, could contribute to bias propagation in ways that are difficult to detect by examining individual terms in isolation.

References

- Barend Beekhuizen, Blair C. Armstrong, and Suzanne Stevenson. 2021. [Probing lexical ambiguity: Word vectors encode number and relatedness of senses](#). *Cognitive Science*, 45(5):e12943.
- Michał Bień, Michał Gilski, Martyna Maciejewska, Wojciech Taisner, Dawid Wisniewski, and Agnieszka Lawrynowicz. 2020. RecipeNLG: A cooking recipes dataset for semi-structured text generation. In *Proceedings of INLG 2020*.
- Fahim Dalvi, Abdul Khan, Firoj Alam, Nadir Durrani, Jia Xu, and Hassan Sajjad. 2022. Discovering latent concepts learned in BERT. In *Proceedings of ICLR*.
- Andrea Gregor de Varda, Daniele Gatti, Marco Marelli, and Fritz Günther. 2024. [Meaning beyond lexicality: Capturing pseudoword definitions with language models](#). *Computational Linguistics*, 50(4):1313–1343.
- Ronen Eldan and Yuanzhi Li. 2023. [Tinystories: How small can language models be and still speak coherent english?](#) *Preprint*, arXiv:2305.07759.
- Janosch Gehring and Michael Roth. 2025. [AmbiStory: A challenging dataset of lexically ambiguous short stories](#). In *Proceedings of the 14th Joint Conference on Lexical and Computational Semantics (*SEM 2025)*, pages 152–171, Suzhou, China. Association for Computational Linguistics.
- Janosch Haber and Massimo Poesio. 2021. [Patterns of polysemy and homonymy in contextualised language models](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 2663–2676, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Janosch Haber and Massimo Poesio. 2024. [Polysemy—Evidence from linguistics, behavioral science, and contextualized language models](#). *Computational Linguistics*, 50(1):351–417.
- Jerry R. Hobbs and Stuart M. Shieber. 1987. [An algorithm for generating quantifier scopings](#). *Computational Linguistics*, 13:47–63.
- Antonia Karamolegkou, Oliver Eberle, Phillip Rust, Carina Kauf, and Anders Søgaard. 2025. [Trick or neat: Adversarial ambiguity and language model evaluation](#). In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 18542–18561, Vienna, Austria. Association for Computational Linguistics.

- Taelin Karidi, Yichu Zhou, Nathan Schneider, Omri Abend, and Vivek Srikumar. 2021. [Putting words in BERT’s mouth: Navigating contextualized vector spaces with pseudowords](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 10300–10313, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Haig Khatchadourian. 1962. [Vagueness](#). *The Philosophical Quarterly* (1950-), 12(47):138–152.
- Hyuhng Joon Kim, Youna Kim, Cheonbok Park, Junyeob Kim, Choonghyun Park, Kang Min Yoo, Sang-goo Lee, and Taeuk Kim. 2024. [Aligning language models to explicitly handle ambiguity](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 1989–2007, Miami, Florida, USA. Association for Computational Linguistics.
- Alisa Liu, Zhaofeng Wu, Julian Michael, Alane Suhr, Peter West, Alexander Koller, Swabha Swayamdipta, Noah Smith, and Yejin Choi. 2023. [We’re afraid language models aren’t modeling ambiguity](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 790–807, Singapore. Association for Computational Linguistics.
- Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. 2013. Distributed representations of words and phrases and their compositionality. In *Proceedings of NIPS*.
- Hancheol Park and Geonmin Kim. 2025. [Where do LLMs encode the knowledge to assess the ambiguity?](#) In *Proceedings of the 31st International Conference on Computational Linguistics: Industry Track*, pages 445–452, Abu Dhabi, UAE. Association for Computational Linguistics.
- Hao Peng, Xiaozhi Wang, Shengding Hu, Hailong Jin, Lei Hou, Juanzi Li, Zhiyuan Liu, and Qun Liu. 2022. [COPEN: Probing conceptual knowledge in pre-trained language models](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 5015–5035, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Steven T. Piantadosi, Harry Tily, and Edward Gibson. 2012. [The communicative function of ambiguity in language](#). *Cognition*, 122(3):280–291.
- Manfred Pinkal. 1996. Vagueness, ambiguity, and underspecification. In *Conference on Semantics and Linguistic Theory (SALT VI)*, pages 185–201, Rutgers University. Cornell University.
- Michaela Regneri, Alhassan Abdelhalim, and Soeren Laue. 2024. [Detecting conceptual abstraction in LLMs](#). In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 4697–4704, Torino, Italia. ELRA and ICCL.
- Uwe Reyle. 1993. [Dealing with ambiguities by under-specification: Construction, representation and deduction](#). *Journal of Semantics*, 10(2):123–179.
- Hinrich Schütze. 1998. [Automatic word sense discrimination](#). *Computational Linguistics*, 24(1):97–123.
- Philippa Shoemark, Farhana Ferdousi Liza, Dong Nguyen, Scott A. Hale, and Barbara McGillivray. 2019. [Room to Glo: A systematic comparison of semantic change detection approaches with word embeddings](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 66–76, Hong Kong, China. Association for Computational Linguistics.
- Emma Strubell, Ananya Ganesh, and Andrew McCallum. 2019. [Energy and policy considerations for deep learning in NLP](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3645–3650, Florence, Italy. Association for Computational Linguistics.
- Deshan Koshala Sumanathilaka, Nicholas Micallef, and Julian Hough. 2024. [Can LLMs assist with ambiguity? a quantitative evaluation of various large language models on word sense disambiguation](#). In *Proceedings of the First International Conference on Natural Language Processing and Artificial Intelligence for Cyber Security*, pages 97–108, Lancaster, UK. International Conference on Natural Language Processing and Artificial Intelligence for Cyber Security.
- David Torres-Moreno and Jorge Hermosillo-Valadez. 2026. [Semantic knowledge abstraction: Consistent reasoning in large language models for natural language inference](#). *Knowledge-Based Systems*, 332:114825.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc.
- Frank Wildenburg, Michael Hanna, and Sandro Pezzelle. 2024. [Do pre-trained language models detect and understand semantic underspecification? ask the DUST!](#) In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 9598–9613, Bangkok, Thailand. Association for Computational Linguistics.
- Min Xue and Artur Andrzejak. 2026. Svd as a fast interpretability method for transformers. In *Proceedings of ICML*.
- Tong Zhang, Peixin Qin, Yang Deng, Chen Huang, Wenqiang Lei, Junhong Liu, Dingnan Jin, Hongru Liang, and Tat-Seng Chua. 2024. [CLAMBER: A benchmark of identifying and clarifying ambiguos](#)

information needs in large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 10746–10766, Bangkok, Thailand. Association for Computational Linguistics.

A Pseudowords

Pseudoword	Word 1	Freq	Word 2	Freq	Cos. Sim.	Total Freq
simmoil	boil	465,659	simmer	365,022	0.729	830,681
liemon	lemon	268,966	lime	80,588	0.781	349,554
poreef	beef	191,114	pork	146,549	0.752	337,663
dryet	dry	244,075	wet	34,358	0.737	278,433
poettle	pot	255,925	kettle	11,061	0.823	266,986
thinick	thick	144,560	thin	77,768	0.728	222,328
plaer	plate	140,468	platter	56,274	0.751	196,742
freezidge	freezer	48,748	fridge	37,587	0.771	86,335
glaramic	glass	78,152	ceramic	3,763	0.715	81,915
muffcake	muffin	67,858	cupcake	13,692	0.822	81,550
salmout	salmon	58,542	trout	4,306	0.835	62,848
caramudge	caramel	39,598	fudge	22,149	0.711	61,747
refrense	rinse	59,056	refresh	1,670	0.710	60,726
jattle	jar	37,238	bottle	9,179	0.738	46,417
grerry	cherry	34,893	grape	6,964	0.719	41,857
blulse	pulse	37,911	blitz	1,476	0.807	39,387
peaspberry	peach	20,202	raspberry	16,284	0.745	36,486
oatsin	oatmeal	25,461	raisin	8,368	0.761	33,829
jarmelade	jam	25,980	marmalade	6,673	0.746	32,653
bluehubarb	blueberry	16,490	rhubarb	15,525	0.725	32,015
panaffle	pancake	14,892	waffle	7,896	0.730	22,788
yellurple	yellow	18,831	purple	1,908	0.721	20,739
healsty	healthy	12,743	tasty	7,476	0.817	20,219
papango	mango	17,207	papaya	2,854	0.904	20,061
lieal	veal	13,098	liver	5,539	0.736	18,637
textearrance	texture	16,686	appearance	1,337	0.740	18,023
sodiprot	protein	10,322	sodium	7,533	0.777	17,855
breakfrunch	breakfast	14,727	brunch	2,537	0.855	17,264
padook	paddle	10,457	hook	5,257	0.785	15,714
champodka	vodka	8,281	champagne	4,945	0.715	13,226
caviteck	cavity	8,407	neck	4,415	0.726	12,822
summinter	summer	9,199	winter	3,509	0.833	12,708
outinner	outer	9,098	inner	2,565	0.757	11,663
pepperami	pepperoni	7,960	salami	3,482	0.832	11,442
elacky	elastic	9,252	tacky	1,157	0.757	10,409
braerm	bran	7,327	germ	2,945	0.726	10,272
octoquid	squid	4,773	octopus	1,884	0.827	6,657
sanirt	sand	3,084	dirt	3,023	0.727	6,107
stalulb	stalk	2,623	bulb	2,602	0.730	5,225
sklank	flank	4,018	skirt	1,090	0.888	5,108
elemource	source	3,850	element	1,070	0.777	4,920
vitcium	vitamin	2,349	calcium	1,608	0.890	3,957
outinoor	outdoor	2,974	indoor	787	0.834	3,761
parazontal	parallel	1,214	horizontal	1,117	0.787	2,331
cartoub	tub	1,174	carton	1,113	0.771	2,287
intextrior	interior	1,383	exterior	893	0.810	2,276
shrillapse	shrink	1,376	collapse	631	0.739	2,007
leapill	spill	825	leak	714	0.718	1,539
cleammer	cleaver	736	hammer	714	0.761	1,450
cuptry	pantry	791	cupboard	372	0.792	1,163

Table 2: Pseudoword mappings for hypernyms on RecipeNLG, including word frequencies on the raw corpus and cosine similarity of the component words.

Pseudoword	Word 1	Freq	Word 2	Freq	Cos. Sim.	Total Freq
wilookie	cookie	153,461	wild	9,416	-0.170	162,877
livide	divide	83,732	lid	60,620	-0.147	144,352
wintress	press	117,501	winter	3,509	-0.163	121,010
strorrange	arrange	106,223	strong	3,642	-0.163	109,865
microwight	microwave	103,087	slight	3,413	-0.158	106,500
glaender	glass	78,152	render	1,902	-0.145	80,054
wooxact	wooden	44,176	exact	1,168	-0.140	45,344
speace	spice	32,787	spear	1,447	-0.150	34,234
bittachment	bite	18,767	attachment	15,049	-0.159	33,816
dontire	dozen	18,542	entire	15,252	-0.160	33,794
cheeseboo	cheesecake	27,700	bamboo	4,777	-0.141	32,477
goist	moist	20,544	gas	11,511	-0.141	32,055
critamin	crab	26,918	vitamin	2,349	-0.146	29,267
marrelly	jelly	25,852	marrow	708	-0.160	26,560
quoal	quart	25,070	goal	712	-0.144	25,782
abutty	above	20,012	nutty	3,633	-0.140	23,645
cruink	crush	19,653	link	1,200	-0.147	20,853
looduct	loosen	17,763	product	2,650	-0.163	20,413
goassel	goat	14,969	vessel	1,148	-0.144	16,117
rollider	cider	14,321	roller	747	-0.204	15,068
cartine	pine	13,844	carton	1,113	-0.146	14,957
ripoodle	noodle	11,801	ripe	2,826	-0.140	14,627
warmquake	warmed	13,740	earthquake	575	-0.208	14,315
pufoddy	puff	13,034	bloody	1,154	-0.154	14,188
clundae	cloth	11,798	sundae	1,357	-0.148	13,155
jeroam	foam	9,849	jerk	1,816	-0.162	11,665
distribaft	distribute	10,756	draft	769	-0.156	11,525
ranome	ranch	9,811	dome	842	-0.178	10,653
drulastic	elastic	9,252	drunken	570	-0.151	9,822
reakkie	reach	8,389	quickie	339	-0.146	8,728
threapinion	thread	8,363	opinion	320	-0.158	8,683
scramender	scramble	4,586	lavender	2,898	-0.149	7,484
baskush	basket	6,754	lush	324	-0.158	7,078
structalade	marmalade	6,673	structure	334	-0.162	7,007
originield	original	5,793	shield	411	-0.174	6,204
nimell	smell	4,381	nine	1,675	-0.181	6,056
aceadball	meatball	4,434	acid	1,226	-0.140	5,660
purpograph	photograph	2,928	purpose	2,033	-0.147	4,961
boultry	poultry	4,602	bounce	315	-0.146	4,917
clioneer	cling	3,650	pioneer	358	-0.155	4,008
shelitation	shelf	3,184	imitation	703	-0.165	3,887
washtball	washed	2,513	football	656	-0.147	3,169
comfold	unfold	2,269	comfort	725	-0.143	2,994
taucy	saucy	2,161	tape	685	-0.187	2,846
elerune	prune	1,680	element	1,070	-0.147	2,750
bimpfire	bind	1,125	campfire	814	-0.145	1,939
stourve	stout	978	curve	874	-0.171	1,852
shortcross	gloss	1,007	shortcut	560	-0.169	1,567
miccasional	minus	811	occasional	311	-0.139	1,122
filliss	file	785	bliss	334	-0.144	1,119

Table 3: Pseudoword mappings for homonyms on RecipeNLG, including word frequencies on the raw corpus and cosine similarity of the component words.

Pseudoword	Word 1	Freq	Word 2	Freq	Cos. Sim.	Total Freq
fimp	fish	331,746	shrimp	16,052	0.878	347,798
wirty	wet	111,774	dirty	92,013	0.826	203,787
harf	hat	159,558	scarf	28,519	0.837	188,077
purplink	pink	87,515	purple	57,877	0.894	145,392
towack	tower	76,352	stack	12,493	0.831	88,845
fanch	farm	69,515	ranch	9,316	0.927	78,831
rivetream	river	60,871	stream	14,907	0.906	75,778
princeen	princess	42,117	queen	31,142	0.840	73,259
spoork	spoon	39,697	fork	16,591	0.854	56,288
shoat	sheep	34,461	goat	21,558	0.839	56,019
chickig	pig	33,503	chicken	21,253	0.836	54,756
comeoon	moon	37,477	comet	16,536	0.828	54,013
smilthy	smelly	33,591	filthy	19,034	0.823	52,625
druitair	drum	30,649	guitar	20,696	0.902	51,345
glape	tape	25,934	glue	25,356	0.887	51,290
cirquare	circle	27,623	square	20,474	0.878	48,097
expenseap	expensive	26,239	cheap	20,848	0.824	47,087
mitir	mix	32,978	stir	13,886	0.832	46,864
sugutter	sugar	25,977	butter	20,459	0.845	46,436
genetful	generous	25,709	thoughtful	18,458	0.865	44,167
bromb	brush	25,528	comb	17,488	0.821	43,016
liemon	lemon	26,872	lime	14,473	0.897	41,345
caramp	card	25,641	stamp	13,903	0.852	39,544
soampoo	soap	25,445	shampoo	11,783	0.843	37,228
sharctopus	shark	23,177	octopus	13,818	0.856	36,995
swield	sword	21,310	shield	13,959	0.876	35,269
jumu	jug	17,897	mug	16,021	0.818	33,918
violute	flute	18,008	violin	15,442	0.952	33,450
pencebook	pencil	18,854	notebook	14,368	0.836	33,222
potanion	potato	16,314	onion	16,203	0.898	32,517
bable	barn	22,537	stable	9,804	0.838	32,341
crocogator	crocodile	17,066	alligator	14,489	0.943	31,555
threedle	thread	15,857	needle	15,485	0.848	31,342
hammail	hammer	18,172	nail	12,948	0.813	31,120
scootorcycle	scooter	15,412	motorcycle	14,913	0.823	30,325
collash	collar	17,038	leash	12,855	0.831	29,893
chimnoof	roof	16,375	chimney	11,770	0.826	28,145
waffin	muffin	14,239	waffle	13,755	0.888	27,994
deackboard	desk	15,800	blackboard	12,124	0.811	27,924
borrend	borrow	16,888	lend	10,390	0.816	27,278
fooseball	football	13,762	baseball	12,400	0.942	26,162
thundning	thunder	13,807	lightning	11,450	0.869	25,257
peacrune	peach	15,844	prune	8,209	0.888	24,053
skouse	skirt	11,618	blouse	10,851	0.958	22,469
hubin	hut	11,438	cabin	10,424	0.910	21,862
pangaroo	kangaroo	11,222	panda	10,330	0.840	21,552
sunriet	sunset	9,485	sunrise	8,504	0.868	17,989
scoal	goal	10,024	score	7,627	0.834	17,651
juicipe	juicy	12,090	ripe	2,029	0.814	14,119
slimble	slip	7,898	stumble	2,398	0.830	10,296

Table 4: Pseudoword mappings for hypernyms on TinyStories, including word frequencies on the raw corpus and cosine similarity of the component words.

Pseudoword	Word 1	Freq	Word 2	Freq	Cos. Sim.	Total Freq
slark	dark	118,492	slice	3,691	-0.162	122,183
earthquink	pink	87,515	earthquake	6,802	-0.188	94,317
wise	wise	89,254	wrist	2,511	-0.172	91,765
colorision	colorful	85,866	decision	3,184	-0.193	89,050
harair	chair	78,373	harm	1,796	-0.169	80,169
bitinue	bite	60,784	continue	3,010	-0.192	63,794
singush	push	49,699	singer	2,066	-0.209	51,765
pashlight	pig	33,503	flashlight	16,743	-0.178	50,246
avorthday	birthday	46,154	avoid	1,571	-0.218	47,725
brealthy	breath	21,775	wealthy	21,283	-0.170	43,058
alermon	lemon	26,872	alert	15,862	-0.162	42,734
spraleep	spray	20,532	asleep	20,288	-0.204	40,820
flitten	kitten	39,322	flip	1,331	-0.166	40,653
flammy	flag	25,002	tummy	14,339	-0.236	39,341
yierror	mirror	26,403	yield	8,162	-0.212	34,565
drice	dig	26,601	price	6,436	-0.167	33,037
finettle	finger	21,459	settle	7,913	-0.166	29,372
deighbour	dive	14,339	neighbor	12,812	-0.189	27,151
twinkose	hose	22,966	twinkle	3,903	-0.170	26,869
massareless	careless	19,120	massage	7,237	-0.184	26,357
flaesure	measure	22,438	flash	3,090	-0.167	25,528
decoulder	decide	15,754	shoulder	8,657	-0.185	24,411
creamare	scare	22,658	creamy	1,334	-0.173	23,992
stearrot	parrot	18,697	steady	2,323	-0.207	21,020
repiggle	repair	12,499	giggle	8,461	-0.172	20,960
stickut	hut	11,438	sticker	8,885	-0.182	20,323
goldath	math	14,178	golden	5,470	-0.224	19,648
spaghettdage	spaghetti	16,822	badge	2,143	-0.173	18,965
remandbox	sandbox	12,385	remind	6,274	-0.184	18,659
elecious	elevator	14,637	precious	3,505	-0.198	18,142
recipull	bull	16,384	recipe	1,472	-0.222	17,856
screasure	screen	15,820	pleasure	1,400	-0.178	17,220
wintratch	winter	10,685	scratch	6,296	-0.174	16,981
twust	dust	12,846	twin	4,060	-0.169	16,906
dioldier	soldier	15,385	dip	1,392	-0.173	16,777
clorehead	club	14,396	forehead	1,807	-0.176	16,203
firepleeper	fireplace	11,799	keeper	3,516	-0.174	15,315
helpace	helper	11,184	surface	2,154	-0.183	13,338
overcray	ashtray	11,847	overcome	1,382	-0.243	13,229
spail	rail	9,588	spit	3,464	-0.168	13,052
subful	subway	11,163	handful	1,652	-0.167	12,815
invick	invite	10,202	click	1,830	-0.166	12,032
steadier	sticky	8,169	leader	3,808	-0.236	11,977
distrand	disturb	9,237	brand	2,432	-0.197	11,669
pativer	shiver	8,476	patience	3,160	-0.163	11,636
deseak	leak	8,937	deserve	2,006	-0.194	10,943
applackpack	backpack	5,766	applaud	4,967	-0.191	10,733
embooden	embarrass	4,988	wooden	3,956	-0.176	8,944
luxureel	luxury	5,381	peel	2,116	-0.205	7,497
snowbey	snowball	3,976	obey	2,763	-0.176	6,739

Table 5: Pseudoword mappings for homonyms on TinyStories, including word frequencies on the raw corpus and cosine similarity of the component words

B Model performance split by corpora

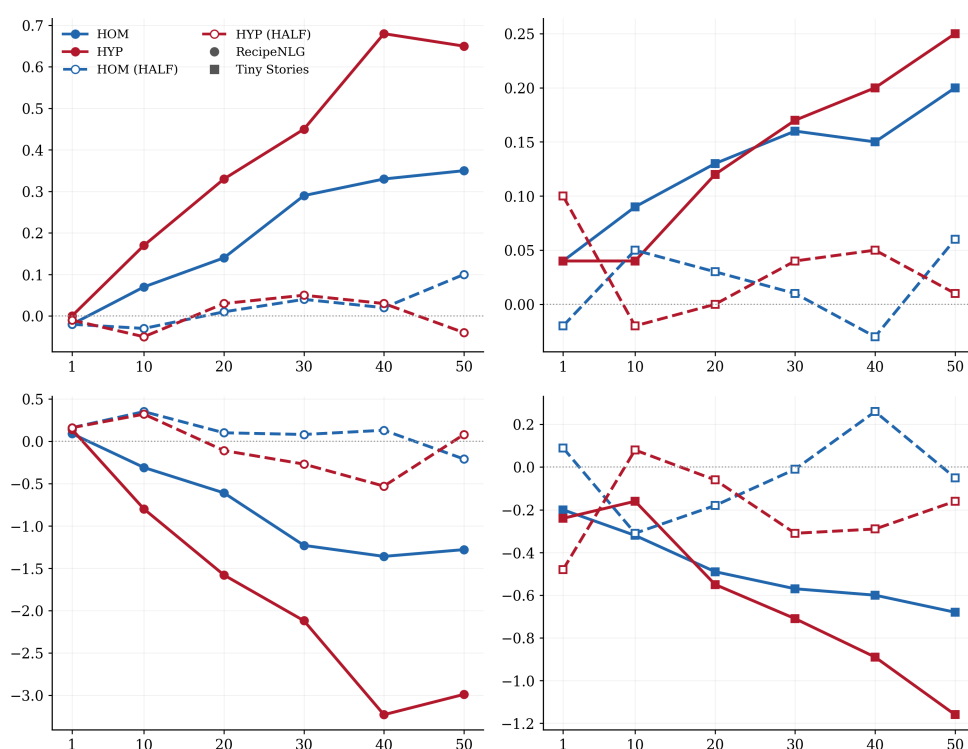


Figure 5: Accuracy (upper) and Perplexity (lower) changes in the models for increasing ambiguous (HOM) or underspecified (HYP) pseudowords, split by corpus.

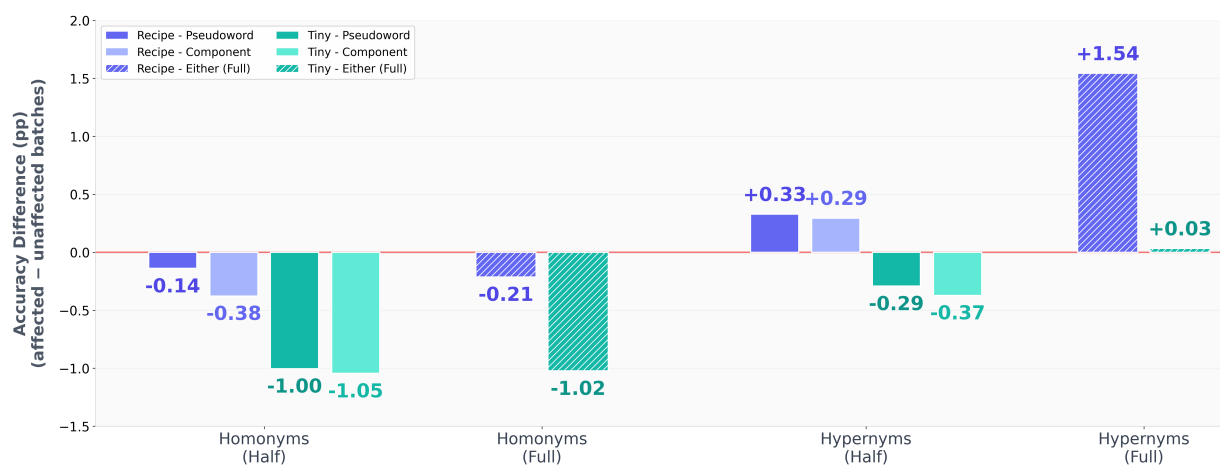


Figure 6: Model performance for generating batches with either pseudowords or component words, split by corpora. Bars indicate differences to batches that contain neither pseudowords nor components.

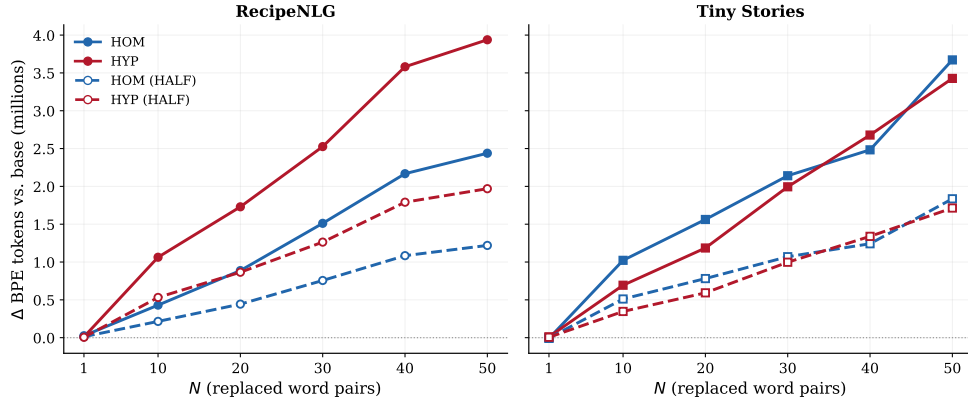


Figure 7: Absolute number of tokens in the models depending on the number of pseudoword types.

C Ambiguity Localization

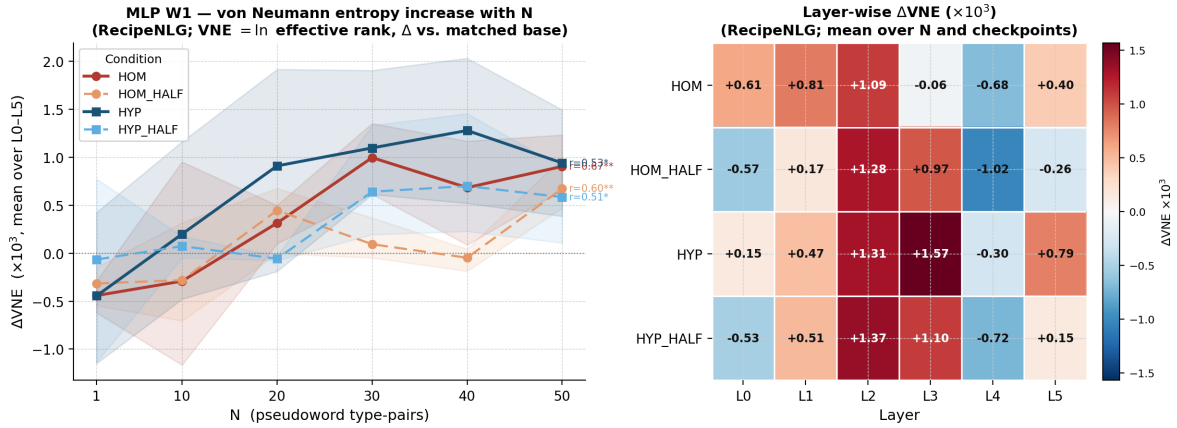


Figure 8: Von-Neumann-Entropy change in the models depending on increasing ambiguity or abstraction (left), and the layer-wise localization of that change (right).

D Patterns for Disambiguation Probing

ID	Neutral	Disambiguating
1	This is another x , like the other one.	This is another x , like the other y .
2	Here we have that x , just an ordinary one.	Here we have that x , just an ordinary y .
3	She likes that x , like all other things.	She likes that x , like all other ys .
4	Look for my x , it looks like one of your things.	Look for my x , it looks like one of your ys .
5	He talked about the x after other topics.	He talked about the x after other ys .

Table 6: Matched patterns to test disambiguation. x = pseudoword; y = component word (pluralized in frames 3–5). Each frame also generates a reference sentence with y as subject (y -neutral) and a sanity-check sentence with y as subject and x as comparison item (y -swapped).

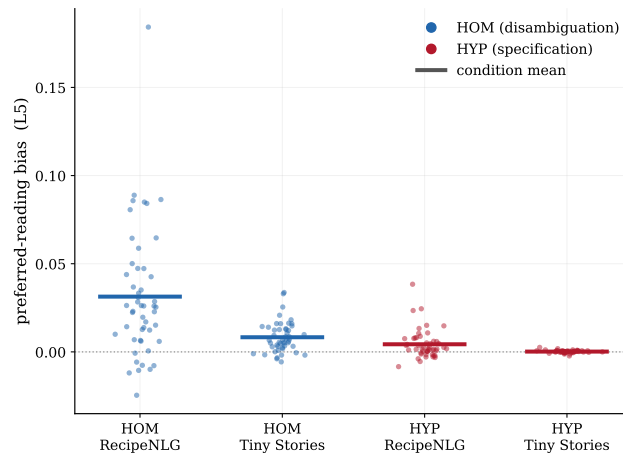


Figure 9: Sense bias for ambiguous and underspecified words. The dots show the differences in cosine similarity between the target word and the two senses, all in neutral contexts. A positive value indicates a bias towards the more frequent sense.