

SPT: Skills as Pre-Training Data for Agentic Language Models

Yufei Sun^{1*}, Yudong Li^{2*†}, Yiming Cheng²

¹Beijing University of Posts and Telecommunications

²Tsinghua University

liyudong@tsinghua.edu.cn


Abstract

Agentic (tool-using) language models are mainly trained on tool-call traces and agent trajectories during post-training. These data provide direct behavioral supervision, but producing them requires task environments, execution, and verification, making broad tool and task coverage expensive. Publicly available skills offer another source of training data: they encode reusable tool semantics and workflows but are typically used only as inference-time context. We introduce Skill Pre-Training (SPT), a mid-training method that applies causal language modeling to SKILLCORPUS, a collection of public multi-file skill packages, optionally mixed with general data. To preserve relations among files within each package, we also introduce Reference Insert, a reference-aware assembly strategy that places supporting files near their mentions in the primary instruction. Experiments across multiple model scales and post-training recipes show that SPT consistently improves agentic performance over mid-training on general or trajectory data, while largely preserving general performance. Data mixture experiments show additional benefits from combining skill data with general annealing corpora. These results indicate that skill packages are a valuable data source for pre-training agentic language models.


Introduction

Large language models (LLMs) increasingly act as agents that use external tools for multi-step tasks (Yao et al. 2022; Schick et al. 2023; Hu et al. 2026). Tool use requires models to understand tool functions and carry out interactions over multiple steps. However, complete tool-use processes rarely appear in naturally collected corpora. Most models therefore acquire these capabilities during post-training through supervised fine-tuning (SFT) and reinforcement learning (RL) (Chen et al. 2024; Prabhakar et al. 2025; Qian et al. 2025; Dong et al. 2025).

Existing work mainly fills this data gap with synthetic function calls and agent trajectories (Tang et al. 2023; Liu et al. 2024; Prabhakar et al. 2025; Liang et al. 2026a; Fang et al. 2025). Producing valid trajectories requires task environments, execution, and verification, so the cost grows with tool and task coverage. In addition, a trajectory records one execution rather than a reusable workflow. The high production cost and execution-specific content make trajectories difficult to collect at the scale and coverage required for pre-training.

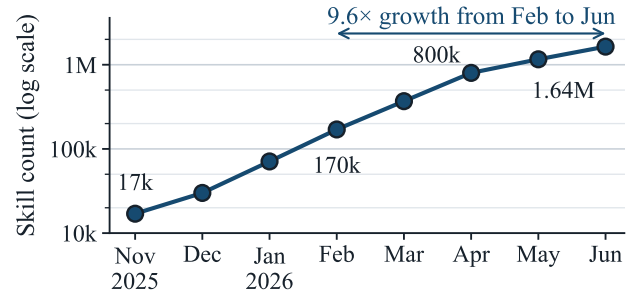

(a) Growth of publicly indexed skills.

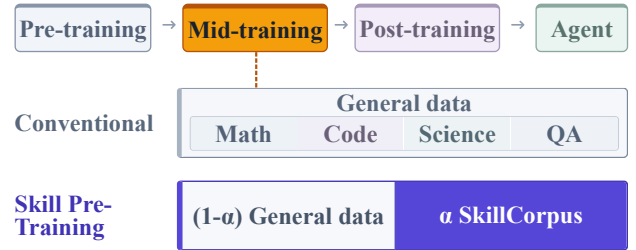

(b) SPT as mid-training composition.

Figure 1: Public skill data growth and the SPT mid-training pipeline. (a) Snapshots from the npm registry show that the number of skills available on the platform grew 9.6 $\times$ from February to June 2026. (b) SPT mixes an α fraction of SKILLCORPUS with $(1 - \alpha)$ general data during mid-training, followed by post-training.

These limitations motivate a different source of agentic pre-training data: skills, which are reusable instructions written by humans for AI agents. Unlike a trajectory that records one execution, a skill describes how an agent should perform a task and can include references, scripts, templates, and configuration files. The count of publicly available skills on npm is growing rapidly. Based on snapshots from the npm registry¹, the number of available skills rose from 170,226 in February 2026 to 1,640,440 in June 2026 (Figure 1(a)). This scale makes skill packages a plausible source of pre-training

*These authors contributed equally.

†Corresponding author.

¹<https://www.npmjs.com/>

data.

To test this hypothesis, we introduce SPT as a mid-training method that applies causal language modeling to skill data before behavior-oriented post-training. We construct SKILLCORPUS from 38,040 cleaned and decontaminated ClawHub packages². To preserve the relations between an instruction and its supporting resources, we introduce *Reference Insert*, which places each referenced file near its first mention in the primary instruction file. SPT also allows SKILLCORPUS to be mixed with general data under a fixed training-token budget. The resulting checkpoint is then used to initialize downstream post-training.

We evaluate SPT across three model scales and multiple mid-/post-training configurations. Under both general instruction tuning and function-calling SFT, SPT consistently outperforms direct SFT and mid-training on general or trajectory data across all evaluated model scales, while largely preserving general performance. Data mixture experiments achieve further agentic gains when skill data is combined with general data. When SFT is followed by reinforcement learning, SPT retains its advantage over no mid-training and general-data mid-training. The consistent improvements across these experiments show that the benefit of SPT is robust to changes in model scale, mid-training data and organization, and post-training method. These results reveal the value of skill corpora as pre-training data for agentic language models.

Our contributions are as follows.

- We propose multi-file skill packages as scalable agentic pre-training data and construct the 38,040-package SKILLCORPUS.
- We introduce SPT, which applies the causal language-modeling objective to skill data before post-training, together with Reference Insert for reference-aware package assembly.
- We provide controlled corpus comparisons and ablations of mixture ratio and package organization across multiple backbones and SFT settings, plus a downstream RL robustness test.

Related Work

Training Pipelines and Agentic Mid-Training

Modern LLM development commonly separates broad pre-training from later stages that refine the data distribution and align model behavior. Mid-training, which may include annealing, adapts a pre-trained checkpoint on curated or domain-weighted corpora, whereas post-training uses SFT, preference optimization, or RL to teach instruction following and response behavior (Kaplan et al. 2020; Hoffmann et al. 2022; Ouyang et al. 2022; Rafailov et al. 2023; Lambert et al. 2024). Recent open-model efforts use late-stage data selection, domain mixtures, metadata conditioning, and curated annealing corpora to strengthen targeted capabilities while retaining broad competence (Gao et al. 2025; Li et al. 2024; Team et al. 2025; Allal et al. 2025; Liu et al. 2025; OLMo

et al. 2024). SPT applies this mid-training framework to skill packages that encode reusable tool semantics and workflows.

Prior work has incorporated tool calls, verified function-calling examples, search traces, and interaction trajectories into language-modeling corpora; next-token prediction over such data can improve tool invocation and agentic reasoning (Schick et al. 2023; Liu et al. 2024; Wu et al. 2025; Zhuang et al. 2025). These corpora primarily expose models to calls or realized execution paths. SPT uses the same causal language-modeling objective but changes the training unit to reusable, multi-file workflow specifications that state tool semantics, procedural constraints, and resource relations explicitly.

Skill-centered systems instead organize skills as reusable external assets. SkillNet provides infrastructure for creating, evaluating, and connecting more than 200,000 skills through a unified ontology (Liang et al. 2026b), while SkillCenter builds a source-grounded library of 216,938 skills using multi-source acquisition, quality filtering, and claim-level traceability (Sha et al. 2026). Their primary focus is skill construction, organization, and agent-side reuse. SPT instead treats multi-file skill packages as mid-training data and studies corpus mixture and cross-file serialization under a fixed token budget.

Agent Tuning and Evaluation

Most prior work on tool-use specialization focuses on post-training. Function-calling corpora train API selection, schema-compliant argument generation, and call composition across large tool collections (Patil et al. 2024; Qin et al. 2024; Tang et al. 2023; Liang et al. 2026a). Agent-tuning datasets extend this supervision to multi-turn reasoning—observation traces and environment interactions (Yao et al. 2022; Chen et al. 2024; Song et al. 2024; Prabhakar et al. 2025; Fang et al. 2025), while RL-based methods optimize tool-use policies against task rewards. Recent studies further indicate that SFT generalization can be limited by interface-pattern memorization and that RL outcomes depend on the initial policy and reward design (Chu et al. 2025; Qian et al. 2025; Dong et al. 2025; Gu et al. 2026). SPT exposes the model to workflow-level knowledge before post-training and evaluates whether this preparation improves downstream agentic performance.

Recent benchmarks provide fine-grained diagnostics of tool-use awareness, tool selection, argument validity, function chaining, multi-step planning, and action–feedback consistency (Li et al. 2023; Huang et al. 2024; Ye et al. 2025; Patil et al. 2025). Broader suites additionally evaluate web interaction, operating-system control, knowledge-intensive tasks, and long-horizon behavior (Qin et al. 2025; Jia et al. 2025; Shi et al. 2026). We use these benchmarks to measure how the mid-training corpus affects distinct components of agentic behavior.

Skill Pre-Training

SPT uses human-written skill packages during mid-training, before behavior-oriented post-training. This stage exposes the base model to tool descriptions and reusable workflows


²<https://clashub.ai/>

before SFT teaches response and tool-call formats. Unlike a call or trajectory, which records a particular sequence of actions and outcomes, a skill explains when a capability applies, how to complete a task, which constraints to follow, and which supporting resources to use. Skills provide reusable task knowledge, whereas calls and trajectories provide direct behavioral supervision.


SPT changes the data used for mid-training without changing the standard causal language-modeling objective. It requires no task environments, tool execution, or synthetic trajectory generation. As shown in Figure 3, we collect public multi-file skill packages, clean their contents, organize each package with Reference Insert, and pack the resulting sequences into fixed-length training blocks. Reference Insert keeps instructions close to the files they mention, preserving relationships across package resources. The skill blocks can be used alone or mixed with general data during mid-training. This stage produces a skill-adapted checkpoint that initializes subsequent post-training.

SKILLCORPUS Construction

We construct SKILLCORPUS from a May 1, 2026 snapshot of public ClawHub packages, retaining complete packages from trusted, identity-verified, and independently audited publishers. Each package pairs a primary instruction file,

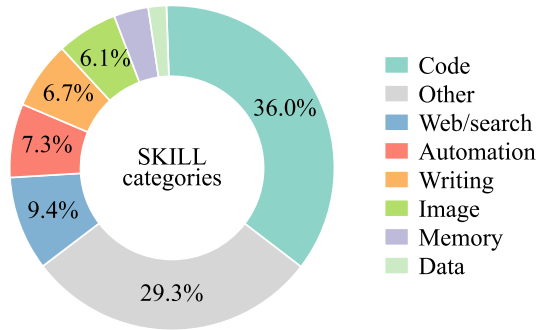

(a) Distribution of skill packages by task category.

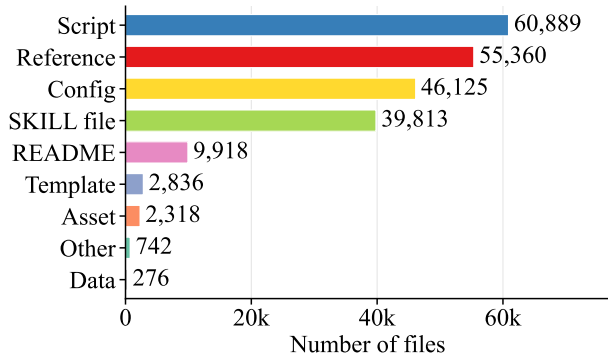

(b) Distribution of skill files by role.

Figure 2: Task and file composition of SKILLCORPUS: (a) task categories across its 38,040 packages; (b) roles of 218,277 files.

typically `SKILL.md`, with optional references, scripts, templates, configurations, or other text resources; workflows may span these files.

We iteratively develop the package-level quality screen from manual audits, refining heuristics to deduplicate content, detect near-duplicate packages and autogenerated content, reject erroneous workflows, and assign quality tiers. This stage removes about 2% of collected packages. We then remove empty or short content, encoded blobs, lock files, and binaries; redact potentially sensitive fields; and normalize paths while preserving package boundaries. Figure 2 summarizes the resulting task and file-role distributions; full rules and counts appear in the supplement.

For decontamination, manual audit and DeepSeek-V4-Flash screen candidates against API-Bank, MetaTool, APT-Bench, ToolEyes, and the Open Language Model Evaluation Standard (OLMES) (Gu et al. 2025). We remove packages containing benchmark-specific tool schemas, task templates, rewritten variants, or derivatives (about 0.3%). The final corpus contains 38,040 packages and 218,277 files (5.74 per package); the supplement gives screening criteria and overlap diagnostics.

Multi-File Skill Assembly

The purpose of assembly is to convert a multi-file skill package into a causal language-modeling sequence without discarding the relations expressed by file references. A simple concatenation can place an instruction far from the file it mentions. We therefore introduce Reference Insert, which makes this relation local while keeping the package’s underlying files and text unchanged.

For each package, we first write a header with its name and description. We then scan `SKILL.md` in its original order and normalize candidate paths. When a line contains an unambiguous reference to a supporting file, we insert a `<referenced_file_sep>` marker and the referenced file immediately after that line. Each supporting file is inserted at most once, at its first unambiguous mention. After the scan, we append all remaining package files with `<unreferenced_file_sep>` markers. A final separator marks the boundary between packages, and the assembled stream is packed into 4,096-token training blocks. The output preserves the instruction text, supporting contents, file identities, and package boundaries in a single causal sequence. This process produces 84,905 training blocks, totaling approximately 347.8 million tokens.

We compare Reference Insert with DeepSeek-Coder Packing (DeepSeek-Coder) (Guo et al. 2024; Hui et al. 2024; Lozhkov et al. 2024), Random File Order (Random File), Metadata Packing (Metadata) (Gao et al. 2025), and Skill fill-in-the-middle (Skill-FIM) (Bavarian et al. 2022). These alternatives vary how the same package contents are organized. The ablation therefore tests whether placing referenced resources near their mentions improves the training value of skill data, rather than assuming that the effect follows from structure alone.

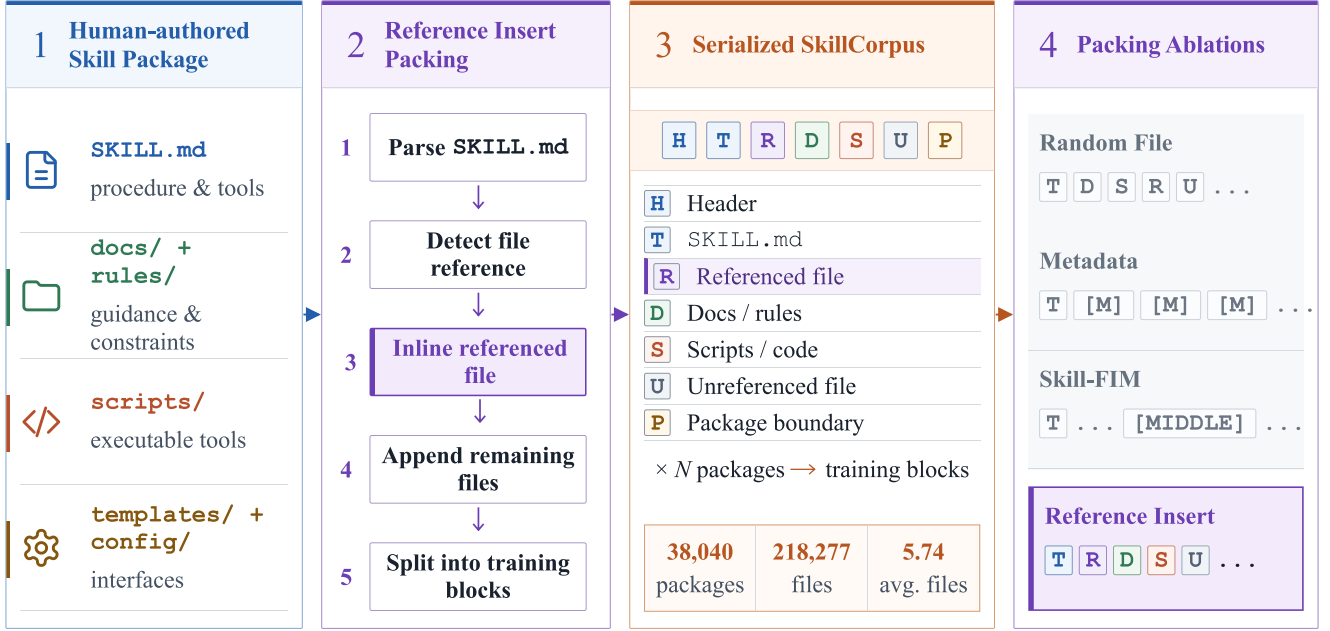


Figure 3: Overview of the SPT data pipeline. (1) A skill package combines a primary instruction file with supporting resources; (2) Reference Insert places each referenced file near its first mention and appends the remaining files; (3) serialized packages form 4,096-token training blocks while retaining file and package boundaries; and (4) alternative file organizations are used to ablate reference-aware serialization.

Skill and General Data Mixture

Skill data is targeted toward tool use and workflows, whereas general pre-training corpora provide broader language and knowledge coverage. SPT allows these sources to be combined under the same token budget. Let p_{skill} and p_{gen} denote the empirical distributions over assembled skill blocks and general-data blocks. Given a fixed mid-training token budget B , we construct the training corpus D_α as

$$p_\alpha(x) = \alpha p_{\text{skill}}(x) + (1 - \alpha) p_{\text{gen}}(x),$$

$$D_\alpha \sim p_\alpha, \quad |D_\alpha|_{\text{tok}} = B, \quad 0 \leq \alpha \leq 1. \quad (1)$$

The coefficient α is the fraction of skill data. The setting $\alpha = 1$ gives pure-skill SPT, while $0 < \alpha < 1$ mixes skill and general data. The endpoint $\alpha = 0$ contains no skill data and serves only as a general-data mid-training control. We continue causal language modeling from the base model on D_α ; no new training objective is introduced.

We evaluate both pure-skill training and mixtures with Dolmino (OLMo et al. 2024) or SmoLLM (Allal et al. 2025). The pure-skill setting isolates whether skill packages are useful pre-training data relative to general and trajectory controls. The mixture sweep asks whether skills should replace general annealing data or complement it. We do not assume that one mixture is universally optimal; the experiments measure the tradeoff between agentic and general performance across the evaluated ratios.

Experiments

In our experiments, we evaluate the effect of SPT on the agentic capabilities of language models. The main experiment compares SPT with direct SFT, general-data mid-training, and agent-trajectory mid-training across three model scales. We apply both general instruction tuning and function-calling SFT to examine how the downstream post-training recipe affects the benefit of SPT. In addition, we compare skill-general data mixtures and multi-file skill assembly strategies, and test whether the advantage of SPT remains after downstream reinforcement learning.

Experimental Setup

Backbones and datasets. We select three base models at different scales: MeCo-1.6B-DCLM-160B (Gao et al. 2025; Li et al. 2024), Instella-3B-Stage1 (Liu et al. 2025), and OLMo-3-1025-7B (Team et al. 2025). All three are checkpoints after a single stage of general pre-training and have not undergone annealing or post-training, which isolates SPT from earlier adaptation stages. For mid-training, we compare Dolmino (OLMo et al. 2024) as a general-data baseline, AgentBank (Song et al. 2024) as an agent-trajectory baseline, and SKILLCORPUS as the skill-data condition; direct SFT without mid-training provides an additional baseline. The three mid-training conditions use the same number of training tokens. Each base or mid-training checkpoint is then trained with either Tulu 3 (Lambert et al. 2024), a general instruction-tuning mixture, or xLAM-FC (Zhang et al. 2025), a function-calling SFT corpus.

Training Data		Agentic Benchmarks ↑					General Benchmarks ↑						
Mid-train	Post-train	API	Meta	APT	Eyes	Avg.	ARC	BQ	HS	PIQA	WG	MMLU	Avg.
MeCo-1.6B-DCLM-160B													
No mid-training	xLAM-FC	9.82	12.50	10.22	22.87	13.85	<u>43.94</u>	<u>69.70</u>	67.40	73.10	<u>64.48</u>	<u>36.43</u>	59.18
Dolmino		15.76	16.16	17.47	23.43	18.20	44.37	<u>69.50</u>	66.30	72.90	<u>63.85</u>	36.51	58.91
AgentBank		<u>18.39</u>	<u>17.13</u>	<u>19.47</u>	<u>27.49</u>	<u>20.62</u>	43.09	69.10	<u>66.80</u>	73.90	64.64	36.38	58.99
SKILLCORPUS		29.13	21.30	23.02	28.14	25.40	43.69	70.90	65.70	<u>73.40</u>	64.09	36.20	<u>59.00</u>
No mid-training	Tulu 3	8.05	9.72	12.99	21.01	12.94	43.37	66.10	<u>67.80</u>	<u>73.90</u>	63.48	<u>36.45</u>	58.52
Dolmino		11.34	15.85	13.58	21.47	15.56	44.26	<u>67.90</u>	68.10	75.00	63.19	37.32	59.29
AgentBank		<u>14.37</u>	<u>16.06</u>	<u>14.51</u>	26.96	<u>17.98</u>	<u>44.20</u>	68.70	67.70	73.80	64.17	36.25	<u>59.14</u>
SKILLCORPUS		26.47	17.39	17.97	<u>26.39</u>	22.06	43.94	65.30	66.20	73.80	<u>63.69</u>	36.24	58.20
Instella-3B-Stage1													
No mid-training	xLAM-FC	20.77	17.85	14.72	32.40	21.44	<u>66.69</u>	84.40	77.00	79.10	72.45	<u>54.06</u>	72.28
Dolmino		31.42	18.02	17.60	36.09	25.78	66.89	83.40	76.10	78.10	73.56	54.22	<u>72.05</u>
AgentBank		<u>33.54</u>	<u>22.46</u>	<u>19.72</u>	<u>38.37</u>	<u>28.52</u>	60.75	82.80	<u>77.10</u>	<u>78.50</u>	<u>72.77</u>	50.10	70.34
SKILLCORPUS		45.34	31.02	23.97	53.40	38.43	64.68	<u>83.70</u>	78.10	78.20	72.30	51.62	71.43
No mid-training	Tulu 3	21.87	11.63	16.64	31.95	20.52	<u>64.40</u>	81.00	<u>76.20</u>	77.90	70.30	52.30	<u>70.35</u>
Dolmino		26.38	16.37	18.23	35.67	24.16	62.50	80.80	76.30	77.20	<u>71.00</u>	<u>52.40</u>	70.03
AgentBank		<u>30.00</u>	<u>18.03</u>	<u>18.98</u>	<u>37.09</u>	<u>26.03</u>	63.40	81.30	74.80	<u>77.40</u>	72.45	52.03	70.23
SKILLCORPUS		40.44	28.51	21.95	44.28	33.80	65.40	81.90	75.30	<u>77.40</u>	<u>71.00</u>	52.50	70.58
OLMo-3-1025-7B													
No mid-training	xLAM-FC	28.15	20.93	25.27	39.64	28.50	75.51	87.40	<u>79.40</u>	77.90	71.98	59.68	75.31
Dolmino		36.45	22.87	30.07	43.92	33.33	75.51	86.90	78.70	<u>77.70</u>	71.59	60.57	<u>75.16</u>
AgentBank		<u>48.82</u>	<u>49.24</u>	<u>31.80</u>	<u>46.34</u>	<u>44.05</u>	73.29	86.70	79.70	<u>77.10</u>	<u>71.90</u>	57.60	74.38
SKILLCORPUS		53.23	53.10	39.96	67.54	53.46	<u>75.00</u>	<u>87.20</u>	78.50	77.90	71.82	<u>59.98</u>	75.07
No mid-training	Tulu 3	25.94	18.56	23.83	37.65	26.49	74.11	<u>86.10</u>	80.20	78.20	72.09	58.69	74.90
Dolmino		31.37	19.88	28.62	41.77	30.41	<u>74.74</u>	85.80	<u>80.80</u>	79.00	<u>72.93</u>	<u>59.41</u>	75.45
AgentBank		<u>42.33</u>	<u>47.76</u>	<u>30.06</u>	<u>43.98</u>	<u>41.03</u>	75.09	85.00	81.40	78.40	73.01	58.28	75.20
SKILLCORPUS		50.30	50.03	33.20	49.74	45.82	75.09	86.20	80.60	<u>78.50</u>	72.61	59.43	<u>75.41</u>

Table 1: Main results for the mid-training–post-training pipeline. API, Meta, APT, Eyes, ARC, BQ, HS, and WG abbreviate API-Bank, MetaTool, APTBench, ToolEyes, ARC-Challenge, BoolQ, HellaSwag, and WinoGrande. The Avg. columns report the unweighted mean within each benchmark group. Best and second-best scores are shown in bold and underlined, respectively.

Training configuration. All runs use four NVIDIA A100 80GB GPUs, BF16 precision with TF32 enabled, and gradient checkpointing. Mid-training optimizes causal language modeling for one epoch with a sequence length of 4,096, a per-device batch size of 1, 8 gradient-accumulation steps, a learning rate of 2×10^{-5} , weight decay of 0.1, and a cosine schedule. SFT uses assistant-only supervision for three epochs with a sequence length of 2,048, a per-device batch size of 4, 4 gradient-accumulation steps, the same learning rate and scheduler, and no weight decay. The 1.6B experiments use AdamW, while the 3B and 7B experiments use Adafactor. All reported results are means over five random seeds.

Evaluation. We measure agentic capability with API-Bank (Li et al. 2023), MetaTool (Huang et al. 2024), APT-Bench (Qin et al. 2025), and ToolEyes (Ye et al. 2025). Together, they cover API invocation, tool selection, multi-step agentic tasks, and tool-related reasoning. We use six benchmarks from OLMES (Gu et al. 2025) to measure general capability: ARC-Challenge (Clark et al. 2018), BoolQ (Clark et al. 2019), HellaSwag (Zellers et al. 2019), PIQA (Bisk et al. 2020), WinoGrande (Sakaguchi et al. 2021), and

MMLU (Hendrycks et al. 2020). Agentic tasks use task-specific 0–5-shot prompts and are evaluated using execution-based, exact-match, or likelihood-based accuracy metrics, with unparseable outputs counted as incorrect; OLMES uses fixed 5-shot likelihood ranking. The four- and six-benchmark averages are unweighted.

Main Results

Across all six backbone and SFT settings in Table 1, SKILLCORPUS achieves the best agentic performance, outperforming both the general corpus Dolmino and the agent-trajectory corpus AgentBank. It also ranks first in 23 of the 24 individual agentic benchmark comparisons. Relative to direct SFT, SPT improves the four-benchmark agentic score by 9.11–24.96, while the six-benchmark general score changes by only -0.85 to $+0.51$. SPT therefore improves downstream agentic capabilities consistently across backbones and post-training recipes, with little change in general performance.

Skill data contributes gains beyond mid-training. Dolmino improves the four-benchmark mean over direct SFT by 2.62–4.83 across the six settings, showing that an additional language-modeling stage contributes part of the

improvement. Under the same pipeline, SKILLCORPUS adds another 6.49–20.13 over Dolmino. This substantially larger margin suggests that corpus content, not merely the added training stage, drives most of the agentic gain.

Skill data is more effective than agent trajectories for mid-training. AgentBank consistently improves on Dolmino, showing that agent trajectories are more useful than general text for the evaluated agentic tasks. The four-benchmark score nevertheless follows the same ordering in all six blocks: Dolmino < AgentBank < SKILLCORPUS. Under the same training-data budget, SKILLCORPUS outperforms AgentBank by 4.07–9.91. Skills state tool applicability, constraints, and reusable procedures explicitly, whereas trajectories record the actions and observations from a particular execution. During causal language-modeling mid-training, skill data exposes reusable workflow knowledge directly instead of requiring the model to infer it from individual executions, which may improve transfer to downstream agentic tasks.

SPT complements tool-focused SFT. At every backbone size, the gain over direct SFT is larger after xLAM-FC than after Tulu 3: 11.55 versus 9.11 at 1.6B, 16.99 versus 13.28 at 3B, and 24.96 versus 19.33 at 7B. The larger gains with xLAM-FC suggest that tool-focused SFT makes greater use of the workflow knowledge learned during SPT. Skill descriptions and function-call supervision contribute complementary signals at different stages of training.

Mixing Skill and General Data

In practical pre-training pipelines, mid-training commonly uses a mixture of high-quality general data and capability-specific data. To determine how skill data should be incorporated at this stage, we vary the SKILLCORPUS-to-general-data ratio under a fixed training-token budget. This experiment provides empirical guidance for adding skill data to existing mid-training mixtures. All runs use the 1.6B backbone and Tulu 3 SFT, and we repeat the sweep with Dolmino and SmolLM as two general-data sources.

Mixed training clearly outperforms both single-source endpoints (Figure 4). With 30% SKILLCORPUS, the agentic score reaches 38.60 when mixed with Dolmino and 37.58 when mixed with SmolLM, compared with 15.56 and 9.07 for the corresponding general-only settings and 22.06 for pure-skill training. The same ratio gives the highest agentic score in both sweeps. Meanwhile, the general scores at this ratio remain 58.64 and 58.83, close to the general-only scores of 59.29 and 59.26. Mixing skill and general data therefore produces large agentic gains with a small change in general performance.

The benefit extends beyond a single ratio: mixtures containing 20%–50% skill data outperform both endpoints under both general corpora. Above 50%, the agentic score falls rapidly, whereas the general score changes gradually. General data therefore contributes more than retention on general benchmarks; its broader language and task coverage helps the reusable workflows in skill data transfer to varied agentic tasks. Skill data is most effective as a targeted component of mid-training rather than a complete replacement for general data.

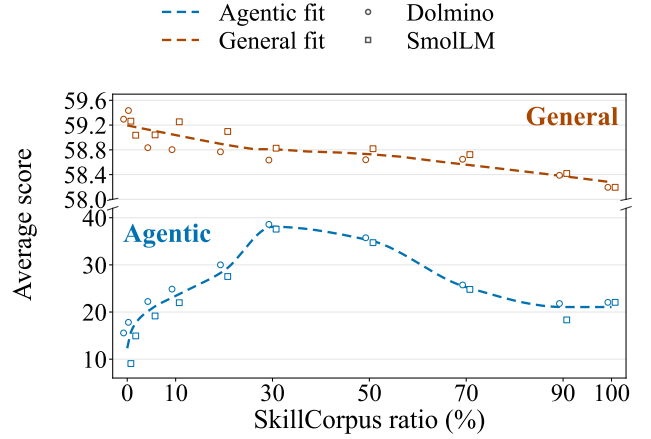


Figure 4: Agentic and general scores across SKILLCORPUS mixture ratios. Circles denote mixtures with Dolmino, and squares denote mixtures with SmolLM; dashed curves show the fitted trends across both general-data sources.

Taken together, the mixture sweeps provide a direct guideline for mid-training: skill data should be incorporated into a general-data mixture rather than used as a standalone corpus. Both the general-only and pure-skill endpoints underperform intermediate mixtures, and the same pattern holds with Dolmino and SmolLM. Joint training combines the broad language and task coverage of general data with the reusable workflows in skill data, producing the strongest downstream agentic performance.

Multi-File Skill Assembly

We compare our proposed Multi-File Skill Assembly strategy, Reference Insert, with existing multi-file assembly methods developed for code repositories and structured corpora. This experiment examines whether organizing files by skill-specific references improves mid-training over generic multi-file packing. We compare five strategies using the same cleaned skill files, training-token budget, tokenizer, and 4,096-token block construction. DeepSeek-Coder preserves package boundaries and original file order; Random File shuffles files within each package; Metadata adds package- and file-level attributes; Skill-FIM applies fill-in-the-middle transformations to Reference Insert sequences; and Reference Insert places supporting files after their first unambiguous mention in the primary instruction file. All models use the 1.6B backbone followed by Tulu 3 SFT.

Reference Insert achieves the best result on all four agentic benchmarks and the general score. Its four-benchmark agentic score is 22.06, compared with 20.19 for DeepSeek-Coder and 16.09 for Random File. Because Reference Insert and Random File contain the same files under the same training budget, the 5.96 difference comes from how the files are arranged rather than which tokens are observed. The four alternatives obtain similar general scores of 57.30–57.35, while Reference Insert reaches 58.20, so its agentic improvement does not trade off general performance.

Strategy	API-Bank	MetaTool	APT	ToolEyes	Gen.
DeepSeek-Coder	<u>24.40</u>	15.22	<u>16.14</u>	25.01	57.30
Random File	17.76	10.55	14.72	21.34	57.34
Metadata	11.46	15.03	13.64	25.86	<u>57.35</u>
Skill-FIM	15.43	<u>17.06</u>	13.37	<u>26.06</u>	57.33
Reference Insert	26.47	17.39	17.97	26.39	58.20

Table 2: Effect of multi-file skill assembly on agentic and general performance. Gen. denotes the average score of six general benchmarks.

DeepSeek-Coder is the strongest alternative, trailing Reference Insert by 1.87. Preserving package boundaries, file paths, and source order therefore retains useful structure even without explicit reference resolution. Reference Insert further reduces the distance between an instruction and the resource it invokes, making these cross-file dependencies available within the local causal context.

Generic structural transformations do not provide the same benefit. Metadata reaches an agentic score of 16.50, while Skill-FIM reaches 17.98. Skill-FIM improves MetaTool and ToolEyes over Random File but remains below DeepSeek-Coder on API-Bank and APTBench. Adding file attributes or fill-in-the-middle transformations does not consistently connect procedural instructions with the resources they reference. The results favor reference-aware file placement over additional structural tokens or generic code-oriented packing schemes.

SPT under Reinforcement Learning Post-Training

Modern post-training pipelines often extend SFT with a subsequent reinforcement-learning stage. In this experiment, we test whether SPT remains effective under an SFT-then-RL pipeline. Starting from SmoLLM2-360M (Al-lal et al. 2025), we construct three mid-training conditions: none, Dolmino, and SKILLCORPUS, with the latter two using the same training-token budget. We then apply identical Tulu 3 SFT followed by Group Relative Policy Optimization (GRPO) (Shao et al. 2024) to all three models. GRPO uses the RLVR-GSM-MATH-IF-Mixed-Constraints dataset (Lambert et al. 2024), which contains mathematical and instruction-following tasks rather than tool-use supervision.

GRPO runs for one epoch with maximum prompt and completion lengths of 1,024 and 256, four generations per prompt, a per-device batch size of 2, four gradient-accumulation steps, a learning rate of 1×10^{-6} , and a Kullback-Leibler (KL) coefficient of 0.04. We use Adafactor with a cosine schedule and 3% warmup, BF16 precision, and the same five seeds.

Under SFT followed by GRPO, SKILLCORPUS achieves the best result on all four agentic benchmarks (Table 3). Its four-benchmark score is 11.94, compared with 7.25 for Dolmino and 4.95 without mid-training, giving margins of 4.69 and 6.99. It also obtains the highest general score of 41.49, compared with 40.96 and 40.10. Because all three models receive the same SFT and GRPO training, these differences reflect the effect of the preceding mid-training data.

Mid-training	API-Bank	MetaTool	APT	ToolEyes	Gen.
None	5.44	1.16	4.54	8.64	40.10
Dolmino	7.69	4.75	7.66	8.90	40.96
SKILLCORPUS	15.93	10.88	9.43	11.52	41.49

Table 3: Scores under identical Tulu 3 SFT and GRPO post-training for three mid-training conditions.

Across the main and GRPO experiments, the results show that SPT is effective under two post-training pipelines: SFT alone and SFT followed by reinforcement learning. The RL objective does not provide tool-use supervision, yet the agentic advantage from skill mid-training remains after GRPO. SPT can therefore improve the model before different post-training methods rather than depending on a particular form of downstream optimization.

Limitations and Ethical Considerations

SKILLCORPUS is drawn from a single public repository; therefore, its domain and language coverage reflects the ClawHub community. The packages disproportionately represent certain programming languages, tool ecosystems, and task categories popular in that community, while low-resource languages and specialized agentic domains remain underrepresented. Our main experiments cover English and Chinese data, three 1.6B–7B backbones, and the reported training budgets, with a separate 360M study for RL post-training. Larger models, other compute regimes, and alternative corpus compositions remain untested. The aggregate benchmarks do not separately measure failures in tool selection, argument construction, error recovery, or unsafe action sequences, and we do not evaluate interactive long-horizon behavior.

The corpus consists of public packages from identity-verified and independently audited publishers. During corpus construction, we remove detected personal data, secrets, binaries, encoded payloads, and benchmark-derived content, although residual errors or unsafe instructions may remain. Because skills can specify executable workflows, downstream risk depends on the tools and permissions available to the model. Corpus distribution will follow source licenses and ClawHub’s platform terms.

Conclusion

This work studies skill packages as a source of pre-training data, using them during mid-training before behavior-oriented post-training. We introduce SPT and evaluate its effect on downstream agentic capabilities across multiple backbones and mid-/post-training configurations. SPT consistently improves agentic performance over direct post-training and mid-training on general or trajectory data while largely preserving general performance. Mixture, assembly, and RL experiments further show that these gains remain under different corpus compositions, package organizations, and post-training methods. Skill packages can therefore provide reusable workflow knowledge during training, extending their role beyond inference-time context.

Appendix

Corpus and Training Details

Skill corpus. SKILLCORPUS is sourced from the public skill repository ClawHub³, where each package is a multi-file reusable workflow specification. The collection snapshot was acquired on May 1, 2026. We retain only packages from trusted publishers that have passed identity verification and independent third-party audits. The corpus spans task families including document processing, code execution, browser operation, spreadsheet analysis, data conversion, multimodal generation, and domain-specific tool adapters, as shown in the corpus-composition figure in the main paper. These task families are used only to describe the corpus; category labels are not used during training.

Item	Value
Source collection	ClawHub skill packages
Collection date	May 1, 2026
Training unit before serialization	Multi-file skill package
Primary file role	SKILL.md/README-style workflow specification
Supporting file roles	References, scripts, templates, configs, small text resources
Default serialization	Reference Insert with explicit package/file separators
Maximum package budget	100k characters before priority-based section selection

Table 4: Corpus provenance and serialization controls for SKILLCORPUS.

Mid-training corpus accounting. For the main comparison, Dolmino, AgentBank, and SKILLCORPUS are materialized to the same fixed token budget. Table 5 reports exact post-packing totals. Total training tokens include any end-of-sequence (EOS) padding added to complete the final 4,096-token block.

Corpus	Training tokens	Padding tokens
Dolmino	347,770,880	0
AgentBank	347,770,880	4,065
SKILLCORPUS	347,770,880	351

Table 5: Exact token accounting for the three main mid-training corpora.

Corpus-composition proxies. We describe AgentBank and SKILLCORPUS using corpus-native coverage proxies. AgentBank’s 19 task configurations are grouped into four task families and weighted by sampled non-padding tokens. The SKILLCORPUS families use the package-level categories shown in the main-paper corpus-composition figure. Table 6 reports these descriptive shares without using them as training constraints.

Corpus	Coverage proxy	Share
AgentBank	Embodied / household	43.69%
	Web / interface / commerce	23.77%
	Math / question answering / reasoning	21.27%
	Code / shell / database	11.27%
SKILLCORPUS	Code / software	35.96%
	Other	29.26%
	Web / search / browser	9.39%
	Automation / workflow	7.34%
	Document / writing	6.74%
	Image / multimodal	6.08%
	Memory / knowledge	3.44%
	Data / table	1.80%

Table 6: Corpus-native domain and tool-coverage proxies. AgentBank values are sampled-token shares; SKILLCORPUS values are package shares.

As a language proxy, we count basic Latin letters and Chinese, Japanese, and Korean (CJK) unified ideographs in each materialized training text and normalize by their combined count. Table 7 reports the resulting script shares.

Corpus	Latin	CJK
AgentBank	99.9991%	0.0009%
SKILLCORPUS	93.7496%	6.2504%

Table 7: Unicode-script proportions used as a language-composition proxy.

Serialized package example. The abbreviated example below shows the package-level structure preserved by the default serializer.

```
<package_sep>
ab-test-setup{cs-ab-test-setup}

<file_sep path="SKILL.md">
---
name: "ab-test-setup"
description: Plan or implement A/B tests,
  split tests, experiment variants,
  conversion experiments, or stats tests.
metadata:
  category: marketing
  updated: 2026-03-06
---
```

A/B Test Setup

You are an expert in experimentation.
Your goal is to design tests that produce
valid, actionable results.

Initial Assessment

If `.\claude/product-marketing-context.md`
exists, read it before asking questions.
Before designing a test, understand:
1. Test Context -- target metric.
2. Current State -- baseline and traffic.
3. Constraints -- complexity and timeline.

³<https://clawhub.ai/>


```
## Hypothesis Framework

Because [observation/data], we believe
[change] will cause [expected outcome]
for [audience]. We will know this when
[metrics].

## Sample Size

For sample size and duration calculations:
See refs/size.md

<referenced_file_sep path="refs/size.md">
# Sample Size Guide

Reference for sample size and duration.

Required inputs:
1. Baseline conversion rate.
2. Minimum detectable effect.
3. Statistical significance level.
4. Statistical power.
```

Filtering and cleaning. We develop the package-level quality screen through an iterative manual-audit process. We first inspect a sample of collected packages and encode recurring failure modes in a heuristic script. Its rules perform content-level semantic deduplication, detect near-duplicate packages and automatically generated content, filter erroneous workflows, and assign the remaining packages to quality tiers. After each pass, we inspect the excluded packages, update the rules with newly observed low-quality patterns, and rerun the screen. This iterative process removes approximately 2% of the collected packages.

During structural cleaning, each remaining record is parsed into a package prefix and file sections delimited by `<file_sep>`. We reject empty or short records; policy-enforcing templates unrelated to reusable skills are guarded or permission-gated.

At the file level, we discard dependency directories, lock files, binary or media resources, archive/font/map files, files with unsupported extensions, and long encoded blobs. In the current run, the file-level pass removes 818 lock files and 170 encoded blobs. For retained files, the cleaner removes null bytes and base64-encoded data uniform resource identifiers (URIs), redacts possible secrets such as application programming interface (API) keys, tokens, passwords, and common provider-specific key formats, and normalizes line endings, trailing whitespace, and excessive blank lines. The cleaning pass removes 256 data URIs and applies 23,973 secret-pattern redactions.

Long code blocks, source files, and tables are kept intact during filtering. If a package exceeds the 100k-character budget, sections are selected by priority (SKILL.md, README files, other Markdown/text files, configuration/interface files, then scripts) rather than by random truncation. Applying this budget to 1,893 packages removes 25,632 lower-priority sections. Packages shorter than 40 characters after cleaning are rejected.

The resulting clean package candidates preserve package boundaries, file paths, and explicit file separators for bench-

mark decontamination and subsequent serialization.

Training-corpus benchmark decontamination. Before serialization and mid-training, we screen the clean package candidates against all public benchmarks used for evaluation. The screen covers the four agentic benchmarks API-Bank (Li et al. 2023), MetaTool (Huang et al. 2024), APT-Bench (Qin et al. 2025), and ToolEyes (Ye et al. 2025), along with the six Open Language Model Evaluation Standard (OLMES) benchmarks used for general evaluation (Gu et al. 2025): ARC-Challenge (ARC), BoolQ (BQ), HellaSwag (HS), Physical Interaction: Question Answering (PIQA), WinoGrande (WG), and Massive Multitask Language Understanding (MMLU).

Screening combines manual audit with DeepSeek-V4-Flash (deepseek-v4-flash) judgments. We remove an entire skill package when any file contains benchmark-specific tool formats or schemas, task templates, rewritten or paraphrased variants, or other derivative content. Package-level removal prevents supporting files from retaining related benchmark material. Approximately 0.3% of candidate packages are excluded from the training corpus. After quality and structural cleaning followed by benchmark decontamination, all SKILLCORPUS variants use the same final package set, while the evaluation instances remain unchanged.

As a lexical diagnostic, we normalize cleaned candidates and benchmark inputs into lowercase alphanumeric and Chinese-character tokens and compute exact 13-gram overlap. Table 8 reports results before package removal. The 1.24B-character candidate pool contains 163 unique benchmark 13-grams. Matches flag candidates for review but are not the sole removal criterion because exact overlap misses rewritten or derivative forms.

Benchmark	Instances	Matched	13-gram Rate	Max Inst.
<i>Agentic benchmarks</i>				
API-Bank	1,602	0	0.0000%	0.00%
MetaTool	6,214	13	0.0022%	1.76%
APTBench	3,561	66	0.0179%	4.65%
ToolEyes	1,121	40	0.0269%	4.34%
<i>OLMES benchmarks</i>				
ARC	2,343	0	0.0000%	0.00%
BQ	2,000	0	0.0000%	0.00%
HellaSwag	2,000	0	0.0000%	0.00%
PIQA	2,000	0	0.0000%	0.00%
WG	1,268	0	0.0000%	0.00%
MMLU	28,084	8	0.0014%	1.64%

Table 8: Exact-overlap diagnostic on the cleaned candidate pool before package-level decontamination. The *Matched* column counts benchmark instances sharing at least one normalized 13-gram with the candidate pool. The *13-gram Rate* is the fraction of unique benchmark 13-grams matched by the candidate pool; *Max Inst.* is the largest matched 13-gram fraction for any single benchmark instance. Benchmark instances remain in the evaluation sets.

Tables 9, 10, and 11 list the matched training configurations used with Tulu 3 supervised fine-tuning (SFT) (Lambert et al. 2024) and xLAM function-calling (xLAM-FC)

SFT (Zhang et al. 2025) across the MeCo 1.6B (Gao et al. 2025; Li et al. 2024), OLMo 7B (Team et al. 2025), and Instella 3B (Liu et al. 2025) backbones. All runs use Brain Floating Point (BF16) precision with TensorFloat-32 (TF32) enabled unless noted otherwise. For every configuration, we average results over runs with seeds 42, 3407, 1234, 2026, and 2027.

Parameter	Mid-training	Tulu 3 SFT	xLAM-FC SFT
GPUs	4 × A100 80GB	4 × A100 80GB	4 × A100 80GB
Backbone / initialization	MeCo-1.6B-DCLM-160B	Mid-training checkpoint; the no-mid-training condition uses the backbone directly	Mid-training checkpoint; the no-mid-training condition uses the backbone directly
Training objective	Causal language modeling on fixed token blocks	Assistant-only supervised chat loss	Assistant-only function-call loss
Training data	Mid-training corpus (experiment-specific)	Tulu 3	xLAM-FC
Total budget	1 epoch	3 epochs	3 epochs
Sequence length	4,096	2,048	2,048
Per-device batch size	1	4	4
Gradient accum. steps	8	4	4
Learning rate	2×10^{-5}	2×10^{-5}	2×10^{-5}
Weight decay	0.1	0.0	0.0
Optimizer	AdamW	AdamW	AdamW
Scheduler	cosine	cosine	cosine
Precision	BF16; TF32 enabled	BF16; TF32 enabled	BF16; TF32 enabled
Gradient checkpointing	enabled	enabled	enabled
No. of seeds	5	5	5

Table 9: Training hyperparameters for the 1.6B experiments with mid-training followed by post-training. Both Tulu 3 and xLAM-FC SFT settings are used for the main mid-training corpus comparison; the Tulu 3 settings are additionally used for the mixture-ratio and data-organization experiments.

Evaluation Protocols and Output Parsing

We follow the prompts, interaction procedures, and task metrics released with each benchmark. The skill-corpus decontamination described above is applied before mid-training, and every model is evaluated on the same instances. Scores use a 0–100 scale. Except for the recovery procedures noted below, unparseable outputs are scored as incorrect.

API-Bank. We use the three official evaluation levels of API-Bank (Li et al. 2023): Level 1 supplies the relevant

Parameter	Mid-training	Tulu 3 SFT	xLAM-FC SFT
GPUs	4 × A100 80GB	4 × A100 80GB	4 × A100 80GB
Backbone / initialization	OLMo-3-1025-stage1-step999000	Mid-training checkpoint; the no-mid-training condition uses the backbone directly	Mid-training checkpoint; the no-mid-training condition uses the backbone directly
Training objective	Causal language modeling on fixed token blocks	Assistant-only supervised chat loss	Assistant-only function-call loss
Training data	Mid-training corpus (experiment-specific)	Tulu 3	xLAM-FC
Total budget	1 epoch	3 epochs	3 epochs
Sequence length	4,096	2,048	2,048
Per-device batch size	1	4	4
Gradient accum. steps	8	4	4
Learning rate	2×10^{-5}	2×10^{-5}	2×10^{-5}
Weight decay	0.1	0.0	0.0
Optimizer	Adafactor	Adafactor	Adafactor
Scheduler	cosine	cosine	cosine
Precision	BF16; TF32 enabled	BF16; TF32 enabled	BF16; TF32 enabled
Gradient checkpointing	enabled	enabled	enabled
No. of seeds	5	5	5

Table 10: Training hyperparameters for the 7B OLMo experiments with mid-training followed by post-training.

Parameter	Mid-training	Tulu 3 SFT	xLAM-FC SFT
GPUs	4 × A100 80GB	4 × A100 80GB	4 × A100 80GB
Backbone / initialization	Instella-3B-Stage1	Mid-training checkpoint; the no-mid-training condition uses the backbone directly	Mid-training checkpoint; the no-mid-training condition uses the backbone directly
Training objective	Causal language modeling on fixed token blocks	Assistant-only supervised chat loss	Assistant-only function-call loss
Training data	Mid-training corpus (experiment-specific)	Tulu 3	xLAM-FC
Total budget	1 epoch	3 epochs	3 epochs
Sequence length	4,096	2,048	2,048
Per-device batch size	1	4	4
Gradient accum. steps	8	4	4
Learning rate	2×10^{-5}	2×10^{-5}	2×10^{-5}
Weight decay	0.1	0.0	0.0
Optimizer	Adafactor	Adafactor	Adafactor
Scheduler	cosine	cosine	cosine
Precision	BF16; TF32 enabled	BF16; TF32 enabled	BF16; TF32 enabled
Gradient checkpointing	enabled	enabled	enabled
No. of seeds	5	5	5

Table 11: Training hyperparameters for the Instella-3B experiments with mid-training followed by post-training.

API description and evaluates API calling; Level 2 exposes only the ToolSearcher interface and additionally requires API retrieval; and Level 3 evaluates planning over multiple API calls. We use the released execution-based evaluator. The model is instructed to emit an API request in the form `[ApiName(key='value', ...)]`. The parser first searches the response for a bracketed function call, extracts the API name, and converts quoted scalars, list literals, and unquoted word-valued arguments into a parameter dictionary. It then invokes the predicted API through the official ToolManager. Each API’s task-specific `check_api_call_correctness` method compares the executed result with the reference result, allowing the evaluator to apply API-specific equivalence rather than string equality. A missing call, a parsing failure, an invalid API or parameter, an execution exception, or a result mismatch causes the response to be scored as incorrect. We compute API-call accuracy separately for the three levels and report

$$S_{\text{API}} = \frac{1}{3} \sum_{\ell=1}^3 \text{Acc}_{\ell}. \quad (2)$$

The official response-after-API ROUGE-L diagnostic is not included in this aggregate.

MetaTool. MetaTool (Huang et al. 2024) separates tool-usage awareness from tool selection. We evaluate only the four official tool-selection subtasks: choosing among similar tools, choosing a tool within a specified scenario, rejecting the available tools when the correct tool is absent, and selecting two tools for a multi-tool request. The tool-usage-awareness task and its accuracy, precision, recall, and F1 measures are excluded. Generation follows the released setup with deterministic decoding.

For output matching, the parser normalizes candidate tool names and searches for their literal normalized occurrences in the response, retaining matched tools in response order. If no candidate name is found, it falls back to the first text segment delimited by a newline or punctuation. A single-tool subtask uses the first parsed label; the multi-tool subtask requires the set of the first two parsed labels to equal the reference set. All 4,287 tool-selection outputs per model are parsed and scored automatically, and none are manually adjudicated. For subtask k , Correct Selection Rate (CSR) is the fraction of instances whose selected label or label set equals the reference. The reported MetaTool score is

$$S_{\text{Meta}} = \frac{1}{4} \sum_{k=1}^4 \text{CSR}_k. \quad (3)$$

APT Bench. We follow the official software-engineering (SWE) and deep-research (DR) evaluation protocols of APT-Bench (Qin et al. 2025). The SWE tasks cover environment setup and issue fixing through planning, action, error handling, bug localization, fix-patch selection, and test-patch selection. The DR tasks cover planning and action for closed-ended questions, and planning, report selection, and citation for open-ended questions. All tasks use the official 3-shot prompts, except open-ended report selection, which uses an

official 2-shot prompt. Decoding is greedy. If a prompt exceeds the model’s maximum sequence length, equal-sized portions are retained from its head and tail, following the official truncation rule.

The official parser is applied separately by question type. For a multiple-choice (MC) question, asterisks are removed and the first answer letter in the expected parenthesized or line-terminated form is extracted. For SWE text-completion actions, if a newline is present, the parser retains the first line and truncates it at the first semicolon; otherwise, it keeps the full response. The resulting command is compared with the reference by exact match (EM). For a DR closed-ended answer, the parser retains the text before the closing bracket supplied by the prompt and computes both EM and ROUGE-1 F1. For citation questions, it retains the text before the closing parenthesis, splits comma-separated option labels, and requires exact set equality, so order is ignored but missing or extra citations are incorrect. MC tasks use accuracy, while text-completion tasks use EM; the two closed-ended DR action tasks additionally contribute their ROUGE-1 scores, as in the official results table.

The SWE score is the unweighted mean of its eight reported task metrics. The DR score is the unweighted mean of its eleven reported metrics, including both EM and ROUGE-1 for the English and Chinese closed-ended action tasks. We combine the two domain scores directly:

$$S_{\text{APT}} = \frac{1}{2} (S_{\text{SWE}} + S_{\text{DR}}). \quad (4)$$

ToolEyes. ToolEyes (Ye et al. 2025) evaluates interactive tool use across seven real-world scenarios. We use its official 5-shot Reasoning and Acting (ReAct) prompt, a maximum of nine interaction turns, a temperature of 0.3, and a top- p value of 0.5. Every assistant turn must contain, in order, `Thought:`, `Action:`, and `Action Input:`. The released parser extracts the three fields with multiline regular expressions and requires `Action Input` to be a valid dictionary. A malformed turn receives the official format-correction observation and may be regenerated. A valid action is executed against the scenario tool library, and its observation is appended to the interaction history. The model must terminate with the `finish` tool; exceeding the turn limit forces an unsuccessful termination.

We retain the five capability scores and equations defined in the ToolEyes paper. Let n be the number of assistant turns, n_f the number satisfying the required format, and let all model-judged rubric scores be on a 1–10 scale. Format alignment is $\text{IF} = n_f/n$. Intent comprehension is $\text{IU} = q_{\text{focus}}/10$. Behavior planning is the product of thought validity and logical integrity:

$$\text{BP} = \frac{q_{\text{validity}}}{10} \frac{q_{\text{integrity}}}{10}. \quad (5)$$

For each of the m parseable turns, $r_{\text{tool},j}$ is 1 only when the selected tool exists and all parameters conform to its documentation, and $q_{\text{match},j}$ measures whether that tool agrees with the stated thought. Thus,

$$\text{TS} = \frac{1}{m} \sum_{j=1}^m r_{\text{tool},j} \frac{q_{\text{match},j}}{10}, \quad (6)$$

where malformed turns are omitted and $\text{TS} = 0$ when no turn is parseable. Following the paper rather than the released evaluator’s simplified implementation, we include the completion gate in the answer-organization score:

$$\text{AO} = I_{\text{finish}} \frac{q_{\text{answer}}}{10}, \quad (7)$$

where $I_{\text{finish}} = 1$ only when the model completes the task within the turn limit. The overall ToolEyes score is

$$S_{\text{Eyes}} = \frac{1}{5} (\text{IF} + \text{IU} + \text{BP} + \text{TS} + \text{AO}). \quad (8)$$

We multiply this value by 100 for reporting. We preserve the official evaluation rubrics and replace the original GPT-4 judge with DeepSeek-V4-Flash (deepseek-v4-flash) for intent comprehension, behavior-planning validity and logical integrity, thought-action agreement, and answer quality. The deterministic checks for format, tool existence, and parameter validity remain unchanged. A human audit of 300 judge-scored samples yielded 97.2% agreement between DeepSeek-V4-Flash and the human annotations.

OLMES general benchmarks. We use the OLMES protocol for ARC-Challenge, BoolQ, HellaSwag, PIQA, WinoGrande, and MMLU (Gu et al. 2025). Each task uses its fixed set of five in-context examples. OLMES evaluates both the original MC formulation, in which answer labels are ranked, and a rank-classification or cloze formulation (RC), in which the answer texts are candidate continuations. These are likelihood evaluations rather than free-form generations, so no textual answer parser is used. The MC prediction is the option with the largest summed conditional log-likelihood. For RC, ARC-Challenge uses unconditional normalization,

$$s_i = \log p(a_i | x) - \log p(a_i), \quad (9)$$

BoolQ and WinoGrande use the raw summed log-likelihood, and HellaSwag, PIQA, and MMLU use log-likelihood normalized by the answer’s character length. The RC prediction is $\arg \max_i s_i$. The score for each benchmark is the higher of its MC and RC accuracies, as specified by OLMES. MMLU first macro-averages over its subjects. Finally, the general score is the unweighted mean of the six benchmark scores.

Full Skill Mixture Ratio Results

Tables 12 and 13 give the per-benchmark results for the mixture-ratio sweep in the main paper, where SKILLCORPUS is mixed with Dolmino (OLMo et al. 2024) or SmoLLM (Allal et al. 2025). Aggregate columns are omitted because the main figure already reports the trends in the agentic and general averages. In all result tables below, boldface and underlining mark the best and second-best values within each comparison block, respectively; ties share the same style.

Full Skill-Aware Data Organization Results

The skill-aware data organization ablation compares five serialization strategies. All variants start from the same cleaned skill-package collection and use the same tokenizer, validation-split ratio, end-of-sequence-token insertion between serialized records, and five-seed averaging protocol before being converted into 4,096-token mid-training blocks.

Ratio	API-Bank	MetaTool	APT Bench	ToolEyes
SKILLCORPUS + Dolmino				
0/100	11.34	15.85	13.58	21.47
1/99	15.05	12.46	13.91	29.84
5/95	17.41	12.42	13.81	45.29
10/90	18.34	16.25	24.02	40.84
20/80	31.77	22.50	23.88	41.88
30/70	45.92	28.22	33.39	46.86
50/50	<u>38.74</u>	<u>23.87</u>	<u>28.81</u>	51.57
70/30	32.07	20.86	13.38	36.65
90/10	22.14	15.90	13.04	36.13
100/0	26.47	17.39	17.97	26.39
SKILLCORPUS + SmolLM				
0/100	6.94	2.25	12.91	14.19
1/99	14.60	14.34	15.77	15.03
5/95	15.69	16.86	19.62	24.50
10/90	17.07	18.76	22.57	29.53
20/80	26.94	21.14	26.77	35.29
30/70	41.93	26.87	33.62	47.91
50/50	<u>35.79</u>	<u>21.48</u>	<u>30.54</u>	51.05
70/30	24.83	17.00	23.08	34.29
90/10	19.15	15.75	14.45	23.98
100/0	26.47	17.39	17.97	26.39

Table 12: Agentic benchmark results for different mixture ratios of SKILLCORPUS with Dolmino and SmolLM.

Ratio	ARC	BQ	HS	PIQA	WG	MMLU
SKILLCORPUS + Dolmino						
0/100	44.26	67.90	68.10	75.00	63.19	37.32
1/99	44.53	69.20	67.20	73.80	64.98	36.90
5/95	43.94	68.70	<u>67.20</u>	73.00	63.85	36.32
10/90	44.20	68.70	67.00	73.30	63.38	36.24
20/80	43.94	68.60	66.70	73.10	63.85	36.42
30/70	43.34	68.10	66.70	73.60	63.54	36.53
50/50	43.77	68.30	66.60	73.10	63.85	36.22
70/30	43.60	68.50	66.60	72.90	<u>64.01</u>	36.28
90/10	42.86	69.30	66.00	73.00	63.21	35.96
100/0	43.94	65.30	66.20	<u>73.80</u>	63.69	36.24
SKILLCORPUS + SmolLM						
0/100	44.71	69.80	67.10	73.40	64.09	36.48
1/99	44.45	69.50	<u>67.00</u>	72.80	<u>64.01</u>	36.46
5/95	44.37	69.20	<u>67.00</u>	73.20	63.54	36.44
10/90	44.54	70.20	66.70	73.70	<u>64.01</u>	36.37
20/80	44.37	69.60	66.90	73.50	63.69	36.52
30/70	44.11	68.90	66.80	73.20	63.46	<u>36.49</u>
50/50	43.43	<u>69.90</u>	66.60	73.20	63.46	36.32
70/30	43.34	<u>68.50</u>	66.60	73.50	<u>64.01</u>	36.39
90/10	43.46	69.30	66.20	73.00	62.66	35.89
100/0	43.94	65.30	66.20	73.80	63.69	36.24

Table 13: Results on general benchmarks for different skill-to-general-data mixture ratios.

DeepSeek-Coder Packing (DeepSeek-Coder) (Guo et al. 2024; Hui et al. 2024; Lozhkov et al. 2024) serializes each cleaned package in its original source order. Each record starts with the package header `name{slug}` and then concatenates retained files as `<file_sep>path` followed by the file content, preserving package boundaries and file paths without reference detection or skill-specific reordering. Random File Order (Random File) uses the same cleaned files as Reference Insert but independently shuffles files within each package, then shuffles serialized skills into packs of up to 12k characters or five skills separated by `<skill_pack_sep>`; this preserves package membership but removes local file adjacency. Metadata Packing (Metadata) (Gao et al. 2025) keeps the package file order and adds `<skill_meta>` fields for id, skill name, slug, source, and file count, as well as `<file_meta>` fields for index, path, inferred role, extension, and character count before each file. Skill fill-in-the-middle (Skill-FIM) (Bavarian et al. 2022) first builds the Reference Insert serialization and, with probability 0.5, moves one semantic span of 80–2,400 characters into a middle slot marked by `<fim_prefix>`, `<fim_suffix>`, `<fim_middle>`, and `<fim_end>`; the candidate-span selection procedure prioritizes workflow, protocol, API, resource, reference, script, and template sections before generic paragraphs. Reference Insert is the default strategy: it starts from `SKILL.md` when present, scans it line by line, inserts explicitly referenced support files immediately after the referring line with `<referenced_file_sep>`, appends unreferenced support files with `<unreferenced_file_sep>`, and falls back to README-first package order when no `SKILL.md` exists.

Reference resolution rule. For each cleaned package, Reference Insert first normalizes file paths by lowercasing and replacing backslashes with slashes. Candidate identifiers include the relative path with optional leading `./` or `/`, the basename when it has at least five characters, and the final two path components. For every primary-file line, all matching support files not previously inserted are ordered deterministically by extension and path and inserted after that line. Each support file is inserted at most once, at its first matching line. After the primary-file scan finishes, remaining support files are appended in the package order retained by preprocessing. This rule leaves file contents unchanged while placing referenced resources near their first matching mentions.

Reference Insert resolves and inserts 70,655 referenced files across 17,957 packages. For each resolved reference edge, we measure the absolute MeCo-tokenizer distance from the end of the referring line to the first token of the target file content. Relative to serialization in the original cleaned file order, Reference Insert reduces the mean distance from 14,518.996 to 737.189 tokens, an average reduction of 13,781.807 tokens (94.92%).

Tables 14 and 15 report the full ablation supporting the main-paper results. We retain individual benchmark scores because effects vary across benchmarks and evaluation groups.

Method	API-Bank	MetaTool	APT Bench	ToolEyes
DeepSeek-Coder	<u>24.40</u>	15.22	<u>16.14</u>	25.01
Random File	17.76	10.55	14.72	21.34
Metadata	11.46	15.03	13.64	25.86
Skill-FIM	15.43	<u>17.06</u>	13.37	<u>26.06</u>
Reference Insert	26.47	17.39	17.97	26.39

Table 14: Agentic benchmark results for different serialization strategies.

Method	ARC	BQ	HS	PIQA	WG	MMLU
DeepSeek-Coder	43.34	62.54	67.00	73.90	62.35	34.65
Random File	44.03	61.50	66.20	73.50	63.46	<u>35.36</u>
Metadata	43.00	62.00	<u>66.30</u>	73.50	64.01	<u>35.30</u>
Skill-FIM	43.60	<u>63.40</u>	66.10	73.60	62.98	34.30
Reference Insert	<u>43.94</u>	65.30	66.20	<u>73.80</u>	<u>63.69</u>	36.24

Table 15: General benchmark results for different serialization strategies.

Details of Reinforcement Learning from Verifiable Rewards (RLVR)

The RLVR experiments use the SmolLM2-360M backbone (Allal et al. 2025), Tulu 3 SFT (Lambert et al. 2024), and Group Relative Policy Optimization (GRPO) inspired by DeepSeekMath (Shao et al. 2024), implemented with Transformers Reinforcement Learning (TRL) (von Werra et al. 2020).

Tables 18 and 19 give the full RLVR benchmark scores behind the main-paper summary.

Artifact Availability

We will publicly release the complete corpus-construction, cleaning, decontamination, and Reference Insert code; all training and evaluation configurations; and all mid-training, post-training, and final checkpoints corresponding to the experimental conditions reported in this work.

Parameter	Mid-training	Tulu 3 SFT
GPUs	4 × A100 80GB	4 × A100 80GB
Backbone / initialization	SmolLM2-360M	Mid-training checkpoint; the no-mid-training condition uses the backbone directly
Training objective	Causal language modeling on fixed token blocks	Assistant-only supervised chat loss
Training data	Mid-training corpus (experiment-specific)	Tulu 3
Total budget	1 epoch	3 epochs
Sequence length	4,096	2,048
Per-device batch size	1	1
Gradient accum. steps	8	16
Learning rate	2×10^{-5}	2×10^{-5}
Weight decay	0.1	0.0
Optimizer	Adafactor	Adafactor
Scheduler	cosine	cosine
Precision	BF16; TF32 enabled	BF16; TF32 enabled
Gradient checkpointing	enabled	enabled
No. of seeds	5	5

Table 16: Mid-training and SFT hyperparameters for the SmolLM2-360M RLVR experiments.

Parameter	RLVR (GRPO)
GPUs	4 × A100 80GB
Backbone / initialization	SFT checkpoint (per group)
Training objective	GRPO with verifiable rewards
Training data	RLVR-GSM-MATH-IF-Mixed-Constraints
Total budget	1 epoch
Prompt/completion lengths	1,024 / 256
Per-device batch size	2
Gradient accum. steps	4
Learning rate	1×10^{-6}
Kullback-Leibler weight β	0.04 (KL)
No. of generations	4
Optimizer	Adafactor
Scheduler	cosine, 3% warmup
Precision	BF16
Gradient checkpointing	enabled
No. of seeds	5

Table 17: RLVR (GRPO) hyperparameters for the SmolLM2-360M experiments. All evaluated configurations (No mid-training, Dolmino, SKILLCORPUS) share identical RLVR settings.

Mid-training	API-Bank	MetaTool	APT Bench	ToolEyes
No mid-training	5.44	1.16	4.54	8.64
Dolmino	<u>7.69</u>	<u>4.75</u>	<u>7.66</u>	<u>8.90</u>
SKILLCORPUS	15.93	10.88	9.43	11.52

Table 18: Full agentic benchmark results after RLVR post-training. All models use the SmolLM2-360M backbone.

Mid-training	ARC	BQ	HS	PIQA	WG	MMLU
No mid-training	23.21	62.80	24.10	49.20	49.70	31.57
Dolmino	<u>24.66</u>	<u>63.50</u>	<u>24.60</u>	<u>50.20</u>	<u>50.43</u>	<u>32.36</u>
SKILLCORPUS	24.83	63.80	26.00	51.20	50.67	32.43

Table 19: Full general benchmark results after RLVR post-training.

References

- Allal, L. B.; Lozhkov, A.; Bakouch, E.; Blázquez, G. M.; Penedo, G.; Tunstall, L.; Marafioti, A.; Kydlíček, H.; Lajarín, A. P.; Srivastav, V.; et al. 2025. SmolLM2: When Smol Goes Big—Data-Centric Training of a Small Language Model. arXiv:2502.02737.
- Bavarian, M.; Jun, H.; Tezak, N.; Schulman, J.; McLeavey, C.; Tworek, J.; and Chen, M. 2022. Efficient training of language models to fill in the middle. arXiv:2207.14255.
- Bisk, Y.; Zellers, R.; Gao, J.; Choi, Y.; et al. 2020. Piqa: Reasoning about physical commonsense in natural language. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, 7432–7439.
- Chen, Z.; Liu, K.; Wang, Q.; Zhang, W.; Liu, J.; Lin, D.; Chen, K.; and Zhao, F. 2024. Agent-flan: Designing data and methods of effective agent tuning for large language models. In *Findings of the Association for Computational Linguistics: ACL 2024*, 9354–9366.
- Chu, T.; Zhai, Y.; Yang, J.; Tong, S.; Xie, S.; Schuurmans, D.; Le, Q. V.; Levine, S.; and Ma, Y. 2025. SFT Memorizes, RL Generalizes: A Comparative Study of Foundation Model Post-training. In *International Conference on Machine Learning*, 10818–10838. PMLR.
- Clark, C.; Lee, K.; Chang, M.-W.; Kwiatkowski, T.; Collins, M.; and Toutanova, K. 2019. Boolq: Exploring the surprising difficulty of natural yes/no questions. In *Proceedings of the 2019 conference of the north American chapter of the association for computational linguistics: Human language technologies, volume 1 (long and short papers)*, 2924–2936.
- Clark, P.; Cowhey, I.; Etzioni, O.; Khot, T.; Sabharwal, A.; Schoenick, C.; and Tafjord, O. 2018. Think you have solved question answering? try arc, the ai2 reasoning challenge. arXiv:1803.05457.
- Dong, G.; Mao, H.; Ma, K.; Bao, L.; Chen, Y.; Wang, Z.; Chen, Z.; Du, J.; Wang, H.; Zhang, F.; et al. 2025. Agentic reinforced policy optimization. arXiv:2507.19849.
- Fang, R.; Cai, S.; Li, B.; Wu, J.; Li, G.; Yin, W.; Wang, X.; Wang, X.; Su, L.; Zhang, Z.; et al. 2025. Towards general agentic intelligence via environment scaling. arXiv:2509.13311.
- Gao, T.; Wettig, A.; He, L.; Dong, Y.; Malladi, S.; and Chen, D. 2025. Metadata Conditioning Accelerates Language Model Pre-training. In *International Conference on Machine Learning*, 18612–18629. PMLR.
- Gu, W.; Li, C.; Yu, Z.; Sun, M.; Yang, Z.; Wang, W.; Jia, H.; Zhang, S.; and Ye, W. 2026. What Do Agents Learn from Trajectory-SFT: Semantics or Interfaces? arXiv:2602.01611.
- Gu, Y.; Tafjord, O.; Kuehl, B.; Haddad, D.; Dodge, J.; and Hajishirzi, H. 2025. Olmes: A standard for language model evaluations. In *Findings of the Association for Computational Linguistics: NAACL 2025*, 5005–5033.
- Guo, D.; Zhu, Q.; Yang, D.; Xie, Z.; Dong, K.; Zhang, W.; Chen, G.; Bi, X.; Wu, Y.; Li, Y.; et al. 2024. DeepSeek-Coder: when the large language model meets programming—the rise of code intelligence. arXiv:2401.14196.

- Hendrycks, D.; Burns, C.; Basart, S.; Zou, A.; Mazeika, M.; Song, D.; and Steinhardt, J. 2020. Measuring massive multitask language understanding. *arXiv:2009.03300*.
- Hoffmann, J.; Borgeaud, S.; Mensch, A.; Buchatskaya, E.; Cai, T.; Rutherford, E.; Casas, D.; Hendricks, L. A.; Welbl, J.; Clark, A.; et al. 2022. Training compute-optimal large language models. *arXiv:2203.15556*.
- Hu, J.; Zhong, M.; Chen, K.; Bai, X.; and Zhang, M. 2026. Agentic Tool Use in Large Language Models. *arXiv:2604.00835*.
- Huang, Y.; Shi, J.; Li, Y.; Fan, C.; Wu, S.; Zhang, Q.; Liu, Y.; Zhou, P.; Wan, Y.; Gong, N.; et al. 2024. Metatool benchmark for large language models: Deciding whether to use tools and which to use. In *International Conference on Learning Representations*, volume 2024, 42978–43007.
- Hui, B.; Yang, J.; Cui, Z.; Yang, J.; Liu, D.; Zhang, L.; Liu, T.; Zhang, J.; Yu, B.; Lu, K.; et al. 2024. Qwen2. 5-coder technical report. *arXiv:2409.12186*.
- Jia, H.; Liao, J.; Zhang, X.; Xu, H.; Xie, T.; Jiang, C.; Yan, M.; Liu, S.; Ye, W.; and Huang, F. 2025. Osvorld-mcp: Benchmarking mcp tool invocation in computer-use agents. *arXiv:2510.24563*.
- Kaplan, J.; McCandlish, S.; Henighan, T.; Brown, T. B.; Chess, B.; Child, R.; Gray, S.; Radford, A.; Wu, J.; and Amodei, D. 2020. Scaling laws for neural language models. *arXiv:2001.08361*.
- Lambert, N.; Morrison, J.; Pyatkin, V.; Huang, S.; Ivison, H.; Brahman, F.; Miranda, L. J. V.; Liu, A.; Dziri, N.; Lyu, S.; et al. 2024. Tulu 3: Pushing frontiers in open language model post-training. *arXiv:2411.15124*.
- Li, J.; Fang, A.; Smyrnis, G.; Ivgi, M.; Jordan, M.; Gadre, S.; Bansal, H.; Guha, E.; Keh, S.; Arora, K.; et al. 2024. Datacomp-lm: In search of the next generation of training sets for language models. *Advances in Neural Information Processing Systems*, 37: 14200–14282.
- Li, M.; Zhao, Y.; Yu, B.; Song, F.; Li, H.; Yu, H.; Li, Z.; Huang, F.; and Li, Y. 2023. Api-bank: A comprehensive benchmark for tool-augmented llms. In *Proceedings of the 2023 conference on empirical methods in natural language processing*, 3102–3116.
- Liang, Y.; Chen, X.; Ge, Y.; Wu, Z.; Wu, H.; Zeng, C.; Xing, W.; and Shen, X. 2026a. UniToolCall: Unifying Tool-Use Representation, Data, and Evaluation for LLM Agents. *arXiv:2604.11557*.
- Liang, Y.; Zhong, R.; Xu, H.; Jiang, C.; Zhong, Y.; Fang, R.; Gu, J.-C.; Deng, S.; Yao, Y.; Wang, M.; et al. 2026b. Skillnet: Create, evaluate, and connect ai skills. *arXiv:2603.04448*.
- Liu, J.; Wu, J.; Yu, X.; Su, Y.; Mishra, P.; Ramesh, G.; Ranjan, S.; Manem, C.; Sun, X.; Wang, Z.; et al. 2025. Instella: Fully open language models with stellar performance. *arXiv:2511.10628*.
- Liu, Z.; Hoang, T.; Zhang, J.; Zhu, M.; Lan, T.; Kokane, S.; Tan, J.; Yao, W.; Liu, Z.; Feng, Y.; et al. 2024. Apigen: Automated pipeline for generating verifiable and diverse function-calling datasets. *Advances in Neural Information Processing Systems*, 37: 54463–54482.
- Lozhkov, A.; Li, R.; Allal, L. B.; Cassano, F.; Lamy-Poirier, J.; Tazi, N.; Tang, A.; Pykhtar, D.; Liu, J.; Wei, Y.; et al. 2024. Starcoder 2 and the stack v2: The next generation. *arXiv:2402.19173*.
- OLMo, T.; Walsh, P.; Soldaini, L.; Groeneveld, D.; Lo, K.; Arora, S.; Bhagia, A.; Gu, Y.; Huang, S.; Jordan, M.; et al. 2024. 2 OLMo 2 Furious. *arXiv:2501.00656*.
- Ouyang, L.; Wu, J.; Jiang, X.; Almeida, D.; Wainwright, C.; Mishkin, P.; Zhang, C.; Agarwal, S.; Slama, K.; Ray, A.; et al. 2022. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35: 27730–27744.
- Patil, S. G.; Mao, H.; Yan, F.; Ji, C. C.-J.; Suresh, V.; Stoica, I.; and Gonzalez, J. E. 2025. The berkeley function calling leaderboard (bfcl): From tool use to agentic evaluation of large language models. In *Forty-second International Conference on Machine Learning*.
- Patil, S. G.; Zhang, T.; Wang, X.; and Gonzalez, J. E. 2024. Gorilla: Large language model connected with massive apis. *Advances in Neural Information Processing Systems*, 37: 126544–126565.
- Prabhakar, A.; Liu, Z.; Zhu, M.; Zhang, J.; Awalganekar, T. M.; Wang, S.; Liu, Z.; Chen, H.; Hoang, T.; Niebles, J. C.; Heinecke, S.; Yao, W.; Wang, H.; Savarese, S.; and Xiong, C. 2025. APIGen-MT: Agentic Pipeline for Multi-Turn Data Generation via Simulated Agent-Human Interplay. In Belgrave, D.; Zhang, C.; Lin, H.; Pascanu, R.; Koniusz, P.; Ghassemi, M.; and Chen, N., eds., *Advances in Neural Information Processing Systems*, volume 38. Curran Associates, Inc.
- Qian, C.; Acikgoz, E. C.; He, Q.; WANG, H.; Chen, X.; Hakkani-Tur, D.; Tur, G.; and Ji, H. 2025. ToolRL: Reward is All Tool Learning Needs. In Belgrave, D.; Zhang, C.; Lin, H.; Pascanu, R.; Koniusz, P.; Ghassemi, M.; and Chen, N., eds., *Advances in Neural Information Processing Systems*, volume 38, 105523–105553. Curran Associates, Inc.
- Qin, J.; Xi, Y.; Huang, J.; Rui, R.; Yin, D.; Liu, W.; Yu, Y.; Zhang, W.; and Sun, X. 2025. APTBench: Benchmarking Agentic Potential of Base LLMs During Pre-Training. *arXiv:2510.24397*.
- Qin, Y.; Liang, S.; Ye, Y.; Zhu, K.; Yan, L.; Lu, Y.; Lin, Y.; Cong, X.; Tang, X.; Qian, B.; et al. 2024. Toolllm: Facilitating large language models to master 16000+ real-world apis. In *International Conference on Learning Representations*, volume 2024, 9695–9717.
- Rafailov, R.; Sharma, A.; Mitchell, E.; Manning, C. D.; Ermon, S.; and Finn, C. 2023. Direct preference optimization: Your language model is secretly a reward model. *Advances in neural information processing systems*, 36: 53728–53741.
- Sakaguchi, K.; Bras, R. L.; Bhagavatula, C.; and Choi, Y. 2021. Winogrande: An adversarial winograd schema challenge at scale. *Communications of the ACM*, 64(9): 99–106.
- Schick, T.; Dwivedi-Yu, J.; Dessì, R.; Raileanu, R.; Lomeli, M.; Hambro, E.; Zettlemoyer, L.; Cancedda, N.; and Scialom, T. 2023. Toolformer: Language models can teach themselves to use tools. *Advances in neural information processing systems*, 36: 68539–68551.

Sha, T.; Zhao, Y.; Sun, L.; and Dong, Y. 2026. SkillCenter: A Large-Scale Source-Grounded Skill Library for Autonomous AI Agents. arXiv:2607.07676.

Shao, Z.; Wang, P.; Zhu, Q.; Xu, R.; Song, J.; Bi, X.; Zhang, H.; Zhang, M.; Li, Y.; Wu, Y.; et al. 2024. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. arXiv:2402.03300.

Shi, Q.; Zytek, A.; Razavi, P.; Narasimhan, K.; and Barres, V. 2026. τ -Knowledge: Evaluating Conversational Agents over Unstructured Knowledge. arXiv:2603.04370.

Song, Y.; Xiong, W.; Zhao, X.; Zhu, D.; Wu, W.; Wang, K.; Li, C.; Peng, W.; and Li, S. 2024. Agentbank: Towards generalized llm agents via fine-tuning on 50000+ interaction trajectories. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, 2124–2141.

Tang, Q.; Deng, Z.; Lin, H.; Han, X.; Liang, Q.; Cao, B.; and Sun, L. 2023. Toolalpaca: Generalized tool learning for language models with 3000 simulated cases. arXiv:2306.05301.

Team, O.; Ettinger, A.; Bertsch, A.; Kuehl, B.; Graham, D.; Heineman, D.; Groeneveld, D.; Brahman, F.; Timbers, F.; Ivison, H.; et al. 2025. Olmo 3. arXiv:2512.13961.

von Werra, L.; Belkada, Y.; Tunstall, L.; Beeching, E.; Thrush, T.; Lambert, N.; Huang, S.; Rasul, K.; and Galouédec, Q. 2020. TRL: Transformers Reinforcement Learning. <https://github.com/huggingface/trl>. Software library. Accessed: 2026-06-30.

Wu, W.; Guan, X.; Huang, S.; Jiang, Y.; Xie, P.; Huang, F.; Cao, J.; Zhao, H.; and Zhou, J. 2025. Masksearch: A universal pre-training framework to enhance agentic search capability. arXiv:2505.20285.

Yao, S.; Zhao, J.; Yu, D.; Du, N.; Shafran, I.; Narasimhan, K.; and Cao, Y. 2022. React: Synergizing reasoning and acting in language models. arXiv:2210.03629.

Ye, J.; Li, G.; Gao, S.; Huang, C.; Wu, Y.; Li, S.; Fan, X.; Dou, S.; Ji, T.; Zhang, Q.; et al. 2025. Tooleyes: Fine-grained evaluation for tool learning capabilities of large language models in real-world scenarios. In *Proceedings of the 31st international conference on computational linguistics*, 156–187.

Zellers, R.; Holtzman, A.; Bisk, Y.; Farhadi, A.; and Choi, Y. 2019. Hellaswag: Can a machine really finish your sentence? In *Proceedings of the 57th annual meeting of the association for computational linguistics*, 4791–4800.

Zhang, J.; Lan, T.; Zhu, M.; Liu, Z.; Hoang, T. Q.; Kokane, S.; Yao, W.; Tan, J.; Prabhakar, A.; Chen, H.; et al. 2025. xlam: A family of large action models to empower ai agent systems. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, 11583–11597.

Zhuang, Y.; Yang, J.; Jiang, H.; Liu, X.; Cheng, K.; Lokegaonkar, S.; Gao, Y.; Ping, Q.; Liu, T.; Huang, B.; et al. 2025. Hephaestus: Improving fundamental agent capabilities of large language models through continual pre-training. In *Proceedings of the 2025 Conference of the Nations of the*

Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers), 6041–6068.