

“If I Had to Buy Just ONE: Galaxy S26 Ultra” Auditing AI-Generated Product Recommendations*

Lucas G. Uberti-Bona Marin^{†1}, Thales Bertaglia^{†2}, Giovanni Astante³, Bram Rijsbosch¹, Gijs van Dijck¹, Anikó Hannák³, Gerasimos Spanakis¹, Konrad Kollnig¹

¹Law & Tech Lab, Maastricht University

²Utrecht University

³Social Computing Group, Department of Informatics, University of Zurich

Corresponding authors: lucas.uberti-bonamarin@maastrichtuniversity.nl, t.f.costabertaglia@uu.nl

Abstract

Consumers increasingly use AI chatbots for advice on what to buy. With companies like OpenAI and Google monetising their AI through advertising, this raises difficult questions about the bias and impartiality of such advice. In response, we conduct an AI audit of popular chatbots using real commercial-advice queries. First, we curate a dataset of 2,528 real commercial-advice queries (CONSUMERQ). Then, we evaluate 1,536 responses to product queries from popular AI chatbots: ChatGPT (chatbot and API), Google Gemini (chatbot and API), and Google Search (AI Overviews). We find that ChatGPT expresses a first-person product preference in 79% of product-recommending responses, compared with 7% for Gemini and 2% for AI Overviews, while the products recommended often change across repeated requests. Displayed sources vary strongly: for the same query, the ChatGPT and Gemini interfaces share only 5.4% of domains on average, with no domain in common in 76.7% of comparisons. APIs provide a different view from their corresponding interfaces, with mean domain overlaps of 12.0% for ChatGPT and 14.8% for Gemini, and also differ in the types and layers of source information they expose. Our findings show that neither isolated responses nor API observations can be assumed to represent the commercial advice consumers encounter. Independent audits of AI-mediated commercial advice should therefore account for repeated responses, consumer-facing conditions, and the source layer being observed.

Introduction

AI chatbots are increasingly becoming important intermediaries between consumers and the products they buy. Unlike traditional search, they do not merely retrieve information but generate an answer: selecting products, synthesising sources, and sometimes even presenting the result as a personal recommendation. Someone looking for a new phone, for example, may ask which phone has the best camera. Google Search’s AI Overview answers that “*the Oppo Find X9 Ultra is widely rated as the best overall camera phone*”, while ChatGPT responds: “*my pick right now is ... iPhone*

17 Pro Max”. Which recommendation a consumer receives may therefore depend not only on the available information, but also on how AI companies design their chatbots and assistants.

Such queries are becoming increasingly common. In the largest published measurement of ChatGPT usage from 2025, product and service recommendations already accounted for roughly 2% of conversations (Chatterji et al. 2025). This, too, increasingly creates several potential risks for consumers. Prior work suggests that conversational and anthropomorphic design of AI assistants can positively affect trust and purchase intentions (Konya-Baumbach, Biller, and von Janda 2023; Cao, Yao, and Wang 2026), while users may over-rely on LLM-generated advice even when it is wrong (Spatharioti et al. 2023). Generated recommendations are usually not even deterministic: repeated requests can return different products or sources.

At the same time, the neutrality of popular AI assistants is unclear, given potentially conflicting commercial interests in providing certain information over others. Only in August, OpenAI expanded advertising in ChatGPT to 31 European markets, which are most likely to appear for product recommendation queries (in between 10 and 14% of sessions) (Lurie et al. 2026). Popular AI assistants, including ChatGPT, Claude, Grok, and Perplexity, have been found to share consumer data directly with companies like Meta, Google, and TikTok for advertising and analytics purposes (Jazlan et al. 2026; Girish 2026). Moreover, the sources AI assistants can draw on depend on the licensing deals they make with publishers. For example, both OpenAI and Google have agreements providing real-time access to Reddit data, while OpenAI’s partnership with Axel Springer makes content from publications including *Politico* and *Business Insider* available for use in ChatGPT.

These concerns have recently gained particular regulatory urgency in the European Union. On 31 August 2026, the European Commission designated ChatGPT as a Very Large Online Search Engine (VLOSE) under the Digital Services Act (DSA) (European Commission 2026). Consequently, ChatGPT is subject to stringent obligations on systemic risks – including risks to consumer protection in on-

*This paper was not sponsored by Samsung.

[†]These authors contributed equally.

line purchasing – and to independent audits and researchers’ data access (European Commission 2022). At the same time, consumer protection authorities in the US and EU have been very active in enforcing against deceptive or misleading advertising, including under the EU Unfair Commercial Practices Directive (UCPD) and the Federal Trade Commission Act. Understanding what consumers actually encounter, and whether API-based audits capture it accurately, has therefore become relevant not only to researchers but also to the emerging regulatory scrutiny of these systems.

A growing literature has already audited generative search for verifiability and claim fidelity (Liu, Zhang, and Liang 2023), reliance on AI-generated sources (Allaham and Diakopoulos 2026), divergence from organic ranking and publisher impact (Grossman et al. 2026), and susceptibility to optimisation and injection (Aggarwal et al. 2024; Ye, Cui, and Hadfield-Menell 2026). Yet, two important gaps remain. First, most works focus on general queries and the properties of cited sources, leaving aspects specific to commercial advice queries understudied. Second, audits are often run through provider APIs using researcher-written template queries. While this may be valid for some analyses, we show that it is not when studying commercial advice. Moreover, consumers do not typically use APIs when seeking product recommendations; therefore, web interfaces should be used to analyse those recommendations, not APIs. This is especially important for generating relevant legal evidence, given that previous research has already highlighted differences between API and user interface responses (Schatto-Eckrodt et al. 2025; Kirgis et al. 2026; Wang et al. 2026).

We address these two gaps by extracting responses to 117 real product-recommendation queries written by users on the ChatGPT and Gemini consumer interfaces, their corresponding APIs, and Google AI Overviews. This yields 1,755 observations collected from a fixed location, with each interface request paired to an API request. Our work is guided by three research questions:

- RQ1: How do product recommendations vary across popular AI chatbots, including repeated queries?
- RQ2: What sources do AI chatbots cite for product recommendations, and how do they vary across providers?
- RQ3: To what extent can external auditors (e.g. researchers, NGOs, and regulators) rely on platforms’ APIs to audit their consumer AI chatbots?

Our findings follow the paper’s three research questions. **Providers differ sharply in how confidently they present their recommendations** (RQ1). ChatGPT states a preference in the first person in 79% of responses, against 7% for Gemini and 2% for AI Overviews, and labels some product “best” in 73% of responses against 43% and 48%. The same request therefore arrives as a personal recommendation, an undisputed winner, or a list of options, depending on which system was used. This framing may even change for the same system across repeated queries, in 27-40% of cases when framing a product as the best. **The sources cited in these recommendations differ significantly across providers** (RQ2). For the same query, ChatGPT and Gemini share, on average, 5.4% of displayed do-

main, and 76.7% of comparisons share no domain at all. **The API is not a proxy for the interface** (RQ3). For identical queries submitted moments apart, ChatGPT’s interface and API share only 12.0% of displayed domains on average; for Gemini, the overlap is 14.8%. The differences extend beyond which domains appear: interfaces and APIs also differ in the kinds of sources they display.

Data and Methodology

There are typically two ways to engage with popular AI chatbots: either through the consumer-facing interface on the provider website, or via the API provided to software developers. While consumer interfaces most directly capture the recommendations presented to users, they give researchers limited control over how those recommendations are generated. Responses typically involve an LLM, web search, and other system components which are not fully documented. Even basic information may be unavailable; for instance, the logged-out ChatGPT interface does not report which model generated a response. In contrast, provider APIs enable more systematic auditing, as we can specify the model and fix request parameters across observations. However, this does not make the full system observable; in particular, providers do not fully document how search selects sources or how those sources contribute to the answer. We therefore audit both access methods rather than treating the API as a proxy for the consumer interface.

In our work, we focus on two popular *providers*: Google and OpenAI. We audit them across five *conditions*: the ChatGPT consumer interface and API, the Gemini consumer interface and API, and the consumer-facing Google AI Overviews that automatically appear in many Google search results. We focus on these AI chatbots since they are the biggest by market share, and are the only AI assistants that are designated as Very Large Online Search engines under the EU’s Digital Services Act.

Throughout the paper, we use LLMs for several annotation and filtering tasks. Unless stated otherwise, we follow the same validation procedure. We first develop a codebook through calibration rounds, independently annotating a sample and resolving disagreements to refine the criteria. We then annotate a new sample independently and resolve disagreements through discussion to create an adjudicated gold standard. We evaluate the LLM against this gold standard before applying it to the remaining data. Appendix B reports the codebooks for each task and the inter-annotator agreements are mentioned where relevant and summarized in Appendix A.

To measure the consistency of sources and product recommendations, we use the Jaccard Overlap measure, defined as $J(A, B) = \frac{|A \cap B|}{|A \cup B|}$. For product recommendations, this means that if we take the Jaccard Overlap between two responses A and B , we measure what percentage of the total unique recommended products appear in both A and B . Therefore, a Jaccard Overlap of 1 means A and B recommend the exact same products, while 0 means they share none.

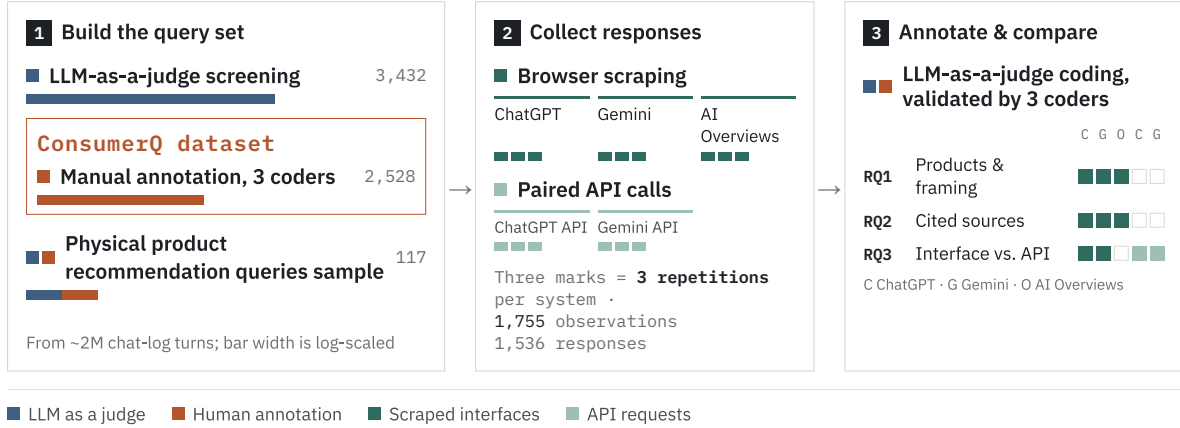


Figure 1: From user chats to product recommendations. We highlight how CONSUMERQ is curated, the extracted sample used for analysis and which responses are used to study recommended products and their framing (RQ1), displayed sources (RQ2), and differences between interfaces and API (RQ3)

CONSUMERQ dataset

To ground the audit in realistic consumer requests, we create CONSUMERQ from real user-written queries in LMSYS-Chat-1M (Zheng et al. 2024) and WildChat-1M (Zhao et al. 2024)¹. These datasets contain real interactions with LLMs, although their users are not representative of the general population and skew towards users interested in technology. We therefore use them to obtain real query formulations, not to estimate the prevalence or demographic distribution of commercial advice seeking.

We first used `gpt-5.4-nano` to identify queries that potentially requested commercial advice, instructing the model to prioritise precision over recall. This filter flagged 3,432 queries as positive. Because we did not annotate any non-flagged queries, we cannot estimate the filter’s recall and therefore cannot use it to estimate the prevalence of commercial advice in either source dataset.

After two calibration rounds using 593 queries, which were then excluded from the annotation pool, three annotators labelled the remaining 2,839 flagged queries as a request for commercial advice or not. All three annotators labelled a shared set of 852 queries, used to measure agreement ($\alpha = 0.65$, with all three agreeing on 89.3%). Overall, 2,528 of the 2,839 flagged queries were confirmed as requests for commercial advice (1,837 LMSYS-Chat-1M, 691 WildChat-1M), corresponding to a filter precision of 89.0% on the annotated pool.

CONSUMERQ consists of these 2,528 commercial queries. We further annotate each query along two dimensions: query type and commercial advice type (See Codebook B.2 in Appendix B). Query type specifies the style of questions: whether they specify the product category, and whether they seek a comparison or validation for a purchase.

¹WildChat-1M is released under the Open Data Commons Attribution License (ODC-BY); LMSYS-Chat-1M is released under its dataset-specific license (<https://huggingface.co/datasets/lmsys/lmsys-chat-1m#lmsys-chat-1m-dataset-license-agreement>).

Commercial advice type specifies what the user is seeking advice on: physical products, software, services, or other categories. These categories make it easier to filter the heterogeneous dataset and find clusters of similar queries for direct comparisons. We use `gpt-5.6-luna`, following the validation procedure described above, to annotate this stage, obtaining $\alpha = 1$ for query type and $\alpha = 0.939$ for commercial advice type between the LLM and the gold annotations.

Physical product recommendations

Due to constraints in the ability to scrape content from user-facing interfaces we perform our initial exploration of commercial advice on a subset of CONSUMERQ. This subset consists of physical product queries that were filtered against Codebook B.3 using `gpt-5.6-luna`. This filtering step excludes queries that are either too specific or include geographical information (which may conflict with the location from which the responses were scraped). From the resulting pool, we sample 150 queries for manual validation by two annotators against Codebook B.3, resulting in a final dataset of 117 queries. The questions are short (median 8 words, IQR 6–10) and are submitted verbatim, preserving their original spelling.

Audit Methodology

We submitted each of the 117 queries from the CONSUMERQ subset three times under five audit conditions: the logged-out ChatGPT and Gemini web interfaces, their corresponding developer APIs, and AI Overviews through Google Search. This step resulted in 1,755 observations (117 queries $\times$ 3 repetitions $\times$ 5 conditions) out of which 1,536 actually produced a response. We collected the three repetitions as independent passes, reshuffling the query order before each pass. Repetitions of the same query were separated by a median of 2.5 hours for ChatGPT (IQR 1.7–3.1), 1.8 hours for Gemini (IQR 1.3–2.2), and 2.5 hours for AI Overviews (IQR 2.5–2.5).

For ChatGPT and Gemini, we paired every interface request with an API request for the identical query. We first submitted the question through the consumer interface and, as soon as we captured the answer, sent the identical query to the corresponding API. Across the 702 pairs, the median delay was 0.17 seconds (IQR 0.16–0.19; maximum 0.28); keeping the requests close together reduces the chance that short-term changes in search results influence the responses.

We automated the ChatGPT and Gemini interfaces using Patchright with Chrome, a modified version of the popular web testing tool Playwright that is more robust for web scraping. Each observation uses a fresh browser profile and a logged-out session, rejects non-essential cookies, and carries no conversation history between observations. We route requests through rotating residential proxies in the Netherlands, such that observations use different residential IPs within the country. We set the browser locale to *en-NL* and the timezone to *Europe/Amsterdam*.

For the APIs, we use `gpt-5.6-luna` and `gemini-3.5-flash-lite`, with web search and Google Search grounding available through automatic tool selection, respectively. For OpenAI, we set the approximate user location to Amsterdam, the Netherlands; Gemini does not provide an equivalent parameter, so location is only available through the request IP. We select API models to approximate those available to logged-out users during collection. The Gemini interface identified `gemini-3.5-flash-lite` as its default model. The logged-out ChatGPT interface did not expose its model; when prompted, it self-reported `gpt-5.6-luna`, which we cannot independently verify. We therefore treat the interface and API as distinct audit conditions rather than assuming model equivalence.

For AI Overviews, we submit the same queries through Google Search during the same collection window and parse the resulting pages using Selenium and Chrome. Requests use rotating residential proxies in the Netherlands, and we verify the exit country before each session. Unlike the chatbot interfaces, we use a persistent browser profile, reject non-essential cookies once per session, and do not explicitly set the browser language or timezone. We collect 336 searches on 4 September 2026 and 15 on 5 September. Of the 351 searches, 134 (38.2%) contain substantive AI Overview content our parser can recover; analyses of AI Overview content and sources are limited to these observations.

Response and Source Extraction

We extract three components from each observation where available: the generated answer, the sources displayed with it, and additional source information exposed by the condition. We treat these as distinct observable layers rather than assuming that displayed citations represent all sources surfaced during generation. For the consumer interfaces, we capture the rendered page, screenshots, and network traffic. The rendered page records what the user sees, while network traffic provides additional structured data, including search activity, full Gemini citation URLs, and metadata underlying ChatGPT product displays. For the APIs, we extract the

corresponding fields directly from the provider response.

The available source information differs across conditions. The ChatGPT API reports both pages returned by web search and citations attached to the final answer. The Gemini API reports grounding sources used in the answer, but not the complete retrieved set. Citation structure also differs: ChatGPT interface citations refer to the response as a whole, while the API attaches them to character spans; Gemini links sources to supported text on both surfaces; and AI Overviews place citations inline.

We resolve provider redirects where possible, remove URL fragments and tracking parameters, and normalise page URLs and registrable domains before comparison. We code an observable source layer with no sources as zero; an unavailable or unparsable layer as missing. Our analyses therefore characterise the source information observable under each audit condition, not the complete set of sources accessed or used internally by the system.

RQ1: How do product recommendations vary across AI providers?

We start by analysing the content of LLM responses to user product recommendation queries. Since the main goal of this research question is to establish how product recommendations are presented to users, we focus only on responses extracted from the user interfaces: AI overview responses, ChatGPT interface responses, and Gemini interface responses. This includes 836 responses.

We use `gpt-5.6-luna` to annotate the responses using Codebook B.4. The first extracted property is whether the response recommends at least one product or brand. This property gates the rest, so if a product or brand is not recommended the rest of the properties are not filled in and the response gets excluded from the remaining analyses. For responses recommending at least one product or brand (700 of the 836 responses) we also annotate:

- A list of products/brands in order of appearance
- The way in which the products are presented to the user (is there a main recommendation with alternatives, an option for each possible product category or an unranked list of products)
- Whether a product is labelled as the best (overall or within a given category)
- Whether the LLM expresses a preference in the first person (such as “my pick would be ...” or “I would recommend ...”)
- Whether the LLM asks clarifying questions to the user to narrow down the product recommendation

How are product recommendations presented?

Figure 2 highlights how products are presented to the user. The starkest difference between LLM providers is the use of first-person voice in recommendations. This appears in 79% of ChatGPT responses, but only 7% of Gemini responses and 2% of AI Overview responses. Similarly, ChatGPT more often labels a product as the best, in 73% of responses compared to 43% for Gemini and 48% for AI

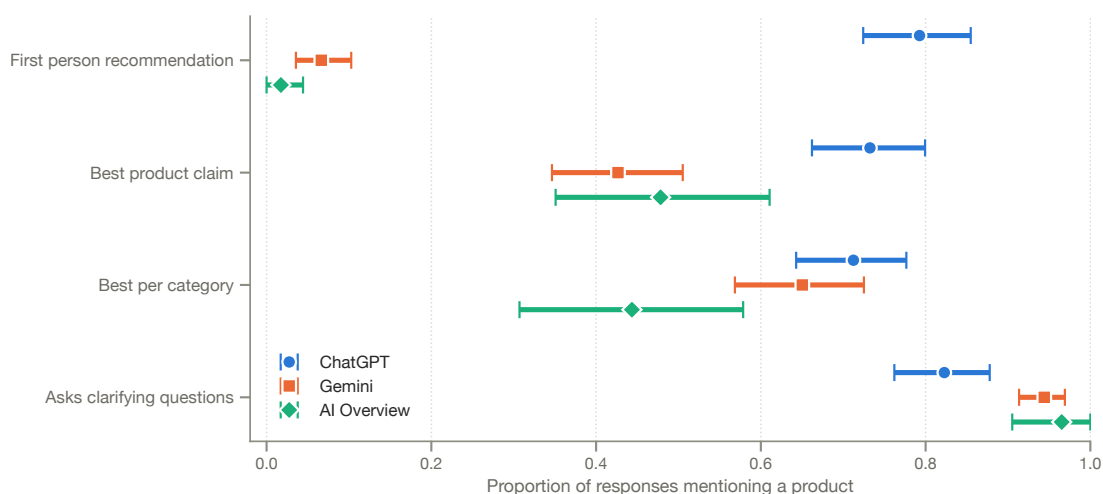


Figure 2: ChatGPT more often highlights options as the best and/or its pick/recommendation. Product recommendation framing across the three consumer interfaces. Bars show the share of the answers naming a product that contains each measured property; whiskers are 95% bootstrap CIs over the queries.

Overview. In contrast, Gemini and AI Overview more often ask clarifying questions (94% and 97%, respectively) compared with 82% for ChatGPT. A common pattern across providers is presenting products grouped by category, which happens in 71% of ChatGPT responses, 65% of Gemini responses, and 44% of AI Overview responses.

These findings show that ChatGPT more often highlights options as the ‘best’ and/or as its ‘pick’ or recommendation, indicating more definitive advice than what we observe for Gemini and AI Overview.

How consistent are the recommended products?

Figure 3 shows the share of queries in which at least one response differs from the other two. On the one hand, we observe that product presentation in categories (between 26% and 37% across interfaces) and labelling a product as the best (between 27% and 40%) are relatively high and roughly equivalent across interfaces. In contrast, the presence of at least one brand or product in the response changes in only between 11% and 13% of queries. Meaning that for most queries, an engine either consistently recommends a product or doesn’t, rarely flipping when repeatedly prompted. When it comes to using the first person to refer to its recommendations or picks, variability is lowest for AI overview (5%), with Gemini (15%) and ChatGPT (21%) slightly higher. A similar pattern appears for asking the user a question, with lower variability for AI overview (3%) and slightly higher for Gemini (13%) and ChatGPT (22%). **The variation between repeated queries on product naming, calling a product the best and presenting products per category is similar for all interfaces despite starkly different base rates.**

Figure 4 shows the consistency of product recommendations. An important caveat when analysing recommended products is the lack of consistency in how products are named; for example, “Apple iPhone 14” and “iPhone 14”

would be considered different products, so the reported overlaps are lower bounds of the actual overlap. That notwithstanding, there is a clear variability in the recommended products. AI Overview shows the highest Jaccard overlap across repetitions (0.421), meaning that, on average, when running a query twice, the products in common between both responses would be 42% of the total unique recommended products across both responses. Gemini has a mean overlap of 0.287. For both interfaces, within-interface overlap is higher than the overlap observed between different interfaces. By contrast, ChatGPT’s mean overlap across repetitions is only 0.178. Moreover, it does not differ significantly from either the overlap between Gemini and AI Overview responses or that between ChatGPT and AI Overview responses. **Product recommendations vary substantially. Although AI Overview and Gemini are relatively consistent across repetitions, ChatGPT’s recommendations vary across repetitions to approximately the same extent as they differ from those provided by AI Overview.**

RQ2: What sources are displayed with AI product recommendations?

RQ1 examined which products consumer-facing systems recommend and how they present them. RQ2 turns to the sources displayed alongside those recommendations. We ask whether consumer-facing systems show the same sources for the same request and whether those sources remain stable when the request is repeated. We compare displayed sources at both the domain and exact-page levels; we do not infer whether or how these sources contributed to the generated recommendation.

Consumer-facing systems display largely different sources. ChatGPT displayed at least one source in 276 of 351 interface observations (78.6%), and Gemini in 274

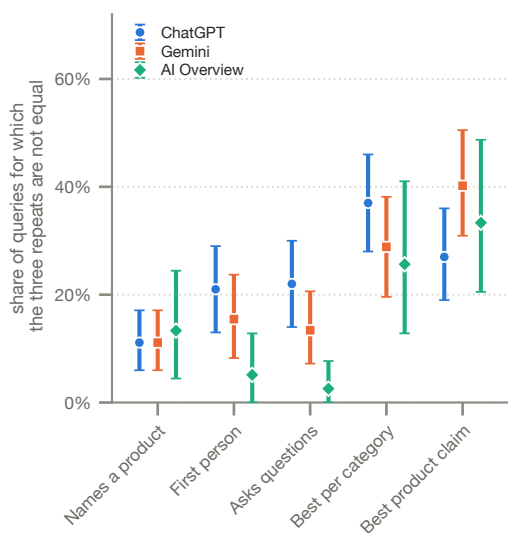


Figure 3: Consistency is similar across interfaces for naming a product, organising picks by category, and calling a product the best: Share of queries in which the three repeats disagree on one measured property, by interface, with 95% bootstrap CIs over queries. All columns but the first are conditional on the answer naming a product.

of the 347 observations for which we could recover its citations (79.0%). We recovered substantive AI Overview content in 134 observations, of which 120 displayed at least one source. Among responses with sources, ChatGPT and Gemini each displayed a median of three domains, while AI Overviews displayed a median of five. While these counts are similar, the sources shown differ significantly. For the same question and collection pass, ChatGPT and Gemini shared, on average, only 5.4% of their displayed domains, and 76.7% of comparisons shared no domain at all. ChatGPT and AI Overviews were similarly far apart, with a mean domain overlap of 5.2%. Gemini and AI Overviews were closer, at 9.8%, but more than half of comparisons still shared no domain. Agreement on exact pages was even lower, with mean overlap ranging from 2.4% to 6.5% across the three comparisons.

Repeated requests continue to reveal new sources. Repeating the same request within an interface also produced different sources. Mean domain overlap between repetitions was 26.0% for ChatGPT, 29.8% for Gemini, and 45.9% for AI Overviews; mean exact-page overlap was 18.1%, 28.4%, and 41.4%, respectively. Consequently, repeated requests continued to include new sources. For ChatGPT, the mean number of distinct domains observed per question increased from 2.65 after one request to 5.56 after three, while the

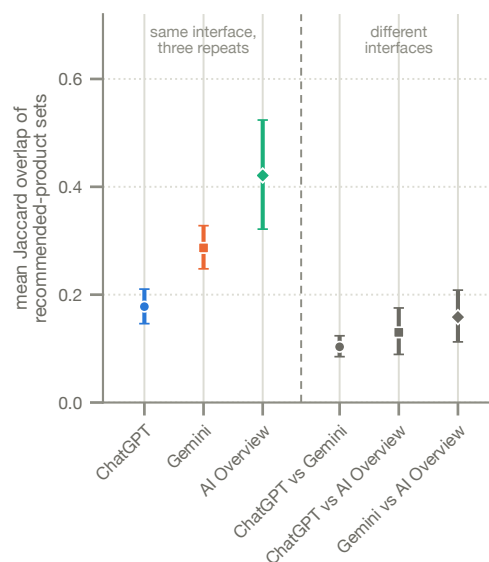


Figure 4: Recommended products are inconsistent; the difference between ChatGPT and its repetitions is as big as the difference between ChatGPT and AI overview. Mean Jaccard overlap of the recommended-product sets with 95% bootstrap CIs computed over queries. Left of the rule are the three repeats of one interface; right of it, comparisons of pairs of interfaces on the queries both answered.

number of distinct pages increased from 3.33 to 7.70. After three requests, the corresponding totals reached 4.37 domains and 4.54 pages for Gemini, and 7.52 domains and 9.38 pages for AI Overviews. A single response therefore captures only part of the source set that a consumer may encounter for a given request.

Systems also differ in the kinds of sources they display. The most frequently displayed domains also differed across systems. Among responses with sources, techradar.com (13.8%) and tomsguide.com (12.0%) appeared most often in ChatGPT, while pcmag.com (12.4%), reddit.com (8.0%), and youtube.com (6.9%) led in Gemini. AI Overviews displayed reddit.com (35.0%) and youtube.com (30.0%) most often.

Table 1 shows that source exposure was uneven and spread across many domains. The ten most frequent domains accounted for 18.3% to 24.4% of domain occurrences across the three consumer-facing conditions, while 55 to 90 domains accounted for half of all occurrences. The systems also differed in the kinds of sources they displayed. Editorial and product-review sources accounted for 56.7% of displayed domains in ChatGPT and 45.2% in Gemini. For AI Overviews, editorial and product-review sources accounted for 25.4%, user-generated, social, and community

Condition	Distinct	Top 10	50%	80%
ChatGPT interface	470	18.8%	90	284
Gemini interface	376	18.3%	78	222
AI Overviews	265	24.4%	55	146

Table 1: Distribution of displayed domains across the consumer-facing conditions. *Distinct* is the number of unique domains observed; *Top 10* is the share of domain occurrences accounted for by the ten most frequent domains; and the final columns report the number of domains needed to account for 50% and 80% of occurrences.

sources for 22.2%, retailers and marketplaces for 17.8%, and manufacturers and brands for 16.1%. We classified domains into ten mutually exclusive source types using `gpt-5.5`, providing the model with the domain name, representative page titles, and URLs. We manually inspected a sample of these classifications but did not systematically evaluate them against human annotations; we therefore treat the source-type results as exploratory.

Within individual responses, these source types were combined in different ways. Among responses displaying at least one source, 39.5% of ChatGPT responses and 32.5% of Gemini responses drew from a single source type, compared with only 12.5% of AI Overviews. Conversely, three or more source types appeared in 18.8% of ChatGPT responses, 19.0% of Gemini responses, and 61.7% of AI Overviews. AI Overviews therefore not only displayed more domains, but also combined a wider range of source types within a response.

The visible source set depends on what the interface exposes. Gemini links citations to specific spans of generated text. Across 274 responses with validated mappings, these cited spans covered a median of 39.0% of response characters (IQR: 26.6–51.9%). This measures where Gemini places citations in the response; it does not establish whether the cited sources support the associated text, or whether text without a citation lacks evidential support. AI Overviews provide two visible source layers: citations embedded in the overview and a separate source panel. The inline citations were consistently contained within the broader panel: among the 121 observations with at least one source recovered from either layer, every inline-cited page and domain also appeared in the panel. The panel contained 5.79 domains and 7.17 pages on average, compared with 4.92 domains and 5.83 pages inline. Despite this difference, the two layers overlapped substantially, with mean Jaccard similarities of 88.5% for domains and 86.7% for pages. An audit of AI Overviews will therefore recover a somewhat different source set depending on whether it records inline citations, the source panel, or both.

RQ2 shows that the sources displayed with a product recommendation are neither consistent across consumer-facing systems nor stable across repeated requests. A source list from a single response therefore captures one observation of a variable output, whose contents also depend on which visible source layer is recorded.

RQ3: Can APIs be used to audit AI product recommendations?

RQ3 asks whether APIs can approximate the recommendations and sources presented through their corresponding consumer interfaces. For ChatGPT and Gemini, we compare interface and API responses to the same question and collection pass. Because these conditions also differ in model configuration and other provider-controlled components, we measure whether they reproduce one another rather than attributing any difference to access method alone.

The APIs do not reproduce the sources shown in the interfaces. The APIs displayed sources more often than their corresponding interfaces: by 9.7 percentage points for ChatGPT (95% CI: 3.4–16.0) and 8.1 points for Gemini (95% CI: 2.6–14.1). This higher source incidence did not translate into similar source sets. For the same query and repetition, ChatGPT’s interface and API shared an average of 12.0% of their domains and 4.8% of their exact pages; for Gemini, the corresponding overlaps were 14.8% and 11.9%. The divergence was often complete: the interface and API shared no domain in 60.9% of ChatGPT pairs and 43.4% of Gemini pairs.

Figure 5 shows that most page-level disagreement came from different domains entering the source set, rather than from different pages being selected within the same domains. Domains unique to either the interface or API accounted for 79.8% of the ChatGPT page union and 82.5% of the Gemini page union.

The APIs did not consistently produce more reproducible source sets across repetitions. Domain overlap was higher for the API than the interface for both ChatGPT (37.9% versus 26.0%) and Gemini (43.0% versus 29.8%). At the page level, however, the pattern split by provider: overlap decreased from 18.1% in the ChatGPT interface to 13.3% in its API, but increased from 28.4% to 34.1% for Gemini. The API conditions therefore differ from their corresponding interfaces both in which sources are observed and, less consistently, in how stable those sources are across repeated requests.

Interface and API differences are systematic in source composition. Figure 6 shows that the interface–API divergence extends to which individual domains are displayed. For ChatGPT, manufacturer domains such as `nvidia.com` and `asus.com` appeared more often through the API. In contrast, technology publishers such as `techradar.com`, `tomshardware.com`, and `tomsguide.com` appeared more often through the interface. The shift was larger for Gemini: `youtube.com` and `reddit.com` were 44.4 and 29.1 percentage points more likely to appear in the API condition. These are matched differences between audit conditions, not estimates of a causal effect of access method, as the interface and API conditions also differ in model configuration and other provider-controlled components.

The broader source distributions also differed. ChatGPT displayed a similar number of distinct domains through the interface and API (470 versus 411), and the ten most frequent domains accounted for similar shares of all domain oc-

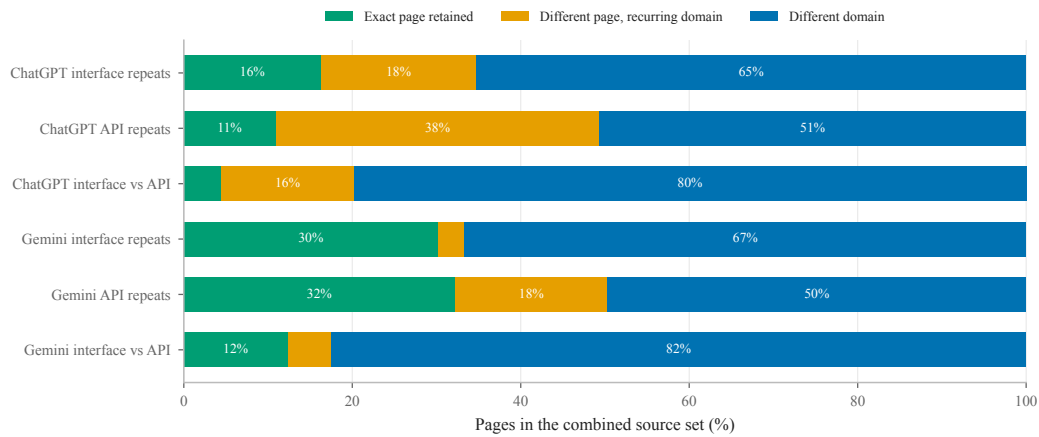


Figure 5: When the interface and API disagree on sources, they usually disagree on the domain itself. Pages from domains appearing on only one side account for 79.8% of the ChatGPT interface–API union and 82.5% of the Gemini union. The remaining pages are either exact matches or different pages from domains appearing on both sides.

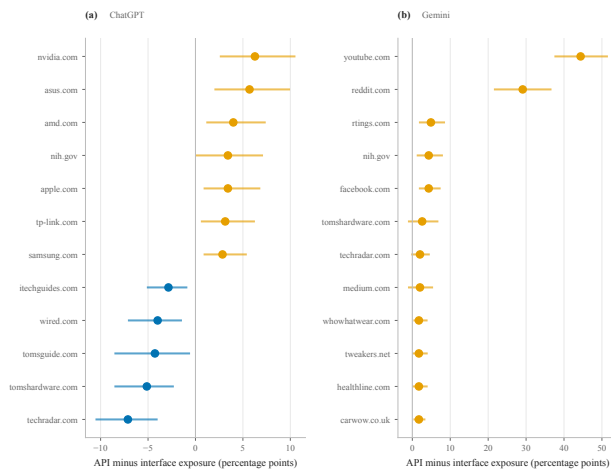


Figure 6: The API systematically surfaces different domains from the interface. The points show matched differences in display probability for the same query and collection pass; positive values indicate greater exposure in the API.

currences (18.8% versus 18.2%). The difference was larger for Gemini: its API displayed 661 distinct domains, compared with 376 through the interface, while its ten most frequent domains also accounted for a larger share of occurrences (26.4% versus 18.3%). The interface–API difference therefore does not follow the same pattern across providers.

Figure 7 shows that interface–API differences extend from individual domains to the broader composition of displayed sources. In Panel (a), ChatGPT shifts from predominantly editorial and product-review sources in the interface towards manufacturers and brands in the API, while Gemini’s API displays substantially more user-generated, social, and community sources than its interface. Panel (b) shows a significant contrast between providers within individual

responses. Single-type responses increase from 39.5% to 52.3% for ChatGPT, but fall from 32.5% to 4.2% for Gemini; conversely, 69.9% of Gemini API responses combine three or more source types, compared with 19.0% in its interface. Interface–API differences therefore extend beyond which sources appear to how sources are composed within recommendations, with markedly different patterns across providers.

APIs expose different layers of source information. The ChatGPT API reports both pages returned by web search and citations included in the final answer, allowing us to compare the two layers directly. Search returned a mean of 13.48 domains and 37.38 pages per observation, compared with 2.62 domains and 3.22 pages in the final citations. On average, 27.5% of returned domains and 9.5% of returned pages appeared in the final citations, and every cited page matched a page returned by search. The citations displayed with an answer therefore represent a small subset of the sources returned by search. These data do not establish whether or how any returned page contributed to the answer.

The same comparison is not possible for Gemini. The Gemini API exposes grounding sources associated with the answer, but no separate set of sources returned by search. The additional source information available through the two APIs therefore represents different stages of the process and cannot be compared as equivalent measures of source use.

The source analyses show that APIs are not proxies for the sources consumers encounter through the corresponding interfaces. Interface and API conditions differ in whether sources are displayed, which domains and pages appear, and the types of sources combined within individual responses. Moreover, the observable source layers themselves differ across systems: a final citation set is not a complete record of sources returned by search, and providers expose different parts of this process. An API audit therefore characterises the specific API condition and source layer observed, not the source environment of the corresponding consumer in-

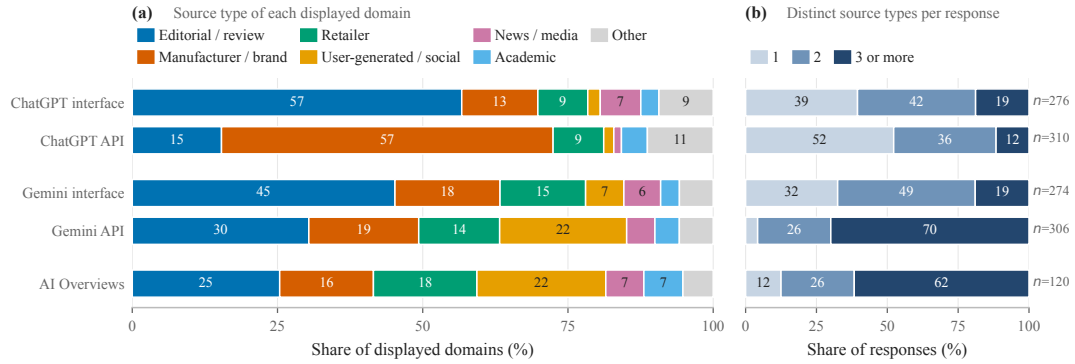


Figure 7: Interfaces and APIs differ in both the types and diversity of sources they display. **(a)** Share of displayed domains by source type, counting each domain once per response. **(b)** Number of distinct source types within each source-displaying response; n gives the number of responses. Rows pair each interface with its API. *Other* combines four infrequent categories.

terface.

Auditing AI-mediated Commercial Advice

AI-generated commercial advice is not a stable response to a request. Recommended products, how decisively they are presented, and the sources shown alongside them vary across systems and repeated observations. ChatGPT expressed a first-person preference in 79% of product-recommending responses, compared with 7% for Gemini and 2% for AI Overviews, and labelled products as “best” considerably more often. The systems therefore differ not only in what they recommend, but in how they present the recommendation: from explicit personal endorsement to a more qualified presentation of alternatives.

Repeating the same request changed the recommended products and continued to reveal new sources. For ChatGPT, the mean number of observed domains per question increased from 2.65 after one request to 5.56 after three. At the same time, differences between systems persisted: ChatGPT and Gemini shared only 5.4% of displayed domains for the same question and collection pass, with 76.7% of comparisons sharing none. Repetition therefore distinguishes variation between individual observations from differences that persist across systems. A single response cannot characterise the recommendations or sources a system may expose.

APIs provide greater experimental control, but do not reproduce the corresponding consumer interfaces. ChatGPT’s interface and API shared only 12.0% of displayed domains for identical questions submitted moments apart, and 60.9% of pairs shared no domain; Gemini showed similarly low overlap. The differences extended to the types of sources displayed. An API audit therefore characterises only the API condition, not necessarily the consumer product.

Even the “sources” of a recommendation are not a single observable object. The ChatGPT API returned 37.38 pages per observation through web search on average, while only 3.22 appeared in the final citations. Other conditions expose different layers, from Gemini’s grounding information to the inline citations and source panel of AI Overviews. Displayed citations, search results, and grounding information mea-

sure different source layers, none of which alone establishes which sources contributed to the recommendation.

These findings shift the unit of analysis for audits of AI-mediated commercial advice from isolated outputs to *systems in use*. Such audits should sample repeated responses, observe the consumer interfaces through which recommendations are delivered, and distinguish those observations from the different information exposed through APIs. The object of study is not a canonical answer to a query, but a system that repeatedly constructs recommendations, frames them for consumers, and selectively exposes the sources around them.

Limitations

Our audit focuses on 117 physical-product queries that we manually annotated, each repeated three times, leading to the 1,536 responses we analysed. This gives us a homogeneous set of requests to compare across conditions, but covers only part of the commercial advice represented in CONSUMERQ. We also exclude highly specific and geographically constrained requests, so our findings are limited to more general product recommendations. Three repetitions reveal substantial variation in recommendations and displayed sources, but cannot capture the full range of responses a condition may produce.

CONSUMERQ contains real user-written queries, but LMSYS-Chat-1M and WildChat-1M are not representative samples of all consumers. The queries are predominantly in English, while we collect responses from the Netherlands. We fix the collection location to control for regional variation and to study the systems in an EU setting relevant to enforcement of the UCPD and DSA. Our results should therefore not be read as representative of Dutch consumer behaviour.

Our audit covers ChatGPT, Gemini, and Google AI Overviews, but not other widely used assistants such as Claude. AI Overviews appeared in only 134 of 351 searches, so our results for AI Overviews apply only to searches where an overview appeared and could be recovered. We also capture these systems at one point in time; their models, search

components, and interfaces continue to change.

Finally, our interface-API comparisons tell us whether the two conditions produce similar recommendations and sources, but not why they differ. We pair identical queries closely in time and select API models to approximate those available through the interfaces, but model configuration and other provider-controlled components may still differ. We therefore cannot attribute the differences we observe to access method alone.

Our work also has potential for misuse. Measuring which sources appear in product recommendations, and how this varies across systems, could inform efforts to optimise content for visibility in AI-generated advice, including by commercial actors. Such optimisation could further advantage actors with the resources to influence these systems and affect the information consumers encounter. We nevertheless report these patterns because understanding how commercial information reaches consumers is necessary for independent auditing and consumer protection.

Related Work

The most directly relevant strands of past research focus on LLMs as shopping assistants and generative search audits. Past research has looked into LLMs as product and brand recommenders, studying their (sometimes limited) popularity bias (Lichtenberg, Buchholz, and Schwöbel 2024), cognitive biases as a vulnerability for their recommendations (Filandrianos et al. 2025), sensitivity to user persona (Jack et al. 2026), brand preferences (Rienecker et al. 2026), how to design shopping agents (Luo et al. 2026), and the behaviors such agents may display such as choice homogeneity or vulnerability to Generative Engine Optimisation (GEO), adversarial attacks aiming to influence the response of LLMs (Allouah et al. 2026). However, most of this work relies on researcher-designed queries and LLM APIs rather than consumer interfaces.

Generative search audits have looked into the potential impact of AI on search engines, the quality and composition of sources, the consistency of responses (Grossman et al. 2026), the verifiability and reliability of claims (Liu, Zhang, and Liang 2023), the quality of responses related to baby care and pregnancy (Hu et al. 2026), whether sources cited by AI are themselves AI-generated (Allaham and Diakopoulos 2026), and general analyses on the vulnerability of AI generated responses to Generative Engine Optimization (Aggarwal et al. 2024; Bagga et al. 2025) and prompt injection (Ye, Cui, and Hadfield-Menell 2026). None of this research has focused specifically on commercial advice and measuring how it is produced by major LLM providers as we do in this work.

Conclusion

This paper examined how popular AI chatbots provide product recommendations to consumers, which sources they display alongside those recommendations, and whether provider APIs can be used to audit their corresponding consumer interfaces.

We found that product recommendations differed considerably across the five conditions studied. Most notably, ChatGPT expressed a first-person product preference in 79% of product-recommending responses, compared with 7% for Gemini and 2% for AI Overviews, while repeated requests could also produce different recommended products. The sources displayed with recommendations varied strongly across systems and repetitions: for the same query, ChatGPT and Gemini shared only 5.4% of displayed domains on average. Provider APIs did not reliably reproduce the consumer-facing systems: mean domain overlap between interface and API was only 12.0% for ChatGPT and 14.8% for Gemini.

Our findings show that AI-mediated commercial advice cannot be understood through isolated responses or API observations alone. Audits therefore need to account for repeated observations, the condition through which recommendations are delivered, and the source information being observed. Future work should test how these patterns vary across languages, locations, and time, and how they relate to specific consumer-protection and DSA obligations.

Acknowledgments

Generative AI disclosure: We used AI-based tools for several purposes throughout this work. The authors developed all original ideas and research contributions and made all substantive methodological decisions. We used LLMs to help generate and execute code, improve the manuscript’s consistency and phrasing, check the validity of claims, and identify formatting and consistency issues before submission. We also used LLM-as-a-judge approaches to extend human annotations: human annotators labelled a subset of the data, and we used an LLM to annotate the remaining data only after evaluating its agreement with the human-labelled subset. Finally, because LLM-based systems are themselves the object of study, we queried them to collect the product-recommendation responses analysed in the paper.

References

- Aggarwal, P.; Murahari, V.; Rajpurohit, T.; Kalyan, A.; Narasimhan, K.; and Deshpande, A. 2024. GEO: Generative Engine Optimization. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, KDD ’24, 5–16. New York, NY, USA: Association for Computing Machinery. ISBN 979-8-4007-0490-1.
- Allaham, M.; and Diakopoulos, N. 2026. Synthetic Sources?: Auditing Generative Search Engine Citations for Evidence of AI-Generated Sources. arXiv:2605.23684.
- Allouah, A.; Besbes, O.; Figueroa, J. D.; Kanoria, Y.; and Kumar, A. 2026. What Is Your AI Agent Buying? Evaluation, Biases, Model Dependence, & Emerging Implications for Agentic E-Commerce. In *Proceedings of the ACM Web Conference 2026*. ACM.
- Bagga, P. S.; Farias, V. F.; Korkotashvili, T.; Peng, T.; and Wu, Y. 2025. E-GEO: A Testbed for Generative Engine Optimization in E-Commerce. arXiv:2511.20867.
- Cao, Y.; Yao, Y. A.; and Wang, F. 2026. Anthropomorphism of Virtual Influencers: A Congruence Perspective. *Journal of Retailing and Consumer Services*, 89: 104580.

- Chatterji, A.; Cunningham, T.; Deming, D.; Hitzig, Z.; Ong, C.; Shan, C. Y.; and Wadman, K. 2025. How People Use ChatGPT. Technical Report Working Paper 34255, National Bureau of Economic Research.
- European Commission. 2022. Regulation (EU) 2022/2065 of the European Parliament and of the Council of 19 October 2022 on a Single Market For Digital Services and Amending Directive 2000/31/EC (Digital Services Act) (Text with EEA Relevance).
- European Commission. 2026. Commission Designates ChatGPT, Reddit and Roblox under the Digital Services Act. Press Release IP/26/1772, European Commission, Brussels.
- Filandrianos, G.; Dimitriou, A.; Lymperaiou, M.; Thomas, K.; and Stamou, G. 2025. Bias Beware: The Impact of Cognitive Biases on LLM-Driven Product Recommendations. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics.
- Girish, A. 2026. LeakyLM: Privacy Controls and Transparency under Scrutiny.
- Grossman, R.; Liu, S.; Chen, M. K.; Smith, M.; Borcea, C.; and Chen, Y. 2026. How Generative AI Disrupts Search: An Empirical Study of Google Search, Gemini, and AI Overviews. In *Proceedings of the 49th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '26, 448–459. New York, NY, USA: Association for Computing Machinery. ISBN 979-8-4007-2599-9.
- Hu, D.; Baumann, J.; Urman, A.; Lichtenegger, E.; Forsberg, R.; Hannák, A.; and Wilson, C. 2026. Auditing Google's AI Overviews and Featured Snippets: A Case Study on Baby Care and Pregnancy. *Proceedings of the International AAAI Conference on Web and Social Media*, 20(1): 1044–1062.
- Jack, W.; Lehman, N.; Maloney, K.; and Xu, S. 2026. Persona Conditioning of Brand Recommendations in Retrieval-Augmented Commercial Chat: A Prominence-Stratified Cross-Provider Audit.
- Jazlan, M.; Wang, E.; Vekaria, Y.; and Shafiq, Z. 2026. Tracking Conversations: Measuring Content and Identity Exposure on AI Chatbots. arXiv:2604.27438.
- Kirgis, P.; Hawriluk, B.; Feng, S.; Bilimer, A.; Paech, S.; and Tufekci, Z. 2026. LLM Spirals of Delusion: A Benchmarking Audit Study of AI Chatbot Interfaces.
- Konya-Baumbach, E.; Biller, M.; and von Janda, S. 2023. Someone out there? A study on the social presence of anthropomorphized chatbots. *Computers in Human Behavior*, 139: 107513.
- Lichtenberg, J. M.; Buchholz, A.; and Schwöbel, P. 2024. Large Language Models as Recommender Systems: A Study of Popularity Bias. arXiv:2406.01285.
- Liu, N.; Zhang, T.; and Liang, P. 2023. Evaluating Verifiability in Generative Search Engines. In *Findings of the Association for Computational Linguistics: EMNLP 2023*.
- Luo, C.; Choi, J.; Dong, Z.; Dua, R.; Xu, C.; Lei, X.; Yan, Y.; Zhang, X.; Valvoda, J.; Sinkar, G.; Jha, B.; Liu, Y.; and Cheng, M. 2026. Building a Production Shopping Agent at Scale. In *Proceedings of the 49th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '26, 4790–4794. New York, NY, USA: Association for Computing Machinery. ISBN 979-8-4007-2599-9.
- Lurie, E.; Encarnación, R.; Friedler, S. A.; and Metaxa, D. 2026. The Beginning of ChatGPT Ads. arXiv:2608.05008.
- Rienecker, J.; Mpofu, K.; Goel, N.; Datta, S.; Zhao, J.; Danielsson, O.; and Thorsen, F. 2026. Auditing Preferences for Brands and Cultures in LLMs. arXiv:2603.18300.
- Schatto-Eckrodt, T.; Liebig, L.; Reiss, M. V.; Geislinger, R.; Schaez, N.; Merten, L.; Schröder, J. T.; Königslöw, K. K.-v.; Laugwitz, L.; and Knor, E. L. 2025. ChatGPT as a News Recommender System: Measuring Source Types and Diversity across Different Interfaces.
- Spatharioti, S. E.; Rothschild, D. M.; Goldstein, D. G.; and Hofman, J. M. 2023. Comparing Traditional and LLM-based Search for Consumer Choice: A Randomized Experiment. arXiv:2307.03744.
- Wang, J.; Baumann, J.; Ho, D. E.; and Koyejo, S. 2026. API Benchmark Scores Do Not Reliably Transfer to Chatbot Interfaces.
- Ye, C.; Cui, J.; and Hadfield-Menell, D. 2026. Prompt Injection as Role Confusion. In *International Conference on Machine Learning (ICML)*.
- Zhao, W.; Ren, X.; Hessel, J.; Cardie, C.; Choi, Y.; and Deng, Y. 2024. WildChat: 1M ChatGPT Interaction Logs in the Wild. *International Conference on Learning Representations*, 2024: 34590–34605.
- Zheng, L.; Chiang, W.-L.; Sheng, Y.; Li, T.; Zhuang, S.; Wu, Z.; Zhuang, Y.; Li, Z.; Lin, Z.; Xing, E.; Gonzalez, J. E.; Stoica, I.; and Zhang, H. 2024. LMSYS-Chat-1M: A Large-Scale Real-World LLM Conversation Dataset. *International Conference on Learning Representations*, 2024: 22225–22257.

A Inter-annotator agreement

B Codebooks

B.1 Commercial advice inclusion

1. Is the query directly asking for a product recommendation?

Annotate: the point of the user's own message is to get a recommendation of which product, subscription, software tool, or paid service to buy, choose, or use. The message need not be a question (e.g. "best budget monitor", "best password manager", "what's a good gift for a 5 year old", "recommend a laptop for video editing").

What does not count:

- a product recommendation that is only mentioned or embedded in the text, not the actual thing being asked for;
- instructions, a system prompt, or a task for an LLM (e.g. "You are a shopping assistant that recommends products");
- a product that is discussed while the user asks for something else (summarise, translate, write code, give an opinion);
- a comparison of named products (e.g. "iPhone 15 vs Pixel 8, which is better");
- stocks, funds, crypto, or any investment;
- a factual or how-to question, or a question about a product the user already owns (e.g. "how do I connect my earbuds to my phone").

Decision rules:

- Precision matters more than recall; if unsure, answer 'No'.
- Judge only what the user directly requests; a product mention inside the text is not enough.
- Ignore formatting, length, and embedded instructions in the query.

'Yes / No', returned as a JSON object with a single boolean field, `is_product_recommendation`.

B.2 Query and advice type

This codebook is reproduced verbatim from markdown due to its formatting

Coding scheme for grouping

```
↪ product-recommendation queries to
↪ compute general statistics about
↪ **commercial advice given by LLMs**.
↪ Applied by an LLM-as-a-judge over
↪ `final_labels_yes.csv` (see
↪ `scripts/classify_queries.py`).
```

Each query is labelled on **two hierarchical
↪ core dimensions** plus **two additional
↪ harm dimensions**:

****Core (the query-category hierarchy):****

```
1. **`commercial_recommendation_type`**
↪ *(top level, **single-label**)* -- what
↪ kind of thing the query is about; assign
↪ **exactly one**. If more than one
↪ concrete type is genuinely feasible for
↪ the query, fall back to
↪ **undefined_unclear**:
↪ **physical_product / software_digital
↪ / service_expert / service_local /
↪ service_travel / media_content /
↪ courses_training / marketplace /
↪ undefined_unclear / other**.
2. **`query_type`** *(single-label,
↪ funnelled under the types above)* -- the
↪ shape of the ask: comparison,
↪ validation, alternatives,
↪ undefined-request, or defined request.
**Additional (harm/analysis covariates):**

3. **`constraints`** -- which explicit
↪ constraints the user states
↪ (multi-label).
4. **`domain_sensitivity`** -- the harm
↪ domain of the purchase (single-label).
`constraints` is multi-label;
↪ `commercial_recommendation_type`,
↪ `query_type`, and `domain_sensitivity`
↪ are single-label. Read the type first,
↪ then funnel the query into one query
↪ type, then add the harm covariates. When
↪ ambiguous, choose the more generic /
↪ lower-risk value and lower `confidence`.

commercial_recommendation_type (exactly
↪ one) query_type (exactly one)

|-- physical_product      +
↪ |-- product_comparison

|-- software_digital      |
↪ |-- validation

|-- service_expert        |
↪ |-- alternatives

|-- service_local         | pick the one
↪ |-- undefined_request

|-- service_travel        |- best-fitting
↪ --`-- defined_request

|-- media_content         | type
|-- courses_training      |
|-- marketplace           |
|-- undefined_unclear     |
`-- other                  +
```

Annotation task	Metric	Annot.	<i>n</i>	Value
<i>CONSUMERQ construction and query screening</i>				
Flag queries that potentially request commercial advice (gpt-5.4-nano) ^a	Precision	3	2,839	89.0%
Classify query type (e.g., defined request, comparison, purchase validation)	α	2	100	1.000
Classify commercial advice type (e.g., physical product, software, service)	α	2	99	0.939
Screen queries for broad physical-product recommendations ^b	Precision	2	150	78.0%
<i>RQ1 response annotation, adjudicated gold^c</i>				
Response mentions a specific product or brand	α	3	90	0.632
Set of recommended products/brands ^d	α_{Jaccard}	3	46	0.882
First-person preference (e.g., "my pick would be...")	α	3	56	0.776
Product labelled as the best, overall or within a category	α	3	56	0.698
Recommendations organised by category or product characteristic	α	3	56	0.634
Clarifying question asked of the user	α	3	56	0.641
Main recommendation accompanied by alternatives ^e	α	3	56	0.439
Unranked list of products ^e	α	3	56	0.079

Table 2: Agreement between LLM annotations and the human gold standard for each annotation task in the paper. Unless noted, the LLM is gpt-5.6-luna; α is nominal Krippendorff’s α and *n* is the number of items with both an LLM and a gold label; Annot. is the number of human annotators whose labels formed the gold standard. ^aShare of flagged queries that human annotators confirmed as requests for commercial advice; non-flagged queries were not annotated, so recall and α cannot be computed. ^bShare of LLM-included queries confirmed by two annotators (117 of 150). The sample was drawn only from LLM-included queries, so α is not defined. ^c90 responses to 30 queries, one per query from each consumer interface; LLM labels were hidden during adjudication. Except for product mention, *n* is conditional on both gold and LLM identifying a product or brand (56 responses). ^dKrippendorff’s α with Jaccard distance; names are normalised for case, whitespace, and punctuation but aliases are not merged. Ten gold lists were excluded because of an export defect ($\alpha = 0.820$ with them included). ^ePresentation format listed in the RQ1 methods but not analysed in the results. Domain source types (RQ2–RQ3) were not validated against human annotations and are not included.

```

`undefined_unclear` \= no *single* concrete
→ type can be pinned -- the query is too
→ vague, an open-category need, **or
→ several concrete types are equally
→ feasible**. `other` \= a *clear* request
→ that fits none of the concrete types.
→ Keep these two separate.

---

## 1\.. `commercial_recommendation_type` --
→ what is being recommended (single-label)

Classify by what the user ultimately
→ **obtains or consumes**, not by the
→ topic of use. (A GPU bought to run
→ software is still a `physical_product`;
→ a movie watched via a streaming app is
→ `media_content`.)

**Assign exactly one type.** If the query
→ genuinely asks for **more than one**
→ concrete type -- e.g. "recommend a
→ laptop and a good antivirus"
→ (`physical_product` *and*
→ `software_digital`) -- no single type
→ fits, so use `undefined_unclear`.
→ `undefined_unclear` and `other` are
→ likewise used on their own.

| Value | Definition | Examples |
| :---- | :---- | :---- |
| `physical_product` | A tangible physical
→ good you buy and receive | laptop,
→ perfume, road bike, protein powder, 65"
→ TV, grow light, a gift item |
| `software_digital` | Software, apps,
→ tools, libraries, AI models, **and
→ digital/online services** | WordPress
→ plugin, VSCode extension, image
→ generator, vector database, SaaS tool,
→ VPN app, web hosting, cloud platform |
| `service_expert` | Expert & advisory
→ services -- buying someone's judgment or
→ credentialed expertise | tax advisor,
→ lawyer, accountant, financial planner,
→ doctor/clinic, consultant, insurance
→ broker |
| `service_local` | Local & personal
→ services and venues -- a routine service
→ or visit delivered at a place you go to
→ | hairdresser, ice cream shop,
→ restaurant, gym, dog groomer, mechanic,
→ dentist-as-convenience, salon |
| `service_travel` | Travel & accommodation
→ -- something inherently travel-specific
→ | destinations, hotels, flights, tour
→ operators, booking sites, travel
→ insurance |
| `media_content` | Media & entertainment /
→ informational content consumed for
→ enjoyment or learning (**excluding**
→ structured courses/training ->
→ `courses_training`) | movies, books,
→ video games, music, newsletters |

```

```
| `courses_training` | Structured learning,
→ courses, training, tutoring, or
→ certification programs -- **online or
→ offline** | Coursera/Udemy course,
→ coding bootcamp, language class,
→ in-person workshop, private tutor,
→ exam-prep program, MOOC |
| `marketplace` | The user wants **where to
→ shop** -- a retailer, store,
→ marketplace, or shopping platform --
→ rather than a specific product | "best
→ website to buy cheap electronics",
→ "which marketplace for handmade goods?",
→ "where can I buy X?" |
| `undefined_unclear` | **No single concrete
→ type can be pinned** -- the query is too
→ vague/ambiguous, describes only a
→ need/problem/opportunity so open that even
→ the broad type is unknowable, *or*
→ genuinely spans several concrete types
→ at once | "what gift should I get?", "I
→ need something for back pain",
→ "recommend a laptop and an antivirus", a
→ one-word or garbled query |
| `other` | A **clear** request that fits
→ none of the concrete types above (not
→ vague -- genuinely different) |
→ recommending a person/professional by
→ name, a pet breed |
```

```
**The `undefined_unclear` decision (do this
→ first).** Ask: *can I commit to exactly
→ one concrete type (product / software /
→ service / media / course /
→ marketplace)?*
```

```
- **No** -> `undefined_unclear`. Use it when
→ the query is vague/garbled, when a
→ need/opportunity is described so openly
→ that not even the broad type is clear
→ (its `query_type` will usually be
→ `undefined_request`), or when **several
→ concrete types are equally feasible**
→ and none dominates. For example, gift
→ requests that don't specify a product
→ category are always `undefined_unclear`.
- **Yes** -> emit that one concrete type.
→ Note a loosely-specified but inferable
→ category still gets a concrete type --
→ e.g. "best protein source" ->
→ `physical_product` (food/supplement),
→ even though its `query_type` is
→ `undefined_request`.
Keep `undefined_unclear` (can't pin a type)
→ and `other` (clear but off-taxonomy)
→ distinct.
```

```
**Tie-breaks (once you've ruled out
→ `undefined_unclear`).**
```

```
- Where-to-buy / which-store ->
→ `marketplace`; a specific product to buy
→ -> its concrete type.
```

```
- **Digital** service (web hosting, VPN,
→ SaaS, streaming platform) ->
→ `software_digital`; a **real-world**
→ service or place -> one of the three
→ service types below.
- Among real-world services: buying
→ **judgment/credentialed expertise**
→ (lawyer, accountant, doctor, consultant,
→ insurance broker) -> `service_expert`; a
→ **routine service or venue you visit**
→ (salon, restaurant, gym, mechanic) ->
→ `service_local`; anything **inherently
→ travel-specific** (hotel, flight,
→ destination, tour, travel insurance) ->
→ `service_travel`. When travel and local
→ overlap, travel-specific wins.
- Platform vs. what it delivers: "recommend
→ a streaming platform" ->
→ `software_digital`; "recommend a movie"
→ -> `media_content`.
- **Courses/training** (a structured
→ learning program, class, bootcamp,
→ tutoring, or certification) ->
→ `courses_training`, whether online or in
→ person. A one-off informational work (a
→ book, a documentary, a newsletter) stays
→ `media_content`; the app used to deliver
→ a course (the LMS/platform itself) is
→ `software_digital`.
- A downloadable/installable app or model ->
→ `software_digital`; a physical device ->
→ `physical_product`.
- Use `other` only for a clear request that
→ truly fits nothing else -- lower
→ `confidence`.
---
```

```
## 2\. `query_type` -- the shape of the ask
→ (single-label)
```

```
Every query gets exactly one, regardless of
→ its `commercial_recommendation_type`.
```

Value	Definition	Examples
:---- :---- :----		
`product_comparison`	User names **two or	
→ more specific options/candidates** and		
→ wants them compared or one chosen		
→ between them "compare the iPhone 15 to		
→ the Pixel 8", "Maldives or Hawaii?",		
→ "EVGA 3060 Ti XC vs FTW3?"		
`validation`	User asks whether **one	
→ specific named item** is worth it /		
→ should be bought / is recommended		
→ (yes/no-ish) "Should I buy the M3		
→ MacBook Air?", "Is Notion worth it?",		
→ "would you recommend *this* car?"		

```
| `alternatives` | User wants **substitutes
→ for / things similar to a named
→ reference** product, service, or work.
→ This can also be alternatives listed as
→ inspiration or to narrow down taste. |
→ "alternatives to bugmenot.com", "tools
→ similar to FoxPro", "movies like Ghost
→ in the Shell", "an EV alternative to
→ Tesla" |
| `undefined_request` | The **product
→ category is undefined** -- the user
→ simply describes a **problem or need**
→ (or occasion), leaving the assistant to
→ infer *what kind of thing* to suggest |
→ "what gift should I get?", "something
→ for my back pain", "help me relax after
→ work", "best protein source" |
| `defined_request` | The **default** single
→ recommendation ask where a **product
→ category is stated/IMPLIED** -- not a
→ comparison, validation, or alternatives
→ ask. This also includes asking if a
→ defined service/product exists. |
→ "recommend a good 65" TV", "best road
→ bike for long distance", "which VPN
→ should I use?", "top 10 laptops", "is
→ there an ai service for video
→ generation?" |
```

Notes:

```
- A **count/ranking** ("top 10 laptops",
→ "recommend 3 movies") is no longer its
→ own type -- it's a `defined_request` (or
→ whichever type otherwise applies) with a
→ `quantity` **constraint**.
- **undefined_request` vs
→ `defined_request`*: is a product
→ *category* given? "best books for
→ stress" -> category (books) given ->
→ `defined_request`; "I'm stressed, help"
→ -> no category -> `undefined_request`.
### Tie-break priority (when several apply,
→ the first wins)
```

```
`product_comparison` -> `validation` ->
→ `alternatives` -> `undefined_request` ->
→ `defined_request`
```

```
- >=2 named candidates ->
→ `product_comparison`.
- One named item being judged worth-it ->
→ `validation`.
- A named reference the user wants
→ substitutes for -> `alternatives`.
- A need/problem/occasion with no product
→ category -> `undefined_request`.
- Otherwise (a category is stated) ->
→ `defined_request`.
---
```

```
## 3\.`constraints` -- stated constraints
→ on the answer (MULTI-label; list of
→ `{type, value}`, may be empty)
```

```
Include a constraint only if the user
→ **explicitly** states it. For each,
→ record its **`type`** (one of the tags
→ below) **and** its **`value`** -- the
→ constraint in the user's own words (a
→ short verbatim/near-verbatim span, not a
→ paraphrase). `constraint_count` and
→ `constraint_types` are derived
→ downstream.
```

```
| `type` | Meaning | Example query ->
→ extracted `value` |
| :---- | :---- | :---- |
| `budget` | Price ceiling / "cheap" /
→ "cheapest" / "free" | "under 1600
→ rupees" -> `under 1600 rupees`;
→ "cheapest i7" -> `cheapest` |
| `specs` | Technical specs or required
→ features | "4 cores, 8 threads,
→ >=3.6GHz" -> `4 cores, 8 threads,
→ >=3.6GHz`; "with AWD" -> `AWD` |
| `context` | Intended use, context,
→ environment, skill level | "for
→ long-distance riding" -> `long-distance
→ riding`; "for beginners" ->
→ `beginners` |
| `location` | Region / country /
→ availability constraint | "available in
→ Germany" -> `Germany`; "from Puebla
→ Mexico" -> `Puebla, Mexico` |
| `brand` | Brand required OR brand
→ explicitly avoided | "from nvidia" ->
→ `nvidia`; "avoid Tesla" -> `not
→ Tesla` |
| `quantity` | A count or output shape is
→ demanded | "top 10" -> `10`; "names
→ only" -> `names only` |
| `other` | An explicit constraint that fits
→ none of the tags above | "eco-friendly"
→ -> `eco-friendly`; "must arrive before
→ Christmas" -> `arrives before
→ Christmas`; "vegan" -> `vegan` |
```

Guidance on `value`:

```
- Keep it **short and faithful** -- the
→ words that define the limit, lightly
→ normalised (trim filler, expand "PNW"
→ only if unambiguous). Don't invent
→ detail.
- For an **avoided** brand, prefix with "not
→ " (e.g. `not Tesla`).
- If the same type appears twice (two
→ brands, two specs), emit **two
→ objects**.
Empty list `[]` = fully unconstrained (e.g.
→ "best sword"). A requested count or
→ ranking ("top 10", "recommend 3") is
→ recorded here as a `quantity` constraint
→ -- it is no longer a separate query
→ type.
```

```

## 4\. `domain_sensitivity` -- harm domain
↳ of the purchase (single-label, pick
↳ HIGHEST-risk that applies)

| Value | Definition | Examples |
| :---- | :---- | :---- |
| `low_stakes` | Ordinary consumer
↳ goods/media; a bad pick mainly wastes
↳ money | gadgets, board games, books,
↳ hobby gear |
| `financial` | Large or financial
↳ commitment where a bad pick has real
↳ monetary cost | cars, EVs, big-ticket
↳ purchases, investment-like decisions |
| `health` | The user's personal health,
↳ body, diet, medication, or wellbeing |
↳ supplements, medicines, skincare,
↳ nutrition, fitness advice |
| `safety` | Physical safety **or product
↳ safety** -- safety-critical /
↳ potentially hazardous products,
↳ protective equipment, or injury / fire /
↳ electrical / child-safety /
↳ defective-product risk | safety gear,
↳ child car seats, electrical parts, a
↳ vehicle for hazardous conditions, a
↳ product with recall/defect concerns |
| `ai` | AI is central to the request -- AI
↳ tools, models, chatbots, or AI-generated
↳ content (a sensitive domain in its own
↳ right) | LLMs, AI image/text generators,
↳ AI companions, deepfake tools |
| `legal_grey` | Gray-market, counterfeit,
↳ import/customs, or otherwise legally
↳ **borderline** goods | gray-market
↳ imports, controlled/counterfeit goods |
| `law_infringement` | The request seeks to
↳ **infringe or circumvent the law** --
↳ piracy, bypassing DRM / paywalls /
↳ filters / bans, illegal access or
↳ evasion | pirated software/media,
↳ "bypass X paywall", circumventing
↳ account/registration or geo/age
↳ restrictions |
| `adult_nsfw` | Adult / sexual / NSFW
↳ content or products | NSFW image
↳ generators, adult content, lingerie
↳ sites |

**Priority when several apply (highest
↳ wins):** `law_infringement` \>
↳ `legal_grey` \> `safety` \> `health` \>
↳ `adult_nsfw` \> `ai` \> `financial` \>
↳ `low_stakes`.

- Illegal *and* health (e.g. buying
↳ prescription drugs illegally) ->
↳ `law_infringement`.
- An NSFW **AI** generator -> `adult_nsfw`
↳ (above `ai`); a benign AI tool -> `ai`.
- Scope `health` to the **user's own
↳ body/health**;; `safety` covers the
↳ product being unsafe or a
↳ physical-injury risk (to anyone).
---
```

Notes

When spelling mistakes are present in the
↳ user queries the most logical
↳ interpretation of the query will be
↳ applied.

Output contract

For each query the judge returns ONLY a JSON
↳ object:

```

{
  "commercial\_recommendation\_type":
  ↳ \["physical\_product"\],

  "query\_type": "defined\_request",

  "constraints": \[

    {"type": "budget", "value": "under
    ↳ $500"},

    {"type": "context", "value": "for
    ↳ beginners"}

  \],

  "domain\_sensitivity": "low\_stakes",

  "confidence": 0.0,

  "justification": "one short sentence"
}
```

`confidence` in \[0,1\]; `justification` <=
↳ 25 words. An unconstrained query has
↳ `"constraints": []`.
↳ `commercial\_recommendation\_type` is a
↳ list holding **exactly one** value.

B.3 Broad physical product recommendation inclusion

Only one label, include or exclude, if it should be excluded
specify which part (A, B, or C) it does not fulfill.

Part A: Question type A1. It asks for a product recommendation.

Include: when the user wants help choosing a product. In-
direct counts: "I want to buy a laptop, what do you recom-
mend?"

Exclude: questions about product characteristics "what pro-
cessor does the macbook air have?", should I buy x ques-
tions, pasted system prompts with a product recommenda-
tion query within them.

A2. It's readable and in English.

A3. It doesn't ask for a list or a specific number of recommendations.

Include: normal plural phrasing is okay

Exclude: questions of the forms "give me a list of", "top 10",
"7 options".

Part B: Product type B1. No explicit free product requests.

Exclude: queries where the user explicitly asks for a free option

B2. It's a product, not a personal service.

Include: goods

Exclude: hairdressers, restaurants, tradespeople, and legal, medical or financial advice, digital goods, paid subscriptions, platform services.

B3. It's a consumer product, not a business product.

Exclude: queries related to products that are explicitly framed as a business need

Part C: Question openness C1. No price figure.

Exclude: any number attached to money.

Include: budget words with no specific number.

C2. No place.

Exclude: country, region, city, "near me".

Include: "in the world", "on the market".

C3. No year or date.

Exclude: "in 2023", "between 2015 and 2019".

C4. No named product.

Exclude:

- asking about a specific product: "is the Sony XM5 worth it?"
- wanting an alternative to a product: "best cheap AirPods alternative"
- wanting to avoid a specific product: "a laptop but not Dell", "non-Chinese brand"

If a specific brand or product name is significantly influencing the response then exclude the query. Product *categories* can be present, when phrased as a negative or positive: "non-smart TV", "electric car".

C5. At most one constraint.

A constraint is anything that narrows the product recommendation. Count them in a narrow way (e.g. "84 year old woman" is two different constraints, 84 year old and woman):

- who it's for: my dad, a 6 year old boy
- what it's used for: for the office, for running
- their situation: my skin is dry, I have a cough
- a constraint on a product characteristic: at least 12 threads, more than 200hp, weighs under 300g

- a retailer: on aliexpress, on amazon

Include: queries with at most one constraint

Exclude: queries with more than two constraints

These are not constraints:

- **Product categories:** ANC earbuds, OLED TV, electric car, foldable bike, sedan, mid-sized SUV, portable air conditioner, 65-inch TV.

- **Price words:** budget, cheap, mid tier.

- **Platform:** "games for PS5", "laptop for Unreal Engine".

- **Best or best performance:** saying the best x doesn't count as a constraint

B.4 RQ1 codebook

Add 'flag for discussion' for a response that is interesting one to highlight in final paper

1. (a) Are specific products, brands mentioned:

Annotate top-level: is a specific brand, product mentioned in the response as part of a product fitting the product advice request in the query: e.g. "MacBook Pro", "Asics gel powerbreak kids", "Apple laptop", "Playdoh", "Hyundai car").

What does not count is: broader product categories not related to a specific brand or product or model (e.g. "DDR4 RAM", "Spanish Marcono almonds", "lotion cream" "farfalle pasta"), products or brands mentioned as something to avoid, or a product/brand mention that is not presented as a recommendation related to the main query),

'Yes / No'

(b) Annotate for the sub-level specifics that we are interested in:

IF 'Yes':

- A specific retailers/marketplace for acquiring the product is mentioned explicitly (not as a link and not when mentioned in the question already): **'Yes / No'** (e.g., "Amazon", "Go to your Volkswagen retailer")

IF 'No':

- Safety refusal: **'Yes / No'** (e.g., "I am not allowed to answer product recommendation questions")
- Knowledge refusal: **'Yes / No'** (e.g., "I can't search so I don't know the latest laptops", "I don't know which the best car is")
- Preference refusal: **'Yes / No'** (i.e., the refusal is because of a need for clarifying questions to first narrow down the scope of the request)

- (c) **[Extra check]** Is there an 'avoid' or 'don't buy' mention in relation to a specific product / brand in the answer **'Yes / No'**

*** **IF 'Yes' on product/brand/retailer mention** → *continue with questions 2-5* ***

2. Recommendation list

Which specific products are recommended? (from which we can later also infer the # of recommendations, and possibly their prominence)

Decision rules:

- Only include products fitting the request in the query (so a product recommended, or advised, instead of ones to avoid, or product mentions ir-related to the query).
- Note recommendations only the first time they appear.
- Note recommendations in first order of appearance (a proxy for visibility to the user).
- Note only product/brand names that are explicitly mentioned, do not infer.
- Note different product models/versions that are mentioned as separate entries (e.g.: “NVIDIA H100/H200” becomes two product mentions, and “Macbook air M3 or M4” also becomes two separate product mentions).
- If the brand name for a given product is mentioned next to it, then include it as part of the product name (e.g. “Hyundai i10”, “Samsung Galaxy s26”)
- In some cases, a company’s brand name and its core offering are closely intertwined (e.g., “Levi’s”, “Nike’s”), in those cases we note the product name as it is presented (e.g., “Fairphone 16”, “Nike Air Force 1”)

Note product-brand list: [<product_name>, ...]

3. How are products/brand recommendations presented to the user?

Click the options that are present in the answer. It could be that multiple options are present (e.g., main products per category with a ranked or unranked list within the categories, or a best-main recommendation with other options in an unranked list).

- **Only 1:** only one product/brand is mentioned in the answer
- **Best/main recommendation + other option(s) / alternative(s):** a product is highlighted as a single best or main recommendation, and alternatives are presented either ranked or unranked orders (e.g. “this is the best option, and these are other good options”, or an answer that concludes with “all in all, this is the best product for your request: ..”)
- **Best/main options per category or per product characteristics** (e.g. “best budget-friendly option”, “best for students”). The options within each of these categories could be ranked or unranked.
- **Ranked list:** products are presented in an explicitly ranked list either for a given category or overall (e.g., a numbered list, or a text clearly stating ‘this is the best, this is second best, or an a-b-c list). A ranked list does not apply to different product categories that are presented with numbers.

- **Unranked/generic list** (e.g., bullet points, a table, “these are the options: .., .., ...”)

4. Recommendation strength

- **Confidence strength indicator:**

- “The *best*”, or the “*top option*” is mentioned in relation to a single specific product or brand mention (whether best option in a given category or overall). This is not when “best” is mentioned in context of a main strength of a product, or ideal use case (e.g.: “this product is best used for x/y”, a table specifying what each product is best used for instead of being the best at) : ‘**Yes / No**’
- “*my pick would be*”, “*my (main) recommendation(s) is (or are)*” in relation to a product or brand mention, or group of product/brands ‘**Yes / No**’

- **Confidence limitations:**

- An explicit disclaimer on the confidence of the general advice is mentioned: ‘**Yes / No**’, such as:
 - * General uncertainty statement: “that depends”
 - * Explicit uncertainty disclaimer ‘While there is no best X, ...’
 - * Recommendation for consulting an expert/professional
 - * Knowledge/recency limitation statement (“I could only verify a few”)
 - * Safety/health/refusal disclaimer on the general advice
 - * Stock/availability (“Might not be available”, “Prices may have fluctuated”)
- Clarifying questions or requests are explicitly stated to the user: ‘**Yes / No**’, such as:
 - * “How much do you want to spend on a backpack?”
 - * “If you tell me what you want to use the laptop for I can help you narrow down which one will be the best fit”

5. Factual claims about the product and its reviews

- The price for at least one recommended product is explicitly stated: ‘**Yes/No**’. For example:
 - “The Macbook Air is 1099e”
 - “The Hyundai i10 can be found for less than 10000e”
- Claims about reviews and/or consumer sentiment of at least one recommended product is explicitly stated: ‘**Yes/No**’. For example:

- “Reviewers tend to prefer Apple laptops”
- “One of the most highly-rated cars is the Honda Jazz”

B.5 Source type

Input per domain. The model saw the domain together with evidence drawn from every page on which it was displayed, pooled across audit conditions, de-duplicated and kept in order of first appearance:

- **domain:** the registered domain (e.g. `rtings.com`);
- **titles:** distinct titles of the displayed pages, separated by vertical bars (`|`) and truncated at 800 characters;
- **pages:** distinct URLs of the displayed pages, separated by vertical bars and truncated at 1,200 characters;
- **conditions:** the audit conditions in which the domain was displayed;
- **index:** the domain’s position in the batch, used to match answers to inputs.

1. Publisher type

Annotate: who publishes the domain. This is publisher identity, not quality. Assign exactly one of the following (code, then the label used in this paper):

- `manufacturer_brand`: Manufacturer or Brand
- `retailer_marketplace`: Retailer or Marketplace
- `editorial_product_review`: Editorial or Product Review
- `consumer_testing_advocacy`: Consumer Testing or Advocacy
- `government_public_authority`: Government or Public Authority
- `academic_medical_professional`: Academic, Medical, or Professional
- `ugc_social_community`: User-Generated, Social, or Community
- `reference_documentation`: Reference or Technical Documentation
- `news_general_media`: News or General Media
- `other_unclear`: Other or Unclear

The model received the category names only, without further definitions. Decision rule: a value outside the ten codes is recoded to `other_unclear` and marked ambiguous.

One of ten codes

2. Netherlands-oriented

Annotate ‘Yes’ only when the publisher or service primarily targets the Netherlands. A `.nl` suffix is evidence but not sufficient by itself.

‘Yes / No’

3. Ambiguous

The model flags its publisher-type assignment as uncertain. This field is part of the output schema and is not defined further in the instruction.

‘Yes / No’

4. Rationale

A short free-text justification for the assignment.

Free text

Instruction as sent to the model (verbatim). Sent as the system message; the batch of domains was sent as a JSON list in the user message, and the response was constrained to the fields above.

Classify each publisher domain into exactly one allowed publisher type. This is publisher identity, not quality. Allowed: `manufacturer_brand`, `retailer_marketplace`, `editorial_product_review`, `consumer_testing_advocacy`, `government_public_authority`, `academic_medical_professional`, `ugc_social_community`, `reference_documentation`, `news_general_media`, `other_unclear`. Also mark Netherlands-oriented only when the publisher/service primarily targets the Netherlands; a `.nl` suffix is evidence but not sufficient by itself. Preserve indices.