

# Choosing a PEFT Variant for Per-Patient Dysarthric ASR: A Single-Speaker Case Study on Two ASR Bases

Bernard Muller<sup>a,1</sup>, László Tóth<sup>b,2</sup>, LaVonne Roberts<sup>a,3,\*</sup>

<sup>a</sup>*The Scott-Morgan Foundation, Torquay, United Kingdom*

<sup>b</sup>*Institute of Informatics, University of Szeged, Szeged, Hungary*

---

## Abstract

Per-patient adapters are the preferred production architecture for dysarthric automatic speech recognition (ASR), yet parameter-efficient fine-tuning (PEFT) variants have not been compared in the speaker-dependent, per-patient regime. We present a single-speaker case study comparing seven LoRA-family methods (LoRA, QLoRA, AdaLoRA, DoRA, LoHA, VeRA, VB-LoRA) on two production bases (Whisper-large-v3 with Hungarian fine-tuning, and a multilingual Qwen3-ASR-1.7B checkpoint) for one post-stroke Hungarian male speaker (S1, 409 utterances; severe dysarthria on auditory-perceptual clinical assessment). Attention-projection adapters substantially improve CER on both bases. Across three seeds, a paired bootstrap detects no significant LoRA–DoRA difference ( $p > 0.5$ ; 13.86 / 13.90 % CER on Whisper, 28.10 / 28.33 % on Qwen3-ASR), so we adopt the simpler, cheaper LoRA. Real 4-bit (NF4) QLoRA is worse on every seed and both bases (14.56 / 30.09 % CER) with no memory saving at this scale, and LoHA, VeRA, VB-LoRA and AdaLoRA do not reach the LoRA family, though LoHA still gives an 18.6 % relative CER reduction on Whisper. On the same base, full fine-tuning is more accurate (11.43 % CER), but a 115 MB LoRA that also adapts the feed-forward blocks reaches within 0.66 pp of it at  $\approx 3.7$  % of the per-patient storage. A 6-point enrollment grid shows  $\sim 5$  min of patient audio captures 45.6 % of the zero-shot-to-30-min CER reduction, with further gains at 10

---

\*Corresponding author

*Email address:* [lavonne@scottmorganfoundation.org](mailto:lavonne@scottmorganfoundation.org) (LaVonne Roberts)

<sup>1</sup>ORCID 0009-0004-7494-305X

<sup>2</sup>ORCID 0000-0003-0161-1375

<sup>3</sup>ORCID 0009-0008-2883-3764

and 30 min (caveat: one speaker, one language, severe post-stroke dysarthria). Training scripts and recipes will be released, source-available under a research-use licence, on publication.

*Keywords:* dysarthric speech recognition, parameter-efficient fine-tuning, LoRA, DoRA, per-patient adaptation, Whisper, Qwen3-ASR

---

## 1. Introduction

Dysarthric speech recognition deployed for individual patients increasingly relies on per-patient adapters: each user trains a small adapter on their own voice, the shared base remains untouched, and adapters are stored, versioned and shipped per patient. This is the production architecture for clinical per-patient dysarthric-ASR deployments, and is structurally similar to the patient-specific recipes reported by Matsushima for Dutch dysarthric speakers [1]. The clinical motivation is unambiguous — patients want recognition of *their* voice, not population averages — and the engineering consequence is that every megabyte of adapter and every minute of training is incurred once per patient, so total storage and compute scale linearly with the number of patients.

The choice of PEFT variant in this per-patient regime has not been studied systematically for dysarthric speech. Dysarthric PEFT/adaptation prior art does exist, but addresses different questions. Qi and Van hamme [2] use adapter fusion with a Householder-transformation-based reparameterisation for target-speaker dysarthric adaptation. Wagner et al. [3] compare full fine-tuning, plain LoRA [4] and AdaLoRA [5] on the Speech Accessibility Project corpus, with AdaLoRA being the strongest, in a speaker-disjoint condition. The closest cross-variant comparison in any clinical-adjacent population is Ankita et al. [6] on children’s ASR, who report that LoHA [7] outperforms LoRA on Whisper-large-v3, particularly in the speaker-disjoint condition. None of these match the production per-patient case: speaker overlap is the defining property of per-patient adaptation, and the question of which PEFT variant is best at the small-data, speaker-dependent end of the spectrum has not been answered. To our knowledge, this is the first speaker-dependent, per-patient comparison of these seven LoRA-family variants on dysarthric speech, under a fixed production recipe on the same speaker and two ASR bases.

This paper answers that question on two production ASR bases for a single real dysarthric speaker. Our contributions are:

1. To our knowledge, the first speaker-dependent, per-patient cross-variant comparison of seven LoRA-family variants (LoRA, QLoRA, AdaLoRA, DoRA, LoHA, VeRA, VB-LoRA) on dysarthric speech.
2. To our knowledge, the first per-architecture cross-comparison for dysarthric PEFT: same speaker, same data, same recipe, on a large encoder-decoder Transformer (Whisper-large-v3) and an LLM-decoder ASR (a multilingual production Qwen3-ASR-1.7B checkpoint).
3. Two negative-result methodology findings published as named subsections: a warm-base regression analysis on Qwen3 (Section 4.5) and a follow-up dys-only pool ablation (Section 4.6). Both pin the regression to narrow pretraining-mix, *not* healthy-control-versus-dysarthric composition.
4. A 6-point enrollment-time grid (Section 4.7) on a production-equivalent recipe (DoRA  $r=16$ , which LoRA matches; Section 4.2) showing that  $\sim 5$  min of patient audio captures 45.6% of the zero-shot-to-30-min CER reduction, with continued gains to 30 min — to our knowledge, the first such characterisation for LoRA-family PEFT on a fixed per-patient recipe.
5. A multi-seed head-to-head with *real* 4-bit QLoRA (Section 4.2) showing LoRA and DoRA are statistically tied and 4-bit QLoRA lags behind both, and a released production recipe (LoRA  $r = 16$  on Whisper-large-v3 + Hungarian fine-tune; DoRA an alternative with no detected difference), source-available under a research-use licence, for per-patient adapter training.
6. A same-base, same-data comparison and target-set attribution ladder (Section 4.8) showing that encoder attention is the dominant LoRA lever and that extending the adapter to the feed-forward blocks reaches within 0.66 pp CER of full fine-tuning at  $\approx 3.7\%$  of its per-patient storage.

## 2. Background and prior art

### 2.1. LoRA family taxonomy

All seven variants we compare add trainable low-rank perturbations to a frozen base. **LoRA** [4] factorises the weight update matrix as  $\Delta W = BA$  with rank  $r$ . **QLoRA** [8] is defined by backpropagating the error through a frozen

4-bit (NF4) quantised base into LoRA adapters, with double quantisation and paged optimisers; its purpose is memory reduction, not a change of the adapter parameterisation. **AdaLoRA** [5] reallocates a parameter budget across layers using importance scores. **DoRA** [9] decomposes the update into magnitude and direction components, with magnitude trained directly. **LoHA** — the PEFT library’s Hadamard-product adapter, derived from the *FedPara* parameterisation [7] (a federated-learning antecedent, not a paper titled LoHA) — uses a Hadamard product of two low-rank pairs for effective rank  $\sim r^2$  at the same storage cost. **VeRA** [10] freezes shared random projections and trains only per-layer scaling vectors. **VB-LoRA** [11] shares a vector bank across layers with per-layer mixing weights.

## 2.2. Dysarthric ASR adaptation prior art

Matsushima [1] reports substantial WER reductions on Dutch dysarthric speech from speaker-dependent re-fine-tuning of a self-supervised model with only  $\sim 10$  min of target-speaker audio, establishing per-patient adaptation as a strong single intervention. Qi and Van hamme [2] adapt to a target dysarthric speaker via adapter fusion and a Householder-transformation-based reparameterisation, matching a baseline at  $\sim 1/3$  the parameters. Wagner et al. [3] compare full fine-tuning, LoRA and AdaLoRA on Whisper-large-v3 for the Speech Accessibility Project — the closest contemporary dysarthric-PEFT comparison, with AdaLoRA outperforming both other methods, but in a speaker-disjoint condition. Ankita et al. [6] compare LoRA variants on Whisper for children’s ASR and report LoHA as the winner, motivating the present study. Beyond LoRA-family PEFT, speaker adaptation for disordered speech has been pursued through prompt-tuning (Jiang et al. [12] attach a trainable Perceiver speaker prompt to Whisper for Chinese disordered speech) and through non-PEFT routes such as voice/rhythm conversion [13]; Mihajlik et al. [14] report a personalised Hungarian dysarthric speech-to-text case study via TTS-driven data augmentation. Personalisation of ASR for atypical speech from a small amount of per-speaker data has a substantial track record: Shor et al. [15] personalise recognisers for dysarthric and accented speakers from a few minutes of data, Tobin and Tomanek [16] characterise how per-speaker accuracy scales with disordered-speech dataset size, and Tomanek et al. [17] adapt foundation ASR to atypical and accented speech with residual adapters — the closest parameter-efficient precedent to the present work, though without a LoRA-family variant comparison. Parameter-efficient personalisation within the LoRA family is now emerging: Joseph and Baby [18] and Baby et al. [19]

apply DoRA and a generalised low-rank adaptation to speaker personalisation, and Pokel et al. [20] propose a variational low-rank adapter for personalised impaired-speech recognition, while Huber et al. [21] report a single-speaker case study adapting foundation ASR models to dysarthric speech. None of these answer the per-patient *speaker-dependent* PEFT-variant question we study: which low-rank adapter to default to under a fixed sparse-data recipe.

### 2.3. FiLM speaker-conditioning: the closest alternative mechanism

The most relevant contemporary alternative-mechanism prior art is the work of López et al. [22], who replace per-patient LoRA with feature-wise linear modulation (FiLM) [23] conditioned on a speaker x-vector. They target Voxtral-Mini, a SpeechLLM combining a Whisper-large-v3 audio encoder with a Ministral-3B language decoder. A SiAmResNet34 network extracts per-speaker x-vectors and a small projection head emits per-layer  $(\gamma, \beta)$  modulation parameters injected into the frozen base; this adds 73.5 M trainable parameters ( $\sim 1.6\%$  of Voxtral-Mini’s 4.7 B). On the TORGO and NeuroVoz databases they report two findings that are in tension. As regards ASR, an F-LoRA hybrid is strongest on NeuroVoz (4.07 % WER) and competitive on TORGO (12.71 % WER, behind full fine-tuning’s 10.97 %); FiLM-only speaker conditioning trades several pp of WER for its other advantage. As regards the model’s multi-task instruction-following capability — measured on a SpeechLLM MCQA benchmark — plain LoRA on a per-patient pool sharply reduces MCQA accuracy from 52.7 % (frozen base) to 8.6 %, while FiLM preserves the base’s MCQA accuracy by design (the frozen weights are never updated). This is also the framing’s fleet-storage argument: each enrolled patient costs only  $\sim 2$  KB (an x-vector) plus shared FiLM projection heads, against  $\sim 60$  MB of per-patient LoRA adapter weights at the rank we use here.

We treat FiLM as the closest contemporary alternative mechanism, not as a configuration, for three reasons. (a) FiLM’s premise — distinguishing patients via x-vectors — requires  $N > 1$  speakers; on a single training speaker the x-vector is constant and the FiLM head degenerates to a per-layer fixed bias, weaker than LoRA on the same layers. (b) Voxtral-Mini does not list Hungarian among its supported languages, ruling it out for the same pretraining-mix narrowness reason that emerges in our NeMo backbone Section 4.4. (c) Our controlled-variable design holds base + data + recipe constant and varies only the PEFT variant, which keeps the comparison interpretable within the LoRA family. A proper FiLM-vs-DoRA benchmark

would require a fleet-level multi-patient comparison regarding storage-per-patient, CER, and multi-task retention; we defer it explicitly to future work (Section 7).

### 3. Method

#### 3.1. Data

We use a single post-stroke Hungarian male speaker (S1). The participant’s clinical speech-language-therapy records from early 2023 (about two years before the corpus itself was recorded, in early 2025) characterise the dysarthria as severe, on auditory-perceptual assessment and without a standardized severity instrument; this is consistent with the severe characterisation reported by Mihajlik et al. [14] for the same speaker. No standardized, independent severity rating of the corpus recordings is available, so severity here is a descriptive clinical characterisation rather than a validated instrument-based classification — we use the categorical terminology surveyed by Stipancic et al. [24] only as descriptive vocabulary. The corpus comprises 409 utterances (55 min) under a signed Data Sharing Agreement that allows research use but forbids redistribution of the audio itself (see Section 6). Splits are speaker-internal by content type: 262 training utterances (195 read-sentence + 67 narrative), 40 validation, and 107 evaluation. The training pool breaks down as 21.12 min read sentences + 11.56 min narrative (32.68 min total).

S1 is the same participant, and the corpus the same, as in Mihajlik et al. [14]: the 107-utterance evaluation split, the 40-utterance validation split, and the 195 read-sentence training items are identical across the two studies (our per-patient training pool additionally includes 67 narrative utterances, giving 262). The two studies ask different questions — Mihajlik et al. compare full fine-tuning of several backbones with TTS-driven data augmentation, whereas we compare parameter-efficient adapter variants on a fixed per-patient recipe — but because they share a participant and a corpus, we state the overlap explicitly rather than leave it to citation.

#### 3.2. Bases

- **Whisper-large-v3** [25]: 1.55 B encoder-decoder Transformer. We use a **merged HU FT** variant: Whisper-large-v3 fine-tuned on the 38K-utterance Hungarian pool described in Section 4.5, with full-weight merge into the base. Zero-shot on the S1 test split after merge results in 29.46 % CER.

- **Qwen3-ASR-1.7B**: an *internal* multilingual production checkpoint — a dysarthric-pool fine-tune of the public 1.7 B base [26], not itself a public release. It is a 1.7 B AuT encoder + Qwen LLM decoder trained on a 10-language pool including TORGO, UASPEECH, EasyCall and other dysarthric corpora. On our internal multilingual evaluation (131,849 utterances across 10 languages) it reaches 2.91 % CER / 5.49 % WER. Zero-shot on the S1 test split gives 49.46 % CER. Because this base is not public, results on it are reproducible in recipe but not from publicly available files alone (Section 6).

### 3.3. PEFT variants

All seven variants are applied via the HuggingFace PEFT library [27] on top of TRANSFORMERS [28], with the following parameters: LoRA  $r=16, \alpha=32$ ; DoRA  $r=16$ ; QLoRA  $r=16$  (real 4-bit NF4 frozen base with double quantisation, in the multi-seed head-to-head; the seven-variant comparison of Table 1 additionally lists a QLoRA variant with 4-bit quantisation disabled as a LoRA-equivalent control); LoHA  $r=8$  (effective rank  $\sim 64$ ); AdaLoRA  $\text{init\_}r=24 \rightarrow \text{target\_}r=16$ ; VeRA  $r=256$ ; VB-LoRA  $r=16$ ,  $\text{vector\_bank} = 256$ . Target modules are the attention projections, matched by module name across the whole model. For Whisper this selects the  $q/k/v/\text{out\_proj}$  in the encoder self-attention and the decoder self- and cross-attention (384 modules; no feed-forward layers). For Qwen3-ASR it selects the LLM-decoder attention ( $q/k/v/o$ ) together with audio-encoder projection and convolution outputs ( $\text{out\_proj}$ ,  $\text{conv\_out}$ ,  $\text{proj1}$ ,  $\text{proj2}$ ). Both bases therefore adapt encoder and decoder attention while leaving the feed-forward blocks and the remaining encoder weights frozen. We report the trainable-parameter count, adapter size and adapted-module inventory per variant so the adaptation surface is explicit, and Section 4.8 isolates the contribution of each target group (encoder attention, decoder attention, feed-forward) directly. The shared base — including the bulk of the audio encoder — is cached once and reused across patients; only the low-rank adapter is stored per patient.

### 3.4. Training recipe

The training recipe was identical across all configurations: AdamW (weight decay 0), learning rate  $1 \times 10^{-4}$ , bf16 (a 16-bit floating-point format), batch  $4 \times \text{grad-acc}$  4, a fixed 5 epochs ( $\sim 80$  optimiser steps), cosine schedule with 10 % warmup, seed 42 (42/43/44 for the multi-seed runs). Training is fixed-budget

— no early stopping and no intermediate checkpointing; the final-epoch model is evaluated. The 40-utterance validation split is held out but was not used for checkpoint selection in these runs. We varied one factor: the PEFT variant.

### 3.5. Hardware and software

We employed a DGX Spark (GB10, sm\_121) in NGC container `nvcr.io/nvidia/pytorch:25.10-py3` (PyTorch 2.9.0a0, CUDA 13.0). We used TRANSFORMERS 4.51.x and PEFT 0.19.1 (the latter required for VeRA and VB-LoRA support); BITSANDBYTES 0.49.2 for the 4-bit NF4 QLoRA configurations. The released repository pins these exact versions.

### 3.6. Evaluation

The 107-utterance test split shares no reference text with the 262-utterance training pool or the 40-utterance validation split (none of the 107 evaluation utterances shares its reference text with either split, after Unicode NFC normalisation), and S1’s data was excluded from the Hungarian fine-tuning pool used to build the warm base (Section 4.5); the multilingual Qwen3-ASR checkpoint contains no S1 data. The split is therefore text-disjoint. This same 107-utterance set was, however, used by Mihajlik et al. [14] and — within this study — across the seven-variant screening, the contender selection and the multi-seed head-to-head; we therefore treat it as a reused evaluation benchmark rather than an independently held-out set, and a fresh, session-disjoint confirmatory set is deferred to future work (Section 7). We applied greedy decoding on the 107-utterance test split per configuration. CER and WER are calculated from a single-reference — the corpus ships with one reference transcription per utterance — and all reported numbers in this paper are greedy single-reference results. Primary metric is CER; WER is secondary. We additionally report trainable parameter count, serialised adapter size (MB) and wall-clock training time (min). CER/WER are computed after Unicode NFC normalisation, lower-casing, and restriction to the Hungarian alphabet (a–z, the accented set *á é í ó ö ő ú ü ű*, and space; all other characters collapse to a single space); no punctuation, casing, or numeral expansion is applied beyond this. The peak VRAM usage was estimated by `torch.cuda.max_memory_allocated()` read after `reset_peak_memory_stats()` at load.



### 3.7. Reproducibility

Decoding uses greedy search with the Hungarian language token, the transcribe task, and `max_new_tokens` = 200. The adapted modules are exactly those in Section 3.3: the attention projections across encoder and decoder (no feed-forward layers for the Whisper cells), with the feed-forward blocks and the remaining encoder weights frozen; all other hyperparameters are as given in the fixed recipe above. Training scripts, per-variant configs, and the Pareto / enrollment runners are released source-available under a research-use licence (`per-patient-peft`; tagged release on publication). The S1 corpus, trained adapters, and per-utterance JSON outputs remain restricted under the data-sharing agreement (Section 6), so the main results are reproducible in code logic but not from publicly available files alone.

### 3.8. Use of AI tools in the research process

The first author works through an AI-assisted eye-gaze interface and used Claude Opus 5 (Anthropic) throughout this study as a research tool: to draft and debug the training, evaluation, and plotting scripts released with this paper; to compute the CER/WER, bootstrap, and summary statistics reported in Section 4; and to generate Figures 1 and 2 from the underlying result files via the released plotting scripts. All code was executed by the authors on the hardware in Section 3.5, every reported number was read by an author from the resulting output files, and all experimental design decisions, interpretations, and conclusions are the authors’ own. The released repository contains the scripts as run, so every figure and table can be regenerated from the result files without the AI tool.

## 4. Results

### 4.1. Main comparison

Table 1 reports CER, WER, trainable parameter count, adapter size and wall-clock training time for all 16 (2×8) configurations, and Figure 1 plots CER against adapter size for the same configurations. All CER/WER values are greedy single-reference on the held-out test split.

### 4.2. Multi-seed head-to-head with real 4-bit QLoRA

The comparison of Table 1 isolates the LoRA family (LoRA, DoRA, QLoRA) as the only variants that adapt usefully on either base. To decide

Table 1: Variant comparison: seven PEFT variants on two production bases, single dysarthric speaker (S1, Hungarian), 107-utterance held-out evaluation, single seed.  $\Delta$ CER is relative improvement vs the per-base zero-shot baseline. This table compares all seven variants, separating the contending strict-sense LoRA family (LoRA, DoRA, QLoRA) from the rest; the  $^\dagger$ QLoRA row here uses the QLoRA *parameterisation without* 4-bit quantisation (a LoRA-equivalent control). The within-family winner is decided not here but in the multi-seed head-to-head with *real* 4-bit QLoRA (Table 2), which shows LoRA and DoRA are statistically tied and 4-bit QLoRA lags behind both. We therefore do not bold a single-seed winner.

| Variant                                                    | CER (%) | WER (%) | $\Delta$ CER (rel %) | Params      | Adapter (MB) | Train (min) |
|------------------------------------------------------------|---------|---------|----------------------|-------------|--------------|-------------|
| <i>Whisper-large-v3 + HUFT</i>                             |         |         |                      |             |              |             |
| (zero-shot)                                                | 29.46   | 49.53   | 0.0                  | 0           | 0            | —           |
| DoRA $r=16$                                                | 13.74   | 29.50   | +53.4                | 16,220,160  | 65.1         | 12.7        |
| LoRA $r=16$                                                | 13.92   | 29.36   | +52.8                | 15,728,640  | 63.0         | 6.7         |
| QLoRA $^\dagger$ $r=16$                                    | 13.96   | 29.86   | +52.6                | 15,728,640  | 63.0         | 6.7         |
| LoHA $r=8$                                                 | 23.99   | 45.05   | +18.6                | 15,728,640  | 63.1         | 8.0         |
| VB-LoRA                                                    | 28.79   | 49.02   | + 2.3                | 125,837,312 | 503.5        | 8.1         |
| AdaLoRA                                                    | 28.96   | 49.10   | + 1.7                | 23,602,176  | 94.6         | 7.5         |
| VeRA                                                       | 29.07   | 48.88   | + 1.3                | 589,824     | 5.1          | 9.0         |
| <i>Qwen3-ASR-1.7B (multilingual production checkpoint)</i> |         |         |                      |             |              |             |
| (zero-shot)                                                | 49.46   | 76.86   | 0.0                  | 0           | 0            | —           |
| QLoRA $^\dagger$ $r=16$                                    | 27.91   | 52.35   | +43.6                | 9,789,440   | 39.2         | 2.2         |
| DoRA $r=16$                                                | 28.51   | 53.65   | +42.4                | 10,063,872  | 40.3         | 3.7         |
| LoRA $r=16$                                                | 28.95   | 52.78   | +41.5                | 9,789,440   | 39.2         | 2.2         |
| LoHA $r=8$                                                 | 43.63   | 72.23   | +11.8                | 9,789,440   | 39.3         | 2.9         |
| VB-LoRA                                                    | 45.90   | 73.46   | + 7.2                | 78,323,712  | 313.4        | 3.0         |
| VeRA                                                       | 48.90   | 77.37   | + 1.1                | 328,448     | 11.3         | 2.4         |
| AdaLoRA                                                    | 49.06   | 76.28   | + 0.8                | 14,689,224  | 58.8         | 2.6         |

*within* that family — and to test QLoRA as it is actually defined — we re-ran LoRA, DoRA and *real* 4-bit NF4 QLoRA over three seeds (42/43/44) on both bases, with per-utterance hypotheses logged for paired significance testing (Table 2). Two findings emerged. **(i) No significant LoRA–DoRA difference was detected.** Their three-seed means differed by  $\leq 0.23$  pp CER on either base, well inside the spread caused by varying the seed, and a 10,000-resample paired bootstrap on the pooled per-utterance hypotheses across the three seeds (deltas computed from unrounded values; resampler seed 0) detected no significant difference (Whisper  $\Delta$ CER +0.03, 95% CI  $[-0.17, +0.25]$ ,  $p=0.79$ ; Qwen3  $\Delta$ CER +0.23, CI  $[-0.50, +0.96]$ ,  $p=0.55$ ). DoRA’s apparent single-seed lead on Whisper in Table 1 did not survive re-seeding — LoRA’s three-seed mean was in fact marginally lower on both bases. We read this as a practical tie rather than proven equivalence: we did not pre-register an equivalence margin, and the intervals are utterance-level

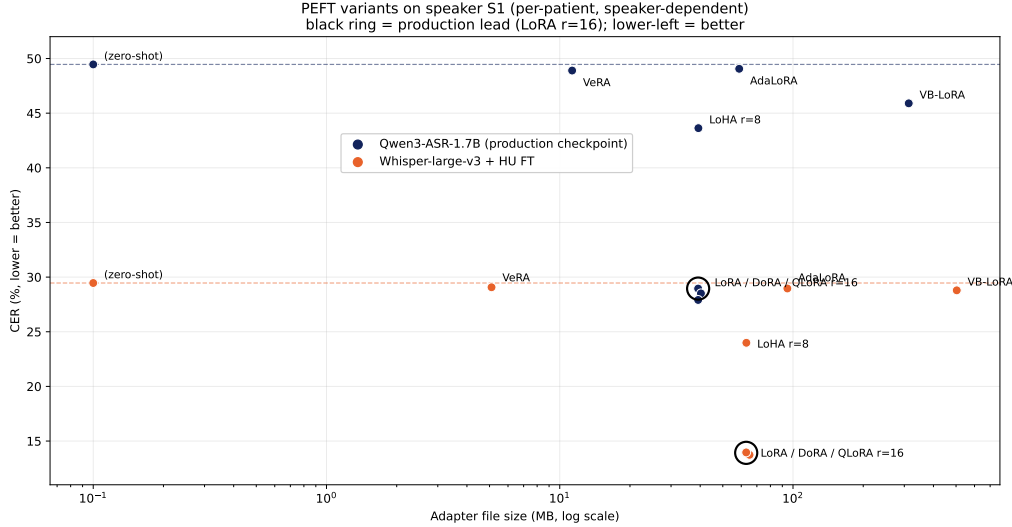


Figure 1: Pareto chart of CER vs adapter size (MB, log axis) for all 16 configurations. Whisper-large-v3 + HU FT configurations are orange circles; Qwen3-ASR production-checkpoint configurations are blue circles. Dashed lines mark the per-base zero-shot CER. The tied top variants LoRA and DoRA ( $r=16$ ) sit on the Pareto front for both bases.

on one speaker’s test split, so they bound system-level uncertainty here, not patient-population variability. (ii) **Real 4-bit QLoRA was consistently worse.** It lost to LoRA on every seed and both bases (+0.69 pp CER on Whisper, +1.99 pp on Qwen3), and — at this 1.5–1.7 billion-parameter scale — yielded no peak-VRAM saving (16.9 vs 14.8 GiB on Whisper; parity on Qwen3). In this small-data per-patient regime the 4-bit base traded accuracy for a memory benefit that did not materialise. The  $\sim 2\times$  absolute gap between the two 4-bit QLoRA CERs (14.56 vs 30.09%) is not quantisation-specific: it tracks the same  $\sim 2\times$  gap seen for LoRA and DoRA (13.86 vs 28.10%) and reflects Qwen3-ASR’s higher zero-shot CER on this speaker (49.46 vs 29.46%), not a quantisation $\times$ architecture interaction; the QLoRA penalty *relative to* LoRA is comparable on both bases (+0.69 pp Whisper, +1.99 pp Qwen3).

#### 4.3. Cross-base variant ranking

Table 3 reports the comparison ranking by CER for each base. The LoRA family dominates on both bases; the storage-efficient (VeRA, VB-LoRA) and budget-reallocation (AdaLoRA) variants under-perform on both.

Table 2: Multi-seed head-to-head (3 seeds 42/43/44, mean  $\pm$  sd) for the three contending variants, with *real* 4-bit NF4 QLoRA. LoRA and DoRA are statistically tied on both bases; 4-bit QLoRA is behind both for every seed.

| Base                     | Variant              | CER (%)          | WER (%)          |
|--------------------------|----------------------|------------------|------------------|
| Whisper-large-v3 + HU FT | LoRA $r=16$          | $13.86 \pm 0.07$ | $29.24 \pm 0.18$ |
|                          | DoRA $r=16$          | $13.90 \pm 0.07$ | $29.26 \pm 0.07$ |
|                          | QLoRA $r=16$ (4-bit) | $14.56 \pm 0.07$ | $30.10 \pm 0.36$ |
| Qwen3-ASR-1.7B (prod.)   | LoRA $r=16$          | $28.10 \pm 0.60$ | $52.28 \pm 0.45$ |
|                          | DoRA $r=16$          | $28.33 \pm 0.30$ | $52.86 \pm 0.46$ |
|                          | QLoRA $r=16$ (4-bit) | $30.09 \pm 0.34$ | $56.42 \pm 0.35$ |

Table 3: Single-seed *comparison* ranking by CER per base (from Table 1; QLoRA here is the non-quantized control). The LoRA family separates cleanly from the rest, but the within-family order is not reliable — on re-seeding with real 4-bit QLoRA, LoRA and DoRA tie and 4-bit QLoRA drops behind both (Table 2).

| Variant                              | Whisper rank | Qwen3 rank |
|--------------------------------------|--------------|------------|
| DoRA $r=16$                          | 1            | 2          |
| LoRA $r=16$                          | 2            | 3          |
| QLoRA <sup>†</sup> $r=16$ (no 4-bit) | 3            | 1          |
| LoHA $r=8$                           | 4            | 4          |
| VB-LoRA                              | 5            | 5          |
| AdaLoRA                              | 6            | 7          |
| VeRA                                 | 7            | 6          |

Within the LoRA family the comparison’s single-seed ordering is unreliable (Table 2): LoRA and DoRA are tied on re-seeding and real 4-bit QLoRA falls behind both. We therefore adopt LoRA as the per-patient production lead on grounds of simplicity and cost (half the Whisper training time of DoRA, no magnitude-vector overhead), with DoRA an alternative with no detected difference (Section 5, finding 2).

#### 4.4. NeMo-backbone negative result

We additionally evaluated two NeMo Granary-pretrained backbones (NVIDIA Parakeet-TDT-0.6B-v3 [29] and Canary-1B-v2 [30]; both licensed under CC-BY-4.0, both natively Hungarian-capable) under simple LoRA fine-tuning on S1’s 262-utterance training pool. Parakeet regresses relative to zero-shot and Canary collapses outright: Parakeet-TDT-v3 + LoRA  $r=16$  on the encoder degrades from 50.59% to 69.07% CER (+18.48 pp; the encoder LoRA broke the RNN-T joint network’s Hungarian prior, producing English/Russian fragment hallucinations); Canary-1B-v2 + LoRA  $r=16$  on

encoder + transformer decoder collapses to 191.22 % CER, with seq2seq EOS collapse (the decoder fails to emit the end-of-sequence token, so generation does not terminate) producing repetition loops (“*a szoba a szoba a szoba...*”) until reaching the `max_new_tokens` limit.

Under the simple LoRA recipes tested, both NeMo backbones regress rather than improve. The tested recipes are aligned with the Whisper and Qwen3 configurations of Section 4: encoder-only ( $r=16$ ) for the RNN-T Parakeet, encoder + transformer-decoder ( $r=16$ ) for the seq2seq Canary, with no per-backbone hyperparameter tuning. The most parsimonious interpretation is that adapter fine-tuning on a model whose pretraining mix has too narrow a Hungarian or atypical-speech buffer rotates the small available adaptation material enough to *break* the existing language prior — and that Whisper and the Qwen3-ASR production checkpoint survive because their broader pretraining mixes leave room to move more efficiently. We deliberately do not claim the failure to be structural in a stronger sense: we have not run deeper LoRA targets (e.g. the RNN-T joint network on Parakeet, cross-attention-only on Canary) or higher-rank LoHA / DoRA variants on these backbones, and we cannot rule out that one of those recipes would recover the regression. The negative result here therefore supports the narrow-pretraining hypothesis under simple LoRA recipes; a definitive per-aetiology multi-LoRA-recipe sweep on NeMo backbones is queued for a follow-up study (Section 7). The integration walls hit when getting NeMo 2.x backbones into a per-patient PEFT recipe (Lightning package mismatch, Lhotse strict-int schema, transformer-decoder linear-layer naming) are documented in the released scripts.

#### 4.5. *Picking the warm base: Qwen3 HU-FT regression*

A natural design for cross-base comparison is to construct an apples-to-apples Hungarian warm base for both Whisper-large-v3 and Qwen3-ASR-1.7B by fine-tuning each on the same 38K-utterance Hungarian pool (Common Voice + FLEURS + Hungarian\_Dysarthria + VoxPopuli\_hu, S1 excluded). The Whisper chain transferred cleanly (zero-shot  $\rightarrow$  HU FT  $\rightarrow$  S1 LoRA = 32.2 %  $\rightarrow$  29.46 %  $\rightarrow$  13.9 % CER on the 107-utterance test split). The Qwen3 chain did not.

The first signal was an initial fine-tune whose final-epoch evaluation reversed the direction of effect: dysarthric CER on S1 rose after the same Hungarian fine-tune that had helped Whisper, rather than falling. We initially abandoned the Qwen3-1.7B + HU FT path, then investigated it properly under a single controlled run to turn that preliminary observation into an

Table 4: Qwen3-ASR-1.7B Hungarian fine-tune trajectory. Clean-Hungarian CER (on a set that is itself inside the fine-tuning pool) holds while dysarthric CER degrades; Section 4.6 shows this preservation is pool-dependent, not selective robustness.

| Checkpoint        | S1 test CER             | CV_Hungarian CER |
|-------------------|-------------------------|------------------|
| Base zero-shot    | 43.61 %                 | <b>7.19 %</b>    |
| 25 % (step 602)   | 54.56 %                 | 9.43 %           |
| 50 % (step 1204)  | 53.99 %                 | 8.06 %           |
| 75 % (step 1806)  | 60.45 %                 | 7.31 %           |
| 100 % (step 2408) | <b>67.16 %</b> (+23.55) | 7.50 % (+0.31)   |

identifiable per-checkpoint trajectory. All Qwen3 HU FT figures we report come from this controlled rerun (Table 4), not from the abandoned preliminary run. For diagnostic purposes, we re-ran the Qwen3 HU FT with intermediate checkpoints (saved after 25 %, 50 %, 75 % and 100 % of the optimiser steps in one epoch) and evaluated each against both the S1 test split (107 dysarthric utterances) and a 50-utterance CV\_Hungarian sample (see Table 4):

The HU FT preserves clean-Hungarian performance to within eval noise (the run-to-run variation in the CER metric) while blowing up dysarthric CER by 23.55 pp absolute. This apparent selectivity is partly an artefact of pool composition: CV\_Hungarian was itself part of the fine-tuning mix, so its stability is not independent evidence of robustness — when clean Hungarian is instead held out of training, it collapses too (Section 4.6, Table 5). We interpret this as an adaptation paradox at the language-adaptation step: a clean-data fine-tune on an LLM-decoder ASR damages dysarthric distributions that the broader base pretraining had implicitly handled. Whisper’s larger weakly-supervised pretraining buffer [25] gives it resistance; Qwen3-ASR-1.7B’s tighter curated pretraining does not. Accordingly, for the Qwen3 configurations we use the **multilingual production Qwen3-ASR-1.7B checkpoint trained on a 10-language pool including TORGO, UASPEECH, EasyCall and other dysarthric corpora** (CER 2.91 % / WER 5.49 % on the held-out multilingual eval) as the warm base, *not* the corrupted Qwen3-1.7B + HU FT.

#### 4.6. Dys-only pool follow-up

To test whether the regression is driven by healthy-control content specifically, we re-ran the HU FT on Hungarian\_Dysarthria only (a 10K-utterance command corpus of Parkinson’s-disease patients collected at the Budapest University of Technology and Economics; no healthy-control recordings). The regression got worse, not better:

Table 5: Pool-composition ablation for the Qwen3 HU FT model.  $\Delta$  denotes the worst-checkpoint change vs the Qwen3-ASR-1.7B zero-shot reference (S1 43.61%, CV\_HU 7.19%). Dys-only training breaks both held-out sets.

| Pool                              | S1 $\Delta$ CER (pp)   | CV_HU $\Delta$ CER (pp)  |
|-----------------------------------|------------------------|--------------------------|
| v1: HC-dominated 4-corpus         | +23.55 (final)         | +0.31 (final, preserved) |
| <b>v2: dys-only Hungarian_Dys</b> | <b>+28.75 (ckpt75)</b> | <b>+22.55 (ckpt75)</b>   |

S1 CER climbed +28.75 pp at the 75% checkpoint (still rising), and CV\_HU also collapsed (+22.55 pp) because nothing in the training pool looks like clean Hungarian read speech. v1 had preserved the performance on CV\_HU by coincidence — CV\_Hungarian was inside the v1 training mix. v2 over-fits to a 47-speaker command-style PD corpus that is too narrow to either preserve clean-Hungarian read speech or transfer to S1’s post-stroke read sentences. The mechanism is therefore *not* “healthy-control content is bad” but “*narrow language fine-tunes on Qwen3-1.7B were fragile in both pools tested*” — a corollary of finding 7 in Section 5.

#### 4.7. Enrollment-time scaling

The full-pool result (32.68 min train audio  $\rightarrow$  13.74% CER) answers a research question but not the clinical one: *how little enrollment audio is enough?* We characterise this on the per-patient recipe (Whisper-large-v3 + HU FT + DoRA  $r=16$ , which LoRA matches; Section 4.2) by subsampling S1’s train pool by accumulated audio-duration to target wall-clock minute budgets of {1, 3, 5, 10, 15, 30} min, with three random seeds per grid point. For grid points  $\leq 21$  min we draw read-sentence utterances only (content-matched to the test split); for 30 min we augment the data with narrative (matches the full-pool composition); 15 min is reported in both compositions as a controlled comparison (Table 6, Figure 2).

**Findings from the enrollment grid.** (i) Clinically realistic 3–5 min enrollment yields 22–23% CER — a  $\sim 7$  pp absolute /  $\sim 24\%$  relative reduction from zero-shot, which is 45.6% of the reduction reached by 30 min. (ii) Gains continue well beyond the first few minutes: CER falls to 18.87% at 10 min and 14.17% at 30 min, so more than half of the total zero-shot-to-30-min reduction accrues after the 5-min point (tripling 10  $\rightarrow$  30 min buys a further  $\sim 4.7$  pp). (iii) Content composition has zero effect at 15 min: read-only 17.17% vs mixed 17.05% is inside the seed-noise band. (iv) Seed stability is tight (maximal standard deviation is 1.29 at 5 min, in all other cases it is

Table 6: Enrollment-time grid for DoRA  $r=16$  on Whisper-large-v3 + HU FT. Three seeds per configuration; mean  $\pm$  standard deviation across seeds. Zero-shot reference: 29.46 % CER.

| Min | Pool  | CER (%)          | WER (%)          |
|-----|-------|------------------|------------------|
| 1   | read  | $27.68 \pm 0.31$ | $47.36 \pm 0.22$ |
| 3   | read  | $23.12 \pm 0.17$ | $43.99 \pm 0.44$ |
| 5   | read  | $22.49 \pm 1.29$ | $41.55 \pm 0.36$ |
| 10  | read  | $18.87 \pm 0.54$ | $36.88 \pm 0.78$ |
| 15  | read  | $17.17 \pm 0.28$ | $34.35 \pm 0.47$ |
| 15  | mixed | $17.05 \pm 0.13$ | $33.57 \pm 0.11$ |
| 30  | mixed | $14.17 \pm 0.64$ | $30.01 \pm 0.78$ |

Table 7: Same-base comparison on Whisper-large-v3 + HU FT (107-utterance test). LoRA and zero-shot are from Tables 1–2; full and decoder-only fine-tuning are three seeds (42/43/44, mean  $\pm$  sd) with learning rates tuned on the 40-utterance validation split. Serialised size is the bf16 artifact written per patient.

| Method               | CER (%)          | WER (%)          | Trainable | Serial. (MB) | Train (min) |
|----------------------|------------------|------------------|-----------|--------------|-------------|
| Zero-shot            | 29.46            | 49.53            | 0         | –            | –           |
| Decoder-only full FT | $22.96 \pm 0.08$ | $49.70 \pm 0.75$ | 906 M     | 3087         | 4.2         |
| LoRA $r=16$          | $13.86 \pm 0.07$ | $29.24 \pm 0.18$ | 15.7 M    | 63           | 6.7         |
| Full fine-tune       | $11.43 \pm 0.50$ | $27.55 \pm 0.94$ | 1.54 B    | 3087         | 7.6         |

$\leq 0.78$ ). The 30-min mixed three-seed mean (14.17 %) matches the full-pool single-seed Section 4 result (13.74 %) within 0.5 pp.

#### 4.8. Same-base comparison: LoRA vs full and decoder-only fine-tuning

To weigh per-patient LoRA against the two alternatives it is usually measured against — full fine-tuning and full-parameter partial fine-tuning — we ran both on the identical base (Whisper-large-v3 + HU FT), the identical 262-utterance pool, and the identical greedy `norm_hu` scoring pipeline, three seeds each, with learning rates tuned on the 40-utterance validation split (Table 7). Full fine-tuning of all 1.54 B parameters is the most accurate adaptation of this base, giving  $11.43 \% \pm 0.50$  CER, 2.43 pp below LoRA’s 13.86 %, but writes a 3.1 GB checkpoint file per patient compared to LoRA’s 63 MB adapter. Full-parameter fine-tuning of the decoder with the encoder frozen is far worse ( $22.96 \% \pm 0.08$  CER, its word error rate essentially unchanged from the 29.46 % / 49.53 % zero-shot despite training 906 M parameters), which already signals that the encoder — not raw parameter count — is what adaptation needs here.

To locate where LoRA’s residual gap to full fine-tuning lies, we ran an



## Enrollment-time scaling: Whisper-v3+HU + DoRA $r=16$ on Spe

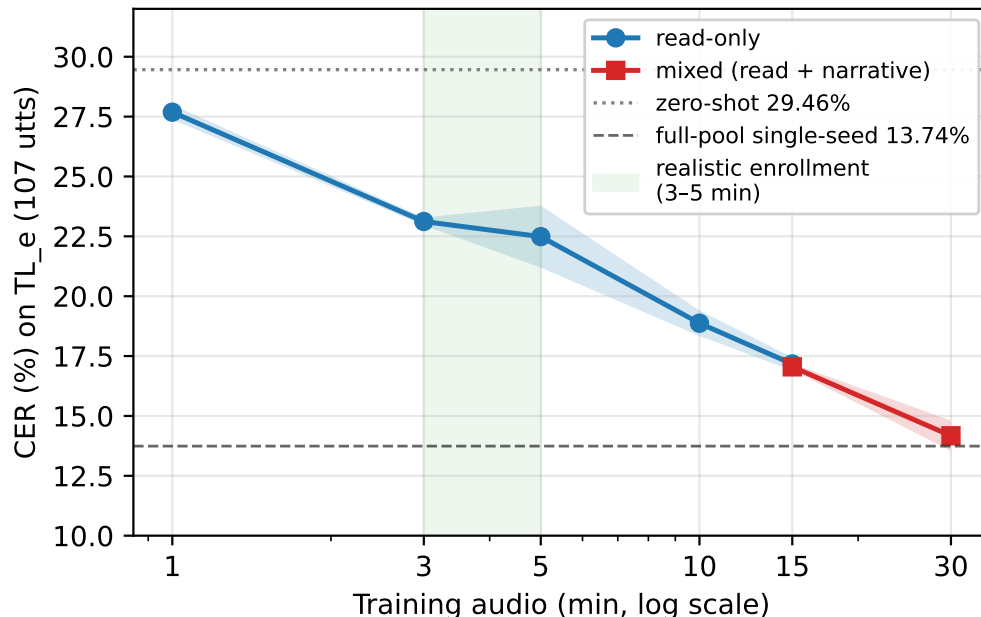


Figure 2: CER vs train-pool minutes for DoRA  $r=16$  on Whisper-large-v3 + HU FT, three seeds per grid point. About 45.6 % of the zero-shot-to-30-min CER reduction is reached within the first  $\sim 5$  min; performance keeps improving after 10 and even 30 min.

adaptation-surface ladder on the same base and recipe, changing only the LoRA target set (Table 8). Restricting LoRA to the decoder attention alone — freezing the encoder — collapses to  $24.21\% \pm 0.06$  CER, no better than the encoder-frozen decoder full fine-tune ( $22.96\%$ ): encoder-attention adaptation is the largest single contributor, and it is precisely the encoder self-attention that the standard LoRA configuration (Table 1) already adapts, recovering 10.15 pp to  $14.05\% \pm 0.09$ . Adding the feed-forward projections (`fc1`/`fc2`) to the LoRA target set recovers a further 1.96 pp to  $12.09\% \pm 0.34$  — within 0.66 pp of full fine-tuning ( $11.43\%$ ) — at 28.8 M parameters and 115 MB, roughly 1.9 % of the parameters and 3.7 % of the storage of the full model (WER 27.38 vs 27.55). The full-fine-tuning advantage is therefore a feed-forward-plus-full-rank effect, not an encoder-attention effect: encoder attention is the single largest LoRA lever but is already present in the default configuration, and about three-quarters of the residual full-fine-tuning gain

Table 8: LoRA target-set attribution ladder on Whisper-large-v3 + HU FT (107-utterance test, three seeds, mean  $\pm$  sd, fixed  $1 \times 10^{-4}$  recipe as in Table 1). Only the LoRA target modules change; each row adds a module group to the one above. Full fine-tuning is shown as an anchor. This ladder is a single, internally consistent set of runs executed together so its deltas are directly comparable; the “+ Encoder attention” row is its re-run of the main LoRA configuration reported in Table 2 (13.86 %), and the 0.19 pp difference between the two is run-to-run variation within the seed spread.

| LoRA target set               | Params | Adapter (MB) | CER (%)          | WER (%)          |
|-------------------------------|--------|--------------|------------------|------------------|
| Decoder attention only        | 10.5 M | 42           | $24.21 \pm 0.06$ | $44.81 \pm 0.15$ |
| + Encoder attention (default) | 15.7 M | 63           | $14.05 \pm 0.09$ | $29.50 \pm 0.10$ |
| + Feed-forward (fc1/fc2)      | 28.8 M | 115          | $12.09 \pm 0.34$ | $27.38 \pm 0.48$ |
| Full fine-tune (anchor)       | 1.54 B | 3087         | $11.43 \pm 0.50$ | $27.55 \pm 0.94$ |

is recoverable simply by extending the LoRA target set to the feed-forward blocks, at minimal additional storage. Parameter-efficient adaptation thus reaches near-full-fine-tuning accuracy at a small fraction of the per-patient storage: the 63 MB default trades 2.43 pp for a  $\approx 49\times$  storage reduction, and the 115 MB feed-forward-augmented variant trades only 0.66 pp for a  $\approx 27\times$  reduction. (Learning rates for full and decoder-only fine-tuning were validation-tuned; the LoRA cells use the paper’s fixed  $1 \times 10^{-4}$ .)

Because the validation and evaluation splits overlap exactly with Mihajlik et al. [14] (Section 3), their results provide historical context on the same speaker and 107-utterance evaluation set. Using the 195 read training utterances, they report 8.9 % CER for full fine-tuning of the monolingual FastConformer\_Hu and 14.7 % for full fine-tuning of Whisper-large-v3-turbo (Whisper-turbo, in that study); their best results with synthetic TTS augmentation are 7.3 % and 12.2 % respectively. Our LoRA configuration reports 13.86 % CER using a larger training pool (262 utterances including 67 narrative), a different Whisper checkpoint with a Hungarian warm start, and a different optimisation procedure. The reported value is numerically lower than their real-data-only Whisper result, but the experiments are not controlled or directly comparable and do not establish that parameter-efficient adaptation outperforms full fine-tuning; our own same-base comparison (Table 7) makes that controlled statement directly, and agrees with theirs that full fine-tuning is the more accurate of the two. Their FastConformer\_Hu result remains substantially lower than ours; adapter adaptation of that checkpoint has not been tested, and the NeMo experiments in Section 4.4 concern different backbones. Their FastConformer\_Hu checkpoint is not publicly released,

mirroring our own internal Qwen3-ASR production checkpoint: each study’s strongest non-Whisper system rests on a private model, so the two are symmetric in reproducibility. Their synthetic-TTS route is a complementary data-centric axis whose interaction with per-patient adapters is untested. The trained LoRA artifact is 63 MB against a full per-patient model checkpoint under full fine-tuning; a fleet-level total-storage analysis across many patients is not conducted here.

## 5. Discussion

We list our seven findings and their production / clinical-deployment implications.

**1. The LoRA family wins; the rest fall short of it.** In the screen (Table 1) LoRA, DoRA and the QLoRA parameterisation cluster tightly while the other four lag well behind (the within-family verdict is finding 2). Of the remaining four variants, LoHA is the closest: +18.6 % relative CER reduction on Whisper (29.46  $\rightarrow$  23.99 % CER) and +11.8 % on Qwen3, so LoHA fails relative to the LoRA family, not in absolute terms. AdaLoRA, VeRA and VB-LoRA all land within  $\sim 1$  pp of zero-shot on Whisper and within  $\sim 3$  pp on Qwen3, i.e. they are not useful adaptation alternatives. The per-patient small-data regime ( $\sim 80$  optimiser steps) is the binding constraint: methods that need many steps to converge to an internal allocation or scaling decision (AdaLoRA, VeRA, VB-LoRA) have too small a budget, and the Hadamard reparameterisation (LoHA) does not recover the speaker-dependent dysarthric distribution shift the way it recovers a speaker-disjoint children’s-ASR shift (as in [6]).

**2. LoRA and DoRA tie; we choose LoRA for future work; 4-bit QLoRA underperforms.** The multi-seed head-to-head (Section 4.2, Table 2) settles the within-family question that the single-seed screen could not. Across three seeds, LoRA and DoRA are statistically indistinguishable on both bases (paired bootstrap  $p=0.79$  Whisper,  $p=0.55$  Qwen3), and LoRA’s mean is in fact marginally lower on each — DoRA’s single-seed Whisper lead in Table 1 did not survive re-seeding. We therefore adopt LoRA as the per-patient production lead: it matches DoRA in accuracy while being simpler, carrying no magnitude-vector overhead, and training in roughly half the Whisper wall-clock time (6.7 vs 12.7 min). DoRA remains an alternative with no detected difference for anyone who prefers its magnitude/direction decomposition. Real 4-bit NF4 QLoRA is consistently worse than both

on every seed (+0.69 pp Whisper, +1.99 pp Qwen3 CER) and, at this 1.5–1.7 billion-parameter scale, saves no peak VRAM, so we do not recommend 4-bit quantisation in this small-data per-patient regime. We default our production per-patient template to LoRA  $r=16$  on both bases, pending a later multi-speaker validation.

**3. Storage-efficient variants do not transfer to the per-patient application.** VeRA (5 MB adapter on Whisper, 11 MB on Qwen3) and VB-LoRA (503 MB on Whisper, 313 MB on Qwen3) both land within  $\sim 1$  pp of zero-shot on Whisper and under 4 pp on Qwen3 — effectively no adaptation happens. VB-LoRA’s large serialised adapters are a serialisation artefact, not a deployment footprint: the size is dominated by dense per-module vector-selection logits (125.8 M parameters), while the shared vector bank has only 8,192 parameters; PEFT’s default `save_only_topk_weights=false` stores the full logits, and setting it true collapses the adapter to a few MB. The per-patient data budget is too small for VeRA’s frozen-random-projection scheme to converge to useful per-layer scales, and VB-LoRA’s shared vector bank does not transfer to single-speaker training.

**4. AdaLoRA needs more steps than a per-patient scenario gives.** AdaLoRA’s rank-reallocation budget converges to a near-zero update within five epochs; final adapter is dense (94.6 MB on Whisper, 58.8 MB on Qwen3) but its quality is no better than that of the zero-shot solution.

**5. Warm-base choice transfers oppositely across bases.** Hungarian fine-tuning of the base *helps* Whisper (the HU FT-merged Whisper-large-v3 zero-shots S1 at 29.46 % vs  $\sim 32.24$  % for the raw v3) but *hurts* Qwen3-ASR-1.7B (+23.55 pp regression on S1, Section 4.5). The choice of warm base must be made per-base; reusing a clean-language fine-tune across architectures is not safe.

**6. Ankita’s LoHA result does not transfer.** Ankita et al. [6] report LoHA as the best PEFT variant for children’s ASR on Whisper. Our LoHA configuration is 10.07 pp worse than LoRA on the same Whisper-v3 base in our speaker-dependent dysarthric condition. The closest mechanistic interpretation is that LoHA’s effective-rank boost helps speaker-disjoint distribution shift where many speakers must be modelled simultaneously, but is a burden in the speaker-dependent regime where there is one distribution shift and only 80 steps in which to perform it.

**7. Pretraining-mix breadth appears to matter more than the actual architecture — under the recipes tested.** The NeMo Section 4.4 negative result + the Qwen3 HU FT regression Section 4.5 cohere as a single

tentative reading: for dysarthric PEFT, the breadth of the backbone’s pre-training mix may matter more than its architecture or its FLEURS / Common Voice score on clean speech. Whisper-large-v3’s 5-million-hour in-the-wild mix (the noisily-labelled audio used for its weakly-supervised pretraining) has a productive adaptation surface for atypical speech under our recipe; the Granary-trained NeMo backbones and Qwen3-ASR-1.7B did not adapt, under the same simple recipes. We frame this as a recipe-level observation, not a structural claim: we have not tried deeper adapter targets or higher ranks on those backbones. The cautious corollary for production base selection is that clean-speech leaderboards are not reliable indicators of dysarthric-PEFT readiness.

**Clinical deployment: enrollment audio.** The Section 4.7 enrollment-time sweep answers the practical clinical question of how much patient audio a clinic needs to collect. A 3–5 min recording session reduces CER from the 29.46 % zero-shot baseline to  $\sim 22$ –23 %, which is 45.6 % of the reduction reached by 30 min. Further enrollment continues to help substantially — 18.87 % at 10 min and 14.17 % at 30 min — so more than half of the total gain accrues after the first few minutes, and 30 min is the largest condition tested rather than a plateau. For per-patient deployment we therefore treat a  $\sim 3$ –5 min session as a useful minimum rather than a sweet spot: it delivers a substantial CER reduction quickly, and more audio materially helps where the patient can provide it. *Caveat:* this enrollment curve is measured on a single speaker, in a single language, with severe post-stroke dysarthria. The shape of the curve at other severities and aetiologies is a question we defer to follow-up work (Section 7).

**Limitations.** This study rests on a single speaker of a single language with severe dysarthria, and uses a fixed five-epoch training budget with greedy decoding. We apply no content-mix balance control at the short-data end beyond the 15-min read-vs-mixed contrast. Multi-patient generalisation and the FiLM-vs-LoRA fleet-Pareto question are deferred to future work (see Section 7).

## 6. Practical recipe and release

The deliverable accompanying this paper is a small standalone repository (`per-patient-peft`) that bundles:

- Separate training recipes for each variant (drop-in replacement for plain-LoRA per-patient pipelines, with the LoRA  $r=16$  recipe as the default

entry point on both Whisper-large-v3 and the Qwen3-ASR production checkpoint).

- A patient-side runtime that loads the shared base plus the small per-patient adapter and transcribes audio; the base weights (including the bulk of the audio encoder) are cached once and shared across patients, with only the low-rank adapter stored per patient.
- A simple “adapter manager” for the multi-patient case (one base, many adapters, switchable at inference time).
- The locked PEFT-variant Pareto chart and summary table, plus the enrollment-grid script.

**What will be released (source-available, on publication):** All scripts, recipes, training configurations, the Pareto plotting script and the enrollment-grid runner, under a research-use licence (commercial use reserved pending a separate commercial track). We describe this as source-available rather than open-source, since the licence restricts field of use.

**What is restricted:** The S1 corpus, all adapter weights trained on it, and the per-utterance result JSON files (which embed verbatim reference transcripts) are covered by the signed Data Sharing Agreement with the data subject, which allows research use and permits onward transfer only with the data subject’s written consent; we therefore do not redistribute them openly. Adapter weights and per-utterance JSON files are not part of the open release, but are available to bona fide researchers on request, subject to the data subject’s written consent and a research-use DSA mirroring the original. Aggregate summary tables, Pareto coordinates, and the main results in this paper are public.

**Choosing the production variant.** LoRA is our default on both bases. The multi-seed head-to-head (Table 2) shows LoRA and DoRA are statistically tied, so we take the simpler, cheaper of the two; DoRA can be a drop-in alternative for anyone who prefers it. We do *not* recommend 4-bit QLoRA in this regime: it is worse on every seed and both bases and saves no memory at this model scale.

## 7. Conclusion and future work

We have presented a single-speaker production case study — the first speaker-dependent, per-patient PEFT comparison on dysarthric speech across

seven LoRA-family variants and two production ASR bases. A single-seed comparison isolated the LoRA family (LoRA, DoRA, QLoRA) from the other four variants; a three-seed head-to-head with *real* 4-bit NF4 QLoRA then detected no significant LoRA–DoRA difference on either base (paired bootstrap  $p > 0.5$ ; Whisper 13.86 % / 13.90 % CER, Qwen3 28.10 % / 28.33 %), while true 4-bit QLoRA proved worse on every seed (14.56 % / 30.09 %) with no memory saving at this scale. We prefer the simpler, cheaper LoRA as the per-patient production lead, with DoRA an alternative with no detected difference. The other four variants (LoHA, AdaLoRA, VeRA, VB-LoRA) did not reach the LoRA family within the  $\sim 80$ -optimiser-step budget the per-patient regime allows, though LoHA still delivers an 18.6 % relative CER reduction on Whisper. A 6-point enrollment-time grid on the production recipe shows  $\sim 5$  min of patient audio captures 45.6 % of the zero-shot-to-30-min CER reduction (a  $\sim 7$  pp CER reduction), with substantial further gains to 30 min, on a single severe post-stroke speaker. We caution that all fleet-level recommendations here rest on just one speaker and await the multi-patient validation described below.

Future work will extend the comparison to a multi-patient cohort spanning aetiologies, enabling a proper benchmark against FiLM speaker-conditioning [22] and a fleet-level Pareto test over storage, quality, and multi-task retention. A definitive multi-LoRA-recipe sweep on the NeMo backbones (Section 4.4) — deeper LoRA targets, higher-rank LoHA / DoRA — is also queued as a follow-up: under the simple recipes we tested, both NeMo backbones regress, but the structural interpretation is not yet definitive.

## Acknowledgements

We thank the speaker, S1, for contributing the corpus under a research-use Data Sharing Agreement, and the host institution for hosting the data collection.

## Ethics and data statement

This study uses recordings that the single participant (S1, a pseudonym) made of his own voice and contributed for this research under written informed consent and a signed Data Sharing Agreement (research use only; no redistribution of the audio or its derivatives), including their reuse in this study and in the related work of Mihajlik et al. [14]. Because the study analyses

one individual’s own, self-recorded speech, with that individual’s informed consent and no other human participants and no clinical intervention, it did not require institutional ethics-committee approval, and none was sought. Because we disclose that S1 is the same participant as in Mihajlik et al. [14], the de-identification is pseudonymous rather than anonymous — a determined reader could infer the participant’s identity — so we do not describe the data as anonymised. We use the data solely for the stated research purpose, make no attempt at re-identification, and process it in compliance with the UK Data Protection Act 2018 / UK GDPR; the trained adapters and per-utterance outputs are withheld under the same agreement (Section 6).

### **Declaration of generative AI and AI-assisted technologies in the manuscript preparation process**

The first author communicates exclusively via AI-assisted eye-gaze interface due to motor neurone disease. Generative AI (Claude Opus 5, Anthropic) was used as an assistive communication tool throughout the research process: experimental design, code development, data analysis, statistical computation, figure generation, and manuscript drafting. All scientific decisions, interpretations, and conclusions were made by the authors. The AI served as an accessibility tool enabling a researcher with severe physical disability to conduct computational research — analogous to a screen reader for visually impaired researchers. No AI-generated content was presented without author review and verification. After using this tool/service, the author(s) reviewed and edited the content as needed and take(s) full responsibility for the content of the published article. AI use in the research process is described in Section 3.8.

### **CRediT authorship contribution statement**

**Bernard Muller:** Conceptualization, Methodology, Software, Formal analysis, Investigation, Visualization, Writing – original draft. **László Tóth:** Resources, Data curation, Validation, Writing – review & editing. **LaVonne Roberts:** Project administration, Supervision, Writing – review & editing.

### **Declaration of competing interest**

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work



reported in this paper. The Scott-Morgan Foundation develops the per-patient dysarthric-ASR system described here and reserves commercial rights on the released code under the research-use licence; no author receives personal income from it.

## Data availability

The S1 corpus, the adapters trained on it, and the per-utterance outputs are restricted under a signed Data Sharing Agreement and are not openly redistributed (Section 6); they are available to bona fide researchers on request, subject to the data subject’s written consent and a research-use agreement mirroring the original. The training scripts, per-variant configurations, and the Pareto / enrollment runners will be released, source-available under a research-use licence, on publication. Aggregate summary tables and the numbers reported in this paper are public.

## Funding

This work was carried out as part of the research programme of The Scott-Morgan Foundation; it received no specific grant from public, commercial, or not-for-profit funding agencies.

## References

- [1] T. Matsushima, Dutch Dysarthric Speech Recognition: Applying Self-Supervised Learning to Overcome the Data Scarcity Issue, Master’s thesis, University of Groningen (Campus Fryslân), Voice Technology, 2022. URL: <https://campus-fryslan.studenttheses.ub.rug.nl/211/>, speaker-dependent SSL (wav2vec2 / XLSR-53) re-fine-tuning on Dutch dysarthric speech. Accessed 2026-06.
- [2] J. Qi, H. Van hamme, Parameter-efficient dysarthric speech recognition using adapter fusion and householder transformation, in: Proc. Interspeech 2023, 2023, pp. 151–155. doi:10.21437/interspeech.2023-1627. [arXiv:2306.07090](https://arxiv.org/abs/2306.07090), target-speaker dysarthric adaptation via adapter fusion; Householder reparameterisation of the fusion value component at  $\sim 1/3$  the parameters.

- [3] D. Wagner, I. Baumann, N. Engert, S. Lee, E. Nöth, K. Riedhammer, T. Bocklet, Personalized fine-tuning with controllable synthetic speech from LLM-generated transcripts for dysarthric speech recognition, in: Proc. Interspeech 2025, 2025, pp. 3294–3298. doi:10.21437/interspeech.2025-2155. arXiv:2505.12991, compares full fine-tuning, LoRA, and AdaLoRA for dysarthric ASR; AdaLoRA outperforms both.
- [4] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, W. Chen, LoRA: Low-rank adaptation of large language models, in: International Conference on Learning Representations (ICLR), 2022. URL: <https://openreview.net/forum?id=nZeVKeeFYf9>.
- [5] Q. Zhang, M. Chen, A. Bukharin, N. Karampatziakis, P. He, Y. Cheng, W. Chen, T. Zhao, AdaLoRA: Adaptive budget allocation for parameter-efficient fine-tuning, in: International Conference on Learning Representations (ICLR), 2023. URL: <https://arxiv.org/abs/2303.10512>. arXiv:2303.10512.
- [6] Ankita, K. M. Bharadwaj, S. Azim, N. Adiga, S. Shahnawazuddin, Exploring LoRA variants to adapt Whisper models for robust recognition of children’s speech, Speech Communication 181 (2026) 103408. doi:10.1016/j.specom.2026.103408, article number 103408.
- [7] N. Hyeon-Woo, M. Ye-Bin, T.-H. Oh, FedPara: Low-rank Hadamard product for communication-efficient federated learning, in: International Conference on Learning Representations (ICLR), 2022. arXiv:2108.06098, origin of the Hadamard-product low-rank parameterisation; the PEFT library’s “LoHa” adapter derives from this work. We cite it as the Hadamard-product antecedent, not as a paper titled “LoHA”. Citekey reflects the PEFT variant name, not the venue year (2022).
- [8] T. Dettmers, A. Pagnoni, A. Holtzman, L. Zettlemoyer, QLoRA: Efficient finetuning of quantized LLMs, in: Advances in Neural Information Processing Systems (NeurIPS), 2023. arXiv:2305.14314.
- [9] S.-Y. Liu, C.-Y. Wang, H. Yin, P. Molchanov, Y.-C. F. Wang, K.-T. Cheng, M.-H. Chen, DoRA: Weight-decomposed low-rank adaptation, in: International Conference on Machine Learning (ICML), 2024. arXiv:2402.09353.

- [10] D. J. Kopiczko, T. Blankevoort, Y. M. Asano, VeRA: Vector-based random matrix adaptation, in: International Conference on Learning Representations (ICLR), 2024. URL: <https://openreview.net/forum?id=NjNfLdxr3A>. arXiv:2310.11454.
- [11] Y. Li, S. Han, S. Ji, VB-LoRA: Extreme parameter efficient fine-tuning with vector banks, arXiv preprint arXiv:2405.15179 (2024). arXiv:2405.15179.
- [12] Y. Jiang, T. Wang, X. Xie, J. Liu, W. Sun, N. Yan, H. Chen, L. Wang, X. Liu, F. Tian, Perceiver-Prompt: Flexible speaker adaptation in Whisper for Chinese disordered speech recognition, in: Proc. Interspeech 2024, 2024, pp. 2025–2029. doi:10.21437/interspeech.2024-852. arXiv:2406.09873.
- [13] K. El Hajal, E. Hermann, S. Hovsepyan, M. Magimai-Doss, Un-supervised rhythm and voice conversion to improve ASR on dysarthric speech, in: Proc. Interspeech 2025, 2025, pp. 2760–2764. doi:10.21437/interspeech.2025-2069. arXiv:2506.01618.
- [14] P. Mihajlik, É. Székely, P. Barta, M. S. Kádár, G. Dobsinszki, L. Tóth, Improved dysarthric speech to text conversion via TTS personalization, in: Proc. 33rd European Signal Processing Conf. (EUSIPCO), 2025, pp. 521–525. doi:10.23919/eusipco63237.2025.11226704. arXiv:2508.06391, personalised Hungarian dysarthric ASR case study.
- [15] J. Shor, D. Emanuel, O. Lang, O. Tuval, M. Brenner, J. Cattiau, F. Vieira, M. McNally, T. Charbonneau, M. Nollstadt, A. Hassidim, Y. Matias, Personalizing ASR for dysarthric and accented speech with limited data, in: Proc. Interspeech 2019, 2019, pp. 784–788. doi:10.21437/Interspeech.2019-1427. arXiv:1907.13511.
- [16] J. Tobin, K. Tomanek, Personalized automatic speech recognition trained on small disordered speech datasets, in: ICASSP 2022 – 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), IEEE, 2022, pp. 6637–6641. doi:10.1109/ICASSP43922.2022.9747516. arXiv:2110.04612.
- [17] K. Tomanek, V. Zayats, D. Padfield, K. Vaillancourt, F. Biadsy, Residual adapters for parameter-efficient ASR adaptation to atypical and

- accented speech, in: Proc. 2021 Conf. on Empirical Methods in Natural Language Processing (EMNLP), Association for Computational Linguistics, 2021, pp. 6751–6760. doi:10.18653/v1/2021.emnlp-main.541. arXiv:2109.06952.
- [18] G. Joseph, A. Baby, Speaker personalization for automatic speech recognition using weight-decomposed low-rank adaptation, in: Proc. Interspeech 2024, 2024, pp. 2875–2879. doi:10.21437/Interspeech.2024-1434.
  - [19] A. Baby, G. Joseph, S. Singh, Robust speaker personalisation using generalized low-rank adaptation for automatic speech recognition, in: ICASSP 2024 – 2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), IEEE, 2024, pp. 11381–11385. doi:10.1109/ICASSP48485.2024.10446630.
  - [20] N. Pokel, P. Moure, R. Boehringer, S.-C. Liu, Y. Gao, Variational low-rank adaptation for personalized impaired speech recognition, 2025. doi:10.48550/arXiv.2509.20397. arXiv:2509.20397.
  - [21] C. Huber, L. Kernahan, A. Waibel, Adapting foundation ASR models to dysarthric speech: A case study, 2026. doi:10.48550/arXiv.2606.31722. arXiv:2606.31722.
  - [22] F. López, S. Kesiraju, J. Luque, FiLM-based speaker conditioning of a SpeechLLM for pathological speech recognition, arXiv preprint arXiv:2606.06211 (2026). arXiv:2606.06211.
  - [23] E. Perez, F. Strub, H. de Vries, V. Dumoulin, A. Courville, FiLM: Visual reasoning with a general conditioning layer, in: Proc. AAAI Conf. on Artificial Intelligence, volume 32, 2018. doi:10.1609/aaai.v32i1.11671. arXiv:1709.07871.
  - [24] K. L. Stipancic, K. M. Palmer, H. P. Rowe, Y. Yunusova, J. D. Berry, J. R. Green, “you say severe, I say mild”: Toward an empirical classification of dysarthria severity, Journal of Speech, Language, and Hearing Research 64 (2021) 4718–4735. doi:10.1044/2021\_JSLHR-21-00197.
  - [25] A. Radford, J. W. Kim, T. Xu, G. Brockman, C. McLeavey, I. Sutskever, Robust speech recognition via large-scale weak supervision, in: International Conference on Machine Learning (ICML), 2023. arXiv:2212.04356.

- [26] X. Shi, X. Wang, Z. Guo, Y. Wang, P. Zhang, et al., Qwen3-ASR technical report, arXiv preprint arXiv:2601.21337, 2026. [arXiv:2601.21337](#), qwen Team, Alibaba Cloud. Documents the public Qwen3-ASR-1.7B / 0.6B base models (52 languages). The internal production checkpoint used in this work is a separate dysarthric-pool fine-tune of the 1.7B base and is not part of that report.
- [27] S. Mangrulkar, S. Gugger, L. Debut, Y. Belkada, S. Paul, B. Bossan, PEFT: State-of-the-art parameter-efficient fine-tuning methods, Software, <https://github.com/huggingface/peft> (accessed 2026-06), 2023.
- [28] T. Wolf, L. Debut, V. Sanh, J. Chaumond, C. Delangue, A. Moi, et al., Transformers: State-of-the-art natural language processing, in: Proc. 2020 Conf. on Empirical Methods in Natural Language Processing: System Demonstrations (EMNLP), 2020, pp. 38–45. doi:10.18653/v1/2020.emnlp-demos.6. [arXiv:1910.03771](#), software: <https://github.com/huggingface/transformers>.
- [29] NVIDIA NeMo Team, Parakeet-TDT-0.6B-v3: Multilingual token-and-duration transducer, Model card, Hugging Face, <https://huggingface.co/nvidia/parakeet-tdt-0.6b-v3> (accessed 2026-06), 2025.
- [30] NVIDIA NeMo Team, Canary-1B-v2: Multilingual speech recognition and translation, Model card, Hugging Face, <https://huggingface.co/nvidia/canary-1b-v2> (accessed 2026-06), 2025.