

EVIGEN: Predictive Evidence Scaffolding for Verifiable Clinical Rationale Generation

Fengnan Li*, Heman Burre*, Liwen Sun, Roshni Varma, Matthew M. Engelhard

Duke University

{fengnan.li, heman.burre, l.sun, roshni.varma, m.engelhard}@duke.edu

Abstract

Longitudinal electronic health records (EHRs) capture years of patient history across notes, codes, labs, and procedures, and contain evidence needed to reason about likely clinical outcomes. However, comprehensive clinician review of these records is impractical, and LLM-based processing is costly and often unreliable, missing some relevant observations while hallucinating others. We therefore propose EVIGEN, a three-layer framework for verifiable clinical rationale generation that addresses these challenges. The **first layer** is a patient-conditioned retriever that uses learnable queries to find evidence *predictive* of, not just textually relevant to, a clinical outcome and ranks it by prediction attribution scores. The **second layer** is an LLM generator that consumes this ranked evidence as a scaffold to produce a clinical rationale grounded in the retrieved spans. The **third layer** is a process-supervised verifier that checks the generated rationale at the reasoning-step level, flagging unreliable claims. Across three medical prediction datasets, EVIGEN improves prediction performance and rationale faithfulness over full-context LLM and RAG baselines, and is preferred by clinical reviewers in a usability evaluation.¹

1 Introduction

Electronic health records (EHRs) contain rich information for clinical assessment, diagnosis, and risk prediction (Mohsen et al., 2022; Li et al., 2022; Engelhard et al., 2023). A patient’s record often spans years of care and includes diagnoses, laboratory results, procedures, medications, and free-text notes. While some clinical decisions can be made from a single encounter, others depend on sparse evidence distributed across the record (Kruse et al., 2025). For example, in pediatric ADHD assessment (Figure 4), relevant evidence includes birth encounter

* Equal contribution.

¹Code is available at <https://github.com/engelhard-lab/EviGen>

[Prediction + Explanation]

This is a prediction of ADHD, with an estimated probability of 0.8417. Elevated ADHD risk is supported by a family history of ADHD and high overall neurodevelopmental risk from very preterm birth.

[Predictive Factors + Evidence-Based Reasoning]

- 1 • **Factor summary:** Family history of ADHD.
• **Supporting evidence:** “Family history includes ADD / ADHD in his brother, father, and sister.” (note_id: xxx)
• **Reasoning:** A strong family history of ADHD increases the likelihood of the patient being diagnosed with ADHD.
• **Attribution score:** +0.3614
- 2 • **Factor summary:** Preterm birth at 32 weeks gestation.
• **Supporting evidence:** “Jeremiah is 2 y.o. 10 m.o. male (ex-32 weeker).” (note_id: xxx)
• **Reasoning:** Very preterm birth (<34 weeks) is a recognized risk factor for ADHD, particularly the inattentive presentation, through altered white matter and executive-control circuit development.
• **Attribution score:** +0.2847

[Reasoning Lens]

The family history reflects genetic predisposition, while very preterm birth points to altered neurodevelopment. Together they support an elevated ADHD risk.

Figure 1: An EVIGEN-generated clinical rationale, simplified and de-identified for illustration. Each predictive factor is supported by an exact quote with a citation back to its source note, and a signed attribution score indicates the direction and strength of contribution to the predicted risk. Every claim is traceable to the original record, and a process-supervised verifier (§3.4) will then flag unreliable reasoning steps for clinician review (full example in Figure 4).

details such as prematurity, visits to speech and vision specialists that reflect early developmental concerns (Engelhard et al., 2020), and longitudinal observations recorded by pediatricians across routine well-child visits. The ADHD signal emerges only when temporally distant and heterogeneous pieces of evidence are integrated, making longitudinal EHR reasoning difficult for both clinicians and automated systems (Dymek et al., 2021).

Large language models (LLMs) provide a

promising approach to processing clinical records, including summarization, diagnostic reasoning, and recommendation generation (Gao et al., 2023; Van Veen et al., 2024; Williams et al., 2024; Goh et al., 2024). However, applying an LLM directly to a patient’s full EHR is unreliable: records may exceed the model’s effective context length, and important evidence can be ignored when it is buried in a long input (Liu et al., 2024). Even when records fit, the quadratic cost of attention makes LLM inference over full patient histories impractical at scale.

Retrieval-augmented generation (RAG) is the standard solution to this challenge: it reduces long inputs by selecting context before generation (Lewis et al., 2020) and has been widely studied in clinical NLP (Xiong et al., 2024a; Wu et al., 2024; Lopez et al., 2025). However, effective retrieval remains a bottleneck for longitudinal clinical reasoning. Standard RAG retrieves text that is relevant to an explicit query, but clinically important evidence is often indirect, sparsely distributed, and dependent on encounters across the EHR (Li et al., 2025). Because the same outcome can arise through many different clinical pathways, query-based retrieval must either pre-specify those pathways, risking missed evidence, or retrieve broadly, adding weakly relevant context (Sohn et al., 2025).

Beyond retrieval quality, hallucination further limits the reliability of clinical LLMs. Unsupported diagnoses, fabricated events, and unjustified recommendations are documented failure modes in medical text generation (Asgari et al., 2025). In clinical settings, such errors substantially undermine clinician trust, as providers remain responsible for decisions informed by the model’s output. This challenge is amplified for longitudinal EHRs: because patient histories can be long, it is impractical for clinicians to audit every generated claim against the original record. As a result, clinical trust requires not only accurate predictions, but reasoning that is explicitly grounded in auditable and traceable patient evidence.

To address these limitations, we argue that LLM reasoning over longitudinal EHRs should not proceed directly from the full record or from generic retrieved context. Instead, the system should first build a *predictive evidence scaffold*: a compact set of observations selected for *predictive* contribution, not textual relevance, to the target task. The LLM can then reason over this scaffold, with each reasoning step grounded in selected evidence.

This grounding directly supports model *faithfulness*: that generated claims are supported by evidence in the patient’s record. More importantly, it enables clinicians to inspect the specific evidence underlying each prediction and reasoning step, rather than relying on black box rationales. In high-stakes clinical settings, such traceability is critical for establishing providers’ trust, as they will be able to verify the model’s reasoning before incorporating its conclusion into patient care.

We propose EVIGEN, a three-layer framework for verifiable clinical rationale generation. The **Evidence Selection Layer** learns patient-conditioned queries that identify evidence predictive of the target task, produces a prediction, and ranks each piece of selected evidence by its contribution to that prediction. The **Rationale Generation Layer** prompts an LLM to generate a structured rationale over this ranked evidence. Each reasoning step must quote a supporting passage in the evidence and link back to the EHR through a citation ID (Figure 1). The **Process Verification Layer** verifies each reasoning step and flags unreliable ones for clinician review. Because every step is tied to cited evidence, clinicians can trace flagged errors back to the source. Together, these layers connect prediction, rationale generation, and verification through the same patient-specific evidence.

Our contributions are as follows:

- We introduce EVIGEN, to our knowledge the first framework for clinical rationale generation over full longitudinal EHR histories spanning years of patient care.
- We introduce learnable queries as evidence detectors that retrieve heterogeneous evidence (e.g., clinical notes and structured codes), selectively activated per patient to enable efficient retrieval over arbitrarily long input.
- We generate rationales through verifiable evidence-scaffolded reasoning: each reasoning step is based on selected evidence, traceable to the original record, auditable by a verifier, and designed to support clinician trust through transparent evidence attribution.
- Across three longitudinal clinical tasks, EVIGEN substantially improves prediction performance and rationale faithfulness over full-context LLM and RAG baselines, and is preferred by clinical reviewers in a usability pilot study.

2 Related Work

Query-Based Context Retrieval. Standard RAG retrieves text similar to a given query (Lewis et al., 2020). Prior work has improved retrieval with query expansion, rewriting, and iterative refinement in medical contexts (Wang et al., 2023; Ma et al., 2023; Xiong et al., 2024b). In all cases, queries retrieve generally relevant context, but may miss the nuanced, patient-specific evidence required for adequate clinical reasoning (Sohn et al., 2025).

Closest to our setting, IRIS (Li et al., 2025) uses learnable query vectors trained on outcome labels. Unlike RAG, its retrieval is driven by predictive utility rather than textual similarity, with each query learning to capture a risk factor. EVIGEN builds on this idea in two ways. First, it introduces patient-conditioned query activation, so that only the subset of queries relevant to a patient’s clinical profile is used, enabling more tailored, patient-specific retrieval. Second, it extends predictive evidence retrieval beyond document classification by using the selected observations to guide generation.

Process-Supervised Verification. Process supervision scores intermediate reasoning steps rather than the final answer alone (Lightman et al., 2024). Recent work (Wang et al., 2025) applies this paradigm to verify AI-generated clinical notes, breaking each note into clinically meaningful steps and checking each for reasoning and factual issues. EVIGEN adapts this step-level verification approach to audit generated clinical rationales. It outputs type-aware error flags (e.g., hallucination, factual inaccuracy) at unreliable reasoning steps, and clinicians can trace each flag back to the cited observation via citation IDs.

3 EVIGEN

3.1 Overview

Task. Given a patient’s longitudinal EHR, EVIGEN produces: (i) a risk prediction probability $\hat{y}$ and (ii) a structured clinical rationale that traces every claim to a passage in the patient’s record.

Framework. As shown in Figure 2, EVIGEN consists of three layers with explicit input-output interfaces. The **Evidence Selection Layer** (§3.2) takes the full EHR, extracts the predictive observations, and outputs a prediction probability $\hat{y}$ with a ranked evidence pack containing each observation’s ID and signed attribution score. The **Rationale Generation Layer** (§3.3) consumes the

probability $\hat{y}$ and the evidence pack, generating a structured clinical rationale whose claims cite the provided observation IDs. Finally, the **Process Verification Layer** (§3.4) takes the generated rationale as input, reviews each reasoning step, and flags steps with potential reasoning errors. Observation IDs are preserved across each layer, making the final output traceable to the source record.

Input. We use two EHR modalities: free-text clinical notes (split into chunks) and structured ICD diagnostic codes (encoded from their official descriptions). Both are embedded with a shared text encoder, producing note embeddings $\mathbf{X}^{(n)} = \{\mathbf{x}_\ell^{(n)}\}_{\ell=1}^{L_n}$ and code embeddings $\mathbf{X}^{(c)} = \{\mathbf{x}_\ell^{(c)}\}_{\ell=1}^{L_c}$, with $\mathbf{x}_\ell^{(m)} \in \mathbb{R}^d$, for a given patient.

3.2 Evidence Selection Layer

Overview. This layer identifies which observations in a patient’s EHR (*i.e.*, note chunks and ICD codes) are most predictive of the clinical outcome. It outputs (i) a risk prediction probability $\hat{y}$ and (ii) an evidence pack: a set of (observation, attribution) tuples, where each top-attributed observation carries a unique ID and a signed attribution score, passed to the Rationale Generation Layer.

The challenge in this layer is to retrieve predictive signals from an extensive EHR input. Standard RAG queries cannot capture the heterogeneous, patient-specific evidence patterns present in longitudinal EHRs. Instead, this layer uses a set of learnable query vectors $\mathbf{Q} = [\mathbf{q}_0, \dots, \mathbf{q}_{N-1}] \in \mathbb{R}^{N \times d}$, partitioned into N_n note queries (retrieving note chunks) and N_c code queries (retrieving ICD codes). Queries are trained end-to-end with the prediction objective using clinical outcome labels, so each query specializes in detecting a distinct evidence type predictive of the outcome. Outcome labels such as diagnoses or adverse events can be obtained from structured EHR fields via established computable phenotypes (Kirby et al., 2016), enabling large-scale supervised training of query vectors without human annotations. Since not all evidence types are present in every patient, we further introduce a gating mechanism that activates only the queries appropriate for a given patient.

Patient-conditioned dynamic gating. To make query activation dependent on a patient’s specific profile, we compute a patient-specific global summary $\mathbf{s}^{(m)} \in \mathbb{R}^d$ for each modality m via mean pooling over all chunk embeddings for that modal-

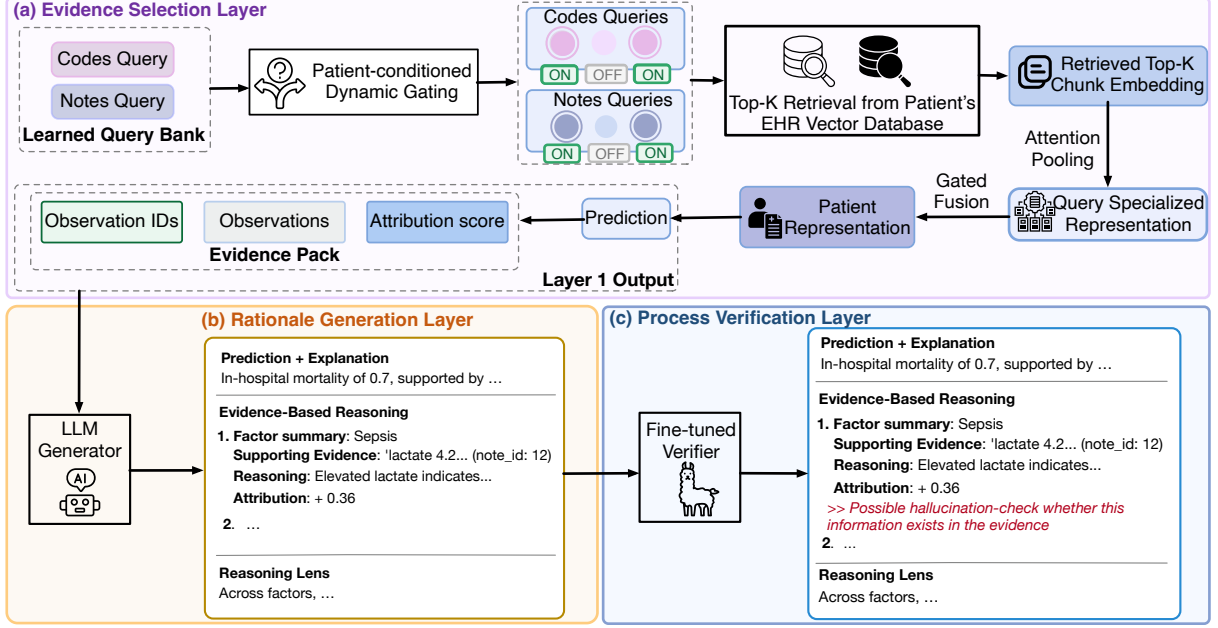


Figure 2: **EVIGEN three-layer pipeline.** (a) Evidence Selection Layer (§3.2); (b) Rationale Generation Layer (§3.3); (c) Process Verification Layer (§3.4).

ity ($\mathbf{X}^{(n)}$ for notes, $\mathbf{X}^{(c)}$ for codes). Query $\mathbf{q}_i$ fires for modality m only when its alignment with this summary exceeds a threshold η_i (i.e., the evidence type targeted by $\mathbf{q}_i$ is reflected in the summary):

$$g_i^{(m)} = 1 \left[\sigma \left(\tilde{\mathbf{s}}^{(m)\top} \tilde{\mathbf{q}}_i \right) > \sigma(\eta_i) \right] \quad (1)$$

Here $\tilde{\cdot}$ denotes L2 normalization, so $\tilde{\mathbf{s}}^{(m)\top} \tilde{\mathbf{q}}_i$ is the cosine similarity between the summary and the query; $\eta_i \in \mathbb{R}$ is a learnable per-query threshold; and $g_i^{(m)} \in \{0, 1\}$ is the binary gate indicating whether query i activates for modality m . Since the indicator $1[\cdot]$ is non-differentiable, we apply a straight-through estimator (Bengio et al., 2013) (Appendix A.1.2) so $\mathbf{q}_i$ and η_i remain trainable.

Retrieval and attention pooling. After gating, for each active query $\mathbf{q}_i$ in modality m , we retrieve the top- K embeddings from $\mathbf{X}^{(m)}$ by cosine similarity to $\mathbf{q}_i$ and pool the retrieved embeddings via the attention pooling approach used by IRIS (Li et al., 2025):

$$\mathbf{c}_i = \sum_j \alpha_{i,j} \mathbf{x}_j^{(m)}, \quad \alpha_{i,j} = \frac{\exp(\tilde{\mathbf{q}}_i^\top \mathbf{x}_j^{(m)})}{\sum_{j'} \exp(\tilde{\mathbf{q}}_i^\top \mathbf{x}_{j'}^{(m)})} \quad (2)$$

In words: $\mathbf{c}_i$ is a weighted average of the top- K retrieved chunks, where chunks more similar to query i receive more weight. Here $\mathbf{x}_j^{(m)}$ is the j -th retrieved embedding from modality m , $\alpha_{i,j}$ is its softmax attention weight, and $\mathbf{c}_i \in \mathbb{R}^d$ is

the pooled context vector summarizing query i 's observations. Although top- K hard retrieval is non-differentiable, the queries remain trainable through these attention weights, and during training, they converge to retrieve predictive chunks. We discuss this learning dynamic in Appendix A.1.3.

The pooled context $\mathbf{c}_i$ for each active query is then refined by its corresponding per-query expert MLP, producing a query-specialized representation $\mathbf{h}_i$. Because dynamic gating restricts each expert MLP to patients whose histories match its corresponding query, each MLP can specialize to a narrowly defined predictive pattern rather than a broad set of predictive content. Finally, all $\{\mathbf{h}_i\}$ from active queries are aggregated into a single patient embedding $\bar{\mathbf{h}}$, which is forwarded to the prediction head to produce $\hat{y}$.

Training and inference. Query vectors, per-query gating thresholds, per-query MLPs, and the prediction head are trained end-to-end with cross-entropy loss and a diversity regularizer (Guo et al., 2025) that prevents different queries from converging onto the same pattern (Appendix A.1.4). At inference, we use the trained queries to retrieve predictive observations and apply Integrated Gradients (Sundararajan et al., 2017) to the trained predictor to obtain a signed attribution score α_i for each retrieved chunk, quantifying its contribution to the risk prediction probability, $\hat{y}$. The top-attributed

chunks, together with their observation IDs and attribution scores, constitute the *evidence pack* forwarded to Layer 2.

3.3 Rationale Generation Layer

Overview. The Rationale Generation Layer generates a clinical rationale from the Evidence Selection Layer’s evidence pack and prediction probability $\hat{y}$. The rationale is constrained to ground every claim in the selected evidence and to surface each observation’s signed attribution score alongside its reasoning.

Rationale structure. The rationale structure is illustrated in Figure 1. For each observation in the evidence pack, an LLM is prompted to write a structured factor section with four fields per factor: a factor summary, a verbatim quote with a citation ID tracing back to the original record, brief reasoning over the quoted observation, and an attribution score. Afterwards, the LLM writes a reasoning lens section that synthesizes the factor-level reasoning into a coherent analysis, highlighting any interactions between factors.

Rationale verifiability. EVIGEN’s LLM generator may still misquote or paraphrase the source despite receiving the evidence pack. We therefore use string matching (Appendix G.1) to verify that every quoted observation appears in the source record it cites; mismatches are flagged. With every quote verified and every reasoning step grounded solely in those quotes, the rationale itself becomes auditable: a clinician can review it without reading the entire EHR. In contrast, standard LLM explanations require clinicians to verify claims against the full input, which is often impractical.

3.4 Process Verification Layer

Overview. While EVIGEN rationales are verifiable, clinicians face limited time and high cognitive burden (Dymek et al., 2021; Rule et al., 2021), and they may miss errors in the rationale. To support clinician trust and direct attention to potentially unreliable claims, this layer flags suspicious reasoning in generated rationales for review.

Process-supervised verifier. Following the process supervision paradigm of Lightman et al. (2024), we train a step-level verifier to screen each generated rationale for reasoning and factual errors. The training approach adapts Wang et al. (2025): we fine-tune Llama-3.1-8B-Instruct on synthetic

negative samples produced by prompting GPT-4o-mini to perturb individual steps according to one of five error types. After each reasoning step, the verifier outputs a softmax over special reserved tokens (one for "correct" and one per error type), giving per-step probabilities for each outcome. At inference, per-step probabilities are Platt-calibrated, and steps below the calibrated threshold are flagged, with the predicted error type attached (Figure 4). The error type descriptions, full training recipe, and verifier performance metrics are in Appendix A.3.

4 Experimental Setup

Our experiments address three research questions. *RQ1*: Does EVIGEN improve prediction performance? *RQ2*: Does EVIGEN generate more faithful rationales? *RQ3*: Do clinical reviewers find EVIGEN rationales useful for clinical decision making? This section discusses datasets, baselines, and evaluation methods to answer these questions.

4.1 Datasets

Our method is designed for longitudinal histories, but few public EHR datasets contain comprehensive longitudinal clinical notes due to privacy constraints. As a partial substitute, we use discharge notes from MIMIC-IV (Johnson et al., 2023), selecting patients with rich discharge history and predicting 1-year all-cause mortality from their last hospital discharge. Since other (non-discharge) notes are not available, the input is short and information-dense, making evidence retrieval easier than in real longitudinal EHR settings.

To complement MIMIC-IV with longer and sparser records, we also focus on early prediction of (a) **autism spectrum disorder (ASD)** and (b) **attention-deficit/hyperactivity disorder (ADHD)** from complete longitudinal EHRs from our institution. For each patient, we use the full sequence of outpatient visits (e.g., well-child checks, sick visits, specialty referrals) up to age 1.5 for autism and age 3 for ADHD, both well prior to the typical age of clinical diagnosis (Loh et al., 2025).

The MIMIC-IV mortality dataset contains ~ 5.5 K positive and ~ 8 K negative patients, averaging ~ 14 K input tokens per patient. The autism and ADHD datasets are smaller in case count (~ 1.6 K and ~ 1.7 K positives, each paired with 8K negatives) but substantially longer in input, averaging ~ 101 K and ~ 108 K tokens per patient, respectively. Inclusion/exclusion criteria and additional statistics

are in Appendix F.

All three datasets are split 8:1:1 into train, validation, and test partitions. EVIGEN is trained on the train set with model selection on the validation set, and all methods (EVIGEN and baselines) are evaluated on the test set.

4.2 Baselines

We pair four LLMs with two input setups and two prediction strategies, yielding 16 baselines per task.

LLM backbones. Llama-3.1-8B/70B-Instruct, Qwen3-32B (thinking mode), and GPT-4o-mini, all run with a 128K-token context window.

Input setups. *Full-context zero-shot* places the full patient record directly in the prompt. *Retrieval-augmented generation (RAG)* performs dense retrieval over the patient record using multi-factor queries; the queries are per-task risk factors compiled by Claude Opus 4.7 from the clinical literature and verified by clinical experts.

Prediction strategies. *Free-form* asks the model to output a probability directly. *Yes/No verbalizer* (Schick and Schütze, 2021) asks for a Yes/No answer and reads the normalized probability over the Yes and No tokens. All baselines are prompted to generate a rationale in the same format as EVIGEN (Figure 1), without an attribution score, as these baselines do not calculate such a score. Implementation details are in Appendix B.

4.3 Evaluation

Prediction Performance. We report accuracy and AUC on MIMIC-IV mortality, and AUC only on the autism and ADHD datasets, as the latter two are heavily class-imbalanced and accuracy is less informative.

Rationale Faithfulness. With inputs averaging $\sim 100K$ tokens, clinician review is impractical. LLM-as-a-judge (Chiang and Lee, 2023) is the standard alternative, but judge quality degrades at this scale.

Our evaluation design exploits the rationale format: each factor contains a citation ID, a quoted observation, and a brief reasoning over that quote (§3.3). The quote sits between input and reasoning, splitting the chain *input* $\rightarrow$ *reasoning* into two sub-checks: *input* $\rightarrow$ *observation* (does the quote exist in the EHR?) and *observation* $\rightarrow$ *reasoning* (does the reasoning follow from the quote?). Stage

1 reduces to string matching and needs no LLM; Stage 2 passes only the rationale to an LLM judge.

Stage 1: source grounding. For each factor, we verify that (i) the citation ID points to a real ID in the patient’s record, and (ii) the quoted observation matches a contiguous span of the cited source note. The matching check is based on the longest-common-subsequence algorithm.

Stage 2: reasoning consistency. We pass only the rationale (not the full EHR) to GPT-4o. For each factor, the LLM judge checks whether (i) the factor’s reasoning follows from its quoted observation, and (ii) the reasoning introduces no facts beyond the observation. For the overall reasoning lens section, the judge additionally checks whether (iii) the lens follows from the per-factor reasoning, and (iv) the lens relies only on the stated factors.

For a fair comparison, EVIGEN and each baseline produce exactly five factors per rationale, yielding 22 checks per rationale (4 per factor + 2 overall). A rationale is considered faithful only if it passes all 22 checks. Implementation is detailed in Appendix G.

Clinical Utility. We conduct a pilot evaluation to assess EVIGEN rationales’ clinical utility. We ask 7 medical students to review 3 types of rationales: (i) the EVIGEN rationale, (ii) a standard LLM clinical rationale (prediction with a free-form explanation), and (iii) the raw output of EVIGEN’s Evidence Selection Layer (prediction probability with the top-attribution chunks and their scores, no LLM-generated narrative). Reviewers filled out surveys to comprehensively rate each rationale type. Questions in the survey are drawn from validated user-evaluation scales for clinical decision support tools (Brooke et al., 1996; Holzinger et al., 2020; Ghorayeb et al., 2023; Hoffman et al., 2023). The full survey is in Appendix H.3.

5 Results and Analysis

5.1 Prediction Performance

EVIGEN outperforms all baselines on all four metrics. The two largest performance gaps between EVIGEN and the best baseline are on MIMIC-IV mortality accuracy (+10.4pp) and ADHD AUC (+8.9pp); the performance gaps for the mortality AUC and the autism AUC are around 4pp.

Across baseline backbones, RAG does not reliably beat full-context, suggesting that standard query-based retrieval offers limited assistance to

Method	Mortality		Autism	ADHD
	Acc.	AUC	AUC	AUC
<i>Llama-3.1-8B</i>				
Full context	0.446	0.694	0.526	0.558
RAG	0.448	0.782	0.635	0.583
<i>Llama-3.1-70B</i>				
Full context	0.419	0.799	0.657	0.612
RAG	0.414	0.799	0.667	0.598
<i>Qwen3-32B</i>				
Full context	0.690	0.831	0.687	0.607
RAG	0.696	0.811	0.691	0.588
<i>GPT-4o-mini</i>				
Full context	0.407	0.710	0.679	0.615
RAG	0.478	0.772	0.654	0.594
EVIGEN (ours)	0.800	0.871	0.730	0.704

Table 1: Prediction performance of EVIGEN and baselines across three datasets. The best result in each column is shown in **bold**.

the model’s clinical reasoning. In contrast, EVIGEN retrieves observations using queries trained on outcome labels, so the selected context is optimized for predictive utility rather than textual relevance. Baseline AUCs show some discrimination ability, but their low mortality accuracy reflects poor calibration: Llama-3.1-8B/70B and GPT-4o-mini all post accuracies below 0.5 despite AUCs of 0.69–0.80. On the mortality task, EVIGEN achieves an Expected Calibration Error (ECE) of 0.042, compared with 0.200 to 0.536 for the zero-shot and RAG baselines. EVIGEN’s combination of high accuracy (0.800), high AUC (0.871), and low ECE supports both discrimination and well-calibrated prediction.

§4.2 introduced two prediction strategies for baselines (free-form and verbalizer); we find no pattern across model-task pairs as to which strategy outperforms the other, and Tables 1 and 2 report the better of the two per baseline.

5.2 Rationale Faithfulness

Table 2 reports the pass rate of each stage (S1: source grounding, S2: reasoning consistency) and their joint pass rate (S1 & S2). EVIGEN achieves highest S1 & S2 on 11/12 backbone-dataset cells, with 0.6–45.1pp margins over the best baseline.

LLMs are more susceptible to hallucination as input length grows. RAG substantially outperforms full-context generation across all tasks and backbones. EVIGEN narrows the input further by passing only predictive evidence, rather than RAG’s pool of textually relevant candidates. Because the

evidence pack from the Evidence Selection Layer contains data that is already extracted and ranked, EVIGEN does not need to judge which pieces matter; it only needs to quote them. This simpler task yields less hallucination.

The smaller model, Llama-3.1-8B, substantially lags behind other backbones under full-context and RAG. EVIGEN closes this gap. For mortality, Llama-3.1-8B + EVIGEN reaches a 58.8% joint pass rate, up from 6.1% under full context and 13.7% under RAG, and even exceeds Llama-3.1-70B + EVIGEN (56.3%). The evidence scaffold for generation makes a smaller model comparable to a larger one for producing faithful rationales.

Stage 1 is the harder check for baselines, as producing exact verbatim quotes from a long context is difficult. EHR notes make this more difficult: they heavily use abbreviations and specialized terms (Van Veen et al., 2024), a style rare in pre-training data and often suppressed in post-training for readability. However, verbatim quoting is important because it preserves the transparency and traceability required in clinical settings. EVIGEN substantially exceeds baselines in Stage 1.

Stage 2 pass rates are similar across methods. This is partly a survivor bias: only quotes that pass Stage 1 reach Stage 2. For baselines, the observations judged at Stage 2 are thus the more readable ones, since hard-to-quote notes were already filtered out in Stage 1. Reasoning consistency is naturally easier over clearer observations.

The only reasoning model in our set, Qwen3-32B, has a low Stage 1 pass rate but a near-perfect Stage 2 pass rate. This is consistent with recent findings that chain-of-thought can worsen instruction following (Qin et al., 2025). Qwen3-32B trades quote fidelity for superior reasoning quality. EVIGEN avoids this trade-off by providing reasoning support via the evidence scaffold, so non-reasoning backbones achieve both high S1 and S2.

5.3 Clinical Utility

Our clinical reviewer pilot (Appendix H) finds that EVIGEN rationales receive an average rating of 3.49/5 across all questions, compared with 3.34 for the standard LLM rationale (prediction + explanation) and 2.71 for the prediction with evidence pack alone (no LLM narrative). Six of seven reviewers selected EVIGEN as their preferred method. EVIGEN leads on informativeness, actionability, and trust, but falls short of the standard LLM rationale on usability. One likely explanation is that the sim-

Dataset	Metric	Llama-3.1-8B			Llama-3.1-70B			Qwen3-32B			GPT-4o-mini		
		Full	RAG	Ours	Full	RAG	Ours	Full	RAG	Ours	Full	RAG	Ours
Mortality	S1	9.0	18.5	72.6	39.6	68.4	67.7	28.5	46.2	55.7	24.9	34.3	72.9
	S2	67.5	74.2	81.0	80.9	78.5	83.1	94.0	93.5	94.2	92.6	93.4	88.6
	S1 & S2	6.1	13.7	58.8	32.0	53.7	56.3	26.8	43.2	52.5	23.1	32.0	64.6
Autism	S1	1.8	30.1	77.9	43.2	78.5	85.7	6.2	46.3	49.0	18.7	58.3	75.2
	S2	58.8	41.5	53.8	77.2	81.5	75.3	98.3	99.6	98.3	95.5	95.7	90.9
	S1 & S2	1.0	12.5	41.9	33.4	64.0	64.6	6.0	46.0	48.1	17.8	55.8	68.3
ADHD	S1	0.8	35.3	70.1	30.3	78.3	83.0	3.3	47.5	59.7	8.9	73.1	73.1
	S2	42.9	40.4	38.0	72.4	67.8	78.8	100.0	99.8	99.8	92.0	94.1	83.3
	S1 & S2	0.4	14.2	26.7	21.9	53.0	65.4	3.3	47.4	59.6	8.2	68.7	60.8

Table 2: Rationale faithfulness on the three datasets. S1 = source grounding pass rate; S2 = reasoning consistency pass rate; S1 & S2 = joint pass rate across all 22 checks (§4.3). "Ours" = EVIGEN. S1 & S2 rows are shaded to mark the headline metric. The highest S1 & S2 per backbone-dataset cell is in **bold**.

pler prediction + explanation format is easier to use, whereas EVIGEN’s richer output (attribution scores, process verifier) imposes a higher interpretive burden on medical students without an ML background.

Because reviewers cannot verify against the true EHR input, they must assume that predictions are correct and cited quotes are not hallucinated when rating each rationale. This assumption does not hold in live clinical use, and it is exactly what EVIGEN’s lead on prediction accuracy (§5.1) and rationale faithfulness (§5.2) provides.

5.4 Additional Baseline Comparisons

EVIGEN’s gain over zero-shot baselines could reflect access to training labels rather than more effective sparse-evidence selection. To control for this, we fine-tune baselines on the same train and validation set as EVIGEN and compare. We fine-tune Llama-3.1-8B-Instruct with QLoRA (4-bit base, rank 16) with two input settings: full context (each patient’s record is truncated to its most recent 32K tokens due to the compute burden of long inputs) and RAG-retrieved input. Both settings use the Yes/No verbalizer (§4.2). We also include IRIS (Li et al., 2025), the learnable-retrieval method that uses a fixed query set across all patients, as a baseline; this comparison is the exact ablation of patient-conditioned gating, since IRIS shares the same architecture and training setup with all queries activated. Performance metrics are averaged across three runs and shown in Table 3.

EVIGEN outperforms the fine-tuned RAG variant on all three datasets, indicating that retrieving by predictive value is superior to retrieving by textual relevance. EVIGEN also outperforms IRIS on all three datasets, demonstrating the value of

patient-conditioned query activation. The gap is narrow on mortality, but widens to 2.7-3.5pp for the real-EHR autism and ADHD datasets that contain longer, sparser inputs. The 32K-context QLoRA variant beats EVIGEN on mortality, but falls short on autism and ADHD. Moreover, EVIGEN’s compute cost does not scale with input length, as it operates on a fixed-size retrieved set, whereas full-context QLoRA scales quadratically. All EVIGEN training runs complete within 30 minutes on an A5000 Ada GPU, compared with 35 to 80 GPU-hours for 32K QLoRA on H200 GPUs.

Beyond these methods, our literature review identified few other supervised approaches directly applicable to outcome prediction over arbitrarily long clinical document sequences, with IRIS remaining the closest and strongest prior baseline for our setting. We nevertheless evaluate three additional supervised baselines: REMed-Chunk (Kim et al., 2024), ABMIL (Ilse et al., 2018), and ModernBERT (Warner et al., 2025) (details in Appendix C). EVIGEN significantly outperforms all three across the three tasks, with the bootstrap 95% confidence interval of the paired AUC difference entirely above zero.

Finally, while our RAG baseline uses clinically informed, expert-reviewed multi-factor queries over both notes and codes, the same query set is fixed across patients, which limits its adaptability. We therefore also evaluate ReAct-RAG, an adaptive retrieval baseline from the EHR-RAG work (Cao et al., 2026), in which the LLM iteratively generates new patient-specific queries based on the evidence retrieved so far. EVIGEN substantially outperforms ReAct-RAG on both prediction and faithfulness on the mortality task (Appendix C).

Method	Mortality	Autism	ADHD
IRIS	0.868	0.703	0.669
QLoRA-8B (32K)	0.881	0.663	0.560
QLoRA-8B (RAG)	0.864	0.689	0.647
EVIGEN (ours)	0.871	0.730	0.704

Table 3: Comparison with supervised baselines trained on the same splits and outcome labels. We report AUC on the three datasets, averaged over three runs.

6 Component Analysis

Within its three-layer architecture, EVIGEN makes three key design choices beyond a standard retrieve-then-generate pipeline: (i) *patient-conditioned query activation*, which decides which learned queries fire for each patient; (ii) *predictive evidence selection with attribution ranking*, which selects and orders evidence by contribution to the prediction rather than textual relevance; and (iii) *evidence-scaffolded generation*, which constrains the LLM to quote and reason over the ranked evidence pack. End-to-end results (§5) show that the full system outperforms baselines, but not how much each choice contributes. We isolate them as follows: (i) is isolated by the IRIS comparison in §5.4, its exact ablation; §6.1 separates the contributions of (ii) and (iii) to rationale faithfulness; and §6.2 tests (ii) directly, asking whether attribution-ranked evidence is genuinely more predictive.

6.1 Isolating evidence selection and scaffold

EVIGEN’s faithfulness gains over RAG (§5.2) could come from two mechanisms: the LLM may receive *better evidence* (ii), or a *better output format* (iii). We disentangle the two with a matched 2×2 experiment on the MIMIC-IV mortality test set across four LLM backbones, generating each rationale under one of four conditions defined by two independent choices. The first is *which evidence the LLM sees*: the top-5 chunks retrieved by similarity to the fixed RAG queries, or the top-5 chunks selected and ranked by EVIGEN’s Integrated Gradients (IG) attribution. The second is *how the LLM writes*: free-form generation over the concatenated chunks, or EVIGEN’s evidence scaffold, which pairs each reasoning step with a ranked chunk and its attribution score. The two extreme conditions correspond to the RAG baseline (similarity evidence, free-form) and to EVIGEN (attribution evidence, scaffold); the two mixed conditions expose each factor’s individual effect. Across all

conditions, we hold fixed the backbone, number of chunks, token budget, output format, decoding setup, and per-patient predicted probability. Full results are in Appendix D.

Both choices matter: adding the evidence scaffold raises the joint S1 & S2 pass rate by 9.7–21.2pp, and switching from similarity-ranked to IG-ranked evidence adds a further 3.4–11.6pp across the four backbones. The gains come mostly from S1 source grounding (up to +23.8pp from the scaffold and +11.2pp from the evidence source), with smaller but consistent gains in S2. We hypothesize that IG-ranked chunks more often contain self-contained clinical facts directly tied to the prediction, making them easier to quote and reason over, whereas similarity-based RAG may retrieve only broadly relevant chunks.

6.2 Predictive value of evidence rankings

We then test the attribution ranking itself: does it place more predictive evidence at the top? For each patient, we construct two matched five-chunk sets, ranked either by IG attribution or by cosine similarity to the fixed RAG queries, and require the EVIGEN predictor and each LLM backbone to predict from one set alone (Table 15, Appendix D). IG-ranked evidence yields substantially higher AUC: 0.868 versus 0.661 for the EVIGEN predictor, and gains of 13.8–21.4pp for the four LLM backbones. Notably, although the IG ranking is derived from EVIGEN’s own predictor, it also substantially benefits the zero-shot LLMs; the top-ranked chunks therefore carry genuinely predictive, transferable information rather than predictor-specific artifacts.

7 Conclusion and Future Work

In this paper, we presented EVIGEN, a three-layer framework that produces verifiable clinical rationales from longitudinal EHRs via predictive evidence retrieval, citation-grounded rationale generation, and process-supervised verification. EVIGEN outperforms full-context and RAG-based LLM baselines on prediction accuracy, rationale faithfulness, and clinical reviewer preference across three medical tasks. Future work can extend EVIGEN to additional EHR modalities (e.g., lab values and clinical imaging), grounding clinical rationale generation in a richer perspective of the patient record. We also see room to integrate the verifier into the generation loop itself rather than as a post-hoc check.

Limitations

Our clinical reviewer pilot is small-scale, consisting of 7 medical students. This serves as preliminary evidence, but is not statistically powered, and the reviewers are pre-licensure trainees rather than practicing clinicians. A larger study with licensed clinicians is needed to further confirm EVIGEN's clinical utility. Such a study takes considerable time due to the administrative process, which is currently underway.

Another limitation is that EVIGEN requires labeled outcomes to train the query vectors that select predictive evidence. For most tasks, labels can be extracted from structured fields in the EHR. For rare-disease prediction, however, the small number of positive cases may make it difficult to learn useful query vectors, reducing EVIGEN's advantage over zero-shot baselines.

Finally, the institutional autism and ADHD datasets contain protected longitudinal clinical notes and cannot be shared, an inherent constraint of research on real longitudinal EHRs. The MIMIC-IV setting is fully reproducible: we release the preprocessing pipeline, training and evaluation scripts, and prompts. While label leakage is controlled by the age cutoffs and cohort construction (Appendix F.2), we did not exhaustively audit target-related free-text mentions before the cutoff.

Ethical Considerations

EVIGEN is intended as a decision-support and rationale-auditing tool for clinician review, not an autonomous diagnostic system. Early pediatric ASD/ADHD prediction carries risks in both error directions: false positives can cause unnecessary family distress, stigma, and costs, while false negatives can delay needed evaluation and support. Because the models learn from EHRs, they inherit documentation and access biases; children with sparser records, often correlated with access to care, may be disproportionately missed, so deployment should monitor performance across subgroups rather than rely on aggregate accuracy. Finally, citation-grounded rationales improve auditability but can induce automation bias, where a reviewer over-trusts a fluent, well-cited, yet incorrect rationale. The step-level verifier is meant to counter this by flagging unreliable steps, but it is imperfect and is not a correctness guarantee. We therefore treat prospective validation, subgroup monitoring, and human-in-the-loop use as prereq-

uisites for any clinical deployment.

Acknowledgments

This work was supported by the National Institute of Mental Health (K01MH127309; PI Matthew Engelhard). AI assistants were used for coding assistance, editing, and proofreading during manuscript preparation.

References

- Elham Asgari, Nina Montaña-Brown, Magda Dubois, Saleh Khalil, Jasmine Balloch, Joshua Au Yeung, and Dominic Pimenta. 2025. [A framework to assess clinical safety and hallucination rates of LLMs for medical text summarisation](#). *npj Digital Medicine*, 8(1):274.
- Yoshua Bengio, Nicholas Léonard, and Aaron Courville. 2013. Estimating or propagating gradients through stochastic neurons for conditional computation. *arXiv preprint arXiv:1308.3432*.
- John Brooke et al. 1996. Sus-a quick and dirty usability scale. *Usability evaluation in industry*, 189(194):4–7.
- Lang Cao, Qingyu Chen, and Yue Guo. 2026. Ehr-rag: Bridging long-horizon structured electronic health records and large language models via enhanced retrieval-augmented generation. *arXiv preprint arXiv:2601.21340*.
- Cheng-Han Chiang and Hung-yi Lee. 2023. Can large language models be an alternative to human evaluations? In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 15607–15631.
- Christine Dymek, Bryan Kim, Genevieve B Melton, Thomas H Payne, Hardeep Singh, and Chun-Ju Hsiao. 2021. Building the evidence-base to reduce electronic health record-related clinician burden. *Journal of the American Medical Informatics Association*, 28(5):1057–1061.
- Matthew M. Engelhard, Samuel I. Berchuck, Jyotsna Garg, Ricardo Henao, Andrew Olson, Shelley Rusincovitch, Geraldine Dawson, and Scott H. Kollins. 2020. [Health system utilization before age 1 among children later diagnosed with autism or ADHD](#). *Scientific Reports*, 10(1):17677.
- Matthew M Engelhard, Ricardo Henao, Samuel I Berchuck, Junya Chen, Brian Eichner, Darby Herkert, Scott H Kollins, Andrew Olson, Eliana M Perrin, Ursula Rogers, et al. 2023. Predictive value of early autism detection models based on electronic health record data collected before age 1 year. *JAMA network open*, 6(2):e2254303.

- YanJun Gao, Dmitriy Dligach, Timothy Miller, Matthew M Churpek, and Majid Afshar. 2023. [Overview of the problem list summarization \(ProbSum\) 2023 shared task on summarizing patients' active diagnoses and problems from electronic health record progress notes](#). In *Proceedings of the 22nd Workshop on Biomedical Natural Language Processing and BioNLP Shared Tasks*, pages 461–467, Toronto, Canada. Association for Computational Linguistics.
- Abir Ghorayeb, Julie L Darbyshire, Marta W Wronikowska, and Peter J Watkinson. 2023. Design and validation of a new healthcare systems usability scale (hsus) for clinical decision support systems: a mixed-methods approach. *BMJ open*, 13(1):e065323.
- Ethan Goh, Robert Gallo, Jason Hom, Eric Strong, Yingjie Weng, Hannah Kerman, Joséphine A Cool, Zahir Kanjee, Andrew S Parsons, Neera Ahuja, et al. 2024. Large language model influence on diagnostic reasoning: a randomized clinical trial. *JAMA network open*, 7(10):e2440969.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. 2024. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.
- Yongxin Guo, Zhenglin Cheng, Xiaoying Tang, Zhaopeng Tu, and Tao Lin. 2025. Dynamic mixture of experts: An auto-tuning approach for efficient transformer models. In *International Conference on Learning Representations*, volume 2025, pages 79643–79672.
- Robert R Hoffman, Shane T Mueller, Gary Klein, and Jordan Litman. 2023. Measures for explainable ai: Explanation goodness, user satisfaction, mental models, curiosity, trust, and human-ai performance. *Frontiers in Computer Science*, 5:1096257.
- Andreas Holzinger, André Carrington, and Heimo Müller. 2020. Measuring the quality of explanations: the system causability scale (scs) comparing human and machine explanations. *KI-Künstliche Intelligenz*, 34(2):193–198.
- Maximilian Ilse, Jakub Tomczak, and Max Welling. 2018. Attention-based deep multiple instance learning. In *International conference on machine learning*, pages 2127–2136. Pmlr.
- Alistair EW Johnson, Lucas Bulgarelli, Lu Shen, Alvin Gayles, Ayad Shammout, Steven Horng, Tom J Pollard, Sicheng Hao, Benjamin Moody, Brian Gow, et al. 2023. MIMIC-IV, a freely accessible electronic health record dataset. *Scientific data*, 10(1):1.
- Junu Kim, Chaeun Shim, Bosco Seong Kyu Yang, Chami Im, Sung Yoon Lim, Han-Gil Jeong, and Edward Choi. 2024. [General-purpose retrieval-enhanced medical prediction model using near-infinite history](#). In *Proceedings of the 9th Machine Learning for Healthcare Conference*, volume 252 of *Proceedings of Machine Learning Research*. PMLR.
- Jacqueline C Kirby, Peter Speltz, Luke V Rasmussen, Melissa Basford, Omri Gottesman, Peggy L Peissig, Jennifer A Pacheco, Gerard Tromp, Jyotishman Pathak, David S Carrell, et al. 2016. Phekb: a catalog and workflow for creating electronic phenotype algorithms for transportability. *Journal of the American Medical Informatics Association*, 23(6):1046–1052.
- Maya Kruse, Shiyue Hu, Nicholas Derby, Yifu Wu, Samantha Stonbraker, Bingsheng Yao, Dakuo Wang, Elizabeth M. Goldberg, and YanJun Gao. 2025. [Large language models with temporal reasoning for longitudinal clinical summarization and prediction](#). In *Findings of the Association for Computational Linguistics: EMNLP 2025*, pages 20715–20735, Suzhou, China. Association for Computational Linguistics.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in neural information processing systems*, 33:9459–9474.
- Fengnan Li, Elliot D. Hill, Jiang Shu, Jiaxin Gao, and Matthew M. Engelhard. 2025. [IRIS: Interpretable retrieval-augmented classification for long interspersed document sequences](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 30263–30283, Vienna, Austria. Association for Computational Linguistics.
- Rui Li, Fenglong Ma, and Jing Gao. 2022. Integrating multimodal electronic health records for diagnosis prediction. In *AMIA Annual Symposium Proceedings*, volume 2021, page 726.
- Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. 2024. Let's verify step by step. In *International Conference on Learning Representations*, volume 2024, pages 39578–39601.
- Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and Percy Liang. 2024. [Lost in the middle: How language models use long contexts](#). *Transactions of the Association for Computational Linguistics*, 12:157–173.
- De Rong Loh, Elliot D Hill, Nan Liu, Geraldine Dawson, and Matthew M Engelhard. 2025. Limitations of binary classification for long-horizon diagnosis prediction and advantages of a discrete-time time-to-event approach: Empirical analysis. *JMIR AI*, 4:e62985.
- Ivan Lopez, Akshay Swaminathan, Karthik Vedula, Sanjana Narayanan, Fateme Nateghi Haredasht, Stephen P Ma, April S Liang, Steven Tate, Manoj Maddali, Robert Joseph Gallo, et al. 2025. Clinical entity augmented retrieval for clinical information extraction. *NPJ digital medicine*, 8(1):45.

- Xinbei Ma, Yeyun Gong, Pengcheng He, Hai Zhao, and Nan Duan. 2023. Query rewriting in retrieval-augmented large language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 5303–5315.
- Farida Mohsen, Hazrat Ali, Nady El Hajj, and Zubair Shah. 2022. Artificial intelligence-based methods for fusion of electronic health records and imaging data. *Scientific Reports*, 12(1):17981.
- Yulei Qin, Gang Li, Zongyi Li, Zihan Xu, Yuchen Shi, Zhekai Lin, Xiao Cui, Ke Li, and Xing Sun. 2025. Incentivizing reasoning for advanced instruction-following of large language models. *Advances in Neural Information Processing Systems*, 38:108337–108401.
- Adam Rule, Steven Bedrick, Michael F Chiang, and Michelle R Hribar. 2021. Length and redundancy of outpatient progress notes across a decade at an academic medical center. *JAMA Network Open*, 4(7):e2115334.
- Timo Schick and Hinrich Schütze. 2021. [Exploiting cloze-questions for few-shot text classification and natural language inference](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 255–269, Online. Association for Computational Linguistics.
- Jiwoong Sohn, Yein Park, Chanwoong Yoon, Sihyeon Park, Hyeon Hwang, Mujeen Sung, Hyunjae Kim, and Jaewoo Kang. 2025. [Rationale-guided retrieval augmented generation for medical question answering](#). In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 12739–12753, Albuquerque, New Mexico. Association for Computational Linguistics.
- Mukund Sundararajan, Ankur Taly, and Qiqi Yan. 2017. Axiomatic attribution for deep networks. In *International conference on machine learning*, pages 3319–3328. PMLR.
- Dave Van Veen, Cara Van Uden, Louis Blanke-meier, Jean-Benoit Delbrouck, Asad Aali, Christian Bluethgen, Anuj Pareek, Malgorzata Polacin, Eduardo Pontes Reis, Anna Seehofnerová, et al. 2024. Adapted large language models can outperform medical experts in clinical text summarization. *Nature medicine*, 30(4):1134–1142.
- Hanyin Wang, Chufan Gao, Qiping Xu, Bolun Liu, Guleid Hussein, Hariprasad Reddy Korsapati, Mohamad El Labban, Kingsley Iheasirim, Mohamed Hassan, Gokhan Anil, Brian Bartlett, and Jimeng Sun. 2025. [Process-supervised reward models for verifying clinical note generation: A scalable approach guided by domain expertise](#). In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 19127–19147, Suzhou, China. Association for Computational Linguistics.
- Liang Wang, Nan Yang, and Furu Wei. 2023. Query2doc: Query expansion with large language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 9414–9423.
- Benjamin Warner, Antoine Chaffin, Benjamin Clavié, Orion Weller, Oskar Hallström, Said Taghadouini, Alexis Gallagher, Raja Biswas, Faisal Ladhak, Tom Aarsen, et al. 2025. Smarter, better, faster, longer: A modern bidirectional encoder for fast, memory efficient, and long context finetuning and inference. In *Proceedings of the 63rd annual meeting of the association for computational linguistics (volume 1: Long papers)*, pages 2526–2547.
- Christopher YK Williams, Brenda Y Miao, Aaron E Kornblith, and Atul J Butte. 2024. Evaluating the use of large language models to provide clinical recommendations in the emergency department. *Nature communications*, 15(1):8236.
- Junde Wu, Jiayuan Zhu, Yunli Qi, Jingkun Chen, Min Xu, Filippo Menolascina, and Vicente Grau. 2024. Medical graph rag: Towards safe medical large language model via graph retrieval-augmented generation. *arXiv preprint arXiv:2408.04187*.
- Guangzhi Xiong, Qiao Jin, Zhiyong Lu, and Aidong Zhang. 2024a. [Benchmarking retrieval-augmented generation for medicine](#). In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 6233–6251, Bangkok, Thailand. Association for Computational Linguistics.
- Guangzhi Xiong, Qiao Jin, Xiao Wang, Minjia Zhang, Zhiyong Lu, and Aidong Zhang. 2024b. Improving retrieval-augmented generation in medicine with iterative follow-up questions. In *Biocomputing 2025: Proceedings of the Pacific Symposium*, pages 199–214. World Scientific.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. 2025. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*.
- Xuejiao Zhao, Siyan Liu, Su-Yin Yang, and Chunyan Miao. 2025. Medrag: Enhancing retrieval-augmented generation with knowledge graph-elicited reasoning for healthcare copilot. In *Proceedings of the ACM on Web Conference 2025*, pages 4442–4457.
- Yinghao Zhu, Changyu Ren, Zixiang Wang, Xiaochen Zheng, Shiyun Xie, Junlan Feng, Xi Zhu, Zhoujun Li, Liantao Ma, and Chengwei Pan. 2024. Emerge: Enhancing multimodal electronic health records predictive modeling with retrieval-augmented generation. In *Proceedings of the 33rd ACM International Conference on Information and Knowledge Management*, pages 3549–3559.

Appendix

A	EVIGEN Implementation Details	14
A.1	Evidence Selection Layer	14
A.1.1	Encoder and input	14
A.1.2	Architecture and gating	14
A.1.3	Retrieval and query learning	14
A.1.4	Training configuration	15
A.2	Rationale Generation Layer	15
A.3	Process Verification Layer	15
B	Baseline Implementation Details	16
C	Additional Baseline Comparisons	17
C.1	Additional supervised baselines	17
C.2	ReAct-RAG	18
D	Component-Analysis Results	18
E	Compute and Hardware	18
F	Datasets	18
F.1	MIMIC-IV mortality	19
F.2	Autism and ADHD early risk prediction	19
F.3	Preprocessing	21
G	Faithfulness Evaluation Methodology	21
G.1	Stage 1: source grounding	21
G.2	Stage 2: reasoning consistency	22
H	Clinical Reviewer Pilot	22
H.1	Construct-level ratings	23
H.2	Per-item results	23
H.3	Survey Questionnaire	23

A EVIGEN Implementation Details

A.1 Evidence Selection Layer

A.1.1 Encoder and input

Text encoder. All chunks (notes and ICD codes) are embedded with Qwen3-Embedding-8B, producing $d = 4096$ -dim vectors.

Input formatting. Chunk size 200 tokens with overlap, each chunk prefixed by an age-aware header ("Patient age: X years\n\nClinical Note:\n...") so the embedding carries demographic context. ICD codes are embedded using the official description with age prefix.

A.1.2 Architecture and gating

Architecture dimensions. The number of queries depends on the task: $N_n = N_c = 4$ for mortality (so $N = 8$ total) and $N_n = N_c = 6$ for ADHD and autism (so $N = 12$). One note query, $\mathbf{q}_0$, is always-on and shared across all patients. Each per-query expert MLP f_i is a pre-LayerNorm 2-layer feed-forward network with GELU activation and a residual connection,

$$\mathbf{h}_i = \mathbf{c}_i + f_i(\text{LN}(\mathbf{c}_i)),$$

with hidden dimension $d_h = 1024$ and dropout 0.1. A final LayerNorm precedes the classifier head.

Straight-through estimator implementation.

Let $s = \sigma(\tilde{\mathbf{s}}^{(m)\top} \tilde{\mathbf{q}}_i) - \sigma(\eta_i)$ denote the continuous gating score and $g = \mathbf{1}[s > 0]$ its hard indicator. We implement the STE with the standard stop-gradient identity $g^{\text{STE}} = (g - s) \cdot \text{detach}() + s$. In the forward pass the two s terms cancel and $g^{\text{STE}} = g$, so retrieval uses the discrete gate. In the backward pass $\text{detach}()$ blocks gradient through the hard branch, leaving $\partial g^{\text{STE}} / \partial \theta = \partial s / \partial \theta$ for any parameter θ , so gradients reach both the query $\mathbf{q}_i$ and the threshold η_i .

Average active queries. On the test dataset, the trained gates activate on average 3.48 of the 8 queries per patient for mortality, 6.64 of the 12 for autism, and 9.03 of the 12 for ADHD.

Query-level activation rates. Table 4 reports how often each query is activated across the mortality test set. Activation varies substantially across queries: some are activated for nearly all patients, whereas others are rarely or never activated. Several code queries in particular have low activation rates, suggesting that the model relies more heavily

Query	Modality	Gate type	Activation (%)
0	Note	Shared, always on	100.0
1	Note	Dynamic	100.0
2	Note	Dynamic	23.9
3	Note	Dynamic	50.6
4	Code	Dynamic	0.0
5	Code	Dynamic	34.6
6	Code	Dynamic	0.0
7	Code	Dynamic	39.3

Table 4: Per-query activation rates on the mortality test set.

on note-based evidence for this task, or finds some code queries redundant. Similar query-specific patterns are observed on the autism and ADHD datasets.

A.1.3 Retrieval and query learning

Retrieval. Each active query retrieves the top- K chunks ($K = 4$) by cosine similarity, deterministically at both training and inference; the retrieval width auto-shrinks if a patient has fewer than K valid chunks. Gating uses the hard 0/1 indicator at forward time.

Query learning dynamic. Although top- K retrieval by cosine similarity is non-differentiable, each query $\mathbf{q}_i$ still receives gradient signal through the attention weights $\alpha_{i,j}$ over the retrieved chunks.

Intuitively, training proceeds as follows. At initialization, $\mathbf{q}_i$ is random and the top- K chunks it retrieves are a mix of predictive and uninformative ones. The loss gradient then pushes the attention weight $\alpha_{i,j}$ upward on chunks whose embeddings would reduce the loss. Because $\alpha_{i,j}$ is a softmax of $\tilde{\mathbf{q}}_i^\top \mathbf{x}_j^{(m)}$, assigning larger weight to a chunk is equivalent to pulling $\mathbf{q}_i$ toward that chunk’s embedding direction. After the update, $\mathbf{q}_i$ has moved toward the predictive region of embedding space, so on the next batch the hard top- K retrieval is more likely to surface predictive chunks in the first place. Iterating this loop, $\mathbf{q}_i$ converges to a stable region whose top- K retrieval consistently yields predictive evidence.

Applying the chain rule through Eq. 2 confirms this picture (dropping the $\tilde{\cdot}$ for clarity):

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \mathbf{q}_i} &= \sum_{j=1}^K \alpha_{i,j} u_{i,j} \left(\mathbf{x}_j^{(m)} - \mathbf{c}_i \right), \\ u_{i,j} &:= \left(\frac{\partial \mathcal{L}}{\partial \mathbf{c}_i} \right)^\top \mathbf{x}_j^{(m)}. \end{aligned} \quad (3)$$

The scalar $u_{i,j}$ measures how much chunk j 's embedding aligns with the direction in which $\mathbf{c}_i$ would need to change to reduce the loss: $u_{i,j} < 0$ identifies predictive chunks. Gradient descent then shifts $\mathbf{q}_i$ in the direction of $(\mathbf{x}_j^{(m)} - \mathbf{c}_i)$ for chunks with negative $u_{i,j}$, weighted by the current attention $\alpha_{i,j}$, precisely the ‘‘pulling toward predictive embeddings’’ described above. Li et al. (2025) provides a detailed convergence analysis.

A.1.4 Training configuration

Training objective. Query vectors, per-query gating thresholds, per-query MLPs, and the prediction head are trained end-to-end with cross-entropy loss $\mathcal{L}_{\text{CE}}$ on clinical outcome labels, augmented by an auxiliary loss:

$$\mathcal{L}_{\text{aux}} = \underbrace{\|\tilde{\mathbf{Q}}\tilde{\mathbf{Q}}^\top - \mathbf{I}\|_F^2}_{\text{diversity}} + \underbrace{\frac{1}{N-1} \sum_{i \geq 1} \|\mathbf{q}_i\|^2}_{\text{simplicity}} \quad (4)$$

Here $\tilde{\mathbf{Q}} \in \mathbb{R}^{N \times d}$ stacks the L2-normalized query vectors $\tilde{\mathbf{q}}_i$ as rows, so $\tilde{\mathbf{Q}}\tilde{\mathbf{Q}}^\top$ is the matrix of pairwise cosine similarities between queries; $\mathbf{I}$ is the identity matrix; $\|\cdot\|_F$ denotes the Frobenius norm; and the simplicity-term sum $\sum_{i \geq 1}$ runs over the non-shared queries, excluding the always-on query $\mathbf{q}_0$. The diversity term pushes the Gram matrix toward the identity, preventing different queries from collapsing onto the same pattern; the simplicity term bounds query norms for numerical stability. This formulation adapts the regularizer used for expert representation matrices in dynamic mixture-of-experts (Guo et al., 2025).

Hyperparameters. We use auxiliary loss coefficient $\lambda_{\text{aux}} = 0.01$ and train with AdamW for up to $E = 20$ epochs, with a task-specific learning rate (10^{-3} for mortality, 3×10^{-4} for autism, and 10^{-4} for ADHD) and early stopping on validation AUC (patience 3); we select the best checkpoint by maximum validation AUC.

A.2 Rationale Generation Layer

LLM prompt template. Table 19 summarizes the structure of the prompt used by the rationale-generation LLM (mortality task variant); the ADHD and autism-prediction variants substitute task-specific framing for the *Task* row. Full verbatim prompt strings are available in the code repository.

A.3 Process Verification Layer

Verifier performance. We achieve a step-level AUROC of 0.978 for binary error detection, with a calibrated F1 of 0.947 at threshold 0.5 and an ECE of 0.028 after Platt scaling. When flagged steps are typed via conditional renormalization over the five clinical error classes, the verifier assigns the correct error type 88.2% of the time. At the sample level, the product of calibrated step scores ranks gold rationales above their paired negatives in 98.8% of cases.

Step-delimiter scheme. We repurpose five of Llama-3.1’s 256 reserved special tokens as structural delimiters: a *step* trigger after each reasoning step, a *completeness* trigger after each rationale section, an *end-of-note* trigger at the rationale end, a *context-end* boundary between patient evidence and rationale, and a *section* marker before each rationale header. Each trigger is followed by a label token drawn from a disjoint set of seven reserved tokens: *correct*, *hallucination*, *factual_inaccuracy*, *unhelpfulness*, *generic_negative*, *attribution_distortion*, and *provenance_break*. At inference, the model’s softmax over these seven token IDs at each trigger position produces a per-step label distribution.

Synthetic training data. Gold rationales from §3.3 provide positive examples (all steps labeled *correct*). For each gold rationale, we generate 30 negative variants by prompting GPT-4o-mini to corrupt 3-7 randomly selected steps, each according to one of five error types:

- **Hallucination:** inject a clinical claim absent from the patient evidence.
- **Factual inaccuracy:** alter a numeric value, date, or clinical detail present in the evidence.
- **Unhelpfulness:** replace a specific, evidence-supported claim with a vague or speculative statement.
- **Attribution distortion:** change the sign or magnitude of an attribution score.
- **Provenance break:** reassign a citation to a different source document.

Corrupted steps receive the matching error-type label; uncorrupted steps retain *correct*. Clean steps are additionally paraphrased with probability 0.4 to prevent the model from relying on surface-level template matching. With probability 0.25, 1-2 uncorrupted steps are deleted from the negative sample to train the completeness trigger to

detect missing content. Section-level *completeness* and note-level *end-of-note* triggers are labeled *generic_negative* if any step in their scope is corrupted or deleted, and *correct* otherwise. The final training set comprises $1,800 \text{ patients} \times 3 \text{ gold rationales} \times (1 + 30 \text{ negatives}) = 167,400 \text{ samples}$.

QLoRA configuration. We fine-tune Llama-3.1-8B-Instruct with QLoRA: rank $r = 16$, scaling $\alpha = 32$, dropout 0.05, 4-bit NF4 quantization with double quantization, targeting the `q_proj`, `k_proj`, `v_proj`, and `o_proj` attention matrices. The embedding and LM head layers are trained in full precision alongside the LoRA adapters. The loss function is `notes_only`: all tokens after the context-end delimiter contribute to the causal language-modeling objective, and the patient-context prefix is masked. We train for up to 2 epochs with early stopping; the best checkpoint is consistently at epoch 1. We use 8-bit paged AdamW with learning rate 1.2×10^{-4} (effective batch size 64 across 4 GPUs), cosine decay, 100 warmup steps, and max sequence length 2,048.

Platt calibration. We fit Platt scaling, $\hat{p} = \sigma(a \cdot \text{logit}(p) + b)$, on a 200-patient held-out test set. Patient-level 5-fold cross-validation confirms parameter stability ($a = 1.648 \pm 0.016$, $b = 10.41 \pm 0.09$); final parameters are fit on all held-out data. After calibration, the correct-step median rises to 0.963 and the corrupted-step median to 0.375, with ECE = 0.028 (from 0.780) and step-level F1 = 0.947 at threshold 0.5.

Error typing. Raw 7-class argmax accuracy is 63.7%, dominated by the *generic_negative* prior ($\sim 51\%$ of probability mass). We use a two-stage approach: (1) flag steps where calibrated $P(\text{correct}) < 0.5$, then (2) type the error by dropping *correct* and *generic_negative* from the softmax and renormalizing over the five clinical error types. Conditional typing accuracy on flagged steps is 88.2%.

Scoring aggregation. The sample-level verification score is the product of calibrated $P(\text{correct})$ across content steps only (completeness and end-of-note triggers are excluded). Post-calibration pairwise preference accuracy (fraction of gold-negative pairs from the same patient where the gold scores higher) is 98.8%.

Evaluation on naturally generated rationales. Synthetic corruptions alone do not fully establish

Verifier rank	Faithfulness rate (%)
1	56.67
2	60.33
3	56.67
4	50.67
5	52.00
6	54.67
7	54.33
8	53.00
9	49.00
10	42.33

Table 5: Judge-based faithfulness pass rate of naturally generated rationales, grouped by verifier rank (1 = highest verifier score; 10 rollouts per patient, 300 MIMIC-IV mortality patients, Llama-3.1-70B at temperature 1).

how the verifier performs on naturally generated outputs. Because obtaining reliable step-level labels requires expert human annotation, we use a judge-based ranking evaluation on naturally generated rationales as a practical alternative. We sampled 300 MIMIC-IV mortality patients and used Llama-3.1-70B to generate 10 rationale rollouts per patient at temperature 1. The verifier scored each rollout by multiplying $P(\text{correct})$ across all reasoning-step delimiters. We then ranked the 10 rollouts for each patient from highest to lowest verifier score and evaluated them using the same local reasoning-consistency judge as in our faithfulness evaluation (Appendix G.2).

As shown in Table 5, the lowest-ranked rollouts had a 42.33% pass rate, compared with 54.14% on average for ranks 1–9, a difference of -11.81 percentage points (95% CI: $[-17.56, -5.67]$). Although the rank-wise trend is not monotonic, the lowest-scored rollouts have a substantially lower faithfulness pass rate. This provides preliminary evidence that the verifier can identify less faithful naturally generated rationales beyond the synthetic corruptions used for training.

We emphasize that this is a judge-based ranking evaluation rather than a human-annotated step-level or error-type evaluation. We have not conducted a controlled reader study testing whether displaying verifier flags improves human review quality or efficiency, and therefore do not make that claim; the verifier should be regarded as a preliminary screening tool.

B Baseline Implementation Details

Serving and decoding. We serve open-weight models (Grattafiori et al., 2024; Yang et al., 2025) via vLLM with the per-model configuration in Ta-

ble 6; GPT-4o-mini is accessed via the Azure OpenAI API. When the prompt (system message, user instruction, and patient history) exceeds the input budget, we left-truncate the patient history, keeping the most recent notes and codes. Truncation uses each model’s native tokenizer. All open-weight and API-based language models were used in accordance with their respective licenses and terms of service.

YaRN context extension. Qwen3-32B’s native context window is 40,960 tokens. We extend it to 131,072 via YaRN rope-scaling with factor 4 (`rope_type=yarn, factor=4.0, original_max_position_embeddings=40960`). We set the vLLM environment variable `VLLM_ALLOW_LONG_MAX_MODEL_LEN=1` to permit a max-model-len above the model’s reported `max_position_embeddings`.

Query encoder and chunking. The RAG baseline reuses EVIGEN’s chunking and embedding setup (Appendix A.1.1): 200-token chunks with overlap, embedded by Qwen3-Embedding-8B.

Multi-factor RAG queries. For each task, Claude Opus 4.7 compiles candidate risk factors from the clinical literature; the factors are reviewed by clinical experts and finalized into a fixed list of note queries and code queries. Each query independently retrieves the top- $K = 4$ chunks by cosine similarity, and the retrieved chunks across all queries are concatenated as the RAG context. The per-task queries are listed in Tables 7, 8, and 9.

Full-context zero-shot prompt. Table 20 gives the verbatim system prompt and user-instruction template for the full-context zero-shot baseline (mortality task variant); the ADHD and autism variants substitute task-specific framing in the same slots.

RAG prompt. The RAG baseline reuses the zero-shot prompt schema (Table 20) with three substitutions: “complete clinical history (... in chronological order)” becomes “retrieved clinical evidence (... most relevant to mortality risk)”; “patient history” becomes “retrieved evidence”; and the requirement to include the note’s documented Date and Age in each supporting-evidence line is omitted, since retrieved chunks may not carry intact note headers. All other fields (hard rules, citation format, the per-factor structure, [Reasoning Lens],

[Recommendations], and output JSON schema) are identical.

Verbalizer. The verbalizer baseline reuses the zero-shot prompt schema (Table 20) with three modifications. The task is rephrased as binary Yes/No classification: the user instruction asks “Will this patient die within one year after their last discharge?” and the output format becomes Answer: <Yes or No> followed by `{"report": ... }` on the next line. The [Prediction + Explanation] section is reworded to state “the patient is predicted to die within 1 year” or “predicted to survive at least 1 year” instead of a numeric probability, and an added hard rule forbids stating probabilities anywhere in the rationale; all other fields (per-factor structure, citation rule, [Reasoning Lens], [Recommendations]) are unchanged. To recover a probability, we append “Answer: ” as an assistant prefill after `apply_chat_template(...)`, so that the model’s first generated token is exactly the verbalizer label; we then read the logits at this position and compute $P(\text{positive}) = \exp(z_{\text{Yes}}) / (\exp(z_{\text{Yes}}) + \exp(z_{\text{No}}))$. The default verbalizer pair is “Yes”/“No” (tokenized with a leading space in all baseline tokenizers); “+”/“−” and reserved special tokens are supported as alternative verbalizers for ablation.

C Additional Baseline Comparisons

C.1 Additional supervised baselines

To broaden the supervised comparison in §5.4 beyond IRIS, we add *REMed-Chunk*, an adaptation of REMed (Kim et al., 2024) to our note-and-code setting. The original REMed ranks structured EHR events with outcome supervision and predicts from the top- k events; we adapt it by treating each clinical-note chunk and ICD description as an event, using the same input embeddings as EVIGEN. We also add *ABMIL* (Ilse et al., 2018), which uses attention pooling over all note and code embeddings to form a patient representation, and *ModernBERT* (Warner et al., 2025), an 8K-context supervised encoder applied to the truncated patient record. All three are trained on the same train and validation splits and outcome labels as EVIGEN.

Table 10 reports AUC for all supervised methods with bootstrap 95% confidence intervals. An asterisk marks baselines that EVIGEN significantly outperforms, i.e., the bootstrap 95% confidence interval of the paired AUC difference lies entirely

Model	input budget	max-new-tokens
Llama-3.1-8B-Instruct	122,880	4,096
Llama-3.1-70B-Instruct	122,880	4,096
Qwen3-32B (thinking)	114,688	16,384
GPT-4o-mini	123,904	4,096

Table 6: Per-model prompt and generation budgets for baselines. Qwen3-32B reserves a larger output budget to accommodate thinking traces in addition to the JSON rationale.

#	Note query	Code query
1	End-of-life / palliative / hospice / DNR / DNI / advance directive / goals of care	Cardiac arrest, AMI, stroke, PE, ARDS, aortic dissection, sudden cardiac death
2	Organ failure / ICU / mechanical ventilation / vasopressors / cardiac arrest / dialysis / MOSF	ESRD, chronic HF, hepatic failure, chronic respiratory failure, dialysis, organ transplant
3	Multiple chronic conditions / DM with complications / HF / CKD / COPD / cirrhosis / end-stage disease	Malignant neoplasm, metastatic disease, advanced cancer, oncology, carcinoma
4	Functional decline / debility / failure to thrive / weight loss / malnutrition / bedbound / cognitive decline / dementia	Sepsis, severe sepsis, septic shock, bacteremia, infectious complication

Table 7: Multi-factor RAG queries for the 1-year mortality task (MIMIC-IV). 4 note queries + 4 code queries; each retrieves 4 chunks, for 32 retrieved chunks per patient.

above zero. Across all three tasks, EVIGEN outperforms the newly added supervised baselines, with the largest gains on the longer and sparser autism and ADHD cohorts.

C.2 ReAct-RAG

Most existing medical RAG systems retrieve from an external corpus, e.g., MedRAG (Zhao et al., 2025) and MIRAGE (Xiong et al., 2024a), or from an external knowledge graph, e.g., EMERGE (Zhu et al., 2024), which is a different task from EVIGEN’s within-record predictive retrieval. We therefore compare against ReAct-RAG (Cao et al., 2026), which interleaves reasoning and retrieval actions: after examining the evidence retrieved so far, the LLM generates a new patient-specific query to seek additional missing evidence, retrieves new chunks, and repeats this process over multiple rounds. Thus, unlike our fixed-query RAG baseline (§4.2), its retrieval queries depend on both the individual patient record and the evidence obtained in previous iterations. We use three retrieval rounds, following the original setup. The full EHR-RAG framework is not directly applicable without substantial adaptation because it is designed for structured event sequences and numeric temporal trajectories rather than free-text note chunks and ICD descriptions.

Tables 11 and 12 compare ReAct-RAG with EVIGEN on the mortality task. EVIGEN outperforms

ReAct-RAG on prediction AUC for every backbone and achieves substantially higher joint faithfulness pass rates.

D Component-Analysis Results

This appendix reports the full results for the component analysis in §6: the matched 2×2 faithfulness results for all four backbones and conditions (Table 13), the marginal effect of each component (Table 14), and the evidence-ranking comparison (Table 15).

E Compute and Hardware

EVIGEN’s Evidence Selection Layer and IRIS are trained on a single A5000 Ada GPU (32 GB VRAM). LLM inference uses one H200 (141 GB VRAM) for 8B-scale models (Llama-3.1-8B-Instruct), two H200s in parallel for 32B and 70B models (Qwen3-32B-thinking and Llama-3.1-70B-Instruct), and four H200s for fine-tuning jobs (QLoRA baselines and the process-supervised verifier). GPT-4o-mini is accessed via the Azure OpenAI API.

F Datasets

Tables 16 and 17 report cohort sizes and per-patient history-length statistics for the three datasets used in this paper. This appendix gives their cohort definitions and preprocessing; the train/validation/test splits and class balance are described in §4.

#	Note query	Code query
1	Attention difficulties / distractibility / careless mistakes / unable to sustain attention / forgetful / loses things	ADHD subtypes (inattentive, hyperactive-impulsive, combined, other, unspecified)
2	Hyperactivity / impulsivity / fidgeting / cannot stay seated / blurts out / interrupts / restless	Disruptive behavior disorders (oppositional defiant, intermittent explosive, conduct disorder)
3	School / academic concerns / learning difficulties / academic underperformance / school refusal	Specific learning disorders (reading, mathematics, written expression)
4	Behavioral and conduct issues / oppositional / defiant / aggressive / disciplinary problems	Anxiety and mood disorders (generalized anxiety, depression, separation anxiety, social anxiety)
5	Sleep / routine disruption / difficulty falling asleep / fatigue / restless sleep	Sleep disorders (insomnia, parasomnia, restless-legs, irregular sleep-wake)
6	Comorbid emotional and developmental concerns / low self-esteem / peer-relationship issues	Other neurodevelopmental disorders (tic, motor, speech, developmental coordination)

Table 8: Multi-factor RAG queries for the ADHD task. 6 note queries + 6 code queries; each retrieves 4 chunks, for 48 retrieved chunks per patient.

#	Note query	Code query
1	Speech / language delay / delayed speech / language regression / expressive impairment	Autism spectrum disorder, autistic disorder, Asperger’s, pervasive developmental disorder
2	Repetitive behaviors / restricted interests / sensory sensitivities / hand-flapping / lining up objects	Developmental delay / global developmental delay / mixed developmental disorder
3	Social communication / eye contact / joint attention / solitary play / social-emotional reciprocity	Intellectual disability (mild / moderate / severe), cognitive impairment
4	Cognitive / learning concerns / developmental milestones / regression of skills	Comorbid psychiatric (ADHD, anxiety, mood, oppositional defiant)
5	Pediatric medical / GI symptoms / motor delays / hypotonia / atypical head circumference / feeding issues	Neurological disorders (epilepsy, seizure, cerebral palsy, microcephaly, macrocephaly)
6	Sleep / behavioral regulation / anxiety / behavior dysregulation / mood problems	Sleep / GI / motor / sensory-processing disorders

Table 9: Multi-factor RAG queries for the autism task. 6 note queries + 6 code queries; each retrieves 4 chunks, for 48 retrieved chunks per patient.

F.1 MIMIC-IV mortality

We use MIMIC-IV (Johnson et al., 2023) for the 1-year all-cause mortality task. For each patient, the index event is their last hospital discharge in the available record; the outcome is whether the patient dies within 365 days of that discharge, determined from the linked death-information table. MIMIC-IV is a de-identified clinical dataset with credentialed access requirements designed to protect patient privacy.

Inclusion criteria.

- Age > 40 years at the index discharge.
- At least 3 discharge notes across the patient’s available history.
- Discharge density > 1 discharge per 200 days across the patient’s available history, retaining patients with an active care trajectory rather than isolated visits.

For each included patient, the input to all methods is the concatenation of their discharge notes and structured ICD diagnostic codes up to and including the index discharge, ordered chronologically.

F.2 Autism and ADHD early risk prediction

The autism and ADHD datasets are early-age risk prediction tasks drawn from an institutional pediatric EHR system. For each patient, the input is the EHR available before a fixed age cutoff (1.5 years for autism, 3 years for ADHD), and the outcome is whether the patient subsequently receives a clinical diagnosis of the target condition. Both cohorts share the same structure: (i) a positive cohort defined by a confirmed diagnosis plus an age-window visit requirement, and (ii) a negative cohort drawn from the same EHR system. Cohort sizes are reported in Table 16.

Method	Mortality	Autism	ADHD
IRIS	0.868 [0.858, 0.879]	0.703* [0.681, 0.726]	0.669* [0.645, 0.693]
QLoRA-8B (32K)	0.881 [0.871, 0.891]	0.663* [0.636, 0.691]	0.560* [0.533, 0.586]
QLoRA-8B (RAG)	0.864 [0.852, 0.875]	0.689* [0.664, 0.714]	0.647* [0.622, 0.672]
REMed-Chunk	0.862* [0.850, 0.873]	0.686* [0.663, 0.709]	0.660* [0.634, 0.685]
ABMIL	0.865* [0.853, 0.876]	0.668* [0.641, 0.695]	0.649* [0.623, 0.675]
ModernBERT	0.859* [0.849, 0.870]	0.624* [0.598, 0.650]	0.552* [0.524, 0.580]
EViGEN (ours)	0.871 [0.860, 0.881]	0.730 [0.705, 0.754]	0.704 [0.680, 0.728]

Table 10: Full supervised-baseline comparison. We report AUC with bootstrap 95% confidence intervals on the three datasets. *: EViGEN significantly outperforms the baseline (bootstrap 95% CI of the paired AUC difference entirely above zero). Best per column in **bold**.

Method	Backbone	Mortality AUC
ReAct-RAG	Llama-3.1-8B	0.729
	Llama-3.1-70B	0.679
	Qwen3-32B	0.813
	GPT-4o-mini	0.712
EViGEN (ours)	—	0.871

Table 11: Prediction performance of ReAct-RAG on the mortality task. EViGEN’s prediction is produced by its Evidence Selection Layer and does not depend on the generation backbone.

Autism cohort. A patient is included as a positive if all of the following hold:

- Born on or after 2014-01-01, so that the full early-childhood EHR window is captured by the source system.
- Has a recorded clinical diagnosis of autism spectrum disorder at any point in the available record.
- Has at least one well-child visit in each of three age windows: 0-6 months, 6-12 months, and 12-18 months, so that all positives have a comparable baseline of prediagnostic primary-care contact.

The model input for each autism patient is the EHR (clinical notes and ICD codes) accrued before age 1.5 years.

ADHD cohort. A patient is included as a positive if all of the following hold:

- Born on or after 2014-01-01.
- Has a recorded clinical diagnosis of ADHD at any point in the available record.

Backbone	Method	S1	S2	S1 & S2
Llama-3.1-8B	ReAct-RAG	8.5	69.3	5.9
	EViGEN	72.6	81.0	58.8
Llama-3.1-70B	ReAct-RAG	60.9	80.3	48.9
	EViGEN	67.7	83.1	56.3
Qwen3-32B	ReAct-RAG	23.5	94.6	22.2
	EViGEN	55.7	94.2	52.5
GPT-4o-mini	ReAct-RAG	29.7	94.5	28.1
	EViGEN	72.9	88.6	64.6

Table 12: Rationale faithfulness of ReAct-RAG and EViGEN on the mortality task. S1 = source grounding pass rate; S2 = reasoning consistency pass rate (evaluated on factors passing S1); S1 & S2 = joint pass rate across all 22 checks (§4.3). The higher S1 & S2 per backbone is in **bold**.

- Has at least one well-child visit in each of four age windows: 0-6 months, 6-12 months, 12-24 months, and 24-36 months.

The model input for each ADHD patient is the EHR accrued before age 3 years.

Leakage controls. Label leakage is controlled in two ways. First, prediction uses only EHR data recorded before the age cutoff (1.5 years for autism, 3 years for ADHD), both well before the typical age of diagnosis, so information dated after the cutoff, including target-condition referrals, diagnostic mentions, and ICD codes, cannot enter the model input. Second, we exclude patients with autism-related or ADHD-related ICD-10 codes recorded before the corresponding cutoff.

Negative selection. For each task, negatives are drawn from patients in the same EHR system who meet the same visit-window requirement as the corresponding positive cohort and have no recorded diagnosis of the target condition at any point in the available record. Negatives are frequency-matched to positives on the marginal distributions of age, sex, birth year, year of last encounter, and total observed EHR duration from the first to the last recorded encounter; duration matching reduces the risk of assigning negative labels simply because patients have shorter observation histories and fewer opportunities to receive a diagnosis. A negative label denotes no recorded target diagnosis in the available EHR, rather than confirmed lifetime absence of the condition, as matching cannot guarantee complete post-cutoff follow-up or capture diagnoses made outside our health system.

Backbone	Setting	S1	S2	S1 & S2
Llama-3.1-8B	IG + scaffold	72.6	81.0	58.8
	RAG + scaffold	64.3	74.6	48.0
	IG + free-form	65.7	70.8	46.6
	RAG + free-form	51.7	66.1	34.1
Llama-3.1-70B	IG + scaffold	67.7	83.1	56.3
	RAG + scaffold	62.1	81.1	50.4
	IG + free-form	45.8	80.1	36.7
	RAG + free-form	36.4	75.8	27.6
Qwen3-32B	IG + scaffold	55.7	94.2	52.5
	RAG + scaffold	50.4	93.5	47.1
	IG + free-form	33.8	92.6	31.3
	RAG + free-form	33.6	88.8	29.9
GPT-4o-mini	IG + scaffold	72.9	88.6	64.6
	RAG + scaffold	67.2	89.2	59.9
	IG + free-form	64.4	89.6	57.7
	RAG + free-form	54.7	86.5	47.3

Table 13: Matched 2×2 faithfulness comparison on the mortality task, crossing evidence source (IG-ranked vs. similarity-ranked RAG, top-5 chunks each) with generation input (EVI GEN’s evidence scaffold vs. free-form). “IG + scaffold” corresponds to EVI GEN. The RAG + free-form condition uses the matched top-5 budget and shared predicted probability, so its values differ from the full RAG baseline in Table 2. The highest S1 & S2 per backbone is in **bold**.

Backbone	Scaffold			Evidence		
	S1	S2	S1 & S2	S1	S2	S1 & S2
Llama-8B	+9.7	+9.4	+13.0	+11.2	+5.6	+11.6
Llama-70B	+23.8	+4.2	+21.2	+7.5	+3.2	+7.5
Qwen3-32B	+19.3	+3.2	+19.2	+2.7	+2.2	+3.4
GPT-4o-mini	+10.5	+0.9	+9.7	+7.7	+1.3	+7.5

Table 14: Marginal component effects from the matched 2×2 experiment (Table 13): average change in each faithfulness metric from adding the evidence scaffold (left) and from switching similarity-ranked to IG-ranked evidence (right).

Institutional protocol. EHR extraction, deidentification, and analysis were carried out under approval of the relevant institutional review board.

F.3 Preprocessing

For all three datasets, free-text notes are split into 200-token chunks with overlap and embedded with Qwen3-Embedding-8B (Appendix A.1.1); each chunk is prefixed with an age-aware header so the embedding carries demographic context. ICD codes are embedded from their official long-title descriptions with the same age prefix and duplicated at the (patient, code, version) level so a recurring diagnosis is counted once per patient.

Consumer	IG Top-5	Similarity Top-5
EVI GEN predictor	0.868	0.661
Qwen3-32B	0.803	0.589
Llama-3.1-8B	0.742	0.596
Llama-3.1-70B	0.737	0.599
GPT-4o-mini	0.706	0.560

Table 15: Prediction AUC on the mortality task when each consumer model predicts from a matched five-chunk evidence set, ranked either by EVI GEN’s Integrated Gradients attribution or by cosine similarity to the fixed RAG queries.

Dataset	Total	Pos.	Neg.	Prev.
Mortality (MIMIC-IV)	13,394	5,445	7,949	40.7%
Autism	9,597	1,602	7,995	16.7%
ADHD	9,756	1,767	7,989	18.1%

Table 16: Cohort sizes and class balance for the three datasets.

G Faithfulness Evaluation Methodology

Note-only setup. Faithfulness is evaluated on note-only rationales: every generated rationale is required to cite clinical notes as evidence, not ICD codes. ICD code descriptions are short and easy to reproduce verbatim, while note chunks are long and information-dense and much more prone to paraphrasing or hallucination when quoted. Because LLMs differ in how often they prefer ICD versus note evidence, allowing both types would conflate a model’s quote fidelity with its preference for easy-to-quote material. By restricting evidence to notes, we put all models in the same quoting setting, so S1 (and therefore S1 & S2) reflects faithfulness rather than evidence-type preference.

G.1 Stage 1: source grounding

String-match algorithm. For each cited quote in a rationale, we score how well it matches the cited source note using `rapidfuzz.partial_ratio`. Given two strings s_1, s_2 , let short be the shorter of the two and let w range over substrings of the longer string with length $|\text{short}|$. The score is

$$\text{partial_ratio}(s_1, s_2) = 100 \cdot \max_w \frac{\text{LCS}(\text{short}, w)}{|\text{short}|},$$

where $\text{LCS}(\cdot, \cdot)$ denotes the longest common subsequence length. Intuitively, the shorter string is slid across the longer one and the best-aligned window’s LCS-based similarity is reported. We treat a quote as grounded if the score is ≥ 90 , which tolerates roughly 5-10% character-level disagreement,

Dataset	<i>min</i>	<i>p25</i>	<i>median</i>	<i>p75</i>	<i>p90</i>	<i>p99</i>	<i>max</i>	<i>mean</i>
Mortality (MIMIC-IV)	1,946	7,000	9,972	16,190	28,252	78,507	266,860	14,691
Autism	4,502	33,599	49,011	72,146	119,421	1,411,827	5,055,035	100,964
ADHD	3,292	41,622	58,735	86,242	138,778	1,392,111	8,587,998	108,465

Table 17: Per-patient history length in tokens, using the Llama-3.1-8B tokenizer on the raw patient text without truncation. Autism and ADHD statistics are computed on the training split; validation and test splits show comparable distributions. The long right tail (p99 in the millions) reflects a small subset of patients with extensive prior healthcare contact. The 122,880-token input budget used by LLM baselines (Table 6) is exceeded by 9.5% of autism and 12.7% of ADHD test patients, who are left-truncated for the baselines; EVIGEN’s retrieval-based design processes all patients without truncation.

typically from minor punctuation or whitespace artifacts.

Text normalization. Both the source text (when the note index is built) and the rationale quote (at match time) are passed through the same normalization pipeline, so that the comparison happens in a single canonical form: (i) Unicode NFKC normalization, which collapses visually equivalent but distinct code points (fullwidth digits, ligatures, etc.); (ii) replacement of non-breaking spaces (U+00A0) with regular spaces, which NFKC does not handle; (iii) collapsing of consecutive whitespace into a single space, since clinical notes are heavily multiline while LLM-generated quotes are typically single-line; (iv) trimming and lowercasing. Without this step, the partial-ratio score is depressed by formatting differences that carry no clinical content.

Ellipsis-segmented quotes. Some reasoning-model backbones (notably Qwen3-32B in thinking mode) occasionally write quotes containing an ellipsis (e.g., “A ... B”) to indicate that part of the original passage has been omitted. A direct partial-ratio against the source then scores poorly because the source contains no contiguous “A...B”. We split such quotes on the ellipsis marker, score each segment against the source independently, and take the minimum segment score as the quote’s ground-ing score. A quote with skipped content is therefore accepted only if every contiguous segment is individually grounded.

G.2 Stage 2: reasoning consistency

Judge model and setup. We use GPT-4o (via the Azure OpenAI API) as the Stage 2 judge. The judge sees only the rationale being audited; the patient EHR is not provided. This keeps the per-rationale judging cost low (one short call regardless of EHR length) and forces the judge to assess internal coherence between each factor’s quoted

observation and its stated reasoning, rather than re-deriving conclusions from the full record.

Prompt and output schema. Table 21 gives the verbatim system prompt, the user message structure, and the JSON schema the judge is asked to return. The schema produces two booleans per factor (`reasoning_follows_from_evidence`, `reasoning_uses_only_stated_evidence`) and two overall booleans (`overall_reasoning_follows_from_factors`, `overall_uses_only_stated_factors`); field definitions are listed in the same table.

Aggregation. The judge produces two booleans per factor and two overall booleans, giving $2 \times 5 + 2 = 12$ Stage 2 checks per rationale. Combined with the two Stage 1 checks per factor (citation ID validity, evidence matching), each 5-factor rationale has $2_{S1} \times 5 + 2_{S2} \times 5 + 2_{\text{overall}} = 22$ checks. A rationale passes Stage 2 only if all 12 Stage 2 booleans are true; the S1 & S2 pass rate reported in §5.2 requires all 22.

H Clinical Reviewer Pilot

Study design. We recruited 7 medical students to evaluate three rationale types: (i) the EVIGEN rationale (prediction + evidence-scaffolded reasoning + process verification), (ii) a standard LLM free-form explanation (prediction + unstructured narrative), and (iii) the raw output of EVIGEN’s Evidence Selection Layer (prediction probability + top-attribution chunks with scores, no LLM narrative). Each of the three systems generated rationales for the same 20 randomly selected patients, and every reviewer reviewed the rationales from all three systems, presented in randomized order. Reviewers were given only the generated rationales, with no access to the underlying EHR or any other patient information; they therefore assumed predictions were correct and cited quotes were not hallu-

minated. This design is deliberately conservative toward EVIGEN: holding prediction correctness and quote fidelity fixed across formats isolates explanation quality and removes the two axes on which EVIGEN is measurably stronger (§5.1, §5.2). Each reviewer rated all three rationale types on a 30-item Likert questionnaire (1 = strongly disagree, 5 = strongly agree) and provided an overall preference ranking. Four items are reverse-coded; all scores below are reported after reverse-coding. This study was approved by the Institutional Review Board (IRB) of our institution. All participants provided informed consent prior to participation.

Constructs. The 30 items are organized into five constructs drawn from validated user-evaluation scales: **Usability** (14 items from SUS (Brooke et al., 1996), HSUS (Ghorayeb et al., 2023), and SCS (Holzinger et al., 2020)), **Informativeness** (3 items from HSUS and ESS (Hoffman et al., 2023)), **Actionability** (6 items from HSUS), **Trust** (6 items from SUS, HSUS, and Hoffman Trust (Hoffman et al., 2023)), and **Engagement** (1 item from SUS).

H.1 Construct-level ratings

Figure 3 reports the mean Likert score (1-5) per evaluation construct, averaged across the 7 reviewers for each of the three reviewed methods: EVIGEN, the standard LLM free-form explanation, and the raw Evidence Selection Layer output (“Evidence Pack”). The 30 survey items in Table 22 are aggregated into five constructs (Usability, Informativeness, Actionability, Trust, Engagement) by averaging the items assigned to each construct. EVIGEN leads on Informativeness, Actionability, and Trust; the free-form LLM explanation edges EVIGEN on Usability (simpler output, no attribution scores or verifier flags to interpret); the bare Evidence Pack trails both narrative formats on most constructs and notably on Engagement. Mean (SD) values per construct are reported in Table 18; on the standardized SUS usability scale (0-100), scores are 70.0 (“OK”) for EVIGEN, 83.6 (“Good”) for Free-Form, and 30.7 (“Poor”) for Evidence Pack.

H.2 Per-item results

Table 23 reports the mean score for each of the 30 survey items across the three systems. EVIGEN shows its largest advantages on items related to supporting (not dictating) decisions (Q23: 4.43 vs. 3.43), improving care quality (Q19: 3.71 vs. 3.00), and showing sufficient detail (Q16: 3.29

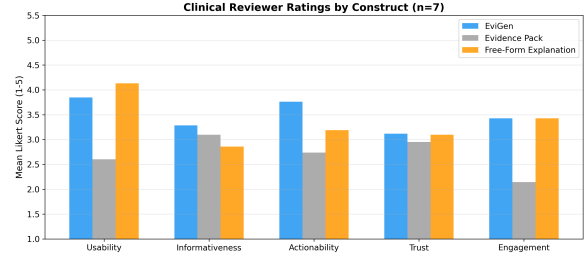


Figure 3: Construct-level mean Likert ratings (1-5) from the clinical reviewer pilot ($n = 7$ medical students). Each construct aggregates a subset of the survey items in Table 22. EVIGEN leads on Informativeness, Actionability, and Trust; the free-form LLM explanation rates slightly higher on Usability.

Construct	EVIGEN <i>M</i> (<i>SD</i>)	Evid. Pack <i>M</i> (<i>SD</i>)	Free-Form <i>M</i> (<i>SD</i>)
Usability (14)	3.85 (0.41)	2.60 (0.61)	4.13 (0.46)
Informativeness (3)	3.29 (0.45)	3.10 (0.90)	2.86 (0.42)
Actionability (6)	3.76 (0.53)	2.74 (0.63)	3.19 (0.44)
Trust (6)	3.12 (0.51)	2.95 (0.36)	3.10 (0.25)
Engagement (1)	3.43 (0.98)	2.14 (1.07)	3.43 (0.54)
Overall	3.49	2.71	3.34

Table 18: Construct-level clinical reviewer ratings (mean and SD across $n=7$ reviewers, 1-5 Likert scale). Number in parentheses after construct name is item count. Best per row in **bold**.

vs. 2.00). Free-Form Explanation leads on pure usability items such as complexity (Q1: 5.00 vs. 4.00) and navigability (Q8: 4.43 vs. 3.57).

H.3 Survey Questionnaire

Each reviewer rated 30 items per rationale on a 5-point Likert scale (1 = Strongly Disagree, 5 = Strongly Agree). The items are adapted from four validated user-evaluation scales for decision-support systems and grouped by source scale in Table 22. The placeholder [System] stands for the method being rated, and is substituted at survey time with EVIGEN, the standard LLM rationale (prediction + free-form explanation), or the raw output of EVIGEN’s Evidence Selection Layer.

Field	Content
Role	Clinical interpretability assistant for EVIGEN, a model that predicts patient outcomes from structured and unstructured EHR evidence.
Task	Binary prediction of all-cause mortality within 1 year after the patient’s last hospital discharge.
Input	(1) Predicted probability; (2) top- <i>k</i> predictive factors (ICD codes and note snippets) with signed attribution score and similarity score.
Goals	Conservative, evidence-grounded interpretation. Do not infer diagnoses, severity, or mechanisms beyond what is explicitly stated. Keep physiologic reasoning general; provide only high-level care considerations.
Output structure (in this exact order)	
[Prediction + Explanation]	State that this is a prediction of all-cause mortality within 1 year; report a population percentile if provided; summarize main clinical patterns in plain language. Indicate chronic/acute/end-stage only if clear from the evidence.
[Evidence Reasoning]	For each factor, use the four labeled fields below.
Factor summary	Strictly descriptive paraphrase of the evidence or ICD label; no added diagnoses, mechanisms, or severity descriptors.
Supporting evidence	Short VERBATIM quote from the note or ICD description, with documented date/time for notes. Every line MUST end with a citation in one of: (note_id: XXXXX) or (ICD code: XXXXX-X), copied verbatim.
Reasoning	1-2 plain sentences: restate the clinical finding, give a broad physiologic/prognostic implication, then connect to 1-year mortality risk. Stay general and conservative. For healthcare-process documentation (e.g., teach-back attestations, template language), frame as a healthcare-engagement proxy and stop there. The conclusion direction must match the attribution sign (positive ⇒ pushes risk up; negative ⇒ pushes risk down).
Attribution score	Line of the form Attribution score: X, where X is the signed attribution to 4 decimal places (e.g., +1.2744 or -0.0786). This is a feature-contribution value, not a probability change.
[Reasoning Lens]	3-4 sentences synthesizing the factors into a coherent narrative for the predicted risk. Do not introduce new diagnoses or events; describe temporal patterns only if implied by the evidence.
[Recommendations]	General considerations (prognosis communication, goals-of-care, symptom-focused support) and one tentative consideration per factor. Tentative language only (“may”, “could be relevant”); no specific diagnostics, medications, or procedures.
Closing rule	If uncertain whether a statement is supported by the evidence, omit it.

Table 19: Prompt structure for the rationale-generation LLM (mortality task variant). The 4-section output schema and citation format are enforced by the prompt. Supporting-evidence lines must end with one of two citation formats, which the citation rule in §3.3 mechanically verifies.

EviGen Report

Mortality prediction: 0.8776

[Prediction + Explanation]

The model predicts a probability of 0.877600 for all-cause mortality within 1 year after hospital discharge, indicating a high risk of death within this timeframe. This probability suggests that the patient is in a concerning percentile for mortality risk. The predictive factors highlight significant chronic medical conditions, including heart failure, chronic kidney disease, and diabetes, which collectively suggest a complex clinical picture that may contribute to the patient's overall mortality risk.

[Predictive Factors + Evidence-Based Reasoning]

- Factor summary:** The patient has a history of chronic heart failure, with recent weight fluctuations and declining exercise tolerance.
Supporting evidence: "She states that his CHF is followed closely by his outpt cardiologist and PCP. Weights are taken daily and have been varying more frequently over the past 6 months between 153 and 162 pounds, currently 157 pounds." (note_id: 14687961-DS-24)
Reasoning: The evidence of fluctuating weight and declining exercise tolerance may reflect worsening heart failure, which can lead to further deterioration in overall health and increase the risk of mortality due to cardiac events.
Attribution score: +0.3120
>> Possible hallucination – Check whether this information exists in the evidence.
- Factor summary:** The patient has a history of acute on chronic systolic heart failure, with recent diuresis and management of shortness of breath.
Supporting evidence: "He did not have evidence of significant volume overload on exam but given his wheezing and mild shortness of breath he was gently diuresed with his home regimen of lasix and metolazone." (note_id: 14687961-DS-24)
Reasoning: The management of acute symptoms related to heart failure indicates ongoing instability in cardiac function, which is a significant risk factor for mortality in the coming year.
Attribution score: +0.1925
- Factor summary:** The patient has stage IV chronic kidney disease, with a notable increase in creatinine levels.
Supporting evidence: "Creatinine on admission was 3.8 from baseline 2.5-3.3." (note_id: 14687961-DS-24)
Reasoning: The presence of advanced chronic kidney disease suggests compromised renal function, which can lead to systemic complications and is associated with increased mortality risk.
Attribution score: +0.1197

- Factor summary:** The patient has a history of type II diabetes, with recent adjustments to insulin management during hospitalization.

Supporting evidence: "His insulin agents were held and he received an insulin sliding scale while in the hospital." (note_id: 14687961-DS-24)

Reasoning: The need for insulin management during hospitalization may indicate poor glycemic control, which can complicate other chronic conditions and contribute to overall mortality risk.

Attribution score: +0.0386

- Factor summary:** The patient has a history of atrial fibrillation and is anticoagulated with Coumadin.

Supporting evidence: "Patient is s/p pacemaker placement. He is anticoagulated with coumadin." (note_id: 14687961-DS-24)

Reasoning: The management of atrial fibrillation with anticoagulation suggests a history of cardiovascular issues, which can further complicate the patient's health status and increase mortality risk.

Attribution score: +0.0270

[Reasoning Lens]

The predictive factors collectively indicate a patient with multiple chronic conditions, including heart failure, chronic kidney disease, and diabetes, all of which are associated with increased mortality risk. The evidence supports ongoing instability in cardiac function and renal health, which may lead to further complications. The high predicted probability of mortality reflects the cumulative effect of these chronic conditions on the patient's overall health status.

[Recommendations]

General: Continue monitoring prognosis and aligning goals of care with the patient and family, focusing on quality of life and symptom management.

For Predictive Factors: The fluctuating weight and declining exercise tolerance may warrant attention to heart failure management strategies. The advanced chronic kidney disease could be relevant for discussions about renal support options. The diabetes management may need to be closely monitored to prevent further complications.

Automated verification: 26 of 27 steps passed.

Flagged: Factor 1 – Possible hallucination

Figure 4: Complete EViGen-generated rationale (mortality task) with verifier step-level verification overlay. The verifier flags Factor 1 as a possible hallucination: the cited quote supports the weight fluctuation but does not mention the “declining exercise tolerance” that appears in the factor summary and reasoning. The bottom status line summarizes per-step verification results.

Field	Content
System prompt	
Role and goal	You are a clinical interpretability assistant. Given a patient’s complete clinical history (clinical notes and ICD diagnostic codes in chronological order), you (1) estimate the probability of all-cause mortality within 1 year of the last hospital discharge, and (2) produce a conservative, evidence-grounded clinical rationale identifying the top 5 predictive factors drawn ONLY from the provided history.
Hard rules	Do NOT infer diagnoses, severity, or mechanisms beyond what is explicitly stated in the evidence. Keep physiologic reasoning general and non-specific. Provide only high-level care considerations, not specific treatment plans.
Citation format	Cite EVERY supporting-evidence line using one of these EXACT formats, copying the identifier verbatim from the patient history: (note_id: XXXXX) for clinical-note evidence; (ICD code: XXXXX-X) for ICD-based evidence. Do not use any other citation format. Omit attribution scores.
Output discipline	Respond with STRICT JSON only.
User instruction	
Intro	Below is a single patient’s complete clinical history, ordered from oldest to newest. Each note header includes its note_id and each code line includes its ICD code-version identifier.
Step 1	Estimate the probability (float in [0.0, 1.0]) that this patient will die within one year after their last discharge.
Step 2	Write a clinical rationale following exactly the structure below; output it as the value of the report field (use \n for line breaks).
[Prediction + Explanation]	State that this is a prediction of all-cause mortality within 1 year; report the estimated probability; summarize main clinical patterns in plain, non-technical language. Mention <i>chronic</i> , <i>acute</i> , or <i>end-stage</i> only if clearly supported. Related factors may be grouped under a brief, clinically intuitive heading when supported.
[Predictive Factors + Evidence-Based Reasoning]	For each of the top 5 factors: (i) <i>Factor summary</i> : strictly descriptive paraphrase of the evidence or ICD label; no added diagnoses, mechanisms, or severity. (ii) <i>Supporting evidence</i> : short direct quote (notes) or ICD description, with documented Date and Age for notes; every line ends with a citation in the exact format above. (iii) <i>Reasoning</i> : one sentence in the form (<i>evidence as stated</i>) → (<i>broad physiologic or prognostic implication</i>) → (<i>impact on 1-year mortality risk</i>).
[Reasoning Lens]	3-4 sentences synthesizing the 5 factors into a coherent narrative for the estimated risk. No new diagnoses or events.
[Recommendations]	1-2 general considerations (prognosis communication, goals-of-care, symptom-focused support) plus one tentative care consideration per factor. Tentative language only (“may”, “could be relevant”); no specific diagnostics, medications, or procedures.
Output schema	Respond with ONLY a single JSON object, no prose outside the object, no markdown fences: {"probability": <float in [0.0, 1.0]>, "report": <string>}

Table 20: Verbatim full-context zero-shot baseline prompt (mortality task variant). The output schema mirrors EVIGEN’s rationale structure (Figure 1) but omits the attribution-score field.

Field	Content
System prompt	
<i>You are auditing a clinical rationale for internal coherence. You will see ONE rationale. The rationale contains 5 numbered factors; each factor has a Supporting evidence line and a Reasoning sentence. The rationale ends with a Reasoning Lens that synthesizes the 5 factors. Do NOT judge medical correctness or whether the prognosis is right. Judge only whether the reasoning the rationale itself states follows from the evidence the rationale itself stated. Return strict JSON.</i>	
User message	
Body	The full text of the rationale under audit, followed by the schema instruction.
Schema instruction	<i>Return a JSON object with this exact shape (no extra keys): (template below)</i>
JSON output schema	
<pre>{ "per_factor": [{"idx": <int 1-5>, "reasoning_follows_from_evidence": <bool>, "reasoning_uses_only_stated_evidence": <bool>, "rationale": "<=1 short sentence"> }, ...], "overall_reasoning_follows_from_factors": <bool>, "overall_uses_only_stated_factors": <bool>, "overall_rationale": "<=2 sentences"> }</pre>	
Field definitions	
reasoning_follows_from_evidence	Does the factor's Reasoning sentence logically follow from its Supporting evidence?
reasoning_uses_only_stated_evidence	Does the factor avoid introducing facts not present in the Supporting evidence (e.g., diagnoses, dates, severity not stated in the quote)?
overall_reasoning_follows_from_factors	Does the Reasoning Lens follow from the 5 factors?
overall_uses_only_stated_factors	Does the Reasoning Lens avoid introducing factors or evidence not listed above?

Table 21: Stage 2 reasoning-consistency judge prompt and JSON output schema. The judge (GPT-4o) sees only the rationale under audit; the patient EHR is not passed in. A rationale passes Stage 2 only if all per-factor booleans are true for every factor and both overall booleans are true.

#	Item
System Usability Scale (SUS; Brooke et al., 1996)	
1	I found [System] unnecessarily complex.
2	I thought [System] was easy to use.
3	I would imagine that most people would learn to use [System] very quickly.
4	I found [System] very cumbersome to use.
5	I felt very confident using [System].
6	I thought there was too much inconsistency in [System].
7	I think that I would like to use [System] frequently.
Health-IT System Usability Scale (HSUS; Ghorayeb et al., 2023)	
8	[System] fits well with the way I currently work.
9	I found the information provided on the screen understandable.
10	I found it easy to navigate through [System].
11	The screen layout makes it easy to see each piece of information.
12	On the screen, I can find specific information I need quickly.
13	[System] generates a useful summary view of the patient's current health status.
14	[System] helps me work more efficiently.
15	I am able to provide better quality of care for patients by using [System].
16	It is easier to make efficient decisions by using [System].
17	[System] helps improve patient outcomes.
18	[System] helps prevent clinical errors.
System Causability Scale (SCS; Holzinger et al., 2020)	
19	I understood the explanations within the context of my work.
20	I did not need support to understand the explanations.
21	I was able to use the explanations with my knowledge base.
22	I think that most people would learn to understand the explanations very quickly.
23	[System]'s explanation has sufficient detail.
Explanation Satisfaction & Trust (ESS / Trust; Hoffman et al., 2023)	
24	[System]'s explanation shows me how accurate [System] is.
25	[System] supports my decision-making rather than dictating it.
26	I understand how [System] creates its recommendations, scores, or alerts.
27	[System]'s recommendations, scores, or alerts are consistent with clinical practices and standards.
28	I believe the recommendations, scores, or alerts are reliable.
29	I am confident in [System]. I feel that it works well.
30	I am wary of [System].

Table 22: Clinical reviewer survey items, grouped by source scale. Each reviewer rated each item on a 5-point Likert scale (1 = Strongly Disagree, 5 = Strongly Agree). The placeholder [System] is substituted with the method being rated (EViGEN, the standard LLM rationale, or the raw Evidence Selection Layer output).

#	Source	Item	EVIGEN	Evid. Pack	Free-Form
<i>Usability</i>					
Q1	SUS	Unnecessarily complex (R)	4.00	2.14	5.00
Q2	SUS	Easy to use	3.86	2.00	4.43
Q3	SUS	Learn quickly	3.71	2.29	4.57
Q4	SUS	Cumbersome (R)	4.14	2.29	4.71
Q5	SUS	Confident using	3.29	2.43	3.00
Q6	HSUS	Fits workflow	3.43	2.29	3.57
Q7	HSUS	Screen understandable	4.00	3.00	4.43
Q8	HSUS	Easy to navigate	3.57	2.29	4.43
Q9	HSUS	Layout clear	3.43	2.29	4.00
Q10	HSUS	Find info quickly	3.43	2.00	3.57
Q11	SCS	Explanations in context	4.43	3.57	4.14
Q12	SCS	No support needed	4.00	3.43	4.00
Q13	SCS	Use with knowledge base	4.43	3.57	4.14
Q14	SCS	Learn explanations quickly	4.14	2.86	3.86
<i>Informativeness</i>					
Q15	HSUS	Useful summary view	3.71	2.57	4.00
Q16	ESS	Sufficient detail	3.29	3.43	2.00
Q17	ESS	Shows accuracy	2.86	3.29	2.57
<i>Actionability</i>					
Q18	HSUS	Work efficiently	4.00	2.29	3.86
Q19	HSUS	Better quality care	3.71	2.57	3.00
Q20	HSUS	Easier decisions	4.00	2.57	3.00
Q21	HSUS	Improve outcomes	3.29	3.00	3.14
Q22	HSUS	Prevent errors	3.14	3.00	2.71
Q23	HSUS	Supports not dictates	4.43	3.00	3.43
<i>Trust</i>					
Q24	SUS	Too much inconsistency (R)	3.57	3.86	4.00
Q25	HSUS	Understand how it works	2.71	2.14	2.43
Q26	HSUS	Consistent with standards	3.14	3.43	3.29
Q27	HSUS	Reliable	3.00	3.43	3.43
Q28	Hoffman	Confident in system	3.29	2.43	3.00
Q29	Hoffman	Wary (R)	3.00	2.43	2.43
<i>Engagement</i>					
Q30	SUS	Use frequently	3.43	2.14	3.43

Table 23: Per-item mean scores across $n=7$ reviewers (1-5 Likert, after reverse-coding). Items marked (R) are reverse-coded. Best per row in **bold**.