

ProMediConv: Benchmarking Proactive Conversational Agents in Legal Dispute Mediation

Zesheng Wei^{1*} Mengfan Li² Wenhao Liu¹ Yixin Zhang³ Zilei Wang^{1†} Yang Deng²

¹University of Science and Technology of China ²Singapore Management University

³Institute of Artificial Intelligence, Hefei Comprehensive National Science Center

{zswei, wenhaoliu}@mail.ustc.edu.cn, mengfanli1024@gmail.com

{zhyx12, zlwang}@ustc.edu.cn, ydeng@smu.edu.sg

Abstract

Dispute mediation is essential for maintaining social harmony and resilience, yet developing skilled mediators is costly and time-consuming. Existing LLM-based mediation research remains limited by unrealistic task formulations, low-fidelity datasets, and coarse evaluation metrics that obscure turn-by-turn dynamics. To address these gaps, we introduce ProMediConv, a novel benchmarking framework that models mediation as a proactive, multi-stage, and party-aware dialogue process incorporating 11 mediation strategies and four party behavior pattern (BP) states. Using 972 complete real-world cases, we construct a high-fidelity mediation dataset with utterance-level annotations of strategies and BP states. Furthermore, to better assess agent impact, we propose MAD (Mean Attribute Difference), a fine-grained metric that captures BP shifts throughout the dialogue. Leveraging this framework, we establish a comprehensive benchmark by evaluating diverse models alongside our tailored baseline ProMediAgent. Extensive empirical analyses reveal critical behavioral phenomena and underscore the persistent challenges current models face in dynamic, multi-party mediation. Ultimately, ProMediConv provides a rigorous foundation and a vital quantitative standard for advancing AI-assisted conflict resolution. Our dataset and codebase are accessible at https://github.com/ZsWei66/ProMediConv_repo.

1 Introduction

Legal Dispute Mediation is a vital, non-litigious mechanism for resolving conflicts and maintaining social harmony (Mueller, 2008; Di and Wu, 2009). However, effective mediation demands far more than basic legal knowledge, it involves navigating complex, multi-party social interactions using

*Work was done during a visit at SMU.

†Corresponding author.

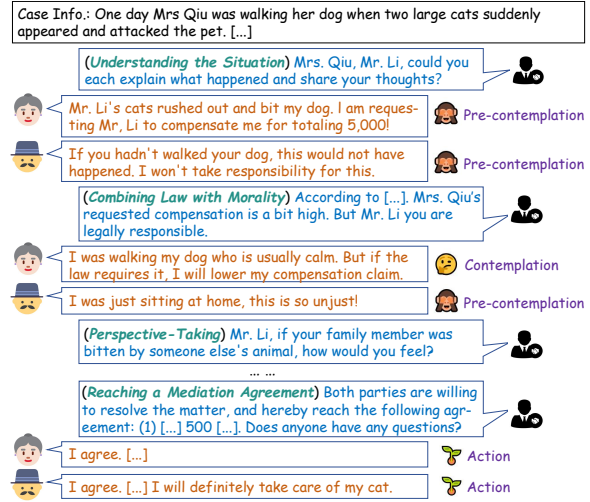


Figure 1: An example dialogue of ProMediConv showcases the the mediator agent (Right) proactively employ mediation strategies (highlighted in brackets) to guide all disputing parties (Left) toward a resolution. The BP state of dispute party is explicitly annotated.

advanced strategic communication and psychological assessment skills (Jackson and Bercovitch, 1993). Consequently, cultivating highly skilled human mediators is exceptionally resource-intensive and time-consuming (Devinatz, 2018), creating a pressing need for automated solutions that can bolster societal capacity for conflict resolution.

The rapid advancement of large language models (LLMs) has transformed general-purpose dialogue systems (DeepSeek-AI et al., 2024; Ouyang et al., 2022; Yang et al., 2024), demonstrating unprecedented conversational fluency and adaptability. Building on this progress, research efforts have expanded into domain-specific conversational applications, accelerating deployment in sectors such as persuasion (Wang et al., 2019), legal consultation (Cui et al., 2023), and mental health support (Liu et al., 2021). While recent studies have pioneered the use of LLM-based frameworks to explore automated mediation and negotiation (Chen et al., 2025), fully ex-

panding and quantifying the capabilities of conversational agents in this high-stakes domain requires a comprehensive benchmarking paradigm. Currently, systematic research in this direction remains severely constrained by several fundamental limitations.

Primarily, current frameworks exhibit a severe lack of alignment with real-world mediation dynamics. They often conceptualize mediation as a generic dialogue task (Bianchi et al., 2024), overlooking the mediators proactive, strategically directive role (Moore and KEMP, 1988; Jiang, 2008) and the complex multi-party communication inherent in the real-world scenarios (Olekalns et al., 2003). Compounding this issue is the scarcity of high-fidelity data. Due to privacy regulations, accessing authentic legal mediation transcripts is highly restricted. Consequently, existing studies are forced to rely on static legal documents lacking interactive dynamics (Hale et al., 2025a), or employ simplified LLM-based prompting pipelines to synthesize dialogues (Kwon et al., 2024; Zhang et al., 2024a). This results in small-scale, low-fidelity datasets that fundamentally fail to capture the nuanced, dynamic characteristics of authentic human mediation (Chen et al., 2026).

Furthermore, current evaluation paradigms for proactive conversational agents (Deng et al., 2023b) tend to be outcome-oriented. Existing metrics, such as Average Turn (AT), Success Rate (SR@ t) and Soft Success Rate (SSR) (Deng et al., 2023d; Zhang et al., 2024b; He et al., 2025a,b), focus heavily on task efficiency and final resolution states. While useful for macroscopic assessment, they fail to capture within-dialogue qualitative impacts, such as the emotional improvement in emotion support, or the gradual shifts in dispute parties’ psychological states during the mediation process. Capturing such user-side dynamics has increasingly attracted research attention (Li et al., 2026a,b), as reflected in recent work on LLM-based user simulation (Wu et al., 2026b) or personality modeling (Wei et al., 2026; Li et al., 2026c) that influence users with different personality characteristics and behavioral states. Such process-level characterization is especially important in mediation, where relying solely on final outcomes can obscure how strategic interventions of mediators progressively shape the parties’ psychological states and ultimately contribute to conflict resolution.

To this end, we systematically define **ProMedi-**

Conv (Proactive Mediation Conversation), a novel framework designed to benchmark proactive conversational agents in dynamic, strategy-driven mediation scenarios. We formally model the mediation workflow into three distinct stages, incorporating 11 widely adopted mediation strategies and four Behavior Pattern (BP) states to track the evolving psychological stances of the disputing parties. To support this task and overcome data scarcity, we construct a high-fidelity dataset from 972 real-world cases using an automated text reconstruction pipeline constrained by immutable factual and legal records. To resolve the evaluation bottleneck, we introduce MAD (Mean Attribute Difference), a fine-grained metric that quantifies mediation effectiveness by monitoring continuous changes in party BP. Leveraging this framework, we establish a comprehensive benchmark by evaluating a diverse set of general and legal-specific LLMs with advanced policy planning methods, alongside our customized baseline ProMediAgent. Our extensive empirical analyses reveal critical behavioral phenomena and underscore the persistent challenges current models face in complex mediation environments. To summarize, our contributions are as follows:

- We propose ProMediConv, systematically modeling multi-party dispute mediation dialogue task. We construct a high-fidelity dataset of 972 realistic cases, overcoming privacy barriers while preserving authentic interactive dynamics.
- We introduce MAD, a novel metric designed to capture the within-dialogue qualitative shifts in parties’ BP, addressing the blind spots of traditional efficiency- and outcome-focused metrics.
- We benchmark diverse models alongside our tailored baseline, providing in-depth analysis of phenomenon in mediation dialogue and the inherent limitations of current conversational agents in real-world legal mediation.

2 Related Works

Mediation and Negotiation Dialogues Frameworks. Mediation and negotiation are common in social interaction, and have therefore attracted substantial attention in dialogue systems research. Prior work has largely focused on casual negotiation scenarios. For example, CraisglistBargain collected conversations involving prices bargaining of secondhand items (He et al., 2018), LAMEN

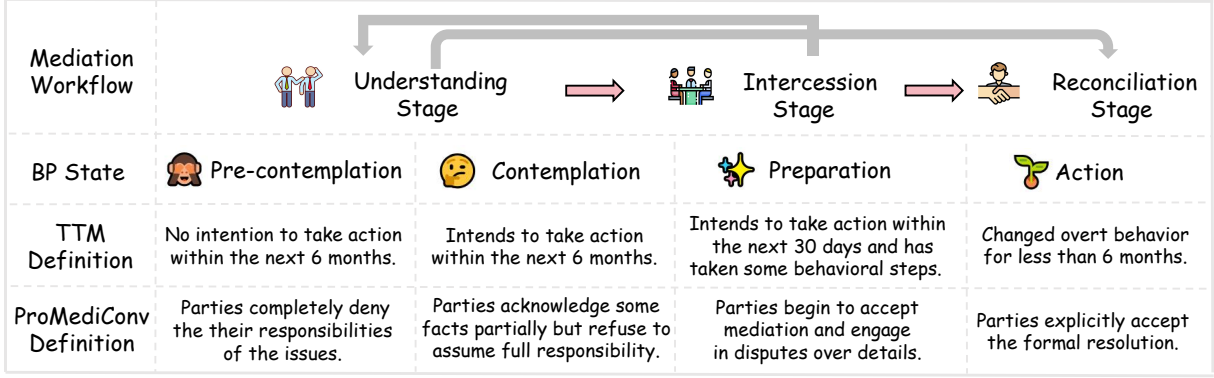


Figure 2: Overview of the definitions of behavior pattern state of parties and mediation workflow in ProMediConv.

still target casual negotiations but broaden the range of tasks (Davidson et al., 2024). More recently, researchers have begun to investigate mediation and negotiation dialogues in the legal domain, which represent more complex and professional scenarios (Chen et al., 2025). However, existing frameworks suffer from overly simplified task formulations and weak alignment with real-world dynamics, including restricting interactions to a twoparty setting (Hale et al., 2025b), failing to explicitly model the important party state (Robbennolt, 2025; Liu et al., 2026), and neglecting the proactive, directive role that mediators often play in practice (Chen et al., 2026). In addition, current mediation datasets are generally nonscalable (Tan et al., 2024; Chen et al., 2026; Liu et al., 2026), which constrains their usefulness for trainings and evaluations.

Proactive Conversational Agents. Most existing LLMbased agents are designed to rigidly follow user instructions, which limits their ability to provide proactive assistance in certain scenarios (Liao et al., 2023; Lu et al., 2025; Lin et al., 2026). To this end, proactive conversational agents are designed to anticipate potential impacts and actively steer the dialogue, rather than merely reacting to user inputs (Deng et al., 2023b). Proactivity research in conversational agents typically focuses on two directions: 1) asking clarification question (Zhu et al., 2021; Samarinas and Zamani, 2024; Zhang et al., 2025); 2) dialogue policy planning (Lei et al., 2022; Deng et al., 2024). In the context of dialogue policy planning, existing research typically formulates proactivity as a strategy selection problem, where the agent chooses among conversational strategies at each turn (Dong et al., 2025; He et al., 2025a). For example, (Deng et al., 2023c) incorporate chainofthought into proactive

dialogue, and (Deng et al., 2023d) introduce a planning plugin to enhance proactive capabilities. In addition, (Fu et al., 2023) improve strategic decisionmaking through selfplay and learning from AI feedback. However, these approaches mainly focus on two-party conversational tasks, and, no prior work has explored evaluating proactive conversational agents in complex, multiparty mediation scenarios.

3 ProMediConv

In this section, we formulate ProMediConv as a structured dialogue framework (with an example in Figure 1 and complete formalization in § A.1). This systematic formulation encompasses the mediation workflow and parties’ BP states (§ 3.1), the mediation strategies (§ 3.2), and our proposed MAD metric (§ 3.3). Guided by this theoretical foundation, we subsequently detail the construction of the dataset (§ 3.4).

3.1 Mediation Workflow & BP States of Party

We delineate the ProMediConv workflow into three primary stages: (I) Understanding, (II) Intercession, and (III) Reconciliation. While the standard progression is strictly sequential ((I)(II)(III)), the dynamic nature of mediation accommodates exceptional trajectories. For instance, mediators may need to revert to the Understanding stage for repeated reassurance ((II)(I)), or bypass the Intercession stage for the straightforward resolution of minor disputes ((I)(III)).

Crucially, driving this workflow requires tracking the internal states of the involved parties. Extensive research on dispute resolution highlights that the primary focus of human mediators lies in transforming the BP of dispute party (Bush and

Strategies	Examples
Understanding the Situation	Hello, Mr. Duan. First, Could you please describe what happened at that time?
Mobilizing Multiple Forces for Assistance	I heard that Mr. Sun is a close friend of yours... see if he might be able to offer additional help.
Combining Law with Morality	According to "Regulations on Work-Related Injury Insurance", "... it should be counted as a work-related injury..
Grasp the Principal Contradiction	The key issue is whether Xinle Company is willing to pay the migrant workers' [...]
Integrating the Resolution of Ideological Issues and Practical Problems	Mr. Li, I understand. The village committee is willing to allocate a piece of land for you to transplant your plants and trees, ...
Perspective-Taking	Xiao Xu, when you were in dire need of help, Xiao Kang was there for you. How about...?
Early Detection and Prevention	To prevent potential disputes, we can formalize [...] obligations of both parties.
Strategic Ambiguity Technique	Mr Wu, It's normal for a young couple, there's no need to dwell on who's right or wrong...
Recognition and Motivation Approaches	It's commendable that you recognize this, which shows you're a sensible and reasonable person....
Reaching a Mediation Agreement	Very well, since both of you agree to accept mediation, we reach the following agreement: [...]
Others	Thank you all for your cooperation. I hope this mediation will help [...].

Figure 3: Overview of Mediation Strategy Set. We abbreviate strategy names using first letter of their first two words (e.g., "Understanding the Situation" as "US"), except "Reaching a Mediation Agreement" as "RA".

Folger, 1994; Boluwaduro, 2021). To formally model this, we incorporate a granular BP tracking mechanism into ProMediConv. Drawing inspiration from the Transtheoretical Model (TTM) (Prochaska and Velicer, 1997; Prochaska et al., 1992), which posits that behavioral change is a gradual, multi-stage process, we categorize the parties' BP into four distinct developmental states. This classification aligns seamlessly with how parties' perspectives evolve under strategic mediation. Figure 2 illustrates these BP states and their integration into the mediation workflow.

3.2 Mediation Strategies

We synthesize a comprehensive set of mediation strategies grounded in widely used human mediation skills (Jiang, 2008; Renmin Tiaojie Gongzuo Falv Shiwu Congshu Writing Group, 2017, 2020)¹. To ensure the completeness of the mediation process, we incorporate two additional strategies: "Understanding the Situation" and "Reaching a Mediation Agreement". Furthermore, to account for dialogues that do not explicitly employ specific mediation strategies, we categorize these under a strategy labeled "Others". The complete strategies set are provided in Figure 3, with more detailed

¹These are official practitioner manuals published by the China Legal Publishing House. ISBNs and WorldCat links are provided in the references.

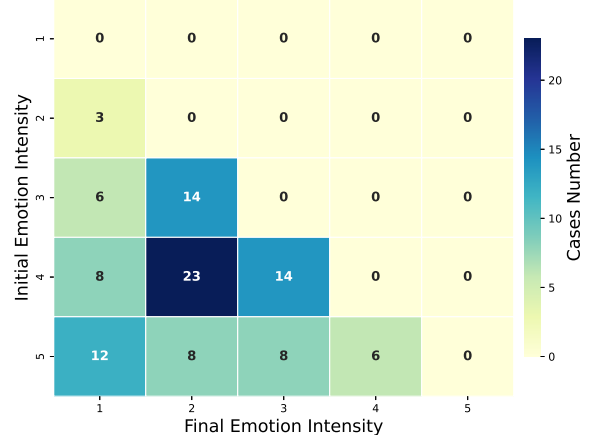


Figure 4: Initial and final emotional intensity distribution (15) of help-seekers in successful dialogues (number of turns as 23) from the ESConv dataset.

information provided in § A.2.

3.3 Mean Attribute Difference

As discussed in § 1, traditional evaluation metrics for proactive dialogue agents predominantly focus on task efficiency and final outcomes, often obscuring fine-grained, within-dialogue qualitative impacts. To empirically substantiate this limitation, we analyze the ESConv dataset (Liu et al., 2021). By isolating a subset of successful dialogues with an identical length (23 turns) to control for efficiency and outcome variables, we examine the distribution of the help-seekers' initial and final emotional intensities (rated on a 5-point scale). As illustrated in Figure 4, even under identical macro-conditions (same turn count and successful resolution), there is substantial variance in the help-seekers' actual emotional intensity improvements. This explicitly demonstrates that dialogues appearing equally effective under traditional metrics can actually yield vastly different psychological benefits, thereby overlooking critical dimensions of an agent's true effectiveness. To address this gap and comprehensively evaluate proactive conversational agents, we must consider not only task completion but also specific progressive improvements of the involved clients, such as help-seekers' emotional enhancement in psychology tasks, or the disputing parties' BP shifts in ProMediConv. Consequently, we propose **MAD** (Mean Attribute Difference) as a more granular evaluation metric:

$$\text{MAD} = \frac{1}{N} \sum_{k=1}^N \frac{\sum_{t=1}^{P_k} (a_t^f - a_t^i)}{P_k} \quad (1)$$

where a_t^i and a_t^f denote the initial and final states of client t ; P_k denotes the number of clients in the k -th case. Notably, to ensure the meaningfulness of the progress quantified by MAD, the evaluated client attribute must be formulated as ordinal, accommodating both discrete and continuous values.

3.4 Dataset Construction

Existing literature on dispute mediation preserves a wealth of authentic cases containing verbatim multi-party utterances and complete mediation records. However, utilizing these high-fidelity resources faces critical challenges: disorganized text formats, insufficient legal references, and a lack of explicit party state annotations. To construct the ProMediConv dataset without compromising the real-world dynamics, we design an automated text reconstruction pipeline (detailed in § B.1) to standardize these cases into structured dialogues.

3.4.1 Data Collection and Reconstruction

We curate 981 real-world mediation cases from 15 published dispute mediation books via RapidOCR tools². After filtering out cases with low quality, we obtain 972 high-quality authentic cases. Instead of generating dialogues from scratch, our pipeline employs a strict constraint mechanism to prevent LLM hallucinations. Specifically, we first automatically extract the immutable facts, factual trajectories, and applicable legal clauses from the original unstructured texts. These extracted elements serve as hard constraints for the subsequent dialogue reconstruction, ensuring that the generated multi-party interactions strictly faithfully restore the original mediation dynamics. Furthermore, to automatically annotate the parties’ BP states, we evaluate several advanced LLMs against expert human annotations (detailed in § B.1). We select Qwen2.5-14B-Instruct (Yang et al., 2024) as our BP annotator, as it demonstrated the highest alignment with human judgments. Since all source cases are published materials, the identities of all parties have been fully anonymized to protect privacy.

Statistic	Total	Mediator	Party
Average Role Numbers	4.54	1	3.54
Number of Cases	972	-	-
Number of Utterances	17,277	8,774	8,503
Avg. Utterances per Case	17.88	8.98	8.90

Table 1: Statistical characteristics of ProMediConv.

²<https://github.com/RapidAI/RapidOCR>

3.4.2 Dataset Statistics

The final ProMediConv dataset comprises 972 structured multi-party dialogues with comprehensive BP and strategy annotations. As illustrated in Figure 5b, the dataset provides comprehensive coverage across 13 distinct dispute types. Rather than a strictly uniform distribution, it exhibits a realistic long-tail distribution that accurately reflects the real-world prevalence of civil disputes: primary categories such as Community and Neighborhood (19.3%), Labor (18.7%), Family and Marriage (18.0%), and Estate and Land (15.9%) constitute the majority, accompanied by a long tail of specific cases like Corporate Management (1.6%).

Furthermore, Figure 5a reveals the dynamic temporal evolution of mediation strategies across dialogue turns. This distribution highlights a clear phase-based progression, aligning seamlessly with our systematic modeling of strategy-stage correlations detailed in Table 6. Rather than a static application, this dynamic evolution effectively captures the flexible, progressive, and highly contextual tactical choices made by professional mediators. Finally, we randomly partition the dataset into training, validation, and test sets at an 8:1:1 ratio for subsequent benchmarking.

4 Overall Evaluations

In this section, we conduct comprehensive overall evaluations to benchmark proactive conversational agents on ProMediConv.

4.1 Experimental Setups

4.1.1 Evaluation Metrics

Following standard evaluation for proactive conversational agents, we employ AT, SR@ t , and SSR:

$$AT = \frac{1}{N} \sum_{k=1}^N T_k, \quad SR@t = \frac{S}{N}, \quad SSR = \frac{1}{N} \sum_{k=1}^N r_k^f \quad (2)$$

where t represents the maximum dialogue turn limit; N and S denote the total number of cases and successfully resolved cases respectively; T_k indicates the number of dialogue turns consumed in case k ; and r_k^f represents the reward at the final turn of case k .

Additionally, we adopt the MAD metric (Equation 1) to provide a more granular evaluation of the mediator agents’ performance, specifically measuring their fine-grained influence on the disputing parties. For a clearer understanding of how each

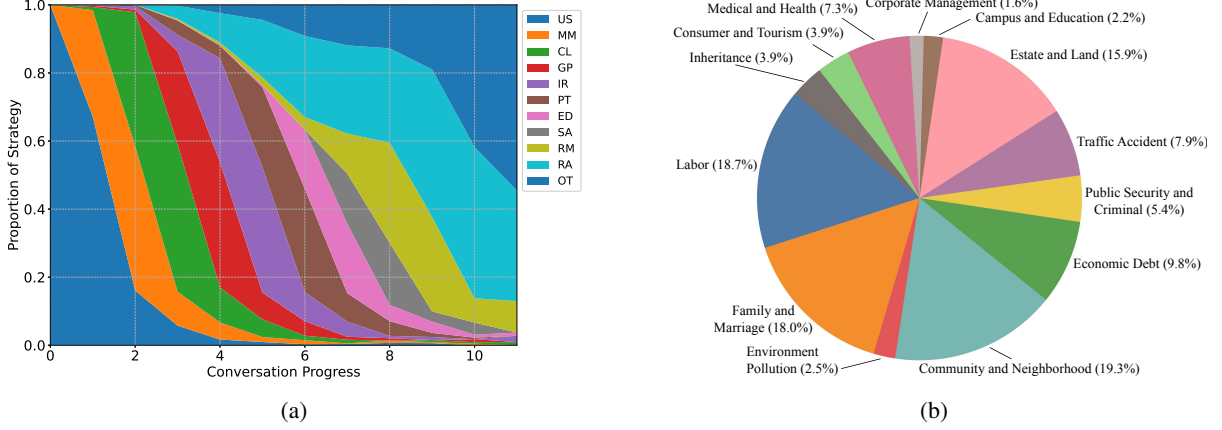


Figure 5: Dataset Statistics of ProMediConv. (a) Dynamic phase-based progression of mediation strategies across dialogue turns. (b) Long-tail distribution of the 13 dispute types, mirroring the real-world prevalence of civil cases.

metric is calculated within ProMediConv, these formulations can be interpreted in conjunction with the fundamental workflow outlined in § A.1.

4.1.2 Evaluated Models

Given the absence of mediation-specific dialogue agents, we conduct an extensive evaluation using a diverse set of baselines.

General LLMs We evaluate Qwen2.5-7B-Instruct, Qwen2.5-14B-Instruct (Yang et al., 2024), Llama-3.1-8B-Instruct (Team, 2024), GLM-4-9B-0414 (GLM et al., 2024), and ChatGPT (GPT-3.5-Turbo API) (Ouyang et al., 2022). To enhance their proactive mediation capabilities, we apply several advanced prompt-based policy planning methods, including Proactive (Deng et al., 2023c), ProCoT (Deng et al., 2023c), and ICL_AIF (Fu et al., 2023), alongside a vanilla standard setting.

Legal-specific LLMs To explore domain-specific performance, we select Wisdom-Interrogatory and Fuzi-Mingcha-v1.0 (Deng et al., 2023a), the top performers in the LawBench (Fei et al., 2024) dialogue generation tasks (1-1, 3-5, 3-8). We evaluate them under standard prompts and Legal-enhanced Mediator Role-play (LMR) prompts.

Our Trained Baseline To explicitly validate the utility of the ProMediConv dataset, we introduce a customized baseline, named ProMediAgent. ProMediAgent employs a decoupled policy planner and response generator architecture (He et al., 2018; Deng et al., 2023d). We first conduct supervised fine-tuning (SFT) on the ProMediConv training set. Subsequently, we optimize the policy planner using the REINFORCE algorithm (Sutton et al., 1999) based on an AI-feedback scalar re-

ward within a simulated mediation environment. The comprehensive details of the training objective and the reward mechanism are provided in § C.

4.1.3 Implementation Details

The interactive mediation environment for ProMediConv evaluation and the online learning of ProMediAgent adhere strictly to the workflow outlined in § A.1. Following recent simulation works (Wu et al., 2026a), we initialize simulated dispute parties using pre-annotated profiles and prompt the LLMs with tailored role-play templates to simulate dynamic interactions. An LLM-as-a-Judge mechanism determines the appropriate next speaker. Furthermore, an LLM-based outcome reward model evaluates the current mediation completion state. To mitigate generation stochasticity, we sample l decoded sequences and compute the final scalar reward as their average (Wang et al., 2023). The maximum dialogue turn limit is fixed at 20. Regarding our proposed ProMediAgent, we employ Roberta-large³ as the policy planner backbone and Qwen2.5-7B-Instruct as the response generator. The SFT phase requires approximately 6 GPU hours over 45 epochs with a learning rate of 6×10^{-6} . The RL phase consumes roughly 16 GPU hours across 1,000 training episodes, employing a learning rate of 1×10^{-6} and a discount factor γ of 0.999. All training and inference procedures are conducted on a server equipped with eight NVIDIA L40S GPUs.

³<https://huggingface.co/FacebookAI/xlm-roberta-large>

Model	Method	SR@ t $\uparrow$	AT $\downarrow$	SSR $\uparrow$	MAD $\uparrow$	# of Tok.
General LLMs						
Qwen2.5-7B-Instruct	Standard	0.7532	12.43	0.8974	0.7576	$O(L)$
	Proactive	0.7273	12.08	0.8452	0.7857	$O(2L)$
	ProCoT	0.6753	13.16	0.8039	0.8719	$O(2L)$
	ICL_AIF	0.7670	12.06	<u>0.9154</u>	1.0855	$O(3L)$
Qwen2.5-14B-Instruct	Standard	0.7013	12.52	0.8056	0.9524	$O(L)$
	Proactive	0.7922	11.56	0.9049	0.7446	$O(2L)$
	ProCoT	0.7695	11.25	0.8733	0.9219	$O(2L)$
	ICL_AIF	0.7922	11.78	0.9071	<u>1.0443</u>	$O(3L)$
Llama-3.1-8B-Instruct	Standard	0.7784	11.38	0.8469	0.7179	$O(L)$
	Proactive	0.8096	11.09	0.9028	0.7926	$O(2L)$
	ProCoT	0.8316	10.67	0.8674	0.8407	$O(2L)$
	ICL_AIF	<u>0.8589</u>	<u>10.48</u>	0.8597	0.8968	$O(3L)$
GLM-4-9B-0414	Standard	0.7167	12.41	0.8589	0.7722	$O(L)$
	Proactive	0.8077	11.06	0.8654	0.7769	$O(2L)$
	ProCoT	0.8359	10.87	0.9015	0.9115	$O(2L)$
	ICL_AIF	0.8179	11.27	0.8931	0.8675	$O(3L)$
ChatGPT	Standard	0.8517	10.67	0.9129	0.8202	$O(L)$
	Proactive	0.7953	11.36	0.8857	1.0074	$O(2L)$
	ProCoT	0.8173	11.09	0.9094	0.9719	$O(2L)$
	ICL_AIF	0.8419	10.83	0.9116	0.9481	$O(3L)$
Legal-specific LLMs						
FuZi-Mingcha-v1_0	Standard	0.6165	12.24	0.6386	0.4592	$O(L)$
	LMR	0.6295	12.49	0.6827	0.4943	$O(2L)$
Wisdom-Interrogatory	Standard	0.5386	15.03	0.5128	0.7866	$O(L)$
	LMR	0.6646	13.06	0.6955	0.8434	$O(2L)$
Our Trained Baselines						
ProMediAgent	—	0.9071	10.34	0.9428	0.9893	$O(L)$
- w/o RL		0.7692	11.64	0.8704	0.9673	$O(L)$
- w/o SFT+RL		0.6893	12.56	0.7715	0.8031	$O(L)$

Table 2: The overall evaluation results highlight that our dataset enables models with lower algorithmic complexity to perform better on ProMediConv. We bold the best results and underline the second-best ones in each column.

4.2 Results and Analysis

Overall evaluation results are presented in Table 2.

Analysis of General LLMs As demonstrated, policy planning methods yield unstable effects on the proactive mediation capabilities of general LLMs. Certain methods even prove counterproductive across all ChatGPT settings. Furthermore, these minimal enhancements incur significant costs, as token consumption for mediator responses doubles with Proactive and ProCoT, and triples with ICL_AIF. This indicates current methods may fail to fully capture essential mediation components or endow agents with stable proactive mediation capabilities. Consequently, these findings underscore a critical limitation within ProMediConv: even when leveraging large-parameter LLMs with sophisticated policy planning and increased token allocations, **the nuanced complexities inherent in ProMediConv remain elusive.**

Analysis of Legal-Specific LLMs Both legal-specific LLMs perform poorly in standard settings, and even when augmented with applicable legal clauses reference, only minimal improvement is observed. Under standard conditions, the Wisdom model tends to produce generic responses that lead to conversational stagnation. We observe that both models configured with LMR successfully retrieve relevant legal provisions, which to some extent play positive impacts on involved parties. However, the improvement remains insufficient to achieve successful mediation. This phenomenon is reflected in the more significant improvements in SSR (6.91%) and MAD (7.64%) compared to SR@ t (2.11%), as exemplified by FuZi model. Moreover, in some cases, we observe that these models output irrelevant information due to overfitting. These findings highlight the limitations of current legal-specific models in ProMediConv and underscore the importance of our proposed MAD metric in detecting such sub-

tle aspects of model performance.

Analysis of ProMediAgent The ProMediAgent, trained via SFT on our ProMediConv dataset, exhibits significant improvements across all metrics (11.59% SR@ t , 12.82% SSR, 7.90% AT, 0.44% MAD). The performance of ProMediAgent is further optimized through RL, yielding gains of (17.93% SR@ t , 8.32% SSR, 11.17% AT, 2.27% MAD). This showcases notable advancements over the best-performing baseline, with SR@ t increased by 5.61%, SSR increased by 2.99%, AT decrease by 1.34%. ProMediAgent achieved MAD 8.86% lower than the top-performing baseline. This margin is attributable to the reward functions lack of explicit signals regarding changes in the party’s BP. Those results validate that using our proposed ProMediConv enables models with fewer parameters and lower token usage to achieve performance superior with various LLMs with advanced policy planning methods.

5 Further Analysis

In this section, we evaluate the impact of mediation strategies and present case studies on the Short-cut Resolution phenomenon to underscore MAD’s necessity. Finally, we analyze model performance across varying party numbers and correlate MAD with current metrics.

Model	Method	SR@ t ↑	AT ↓	SSR ↑	MAD ↑
Qwen2.5-14B	Qwen _{non}	0.7147	11.99	0.8479	0.6374
	Proactive	0.7922	11.56	0.9049	0.7446
ProMediAgent	-	0.9071	10.34	0.9428	0.9893

Table 3: Impact of mediation strategy constraints: Pre-defined taxonomy outperforms open-ended space.

5.1 Effect of Constrained Strategies Set

We constrain the mediation agents to a taxonomy of 11 strategy categories rather than a fine-grained strategy space in ProMediConv. To validate the efficacy of such design, we conduct an empirical study using Qwen2.5-14B-Instruct with ablation setting **Qwen_{non}**, where the model generates unrestricted natural language strategy instruction, representing an open-ended strategy space. As illustrated in Table 3, Proactive method outperforms **Qwen_{non}**, indicating that a larger strategy search space does not necessarily yield improvements and may even degrade performance. This observation aligns with conclusions in relevant works (Zeng et al., 2024), confirming that **our**

structured taxonomy serves as critical domain-specific priors to regularize the agent’s action space, preventing the instability inherent in unconstrained generation.

5.2 Analysis on Mediation Strategy Impact

To investigate the impact of mediation strategies to dispute resolution, we evaluate ProMediAgent on our test set. Specifically, we establish two settings: (1) Random, where a strategy is selected randomly at each mediator turn. To ensure robustness, we report the average results of five independent rollouts per case; and (2) ProMediAgent, where strategies are determined by the policy planner of ProMediAgent, optimized via SFT and RL. Both settings employ the same response generator. We evaluate performance across all metrics and analyze variance across the five rollouts within the Random setting. Results are presented in Table 4. The Random baseline exhibits suboptimal performance due to stochastic selection, whereas ProMediAgent achieves significant improvements across all metrics through optimal strategy selection. These findings validate that **optimal strategy selection is essential for enhancing mediation dialogue outcomes**, thereby substantiating the necessity of policy planning optimization to navigate the complex dynamics of ProMediConv.

Metric	SR@ t ↑	AT ↓	SSR ↑	MAD ↑
Random	0.6769	12.64	0.8038	0.7692
ProMediAgent	0.9071	10.34	0.9428	0.9893
Gain (Δ)	+34.0%	+18.2%	+17.3%	+28.6%
Variance	0.2581	5.2585	2.1989	0.6830

Table 4: Impact of Mediation Strategy Selection. Significant gap between Random and Oracle highlights the impact of optimal mediation strategies in ProMediConv.

5.3 Case study on the necessity of MAD

We identify a phenomenon, termed the Short-cut Resolution, in which mediator agents achieve superficial agreement without fully addressing all parties’ claims. This issue arises as models exploit the reward model to prematurely conclude dialogues often a result of inherent limitations in biased comprehension of LLMs. As exemplified in Table 13, ProMediAgent in Dialogue A takes more turns to reach a more thorough resolution, whereas in Dialogue B, the mediator uses fewer turns (better in AT metric), yet fails to fully address all

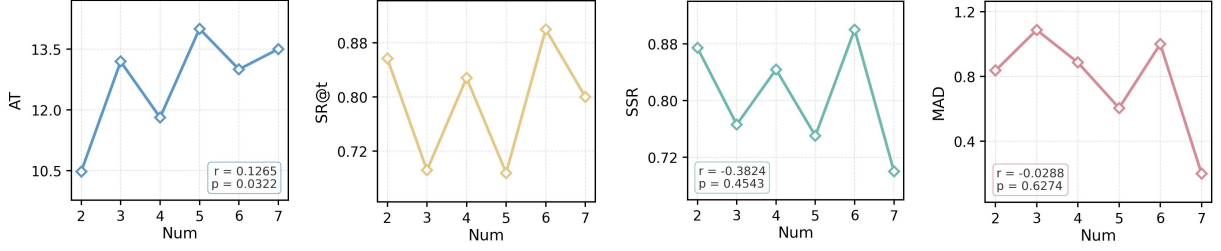


Figure 6: Correlation Analysis of Metrics and the Number of Parties. For metrics with continuous values (*i.e.*, AT, SSR and MAD), Pearson coefficient and p value are reported.

claims, resulting in a lower MAD score. MAD effectively exposes such inadequacies among mediator agents by **granularly tracking BP states of each party, thereby validating its critical value.**

5.4 Performance w.r.t. the number of parties

Given the multi-party characteristic of ProMediConv, we further analyze how metrics vary with party numbers using all samples of Qwen2.5-14B-Instruct in § 4. As depicted in Figure 6, MAD and SSR show decreasing trends, while AT exhibits increasing trend as party numbers grow. This highlights that as case complexity increases, it becomes progressively harder for mediator agents to improve the situation and alter all parties’ BP, thus necessitating more turns. Due to the large value of maximum turns $t = 20$, $SR@t$ is not sensitive to the party numbers, exhibiting a horizontal pattern.

5.5 MAD Correlation Analysis

To validate the proposed MAD metric, we analyzed its correlation with existing metrics using the test samples consistent with § 5.4. Additionally, we recruit eight experienced human mediators to annotate completion state of those samples, establishing a Human Success Rate (**Human SR**). Pairwise inter-annotator agreement reached 87%, demonstrating a relatively high level of consistency. We computed Pearson and Spearman correlation coefficients between MAD and these metrics, as presented in Table 5. The results indicate a weak correlation between MAD and AT. In contrast, MAD exhibits a significant positive correlation with $SR@t$. A notably stronger correlation is observed between MAD and SSR ($p_r = 0.0022, p_p = 0.0046$), likely because **both metrics facilitate fine-grained evaluation of the mediation process.** Critically, MAD demonstrates a stronger correlation with Human SR compared to $SR@t$ ($r = 0.7386, \rho = 0.5838$). This alignment confirms that **higher MAD scores accurately reflect high-quality mediation from human per-**

spective, thereby substantiating the validity and robustness of our proposed MAD.

Setting	r	p_r	ρ	p_ρ
vs. AT	-0.2748	0.1654	-0.2846	0.1502
vs. $SR@t$	0.6773	0.0057	0.4938	0.0421
vs. SSR	0.7847	0.0022	0.5281	0.0046
vs. Human SR	0.7386	0.0039	0.5838	0.0548

Table 5: Statistical Analysis of MAD Correlations with other metrics. The Pearson and Spearman Correlations are denoted as r and ρ , with statistical significance p .

6 Conclusion

We introduce ProMediConv, a framework and high-fidelity dataset of 972 cases for benchmarking proactive, multi-party mediation. To address evaluation blind spots, we propose MAD, a metric quantifying effectiveness through shifts in user states. Finally, extensive benchmarking uncovers critical behavioral phenomena, exposing current LLMs’ persistent limitations in complex real-world mediation. Beyond methodological advancements, this study highlights the transformative potential of LLMs in fostering conflict resolution and social resilience. By establishing a scalable foundation for future AI-assisted mediation, our resources carry profound implications for enhancing community services, governance, and broader social harmony.

Limitations

A primary limitation of ProMediConv is its exclusive reliance on text-based dialogue modeling within a specifically Chinese legal context. This inherently abstracts away non-verbal dynamics and may not fully capture the cultural nuances of dispute resolution in other languages. Future research should explore multi-modal integration and extend the framework to develop cross-cultural and cross-lingual mediation benchmarks. Nevertheless, this study serves as a vital foundational step.

By delivering a scalable framework and rigorous benchmark, ProMediConv establishes a quantitative standard that paves the way for future AI-assisted mediation and broader social resilience.

Ethical Considerations

This work utilizes open-source models and resources, including Llama-3.1-8B-Instruct, the Qwen2.5 series, GLM-4-9B-0414, RoBERTa-large, wisdomInterrogatory, and Fuzi-Mingchav1.0, strictly in accordance with their licenses and intended academic use. All mediation cases are sourced from published materials, with the identities of all involved parties fully anonymized to protect privacy. Human evaluators were explicitly informed of the data’s purpose and consented to its exclusive use for academic research. ChatGPT is used only for limited paraphrasing and language polishing of author-written text.

Acknowledgments

This research was supported by the National Natural Science Foundation of China under Grant 62406098 and the Anhui Province Key Research and Development Plan under Grant 202304a05020045. It is also supported by the National Research Foundation Singapore under the AI Singapore Programme (AISG Award No: AISG3-RPGV-2025-016). Yang Deng is supported by the Lee Kong Chian Fellowship awarded by Singapore Management University.

References

- Federico Bianchi, Patrick John Chia, Mert Yükselgönül, Jacopo Tagliabue, Dan Jurafsky, and James Zou. 2024. [How well can llms negotiate? negotiationarena platform and analysis](#). In *Forty-first International Conference on Machine Learning, ICML 2024, Vienna, Austria, July 21-27, 2024*. OpenReview.net.
- Eniola Boluwaduro. 2021. How mediation works: Resolving conflict through talk angela cora garcia (2019). *Sociolinguistic Studies*, 14(4):537–542.
- Robert A. Baruch Bush and Joseph P. Folger. 1994. [The promise of mediation : responding to conflict through empowerment and recognition](#).
- Guhong Chen, Liyang Fan, Zihan Gong, Nan Xie, Zixuan Li, Ziqiang Liu, Chengming Li, Qiang Qu, Hamid Alinejad-Rokny, Shiwen Ni, and Min Yang. 2025. [AgentCourt: Simulating court with adversarial evolvable lawyer agents](#). In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 5850–5865, Vienna, Austria. Association for Computational Linguistics.
- Junjie Chen, Haitao Li, Minghao Qin, Yujia Zhou, Yanxue Ren, Wuyue Wang, Yiqun Liu, Yueyue Wu, and Qingyao Ai. 2026. [Simulating dispute mediation with llm-based agents for legal research](#). In *Fortieth AAAI Conference on Artificial Intelligence, Thirty-Eighth Conference on Innovative Applications of Artificial Intelligence, Sixteenth Symposium on Educational Advances in Artificial Intelligence, AAAI 2026, Singapore, January 20-27, 2026*, pages 29368–29375. AAAI Press.
- Jiaxi Cui, Zongjian Li, Yang Yan, Bohua Chen, and Li Yuan. 2023. [Chatlaw: Open-source legal large language model with integrated external knowledge bases](#). *CoRR*, abs/2306.16092.
- Tim R. Davidson, Veniamin Veselovsky, Michal Kosinski, and Robert West. 2024. [Evaluating language model agency through negotiations](#). In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- DeepSeek-AI, A. Liu, Bei Feng, Bing Xue, Bing-Li Wang, Bochao Wu, Chengda Lu, Chenggang Zhao, C. Deng, Chenyu Zhang, C. Ruan, Damai Dai, Daya Guo, Dejian Yang, Deli Chen, Dong-Li Ji, Erhang Li, Fangyun Lin, Fucong Dai, and 175 others. 2024. Deepseek-v3 technical report. *arXiv.org*.
- Wentao Deng, Jiahuan Pei, Keyi Kong, Zhe Chen, Furu Wei, Yujun Li, Zhaochun Ren, Zhumin Chen, and Pengjie Ren. 2023a. [Syllogistic reasoning for legal judgment analysis](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 13997–14009, Singapore. Association for Computational Linguistics.
- Yang Deng, Wenqiang Lei, Wai Lam, and Tat-Seng Chua. 2023b. [A survey on proactive dialogue systems: problems, methods, and prospects](#). In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence, IJCAI ’23*.
- Yang Deng, Lizi Liao, Liang Chen, Hongru Wang, Wenqiang Lei, and Tat-Seng Chua. 2023c. [Prompting and evaluating large language models for proactive dialogues: Clarification, target-guided, and non-collaboration](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 10602–10621, Singapore. Association for Computational Linguistics.
- Yang Deng, Lizi Liao, Zhonghua Zheng, Grace Hui Yang, and Tat-Seng Chua. 2024. [Towards human-centered proactive conversational agents](#). In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR ’24*, page 807818, New York, NY, USA. Association for Computing Machinery.
- Yang Deng, Wenxuan Zhang, Wai Lam, See-Kiong Ng, and Tat-Seng Chua. 2023d. Plug-and-play policy

- planner for large language model powered dialogue agents. In *The Twelfth International Conference on Learning Representations*.
- Victor G Devinatz. 2018. What makes a good mediator? insights from a mediation training program participant. *Employee Responsibilities and Rights Journal*, 30(3):181–201.
- Xiaohua Di and Yuning Wu. 2009. The developing trend of the people’s mediation in china. *Sociological Focus*, 42(3):228–245.
- Wenjie Dong, Sirong Chen, and Yan Yang. 2025. **ProtoD: Proactive task-oriented dialogue system based on large language model**. In *Proceedings of the 31st International Conference on Computational Linguistics, COLING 2025, Abu Dhabi, UAE, January 19-24, 2025*, pages 9147–9164. Association for Computational Linguistics.
- Zhiwei Fei, Xiaoyu Shen, Dawei Zhu, Fengzhe Zhou, Zhuo Han, Alan Huang, Songyang Zhang, Kai Chen, Zhixin Yin, Zongwen Shen, Jidong Ge, and Vincent Ng. 2024. **LawBench: Benchmarking legal knowledge of large language models**. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 7933–7962, Miami, Florida, USA. Association for Computational Linguistics.
- Yao Fu, Hao Peng, Tushar Khot, and Mirella Lapata. 2023. **Improving language model negotiation with self-play and in-context learning from AI feedback**. *CoRR*, abs/2305.10142.
- Team GLM, :, Aohan Zeng, Bin Xu, Bowen Wang, Chenhui Zhang, Da Yin, Dan Zhang, Diego Rojas, Guanyu Feng, Hanlin Zhao, Hanyu Lai, Hao Yu, Hongning Wang, Jiada Sun, Jiajie Zhang, Jiale Cheng, Jiayi Gui, Jie Tang, and 40 others. 2024. **Chatglm: A family of large language models from glm-130b to glm-4 all tools**. *Preprint*, arXiv:2406.12793.
- James Hale, Sushrita Rakshit, Kushal Chawla, Jeanne M. Brett, and Jonathan Gratch. 2025a. **KODIS: A multicultural dispute resolution dialogue corpus**. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL 2025 - Volume 1: Long Papers, Albuquerque, New Mexico, USA, April 29 - May 4, 2025*, pages 12771–12785. Association for Computational Linguistics.
- James Hale, Sushrita Rakshit, Kushal Chawla, Jeanne M. Brett, and Jonathan Gratch. 2025b. **KODIS: A multicultural dispute resolution dialogue corpus**. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL 2025 - Volume 1: Long Papers, Albuquerque, New Mexico, USA, April 29 - May 4, 2025*, pages 12771–12785. Association for Computational Linguistics.
- He He, Derek Chen, Anusha Balakrishnan, and Percy Liang. 2018. **Decoupling strategy and generation in negotiation dialogues**. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, pages 2333–2343. Association for Computational Linguistics.
- Tao He, Lizi Liao, Yixin Cao, Yuanxing Liu, Yiheng Sun, Zerui Chen, Ming Liu, and Bing Qin. 2025a. **Simulation-free hierarchical latent policy planning for proactive dialogues**. In *AAAI-25, Sponsored by the Association for the Advancement of Artificial Intelligence, February 25 - March 4, 2025, Philadelphia, PA, USA*, pages 24032–24040. AAAI Press.
- Tao He, Lizi Liao, Ming Liu, and Bing Qin. 2025b. **Simulating before planning: Constructing intrinsic user world model for user-tailored dialogue policy planning**. In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR 2025, Padua, Italy, July 13-18, 2025*, pages 645–655. ACM.
- Richard Jackson and Jacob Bercovitch. 1993. Evaluating mediation strategies: A theoretical and empirical analysis. *Peace & Change*.
- Xiaochuan Jiang. 2008. *Renmin Tiaojie Shiyong Shouce [Practical Manual for People’s Mediation]*. China Legal Publishing House. (In Chinese).
- Deuksin Kwon, Emily Weiss, Tara Kulshrestha, Kushal Chawla, Gale M. Lucas, and Jonathan Gratch. 2024. **Are llms effective negotiators? systematic evaluation of the multifaceted capabilities of llms in negotiation dialogues**. In *Findings of the Association for Computational Linguistics: EMNLP 2024, Miami, Florida, USA, November 12-16, 2024*, Findings of ACL, pages 5391–5413. Association for Computational Linguistics.
- Wenqiang Lei, Yao Zhang, Feifan Song, Hongru Liang, Jiaxin Mao, Jiancheng Lv, Zhenglu Yang, and Tat-Seng Chua. 2022. **Interacting with non-cooperative user: A new paradigm for proactive dialogue policy**. In *SIGIR ’22: The 45th International ACM SIGIR Conference on Research and Development in Information Retrieval, Madrid, Spain, July 11 - 15, 2022*, pages 212–222. ACM.
- Mengfan Li, Xuanhua Shi, and Yang Deng. 2026a. **Costom: Causal-oriented steering for intrinsic theory-of-mind alignment in large language models**. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2026, San Diego, California, United States, July 2-7, 2026*, pages 9302–9317. Association for Computational Linguistics.
- Mengfan Li, Xuanhua Shi, and Yang Deng. 2026b. **Rectom: A benchmark for evaluating machine theory of mind in llm-based conversational recommender systems**. In *Fortieth AAAI Conference on Artificial Intelligence, Thirty-Eighth Conference*

- on Innovative Applications of Artificial Intelligence, Sixteenth Symposium on Educational Advances in Artificial Intelligence, AAAI 2026, Singapore, January 20-27, 2026, pages 31636–31644. AAAI Press.
- Mengfan Li, Zesheng Wei, Xuanhua Shi, and Yang Deng. 2026c. Do llms understand personality? rethinking persona fidelity evaluation through structured behavioral inference. *arXiv preprint arXiv:2608.26674*.
- Lizi Liao, Grace Hui Yang, and Chirag Shah. 2023. [Proactive conversational agents in the post-chatgpt world](#). In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '23, page 34523455, New York, NY, USA. Association for Computing Machinery.
- Xubo Lin, Zezhi Deng, Shihao Wang, Grace Hui Yang, and Yang Deng. 2026. [Dual hierarchical dialogue policy learning for legal inquisitive conversational agents](#). In *Findings of the Association for Computational Linguistics, ACL 2026, San Diego, California, United States, July 2-7, 2026*, pages 11030–11047. Association for Computational Linguistics.
- Siyang Liu, Chujie Zheng, Orianna Demasi, Sahand Sabour, Yu Li, Zhou Yu, Yong Jiang, and Minlie Huang. 2021. [Towards emotional support dialog systems](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3469–3483, Online. Association for Computational Linguistics.
- Ziyi Liu, Bahareh Sarrafzadeh, Pei Zhou, Longqi Yang, Jieyu Zhao, and Ashish Sharma. 2026. [Promediate: A simulation testbed for evaluating proactive mediation in multi-party negotiation](#). In *Findings of the Association for Computational Linguistics, ACL 2026, San Diego, California, United States, July 2-7, 2026*, pages 29570–29598. Association for Computational Linguistics.
- Yaxi Lu, Shenzhi Yang, Cheng Qian, Guirong Chen, Qinyu Luo, Yesai Wu, Huadong Wang, Xin Cong, Zhong Zhang, Yankai Lin, Weiwen Liu, Yasheng Wang, Zhiyuan Liu, Fangming Liu, and Maosong Sun. 2025. [Proactive agent: Shifting LLM agents from reactive responses to active assistance](#). In *The Thirteenth International Conference on Learning Representations, ICLR 2025, Singapore, April 24-28, 2025*. OpenReview.net.
- Christopher W. Moore and NIGEL KEMP. 1988. *The Mediation Process: Practical Strategies for Resolving Conflict*.
- Tracy Gershwin Mueller. 2008. *Alternative Dispute Resolution*.
- Mara Olekalns, Jeanne M. Brett, and Laurie R. Weingart. 2003. [Phases, transitions and interruptions: Modeling processes in multiparty negotiations](#). *International Journal of Conflict Management*, 14(3-4):191–211.
- OpenAI, Tony :, Tony Aaron Hurst, Tony Adam Lerer, Tony Adam P. Goucher, Tony Adam Perelman, Tony Aditya Ramesh, Tony Aidan Clark, Tony AJ Ostrow, Tony Akila Welihinda, Tony Alan Hayes, Tony Alec Radford, Tony Aleksander Mdry, Tony Alex Baker-Whitcomb, Tony Alex Beutel, Tony Alex Borzunov, Tony Alex Carney, Tony Alex Chow, Tony Alex Kirillov, and 398 others. 2024. Gpt-4o system card. *arXiv (Cornell University)*.
- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke E. Miller, Maddie Simens, Amanda Askell, Peter Welinder, P. Christiano, Jan Leike, and Ryan J. Lowe. 2022. Training language models to follow instructions with human feedback. *NeurIPS*.
- James O Prochaska, John C Norcross, Joanne L Fowler, Michael J Follick, and David B Abrams. 1992. Attendance and outcome in a work site weight control program: Processes and stages of change as process and predictor variables. *Addictive behaviors*, 17(1):35–45.
- James O Prochaska and Wayne F. Velicer. 1997. [The transtheoretical model of health behavior change](#). *American Journal of Health Promotion*, 12:38 – 48.
- Renmin Tiaojie Gongzuo Falv Shiwu Congshu Writing Group. 2017. [Butong Tiaojie Fangfa Yu Jiqiao De Yunyong \[The Application of Different Mediation Methods and Techniques\]](#). China Legal Publishing House. (In Chinese).
- Renmin Tiaojie Gongzuo Falv Shiwu Congshu Writing Group. 2020. [Renmin Tiaojie Fangfa Jiqiao Yu Falv Zhishi \[Methods, Techniques, and Legal Knowledge of Mediation\]](#). China Legal Publishing House. (In Chinese).
- Jennifer K Robbennolt. 2025. Psychology and dispute resolution in civil cases. In *Advances in Psychology and Law: Volume 7*, pages 31–48. Springer.
- Chris Samarinas and Hamed Zamani. 2024. [Procis: A benchmark for proactive retrieval in conversations](#). In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '24, page 830840, New York, NY, USA. Association for Computing Machinery.
- Douglas C Schmidt, Michael Stal, Hans Rohnert, and Frank Buschmann. 2013. *Pattern-oriented software architecture, patterns for concurrent and networked objects*. John Wiley & Sons.
- Richard S. Sutton, David A. McAllester, Satinder Singh, and Yishay Mansour. 1999.

- Policy gradient methods for reinforcement learning with function approximation. <http://www.cis.upenn.edu/~mkearns/finread/Sutton.pdf>.
- Jinzhe Tan, Hannes Westermann, Nikhil Reddy Pottanigari, Jaromír Savelka, Sébastien Meeùs, Mia Godet, and Karim Benyekhlef. 2024. [Robots in the middle: Evaluating llms in dispute resolution](#). In *Legal Knowledge and Information Systems - JURIX 2024: The Thirty-seventh Annual Conference, Brno, Czech Republic, 11-13 December 2024*, volume 395 of *Frontiers in Artificial Intelligence and Applications*, pages 168–179. IOS Press.
- Llama Team. 2024. [The llama 3 herd of models](#). *CoRR*, abs/2407.21783.
- Xuwei Wang, Weiyan Shi, Richard Kim, Yoojung Oh, Sijia Yang, Jingwen Zhang, and Zhou Yu. 2019. [Persuasion for good: Towards a personalized persuasive dialogue system for social good](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5635–5649, Florence, Italy. Association for Computational Linguistics.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V. Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023. [Self-consistency improves chain of thought reasoning in language models](#). In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net.
- Zesheng Wei, Mengxiang Li, Zilei Wang, and Yang Deng. 2026. [Beyond static personas: Situational personality steering for large language models](#). In *Findings of the Association for Computational Linguistics, ACL 2026, San Diego, California, United States, July 2-7, 2026*, pages 19185–19210. Association for Computational Linguistics.
- Shirley Wu, Evelyn Choi, Arpandeep Khatua, Zhanhan Wang, Joy He-Yueya, Tharindu Cyril Weerasooriya, Wei Wei, Diyi Yang, Jure Leskovec, and James Zou. 2026a. [Humanlm: Simulating users with state alignment beats response imitation](#). *CoRR*, abs/2603.03303.
- Xiaoting Wu, Yi Huang, Chunyang Gao, Mengfei Guo, Jingyu Yao, and Junlan Feng. 2026b. [Thinking alignment of scenario-oriented user simulation](#). In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2026, San Diego, California, United States, July 2-7, 2026*, pages 42932–42945. Association for Computational Linguistics.
- An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jingren Zhou, Junyang Lin, Kai Dang, and 22 others. 2024. [Qwen2.5 technical report](#). *CoRR*, abs/2412.15115.
- Jing Yao, Wei Xu, Jianxun Lian, Xiting Wang, Xiaoyuan Yi, and Xing Xie. 2023. [Knowledge plugins: Enhancing large language models for domain-specific recommendations](#). *CoRR*, abs/2311.10779.
- Xianghua Zeng, Hao Peng, and Angsheng Li. 2024. [Effective exploration based on the structural information principles](#). In *Advances in Neural Information Processing Systems 38: Annual Conference on Neural Information Processing Systems 2024, NeurIPS 2024, Vancouver, BC, Canada, December 10 - 15, 2024*.
- Bolin Zhang, Shengwei Wang, Yangqin Jiang, Dianbo Sui, Zhiying Tu, and Dianhui Chu. 2025. [Ask and retrieve knowledge: Towards proactive asking with imperfect information in medical multi-turn dialogues](#). In *Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR 2025, Padua, Italy, July 13-18, 2025*, pages 1055–1065. ACM.
- Chenhao Zhang, Renhao Li, Minghuan Tan, Min Yang, Jingwei Zhu, Di Yang, Jiahao Zhao, Guancheng Ye, Chengming Li, and Xiping Hu. 2024a. [CPsyCoun: A report-based multi-turn dialogue reconstruction and evaluation framework for Chinese psychological counseling](#). In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 13947–13966, Bangkok, Thailand. Association for Computational Linguistics.
- Tong Zhang, Chen Huang, Yang Deng, Hongru Liang, Jia Liu, Zujie Wen, Wenqiang Lei, and Tat-Seng Chua. 2024b. [Strength lies in differences! improving strategy planning for non-collaborative dialogues via diversified user simulation](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 424–444, Miami, Florida, USA. Association for Computational Linguistics.
- Yutao Zhu, Jian-Yun Nie, Kun Zhou, Pan Du, Hao Jiang, and Zhicheng Dou. 2021. [Proactive retrieval-based chatbots based on relevant knowledge and goals](#). In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR 21*, page 20002004. ACM.

A Details of ProMediConv

A.1 Task Formalization

Based on all definitions in § 3, we model the mediation process in ProMediConv as a structured dialogue involving all parties and the mediator, with formalized illustrated in Table 1.

For each round t , a party or the mediator will be invited to speak:

$$p_i^t = A(P, C_{t-1}) \quad p_i^t \in P \quad (3)$$

where $P = \{p_1, p_2, \dots, p_n, M\}$ represents the set of all involved parties and the mediator M , and

C_{t-1} references the current mediation state. If it is the turn of a party to speak, he/she will speak based on their own circumstances R_t and in consideration of the current mediation state, and their behavior pattern b_i^t at turn t will be marked by automated BP classifier agent B :

$$u_i^t = p_i^t(R_i, C_{t-1}), \quad b_i^t = B(u_i^t, C_{t-1}) \quad (4)$$

For mediator’s turn, the mediator M will first select a proper mediation strategy and then speak based on the chosen strategy:

$$\sigma_t = M(S, C_{t-1}) \quad \sigma_t \in S \quad (5)$$

$$m_t = M(\sigma_t, C_{t-1}) \quad (6)$$

where S represents the mediation strategies set. And the mediation state C is updated with each successive utterance:

$$C_t = C_{t-1} \sqcup \{u_i^t, m_t\} \quad (7)$$

A reward model R will measure the current state and output a task-oriented reward to determine the completion state of the mediation goal, following (Deng et al., 2023d):

$$r^t = R(C_t) \quad (8)$$

When the dialogue reaches termination, the total turns T_k , the completion state $S_k \in \{0, 1\}$ (where $S_k = 1$ denotes a success of the mediation goal and $S_k = 0$ denotes a failure owing to the maximum turn limit), the final-turn reward r_k^f and the initial and final behavior patterns of all the parties $\{b_i^t \mid i = \{1, 2, \dots, n\}, t = \{1, T_k\}\}$ of current case k will be recorded for the computation of dataset-level metrics AT, SR@ t , SSR and MAD.

A.2 Complete Mediation Strategy Set in ProMediConv

As introduced in § 3.2, we formalize a comprehensive taxonomy of 11 mediation strategies to capture the proactive and directive nature of human mediators. We presents the complete specification of this mediation strategy set in Table 6.

Specifically, for each mediation strategy, the table delineates its applicable mediation stages (I: Understanding, II: Intercession, and III: Reconciliation), provides an illustrative utterance example from authentic cases, and offers a detailed theoretical explanation of its core objective. This systematic mapping ensures that the defined strategies not only cover the entire lifecycle of a mediation session but also strictly align with the phase-based progression of real-world dispute resolution.

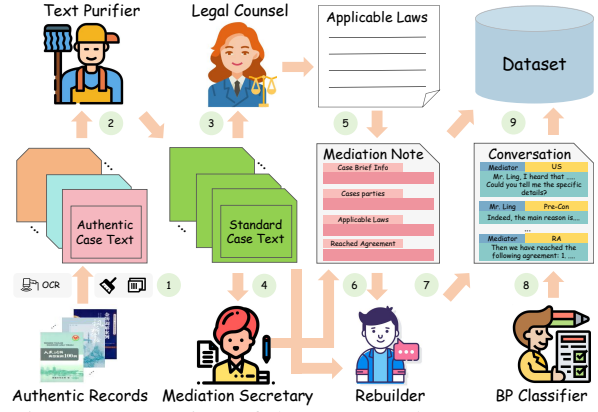


Figure 7: Overview of the automated text reconstruction pipeline. The framework transforms unstructured authentic cases into high-fidelity structured dialogues by enforcing factual and legal constraints, ultimately yielding the ProMediConv dataset.

B Details of ProMediConv Dataset

B.1 Dataset Construction

As discussed in § 3.4, although existing dispute mediation literature preserve a wealth of authentic cases, their direct utilization faces critical challenges: (1) disorganized text formats; (2) insufficient legal references; (3) lengthy contexts; and (4) a lack of explicit annotations for the parties’ BP states and mediator’s strategies. To tackle these issues without compromising the real-world dynamics, we design a pipeline-filter architecture (Schmidt et al., 2013) comprised of five specialized agents, as illustrated in Figure 7. The specific prompts designed for the Text Purifier, Mediation Secretary, Dialogue Rebuilder, and BP Classifier agents are detailed in Figure 8, Figure 9, Figure 10, and Figure 11, respectively.

Phase 1: Text Purifier Agent Given the diverse formats of authentic cases drawn from various books (illustrated in Figure 8), the Text Purifier Agent is designed to automatically identify inconsistencies in the input unstructured cases. Using tailored instructions I_t paired with few-shot examples, the agent rewrites and standardizes the diverse case texts into a unified basic structure C . This standardized structure encompasses four essential components: *Case Titles*, *Case Introductions*, *Mediation Process*, and *Applicable Laws*.

Phase 2: Legal Counsel Agent Applying suitable legal clauses is crucial for driving mediation progress (Renmin Tiaojie Gongzuo Falv Shiwu Congshu Writing Group, 2020). However, general LLMs often lack robust domain-specific legal knowledge (Yao et al., 2023). To address

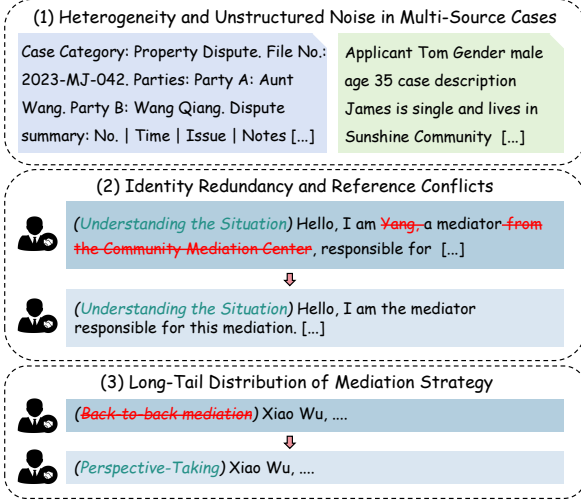


Figure 8: Illustrative examples of data challenges inherent in the original authentic cases. The figure explicitly demonstrates three representative issues: (1) Heterogeneity and Unstructured Noise in Multi-Source Cases; (2) Identity Redundancy and Reference Conflicts; and (3) Long-Tail Distribution of Strategy Labels.

this, we deploy a Legal Counsel Agent to automatically retrieve and provide the exact applicable laws L_t for the current case t . Specifically, we employ ChatLaw2E-plain-7B (Cui et al., 2023) to ensure the accuracy of legal applicability, providing a solid legal grounding for the subsequent reconstruction.

Phase 3: Secretary-Assisted Reconstruction Instead of generating dialogues from scratch, we introduce a Secretary-Assisted Reconstruction mechanism to strictly constrain the generation space. First, an LLM role-plays as a mediation secretary using a tailored prompt I_m to extract case-critical information from the standardized case c_t and compile it with the applicable laws L_t into a structured mediation note N_t :

$$N_t = \text{LLM}(c_t, L_t, I_m) \quad (9)$$

The mediation note N_t serves as a hard constraint for the reconstruction. A Rebuilder Agent is then required to strictly condition the dialogue generation on the critical content within N_t , ensuring the interaction remains faithfully aligned with the factual trajectory of the original case:

$$D_t = \text{LLM}(c_t, N_t, I_r) \quad (10)$$

where D_t represents the reconstructed multi-party dialogue and I_r is the tailored Chain-of-Thought prompt for the Rebuilder Agent. During post-processing, we manually re-transformed 8 cases

where the LLM encountered infinite repetition issues to ensure data quality.

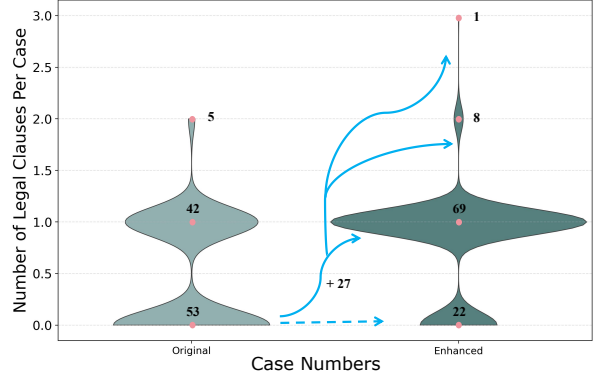


Figure 9: Distribution of legal clause counts before and after enhancement of the Legal Counsel Agent, with marked difference on the explicit law clauses numbers.

Phase 4: BP Classifier Agent and Model Selection To automatically annotate the parties' BP states from their generated utterances D_t , we introduce a BP Classifier Agent. To determine the most capable backbone for this agent, we benchmarked three advanced LLMs: Qwen2.5-14B-Instruct (Yang et al., 2024), GLM-4-9B-0414 (GLM et al., 2024), and Llama3.1-8B-Instruct (Team, 2024). These models were evaluated under both zero-shot and one-shot settings using a subset of the ProMediConv data. Each model was prompted to assign one of five labels to an utterance: the four defined BP states or a "non-party" category (e.g., neutral utterances). To establish a human baseline, we aggregate annotations from eight human annotators with expertise in psychology, using majority voting as the ground truth.

Setting	Qwen	GLM	Llama
0-shot	84.3	63.5	72.5
1-shot	74.6	60.3	75.8

Table 7: Performance (Macro-F1 %) of Qwen2.5-14B-Instruct, Llama3.1-8B-Instruct, and GLM-4-9B-0414 under zero-shot and one-shot settings on the party BP state classification task.

As detailed in Table 7, we report the macro-averaged F1 scores across the five categories. Notably, Qwen2.5-14B-Instruct achieved the highest performance (82.3%) in the zero-shot setting, significantly outperforming others and closely aligning with human consensus. Consequently, it was selected as the backbone for BP Classifier Agent.

B.2 Analysis on Legal Clause Agent

To evaluate the efficacy of the Legal Clause agent in the reconstruction pipeline, we extract explicit legal clauses from reconstructed dialogue samples generated under both settings (1) and (4), and compare the difference in the quantity of obtained clauses. As shown in Figure 9, the number of cases lacking explicit legal clauses significantly decreases, while the overall frequency of legal clauses within the dialogues substantially increases. This validates the meaningful impact of the LC agent in enhancing the legal legitimacy and professionalism of the reconstructed dialogues.

Pipeline	FI↑	CS↑	AU↑	CP↑
<i>Automatic Evaluation</i>				
Complete	9.52	<u>9.45</u>	8.95	<u>9.51</u>
- w/o MS	9.37	9.46	8.45	9.19
- w/o LC	<u>9.43</u>	9.42	8.63	9.39
- w/o TP	9.40	8.29	<u>8.87</u>	9.60
<i>Human Evaluation</i>				
Complete	8.98	8.96	8.81	9.21
- w/o MS	8.80	9.03	8.58	8.46
- w/o LC	9.03	8.85	8.31	9.13
- w/o TP	8.93	7.58	<u>8.73</u>	<u>9.17</u>

Table 12: Intrinsic Evaluation. We compare the performance using both automatic and human evaluations.

B.3 Intrinsic Evaluation of Data Quality

Experimental Setups To validate ProMediConv’s data quality and reconstruction pipeline, we conduct an intrinsic evaluation across four settings: (1) the full pipeline, and ablations removing the (2) Mediation Secretary (MS), (3) Text Purifier (TP), or (4) Legal Counsel (LC) agents. We benchmark four 1-10 scaled metrics (Table 14): Fidelity (FI) (preserving authentic details), Consistency (CS) (mediator coherence across three-case batches), Authority (AU), and Completeness (CP). FI, AU, and CP are evaluated per-case. To ensure a rigorous and fair comparison, both the human evaluators and the LLM judge strictly adhere to the exact same scoring criteria. For scalability, automatic evaluation covers the full ProMediConv dataset via the gpt-4o-20240806 (OpenAI et al., 2024) API with greedy decoding, while human evaluation focuses on the test set. Eight human evaluators were recruited and underwent rigorous training on carefully designed case studies. The reported results are the average scores from all evaluators. Across all human evaluation tasks in this work, evaluators were compensated at a rate

of \$0.50 per sample.

Experimental Results As presented in Table 3, automatic and human evaluations yield consistent findings. Specifically, the MS agent enhances the Fidelity of reconstructed dialogues by extracting and preserving key information from the original records. TP agent achieves a substantial improvement in CS (+14.0% in automatic and +18.2% in human evaluation), underscoring its efficacy in unifying mediator personas across cases. Furthermore, MS and LC enhance both Authority and Completeness by integrating critical information and enriching legal provisions, respectively. The complete pipeline setting exhibits only a marginal decline in the CP metric, indicating minimal information loss during the rewriting process.

C Training Details of ProMediAgent

To provide a strong baseline specific to ProMediConv, we introduce ProMediAgent. Its architecture follows a decoupled policy planner π and response generator framework (He et al., 2018; Deng et al., 2023d). The policy planner, denoted as $\pi(\sigma_t|C_t)$, models the probability of selecting a mediation strategy σ_t given the current mediation dialogue history C_t . By decoupling these modules, the policy planner can be implemented as a tunable small language model to maximize training efficiency. The design of the simulation environment and the training paradigm are detailed below.

C.1 Simulation Environment Design

The interactive mediation environment for online learning and evaluation strictly adheres to the workflow outlined in § A.1. Initially, we simulate dispute parties using pre-annotated profiles encompassing their *Identity*, *Situation*, and *Self-claims*. During the interaction phase, LLMs are prompted with tailored role-play templates combined with these profiles to act as dynamic mediation parties. An LLM-as-a-Judge mechanism is employed to determine the most appropriate next speaker.

To evaluate the ongoing mediation progress, we design an LLM-based outcome reward model, denoted as LLM_r. Given the dialogue history C_t , this model answers a multiple-choice question regarding the mediation state: “... has the current situation worsened / remained the same / improved / explicitly resolved?”. To mitigate the inherent subjectivity of evaluating intermediate outcomes and the stochastic nature of LLM generation, we adopt

the methodology from Wang et al. (2023) by sampling l decoded sequences from the reward LLM. Subsequently, a reward mapping function $M_r(\cdot)$ maps the textual choices into discrete scalar values. To obtain a robust and stabilized estimate, we compute the final scalar reward r_t as the average over the l sampled sequences:

$$r_t = \frac{1}{l} \sum_{i=1}^l M_r(\text{LLM}_r^{(i)}(p_r, C_t)) \quad (11)$$

where p_r represents the tailored instruction prompt for the reward model. This scalar reward strictly dictates the current mediation completion state (with a maximum turn limit fixed at $T = 20$) and serves as the fundamental reinforcement learning signal for the policy planner.

C.2 Phase 1: Supervised Fine-Tuning (SFT)

We first conduct supervised fine-tuning on the policy planner π utilizing the training set of the ProMediConv dataset. For a given case, the input consists of the current mediation dialogue history prefixed with the case background information. The optimization objective during the SFT phase is to minimize the cross-entropy loss between the strategy distribution predicted by π and the ground-truth strategy label y_t annotated at the mediator’s turn. The predicted strategy σ_t is strictly restricted to the predefined strategy set S :

$$\mathcal{L} = - \sum_{i=1}^{|S|} y_t^{(i)} \log \sigma_t^{(i)} \quad (12)$$

where $y_t^{(i)}$ is the one-hot encoded ground-truth label for the i -th strategy, and $\sigma_t^{(i)}$ is the predicted probability for the corresponding strategy in set S .

C.3 Phase 2: Reinforcement Learning (RL) Optimization

Following the SFT phase, we perform interactive online learning within the simulated mediation environment. At the mediator’s turn, the policy planner first predicts the optimal mediation strategy σ_t based on the ongoing history C_t . This predicted strategy is then deterministically mapped to a predefined natural language instruction $\mathcal{M}(\sigma_t)$.

Subsequently, the response generator produces a strategic mediation utterance u_t conditioned on both the mapped action instruction and the history:

$$u_t = \text{LLM}(\mathcal{M}(\sigma_t), C_t, P_m) \quad (13)$$

where P_m represents the specific prompt template utilized for the response generator.

To continuously align the policy planner toward successful mediation outcomes, we employ the REINFORCE algorithm (Sutton et al., 1999) to optimize the post-SFT policy parameters based on the AI-feedback scalar reward:

$$\theta \leftarrow \theta - \alpha \nabla \log \pi_\theta(\sigma_t | C_t) G_t \quad (14)$$

where θ denotes the parameters of the policy network, α is the learning rate, and G_t represents the discounted total return accumulated from the current turn t to the terminal turn T . The return G_t is computed using a discount factor γ to progressively reduce the weight of future delayed rewards:

$$G_t = \sum_{t'=t}^T \gamma^{t'-t} r_{t'} \quad (15)$$

During the final inference stage, the policy planner dynamically predicts the optimal strategy at each turn, directing the response generator to produce tactical, context-aware mediation utterances.

Algorithm 1: Interaction Flow of ProMediConv

Require: Parties $P = \{p_1, \dots, p_n\}$, mediator M , strategies S , circumstances R_i
Ensure: Total turns T_k , completion S_k , reward r_{T_k} , trajectories $\{b_t\}$, metrics

- 1: Init context $C_0 \leftarrow$ Initial case description, turn $t \leftarrow 1$
- 2: **while** Dialogue is not terminated **do**
- 3: Speaker allocation:
 $s_t \leftarrow A(P \cup \{M\}, C_{t-1})$
- 4: **if** $s_t \in P$ (Dispute party selected) **then**
- 5: Generate response via context:
 $u_t \leftarrow G_P(R_i, C_{t-1})$
- 6: Identify behavior pattern:
 $b_t \leftarrow B(u_t, C_{t-1})$
- 7: Update mediation context:
 $C_t \leftarrow C_{t-1} \oplus \{u_t\}$
- 8: **else** $\{s_t = M$ (Mediator selected) $\}$
- 9: Select mediation strategy:
 $\sigma_t \leftarrow \pi_M(S, C_{t-1})$
- 10: Generate strategic utterance:
 $m_t \leftarrow G_M(\sigma_t, C_{t-1})$
- 11: Update mediation context:
 $C_t \leftarrow C_{t-1} \oplus \{m_t\}$
- 12: Evaluate state & calc reward:
 $r_t \leftarrow R(C_t)$
- 13: **end if**
- 14: $t \leftarrow t + 1$
- 15: **end while**
- 16: $T_k \leftarrow t - 1$
- 17: Record completion $S_k \in \{0, 1\}$ and final reward r_{T_k}
- 18: Compute metrics (AT, SR@ t , SSR, MAD) via $T_k, S_k, r_{T_k}, \{b_t\}$
- 19: **return** $T_k, S_k, r_{T_k}, \{b_t\}$, alongside evaluation metrics

Strategies	Stages			Examples	Explanations
	I	II	III		
Understanding the Situation	✓		✓	Hello, Mr. Duan. First, Could you please describe what happened at the time in as much detail as possible?	By asking about the basic information of the parties involved, comprehensive support is provided for the mediation process.
Mobilizing Multiple Forces for Assistance		✓	✓	I heard that Mr. Sun is a close friend of yours. ... see if he might be able to offer additional help.	Involving close family, friends, or relevant social groups can help work together to advance the mediation process.
Combining Law with Morality		✓		According to “Regulations on Work-Related Injury Insurance,” ..., it should be counted as a work-related injury.	Ensure legality and fairness based on the law, while flexibly applying moral principles to promote problem resolution.
Grasp the Principal Contradiction		✓		The key issue is whether Xinle Company is willing to pay the migrant workers’ wages upfront. ...	Focus on addressing the primary conflict, highlight the key issues in the mediation, and avoid being distracted by secondary problems.
Integrating the Resolution of Ideological Issues and Practical Problems		✓	✓	Mr. Li, I understand your concerns. The village committee is willing to allocate a piece of land for you to transplant your plants and trees, ...	Address practical issues to alleviate psychological pressure and create conditions for resolving underlying mental or ideological concerns.
Perspective-Taking	✓	✓		Xiao Xu, when you were in dire need of help, Xiao Kang was there for you. How about...?	Adopt a perspective of empathy, understand the different needs of the parties involved, and propose acceptable solutions.
Early Detection and Prevention		✓	✓	To prevent potential disputes in the future, we can formalize this agreement in writing, clearly delineating the rights and obligations of both parties.	Identify early signs and potential issues, address them promptly to curb the emergence of disputes, and prevent the escalation of conflicts.
Strategic Ambiguity Technique	✓	✓		Mr Wu, It’s normal for a young couple to have arguments, there’s no need to dwell on who’s right or wrong...	Minimize or obscure non-principled issues, handling them ambiguously to mediate the conflict while protecting the dignity of the parties involved.
Recognition and Motivation Approaches	✓	✓	✓	It’s commendable that you recognize this, which shows you’re a sensible and reasonable person....	Praise and encourage the parties involved to motivate them, boost their confidence, and promote cooperation in the mediation process.
Reaching a Mediation Agreement			✓	Very well, since both of you are willing to accept mediation, we have reached the following agreement: 1.....	Guide the parties to reach an agreement and create an executable written contract that clearly defines their rights and obligations.
Others	✓	✓	✓	Thank you all for your cooperation. I hope this mediation will help both parties resolve the issue at hand...	Be flexible and adaptable, not limited to using established mediation methods.

Table 6: Overview of mediation strategies, their active stages, illustrative examples, and detailed explanations.

[System]

Now enter the role-playing mode.

Role: You are a mediator with twenty years of experience in resolving conflicts and disputes, specializing in analyzing and revising case studies related to conflicts and disputes. Your task is to read the conflict dispute case and revise and rewrite the original case text.

[User]**## Task:**

- Standardizing the mediator's role as a male mediator, removing information such as the mediator's title, gender, name, etc.
- Removing the description of the mediation methods mentioned in the case.
- Reorganizing the text into the following structure: (Case title, Case introduction, Mediation Process, Applicable Law).

Constraints: Please analyze the following dispute case and rewrite it according to the aforementioned requirements. Note that after the modification is completed, only the revised case text should be output, without any additional output.

Please process the following case: {Case Introduction}

Table 8: Prompt template for the Text Purifier Agent in our framework, designed to standardize the format of unstructured authentic cases. Dynamic input variables are denoted in typewriter font.

[System]

Role: You are a mediator with twenty years of professional experience, specializing in analyzing conflict resolution cases. You are responsible for designing mediation notes based on historical conflict case records.

[User]**## Task:**

- Analyzing conflict case records to identify all individuals involved (parties, support personnel).
- Analyzing conflict case records to identify the final mediation resolution.

Constraints: Your output format is as follows:

All Individuals: [Party 1: Name ... Party n: Name] | [Support personnel 1: Name ... Support personnel m: Name]

Reached Agreement: [Content of the mediation resolution]

Note that n and m represent the number of parties involved and the number of support personnel, respectively. No additional output is required apart from the above lists.

Please analyze the following conflict case and design mediation notes: {Case Description}

Table 9: Prompt template for the Mediation Secretary Agent, designed to extract case-critical information and compile mediation notes.

[System]

Role: You are a mediator with twenty years of experience, skilled in reconstructing dialogue scenarios for grassroots conflict mediation. You are responsible for reconstructing multi-turn, long dialogues involving all parties and the mediator based on historical case records.

[User]**## Task:**

- For the mediator's turns, you can reconstruct the mediator's actual strategy selection by combining the context of the dialogue and the factual content of the mediation event description. The strategy must be chosen exclusively from the predefined eleven strategies.
- For the non-mediator turns, you should reconstruct their authentic expressions.

Constraints:

- For the mediator's turns, the output format is: *Mediator (Mediation Strategy): "Mediation Dialogue"*, where the strategy is one of the eleven options.
- For the parties and auxiliary personnel, the output format is: *Name: Dialogue*

Please reconstruct the mediation dialogue scenario for the following conflict case based on the provided information. Mediation typically begins with "Understanding the Situation" and concludes with "Reaching a Mediation Agreement." Ensure the completeness of the scenario, avoid non-dialogue text, and do not omit dialogue details.

Available mediation strategies include: {Strategies List}

Involved individuals include: {All Individuals}

The agreement reached is as follows: {Reached Agreement}

Applicable Laws provided by Legal Counsel: {Applicable Laws}

Please reconstruct the mediation dialogue based on the provided information above: {Case Description}

Table 10: Prompt template for the Dialogue Rebuilder Agent, tasked with reconstructing multi-turn, multi-party mediation dialogues strictly conditioned on factual constraints.

[System]

Now enter the role-playing mode.

Role: You are mediation dialogue analysis expert. Your task is to classify statements from involved parties in mediation dialogues and identify their current behavior pattern state.

[User]

Task:

- Text Analysis: Accurately analyze the content of mediation dialogues.
- Classification: Categorize current behavioral patterns into predefined states based on analysis.

Knowledge Base (Behavior Pattern States):

1: Parties completely deny the existence of their own responsibilities or issues. Manifestations: Refusal to discuss, direct refutation, or persistent insistence on own views.

2: Parties acknowledge some facts partially but refuse to assume full responsibility. Manifestations: Using vague terms like 'maybe', attributing to external factors, or showing negative attitudes toward solutions.

3: Parties begin to accept mediation and engage in disputes over details. Manifestations: Using cooperative language like 'negotiable', modifying specific terms, or requesting more factual/legal basis.

4: Parties explicitly accept the formal resolution. Manifestations: Using definitive expressions like "agree", showing positive consensus-building emotions, or actively confirming execution details.

5: Current statement is not from involved parties or is neutral commentary (no labeling required).

Usage Instructions: Input: Dialogue history + current party's statement → Output: Identify behavioral mode state number only (1-5) without additional explanations.

Mediation History: {Mediation History}

Current Party Utterance: {Current Party Utterance}

Table 11: Prompt template for the BP Classifier Agent, utilized to automatically annotate the dynamic behavioral pattern states of the disputing parties based on current utterances and dialogue history.

Case Info.: One day Mrs Qiu was walking her dog when two large cats suddenly appeared and attacked the pet. But when she lifted the dog up and kicked the cats, the cats turned on her, biting and scratching her thighs, which made her legs bleed right away. [...]

Disputing Parties: Mrs Qiu, Mr. Li

Dialogue A: From ProMediAgent

Mediator (US) : Let's all calm down first. Could you please tell me what happened? I need to understand the situation.

Mrs Qiu (BP: 0): Mr. Li's cat bit me while I was walking my dog. He should cover all the medical costs.

[...]

Mrs Qiu (BP: 3): If Mr. Li will cover part of the costs, I can accept that.

Mr. Li (BP: 3): My cat doesn't usually attack, but I'll accept this solution.

Mediator (RA) : We have an agreement: Mr. Li will cover part of the medical costs, and Auntie Qiu agreed to accept this.

Goal Completion: ✓ Turn: 14 Final Reward: 1.0 MAD: 3.0

Dialogue B: From ChatGPT / ProCoT

[...]

Mr. Li (BP: 1): The cat only attacked after Mrs Qiu kicked at it. I'll only take partial responsibility.

Mrs Qiu (BP: 2): I agree with mediator. The owner should be mainly responsible. I'll compromise, but I need my costs covered fairly.

Mediator (RA) : Well, Mr. Li, as the owner, bears the main responsibility. Mrs. Qiu, please mind your safety. You've both agreed to compromise and work this out together.

Goal Completion: ✓ Turn: 12 Final Reward: 1.0 MAD: 1.5

Table 13: Case Study: Comparison of Complete Resolution in Dialogue A and Short-cut Resolution in Dialogue B.

Evaluation Criteria (each question scored from 1 to 10 points)	
Fidelity	1. Does the reconstructed dialogue accurately reflect the core facts, events, and timeline presented in the authentic record? 2. Are the primary conflict points and original claims of the disputing parties strictly preserved without introducing hallucinated arguments? 3. Are the specific details of the dispute (e.g., financial amounts, locations, personal relationships) strictly consistent with the original text? 4. Does the final mediation outcome or proposed resolution strictly align with the documented factual resolution in the real-world case?
Consistency	1. Are the mediator’s position, age, and workplace consistent across the two dialogue cases? 2. Is the mediator’s language style and expression consistent in both dialogues?
Authority	1. Are the legal provisions cited in the dialogue accurate, relevant, and closely linked to the dispute points? 2. Does the mediator provide clear and reasonable explanations of the legal provisions, avoiding mere mechanical citation? 3. Does the reached mediation agreement comply with legal requirements and have clear legal validity? 4. Can the mediator cite opinions from authoritative legal institutions or experts to enhance the credibility of the agreement?
Completeness	1. Does the dialogue cover all major stages of the mediation process, including understanding the basic situation, communicating with the parties to resolve issues, and finally reaching a mediation agreement? 2. Are the viewpoints and opinions of both parties fully expressed, avoiding the omission of important discussion content or conflict points? 3. Is the mediation agreement detailed and clear, including the responsibilities of both parties, implementation methods, and follow-up supervision mechanisms? 4. Is the solution proposed by the mediator comprehensive and feasible?

Table 14: Complete Scoring Criteria for both Human and LLMs Evaluator on Intrinsic Evaluation.