

Beyond Reflection: Affirmation as a Promising Behavioral Marker Associated with Quality in Text-Based Counseling

Michimasa Inaba

The University of Electro-Communications
1-5-1, Chofugaoka, Chofu, Tokyo, Japan
m-inaba@uec.ac.jp

Abstract

While AI-assisted text-based counseling is gaining attention, it remains empirically unclear which counselor behaviors are associated with higher dialogue quality. Existing research often focuses heavily on Reflection, borrowing frameworks from Motivational Interviewing. To address this gap, we conduct a multi-layered analysis using KokoroChat, a large-scale Japanese text counseling dataset conducted by professional counselors and trainees, newly annotated with counselor strategy tags and client distress levels. Our results show that, under the quality indicators used in this study, Affirmation is more consistently associated with session quality than Reflection among the analyzed strategies. Cross-dataset transfer experiments further suggest that this quality signal can be observed to some extent on ESConv, an English dataset with non-expert supporters. These findings provide empirical implications for counselor training and emotional support system design. We release the additional KokoroChat annotations and experimental source code at <https://github.com/UEC-InabaLab/BeyondReflection>.

Despite these advancements, empirical evidence remains limited regarding how a broad range of counselor strategies are comparatively associated with session-level quality indicators in text-based counseling. Empirically elucidating what counselor behaviors enhance quality in this domain is crucial. Such insights are essential not only for supporting the training of human counselors but also for establishing foundational design principles for AI-assisted support systems.

To address the lack of specific evaluation frameworks, existing studies have frequently referred to the framework of Motivational Interviewing (MI). In the field of MI, behavioral coding systems such as MISC (Miller et al., 2003) and MITI (Moyers et al., 2016) are well-established, defining behavioral categories represented by OARS (Open questions, Affirmations, Reflections, and Summaries) (Miller and Rollnick, 2012). Among these, Reflection is considered the core skill, and NLP research has primarily focused on MI behavior classification as well as the generation and detection of Reflections (Pérez-Rosas et al., 2017; Tanana et al., 2019; Shen et al., 2020). However, MI is a technique specialized for behavior change, such as smoking cessation or reducing alcohol consumption, and its primary objective differs from that of emotional support counseling, which aims to alleviate distress and provide emotional stability.

Despite this difference in objectives, Reflection and Restatement have been explicitly treated as targets for analysis and generation in emotional support dialogue research (Liu et al., 2021; Cheng et al., 2022). Furthermore, even in studies targeting online mental health consultations, Reflection and Restatement are analyzed as crucial counselor strategies (O’neil et al., 2023). Complementary mixed-methods research on CBT-based online peer support identified active listening, reflective restatements, and opportunities for exploration as factors contributing to support seekers’ perceived

1 Introduction

Research on the application of artificial intelligence in mental health support has attracted significant attention (Gkotsis et al., 2017; Ji et al., 2018; Nguyen et al., 2022). AI-assisted support offers several accessibility advantages, such as eliminating geographical barriers, reducing the stigma of seeking help through anonymity, and providing low-cost availability (Torous et al., 2020). Furthermore, recent advancements in large language models (LLMs) have accelerated research on response generation specifically for text-based counseling (Cheng et al., 2022; Liu et al., 2023; Inaba et al., 2024; Xu et al., 2025; Wang et al., 2025).

empathy, while also reporting discrepancies between human and computational assessments of empathy (Syed et al., 2024).

Although a previous study has analyzed large-scale text-based counseling data (Althoff et al., 2016), focusing primarily on word frequencies and vocabulary, it does not conduct an analysis based on counselor behaviors or strategies.

To address this gap, this study empirically investigates counselor behaviors using KokoroChat (Qi et al., 2025), a large-scale Japanese text-based counseling dataset. KokoroChat includes counselor evaluations provided by the clients, which we utilize as indicators of dialogue quality. Furthermore, we newly annotate KokoroChat with counselor strategy tags and client distress levels to conduct a multi-layered analysis, allowing us to examine associations between counselor behaviors and the client’s state. In addition, to examine whether the obtained findings are specific to KokoroChat, we perform a cross-dataset transfer validation on ESConv (Liu et al., 2021), an English emotional support dialogue dataset, using commonly definable behavioral features. This approach enables us to examine whether the findings are dependent on a single corpus or if they can be observed to some extent across different conditions of culture, language, and expertise.

The contributions of this study are threefold: (1) We provide an additional annotation layer for 6,589 KokoroChat sessions, consisting of 11 types of counselor strategy tags and 4-level client distress labels, and publicly release these annotations and the experimental code. (2) Through a multi-layered analysis, we empirically show that Affirmation, a specific counselor strategy, is more consistently associated with our quality indicators than Reflection among the analyzed strategies. (3) By performing cross-dataset transfer between two datasets differing in language, cultural background, and counselor expertise, we show that the quality signal associated with Affirmation can be observed to some extent beyond KokoroChat.

2 Data and Annotation

2.1 KokoroChat

In this study, we conducted our analysis using KokoroChat (Qi et al., 2025), a Japanese text-based counseling dataset. KokoroChat contains one-on-one role-play text counseling sessions conducted by professional counselors or trainees.

Each session lasts for 60 minutes, and the dataset includes a total of 6,589 sessions. All sessions are annotated with evaluation scores provided by the speakers who played the role of the client. This evaluation consists of 20 items, each scored from 0 to 5, resulting in a maximum total score of 100.

2.2 Annotation of Counselor Strategies

To conduct an analysis focusing on counselor strategies, we newly annotated each counselor utterance with one of the 11 mutually exclusive strategy tags summarized in Table 1. Affirmation, Suggest, and Inform were adopted from ESConv (Liu et al., 2021) with shortened names. We divided ESConv’s Question category into OpenQuestion and ClosedQuestion following the distinction used in Anno-MI (Wu et al., 2022). Reflection and Paraphrase follow ESConv’s corresponding definitions and align with Anno-MI’s Complex Reflection and Simple Reflection, respectively. We additionally introduced Backchannel, Greeting, and Thanking because these behaviors occurred frequently in KokoroChat. The rare ESConv Self-disclosure category was included in Other.

The distinction among Affirmation, Reflection, and Paraphrase is central to our analysis. Affirmation positively evaluates the client’s strengths, efforts, motivations, abilities, or actions. Reflection verbalizes the client’s emotions or underlying personal meaning, whereas Paraphrase restates the factual or propositional content of the client’s preceding utterance. Thus, empathizing with or validating an emotion alone is classified as Reflection rather than Affirmation.

The annotation was automatically performed on a total of 306,495 counselor utterances included in KokoroChat using Gemini 2.5 Flash. The actual prompt used for this process is shown in Appendix B.

2.3 Annotation of Distress Levels

To analyze the extent to which the client’s distress was alleviated throughout the session, we annotated the client’s utterances on a 4-point scale ranging from 0 (no distress) to 3 (severe distress). The annotation was performed automatically using the Gemini 2.5 Flash model, treating consecutive client utterances as a single block. The actual prompts used are provided in Appendix C.

Tag	Definition	Example utterance
OpenQuestion	A question intended to elicit a broad or elaborated response from the client.	“What has happened recently?”
ClosedQuestion	A yes/no question or one with a restricted answer set, including questions about quantities or time.	“Did that happen recently?”
Paraphrase	A restatement of the factual or propositional content of the client’s preceding utterance, without interpreting emotion.	“So, what you mean is that ...”
Reflection	A verbalization of the client’s emotions or underlying personal meaning intended to clarify feelings or convey empathic understanding.	“That must have been painful for you.”
Affirmation	A positive evaluation of the client’s strengths, efforts, motivations, abilities, or actions; emotional validation alone is insufficient.	“It is wonderful that you have been able to keep trying that hard.”
Suggest	A proposal of an action, perspective, or solution intended to encourage the client to act or reconsider.	“How about trying ...?”
Inform	Provision of facts, opinions, resources, or answers without encouraging a specific action.	“In general, it is said that ...”
Backchannel	A brief signal of attentive listening that contains no substantive summary or reflection.	“I see.”
Greeting	An utterance whose primary function is greeting or opening the interaction.	“Hello.”
Thanking	An utterance whose primary function is expressing gratitude.	“Thank you.”
Other	An utterance not covered above, such as session management, apology, or rare self-disclosure.	“Please wait a moment.”

Table 1: Counselor strategy annotation scheme for KokoroChat, with definitions and example utterances.

2.4 Evaluation of Automatic Annotations

To validate the automatic annotations, two crowd workers independently annotated a subset of the data. For counselor strategies (318 utterances), Cohen’s κ between workers was 0.674, and the scores between Gemini and each worker were 0.710 and 0.687. For distress levels (204 blocks), the Quadratic Weighted κ between workers was 0.677, and the scores between Gemini and each worker were 0.611 and 0.650. All scores indicate substantial agreement. We further analyzed tag-level error patterns to examine whether LLM annotation errors were systematically concentrated in particular strategy categories; details are provided in Appendix D.

3 Analysis of Counselor Strategies and Session Quality

We examined the relationship between counselor behaviors and session quality at the session level to identify behavioral patterns that characterize high-quality dialogues overall. We utilized two complementary quality indicators: categorical and continuous. For the categorical indicator, we divided the sessions into three tiers (high, mid, and low) based on the top, middle, and bottom thirds of the clients’ review scores. For the continuous indicator, we measured the change in client distress, defined as the average distress level in the second half of the session minus that in the first

half. A more negative value indicates greater distress reduction. Using both indicators allows us to capture quality from multiple perspectives, reflecting both subjective evaluation and state transition.

We also verified that these two indicators were empirically aligned. Client-rated scores were significantly negatively correlated with Δ distress, and mean Δ distress showed a monotonic pattern across the score-based tiers. This suggests that the two indicators capture related but non-identical aspects of dialogue quality; detailed results are provided in Appendix E.

3.1 Tier-based Analysis

We calculated the usage rate of each tag across the high, mid, and low client-rated score tiers, and performed chi-square tests followed by Bonferroni-corrected pairwise tier comparisons. Figure 1 shows the results. Exact usage rates, utterance counts, and high–low differences for all tags are provided in Appendix F. In the figure, brackets and asterisks indicate significant pairwise differences between the connected tiers at the 1% level after Bonferroni correction. Overall, high-tier sessions showed higher use of Affirmation and lower use of questions. Affirmation accounted for 9.9% of counselor utterances in the high tier and 6.5% in the low tier, corresponding to an absolute difference of 3.5 percentage points based on the unrounded rates. This pattern suggests that explicit validation and encouragement may be particularly

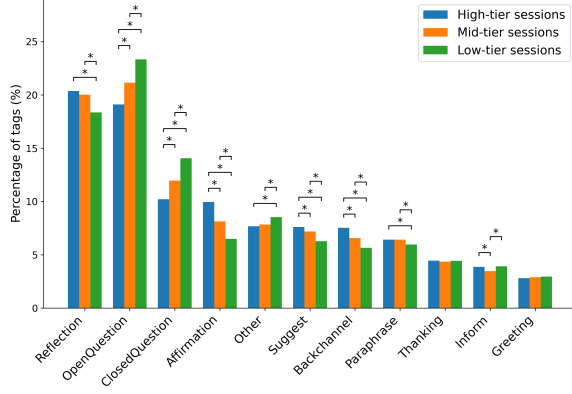


Figure 1: Tag usage rates by client-rated score tier. Brackets and asterisks indicate significant pairwise differences between the connected tiers in Bonferroni-corrected chi-square tests at $p < .01$. The significance markers refer to tier differences, not correlations.

Tag	ρ	Adj. p	Partial ρ	Adj. p
Affirmation	-0.201	< .001	-0.200	< .001
Suggest	-0.130	< .001	-0.119	< .001
Thanking	-0.040	0.025	-0.050	< .001
Other	-0.027	0.523	-0.035	0.080
Paraphrase	-0.018	1.000	-0.034	0.113
Inform	-0.014	1.000	-0.001	1.000
Backchannel	0.003	1.000	0.019	1.000
Reflection	0.024	0.936	0.075	< .001
Greeting	0.030	0.294	0.003	1.000
OpenQuestion	0.077	< .001	0.049	0.001
ClosedQuestion	0.126	< .001	0.117	< .001

Table 2: Spearman and partial Spearman correlations between counselor strategy tag usage rates and Δ distress. Partial correlations control for the initial distress level, defined as the mean distress level in the first half of the session. Adjusted p -values (Adj. p) are Bonferroni-corrected.

important in text-based counseling, where nonverbal cues of acceptance are unavailable. In contrast, the higher question frequency in lower-tier sessions may reflect a reliance on information gathering rather than more empathic strategies.

3.2 Distress Level-Based Analysis

Next, to complement the client-rated tiers with a state-transition-based outcome, we analyzed correlations between distress change and tag usage rates. We also calculated partial correlations controlling for initial distress, defined as the mean distress level in the first half of the session, to reduce the possibility that the associations merely reflected differences in baseline distress.

Table 2 presents the results. Affirmation was the tag most consistently associated with distress alle-

vation, showing a significant negative correlation with distress change. This indicates that sessions with higher Affirmation usage are associated with greater distress reduction toward the session’s end. Consistent with tier-based analysis, we hypothesize that Affirmation explicitly conveys acceptance and validation, fostering security and ease of speaking, particularly in text-based counseling where nonverbal cues are limited.

Because this analysis is observational, we additionally conducted temporal robustness checks and mixed-effects/Mundlak analyses accounting for counselor-level clustering. These analyses did not eliminate the association, but remain correlational; details are provided in Appendices G and H.

The absolute correlation for Affirmation is modest, and thus Affirmation alone should not be interpreted as strongly explaining session quality. Rather, its importance lies in its comparative consistency across score-based tiers, distress-based analyses, robustness checks, and the cross-dataset transfer discussed later.

4 Cross-Dataset Transfer

The analyses thus far have demonstrated that Affirmation is the most consistently associated with quality within KokoroChat. We next examined whether the behavioral signal is specific to KokoroChat or if it generalizes to some extent across a different dataset varying in language, culture, and expertise. The objective of this section is to examine whether a quality prediction model trained on KokoroChat (Japanese, trained counselors) yields meaningful predictive signals for ESConv (Liu et al., 2021), an emotional support dialogue dataset (English, non-expert supporters).

4.1 Experimental Setup

We trained a logistic regression model on a binary classification task distinguishing the high and low tiers based on KokoroChat’s client review scores. We targeted 4,390 sessions with the most distinct quality differences, excluding the mid tier. This exclusion prioritizes evaluating the predictive power of behavioral features between sessions with the clearest quality contrast, as the middle tier exhibits mixed characteristics. We restricted the features to five dimensions that could be consistently defined across both datasets. Specifically, we used the usage rates of Affirmation, Re-

Feature	Coefficient
Affirmation	+0.536
Question	−0.421
Suggest	+0.207
Other	−0.149
Reflection	+0.102

Table 3: Regression coefficients in the KokoroChat-to-ESConv transfer model.

flection, Question (combining OpenQuestion and ClosedQuestion), Suggest, and Other. These correspond to ESConv’s Affirmation and Reassurance, Reflection of feelings, Question, Providing Suggestions, and Others, respectively. The mapped categories are semantically aligned with ESConv by design: except for Question, KokoroChat uses the same category definitions as ESConv, with shortened label names. The mapping table is provided in Appendices I.

After training, we used the model to calculate the probability of being classified as the high tier for each ESConv session. We then computed the Spearman’s rank correlation coefficient between this predicted probability and $\Delta\text{emotion}$, defined as the difference between “final_emotion_intensity” and “initial_emotion_intensity” annotated in ESConv.

4.2 Results

The predicted probabilities from the model trained only on KokoroChat showed a significant negative correlation with $\Delta\text{emotion}$ in ESConv ($\rho = -0.072, p = 0.014$). Although small, this directionally consistent association indicates that sessions exhibiting behavioral patterns classified as “high quality” in KokoroChat tended to show greater emotional improvement in ESConv.

Table 3 shows the standardized coefficients of the logistic regression model trained on KokoroChat. Affirmation had the largest positive coefficient (+0.536), whereas Question had a large negative coefficient (−0.421). Thus, higher Affirmation usage increased the model’s log-odds of predicting the high tier, while higher Question usage decreased them, consistent with the tier-based analysis in Section 3.1. Suggest and Reflection also had positive coefficients, although their magnitudes were smaller, whereas Other had a negative coefficient.

Admittedly, the correlation coefficient is small, indicating a modest effect size. However, this

transfer setting involves multiple discrepancies: cultural and linguistic differences (Japanese to English), expertise differences (trained counselors to non-expert supporters), and differing evaluation metrics (comprehensive session scores versus emotional improvement scores). The fact that a significant association was observed despite these conditions is crucial in itself, suggesting that the quality signal centered on Affirmation is reproducible across datasets to some extent.

5 Conclusion

We analyzed counselor behaviors in text-based counseling using the newly annotated KokoroChat dataset. Affirmation showed a stronger and more consistent association with our quality indicators than Reflection under the present evaluation setting. Cross-dataset transfer to ESConv further suggested that the quality signal associated with Affirmation can be observed to some extent across languages and expertise levels. These findings provide empirical implications for counselor training and emotional support system design.

Future work should move beyond session-level frequencies toward sequence-level modeling of when to affirm, conditioned on the client’s preceding utterance, current distress level, and session phase. Such modeling would address the inherent limitation of macro-level behavioral coding and directly inform response generation for emotional support systems. The quality of Affirmation itself also warrants finer-grained analysis: distinguishing affirmations grounded in the client’s specific efforts and actions from generic praise is particularly important for LLM-based systems, where indiscriminate positive feedback risks degenerating into sycophancy rather than genuine validation. In addition, our interpretation that explicit verbal Affirmation is especially important in text-based settings, where nonverbal cues of acceptance are unavailable, is itself a testable hypothesis; comparative analyses on spoken or face-to-face counseling corpora would clarify whether the observed signal is modality-specific. Examining how these associations vary across client characteristics and problem domains would further support the development of adaptive support systems that tailor strategy use to individual clients.

Limitations

This study has several limitations. First, the tiers in KokoroChat are defined based on client reviews, which are not entirely independent of other metrics derived from the same session. Therefore, the internal analysis of KokoroChat may involve partial circularity between the quality definition and the explanatory variables. However, the transfer validation to ESConv utilizes a different metric on an external dataset, indicating that at least part of our main conclusion is supported independently of this circularity.

Second, although the correlation coefficient in the transfer experiment is significant, its absolute value is small, and we cannot claim strong external validity at this stage. The mapped categories are definitionally aligned with ESConv by design; however, differences in language, dialogue setting, and annotation procedures mean that complete operational equivalence across datasets cannot be assumed. Our study demonstrates that the quality signal centered on Affirmation does not completely collapse across datasets, rather than suggesting that it can be applied to heterogeneous datasets with high accuracy.

Third, although we additionally modeled counselor identity as a random effect and decomposed within- and between-counselor variation in Affirmation use (Appendix H), our analysis still cannot fully isolate all counselor-level characteristics. The additional analysis suggests that the association between Affirmation and session quality is not solely attributable to stable differences among counselors. However, unobserved counselor competencies, such as timing, empathy, and rapport-building skills, may still contribute to the observed association.

Fourth, our analysis relies on automatic annotations generated by an LLM (Gemini 2.5 Flash). Although we confirmed substantial agreement with human annotators and conducted an additional tag-level error analysis (Appendix D), LLM-based annotations inherently contain noise and potential biases.

Fifth, our study design is entirely observational and does not support causal inference. Although our additional temporal analyses (Appendix G) reduce the plausibility of a simple reverse-causality explanation in which counselors use Affirmation mainly after clients have already improved, they do not rule out all possible confounding. Highly

skilled counselors might use Affirmation more frequently, but their overall effectiveness could stem from other unmeasured competencies, such as better timing, empathy, or rapport-building skills. Therefore, we interpret Affirmation as a temporally robust behavioral marker associated with session quality, rather than as a causal determinant of client improvement.

Finally, it is crucial to acknowledge that the absolute values of the observed correlations are modest. For example, the correlation between Affirmation usage and $\Delta\text{distress}$ was $\rho = -0.201$, and the cross-dataset transfer correlation was $\rho = -0.072$. This indicates that the mere frequency of counselor behavioral strategies explains only a small portion of the variance in session quality. Dialogue quality is likely highly dependent on factors beyond macro-level tag frequencies, such as the precise timing of interventions, contextual appropriateness, the building of rapport, and subtle linguistic nuances. While Affirmation emerged as the most consistent indicator among the analyzed tags, our findings highlight the inherent limitations of frequency-based behavioral coding in fully capturing the complexity of counseling quality.

Ethical Considerations

This research involves the sensitive domain of mental health and counseling. We strictly adhere to ethical guidelines and outline the following considerations regarding our data, annotation process, and the potential applications of our findings.

First, regarding data privacy and consent, we utilized KokoroChat and ESConv, both of which are publicly available datasets. We used them strictly in accordance with their respective terms of use. KokoroChat consists of role-play sessions conducted by professional counselors and trainees, ensuring that no real patients were involved and no personally identifiable information (PII) of actual clients is included. Similarly, ESConv was collected under appropriate ethical protocols.

Second, regarding the human evaluation of our automatic annotations, we recruited annotators through CrowdWorks (<https://crowdworks.jp/>), a Japanese crowdsourcing platform. To ensure fair labor practices, we compensated the workers at an hourly rate exceeding the minimum wage in Tokyo, Japan (approximately 7 USD per hour).

Finally, while our findings provide foundational

insights for designing AI-assisted emotional support systems, we are fully aware of the significant ethical risks associated with deploying fully autonomous AI in mental health care. Mental health interventions are highly sensitive; inappropriate or harmful AI-generated responses could exacerbate a client's distress. Therefore, the behavioral markers identified in this study (e.g., Affirmation) are primarily intended to support the training of human counselors and to inform human-in-the-loop AI systems, ensuring that safety and ethical standards are prioritized.

References

- Tim Althoff, Kevin Clark, and Jure Leskovec. 2016. [Large-scale analysis of counseling conversations: An application of natural language processing to mental health](#). *Transactions of the Association for Computational Linguistics*, 4:463–476.
- Yi Cheng, Wenge Liu, Wenjie Li, Jiashuo Wang, Ruihui Zhao, Bang Liu, Xiaodan Liang, and Yefeng Zheng. 2022. [Improving multi-turn emotional support dialogue generation with lookahead strategy planning](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 3014–3026, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- George Gkotsis, Anika Oellrich, Sumithra Velupillai, Maria Liakata, Tim JP Hubbard, Richard JB Dobson, and Rina Dutta. 2017. [Characterisation of mental health conditions in social media using informed deep learning](#). *Scientific reports*, 7(1):45141.
- Michimasa Inaba, Mariko Ukiyo, and Keiko Takamizo. 2024. [Can large language models be used to provide psychological counselling? an analysis of gpt-4-generated responses using role-play dialogues](#). In *The 14th International Workshop on Spoken Dialogue Systems Technology*.
- Shaoxiong Ji, Celina Ping Yu, Sai-fu Fung, Shirui Pan, and Guodong Long. 2018. [Supervised learning for suicidal ideation detection in online user content](#). *Complexity*, 2018(1):6157249.
- June M. Liu, Donghao Li, He Cao, Tianhe Ren, Zeyi Liao, and Jiamin Wu. 2023. [ChatCounselor: A large language models for mental health support](#). *Preprint*, arXiv:2309.15461.
- Siyang Liu, Chujie Zheng, Orianna Demasi, Sahand Sabour, Yu Li, Zhou Yu, Yong Jiang, and Minlie Huang. 2021. [Towards emotional support dialog systems](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3469–3483, Online. Association for Computational Linguistics.
- William R. Miller, Theresa B. Moyers, Denise Ernst, and Paul Amrhein. 2003. [Manual for the motivational interviewing skill code \(MISC\), version 2.0](#). Unpublished manuscript, Center on Alcoholism, Substance Abuse and Addictions, University of New Mexico, Albuquerque, NM.
- William R Miller and Stephen Rollnick. 2012. *Motivational interviewing: Helping people change*. Guilford Press.
- Theresa B. Moyers, Lauren N. Rowell, Jennifer K. Manuel, Denise Ernst, and Jon M. Houck. 2016. [The motivational interviewing treatment integrity code \(MITI 4\): Rationale, preliminary reliability and validity](#). *Journal of Substance Abuse Treatment*, 65:36–42.
- Thong Nguyen, Andrew Yates, Ayah Zirikly, Bart Desmet, and Arman Cohan. 2022. [Improving the generalizability of depression detection by leveraging clinical questionnaires](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 8446–8459, Dublin, Ireland. Association for Computational Linguistics.
- Emma O'neil, João Sedoc, Diyi Yang, Haiyi Zhu, and Lyle Ungar. 2023. [Automatic reflection generation for peer-to-peer counseling](#). In *Proceedings of the Third Workshop on Natural Language Generation, Evaluation, and Metrics (GEM)*, pages 62–75, Singapore. Association for Computational Linguistics.
- Verónica Pérez-Rosas, Rada Mihalcea, Kenneth Resnicow, Satinder Singh, and Lawrence An. 2017. [Understanding and predicting empathic behavior in counseling therapy](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1426–1435, Vancouver, Canada. Association for Computational Linguistics.
- Zhiyang Qi, Takumasa Kaneko, Keiko Takamizo, Mariko Ukiyo, and Michimasa Inaba. 2025. [KokoroChat: A Japanese psychological counseling dialogue dataset collected via role-playing by trained counselors](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 12424–12443, Vienna, Austria. Association for Computational Linguistics.
- Siqi Shen, Charles Welch, Rada Mihalcea, and Verónica Pérez-Rosas. 2020. [Counseling-style reflection generation using generative pretrained transformers with augmented context](#). In *Proceedings of the 21th Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pages 10–20, 1st virtual meeting. Association for Computational Linguistics.

- Sara Syed, Zainab Iftikhar, Amy Wei Xiao, and Jeff Huang. 2024. [Machine and human understanding of empathy in online peer support: A cognitive behavioral approach](#). In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems*, CHI '24, pages 1–13, New York, NY, USA. Association for Computing Machinery.
- Michael J Tanana, Christina S Soma, Vivek Srikumar, David C Atkins, and Zac E Imel. 2019. [Development and evaluation of clientbot: Patient-like conversational agent to train basic counseling skills](#). *J Med Internet Res*, 21(7):e12529.
- John Torous, Keris Jän Myrick, Natali Rauseo-Ricupero, and Joseph Firth. 2020. [Digital mental health and COVID-19: Using technology today to accelerate the curve on access and quality tomorrow](#). *JMIR Mental Health*, 7(3):e18848.
- Jieyi Wang, Yue Huang, Zeming Liu, Dexuan Xu, Chuan Wang, Xiaoming Shi, Ruiyuan Guan, Hongxing Wang, Weihua Yue, and Yu Huang. 2025. [STAMPsy: Towards spatiotemporal-aware mixed-type dialogues for psychological counseling](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 39(24):25371–25379.
- Zixiu Wu, Simone Balloccu, Vivek Kumar, Rim Helaoui, Ehud Reiter, Diego Reforgiato Recupero, and Daniele Riboni. 2022. [Anno-MI: A dataset of expert-annotated counselling dialogues](#). In *ICASSP 2022 - 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 6177–6181.
- Yangyang Xu, Jinpeng Hu, Zhuoer Zhao, Zhangling Duan, Xiao Sun, and Xun Yang. 2025. [MultiAgentESC: A LLM-based multi-agent collaboration framework for emotional support conversation](#). In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 4665–4681, Suzhou, China. Association for Computational Linguistics.

A Design Principles for Counselor Strategy Tags

The tags used in this study are based on the eight tags proposed in ESConv. Among them, “Affirmation and Reassurance”, “Providing Suggestions”, and “Information” from ESConv were adopted directly with shortened names: Affirmation, Suggest, and Inform, respectively. Regarding “Question”, we adopted the sub-types defined in Anno-MI, splitting it into two distinct tags: OpenQuestion and ClosedQuestion. In ESConv, “Reflection of Feelings” and “Restatement or Paraphrasing” correspond to the sub-types “Complex Reflection” and “Simple Reflection” in Anno-MI, respectively. We mapped these corresponding concepts and adopted them as Reflection and Paraphrase in our study. Furthermore, based on our analysis of KokoroChat, we newly added three tags: Backchannel, Greeting, and Thanking. These behaviors appeared frequently in KokoroChat, although they fall under the “Other” or “Others” category in ESConv and Anno-MI. Initially, we considered “Self-disclosure” from ESConv as an independent tag; however, since its frequency in KokoroChat was found to be extremely low, we decided to merge it into the Other tag.

B Prompts Used for Strategy Tag Annotation

Figures 2 and 3 show the prompt used for counselor strategy tag annotation. The original Japanese prompt in Figure 2 was used for the actual LLM annotation, because all KokoroChat dialogues are in Japanese. Figure 3 provides an English translation to make the tag definitions, disambiguation rules, and output format accessible to readers.

C Prompts Used for Distress Level Annotation

Figures 4 and 5 show the prompt used for distress-level annotation. As with the strategy tag annotation, the original Japanese prompt in Figure 4 was used for the actual LLM annotation. The English translation in Figure 5 is provided to clarify the four-level distress scale, the block-level annotation procedure, and the required JSON output format.

D Tag-Level Error Analysis of Automatic Strategy Annotations

Because the counselor strategy annotations used in this study were automatically produced by Gemini 2.5 Flash, we conducted an additional tag-level error analysis to examine whether annotation errors were randomly distributed or systematically concentrated in particular strategy categories. We compared the LLM annotations with two independent human annotators on the same validation subset used in Section 2.4, consisting of 318 counselor utterances from five sessions. The two human annotators are referred to as Annotator 1 and Annotator 2.

Overall agreement was substantial. Cohen’s κ was 0.710 between the LLM and Annotator 1, 0.687 between the LLM and Annotator 2, and 0.674 between the two human annotators. Thus, the agreement between the LLM and each human annotator was comparable to, or slightly higher than, the agreement between human annotators.

To examine systematic error patterns, we calculated tag-level precision, recall, and F1 scores by treating the LLM annotation as the prediction and each human annotation as the reference. The scores in Table 4 are averaged across the two human references. The results indicate that annotation errors were not uniformly distributed across tags. The lowest F1 score was observed for Other, suggesting that residual or miscellaneous utterances were the most difficult to classify consistently. Moderate performance was observed for ClosedQuestion, Suggest, Paraphrase, Greeting, Backchannel, OpenQuestion, and Thanking. In contrast, Inform, Reflection, and Affirmation showed relatively high F1 scores.

The most frequent confusions were concentrated in semantically adjacent categories. For example, OpenQuestion and ClosedQuestion were sometimes confused, and similar ambiguity was also observed between the two human annotators. This suggests that part of the error reflects the intrinsic ambiguity of distinguishing question subtypes rather than an LLM-specific failure. Another frequent confusion involved Paraphrase and Reflection, which are also conceptually close because both involve responding to the client’s preceding content.

The error pattern for Affirmation is particularly important for the main findings of this study. The LLM achieved perfect recall for Affirmation with

Tag	Support	Precision	Recall	F1
Other	29	0.560	0.486	0.520
ClosedQuestion	46	0.714	0.650	0.666
Suggest	14	0.579	0.790	0.667
Paraphrase	36	0.750	0.675	0.710
Greeting	8	0.650	0.817	0.721
Backchannel	14	0.658	0.870	0.744
OpenQuestion	64	0.816	0.758	0.771
Thanking	14	0.786	0.789	0.771
Affirmation	10	0.679	1.000	0.804
Inform	27	0.827	0.796	0.811
Reflection	56	0.792	0.862	0.823

Table 4: Tag-level precision, recall, and F1 scores of LLM strategy annotations, averaged over Annotator 1 and Annotator 2 as references. Support denotes the average number of utterances assigned to each tag by the two human annotators.

respect to both human annotators: all utterances labeled as Affirmation by Annotator 1 or Annotator 2 were also labeled as Affirmation by the LLM. However, the precision for Affirmation was lower than its recall. The false positives mainly consisted of utterances labeled by humans as Reflection, Paraphrase, or Thanking. Thus, the LLM did not show evidence of systematically under-detecting Affirmation, but it did show a tendency to classify some neighboring supportive responses as Affirmation.

This pattern should be considered when interpreting the downstream analyses. The main association involving Affirmation is unlikely to be explained by a failure to detect true Affirmation utterances, because recall was high. At the same time, the moderate precision indicates that the estimated Affirmation usage rate may include a small number of neighboring supportive strategies. Therefore, our conclusions should be interpreted as applying to automatically identified Affirmation-like behavior, rather than to a perfectly separated manual category. This limitation does not eliminate the main finding, but it reinforces our cautious interpretation of Affirmation as a behavioral marker associated with session quality rather than as an isolated causal mechanism.

E Relationship Between Client-Rated Scores and Distress Change

To clarify the relationship between the two quality indicators used in Section 3, we conducted an additional analysis between client-rated review scores and Δ distress. The client-rated score was significantly negatively correlated with Δ distress ($\rho = -0.269, p < .001, n = 6,589$). Since lower

Δ distress indicates greater distress reduction, this result suggests that higher-rated sessions tended to involve greater reductions in client distress.

Mean Δ distress also showed a monotonic pattern across the score-based tiers. High-tier sessions showed the largest reduction ($M = -0.204, SD = 0.552, n = 2,168$), mid-tier sessions showed a smaller reduction ($M = -0.053, SD = 0.545, n = 2,199$), and low-tier sessions showed an increase in distress ($M = 0.142, SD = 0.572, n = 2,222$).

These results indicate that the two indicators are aligned in the expected direction. At the same time, the modest correlation suggests that they are not interchangeable. Client-rated scores likely reflect broader subjective aspects of session quality, such as rapport, perceived support, and overall satisfaction, whereas Δ distress captures short-term emotional change within the session. We therefore treat the two indicators as complementary measures of dialogue quality.

F Exact Tag Usage Rates by Client-Rated Score Tier

To supplement Figure 1, Table 5 reports the exact usage rates and utterance counts of each counselor strategy tag by client-rated score tier. Usage rates were calculated over all counselor utterances within each tier. The final column reports the difference between the high- and low-tier usage rates, providing an estimate of the practical magnitude of the tier differences.

G Temporal Robustness Checks for Affirmation

Because our study is observational, the associations reported in Section 3 cannot establish a causal effect of Affirmation. In particular, a possible reverse-causality explanation is that counselors may have used more Affirmation only after clients had already improved. To examine this possibility, we conducted additional temporal analyses.

Table 6 summarizes the main temporal robustness checks. First, we examined whether Affirmation used in the early part of the session was already associated with session outcomes. Early-session Affirmation was significantly associated with both distress reduction and overall client-rated scores. Specifically, early-session Affirmation was negatively correlated with Δ distress ($\rho = -0.101, p < .001$) and positively correlated with

Tag	High (%)	Mid (%)	Low (%)	Δ (H–L)
Reflection*	20.4 (n=23,257)	20.0 (n=20,207)	18.4 (n=16,775)	+2.0
OpenQuestion*	19.1 (n=21,825)	21.1 (n=21,342)	23.3 (n=21,319)	-4.2
ClosedQuestion*	10.2 (n=11,663)	12.0 (n=12,064)	14.1 (n=12,833)	-3.8
Affirmation*	9.9 (n=11,366)	8.1 (n=8,209)	6.5 (n=5,929)	+3.5
Other*	7.7 (n=8,774)	7.8 (n=7,914)	8.5 (n=7,797)	-0.9
Suggest*	7.6 (n=8,695)	7.2 (n=7,256)	6.3 (n=5,736)	+1.3
Backchannel*	7.5 (n=8,607)	6.6 (n=6,621)	5.7 (n=5,170)	+1.9
Paraphrase*	6.4 (n=7,343)	6.4 (n=6,485)	6.0 (n=5,440)	+0.5
Thanking	4.5 (n=5,084)	4.4 (n=4,407)	4.4 (n=4,052)	+0.0
Inform	3.9 (n=4,428)	3.5 (n=3,490)	3.9 (n=3,576)	0.0
Greeting	2.8 (n=3,202)	2.9 (n=2,931)	3.0 (n=2,698)	-0.2

Table 5: Exact counselor strategy tag usage rates by client-rated score tier. Percentages are calculated over all counselor utterances within each tier; counts in parentheses indicate the number of utterances assigned to each tag. The total numbers of counselor utterances were 114,244 for the high tier, 100,926 for the mid tier, and 91,325 for the low tier. Δ (H–L) denotes the high-tier usage rate minus the low-tier usage rate. * indicates a significant high-vs.-low difference after Bonferroni correction in chi-square tests ($p < .01$).

client-rated scores ($\rho = 0.126$, $p < .001$). Since lower Δ distress indicates greater distress reduction, these results suggest that the association between Affirmation and session quality was already present before the late phase of the session. Although late-session Affirmation showed stronger associations, the early-session results indicate that the finding is not simply a byproduct of counselors increasing Affirmation only after client improvement.

Second, we examined the reverse-direction relationship between early distress and later Affirmation usage. Early distress did not significantly predict later Affirmation usage in a simple correlation analysis ($\rho = 0.008$, $p = .499$). We do not interpret this result as evidence that early distress has no effect on later counselor behavior. However, it provides no clear support for the explanation that lower early distress leads to greater later use of Affirmation.

We further conducted turn-level analyses predicting whether the next counselor turn was Affirmation. In a mixed-effects logistic regression model with a counselor-level random intercept, current client distress positively predicted subsequent Affirmation use after controlling for session phase and session length (OR = 1.068, 95% CI [1.050, 1.086], $p < .001$). A generalized estimating equation analysis clustered by session yielded the same conclusion (OR = 1.105, $p < .001$). Thus, higher, rather than lower, current distress was followed by a greater likelihood of Affirmation, which is inconsistent with a simple reverse-causality explanation in which counselors use Affirmation mainly after clients have already im-

proved.

Third, we decomposed Affirmation usage by session phase. In the three-phase mixed-effects model, middle- and late-phase Affirmation were significantly associated with Δ distress, with the strongest association in the late phase. For client-rated scores, Affirmation was significantly associated with quality across early, middle, and late phases. These results suggest that the association between Affirmation and session quality is temporally heterogeneous rather than merely a session-level frequency artifact.

These analyses do not establish a causal effect of Affirmation and do not rule out all possible confounding. Nevertheless, they reduce the plausibility of the simple explanation that Affirmation is used mainly after clients have already improved. We therefore interpret Affirmation as a temporally robust behavioral marker associated with session quality, rather than as a causal determinant of client improvement.

H Counselor-Level Random Effects and Mundlak Decomposition

A possible concern is that the observed association between Affirmation and session quality may reflect stable differences among counselors rather than session-level effects of Affirmation. For example, counselors who generally use more Affirmation may also possess other unobserved competencies, such as stronger rapport-building skills or better timing. To address this concern, we conducted additional mixed-effects analyses with counselor identity modeled as a random intercept.

We first estimated null models to quantify the

Predictor	Outcome / Model	Effect	<i>p</i>
Early-session Affirmation	Δ distress	$\rho = -0.101$	$< .001$
Early-session Affirmation	Client-rated score	$\rho = 0.126$	$< .001$
Early distress	Later Affirmation usage	$\rho = 0.008$	.499
Current distress	Next-turn Affirmation (mixed logit)	OR = 1.068	$< .001$
Current distress	Next-turn Affirmation (GEE)	OR = 1.105	$< .001$

Table 6: Temporal robustness checks for the relationship between Affirmation, client distress, and session quality. Lower Δ distress indicates greater distress reduction. The 95% CI for the mixed-effects logistic model was [1.050, 1.086]. GEE was clustered by session.

Analysis	Outcome	Estimate	SE	95% CI	<i>p</i>
Null mixed-effects model	Δ distress	ICC = 0.028	–	–	–
Null mixed-effects model	Client-rated score	ICC = 0.110	–	–	–
Random-intercept model	Δ distress	–1.213	–	–	$< .001$
Random-intercept model	Client-rated score	85.517	–	–	$< .001$
Mundlak within-counselor component	Δ distress	–1.277	–	–	$< .001$
Mundlak within-counselor component	Client-rated score	88.035	–	–	$< .001$
Mundlak between-counselor component	Δ distress	–0.773	0.300	[–1.360, –0.186]	.010
Mundlak between-counselor component	Client-rated score	+51.828	13.891	[24.601, 79.055]	$< .001$

Table 7: Additional analyses accounting for counselor-level clustering. Coefficients for Affirmation usage are based on rates ranging from 0 to 1 and therefore represent the expected outcome change associated with a full-unit increase in the Affirmation usage rate. Lower Δ distress indicates greater distress reduction.

extent of counselor-level clustering. The intra-class correlation coefficients (ICCs) were 0.028 for Δ distress and 0.110 for client-rated score. These values indicate that counselor-level heterogeneity was small for distress change but non-negligible for subjective client ratings.

We then fitted mixed-effects models predicting each outcome from Affirmation usage while including counselor-level random intercepts. For Δ distress, the model additionally controlled for initial distress, defined as the mean distress level in the first half of the session. The association between Affirmation and Δ distress remained significant after accounting for counselor-level clustering (coefficient = -1.213 , $p < .001$). The association between Affirmation and client-rated score also remained significant (coefficient = 85.517 , $p < .001$). These results indicate that the main finding was not eliminated by modeling stable differences among counselors.

To further distinguish within-counselor and between-counselor variation, we conducted a Mundlak decomposition of Affirmation usage. Specifically, Affirmation usage was decomposed into a within-counselor component, representing deviations from each counselor’s own mean Affirmation usage, and a between-counselor component, representing each counselor’s mean Affirmation usage across sessions. The within-counselor component remained significant for both Δ distress (coefficient = -1.277 , $p < .001$)

and client-rated score (coefficient = 88.035 , $p < .001$). This indicates that, even for the same counselor, sessions with higher Affirmation usage tended to show better outcomes.

The between-counselor coefficient was -0.773 for Δ distress (SE = 0.300 , 95% CI [–1.360, –0.186], $p = .010$) and $+51.828$ for client-rated score (SE = 13.891 , 95% CI [24.601, 79.055], $p < .001$). Thus, counselors with higher mean Affirmation rates tended to show greater distress reduction and higher average client ratings. Because usage rates range from 0 to 1, these coefficients correspond to a full-unit increase in a counselor’s mean Affirmation rate.

Table 7 summarizes the results of these additional analyses. Overall, the association involving Affirmation is unlikely to be solely attributable to fixed differences among counselors. However, the between-counselor associations remain observational and may also reflect other stable counselor-level competencies. More generally, these analyses remain correlational and do not establish a causal effect of Affirmation.

I Mapping Between KokoroChat and ESConv Tags

Table 8 summarizes the mapping used in the cross-dataset transfer experiment. The mapped KokoroChat tags were designed to follow the corresponding ESConv definitions, except for Question. ESConv defines Question as a single cate-

KokoroChat tag	ESConv tag	Note
Affirmation	Affirmation and Reassurance	Same definition; shortened label
Reflection	Reflection of feelings	Same definition; shortened label
OpenQuestion + ClosedQuestion	Question	Merged for transfer
Suggest	Providing Suggestions	Same definition; shortened label
Other	Others	Residual category

Table 8: Mapping between KokoroChat strategy tags and ESConv strategy tags used in the cross-dataset transfer experiment.

gory, whereas KokoroChat separates it into Open-Question and ClosedQuestion following Anno-MI. Therefore, these two KokoroChat tags were merged when transferring the model to ESConv. Other labels differ mainly in naming convention: for example, KokoroChat uses Affirmation as a shortened label for ESConv’s Affirmation and Reassurance, and Suggest for ESConv’s Providing Suggestions. The full definitions used for KokoroChat annotation are provided in the annotation prompt in Appendix B.

Prompt for Counselor Strategy Annotation (Original)

タスク説明

カウンセリング対話のカウンセラー (counselor) の発話に対し、対話行為タグをアノテーションせよ。クライアント (client) の発話はアノテーションの対象外である。

1つの発話に対して話者の意図を表す最も適切な対話行為タグを以下の一覧から1つ選び、付与せよ。タグ付与の際には発話単体ではなく、それまでの文脈を考慮して付与せよ。

1つの発話に複数の意図が含まれる場合は、その発話が対話全体の中で果たす最も重要な役割を考慮してタグを選択すること。(例：挨拶と質問が含まれる場合、対話を開始し情報を引き出すという質問の意図がより重要であれば OpenQuestion を選択する)

1つの発話が分割して投稿されていると考えられる場合は、分割された発話を1つの発話としてとらえ、同じタグをそれぞれの発話に対して付与すること。

対話行為タグの一覧

- OpenQuestion: 幅広い回答が可能な質問。「あなたはどのように思いますか?」「最近どんなことがありましたか?」「何か変化はありましたか?」「これまで試してみたことはありますか?」
- ClosedQuestion: はい・いいえで答えられる質問、または答えの範囲が限定された質問。数・量・時間を尋ねる質問。「いつもそうしていますか?」「それは最近のことですか?」「どれくらい経ちますか?」
- Paraphrase: クライアントの話の内容や事実を自身の言葉で要約し、理解の確認や話の整理を行うための発言。感情ではなく出来事・状況・事実の言い換え。「つまり、～ということですね」
- Reflection: クライアントの言葉の背後にある感情や内面的な意味を捉え、共感的・肯定的に伝え返すことで、クライアントの感情を明確にし自己探求を促すための発言。「～というのが辛かったんですね」「～するのも当然だと思います」
- Affirmation: クライアントの強み、動機、能力を具体的に肯定し、安心感と励ましを与える発言。感情に共感・肯定するだけでなく、その人の価値や行動をポジティブに評価している発言。第三者に対するものは対象外。「それだけ頑張っているのは素晴らしいですね」
- Suggest: 行動や考え方、新たな視点、解決策を提案する発言。情報を提供するだけでなく行動を促す意図がある発言。「～をやってみるのはどうでしょうか?」
- Inform: データ、事実、意見、リソース、または質問への回答などを通じて、クライアントに役立つ情報を提供する発言。行動の促しを含まない。「一般的に～と言われています」
- Backchannel: 話を聞いていることをクライアントに伝えるための短い反応。実質的な内容要約や感情反映を含まない。「はい」「そうですか」「わかります」
- Greeting: 挨拶を意図した発言。「こんにちは」「よろしくおねがいします」
- Thanking: 感謝を伝える発言。「ありがとうございます」
- Other: セッションの進行管理や謝罪など、上記の全てに該当しない発言。「少々お待ちください」「失礼しました」

混同しやすいタグの判別ガイド

- ClosedQuestion vs OpenQuestion: はい/いいえで答えられる形式でも「何か変化はありましたか?」「何か試みたことはありますか?」のようにクライアントに詳細な状況説明を引き出すことが主目的であれば OpenQuestion。また、特定の事実の有無を確認するなら ClosedQuestion。クライアントに広く語らせることが目的なら OpenQuestion。
- Reflection vs Affirmation: 感情をそのまま映し返すなら Reflection、その人の価値・強み・能力・努力を肯定的に評価するなら Affirmation。感情への共感・肯定だけでは Affirmation にならない。
- Paraphrase vs Reflection: 内容・出来事・事実を言い換えているなら Paraphrase、感情・気持ちを言葉にしているなら Reflection。
- Paraphrase vs Backchannel: 実質的な理解・要約の内容が含まれるなら Paraphrase。「はい」「そうですね」程度の短い反応は Backchannel。
- Inform vs Suggest: 「～です/～と言われています」のように情報を述べるだけなら Inform、「～してみてください/～はいかがでしょう」のように行動を促すなら Suggest。

入力形式

入力は JSON 形式で与えられる。role が counselor の発話が対象であり、role が client の発話にはアノテーションは不要。

出力形式

出力は JSON 形式とすること。入力された JSON の role, time, utterance はそのまま出力し、role が counselor のすべての発話に対し、think, tag を追加せよ。

think にはどのタグがふさわしいかを検討した思考過程を記述すること。その際、候補となったタグを複数挙げ、なぜ最終的にそのタグを選んだのか、他の候補がなぜ最適ではなかったのかを簡潔に説明せよ。

tag には思考過程を踏まえ、話者の意図を表すための最もふさわしい対話行為タグを1つ記述せよ。出力はマークダウンのコードブロックに囲まれた JSON 形式のみとせよ。余計な説明文は不要。

Figure 2: Prompt for counselor strategy tag annotation

Prompt for Counselor Strategy Annotation (Translated)

Task Description

Annotate strategy tags for the counselor's utterances in the counseling dialogue. The client's utterances are not subject to annotation.

Select and assign the single most appropriate tag from the list below that represents the speaker's intent for each utterance. When assigning a tag, consider the preceding context rather than the utterance in isolation.

If an utterance contains multiple intents, select the tag by considering the most important role the utterance plays within the overall dialogue. (e.g., If an utterance includes both a greeting and a question, select OpenQuestion if the intent of the question to initiate the dialogue and elicit information is more important.)

If an utterance appears to have been posted in multiple parts, treat the divided utterances as a single utterance and assign the same tag to each part.

List of Strategy Tags

- OpenQuestion: A question that allows for a broad range of answers. Examples: "What do you think?", "What has happened recently?", "Have there been any changes?", "Have you tried anything so far?"
- ClosedQuestion: A question that can be answered with yes or no, or a question whose possible answers are limited. This includes questions asking about numbers, quantities, or time. Examples: "Do you always do that?", "Did that happen recently?", "How long has it been?"
- Paraphrase: An utterance that summarizes the content or facts of the client's story in the counselor's own words in order to confirm understanding or organize the conversation. This refers to rephrasing events, situations, or facts rather than emotions. Example: "So, what you mean is that ..."
- Reflection: An utterance that captures the emotions or inner meanings behind the client's words and reflects them back in an empathic and affirming manner, in order to clarify the client's feelings and encourage self-exploration. Examples: "That must have been painful for you.", "It makes sense that you would feel that way."
- Affirmation: An utterance that specifically affirms the client's strengths, motivations, or abilities, providing a sense of security and encouragement. This goes beyond empathizing with or validating emotions; it positively evaluates the person's value or actions. Utterances directed toward third parties are excluded. Example: "It is wonderful that you have been able to keep trying that hard."
- Suggest: An utterance that proposes an action, way of thinking, new perspective, or solution. This tag applies when the utterance is intended not only to provide information but also to encourage action. Example: "How about trying ...?"
- Inform: An utterance that provides useful information to the client through data, facts, opinions, resources, or answers to questions. It does not include an encouragement to act. Example: "In general, it is said that ..."
- Backchannel: A short response used to show the client that the counselor is listening. It does not include substantive summarization or reflection of feelings. Examples: "Yes.", "I see.", "I understand."
- Greeting: An utterance intended as a greeting. Examples: "Hello.", "Nice to meet you."
- Thanking: An utterance expressing gratitude. Example: "Thank you."
- Other: An utterance that does not fall into any of the above categories, such as session management or apology. Examples: "Please wait a moment.", "I apologize."

Guidelines for Distinguishing Easily Confused Tags

- ClosedQuestion vs. OpenQuestion: Even if a question can formally be answered with yes or no, classify it as OpenQuestion if its main purpose is to elicit a detailed explanation from the client, as in "Have there been any changes?" or "Have you tried anything?" If the question checks the presence or absence of a specific fact, classify it as ClosedQuestion. If the purpose is to let the client speak broadly, classify it as OpenQuestion.
- Reflection vs. Affirmation: If the utterance reflects the client's emotions, classify it as Reflection. If it positively evaluates the client's value, strengths, abilities, or efforts, classify it as Affirmation. Empathizing with or validating emotions alone is not sufficient for Affirmation.
- Paraphrase vs. Reflection: If the utterance rephrases content, events, or facts, classify it as Paraphrase. If it verbalizes emotions or feelings, classify it as Reflection.
- Paraphrase vs. Backchannel: If the utterance contains substantive understanding or summarization, classify it as Paraphrase. Short responses such as "Yes" or "I see" are Backchannel.
- Inform vs. Suggest: If the utterance only states information, as in "It is ..." or "It is generally said that ...", classify it as Inform. If it encourages action, as in "Please try ..." or "How about ...?", classify it as Suggest.

Input Format

The input is provided in JSON format. Utterances where the role is "counselor" are the targets for annotation; utterances where the role is "client" do not require annotation.

Output Format

The output must be in JSON format. Output the "role", "time", and "utterance" from the input JSON exactly as they are, and add "think" and "tag" to all utterances where the role is "counselor".

In "think", describe the thought process of considering which tag is appropriate. List multiple candidate tags and briefly explain why the final tag was chosen and why the other candidates were not optimal.

In "tag", based on the thought process, write the single most appropriate tag that represents the speaker's intent.

The output must be strictly in JSON format enclosed in a Markdown code block. No additional explanatory text is required.

Figure 3: English translation of the prompt for counselor strategy tag annotation

Prompt for Distress Level Annotation (Original)

タスク説明

カウンセリング対話のクライアント (client) の発話ブロックに対し、苦痛レベル (distress_level) をアノテーションせよ。カウンセラー (counselor) の発話はアノテーションの対象外である。

「発話ブロック」とは、クライアントが連続して投稿した1つ以上の発話のまとまりを指す。クライアントの発話が連続している場合は、それらをまとめて1つのブロックとして解釈し、ブロック全体の内容・文脈に基づいてアノテーションを行うこと。

アノテーションにあたっては発話単体ではなく、それまでの会話の文脈全体を考慮すること。

苦痛レベル (distress_level) : 0~3 の整数

- 0 (苦痛なし) : 感情的苦痛がほとんど感じられない。中立的・事務的な発話。

例: 「よろしくお願いします」「最近の仕事が忙しいです」

- 1 (軽度) : 軽い不安・悩み・不満が感じられるが、日常的な範囲。

例: 「少し不安で…」 「うまくいかないことが多くて」

- 2 (中程度) : 明確な感情的苦痛が表れている。日常生活への影響がある。

例: 「毎日つらくて眠れません」「会社に行くのが怖いです」

- 3 (重度) : 強烈な苦痛、危機的状態、自傷・希死念慮など。

例: 「もう消えてしまいたい」「限界です」

入力形式

入力は JSON 形式で与えられる。role が client の発話ブロックがアノテーション対象。role が counselor の発話はそのまま出力すること。

出力形式

出力は JSON 形式とすること。入力された JSON の role, time, utterance はそのまま出力すること。

role が client のすべての発話に対して、以下の4フィールドをこの順で追加せよ:

- think: 苦痛レベルの判断根拠。その client 発話が属するブロック全体と文脈を踏まえ、候補レベルを挙げながら最終判断の理由を簡潔に述べよ。

- distress_level: 苦痛レベルの判断値 (0~3 の整数)

同一ブロック内 (連続する client 発話) はすべて同じ判断値を付与すること。

ブロック内で最初の発話に基づいてブロック全体を評価し、そのブロック内のすべての client 発話に同一の distress_level を付与すること。

出力はマークダウンのコードブロックに囲まれた JSON 形式のみとせよ。余計な説明文は不要。

Figure 4: Prompt for distress level annotation

Prompt for Distress Level Annotation (Translated)

Task Description

Annotate the distress level (`distress_level`) for the client's utterance blocks in the counseling dialogue. The counselor's utterances are not subject to annotation.

An "utterance block" refers to a sequence of one or more consecutive utterances posted by the client. If the client's utterances are consecutive, interpret them together as a single block and perform the annotation based on the content and context of the entire block.

When annotating, consider the entire preceding conversational context rather than the utterance in isolation.

Distress Level (`distress_level`): Integer from 0 to 3

- 0 (No distress): Almost no emotional distress is felt. Neutral or administrative utterances.

Example: "Nice to meet you," "I've been busy with work lately."

- 1 (Mild): Mild anxiety, worry, or dissatisfaction is felt, but within a normal daily range.

Example: "I'm a little anxious...", "Things often don't go well."

- 2 (Moderate): Clear emotional distress is expressed. There is an impact on daily life.

Example: "It's so hard every day that I can't sleep," "I'm scared to go to work."

- 3 (Severe): Intense distress, crisis state, self-harm, or suicidal ideation.

Example: "I just want to disappear," "I'm at my limit."

Input Format

The input is provided in JSON format. Utterance blocks where the role is "client" are the targets for annotation. Output utterances where the role is "counselor" exactly as they are.

Output Format

The output must be in JSON format. Output the "role", "time", and "utterance" from the input JSON exactly as they are.

For all utterances where the role is "client", add the following two fields in this order:

think: The rationale for determining the distress level. Based on the entire block to which the client's utterance belongs and the context, list candidate levels and briefly state the reason for the final decision.

`distress_level`: The determined distress level value (an integer from 0 to 3).

Assign the exact same determined value to all utterances within the same block (consecutive client utterances).

Evaluate the entire block based on the first utterance in the block, and assign the identical `distress_level` to all client utterances within that block.

The output must be strictly in JSON format enclosed in a Markdown code block. No additional explanatory text is required.

Figure 5: English translation of the prompt for distress level annotation