



BELXTR: Biomedical Entity Linking via Contextualized Token Retrieval

Samuele Garda^{1,*} and Ulf Leser¹

¹Computer Science, Humboldt-Universität zu Berlin, Rudower Chaussee 25, 12489, Berlin, Germany

*Corresponding author. gardasam@informatik.hu-berlin.de

Abstract

Motivation: Biomedical Entity Linking disambiguates mentions to entities in a knowledge base (KB), making it the cornerstone of information extraction pipelines. While embedding-based models are a popular approach for the task, they suffer from a key limitation. They compress mentions (and entities) into a single vector, forcing the model to average away crucial fine-grained differences.

Results: We present BELXTR, a novel embedding model based on the multi-vector (a.k.a. late interaction) architecture, which allows to leverage token-level matching information. BELXTR extends the original XTR model to biomedical entity linking by integrating an existing task-specific training objective and exploring active query expansion. Experiments across ten corpora and five KBs show that BELXTR improves upon current state-of-the-art in half of the corpora with an average improvement of 5pp recall@1. The largest gains are reported on the challenging cross-species gene disambiguation subtask, where BELXTR outperforms an LLM-powered retrieve-and-rerank pipeline and closely approaches a specialized rule-based system. Our results highlight multi-vector models as a practical alternative to hard-to-maintain rule-based systems or in scenarios where LLM-based reranking is too costly as in PubMed-scale mining.

Availability and implementation: The code to reproduce our experiments can be found at: <https://github.com/sg-wbi/belxtr>.

1. Introduction

Biomedical Entity Linking¹ (BEL) is the task of disambiguating mentions of biomedical concepts to unique entries in knowledge base² (KB). As a key component in the conversion from text to structured representation, BEL supports multiple downstream applications such as information retrieval [Nentidis et al., 2026] and knowledge graph construction [Schäfer et al., 2024].

Embedding-based models are one of the most popular approaches for the task [Liu et al., 2021, Sung et al., 2020, Mujeen et al., 2022]. However, they suffer from a fundamental representational bottleneck. As they compress mentions (and entity names) into a single vector, they are forced to average away fine-grained surface-form variations, which are crucial for correct disambiguation.

Multi-vector (a.k.a late-interaction³) models are a promising approach to overcome this limitation. They generate individual subword embeddings for every token in the mention and entity, and use the pooled Cartesian product of their similarities

to produce the final similarity score. However, multi-vector models have not been thoroughly investigated for entity linking, particularly in specialized fields like biomedicine, as existing work remains almost exclusively confined to applying a vanilla ColBERT [Khattab and Zaharia, 2020b] model to general-domain datasets [Zhang and Stratos, 2021, Song et al., 2024].

Here we introduce BELXTR, a multi-vector model specifically developed for biomedical entity linking. BELXTR extends the original XTR model [Lee et al., 2023] (an improved version of the ColBERT model [Khattab and Zaharia, 2020b]) by (i) using an existing BEL-specific training objective and (ii) optimizing temperature scaling for contrastive learning (as proposed by [Radford et al., 2021]). We explore as well the explicit training of [MASK] embeddings to perform query⁴ expansion via an auxiliary objective function (see Section 2.1.4 for details).

We evaluate BELXTR on the standardized BELB benchmark [Garda et al., 2023], comparing it against six state-of-the-art neural models. BELXTR outperforms all baselines on five of the ten evaluated corpora and achieves the second-best performance on four, yielding an average improvement of 5 percentage points in recall@1 over the best performing models. Results on the GENE corpora drive this performance increase the most. We argue that BELXTR's edge stems from its ability to model fine-grained, contextualized token similarities. For instance, as

¹ Also known as Named Entity Normalization or Entity Disambiguation. We will use “linking”, “normalization”, and “disambiguation” interchangeably throughout the text.

² We will use the term to refer to any type of normalization target, including ontologies and controlled vocabularies.

³ We use the terms “late-interaction” and “multi-vector” interchangeably throughout the text.

⁴ A contextualized mention.

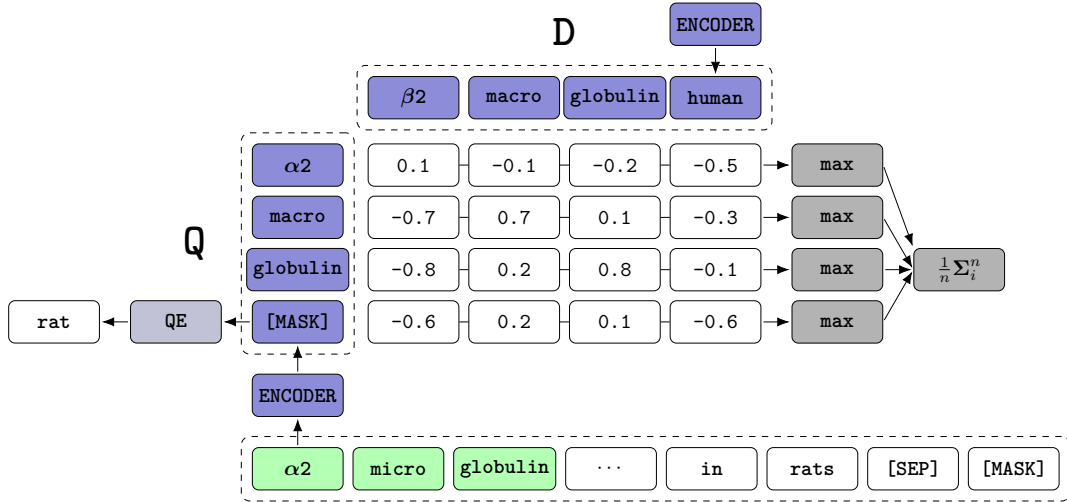


Figure 1 Illustration of BELXTR: a multi-vector model for biomedical entity linking. Green background indicates mention boundaries marked by special tokens (omitted for clarity). Q: mentions with context. D: entity name. QE: Query Expansion (see Section 2.1.4).

shown in Figure 1, the model can learn to directly capture subtle differences such as “ α 2-” vs. “ β 2-microglobulin” (see Section 4.4 for further discussion).

Notably, on the challenging cross-species gene disambiguation task, BELXTR as a standalone retriever achieves a higher recall@1 than a LLM-powered retrieve-and-rerank pipeline (see Section 4.2 for discussion). We compare BELXTR as well against the state-of-the-art, traditional type-specific systems integrated in PubTator3 [Wei et al., 2024]. While maintaining competitive results across five entity types, on gene disambiguation our model achieves an F1 score of 83.86, outperforming the previous best neural model (80.50) and closely approaching PubTator3’s highly specialized GENE model (84.63).

Overall, in line with findings in information retrieval studies [Thakur et al., 2021, Warner et al., 2024], our results show that multi-vector models yield superior retrieval capabilities, advancing the state-of-the-art on the BEL task. This makes them a practical alternative to hard-to-maintain rule-based systems or in scenarios where LLM-based reranking is too costly (e.g., PubMed-scale mining).

2. Materials and methods

We now introduce (i) BELXTR, our novel method for biomedical entity linking (Section 2.1) based on the XTR model first introduced by Lee et al. [2023] and (ii) the evaluation protocols adopted in our experiments (Section 2.2).

2.1. Model

2.1.1. Background

Before introducing our enhancements (see Section 3.1 for the ablation study), we first revisit the late-interaction model on which our method is based, namely XTR [Lee et al., 2023].

Given a mention (with its context) and a candidate entity,⁵ XTR maps them to token embedding matrices $Q \in \mathbb{R}^{m \times h}$ and $D \in \mathbb{R}^{n \times h}$, respectively. Here n , m , and h denote the number of mention tokens, the number of entity tokens, and the embedding dimension, respectively.

As shown in Figure 1, while the encoder uses the mention’s context (determined by the maximum number of tokens that the backbone model can process) to produce contextualized embeddings, only the mention tokens are retained in Q . Afterwards, XTR computes a token-level similarity matrix $P \in \mathbb{R}^{m \times n}$, which is defined by the pairwise similarities between each mention token and each entity token: $P_{ij} = Q_i^\top D_j$.

To determine which of these token-level scores contribute to the final mention-entity similarity, XTR uses a binary alignment matrix $A \in \{0, 1\}^{n \times m}$. This matrix, has two formulations depending on whether the score is being computed at test time (A) or during training ($\hat{A}$). At test time XTR uses $A_{ij} = \mathbb{1}_{[j = \arg\max_{j'} P_{ij}]}$. This is the “sum-of-max” operator as originally introduced in ColBERT, which yields the following scoring function:

$$f(Q, D) = \frac{1}{n} \sum_{i=1}^n \sum_{j=1}^m A_{ij} P_{ij} = \frac{1}{n} \sum_{i=1}^n \max_{1 \leq j \leq m} Q_i^\top D_j \quad (1)$$

Intuitively, the final alignment score is determined by each query token’s best match. XTR departs from ColBERT in how it defines the alignment matrix during training. That is, when optimizing model parameters XTR uses instead $\hat{A}_{ij} = \mathbb{1}_{[j \in \text{top-k}(P_{ij'})]}$, where top-k operator spans all tokens within a mini-batch of size B (i.e., $1 \leq j' \leq mB$). The intuition behind this choice is that the top-k operator simulates the inference stage, where only the entities whose tokens are retrieved by the top-k operation are considered for the final ranking. This forces the model *during training* to consider only token similarities

⁵ While late-interaction models are traditionally utilized for information retrieval [Chaffin and Sourty, 2025], we describe them here in the context of entity linking.

high enough to be globally retrieved, leading to stronger training signal⁶ [Lee et al., 2023].

2.1.2. Name-based vs entity-based

A KB can be represented in two ways: (a) by entity or (b) by names. In the first case, a candidate entity e is represented by concatenating all of its known names. In the second case, each name is treated as a separate candidate.

We explore both representations. Given a set of candidates $\mathcal{C} = \{D^1, \dots, D^k\}$ (either entities or names), we define the probability of a candidate D^i being the correct link for a given mention Q (under the model parameters θ) as follows:

$$p(D^i | Q; \theta) = \frac{\exp(f(Q, D^i))}{\sum_{j=1}^{|\mathcal{C}|} \exp(f(Q, D^j))} \quad (2)$$

We train two separate models based on these representations. For a given mention Q , the entity-based model optimizes the standard cross-entropy loss [Bridle, 1990]. For the name-based model, we optimize instead the maximum marginal likelihood (MML) objective proposed by [Sung et al., 2020]. Formally, for a single mention Q the loss is defined as follows:

$$\mathcal{L}_{\text{MML}} = -\log \sum_{i=1}^{|\mathcal{C}|} \mathbb{1}_{[V_C(Q)=V_{\text{KB}}(D^i)]} p(D^i | Q) \quad (3)$$

where $\mathbb{1}_{[*]}$ is an indicator function, $V_C : Q \rightarrow e$ returns the gold KB entity associated with a mention Q , and similarly $V_{\text{KB}} : D \rightarrow e$ returns the entity associated the entity name D^i . Intuitively, this objective encourages the embeddings of Q and all $\mathcal{C} = \{D^1, \dots, D^k\}$ that are associated to the same entity to be close in the embedding space.

For the name-based model we preprocess the KB with the *homonym disambiguation* (HD) approach introduced by Garda and Leser [2024]. The preprocessing is necessary to handle homonyms (names shared by multiple concepts) which otherwise prevent unique linking predictions. For instance, HD expands the name “conorenal syndrome” into “conorenal syndrome (short rib-polydactyly syndrome)” and “conorenal syndrome (Mainzer-Saldino disease)” for MeSH:D012779 and MeSH:C535463, respectively. For GENE entities, we follow Shlyk and Hunter [2026] and include species information to every gene name (e.g., “A2M (alpha2-microglobulin, human)”).

2.1.3. Temperature scaling

Cosine similarity is the de facto standard similarity metric in late-interaction models (including XTR) [Chaffin and Sourty, 2025]. For models optimized via contrastive losses, scaling the cosine similarities has a significant impact on downstream performance⁷ [Chen et al., 2020]. However, neither ColBERT nor XTR explicitly mention taking this into account. Therefore, during training, we scale all scores obtained from Eq. 1 by a learnable temperature parameter τ as defined in Radford et al. [2021].

2.1.4. Query expansion

Mentions often lack the information required for disambiguation. For instance, a disease may have a dominant or recessive form, yet a specific mention might only use the general name. If present, this information can be found in the surrounding context. Therefore, a model should somehow identify and “encode” it in the mention’s token embeddings.

Importantly, this information is explicitly contained within the target entities. For instance, as shown in Figure 1, for every GENE entity we always include its associated species. As multi-vector models are based on token-level similarities, we hypothesize that expanding the mention tokens to account for this information will improve downstream performance.

When introducing ColBERT, Khattab and Zaharia [2020a] argued that a BERT-based model can leverage [MASK] tokens to perform query expansion⁸ (QE). However, they did not introduce an explicit training signal to encourage this behavior. In fact, Giacalone et al. [2024] found that [MASK] embeddings tend to cluster close to existing query tokens, thus performing term weighting rather than true expansion.

To address this limitation, BELXTR introduces an auxiliary objective that explicitly encourages [MASK] embeddings to represent information missing from the mention. Unlike ColBERT, and unlike XTR, which does not use [MASK] tokens, we supervise QE using the target entity D^+ . Specifically, for each mention, we use a trigram-based similarity model to select the gold entity name most similar to the mention. By filtering out tokens already present in the mention, we isolate a set of target expansion tokens: $\mathcal{Y} = \{d_1^+, \dots, d_n^+\}$. The number of expansion tokens determines the number of [MASK] tokens to be appended to each contextualized mention. At inference time, the gold entity is unavailable. We therefore estimate the required number of [MASK] tokens using the same filtering heuristic, but applied to the most similar entity name retrieved from the entire KB, rather than from the set of gold entity names.

QE is formulated as a multiple-instance learning problem [Dietterich et al., 1997]. Formally, for a single [MASK] embedding q_i the loss is defined as:

$$\mathcal{L}_{\text{QE}} = -\log \frac{\exp(\max_{d_j \in \mathcal{Y}} q_i^\top d_j)}{\sum_{d_k \in \mathcal{D}^+} \exp(q_i^\top d_k)} \quad (4)$$

The loss encourages each [MASK] embedding to assign its highest similarity within the positive entity to one missing expansion token, rather than to a token already present in the mention.⁹ Without an additional constraint, multiple [MASK] embeddings may collapse onto the same expansion token. We therefore introduce a dispersion objective [Wang et al., 2024] that encourages [MASK] embeddings to be dissimilar among each other: $\mathcal{L}_{\text{DIS}} = \frac{1}{|\mathcal{Y}|} \sum_{i < j} q_i^\top q_j$

The model is trained via multi-task learning [Caruana, 1997] with the final objective function for a single mention being

⁸ Since a BERT-based model learns to predict plausible missing tokens for each [MASK] during pre-training [Devlin et al., 2019], the intuition is that during retrieval training, the model will naturally learn to expand these tokens into terms missing from the query that aid candidate retrieval.

⁹ For instance, given the mention { “α2”, “micro”, “globulin”, “[MASK]” }, and the candidate { “α2”, “micro”, “globulin”, “rat” }, the objective requires the similarity between “[MASK]” and “rat” to be higher than the similarity between “[MASK]” and any other token.

⁶ See the original study for details.

⁷ Since their values are bounded within $[-1, 1]$, their gradients can easily vanish during softmax normalization [Wang and Liu, 2021].

$\mathcal{L} = \mathcal{L}_{\text{MML}} + \lambda(\mathcal{L}_{\text{QE}} + \mathcal{L}_{\text{DIS}})$, where λ is a hyperparameter (see Appendix D for details).

2.2. Evaluation protocol

We evaluate BELXTR across three experimental settings to provide a comprehensive assessment of its performance. First, we compare it against state-of-the-art neural methods (Section 2.2.1). Second, we assess its effectiveness as a candidate generator for LLM-based reranking (Section 2.2.2). Finally, we compare it with traditional (non-neural) type-specific systems (Section 2.2.3), which remain the established standard for production-level BEL [Islamaj et al., 2025, Wiegiers et al., 2025].

2.2.1. Neural retrievers

Task Our comparison with neural approaches adopts the in-KB formulation of BEL (no NIL label) [Röder et al., 2018] and evaluates models on human-annotated (gold) mentions. Performance is reported using micro-averaged recall@1 (accuracy).

Data We utilize the corpora and KBs provided by the BELB benchmark [Garda et al., 2023] (See Appendix A for an overview of corpora and Ks.) We evaluate on ten corpora linked to six different KBs¹⁰. For NCBI Gene, we use the subsets determined by the species of the genes in the GNormPlus and NLM-Gene corpora (see Appendix B). This reflects a common real-world use case where often only a specific subset of species is relevant for linking [Wei et al., 2012].

Methods We compare our model against the following state-of-the-art neural approaches: BioSyn [Sung et al., 2020], GenBioEL [Yuan et al., 2022], BELHD [Garda and Leser, 2024] ANGEL [Kim et al., 2025], arboEL [Agarwal et al., 2022], and KRISSBERT [Zhang et al., 2022]. We include in the comparison as well the GenBioEL variant with HD (GenBioEL+HD), as Garda and Leser [2024] show it produces significantly better results. With the exception of KRISSBERT and ANGEL, all models are trained from scratch on BELB (see Section 4.1).

For KRISSBERT, we report the results directly from the original study (without second-stage reranking). We do this because the authors only provide code and data for the “supervised” variant¹¹, which can solely link to entities present in the training data. For ANGEL, we obtain predictions exclusively for the BELB corpora for which the authors released trained model checkpoints. This restriction applies because training ANGEL models across all BELB corpora is computationally prohibitive, and the originally reported results rely on a lenient evaluation¹², which overestimates model performance [Zhang et al., 2022].

2.2.2. LLM-based reranking

Task For LLM-based candidate reranking we replicate the experimental setting proposed by Shlyk and Hunter [2026]. In this setting, the entity linking model is used as a candidate generator to retrieve the k highest-scoring entities for each

mention from the KB. The mention, its context, and the k candidates are passed to an LLM, which is tasked with selecting the correct entity among the candidates. Performance of the entire pipeline is reported using micro-averaged recall@1 (accuracy).

Data We use the corpora and KBs provided by BELB for the following entity types: GENE, SPECIES, DISEASE, and CHEMICAL. An important difference from the setting reported in Section 2.2.1 is that the results are obtained on the *refined* test sets of the corpora [Tutubalina et al., 2020]. These sets exclude duplicate test mentions or those that overlap with mentions in the training data, providing a significantly harder testbed. Secondly, mentions linked to multiple concepts in the KB (composite mentions) are excluded from the evaluation. This is the setup proposed by Shlyk and Hunter [2026], which we follow to allow direct comparison.

Methods We compare our model against BioSyn+GRF, the retriever proposed by Shlyk and Hunter [2026]. Given a mention and its context, BioSyn+GRF prompts OpenAI’s GPT-4o [OpenAI, 2024] to generate various types of mention-specific information, such as a context-aware definition or a list of synonyms (an approach known as Generative Relevance Feedback (GRF) [Mackie et al., 2023]). A fine-tuned BioSyn model [Sung et al., 2020] is then used to obtain embeddings of both the mention and the LLM-generated feedback, which are combined into a single representation to retrieve candidates from the KB.

For the reranking stage, we evaluate both our model and BioSyn+GRF using the strategy proposed by Shlyk and Hunter [2026]. Specifically, we employ GPT-4o as the reranker and use their system prompt¹³, which provides the model with a task-specific instruction, $k = 10$ candidates and the sentence containing the mention as context.

We report as well the performance of BeLink [Shlyk et al., 2026], a retrieve-and-rerank pipeline using SapBERT [Liu et al., 2021] as retriever, and a 8B Qwen3 model [Yang et al., 2025] instruction-tuned as reranker for the BEL task. The BeLink’s retriever uses as well an LLM to enrich the mentions before retrieval, but with a Qwen3-14B model. As the authors do not release the instruction-tuned model we cannot compare the effect of using BELXTR with this reranker.

2.2.3. Traditional type-specific methods

Task To compare against traditional type-specific methods, we replicate the experimental setting of PubTator3 [Wei et al., 2024], which evaluates models on the end-to-end document-level entity linking task. Specifically, for each document, a third-party NER model is used to identify entity mentions, which are subsequently resolved by a linking model. The set of unique entities is then treated as document-level classes. The performance of the complete pipeline is reported using micro-averaged precision, recall, and F1-score.

Data All results are obtained on the BioRED corpus [Luo et al., 2022a], which offers linking annotations for the same entity types as BELB. The inputs to the linking models are mentions identified by the AIONER model [Luo et al., 2023].

¹⁰ We exclude corpora of the VARIANT entity type due to the scalability limitations of current neural systems.

¹¹ See: <https://huggingface.co/microsoft/BiomedNLP-KRISSBERT-PubMed-UMLS-EL/tree/main/usage>.

¹² See: https://github.com/dmis-lab/ANGEL/blob/main/train_positive_only.py.

¹³ See: https://github.com/dash-ka/Biomedical-Entity-Linking-GRF/blob/master/select_candidate.py.

	CTD Diseases (DISEASE)	CTD Chemicals (CHEMICAL)	NCBI Gene (GENE)
	NCBI Disease	BC5CDR	NLM-Gene
BELXTR (name-based)	90.34	96.22	90.66
1) entity-based	85.42 $\downarrow$ 4.92	93.44 $\downarrow$ 2.78	69.44 $\downarrow$ 21.22
2) no temp. scaling	77.39 $\downarrow$ 12.95	86.76 $\downarrow$ 9.45	75.08 $\downarrow$ 15.57
3.1) add [MASK]	89.45 $\downarrow$ 0.89	95.21 $\downarrow$ 1.01	90.03 $\downarrow$ 0.63
3.2) add [MASK] + QE	89.96 $\downarrow$ 0.48	96.04 $\downarrow$ 0.17	91.24 $\uparrow$ 0.58

Table 1. Ablation study of modifications of XTR [Lee et al., 2023] introduced in BELXTR (see Section 2.1). Performance is mention-level recall@1 on the *development* set of the corpora. **Bold** indicates best score. $\uparrow/\downarrow$ indicates increase/decrease in performance w.r.t. the baseline. QE: active training of query expansion (see Section 2.1.4).

The target KBs are determined by the identified entity type (e.g., CTD Diseases for DISEASE). With the exception of the CHEMICAL entity type¹⁴, all evaluated methods use the same KBs as BELB, although not necessarily the exact same version (see Section 4.3).

Methods We compare against the traditional type-specific systems integrated into PubTator3. We train BELXTR models on the same corpora used to train the corresponding type-specific system in PubTator3 (see Appendix C for details on PubTator3’s models and corpora).

3. Results

We present the results of our empirical validations. First we report the ablation study used to determine the best BELXTR configuration (Section 3.1). We then report the results when comparing against: (i) state-of-the-art neural models (Section 3.2), (ii) LLM-powered methods (Section 3.3) and (iii) traditional type-specific systems (Section 3.4).

3.1. Ablation study

1) Entity- vs name-based In Table 1, we observe that a name-based KB yields superior performance for a multi-vector model. This can be explained by the mechanics of token-level alignments. The XTR variant of Eq. 1 requires the model to maximize the similarity of all mention tokens with *all* tokens of an entity¹⁵. If an entity contains multiple names with distinct surface forms, an entity-based representation may destabilize training, by forcing the model to maximize similarities across unrelated tokens.

2) Temperature scaling Additionally, we see that training without temperature scaling in the loss computation causes a drop of ~ 9 to ~ 15 percentage points in recall@1 across corpora. This confirms the importance of this optimization technique found in previous studies [Chen et al., 2020, Wang and Liu, 2021, Radford et al., 2021] as well for entity linking.

3) Query expansion As mentioned in Section 2.1, XTR does not make use of [MASK] tokens. Therefore, to evaluate our QE strategy we trained BELXTR with two different settings. One reflects the baseline (3.1), where, like ColBERT, we add [MASK] tokens to each mention but optimize only the retrieval loss (Eq.

3). The other one (3.2) instead explicitly trains the [MASK] embeddings to perform QE (see Section 2.1.4).

For NCBI Disease and CTD Chemicals, we observe that the inclusion of [MASK] tokens degrades downstream performance (3.1), even when our custom objective loss is used (3.2). We attribute this drop to the inconsistent expansion requirements across mentions. For instance, expansion tokens in DISEASE mentions vary from different spellings (e.g., expanding “tumor” with “tumour”) to multiple tokens which may not appear in the mention’s context (e.g., expanding “attenuated polyposis” with “familial”, “adenomatous”, and “coli”).

This hypothesis is further supported by our results on NLM-Gene, where active QE (3.2) yields a performance benefit, albeit marginal. GENE mentions require short and highly consistent expansions, primarily in the form of species names. For all subsequent experiments, we train BELXTR models with active QE only on entity types that inherently require species information (GENE and CELL LINE) for disambiguation.

3.2. Neural retrievers

In Table 2, we observe that BELXTR outperforms all baseline models on five out of the ten corpora, while ranking second on the remaining ones (except for BioID). Performance gains vary across entity types. For DISEASE and CHEMICAL, the improvement over the previous state-of-the-art is marginal. However, we emphasize that on the CHEMICAL subset of BC5CDR, BELXTR outperforms methods that underwent task-specific pre-training, whether on a large-scale corpus (KRISBERT) or directly on the target KB (ANGEL).

The most substantial improvements are achieved on the GENE corpora. We argue that BELXTR’s competitive advantage here stems primarily from two factors. First, unlike existing embeddings methods like BELHD, BELXTR utilizes the maximum context window allowed by its backbone model (see Section 2.1). This enables it to capture broader contextual information, which is crucial for gene normalization since species information is not always located in close proximity to the gene mention [Luo et al., 2022b].

The second critical factor is BELXTR’s ability to model fine-grained token similarities (see Section 4.4 for detailed discussion). In contrast, standard embedding methods must compress these nuanced distinctions into a single vector, making it harder to resolve such granular differences. Generative methods like GenBioEL can capture fine-grained information as well [De Cao et al., 2021, a]. However, their optimization

¹⁴ PubTator3 uses MeSH instead of CTD Chemicals.

¹⁵ See Appendix A in [Lee et al., 2023]

	CTD Diseases (DISEASE)		CTD Chemicals (CHEMICAL)		Cellosaurus (CELL LINE)	NCBI Gene (GENE)		NCBI Taxonomy (SPECIES)		UMLS
	NCBI Disease	BC5CDR	BC5CDR	NLM-Chem	BioID	GNormPlus	NLM-Gene	S800	Linnaeus	MedMentions21
<i>Name-based</i>										
BioSyn	79.90	84.83	84.57	70.35	80.79	OOM	OOM	82.79	88.60	OOM
GenBioEL	82.71	88.29	94.60	75.00	94.79	6.80	2.89	88.27	76.92	41.16
GenBioEL+HD	83.02	88.20	94.15	74.10	<u>96.30</u>	66.08	<u>66.43</u>	89.96	77.62	64.59
BELHD	<u>87.60</u>	<u>89.23</u>	92.93	82.39	96.99	<u>77.84</u>	59.03	84.35	81.89	70.58
ANGEL	84.06	88.77	94.51	-	-	-	-	-	-	58.22
BELXTR (ours)	88.75	89.87	95.46	<u>80.56</u>	95.72	84.82	82.29	<u>88.14</u>	<u>82.03</u>	<u>69.47</u>
<i>Entity-based</i>										
arboEL†	80.00	84.87	87.40	71.76	95.02	34.64	29.96	78.62	74.97	68.67
KRISSBERT†‡	82.80	85.0	<u>95.10</u>	-	-	-	-	-	-	61.30

Table 2. Performance (mention-level recall@1) of neural models on the *test* set of BELB corpora. **Bold** and underlined indicate best and second best score, respectively. HD: Homonym Disambiguation [Garda and Leser, 2024]. OOM: out-of-memory (>200GB) † Without cross-encoder reranking ‡ Results reported in [Zhang et al., 2022] (see Section 2.2.1).

is limited the generation of a single output, while BELXTR can directly optimize for the ranking of the candidate set, explaining its advantage [De Cao et al., 2021, b].

3.3. LLM-based reranking

Retrieve In Table 3, we see that BELXTR achieves performance comparable to the LLM-enhanced BioSyn+GRF. The largest gap between the standalone models occurs on CHEMICAL corpora. We attribute this to the fact that BioSyn+GRF uses an LLM to generate the standard scientific name for the given mention (among other expansions) to be used by the BioSyn model. As CHEMICAL entities present a high naming variability [Krallinger et al., 2015], leveraging the LLM’s domain-specific knowledge provides an advantage over models like BELXTR, which instead rely on labeled data to learn different entity names.

Retrieve-and-rerank When utilized as candidate generator for LLM-based reranking, BELXTR is outperformed by BioSyn+GRF on DISEASE and CHEMICAL corpora. We attribute this to optimization trade-offs: BELXTR optimizes for high-precision retrieval of the correct candidate, whereas BioSyn+GRF is specifically designed to increase recall, making its candidate sets inherently better suited for subsequent reranking.

Nevertheless, BELXTR maintains a definitive advantage on GENE corpora. This is especially evident on NLM-Gene, where standalone BELXTR not only outperforms BioSyn+GRF, but remarkably, also beats the BioSyn+GRF+GPT-4o pipeline (see Section 4.2 for discussion). The performance degradation when combining BELXTR with GPT-4o on this corpus can be explained by the restricted context window used during LLM reranking (i.e., only the sentence containing the mention). In multiple cases, the sentence does not contain explicit species information, causing GPT-4o to either fail to generate a response or select candidates associated with the most common species (e.g., human or mouse).

3.4. Traditional type-specific methods

In Table 4, we compare BELXTR against the type-specific systems integrated into PubTator3 on document-level entity linking. The results show that BELXTR outperforms

PubTator3’s models on DISEASE, CELL LINE and SPECIES, while obtains comparable performance on CHEMICAL and GENE. The latter is particularly noteworthy, as PubTator3 relies on GNorm2 for gene disambiguation, a highly specialized and manually tuned system [Wei et al., 2023].

When compared with the previous best neural model (BELHD), we observe that, although BELXTR achieves higher performance on the in-corpus evaluation for DISEASE and CHEMICAL (see Table 2), its performance on BioRED, though comparable, is lower than that of BELHD. This reflects a well-documented phenomenon in the literature: neural models are susceptible to distribution shifts, and a performance increase on a single corpus does not necessarily translate to better performance across different distributions [Galea et al., 2018, Giorgi and Bader, 2020, Sanger et al., 2024].

4. Discussion

We introduced BELXTR, a multi-vector model for biomedical entity linking that delivers state-of-the-art performance. Our method and evaluation protocols are subject to specific design choices and limitations, which we discuss in more detail below.

4.1. Neural retrievers

We show that BELXTR outperforms six state-of-the-art neural approaches for BEL on five out of ten corpora in the standardized BELB benchmark, while ranking second on four (see Section 3.2). We emphasize that, due to high computational costs, we did not perform extensive hyperparameter tuning for the competing methods (e.g., searching for the optimal learning rate) but instead relied on the settings reported by the original authors.

Consequently, it is possible that these methods could achieve higher performance if fully tuned. Nevertheless, we believe this setup provides the fairest possible comparison across methods. BEL studies on first-stage retrievers exhibit stark differences in preprocessing, corpora, and experimental setups, which makes direct comparisons based on published numbers problematic [Zhang et al., 2022, Kartchner et al., 2023, Garda et al., 2023].

	CTD Diseases (DISEASE)		CTD Chemicals (CHEMICAL)		NCBI Gene (GENE)		NCBI Taxonomy (SPECIES)	
	NCBI Disease	BC5CDR	BC5CDR	NLM-Chem	GNormPlus	NLM-Gene	S800	Linnaeus
Retrieve								
BioSyn†	71.35	74.69	82.01	<u>70.90</u>	69.15	33.80	61.61	<u>69.06</u>
BioSyn+GRF†	74.75	76.69	94.00	77.58	78.68	<u>39.12</u>	<u>76.05</u>	83.42
BELXTR (ours)	<u>73.89</u>	<u>76.12</u>	89.04	70.18	81.72	78.65	85.92	59.57
Retrieve-and-Rerank								
BioSyn+GRF+GPT4o†	76.21	79.32	<u>92.71</u>	82.58	<u>85.26</u>	<u>69.17</u>	<u>75.00</u>	91.16
BELXTR (ours)+GPT4o	<u>75.37</u>	<u>78.77</u>	91.23	<u>80.23</u>	87.21	75.96	81.69	70.21
BeLink-4B‡	72.9	77.0	93.5	76.7	80.4	47.6	74.2	87.2
BeLink-8B‡	73.4	76.6	93.5	77.4	81.5	51.6	73.9	<u>90.0</u>

Table 3. Comparison of BELXTR with BioSyn and BioSyn with Generative Relevance Feedback (BioSyn+GRF) [Shlyk and Hunter, 2026] as standalone retrievers and in a LLM-based retrieve-and-rerank pipeline. Performance is recall@1 on the *refined test set* of the corpora [Tutubalina et al., 2020] (see Section 2.2.2). **Bold** and underlined indicate best and second best score, respectively. † Results reported in [Shlyk and Hunter, 2026] ‡ Results reported in [Shlyk et al., 2026]

	DISEASE			CHEMICAL			CELL LINE			GENE			SPECIES		
	P	R	F1	P	R	F1	P	R	F1	P	R	F1	P	R	F1
PubTator3†	75.33	83.43	79.17	83.26	80.63	<u>81.92</u>	76.00	86.36	80.85	90.60	79.41	84.63	93.97	96.46	95.20
BELHD	80.34	88.72	84.32	<u>79.50</u>	88.89	83.93	83.97	90.38	87.06	76.20	85.32	80.50	<u>95.47</u>	97.64	96.55
BELXTR	80.62	<u>86.25</u>	<u>83.34</u>	78.26	<u>85.01</u>	81.50	<u>82.69</u>	<u>86.54</u>	<u>84.57</u>	<u>82.91</u>	<u>84.84</u>	<u>83.86</u>	95.65	<u>97.28</u>	<u>96.46</u>

Table 4. Comparison with PubTator3 [Wei et al., 2024] and BELHD [Garda and Leser, 2024] on document-level end-to-end entity linking. **Bold** and underlined indicate best and second best score, respectively. Results are obtained from mentions in the *test set* of BioRED [Luo et al., 2022a] identified by AIONER [Luo et al., 2023]. P: Precision, R: Recall, F1: F1 score. † Results reported in [Wei et al., 2024].

4.2. LLM-based reranking

Our experiments show that, on gene disambiguation BELXTR alone achieves a higher recall@1 than a LLM-based retrieve-and-rerank pipeline.

However, the reranking setup proposed by Shlyk and Hunter [2026] (which we follow) has three important aspects to consider when interpreting the results. First, the LLM only utilizes the sentence in which the mention appears. This is particularly relevant for GENE corpora, as the target species necessary for disambiguation is frequently absent from the immediate local context [Luo et al., 2022b]. Second, their prompt does not make use of enhancements like few-shot examples or chain-of-thoughts.¹⁶ Third, the chosen LLM (GPT-4o) is no longer the state-of-the-art. It is therefore possible that (a) integrating a wider context, (b) optimizing the prompt for the task (e.g., with DSPy [Khattab et al., 2024]), or (c) employing more recent LLMs could yield superior results.

We argue that BELXTR’s performance without reranking on GENE mentions is particularly appealing for a core real-world application of entity linking: information extraction pipelines over large document collections like PubMed [Islamaj et al., 2025, Wiegiers et al., 2025]. In such deployments, computational efficiency is paramount. While Shlyk and Hunter [2026] demonstrate that local, small-scale LLMs (e.g., 1B to 7B parameters) offer competitive results, maximizing performance on challenging entity types like GENE still requires proprietary

LLMs. Running these models at scale remains prohibitively costly and inefficient [Tian et al., 2023].

4.3. Traditional type-specific methods

Our results show that BELXTR is highly competitive with state-of-the-art, type-specific systems. Most notably, on the challenging GENE mentions, its performance closely approaches that of the highly specialized GNorm2 [Wei et al., 2023], which relies on manually curated mappings to resolve normalization edge cases.

Although both BELXTR and PubTator3 target the same underlying KBs, they utilize slightly different versions, which may affect comparability [Garda et al., 2023]. However, we expect the impact of this discrepancy to be minimal, as both systems employ KB versions released within a similar timeframe¹⁷. The only exception occurs with the CHEMICAL entity type, where PubTator3 maps to MeSH while BELXTR targets CTD Chemicals. In this case, BELXTR holds a slight advantage. As CTD Chemicals is a subset of MeSH, the resulting smaller candidate space inherently simplifies the linking task [Ong et al., 2024].

4.4. Gene disambiguation

In our experiments, BELXTR yields the largest performance gains on gene disambiguation. We argue that this advantage stems from its design, which allows it to capture fine-grained name variations.

¹⁶ Although Shlyk and Hunter [2026] note that their simple prompt delivered better performance than the Chain-of-Thought (CoT) prompting proposed by Dobbins [2025].

¹⁷ 2023–2024.

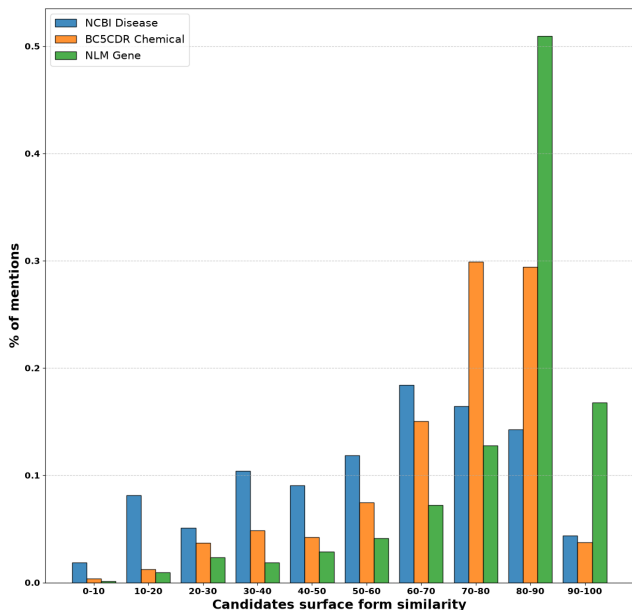


Figure 2 Number of mentions stratified by name similarity in the candidate set in a DISEASE (NCBI Disease), CHEMICAL (BC5CDR) and GENE (NLM-Gene) corpus.

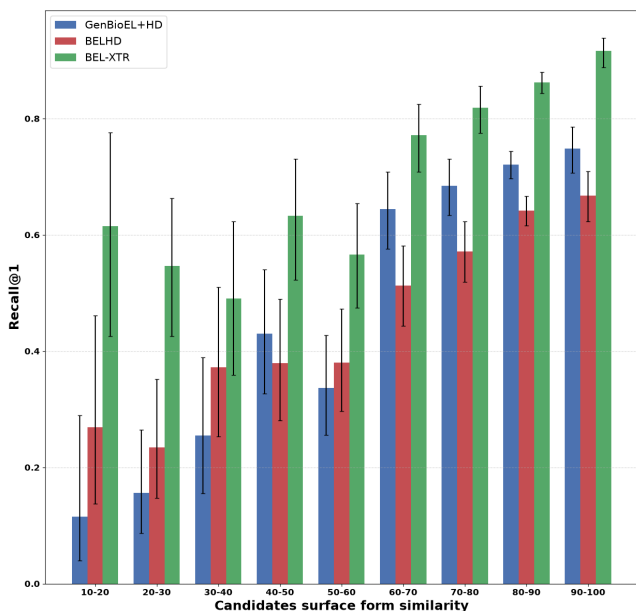


Figure 3 Recall@1 of GenBioEL [Yuan et al., 2022] with HD (see Section 2.2.1), BELHD [Garda and Leser, 2024] and BELXTR (ours) on the NLM-Gene corpus stratified by name similarity in the candidate set.

To illustrate this, we perform the following analysis on three corpora representative of different entity types. Using a trigram-based similarity model, we retrieved (a) the gold entity name and (b) the top-5 false positive names most similar to each test mention. We then categorized each mention by the average

Levenshtein distance [Marzal and Vidal, 1993] between its gold name and top-5 false positives. This distance score reflects candidate set similarity: a score ≤ 10 means false positives are easily distinguishable via string matching, whereas a score ≥ 90 indicates near-identical candidates.

As shown in Figure 2, $\sim 70\%$ of mentions in the gene corpus (NLM-Gene) have candidate similarity scores ≥ 80 . Consequently, even when a model correctly identifies the species and retrieves top candidate names, separating the gold entity from false positives requires detecting subtle differences. For example, 33 human genes belong to the “ADAM” family and differ by only one or two characters. Chemical mentions also exhibit this pattern (e.g., “Lithium-3” vs. “Lithium-4”), though many fall in the 70-80 similarity range where differences are more structurally pronounced (e.g., “6-oxymelatonin” vs. “7-azamelatonin”).

Figure 3 shows that BELXTR achieves its peak recall@1 with the tightest confidence intervals on high-similarity mentions, explaining its edge over rival name-based models. While autoregressive methods can capture fine-grained patterns [De Cao et al., 2021], multi-vector architectures perform better here because they directly optimize candidate set rankings. In contrast, generative models like GenBioEL train on single-name targets [De Cao et al., 2021]. Autoregressive models like ANGEL [Kim et al., 2025] which use negative samples during training can potentially bridge this performance gap.

4.5. Latency and memory footprint

	Recall@1	Abstract/s	Index (GB)
Single-vector (name-based)	57.93	15.94 (± 0.11)	0.75
Multi-vector (name-based)	82.29	2.38 (± 0.07)	5.90

Table 5. Comparison of performance (recall@1), inference speed (average abstract/second) and memory footprint (index size) between a single- and multi-vector bi-encoder. Results are obtained processing the test split of NLM-Gene on a NVIDIA GeForce RTX 3090 (three independent runs).

As shown in Table 5, when compared to single-vector models, multi-vector retrievers, although providing superior performance, come at the cost of: (a) increased inference latency and (b) a larger memory footprint. This inherently limits accessibility and ease of deployment.

The latency issue can be mitigated by the use of approximate nearest neighbor (ANN) search methods, such as HNSW [Malkov and Yashunin, 2018], though this trade-off typically reduces recall. Additionally, with the rising popularity of late-interaction models, specialized retrieval engines have been developed that substantially improve inference speed while fully preserving retrieval quality [Santhanam et al., 2022, Scheerer et al., 2025].

W.r.t. the memory footprint issue, numerous index compression techniques are available for nearest neighbor search (e.g., product quantization [Jegou et al., 2010]) which can significantly reduce memory overhead. Additionally, many entity names are highly redundant, differing only by minor orthographic variations (e.g., “tumor” vs. “tumour”). As contextualized token retrieval is less sensitive to such lexical

variations than standard lexical matching, these names can be safely subsampled. For instance, a clustering algorithm could be applied each the names of each entity to retain only the variant closest to a cluster center. We leave the exploration of these optimization techniques to future work.

4.6. Conclusion

We presented BELXTR, an multi-vector model for biomedical entity linking designed to exploit granular subword similarities between mentions and entity names. BELXTR improves upon XTR [Lee et al., 2023] by specifically tailoring the model to biomedical KBs. Through extensive experiments we show that BELXTR sets a new state-of-the-art on five out of ten standard evaluation corpora. On the challenging cross-species gene disambiguation BELXTR achieves a higher recall@1 than an LLM-powered retrieve-and-rerank pipeline and closely matches a specialized rule-based method. Our results highlight multi-vector models as a practical alternative to hard-to-maintain rule-based system or scenarios where LLM-based reranking is too costly as in PubMed-scale mining.

References

- D. Agarwal, R. Angell, N. Monath, and A. McCallum. Entity Linking via Explicit Mention-Mention Coreference Modeling. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4644–4658. Association for Computational Linguistics, 2022. doi: 10.18653/v1/2022.naacl-main.343.
- C. Arighi, L. Hirschman, T. Lemberger, S. Bayer, R. Liechti, D. Comeau, and C. Wu. Bio-ID track overview. In *BioCreative VI Challenge Evaluation Workshop*, volume 482, page 376, 2017.
- A. Bairoch. The Cellosaurus, a Cell-Line Knowledge Resource. *Journal of Biomolecular Techniques : JBT*, 29:25–38, 7 2018. doi: 10.7171/jbt.18-2902-002.
- O. Bodenreider. The Unified Medical Language System (UMLS): integrating biomedical terminology. *Nucleic Acids Research*, 32(suppl_1):D267–D270, 2004. ISSN 0305-1048. doi: 10.1093/nar/gkh061.
- J. S. Bridle. Probabilistic interpretation of feedforward classification network outputs, with relationships to statistical pattern recognition. In *Neurocomputing: Algorithms, architectures and applications*, pages 227–236. Springer, 1990.
- G. R. Brown, V. Hem, K. S. Katz, M. Ovetsky, C. Wallin, O. Ermolaeva, I. Tolstoy, T. Tatusova, K. D. Pruitt, D. R. Maglott, and T. D. Murphy. Gene: a gene-centered information resource at NCBI. *Nucleic Acids Research*, 43 (D1):D36–D42, 2015. ISSN 0305-1048. doi: 10.1093/nar/gku1055.
- R. Caruana. Multitask learning. *Machine Learning*, 28:41–75, 7 1997. doi: 10.1023/a:1007379606734. URL <https://doi.org/10.1023/a:1007379606734>.
- A. Chaffin and R. Sourty. Pylate: Flexible training and retrieval for late interaction models. In M. Cha, C. Park, N. Park, C. Yang, S. B. Roy, J. Li, J. Kamps, K. Shin, B. Hooi, and L. He, editors, *Proceedings of the 34th ACM International Conference on Information and Knowledge Management, CIKM 2025, Seoul, Republic of Korea, November 10-14, 2025*, pages 6334–6339. ACM, 2025. doi: 10.1145/3746252.3761608. URL <https://github.com/lightonai/pylate>.
- T. Chen, S. Kornblith, M. Norouzi, and G. Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pages 1597–1607. PmlR, 2020.
- A. P. Davis, T. C. Wieggers, R. J. Johnson, D. Sciaky, J. Wieggers, and C. J. Mattingly. Comparative Toxicogenomics Database (CTD): update 2023. *Nucleic Acids Research*, 51:D1257–D1262, 1 2023. doi: 10.1093/nar/gkac833.
- N. De Cao, W. Aziz, and I. Titov. Highly parallel autoregressive entity linking with discriminative correction. *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, 11 2021. doi: 10.18653/v1/2021.emnlp-main.604. URL <https://aclanthology.org/2021.emnlp-main.604>.
- N. De Cao, G. Izacard, S. Riedel, and F. Petroni. Autoregressive entity retrieval. In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net, 2021. URL <https://openreview.net/forum?id=5k8F6UU39V>.
- J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1423. URL <https://aclanthology.org/N19-1423>.
- T. G. Dietterich, R. H. Lathrop, and T. Lozano-Pérez. Solving the multiple instance problem with axis-parallel rectangles. *Artificial intelligence*, 89(1-2):31–71, 1997.
- N. J. Dobbins. Generalizable and scalable multistage biomedical concept normalization leveraging large language models. *Research Synthesis Methods*, 16(3):479–490, 2025.
- R. I. Doğan, R. Leaman, and Z. Lu. NCBI disease corpus: A resource for disease name recognition and concept normalization. *Journal of Biomedical Informatics*, 47:1–10, 2014. ISSN 1532-0464. doi: 10.1016/j.jbi.2013.12.006.
- L. I. Furlong, H. Dach, M. Hofmann-Apitius, and F. Sanz. OSIRISv1.2: A named entity recognition system for sequence variants of genes in biomedical literature. *BMC Bioinformatics*, 9, 12 2008. doi: 10.1186/1471-2105-9-84.
- D. Galea, I. Laponogov, and K. Veselkov. Exploiting and assessing multi-source data for supervised biomedical named entity recognition. *Bioinformatics*, 34(14):2474–2482, 2018.
- S. Garda and U. Leser. Belhd: improving biomedical entity linking with homonym disambiguation. *Bioinformatics*, 40, 8 2024. doi: 10.1093/bioinformatics/btae474. URL <http://dx.doi.org/10.1093/bioinformatics/btae474>.
- S. Garda, L. Weber-Genzel, R. Martin, and U. Leser. Belb: a biomedical entity linking benchmark. *Bioinformatics*, 11 2023. doi: 10.1093/bioinformatics/btad698. URL <http://dx.doi.org/10.1093/bioinformatics/btad698>.
- B. Giacalone, G. Paiement, Q. Tucker, and R. Zanibbi. Beneath the [mask]: An analysis of structural query tokens in colbert.

- In *European Conference on Information Retrieval*, pages 431–439, 2024.
- J. M. Giorgi and G. D. Bader. Towards reliable named entity recognition in the biomedical domain. *Bioinformatics*, 36: 280–286, 1 2020. doi: 10.1093/bioinformatics/btz504. URL <http://dx.doi.org/10.1093/bioinformatics/btz504>.
- R. Islamaj, R. Leaman, S. Kim, D. Kwon, C.-H. Wei, D. C. Comeau, Y. Peng, D. Cissel, C. Coss, C. Fisher, R. Guzman, P. G. Kochar, S. Koppel, D. Trinh, K. Sekiya, J. Ward, D. Whitman, S. Schmidt, and Z. Lu. Nlm-chem, a new resource for chemical entity recognition in pubmed full text literature. *Scientific Data*, 8, 3 2021a. doi: 10.1038/s41597-021-00875-1. URL <http://dx.doi.org/10.1038/s41597-021-00875-1>.
- R. Islamaj, C.-H. Wei, D. Cissel, N. Miliaras, O. Printseva, O. Rodionov, K. Sekiya, J. Ward, and Z. Lu. NLM-Gene, a richly annotated gold standard dataset for gene entities that addresses ambiguity and multi-species gene recognition. *Journal of biomedical informatics*, 118:103779, 2021b. ISSN 1532-0480. doi: 10.1016/j.jbi.2021.103779.
- R. Islamaj, R. Leaman, D. Cissel, C. Coss, J. Denicola, C. Fisher, R. Guzman, P. G. Kochar, N. Miliaras, Z. Punske, K. Sekiya, D. Trinh, D. Whitman, S. Schmidt, and Z. Lu. NLM-Chem-BC7: manually annotated full-text resources for chemical entity annotation and indexing in biomedical articles. *Database*, 2022, 12 2022. doi: 10.1093/database/baac102.
- R. Islamaj, C.-H. Wei, P.-T. Lai, M. Huston, C. Coss, P. G. Kochar, N. Miliaras, J. G. Mork, O. Rodionov, K. Sekiya, D. Trinh, D. Whitman, C. Wallin, and Z. Lu. Assessing artificial intelligence (ai) implementation for assisting gene linking (at the national library of medicine). *JAMIA Open*, 8(1):ooae129, 01 2025. ISSN 2574-2531. doi: 10.1093/jamiaopen/ooae129. URL <https://doi.org/10.1093/jamiaopen/ooae129>.
- H. Jegou, M. Douze, and C. Schmid. Product quantization for nearest neighbor search. *IEEE transactions on pattern analysis and machine intelligence*, 33(1):117–128, 2010.
- D. Kartchner, J. Deng, S. Lohiya, T. Kopparthi, P. Bathala, D. Domingo-Fernández, and C. Mitchell. A comprehensive evaluation of biomedical entity linking models. In H. Bouamor, J. Pino, and K. Bali, editors, *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 14462–14478, Singapore, December 2023. Association for Computational Linguistics. URL <https://aclanthology.org/2023.emnlp-main.893>.
- O. Khattab and M. Zaharia. Colbert: Efficient and effective passage search via contextualized late interaction over bert. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, pages 39–48, 2020a.
- O. Khattab and M. Zaharia. ColBERT: Efficient and effective passage search via contextualized late interaction over BERT. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, pages 39–48, 2020b.
- O. Khattab, A. Singhvi, P. Maheshwari, Z. Zhang, K. Santhanam, S. Vardhamanan, S. Haq, A. Sharma, T. T. Joshi, H. Moazam, H. Miller, M. Zaharia, and C. Potts. Dspy: Compiling declarative language model calls into self-improving pipelines. 2024.
- C. Kim, H. Kim, S. Park, J. Lee, M. Sung, and J. Kang. Learning from negative samples in biomedical generative entity linking. In W. Che, J. Nabende, E. Shutova, and M. T. Pilehvar, editors, *Findings of the Association for Computational Linguistics: ACL 2025*, pages 10714–10730, Vienna, Austria, July 2025. Association for Computational Linguistics. ISBN 979-8-89176-256-5. doi: 10.18653/v1/2025.findings-acl.558. URL <https://aclanthology.org/2025.findings-acl.558/>.
- M. Krallinger, O. Rabal, F. Leitner, M. Vazquez, D. Salgado, Z. Lu, R. Leaman, Y. Lu, D. Ji, D. M. Lowe, et al. The chemdner corpus of chemicals and drugs and its annotation principles. *Journal of cheminformatics*, 7(Suppl 1):S2, 2015.
- R. Leaman and Z. Lu. TaggerOne: joint named entity recognition and normalization with semi-Markov Models. *Bioinformatics*, 32(18):2839–2846, 2016. ISSN 1367-4803. doi: 10.1093/bioinformatics/btw343.
- J. Lee, Z. Dai, S. M. K. Duddu, T. Lei, I. Naim, M.-W. Chang, and V. Y. Zhao. Rethinking the role of token retrieval in multi-vector retrieval. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=ZQzm0Z47jz>.
- J. Li, Y. Sun, R. J. Johnson, D. Sciaky, C.-H. Wei, R. Leaman, A. P. Davis, C. J. Mattingly, T. C. Wiegiers, and Z. Lu. BioCreative V CDR task corpus: a resource for chemical disease relation extraction. *Database*, 2016(baw068), 2016. ISSN 1758-0463. doi: 10.1093/database/baw068.
- C. E. Lipscomb. Medical subject headings (MeSH). *Bulletin of the Medical Library Association*, 88(3):265, 2000.
- F. Liu, E. Shareghi, Z. Meng, M. Basaldella, and N. Collier. Self-alignment pretraining for biomedical entity representations. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4228–4238, Online, June 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.naacl-main.334. URL <https://aclanthology.org/2021.naacl-main.334>.
- L. Luo, P.-T. Lai, C.-H. Wei, C. N. Arighi, and Z. Lu. Biored: a rich biomedical relation extraction dataset. *Briefings in Bioinformatics*, 23, 9 2022a. doi: 10.1093/bib/bbac282. URL <http://dx.doi.org/10.1093/bib/bbac282>.
- L. Luo, C.-H. Wei, P.-T. Lai, Q. Chen, R. Islamaj, and Z. Lu. Assigning species information to corresponding genes by a sequence labeling framework. *Database*, 2022, 10 2022b. doi: 10.1093/database/baac090. URL <http://dx.doi.org/10.1093/database/baac090>.
- L. Luo, C.-H. Wei, P.-T. Lai, R. Leaman, Q. Chen, and Z. Lu. Aioner: all-in-one scheme-based biomedical named entity recognition using deep learning. *Bioinformatics*, 39, 5 2023. doi: 10.1093/bioinformatics/btad310.
- I. Mackie, S. Chatterjee, and J. Dalton. Generative relevance feedback with large language models. In *Proceedings of the 46th international ACM SIGIR conference on research and development in information retrieval*, pages 2026–2031, 2023.
- Y. A. Malkov and D. A. Yashunin. Efficient and robust approximate nearest neighbor search using hierarchical navigable small world graphs. *IEEE transactions on pattern analysis and machine intelligence*, 42(4):824–836, 2018.
- G. Martin, N. Goran, and B. Casey M. LINNAEUS: A species name identification system for biomedical literature. *BMC*

- Bioinformatics*, 11, 2010. ISSN 1471-2105. doi: 10.1186/1471-2105-11-85.
- A. Marzal and E. Vidal. Computation of normalized edit distance and applications. *IEEE Trans. Pattern Anal. Mach. Intell.*, 15: 926–932, 1993. URL <https://api.semanticscholar.org/CorpusID:14851115>.
- S. Mohan and D. Li. MedMentions: A Large Biomedical Corpus Annotated with UMLS Concepts. In *Proceedings of the 2019 Conference on Automated Knowledge Base Construction (AKBC 2019)*, 2019.
- S. Mujeen, J. Minbyul, C. Yonghwa, K. Donghyeon, L. Jinhyuk, and K. Jaewoo. BERN2: an advanced neural biomedical named entity recognition and normalization tool. *Bioinformatics*, 38, 2022. ISSN 1367-4803. doi: 10.1093/bioinformatics/btac598.
- A. Nentidis, G. Katsimpras, A. Krithara, M. Krallinger, M. Rodríguez-Ortega, E. Rodríguez-López, N. Loukachevitch, A. Sakhovskiy, E. Tutubalina, D. Dimitriadis, G. Tsoumakas, G. Giannakoulas, A. Bekiaridou, A. Samaras, G. M. D. Nunzio, N. Ferro, S. Marchesin, M. Martinelli, G. Silvello, and G. Paliouras. Overview of bioasq 2025: The thirteenth bioasq challenge on large-scale biomedical semantic indexing and question answering. In J. Carrillo-de Albornoz, A. García Seco de Herrera, J. Gonzalo, L. Plaza, J. Mothe, F. Piroi, P. Rosso, D. Spina, G. Faggioli, and N. Ferro, editors, *Experimental IR Meets Multilinguality, Multimodality, and Interaction*, pages 173–198, Cham, 2026. Springer Nature Switzerland. ISBN 978-3-032-04354-2.
- N. Ong, H. Shavarani, and A. Sarkar. Unified examination of entity linking in absence of candidate sets. In K. Duh, H. Gomez, and S. Bethard, editors, *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 2: Short Papers)*, pages 113–123, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-short.11. URL <https://aclanthology.org/2024.naacl-short.11/>.
- OpenAI. Gpt-4o system card. OpenAI Blog, August 8 2024. URL <https://openai.com/index/gpt-4o-system-card/>.
- E. Pafilis, S. P. Frankild, L. Fanini, S. Faulwetter, C. Pavloudi, A. Vasileiadou, C. Arvanitidis, and L. J. Jensen. The SPECIES and ORGANISMS resources for fast and accurate identification of taxonomic names in text. *PLOS ONE*, 8(6): e65390, 2013. ISSN 1932-6203. doi: 10.1371/journal.pone.0065390.
- A. Radford, J. W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, J. Clark, and others. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. Pmlr, 2021.
- M. Röder, R. Usbeck, and A.-C. Ngonga Ngomo. GERBIL – benchmarking named entity recognition and linking consistently. *Semantic Web*, 9:605–625, 8 2018. doi: 10.3233/sw-170286.
- M. Sängler, S. Garda, X. D. Wang, L. Weber-Genzel, P. Droop, B. Fuchs, A. Akbik, and U. Leser. Hunflair2 in a cross-corpus evaluation of biomedical named entity recognition and normalization tools. *Bioinformatics*, 40, 10 2024. doi: 10.1093/bioinformatics/btae564.
- K. Santhanam, O. Khattab, C. Potts, and M. Zaharia. Plaid: an efficient engine for late interaction retrieval. In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management*, pages 1747–1756, 2022.
- J. L. Scheerer, M. Zaharia, C. Potts, G. Alonso, and O. Khattab. Warp: An efficient engine for multi-vector retrieval. In *SIGIR '25: The 48th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 2504–2512. ACM, 7 2025. doi: 10.1145/3726302.3729904. URL <https://doi.org/10.1145/3726302.3729904>.
- H. Schäfer, A. Idrissi-Yaghir, K. Arzideh, H. Damm, T. M. Pakull, C. S. Schmidt, M. Bahn, G. Lodde, E. Livingstone, D. Schadendorf, F. Nensa, P. A. Horn, and C. M. Friedrich. Biokgrapher: Initial evaluation of automated knowledge graph construction from biomedical literature. *Computational and Structural Biotechnology Journal*, 24:639–660, 2024. ISSN 2001-0370. doi: <https://doi.org/10.1016/j.csbj.2024.10.017>. URL <https://www.sciencedirect.com/science/article/pii/S2001037024003386>.
- F. Scott. The NCBI Taxonomy database. *Nucleic Acids Research*, 40:D136–D143, 1 2012. ISSN 0305-1048. doi: 10.1093/nar/gkr1178.
- S. T. Sherry, M.-H. Ward, M. Kholodov, J. Baker, L. Phan, E. M. Smigielski, and K. Sirotkin. dbSNP: the NCBI database of genetic variation. *Nucleic Acids Research*, 29(1):308–311, 2001. ISSN 0305-1048. doi: 10.1093/nar/29.1.308.
- D. Shlyk and L. Hunter. Improving biomedical entity linking with generative relevance feedback. *Bioinformatics*, 42 (2):btag011, 01 2026. ISSN 1367-4811. doi: 10.1093/bioinformatics/btag011.
- D. Shlyk, S. Montanelli, and L. Hunter. Belink: Biomedical entity linking meets generative re-ranking. In *SIGIR '26: The 49th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 4121–4126. ACM, 7 2026. doi: 10.1145/3805712.3809918. URL <https://doi.org/10.1145/3805712.3809918>.
- J. Song, C. Jin, W. Zhao, A. McCallum, and J.-Y. Lee. Comparing neighbors together makes it easy: Jointly comparing multiple candidates for efficient and effective retrieval. In Y. Al-Onaizan, M. Bansal, and Y.-N. Chen, editors, *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 22255–22269, Miami, Florida, USA, November 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main.1242. URL <https://aclanthology.org/2024.emnlp-main.1242/>.
- M. Sung, H. Jeon, J. Lee, and J. Kang. Biomedical entity representations with synonym marginalization. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 3641–3650, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.335. URL <https://aclanthology.org/2020.acl-main.335>.
- N. Thakur, N. Reimers, A. Ruckl'e, A. Srivastava, and I. Gurevych. Beir: A heterogeneous benchmark for zero-shot evaluation of information retrieval models. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021. URL <https://openreview.net/forum?id=wCu6T5xFjeJ>.

- P. E. Thomas, R. Klinger, L. I. Furlong, M. Hofmann-Apitius, and C. M. Friedrich. Challenges in the association of human single nucleotide polymorphism mentions with unique database identifiers. *BMC Bioinformatics*, 12, 12 2011. doi: 10.1186/1471-2105-12-s4-s4.
- S. Tian, Q. Jin, L. Yeganova, P.-T. Lai, Q. Zhu, X. Chen, Y. Yang, Q. Chen, W. Kim, D. C. Comeau, R. Islamaj, A. Kapoor, X. Gao, and Z. Lu. Opportunities and challenges for ChatGPT and large language models in biomedicine and health. *Briefings in Bioinformatics*, 25, 11 2023. doi: 10.1093/bib/bbad493. URL <http://dx.doi.org/10.1093/bib/bbad493>.
- E. Tutubalina, A. Kadurin, and Z. Miftahutdinov. Fair Evaluation in Concept Normalization: a Large-scale Comparative Analysis for BERT-based Models. In *Proceedings of the 28th International Conference on Computational Linguistics*, page 6710–6716. International Committee on Computational Linguistics, 2020. doi: 10.18653/v1/2020.coling-main.588.
- F. Wang and H. Liu. Understanding the behaviour of contrastive loss. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2495–2504, 2021.
- L. Wang, C. Du, P. Zhao, C. Luo, Z. Zhu, B. Qiao, W. Zhang, Q. Lin, S. Rajmohan, D. Zhang, and Q. Zhang. Contrastive learning with negative sampling correction. 1 2024. URL <http://arxiv.org/abs/2401.08690v1>.
- B. Warner, A. Chaffin, B. Clavié, O. Weller, O. Hallström, S. Taghadouini, A. Gallagher, R. Biswas, F. Ladhak, T. Aarsen, et al. Smarter, better, faster, longer: A modern bidirectional encoder for fast, memory efficient, and long context finetuning and inference. *arXiv preprint arXiv:2412.13663*, 2024.
- C.-H. Wei, H.-Y. Kao, and Z. Lu. SR4GN: a species recognition software tool for gene normalization. *PLoS ONE*, 7(6): e38460, 2012. doi: 10.1371/journal.pone.0038460.
- C.-H. Wei, H.-Y. Kao, and Z. Lu. GNormPlus: An integrative approach for tagging genes, gene families, and protein domains. *BioMed Research International*, 2015:e918710, 2015. ISSN 2314-6133. doi: 10.1155/2015/918710.
- C.-H. Wei, A. Allot, K. Riehle, A. Milosavljevic, and Z. Lu. tmVar 3.0: an improved variant concept recognition and normalization tool. *Bioinformatics*, 38(18):4449–4451, 2022. ISSN 1367-4803. doi: 10.1093/bioinformatics/btac537.
- C.-H. Wei, L. Luo, R. Islamaj, P.-T. Lai, and Z. Lu. Gnorm2: an improved gene name recognition and normalization system. *Bioinformatics*, 39, 10 2023. doi: 10.1093/bioinformatics/btad599. URL <http://dx.doi.org/10.1093/bioinformatics/btad599>.
- C.-H. Wei, A. Allot, P.-T. Lai, R. Leaman, S. Tian, L. Luo, Q. Jin, Z. Wang, Q. Chen, and Z. Lu. PubTator 3.0: an ai-powered literature resource for unlocking biomedical knowledge. *Nucleic Acids Research*, 4 2024. doi: 10.1093/nar/gkae235. URL <http://dx.doi.org/10.1093/nar/gkae235>.
- T. C. Wiegers, A. P. Davis, J. Wiegers, D. Sciaky, F. Barkalow, B. Wyatt, M. Strong, R. McMorran, S. Abrar, and C. J. Mattingly. Integrating ai-powered text mining from pubtator into the manual curation workflow at the comparative toxicogenomics database. *Database*, 2025:baaf013, 01 2025. ISSN 1758-0463. doi: 10.1093/database/baaf013. URL <https://doi.org/10.1093/database/baaf013>.
- A. Yang, A. Li, B. Yang, B. Zhang, B. Hui, B. Zheng, B. Yu, C. Gao, C. Huang, C. Lv, C. Zheng, D. Liu, F. Zhou, F. Huang, F. Hu, H. Ge, H. Wei, H. Lin, J. Tang, J. Yang, J. Tu, J. Zhang, J. Yang, J. Yang, J. Zhou, J. Zhou, J. Lin, K. Dang, K. Bao, K. Yang, L. Yu, L. Deng, M. Li, M. Xue, M. Li, P. Zhang, P. Wang, Q. Zhu, R. Men, R. Gao, S. Liu, S. Luo, T. Li, T. Tang, W. Yin, X. Ren, X. Wang, X. Zhang, X. Ren, Y. Fan, Y. Su, Y. Zhang, Y. Zhang, Y. Wan, Y. Liu, Z. Wang, Z. Cui, Z. Zhang, Z. Zhou, and Z. Qiu. Qwen3 technical report. 5 2025. URL <http://arxiv.org/abs/2505.09388v1>.
- H. Yuan, Z. Yuan, and S. Yu. Generative biomedical entity linking via knowledge base-guided pre-training and synonyms-aware fine-tuning. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4038–4048, Seattle, United States, July 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.naacl-main.296. URL <https://aclanthology.org/2022.naacl-main.296>.
- S. Zhang, H. Cheng, S. Vashishth, C. Wong, J. Xiao, X. Liu, T. Naumann, J. Gao, and H. Poon. Knowledge-Rich Self-Supervision for Biomedical Entity Linking. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 868–880. Association for Computational Linguistics, 2022.
- W. Zhang and K. Stratos. Understanding hard negatives in noise contrastive estimation. In K. Toutanova, A. Rumshisky, L. Zettlemoyer, D. Hakkani-Tur, I. Beltagy, S. Bethard, R. Cotterell, T. Chakraborty, and Y. Zhou, editors, *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1090–1101, Online, June 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.naacl-main.86. URL <https://aclanthology.org/2021.naacl-main.86/>.

A. Biomedical Entity Linking Benchmark

In Table 6 and 7 we provide an overview of the KBs and corpora available in the BELB benchmark, respectively.

B. NCBI Gene subsets

In Table 8 we report the NCBI Gene subsets determined by the species (NCBI Taxonomy entities) of the gene mentions in GNormPlus and NLM-Gene.

C. PubTator3

PubTator3 [Wei et al., 2024] is a biomedical literature resource which aggregates state-of-the-art tools for biomedical information extraction. In Table 9 we provide an overview of all entity linking models deployed in PubTator3. We note that

	Version	History	Entities	Names	Synonyms	Homonyms (PN)
DISEASE						
CTD Diseases [Davis et al., 2023]	monthly †	✗	13,188	88,548	6.71	0.39% (-)
CHEMICAL						
CTD Chemicals [Davis et al., 2023]	monthly †	✗	175,663	451,410	2.56	- (-)
CELL LINE						
Cellosaurus [Bairoch, 2018]	-	✓	144,568	251,747	1.74	3.21% (1.22%)
SPECIES						
NCBI Taxonomy [Scott, 2012]	-	✓	2,491,364	3,783,882	1.51	0.04% (-)
GENE						
NCBI Gene [Brown et al., 2015]	-	✓	42,252,923	105,570,090	2.49	47.37% (8.32%)
GNormPlus subset			703,858	2,455,772	3.48	50.79% (9.13%)
NLM-Gene subset			873,015	2,913,456	3.33	53.61% (9.55%)
VARIANT						
dbSNP [Sherry et al., 2001]	build 156 †	✓	1,053,854,063	3,119,027,235	2.95	1,557,105,418 (49.92%)
UMLS [Bodenreider, 2004]	2017AA (full)	-	3,464,809	7,938,833	2.29	2.07% (0.16%)

Table 6. Overview of the KBs available in BELB according to their entity type. We report the number of entities, synonyms per entity, homonyms and how many of them are the primary name (PN). † No archive of previous versions is provided

	Documents (train / dev / test)	Annotations (train / dev / test)	0-shot entity	0-shot name
DISEASE				
NCBI Disease [Doğan et al., 2014]	592 / 100 / 100	5,133 / 787 / 960	150 (15.62%)	185 (19.27%)
BC5CDR [Li et al., 2016]	500 / 500 / 500	4,149 / 4,228 / 4,363	388 (8.89%)	765 (17.53%)
CHEMICAL				
BC5CDR [Li et al., 2016]	500 / 500 / 500	5,148 / 5,298 / 5,334	1,038 (19.46%)	415 (7.78%)
NLM-Chem † [Islamaj et al., 2022]	80 / 20 / 50	20,796 / 5,234 / 11,514	3,908 (33.94%)	1,534 (13.32%)
CELL LINE				
BioID ‡ [Arighi et al., 2017]	231 / 59 / 60	3,815 / 1,096 / 864	158 (18.29%)	45 (5.21%)
SPECIES				
Linnaeus † [Martin et al., 2010]	47 / 17 / 31	2,115 / 705 / 1,430	385 (26.92%)	58 (4.06%)
S800 [Pafilis et al., 2013]	437 / 63 / 125	2,557 / 384 / 767	363 (47.33%)	107 (13.95%)
GENE				
GNormPlus [Wei et al., 2015]	279 / 137 / 254	3,015 / 1,203 / 3,222	2,822 (87.59%)	163 (5.06%)
NLM-Gene [Islamaj et al., 2021b]	400 / 50 / 100	11,263 / 1,371 / 2,729	1,215 (44.52%)	353 (12.94%)
VARIANT				
SNP [Thomas et al., 2011]	- / - / 292	- / - / 517	-	-
OSIRIS v1.2 [Furlong et al., 2008]	- / - / 57	- / - / 261	-	-
tmVar v3 [Wei et al., 2022]	- / - / 214	- / - / 1,018	-	-
UMLS				
MedMentions21 [Mohan and Li, 2019]	2,635 / 878 / 879	122,178 / 40,864 / 40,143	8,167 (20.34%)	7,945 (19.79%)

Table 7. Overview of the corpora available in BELB with their primary characteristics: number of documents, annotations and how many of them are zero-shot by entity or by name. † Full text ‡ Figure captions

the entity linking (normalization) model are non-neural type-specific methods. The KBs used for normalization are gathered from inspecting the original publication of each tool.

When comparing with PubTator3 we train BELXTR models on the corpora reported in Table 9. As common in cross-corpus evaluations the full corpus is used for training [Galea et al., 2018, Sanger et al., 2024], unless it overlaps with BioRED, which is sampled from NLM-Gene, NCBI Disease, BC5CDR and tmVar v3. For training a SPECIES model we rely on the combination of Linnaeus and S800 (full corpora) as they have no overlap with BioRED.

We use negative mining to collected 32 hard negatives for each query, and every query uses the all negatives in the mini-batch as negatives: this totals to a maximum of 128 negatives per query. For setting the hyperparameters we use the development set of the NCBI Disease corpus, which are then used for all experiments. The learning rate is set to $3e - 6$. We explore the following values for the top-k: { 128, 256, 512, 1024, 2048 } and find 2048 to work the best for both training and inference. The λ hyperparameter for the loss function is set to 0.3.

D. Training details

Each BELXTR model is trained for a maximum of five epochs with a mini-batch size of 4 queries (mentions with context).

NCBI TAXONOMY		
Entity	Name	Corpora
3055	Chlamydomonas reinhardtii	NLM-Gene
3702	thale cress	GNormPlus,NLM-Gene
3847	soybean	GNormPlus
4896	fission yeast	GNormPlus,NLM-Gene
6239	Caenorhabditis elegans	GNormPlus,NLM-Gene
6956	European house dust mite	NLM-Gene
7227	fruit fly <i>Drosophila melanogaster</i>	GNormPlus,NLM-Gene
7955	zebrafish	GNormPlus,NLM-Gene
8355	African clawed frog	GNormPlus,NLM-Gene
8364	tropical clawed frog	GNormPlus,NLM-Gene
9031	chicken	GNormPlus,NLM-Gene
9606	human	GNormPlus,NLM-Gene
9615	dog	NLM-Gene
9823	pig	GNormPlus,NLM-Gene
9913	cattle	GNormPlus,NLM-Gene
9940	sheep	NLM-Gene
9986	rabbit	GNormPlus,NLM-Gene
10029	Chinese hamster	NLM-Gene
10089	Ryukyu mouse	NLM-Gene
10090	house mouse	GNormPlus,NLM-Gene
10116	Norway rat	GNormPlus,NLM-Gene
10298	Herpes simplex virus type 1	GNormPlus
11676	Human immunodeficiency virus 1	GNormPlus,NLM-Gene
11709	Human immunodeficiency virus 2	NLM-Gene
11908	Human T-cell leukemia virus type I	GNormPlus
41856	Hepatitis C virus genotype 1	GNormPlus
51031	New World hookworm	NLM-Gene
81972	Arabidopsis lyrata subsp. lyrata	NLM-Gene
333760	Human papillomavirus type 16	GNormPlus
511145	Escherichia coli str. K-12 substr. MG1655	GNormPlus
559292	Saccharomyces cerevisiae S288C	GNormPlus,NLM-Gene
2886926	Escherichia phage P1	NLM-Gene

Table 8. NCBI Gene subsets determined by the species (NCBI Taxonomy entities) of the gene mentions in GNormPlus and NLM-Gene

	Entity Linking	Train	KB
DISEASE	TaggerOne † [Leaman and Lu, 2016]	NCBI Disease and BC5CDR (train and validation split)	CTD Diseases [Davis et al., 2023]
CHEMICAL	NLM-Chem [Islamaj et al., 2021a]	NLM-Chem (full corpus)	MeSH [Lipscomb, 2000]
CELL LINE	TaggerOne † [Leaman and Lu, 2016]	BioID (full corpus)	Cellosaurus [Bairoch, 2018]
GENE	GNorm2 [Wei et al., 2023]	GNormPlus and NLM-Gene (train and validation split)	NCBI Gene [Brown et al., 2015]
SPECIES	SpeAss [Luo et al., 2022b]	-	NCBI Taxonomy [Scott, 2012]

Table 9. Overview of the entity linking models used by PubTator3. † Improved version introduced by Wei et al. [2024]