

TWINKV: A COMPOSABLE REPAIR PASS FOR KV CACHE EVICTION VIA PAIRWISE KEY REDUNDANCY

Hong Chen¹, Yudong Zeng², Yongwei Huang², Zuhao Ouyang², Junyan Zhang¹, Xuming Hu^{1,*}

¹The Hong Kong University of Science and Technology (Guangzhou), Guangzhou, China

²Bosum Institute of Management Science, Shenzhen, China

*Corresponding author

ABSTRACT

Long-context inference is bottlenecked by the memory footprint of the key-value (KV) cache, a constraint that is tightest for small models deployed under strict resource budgets. Existing KV cache eviction methods score tokens for removal using the model’s own attention distribution, or, in attention-free alternatives, by each key’s distance from a single global reference point. We show with a controlled leave-one-out probe that attention magnitude is only weakly related to a token’s true causal contribution to the model’s answer (Spearman $\rho = -0.004$), calling into question the premise behind the dominant family of eviction methods. We introduce TwinKV, a training-free, attention-free redundancy signal that measures whether a token’s key has a near-duplicate elsewhere in the context. Rather than deploying this signal as another standalone eviction policy competing against existing methods, we use it as a composable repair pass: given the fixed retained set already chosen by an arbitrary existing eviction policy, TwinKV audits that choice for two structural failure modes – tokens evicted despite having no surviving duplicate (*orphans*, information genuinely lost) and tokens retained despite a duplicate already occupying another slot (*redundant donors*) – and swaps the two, holding the policy’s own budget exactly fixed and never altering its underlying scoring rule. Composed with four recent eviction policies across four benchmark suites – LongBench’s 16 official sub-tasks, LooGLE’s 4 sub-tasks, the synthetic-retrieval benchmark RULER, and a short-context MMLU-Pro no-harm control – and compression ratios $\{0.3, 0.5, 0.7\}$, this repair pass improves the wrapped policy on Qwen3-4B in a majority of evaluated configurations for two of the four policies, is close to even for a third, and helps only a minority of configurations for the fourth – an adaptive baseline already near a performance ceiling on several benchmarks – with the average improvement across the three non-ceiling policies smallest at the loosest ratio tested; that fourth policy’s pattern reverses entirely on RULER for Llama-3.2-1B, where it wins at every evaluated cell because its Alone score there starts far lower and has genuine room to improve. Llama-3.2-1B is not uniformly harder for the repair pass: it shows a smaller average gain on LongBench but a higher fraction of improved cells on both LongBench and LooGLE than Qwen3-4B, and a clean win on RULER; we report this full, model-dependent picture directly, along with the specific task structure (few-shot classification exemplars) where the repair pass does not help on either model.

1 INTRODUCTION

Long-context inference exposes a memory bottleneck that grows linearly with

so the fraction of available memory consumed by the cache – not the weights – is what determines whether long-context inference is feasible at all.

KV cache eviction addresses this bottleneck by discarding a fraction of cached key-value pairs during prefill and retaining only a budget-constrained subset for the remainder of generation. Existing eviction methods score tokens by consulting the model’s own attention distribution, either directly as accumulated attention mass toward each position (Zhang et al., 2023; Li et al., 2024b), as attention averaged over a pyramidal per-layer budget schedule (Cai et al., 2024), or through an attention-free recency-and-sink heuristic calibrated to approximate where attention concentrates in practice (Xiao et al., 2024). A separate line of work removes the dependence on attention weights directly, instead scoring each key by how far it sits from a single reference point, the mean key vector across the context, and treating keys that deviate most from this centroid as important (Park et al., 2025).

We begin from a direct empirical test of the premise shared by the attention-consulting family of methods: does the attention a token receives reflect its true causal contribution to the model’s answer? We measure this with a leave-one-out marginal utility – how much removing a context chunk actually hurts the log-probability the model assigns to the correct answer – and compare it against the attention that chunk received during the original forward pass. Pooled across chunks and samples on a real long-context QA benchmark, the two are statistically indistinguishable from uncorrelated (Spearman $\rho = -0.004$, $p = 0.96$; Figure 1a, Section 2). Attention magnitude, in this setting, does not reliably identify which tokens the model actually needs to answer correctly.

This motivates an importance signal that does not route through attention at all. Our signal is structural: a token’s information survives eviction, in the sense that the model can still recover it later, exactly when an equivalent copy exists elsewhere in the surviving context. A fact restated, paraphrased, or otherwise echoed more than once in a long passage can lose one of its copies without loss; a fact stated exactly once cannot. We operationalize this directly on key vectors: for each token, we count how many other, non-adjacent tokens have a near-duplicate key, measured by cosine similarity above a fixed threshold, and use this twin count as an inverse importance score. This redundancy signal, TwinKV, is training-free, uses no attention weights of any kind, and requires no task-specific calibration.

Because the signal is computed from the context alone, it needs no access to any other compressor’s internal scoring rule – only the budget and the set of positions that compressor has already decided to keep. This makes it deployable not as another standalone policy competing against existing eviction methods, but as a lightweight repair pass applied *after* an arbitrary existing policy has already made its decision. Given that policy’s retained set, TwinKV checks each evicted token for a surviving duplicate and each retained token for a redundant one, and swaps an unrecoverable eviction for a wasted retention wherever it finds a mismatch, holding the wrapped policy’s own budget exactly fixed. Because every decision under this signal is a judgment about a token’s uniqueness relative to the rest of the context rather than its distance from one fixed reference point, the resulting notion of importance is qualitatively different from anchor-based alternatives; Section 3 makes this distinction, and the repair mechanism itself, concrete.

- We show, with a controlled leave-one-out probe on real long-context QA data, that attention magnitude is only weakly related to a token’s true causal contribution to the model’s answer, calling into question the premise shared by the dominant family of KV cache eviction methods.
- We introduce TwinKV, a training-free, attention-free redundancy signal that identifies prunable tokens through pairwise key-vector similarity rather than attention mass or distance from a single global anchor.
- We show this signal is naturally deployed not as a standalone scorer but as a composable repair pass: it detects when an arbitrary existing eviction policy’s retained set contains an unrecoverable gap alongside a redundant slot, and swaps the two, leaving the wrapped policy’s own scoring rule and budget untouched.
- We derive a rotation-invariant form of the redundancy signal for architectures using a non-uniform, per-dimension rotary schedule to extend context length (e.g. LongRoPE), where the raw post-RoPE key comparison conflates content redundancy with a position-dependent rotation term; the substitution we derive is provably invariant to this term regardless of rotary schedule.
- We validate the repair pass by composing it with four recent eviction policies across four benchmark suites, two model families, and compression ratios $\{0.3, 0.5, 0.7\}$, showing it improves the wrapped policy in a majority of configurations for two of the four on the primary model (Qwen3-4B), is close to even for a third, and helps only a minority of configurations for the fourth (adaptive) baseline, with the advantage across the three non-ceiling policies smallest at the loosest ratio tested; we also report where and why it does not transfer uniformly – a smaller average gain but a higher fraction of improved cells on Llama-3.2-1B for LongBench and LooGLE, a clean cross-family reversal on RULER for the fourth baseline, and a few-shot-template failure mode on LongBench’s TREC sub-task for both models.

2 MOTIVATION

2.1 ATTENTION DOES NOT TRACK CAUSAL UTILITY

The dominant family of KV cache eviction methods scores a token by the attention it receives, on the premise that a token the model attends to strongly is a token the model needs. We test this premise directly with a leave-one-out marginal utility measurement, which asks a stronger question than attention can answer on its own: not how much attention a piece of context received, but how much the model’s actual output would suffer if that piece were removed.

For each sample, we split the context into paragraph-level chunks, run a single forward pass to record the attention each chunk receives from the final context position (averaged over the last four layers and all heads, the standard attention-based importance proxy), and separately measure each chunk’s marginal utility: the drop in log-probability the model assigns to the gold answer when that chunk, and only that chunk, is removed from the context and the forward pass is repeated. A chunk with high marginal utility is one whose removal genuinely hurts the model’s ability to produce the correct answer; a chunk with high attention is one the model’s attention mechanism happened to weight heavily during the original pass. If attention were a reliable proxy for importance, the two should correlate.

Figure 1(a) plots attention against marginal utility, pooled across every chunk from every sample (marginal histograms shown on each axis). The two are statistically indistinguishable from uncorrelated: pooled Spearman $\rho = -0.004$ ($p = 0.96$), computed over $n = 136$ chunks. Chunks that received essentially no

internal quantity, and toward a structural question that can be answered directly from the content of the context itself: if this token is evicted, can the information it carries still be recovered from what remains?

A token’s information is recoverable exactly when an equivalent copy exists elsewhere in the surviving context: a fact that is restated, paraphrased, or otherwise echoed more than once can lose one of its occurrences without loss, since the model can still access it through the copy that remains. A fact stated exactly once has no such fallback; evicting its one occurrence removes it from the model’s accessible context entirely, regardless of how much or how little attention that occurrence received. This gives a criterion for evictability that depends only on the redundancy structure of the context, not on any signal the model computes about which tokens matter.

We operationalize this criterion on key vectors, which are already computed during prefill and available at every layer without any additional forward pass. For each token, we measure whether a near-duplicate key exists elsewhere in the context, excluding a local window around the token itself, since nearby tokens share smooth local structure that is not evidence of true cross-context redundancy. A token with many such near-duplicates is redundant and can be pruned; a token with none is irreplaceable and is protected. Section 3 formalizes this scorer, which requires no attention weights, no training, and no task-specific calibration.

A structural criterion is only useful if the structure it relies on is actually present in real text, and present differently across different kinds of content. Figure 1(b) measures this directly with the scorer itself (Qwen3-4B, threshold $\tau = 0.85$, no leave-one-out repetition needed since this is a property of the keys, not of the model’s output): the fraction of tokens with at least one twin, on 15 real documents from each of 6 LongBench sub-tasks spanning distinct content types. Every content type has a substantial redundant fraction (37–47% of tokens), confirming the phenomenon the scorer exploits is not a corner case; the fraction is highest for code (LCC, repeated syntax and identifiers) and lowest for multi-hop QA (HotpotQA, where each hop typically contributes a fact stated once). TREC – the few-shot classification task whose repair-pass regression we report in Section 4.2 – sits in the middle of this range (42.7%, unremarkable) but with by far the smallest across-document variance ($\pm 0.5\%$, versus $\pm 2\text{--}7\%$ elsewhere): its near-identical exemplar template produces a highly consistent, mechanical redundancy structure, not an unusually large one. This is a more precise diagnosis than “TREC has too much redundancy” – the later failure is a quality problem (the redundant-looking pairs are false positives, template echoes rather than restated facts) rather than a quantity problem, a distinction only visible by measuring prevalence directly rather than assuming it from the failure alone. The same pattern extends beyond LongBench: LooGLE’s two dependency-QA tasks show comparable prevalence (37–38%), so this is not an artifact of one benchmark’s document style.

Section 3 also discusses how the same underlying redundancy principle must be adapted to the positional encoding choices of different model architectures to remain valid across model families.

3 METHOD

3.1 PROBLEM SETUP

During

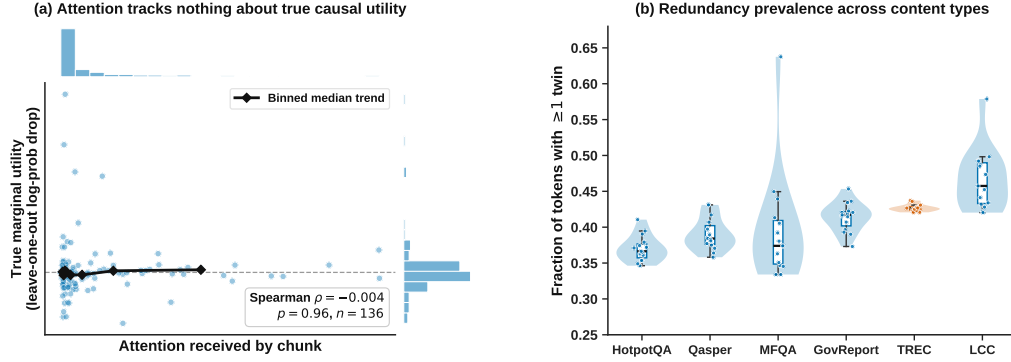


Figure 1: (a) Attention received by a context chunk versus that chunk’s true causal marginal utility (leave-one-out log-probability drop on the gold answer), pooled across chunks from real long-context QA samples, with marginal histograms ($n = 136$ chunks, Spearman $\rho = -0.004$, $p = 0.96$). (b) Fraction of tokens with at least one twin (cosine similarity > 0.85 to some other key outside a 32-token local window), computed with the paper’s own scorer on Qwen3-4B over 15 real documents per LongBench sub-task. TREC is highlighted since Section 4.2 returns to it as the one task where the repair pass regresses.

A token j is a *twin* of token i if their keys are near-duplicates, $\text{sim}(i, j) > \tau$, and if j lies outside a local window of i , $|i - j| > w$. The local exclusion prevents smooth semantic drift between adjacent tokens, which reflects local coherence rather than true cross-context redundancy, from being counted as a twin relationship. The redundancy count of token i is the number of such twins it has elsewhere in the context,

$$r_i = \sum_{j: |i-j| > w, j \neq i} \mathbf{1}[\text{sim}(i, j) > \tau], \quad (2)$$

and its score is the negative, normalized redundancy count,

$$s_i = -\frac{r_i}{n}. \quad (3)$$

Lower redundancy yields a higher score; tokens with the highest scores, i.e. the least redundant tokens, are retained under the budget $|S| = \lceil (1 - \rho)n \rceil$, and the rest are evicted.

Two fixed regions are protected regardless of score, matching the convention shared by every baseline compared against in this work: a small set of leading sink tokens (n_{sink} , default 4) and a trailing recent window (n_{recent} , default 64) immediately preceding the query. Sink tokens are protected because attention-based eviction methods across the field converge on the same empirical necessity independent of their own scoring signal (Xiao et al., 2024); the recent window carries the instruction and question that the model needs decoded, uncompressed, immediately before generation. Both regions are assigned the maximum score and

typically the mean key vector across the context, and treats keys that deviate most from this centroid as important (Park et al., 2025). This view treats importance as global distinctiveness: a token stands out because it looks different, in aggregate, from the context average.

The redundancy count in Equation 2 instead measures a token’s relationship to every other token individually, and asks not whether the token is unusual on average but whether an equivalent copy of it exists anywhere else. These two notions coincide when the information that matters happens to also be a global outlier, as in synthetic settings that plant a single unusual fact inside otherwise uniform filler text. They diverge on naturally occurring text, where the one sentence that answers a question is often lexically and stylistically unremarkable relative to the rest of the passage; its distinguishing property is not that it looks different from everything else, but that nothing else in the passage says the same thing. A pairwise, local comparison against every other position is required to detect this kind of uniqueness, since no single global reference point, however it is chosen, can certify that a specific fact was never repeated.

A pairwise key-similarity term also appears in concurrent work on compressing a reasoning model’s own generated chain of thought during decoding (Cai et al., 2025), where it is combined with an attention-derived importance term into a single joint linear score. TwinKV instead uses redundancy as the sole criterion, with no attention dependency of any kind, and targets the input context during prefill rather than a self-generated reasoning trace during decoding.

3.4 COMPOSABLE REPAIR: TWINKV AS A PLUG-IN

The redundancy score in Equation 3 is a property of the context alone: computing it requires no access to any other compressor’s internal scoring rule, only the budget $K = |S|$ and the retained set $S \subseteq \{1, \dots, n\}$ that some existing policy has already produced, whether that policy is attention-based, anchor-based, chunk-based, or purely heuristic. This makes the signal usable independently of whatever scoring rule is already in place: instead of replacing an existing policy’s decision, TwinKV can audit and repair it after the fact.

Given an arbitrary policy’s retained set S_0 , define each token’s best surviving twin similarity, restricted to S_0 ,

$$b_i(S_0) = \max_{j \in S_0, |i-j| > w, j \neq i} \text{sim}(i, j), \quad (4)$$

with $b_i(S_0) = -1$ if no such j exists. A token $i \notin S_0$ is an *orphan* if $b_i(S_0) < \tau$: the policy discarded it, and no equivalent copy of its information survives anywhere in the retained context. A token $j \in S_0$, outside the protected sink and recent regions, is a *redundant donor* if $b_j(S_0) \geq \tau$: the policy kept it, but an equivalent copy is already retained elsewhere, so one of the two occupies a slot without

(Section 3.4) adds this same $O(n^2d)$ computation on top of the wrapped policy’s own cost, since our implementation computes $b_i(S_0)$ from the full similarity matrix rather than a cheaper restriction to comparisons against S_0 alone; a repair-specific implementation that only computes similarities against the K retained positions would reduce this to $O(nKd)$, which we leave to future work.

4 EXPERIMENTS

4.1 SETUP

Models. We evaluate Qwen3-4B and Llama-3.2-1B side by side throughout this section, composing the identical repair pass with each, on the same benchmarks and the same wrapped policies. The two differ in one respect: the redundancy threshold τ is 0.85 for Qwen3-4B (the scorer’s default) and 0.90 for Llama-3.2-1B, a documented, one-time recalibration discussed in Section 4.4 rather than a per-task tuning.

Wrapped policies. We compose the TwinKV repair pass (Section 3.4) with four eviction policies spanning distinct scoring strategies: StreamingLLM (Xiao et al., 2024) (attention-sink retention, query-agnostic), PyramidKV (Cai et al., 2024) and SnapKV (Li et al., 2024b) (layer-budget allocation and recent-query attention scoring), and ExpectedAttention (Devoto et al., 2025) (adaptive, per-head budget allocation from an expectation over future queries’ attention). For every configuration we report the wrapped policy alone (*Alone*) and the same policy composed with the repair pass (*+Rep*), on the identical sampled examples. We also evaluated H2O (Zhang et al., 2023) and KeyDiff (Park et al., 2025) during development and park both here to keep the main lineup at four complementary strategies, not for any negative interaction (H2O also runs out of memory beyond 4K-token contexts, since it materializes full attention weights). ChunkKV (Liu et al., 2025) is excluded for a substantive reason: a consistently flat-to-negative interaction across every benchmark.

Benchmarks. We evaluate on four benchmark suites. LongBench (Bai et al., 2024), all 16 official English sub-tasks, at the official full evaluation size for each. LooGLE (Li et al., 2024a), all 4 official sub-tasks (ShortDepCloze, ShortDepQA, LongDepQA, LongDepSumm), 16K-token contexts. RULER (Hsieh et al., 2024), all 13 synthetic retrieval/aggregation sub-tasks at three context lengths (4K/8K/16K), a dev-slice (5% fraction) since RULER’s per-example cost is high at these lengths. MMLU-Pro (Wang et al., 2024), a genuinely short-context (single question plus up to 10 options, no long document) multiple-choice benchmark used as a no-harm sanity check: does composing the repair pass degrade performance where there is little or no exploitable cross-context redundancy to correct. Every result below is reported as a table of the actual *Alone*/*+Rep* scores (not only their sign or magnitude of change), organized by model

Table 1: LongBench, mean over 15 sub-tasks (TREC excluded, discussed separately below), official full-scale evaluation. Alone = wrapped policy alone; +Rep = composed with the repair pass; bold marks +Rep at or above Alone (the repair pass helps or is a no-op).

Model	Ratio	StreamLLM		PyramidKV		SnapKV		ExpAttn	
		Alone	+Rep	Alone	+Rep	Alone	+Rep	Alone	+Rep
Qwen3-4B	0.30	26.03	31.30	34.60	33.55	34.56	33.55	35.11	34.19
	0.50	24.94	28.63	31.62	32.02	32.59	32.02	34.31	33.14
	0.70	23.57	26.07	30.05	30.65	30.09	30.65	33.85	31.98
Llama-3.2-1B	0.30	21.58	22.12	23.45	23.44	23.54	23.45	23.44	23.54
	0.50	21.22	21.24	21.01	22.34	22.53	22.35	22.93	22.86
	0.70	20.30	20.59	21.29	21.25	21.30	21.25	21.73	21.93

Table 2: LooGLE, mean over all 4 sub-tasks, official full-scale evaluation. Columns as in Table 1.

Table 3: RULER, mean over all 13 sub-tasks at each context length, dev-slice (5% fraction). Columns as in Table 1.

Model	Length	Ratio	StreamLLM		PyramidKV		SnapKV		ExpAttn	
			Alone	+Rep	Alone	+Rep	Alone	+Rep	Alone	+Rep
Qwen3-4B	4K	0.30	76.91	76.02	75.05	82.99	80.93	82.99	92.54	84.03
		0.50	62.98	64.68	31.15	70.92	57.54	70.92	83.14	75.64
		0.70	45.30	46.73	30.36	49.34	30.40	49.34	68.79	60.32
	8K	0.30	72.15	75.63	60.35	78.13	70.26	78.13	86.67	81.93
		0.50	52.96	58.26	41.76	67.21	55.49	67.21	80.63	72.83
		0.70	39.19	41.40	27.31	54.18	38.42	54.18	66.09	60.33
	16K	0.30	65.37	72.78	67.16	79.0				

Table 4: MMLU-Pro (short-context, no-harm check). Columns as in Table 1.

Model	Ratio	StreamLLM		PyramidKV		SnapKV		ExpAttn	
		Alone	+Rep	Alone	+Rep	Alone	+Rep	Alone	+Rep
Qwen3-4B	0.30	42.42	43.72	45.45	40.69	44.59	40.69	47.19	42.42
	0.50	36.80	37.23	33.77	37.23	38.53	37.23	45.02	43.29
	0.70	27.71	27.71	25.97	25.97	26.41	25.97	41.13	38.53
Llama-3.2-1B	0.30	23.81	21.65	24.24	22.94	24.24	22.94	26.41	23.81
	0.50	20.35	22.08	18.61	19.48	18.61	19.48	25.11	23.81
	0.70	16.02	16.45	10.39	11.26	10.82	11.26	23.81	22.51

three) at 0.3 to 41.13% (versus 26–28%) at 0.7; on Llama-3.2-1B the same pattern is even sharper, from 26.41% (versus 24%) at 0.3 to 23.81% (versus 10–16%) at 0.7. StreamingLLM, PyramidKV, and SnapKV stay close to each other at every ratio and all degrade substantially as compression

little room for the failure mode in Section 2 to fully manifest: mean Δ at $\tau = 0.90$ across ratios and baselines is small (-1.96), nowhere near the collapse seen on Qwen3-4B (-28.52).

REFERENCES

- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. LongBench: A bilingual, multitask benchmark for long context understanding. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics*, 2024.
- Zefan Cai, Yichi Zhang, Bofei Gao, Yuliang Liu, Yucheng Li, Tianyu Liu, Keming Lu, Wayne Xiong, Yue Dong, Junjie Hu, and Wen Xiao. Pyramidkv: Dynamic kv cache compression based on pyramidal information funneling. *arXiv preprint arXiv:2406.02069*, 2024.
- Zefan Cai, Wen Xiao, Hanshi Sun, Cheng Luo, Yikai Zhang, Ke Wan, Yucheng Li, Yeyang Zhou, Li-Wen Chang, Jiuxiang Gu, Zhen Dong, Anima Anandkumar, Abedelkadir Asi, and Junjie Hu. R-KV: Redundancy-aware KV cache compression for reasoning models. In *Advances in Neural Information Processing Systems*, 2025.
- Alessio Devoto, Maximilian Jeblick, and Simon Jégou. Expected attention: Kv cache compression by estimating attention from future queries distribution. *arXiv preprint arXiv:2510.00636*, 2025.
- Cheng-Ping Hsieh, Simeng Sun, Samuel Krizan, Shantanu Acharya, Dima Rekish, Fei Jia, Yang Zhang, and Boris Ginsburg. RULER: What’s the real context size of your long-context language models? In *First Conference on Language Modeling (COLM)*, 2024.
- Jiaqi Li, Mengmeng Wang, Zilong Zheng, and Muhan Zhang. LooGLE: Can long-context language models understand long contexts? In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics*, 2024a.
- Yuhong Li, Yingbing Huang, Bowen Yang, Bharat Venkitesh, Acyr Locatelli, Hanchen Ye, Tianle Cai, Patrick Lewis, and Deming Chen. Snapkv: Llm knows what you are looking for before generation. *arXiv preprint arXiv:2404.14469*, 2024b.
- Xiang Liu, Zhenheng Tang, Peijie Dong, Zeyu Li, Yue Liu, Bo Li, Xuming Hu, and Xiaowen Chu. Chunkkv: Semantic-preserving kv cache compression for efficient long-context llm inference. *arXiv preprint arXiv:2502.00299*, 2025.
- Junyoung Park, Dalton Jones, Matthew J Morse, Raghavv Goel, Mingu Lee, and Chris Lott. Keydiff: Key similarity-based kv cache eviction for long-context llm inference in resource-constrained environments. *arXiv preprint arXiv:2504.15364*, 2025.
- Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Ab