

Loom: Weaving Diagnostic Strands into Free-Text Consensus via Embedding-Space Reweighting

Ron Begleiter , Katya Egert Berg , Gilad Saban , Gil Shabat 

NVIDIA

Tel Aviv, Israel

{rbegleiter, kegertberg, gsaban, gshabat}@nvidia.com

Abstract

Aggregating noisy, conflicting textual hypotheses into a reliable consensus is a fundamental challenge when deploying NLP systems in real-world industrial settings. While monolithic Large Language Model (LLM) agents offer unbounded expressivity for tasks like Root Cause Analysis (RCA), they suffer from context limits, compounding hallucinations, and prohibitive inference latency. Traditional weak supervision offers statistical rigor but is mathematically restricted to discrete classes. We present Loom, a generative consensus framework deployed for real-world RCA that bridges these paradigms. Loom aggregates open-form hypotheses emitted by modular heuristics (diagnostic templates dynamically populated with episode-specific entities, times, and metrics) by projecting them into a continuous embedding space, and resolves conflicting signals with an iterative centroid-based reweighting algorithm. The resulting consensus weights ground a single lightweight LLM synthesis step. Evaluated on the OpenRCA benchmark, Loom occupies the accuracy–efficiency Pareto frontier: it matches a state-of-the-art autonomous agent on Bank and Market-2 and trails on Market-1 and Telecom, while using a single LLM call per incident on all four datasets ($\sim 26\times$ faster; $\sim 33\times$ with an 8B-parameter synthesizer). We discuss our deployment experience, highlighting lessons learned regarding the trade-offs between agentic depth and inference latency, negative results in redundancy detection, and how deterministic consensus fosters trust among Subject Matter Experts (SMEs).

1 Introduction

The ability to aggregate diverse, noisy textual signals into a cohesive consensus is a central challenge in natural language processing. As NLP systems are increasingly deployed to analyze massive, multimodal data streams in industrial settings, the need for robust semantic aggregation has outpaced tradi-

tional methodologies. In the domain of automated Root Cause Analysis (RCA) for large-scale computing environments, diagnosing failures requires generating statistically consistent, highly specific semantic analyses from diverse sources such as logs and telemetry.

Deploying monolithic Large Language Models (LLMs) as autonomous agents (Xu et al., 2025) offers unbounded expressivity but introduces severe practical limitations: context window exhaustion, compounding hallucinations, and prohibitive inference latency and cost. Conversely, weak supervision frameworks (Ratner et al., 2017) excel at denoising heuristic rules but are mathematically restricted to discrete, predefined categorical classes. They are structurally incapable of aggregating unconstrained, free-text semantic descriptions.

The core problem lies in bridging these two paradigms: how can we mathematically aggregate *open-form*, *episode-specific* textual hypotheses without relying entirely on the fragile, unconstrained reasoning and high latency of an iterative LLM loop?

To address this gap, we present *Loom*, a continuous-space generative consensus framework designed for real-world deployment. Loom decomposes complex reasoning tasks into modular, programmatic heuristics (Diagnostic Strands). Rather than voting on discrete labels, these strands emit templated hypotheses whose slots are filled from telemetry. Loom aggregates these open-form outputs by projecting them into a continuous vector space and applying an iterative centroid-based reweighting algorithm. Finally, a synthesis LLM uses this mathematically denoised, ordered evidence to generate a single, coherent narrative.

Crucially, Loom addresses key industrial constraints: it provides an auditable, deterministic consensus mechanism that fosters trust among Subject Matter Experts (SMEs), and it operates at a fraction of the latency and cost of iterative agentic loops.

Contributions. Our contributions are: (i) a generative consensus framework deployed for real-world RCA that extends weak supervision to templated, episode-specific hypotheses; (ii) an iterative centroid-based reweighting algorithm that resolves conflicts deterministically, bypassing costly LLM debate; (iii) real-world case studies demonstrating Loom’s deployment in large-scale computing environments; (iv) an OpenRCA evaluation placing Loom on the accuracy–efficiency Pareto frontier, with a $\sim 26\text{--}33\times$ inference speedup over the RCA-Agent baseline on every dataset; and (v) a discussion of negative results and lessons learned from deployment, specifically regarding redundancy detection and the limits of single-shot synthesis.

2 Background and Related Work

Troubleshooting failures in large-scale distributed compute systems is notoriously difficult, primarily due to the stochasticity of entities and complex networking protocols. For example, a typical LLM training job spans hundreds or thousands of compute nodes connected via diverse backbones (Jiang et al., 2024, 2025). When a failure occurs, identifying the true culprit is challenging as it is often masked by “innocent” components affected by collateral damage. In practice, troubleshooting heavily relies on human Subject Matter Experts (SMEs). Automated solutions must not only be accurate but also fast, cost-effective, and auditable.

AI Ops and Automated Log Analysis. Large-scale infrastructure management relies heavily on automated log analysis, statistical anomaly detection, and comprehensive observability tools (e.g., MegaScale (Jiang et al., 2024) and L4 (Jiang et al., 2025)). While highly efficient at data extraction and spatial-temporal pattern matching, these methods fundamentally lack generative semantic capabilities. In other words, they are good at locating symptoms; however, they lack the ability to produce a cohesive RCA description without human SME intervention.

Traditional Weak Supervision. Weak supervision frameworks, such as Data Programming and Snorkel (Ratner et al., 2016, 2017), revolutionized programmatic labeling by aggregating noisy heuristic rules to generate probabilistic training data. Subsequent advancements drastically improved scalability by using covariance matrices (Varma et al., 2019) and triplet methods (Fu et al., 2020) to learn

rule dependencies without ground truth. However, these mathematical formulations are structurally bound to discrete, categorical label spaces. They rely on exact-match voting matrices; if two heuristics output slightly different textual explanations for the same underlying bug, traditional weak supervision treats them as completely disagreeing. Consequently, they are entirely incapable of aggregating unconstrained, free-text semantic descriptions.

Autonomous RCA Agents. Recent approaches deploy foundational LLMs as autonomous, multi-step reasoning (e.g., ReAct) agents to iteratively navigate telemetry and diagnose root causes (Xu et al., 2025; Yao et al., 2023). While highly expressive, these bottom-up agentic solutions struggle with unbounded search spaces. Iterative LLM loops (e.g., searching, reading, deciding the next query) incur massive token costs and prohibitive inference latency. Furthermore, lengthy reasoning trajectories suffer from compounding hallucinations, where a single poor retrieval step can permanently derail the agent’s diagnosis. Their reliance on generic reasoning also leads to contextual conflation, frequently missing subtle but critical technical nuances.

LLM Consensus and Multi-Agent Debate. Within the NLP community, efforts to resolve conflicting hypotheses have focused on iterative LLM prompting. Techniques like Self-Consistency (Wang et al., 2023) sample multiple paths and select the majority vote, while Multi-Agent Debate (Du et al., 2024) instantiates multiple LLMs to iteratively critique each other’s outputs. While effective for general reasoning, these approaches scale poorly to massive evidence spaces due to prohibitive token costs and latency. Furthermore, while multi-agent debate is designed to mitigate the “Degeneration-of-Thought” phenomenon (Liang et al., 2024) (where single models struggle to resolve conflicts once anchored to an initial hypothesis), the iterative generation required makes it too slow for real-world deployment. Loom avoids these pitfalls by shifting conflict resolution to a highly efficient, continuous mathematical embedding space.

Retrieval-Augmentation and LLM-as-Judge Ensembles. RAG (Lewis et al., 2020), Fusion-in-Decoder (Izacard and Grave, 2021), and Self-RAG (Asai et al., 2024) couple a retriever with a gener-

ative reader but leave cross-passage aggregation to the LLM’s in-context reasoning. A parallel line uses LLMs as judges or aggregators: MT-Bench (Zheng et al., 2023), heterogeneous panels (Verga et al., 2024), and pairwise-ranking ensembles (Jiang et al., 2023). Loom is complementary: it pre-aggregates structured hypotheses in continuous space, so the synthesis LLM receives a denoised ranked slate rather than raw passages or many completions. Conflicts are resolved deterministically in embedding space, and aggregation cost does not scale with the number of hypotheses or repeated LLM invocations.

3 The Loom Framework

As illustrated in Figure 1, Loom decomposes diagnostic evaluation into modular, programmatic heuristics whose textual outputs are mathematically denoised. At inference time, we feed the entire corpus of heuristics with the data context of a specific incident. Relevant heuristics produce a textual RCA, while irrelevant ones abstain. We compute an importance weighting over the outputs via an iterative embedding-centroid reweighting algorithm, and feed this consensus into a synthesis LLM.

3.1 Diagnostic Strands (DSs)

The foundational units of Loom are Diagnostic Strands (DSs). A DS is a programmatic heuristic (e.g., a Python script) that evaluates structured data. Rather than selecting from a predefined discrete class, a DS emits a diagnostic template whose slots are populated from telemetry (hostnames, KPI names, counts, timestamps), or abstains if its conditions are not met. Appendix E reports catalog scale, runtime firing, instantiation counts, and authoring cost. Concrete DS listings appear in Appendices A and D; Appendix F walks through an OpenRCA inference.

For real-world deployment, DSs are either authored by domain experts or automatically extracted via LLMs from historical incident tickets and documentation (see Appendix C). By pre-compiling troubleshooting knowledge into code, Loom avoids the latency and hallucination risks of an agent blindly searching telemetry at runtime.

3.2 Iterative Embedding-Centroid Reweighting

Suppose M DSs fire and produce episode-specific templated descriptions. Loom aggregates these

using an iterative embedding-centroid reweighting algorithm (Algorithm 1), measuring semantic alignment via cosine similarity $\text{sim}(a, b)$.

Step 1: Static Redundancy Detection. Prior to runtime, Loom computes a similarity matrix over the docstrings of all DSs using an embedding map ϕ . If the similarity between two DSs exceeds a pre-defined threshold τ (a hyper-parameter controlling the strictness of deduplication), they are grouped, and their effective weights are divided by the group size to prevent redundant rules from dominating.

Step 2: Initialization. Each DS i receives an initial weight $w_i^{(0)}$ based on expert-curated reliability metadata, giving high-reliability heuristics a head start.

Step 3: Dynamic Embedding. During runtime, the templated outputs of fired DSs are embedded into a continuous vector space, yielding embeddings $e_i = \phi(\text{output}_i) \in \mathbb{R}^d$.

Step 4: Iterative Reweighting. Starting from $w_i^{(0)}$, Loom alternates two updates. The **Centroid-step** computes a weighted centroid of the embeddings:

$$c^{(t)} = \frac{\sum_{i=1}^M \tilde{w}_i^{(t)} e_i}{\sum_{i=1}^M \tilde{w}_i^{(t)}}, \quad (1)$$

where $\tilde{w}_i^{(t)}$ is adjusted for redundancy. The **Weight-step** updates each DS’s accuracy estimate by its alignment with the centroid:

$$w_i^{(t+1)} = \text{sim}(e_i, c^{(t)}). \quad (2)$$

This process assigns higher weights to consensus-aligned heuristics and down-weights outliers. The entire aggregation runs in milliseconds, contributing negligibly to inference latency.

3.3 Textual Resolution and LLM Synthesis

The reweighting yields an importance weighting that induces a strict ordering over the raw textual outputs. Finally, this ordered evidence is fed into an LLM to synthesize a single, coherent RCA. Because the LLM operates solely on a small, mathematically denoised context window rather than raw telemetry, this step is highly efficient and robust against hallucination. The LLM is strictly prompted to act as a synthesizer, preserving technical details verbatim and prioritizing higher-weighted observations (see Appendix B).

LOOM INFERENCE

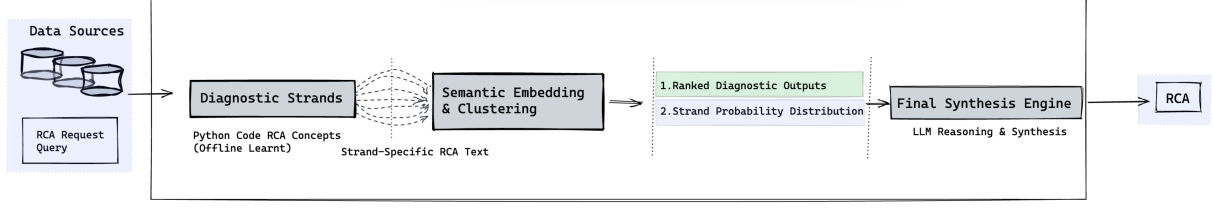


Figure 1: The Loom inference pipeline. Diverse data sources are evaluated by programmatic Diagnostic Strands that emit templated, episode-specific Root Cause Analysis (RCA) hypotheses. These outputs undergo semantic embedding and centroid reweighting to identify the most reliable consensus, yielding an importance weighting and similarity map over the strands. Finally, a synthesis LLM reasons over the ranked diagnostic outputs and generates a cohesive final RCA report.

Algorithm 1 Iterative Embedding-Centroid Reweighting.

Require: Fired DS embeddings $\{e_i\}_{i=1}^M \subset \mathbb{R}^d$; initial reliability weights $\{w_i^{(0)}\}_{i=1}^M$; redundancy groups $\{\mathcal{G}_k\}$ with $g(i)$ denoting the group containing DS i ; tolerance $\varepsilon > 0$; maximum iterations K .

Ensure: Consensus weights $w \in \mathbb{R}^M$.

- 1: $w_i \leftarrow w_i^{(0)}$ for $i = 1, \dots, M$
- 2: $t \leftarrow 0$
- 3: **repeat**
- 4: $\tilde{w}_i \leftarrow w_i / |\mathcal{G}_{g(i)}|$ ▷ Static redundancy adjustment
- 5: $c \leftarrow (\sum_i \tilde{w}_i e_i) / (\sum_i \tilde{w}_i)$ ▷ Centroid-step
- 6: $w_i^{\text{new}} \leftarrow \text{sim}(e_i, c)$ for $i = 1, \dots, M$ ▷ Weight-step
- 7: $\delta \leftarrow \max_i |w_i^{\text{new}} - w_i|$
- 8: $w \leftarrow w^{\text{new}}; \quad t \leftarrow t + 1$
- 9: **until** $\delta < \varepsilon$ **or** $t \geq K$
- 10: **return** w

4 Real-World Deployment and Evaluation

Loom is designed for environments where ground-truth data is scarce, search spaces are vast, and operational constraints (cost, latency, trust) are strict. To demonstrate its versatility and efficacy, we highlight its application across two distinct domains: NVIDIA production datacenters (where we present qualitative case studies) and the public OpenRCA benchmark (where we present a quantitative empirical evaluation).

4.1 Deployment in Large-Scale Environments

We deployed Loom in NVIDIA production datacenters to diagnose both hard distributed job failures and silent networking performance degradations. By shifting the conflict resolution burden to the continuous consensus stage, Loom provides operators with a deterministic, auditable evidence trail, which is a critical requirement for SME adoption.

Case Study: Distributed Training Job Failure.

Consider a distributed training job that failed across a 512-node cluster. Traditional log analysis tools flagged hundreds of generic timeout errors, leaving operators to manually sift through the noise. Loom processed the telemetry and produced the following synthesized RCA:

Title: Critical fabric link failure initiated by REMAP non-fatal errors on hosts node-011-T07 and node-011-T15.

Narrative: The failure cascade began with physical-layer link training instability on hosts node-011-T07 and node-011-T15, evidenced by concurrent link-layer retransmissions (480M retries) and elevated raw bit error rates (7.00×10^{-6}). This instability triggered preemptive context removals across the local domain, ultimately causing severe throughput drops on 337 downstream hosts and a switch-correlated collapse pattern affecting 507 hosts total. The root cause is a localized hardware failure (likely a faulty transceiver or cable) within the node-011 domain.

This output demonstrates Loom’s ability to pinpoint the true root cause (the specific faulty nodes and hardware layer) while accurately describing the massive blast radius (the 507 downstream “victim” hosts) without being distracted by the sheer volume of secondary timeout errors.

Case Study: Silent Performance Degradation.

Consider a scenario where a distributed train-

ing workload experiences a sudden 30% drop in throughput. No hard failures (e.g., link downs, hardware faults) are reported by the orchestrator. During its periodic snapshot, Loom’s autonomous health check evaluates the cluster telemetry. Several DSs fire and are assigned importance weights by the iterative reweighting algorithm:

- **ds_broken_dcqcn_loop (Weight: 0.94):** A composite strand that cross-references switch-side Explicit Congestion Notification (ECN) marking with host-side Congestion Notification Packet (CNP) handling. It fires because switches are marking packets, but hosts are not reacting.
- **ds_ecn_marked_high (Weight: 0.85):** Detects severe congestion at the spine switches (ECN marks > 50k/s).
- **ds_cnp_handled_low (Weight: 0.82):** Detects that hosts are receiving almost no CNPs (< 10/s).
- **ds_rx_pause_high (Weight: 0.76):** Detects elevated Priority Flow Control (PFC) pause frames as switch buffers fill up.

The synthesis LLM processes this weighted evidence and produces the following RCA:

Title: Severe fabric congestion cascade caused by a broken DCQCN feedback loop.

Narrative: The fabric is experiencing severe congestion at the spine layer, evidenced by high ECN marking rates (> 50k/s) and elevated PFC pause frames. However, host-side telemetry shows almost no CNPs being handled (< 10/s), indicating that the DCQCN congestion control feedback loop is broken. Because senders are not being throttled appropriately, the network is overwhelmed, leading to buffer exhaustion and the observed drop in effective throughput. The root cause is likely a configuration drift or routing issue preventing CNPs from reaching the sender hosts.

This example highlights how Loom uses the continuous-space consensus to assign the highest importance to the composite causal strand (ds_broken_dcqcn_loop), allowing the LLM to synthesize a coherent narrative out of seemingly contradictory signals (high congestion but no host throttling).

4.2 Evaluation: The OpenRCA Benchmark

To quantify Loom’s efficacy, we evaluated it on the OpenRCA benchmark (Xu et al., 2025), comprising three datasets (Telecom, Bank, and Market),

where we report the two Market cloudbed instances separately as Market-1 and Market-2. We adapt Loom’s synthesis step to output structured JSON matching the benchmark’s strict schema. Loom is deterministic by construction, so all reported numbers are exact, contrasting with the RCA-Agent baseline¹, whose sampled trajectories vary.

4.3 Lessons Learned and Ablation Studies

Deploying Loom yielded several insights into the trade-offs between quality, efficiency, and system design in real-world settings. To isolate the contribution of each component, we ran a controlled ablation on the OpenRCA Bank benchmark (Table 3).

Lesson 1: The Cost-Accuracy Pareto Frontier.

As shown in Table 1, Loom occupies an accuracy-efficiency Pareto frontier. On Bank and Market-2 it matches the agent’s strict accuracy on Market-2 (35.90%) and exceeds its partial accuracy on Bank (51.22% vs. 49.15%); it trails on Market-1 and Telecom. On every OpenRCA dataset, RCA-Agent requires ~62 iterative LLM calls and nearly 10 minutes per incident, whereas Loom requires 1 call and ~22 seconds (a ~26× speedup). Furthermore, Table 2 shows Loom’s Bank advantage is most pronounced at the extremes of query difficulty (easy: 46.77% vs. 41.94%; hard: 41.18% vs. 29.41%); the agent retains its lead only on two-element queries.

Lesson 2: Decoupling Consensus from LLM Scale.

Table 2 demonstrates that Loom’s performance is largely independent of LLM scale. Replacing Claude 4.6 with Llama-3.1-8B drops overall strict accuracy by only ~3.7 pp; on single-element queries the two judges are tied. Because the reweighting algorithm handles conflict resolution, the LLM only performs basic summarization, enabling local, small-parameter deployment, a critical requirement for air-gapped or cost-sensitive industrial environments.

Lesson 3: Negative Results with Static Redundancy.

Contrary to our initial hypothesis, removing the static DS-docstring redundancy step actually *improves* accuracy (coincidentally also +5.88 pp strict) on the Bank benchmark (Table 3). Post-hoc diagnosis clarifies the mechanism: in environments with a small, expert-curated DS catalog, docstring-level grouping is too coarse a proxy

¹<https://github.com/microsoft/OpenRCA>

Dataset	RCA-Agent + Claude 4.6		Loom + Claude 4.6 (Zero-Shot)		Oracle (Loom Slate)
	Strict Acc.	Partial Acc.	Strict Acc.	Partial Acc.	Strict Acc.
Bank (136)	40.44%	49.15%	38.97%	51.22%	N/A
Market-2 (78)	35.90%	50.76%	35.90%	50.85%	70.51%
Market-1 (70)	40.00%	54.41%	28.57%	44.53%	70.00%
Telecom (51)	41.18%	52.96%	29.41%	42.49%	35.29%
Efficiency	~62 LLM calls / ~567s per incident		1 LLM call / ~22s per incident (~26× speedup)		N/A

Table 1: Performance comparison on the OpenRCA benchmark (four dataset instances). Loom occupies an accuracy–efficiency Pareto frontier: it matches the agent on Bank and Market-2 and trails on Market-1 and Telecom, while using one LLM call per incident on every dataset ($\sim 26\times$ speedup). On Market-1 and Telecom, the single-shot LLM struggles to disambiguate dense noise, though the Oracle score shows that consensus often surfaces the correct candidate.

Metric	RCA-Agent + Claude 3.5	RCA-Agent + Claude 4.6	Loom + Claude 4.6	Loom + Llama-3.1-8B
Easy strict	17.00%	41.94%	46.77%	46.77%
Middle strict	9.00%	42.11%	29.82%	26.32%
Hard strict	0.00%	29.41%	41.18%	23.53%
Overall strict	11.34%	40.44%	38.97%	35.29%
Overall partial	17.00%	49.15%	51.22%	46.68%
Avg time / item	N/A	566.8 s	~22 s	~ 17 s
Judge time / item	N/A	~566 s	~3.5 s	~ 1.5 s
Speedup vs agent	N/A	1×	~26×	~ 33×
LLM calls / item	30 to 50	36 to 78 (~62 avg)	1	1
Model size (judge)	N/A	~100B+	~100B+	8B

Table 2: Detailed performance comparison on the OpenRCA Bank benchmark. On this dataset Loom is near the agent’s accuracy while delivering a $\sim 26\times$ speedup with the Claude 4.6 judge and $\sim 33\times$ with the Llama-3.1-8B judge. The Llama-3.1-8B judge ties the Claude 4.6 judge on easy queries, demonstrating that the consensus stage carries the heavy lifting.

Configuration	Strict Acc.	Partial Acc.
Full Loom System	38.97%	51.22%
w/o Iter. Reweighting	33.09%	42.70%
w/o Redundancy Det.	44.85%	53.36%
w/o Both (Raw LLM Synth.)	35.29%	44.49%

Table 3: Ablation on the 136-incident OpenRCA Bank benchmark. Iterative centroid reweighting contributes a clear +5.88 pp strict-accuracy gain over the no-reweight baseline.

for true redundancy. It compresses entire reason-families out of the top- K candidate list, making the LLM judge less able to recognize the correct failure category. This highlights a practical lesson: redundancy terms must be dynamically conditioned on outputs rather than statically bound to docstrings when operating over curated rule sets.

Lesson 4: The Oracle and the Limits of Single-Shot Synthesis. On Market-1 and Telecom, Loom underperforms the iterative agent. However, the Oracle scores on Market-1 (70.00%) and Market-2 (70.51%) show the continuous con-

sensus algorithm reliably places the true root cause in the top candidates. The remaining gap is the single-shot LLM’s inability to disambiguate closely related fault reasons without iterative tool calls. This suggests a hybrid approach (using Loom to rapidly surface candidates and a lightweight agent to disambiguate) could close the accuracy gap while preserving efficiency.

5 Conclusion

Loom is a deployable generative consensus framework that aggregates templated, episode-specific diagnostic hypotheses in a continuous embedding space. By shifting conflict resolution from iterative LLM loops to mathematical reweighting, Loom achieves a ~ 26 – $33\times$ inference speedup on OpenRCA and enables the use of small (8B) local models, meeting the strict latency and cost constraints of industrial operations. While single-shot synthesis has limits on highly complex datasets, Loom’s deterministic, auditable pipeline fosters SME trust and establishes a practical blueprint for real-world automated diagnostics.

6 Limitations

While Loom offers substantial improvements in scalability and inference latency, evaluating it against generic, bottom-up agentic solutions reveals several strategic trade-offs and engineering considerations.

Accuracy Gap on Market-1 and Telecom: We want to be explicit about an empirical limitation: on two of the four reported OpenRCA instances, Loom is materially less accurate than the iterative RCA-Agent baseline. On Market-1 the gap is 11.43 pp strict (28.57% vs. 40.00%) and on Telecom it is 11.77 pp strict (29.41% vs. 41.18%). The Oracle analysis of Table 1 suggests the continuous consensus stage surfaces the correct candidate on Market-1 (70.00% Oracle), but on Telecom the Oracle itself (35.29%) underperforms the agent, indicating the bottleneck on Telecom is partially in the DS catalog’s coverage rather than purely in the single-shot synthesis step. We therefore do not claim parity with iterative agents in general; Loom is competitive at the two extremes of query complexity on Bank and on Market-2, and is meaningfully weaker on the other two benchmarks.

Semantic Coverage and Predictability: A primary limitation of Loom is its reliance on a predefined catalog of Diagnostic Strands. Unlike bottom-up agents that theoretically possess unbounded coverage and attempt to solve novel issues on-the-fly, Loom’s coverage is explicitly bounded by its DS catalog. However, this limitation yields high predictability: system operators know exactly what the system can and cannot solve, allowing them to systematically close “blind spots” rather than relying on the inconsistent success rates of exploratory agents.

The Cold Start Challenge and Governance: When confronted with a novel “Black Swan” failure, an exploratory agent will attempt a zero-shot diagnosis, which risks unverified or hallucinated executive decisions during a crisis. Loom, by contrast, faces a cold start challenge: it requires a human expert or an offline LLM extraction pipeline to define and validate a new DS before it can diagnose the novel issue. While this delays immediate zero-shot resolution of unprecedented failures, it enforces strict governance.

Dependency on Embedding Expressiveness: Because Loom’s aggregation relies on vector-space

geometry, the system’s accuracy is highly sensitive to the nuances of textual embeddings. If the embedding model fails to capture the semantic distance between subtle technical nuances, the iterative reweighting algorithm may conflate distinct root causes. Conversely, bottom-up agents rely deeply on foundational LLMs, which suffer from contextual conflation and may treat distinct hardware errors as having the same semantic representation. Loom’s mathematical aggregation enforces strict geometric consistency, provided the underlying embedding space is sufficiently expressive. Furthermore, the technical debt associated with maintaining and updating embedding models is orders of magnitude lower than that of managing monolithic foundational LLMs.

The Limits of Single-Shot Synthesis and Judge Overfocus: While Loom’s single-shot LLM synthesis drastically reduces inference latency, our evaluation on the Telecom and Market benchmarks reveals the boundaries of single-pass reasoning. On the Telecom dataset, we observed a phenomenon we term *Judge Overfocus*: when presented with multiple high-confidence candidates featuring saturating anomaly scores across different nodes, the single-shot LLM struggles to weigh competing evidence and often commits to an incorrect, albeit highly anomalous, fault type. Similarly, on the Market-1 benchmark, the single-shot synthesizer exhibited “same-family reason confusion,” frequently failing to disambiguate closely related root causes. Crucially, oracle evaluations on the candidate slates showed that the correct hypothesis was present over 70% of the time, indicating that the continuous consensus stage successfully surfaced the truth, but the single-shot reasoning head lacked the investigative depth to perform final disambiguation.

Reproducibility: The algorithmic framework, the iterative reweighting algorithm (Algorithm 1), the LLM synthesis prompt (excerpted in Appendix B), and the DS-extraction methodology are specified in this paper and the appendices, so Loom is reproducible in principle on any new domain. Our OpenRCA experiments use the publicly released benchmark of Xu et al. (2025), and the Claude 4.6 and Llama-3.1-8B synthesizers are off-the-shelf API and open-weight models, respectively. Combined with the determinism of the pipeline at temperature 0, this means that an independent re-implementation should obtain numer-

ically identical strict/partial-accuracy figures on OpenRCA up to backend LLM-API nondeterminism.

References

- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2024. [Self-RAG: Learning to retrieve, generate, and critique through self-reflection](#). In *The Twelfth International Conference on Learning Representations*.
- Yilun Du, Shuang Li, Antonio Torralba, Joshua B. Tenenbaum, and Igor Mordatch. 2024. Improving factuality and reasoning in language models through multiagent debate. In *Proceedings of the 41st International Conference on Machine Learning, ICML’24*. JMLR.org.
- Daniel Y Fu, Mayee F Chen, Frederic Sala, Sarah M Hooper, Kayvon Fatahalian, and Christopher Ré. 2020. Fast and three-rious: Speeding up weak supervision with triplet methods. In *International Conference on Machine Learning*, pages 3280–3291. PMLR.
- Gautier Izacard and Edouard Grave. 2021. [Leveraging passage retrieval with generative models for open domain question answering](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 874–880, Online. Association for Computational Linguistics.
- Dongfu Jiang, Xiang Ren, and Bill Yuchen Lin. 2023. [LLM-Blender: Ensembling large language models with pairwise ranking and generative fusion](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 14165–14178. Association for Computational Linguistics.
- Zhihan Jiang, Junjie Huang, Guangba Yu, Zhuangbin Chen, Yichen Li, Renyi Zhong, Cong Feng, Yongqiang Yang, Zengyin Yang, and Michael Lyu. 2025. [L4: Diagnosing large-scale llm training failures via automated log analysis](#). In *Proceedings of the 33rd ACM International Conference on the Foundations of Software Engineering, FSE Companion ’25*, page 51–63, New York, NY, USA. Association for Computing Machinery.
- Ziheng Jiang, Haibin Lin, Yinmin Zhong, Qi Huang, Yangrui Chen, Zhi Zhang, Yanghua Peng, Xiang Li, Cong Xie, Shibiao Nong, Yulu Jia, Sun He, Hongmin Chen, Zhihao Bai, Qi Hou, Shipeng Yan, Ding Zhou, Yiyao Sheng, Zhuo Jiang, and 13 others. 2024. Megascale: scaling large language model training to more than 10,000 gpus. In *Proceedings of the 21st USENIX Symposium on Networked Systems Design and Implementation, NSDI’24*, USA. USENIX Association.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. [Retrieval-augmented generation for knowledge-intensive NLP tasks](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 9459–9474.
- Tian Liang, Zhiwei He, Wenxiang Jiao, Xing Wang, Yan Wang, Rui Wang, Yujiu Yang, Shuming Shi, and Zhaopeng Tu. 2024. Encouraging divergent thinking in large language models through multi-agent debate. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*.
- Alexander Ratner, Stephen H Bach, Henry Ehrenberg, Jason Fries, Sen Wu, and Christopher Ré. 2017. Snorkel: Rapid training data creation with weak supervision. *Proceedings of the VLDB Endowment*, 11(3):269–282.
- Alexander J Ratner, Christopher M De Sa, Sen Wu, Daniel Selsam, and Christopher Ré. 2016. Data programming: Creating large training sets, quickly. In *Advances in neural information processing systems*, volume 29.
- Paroma Varma, Frederic Sala, Ann He, Alexander Ratner, and Christopher Ré. 2019. Learning dependency structures for weak supervision models. In *International Conference on Machine Learning*, pages 6418–6427. PMLR.
- Pat Verga, Sebastian Hofstätter, Sophia Althammer, Yixuan Su, Aleksandra Piktus, Arkady Arkhangorodsky, Minjie Xu, Naomi White, and Patrick Lewis. 2024. [Replacing judges with juries: Evaluating LLM generations with a panel of diverse models](#). *Preprint*, arXiv:2404.18796.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023. Self-consistency improves chain of thought reasoning in language models. In *International Conference on Learning Representations*.
- Junjielong Xu, Qinan Zhang, Zhiqing Zhong, Shilin He, Chaoyun Zhang, Qingwei Lin, Dan Pei, Pinjia He, Dongmei Zhang, and Qi Zhang. 2025. [Openrca: Can large language models locate the root cause of software failures?](#) In *The Thirteenth International Conference on Learning Representations*.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. 2023. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations (ICLR)*.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. 2023. [Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena](#).

A Example Diagnostic Strand

Figure 2 provides a concrete example of a Diagnostic Strand (DS) implemented in Python. This heuristic diagnoses non-fatal accelerator-fabric link failures. It cross-references unstructured text (syslog signatures) with structured fabric counters and fills a template with episode-specific hosts and counts.

B Synthesis System Prompt

Figure 3 shows an excerpt from the system prompt used to guide the final LLM synthesis stage. The prompt is strictly constrained to prevent the LLM from acting as an independent investigator. Instead, it forces the model to reason exclusively over the ordered, mathematically denoised evidence provided by the continuous consensus algorithm, ensuring the final narrative remains grounded in the raw telemetry.

C Offline Learning Pipeline

Figure 4 illustrates the offline learning pipeline used to construct the catalog of Diagnostic Strands. Generative AI agents process unstructured knowledge bases (e.g., system documentation, incident tickets) and extract them into discrete, executable Python functions. This pre-compilation step prevents the system from having to blindly diagnose massive telemetry dumps at inference time.

D InfiniBand Switch Environmental Factor

Large GPU clusters interconnect nodes with InfiniBand (IB), a high-bandwidth switched fabric used as the datacenter compute network. An IB switch exposes tens of ports, each terminating a cable or transceiver toward a host or another switch. Isolated port failures (a single bad cable or optic) are common; correlated degradation of many ports on the *same* switch is not.

The Diagnostic Strand `ds_ibjf_switch_environmental` encodes that spatial rule. It groups IB telemetry by switch and marks a port degraded if its effective bit-error rate exceeds 10^{-12} or its packet-loss-retry ratio is at least 10^{-2} . The strand fires only when a

majority of the switch’s active ports are degraded ($> 50\%$ and at least three ports). Independent per-port faults are then unlikely; a chassis-level environmental cause (cooling, airflow, dust, heat) is the appropriate hypothesis. Temperature is the high-probability corroboration rather than an automatic label: if device temperature is at least 80°C , module temperature at least 70°C , or thermal opcodes/flags are set, the filled template names an environmental/thermal factor; otherwise it still reports a common-mode environmental factor and states that heat versus dust, smoke, or airflow is ungrounded without thermal evidence. Figure 5 shows a condensed listing of this decision rule.

E OpenRCA Diagnostic Strand Catalog

Table 4 reports the OpenRCA Diagnostic Strand catalogs used in our evaluation. Market-1 and Market-2 share a single Market catalog. A strand function may instantiate many entity-, time-, and metric-specific hypotheses on one incident, hence Bank’s mean of 340.93 raw hypotheses versus 7.92 fired functions. Only the ranked top- K hypotheses are passed to synthesis.

Dataset	Inc.	DS fns.	Mean fired	Mean hyps.
Bank	136	19	7.92	340.93
Telecom	51	17	3.94	13.25
Market-1	70	21*	7.29	13.14
Market-2	78	21*	7.22	15.69

Table 4: OpenRCA Diagnostic Strand catalogs. *Market-1 and Market-2 share one catalog. Catalog construction required about one engineer-week per dataset (schema integration, authoring, testing, and evaluation).

F Worked OpenRCA Example

We reconstruct one submitted Bank inference from evaluation traces (query 82; window 2021-03-09 19:30–20:00 UTC+8). The query asks for the root-cause reason of a single failure. Ground truth is Tomcat03 / high CPU usage / 19:42; official strict score is 1.0.

Input rows. Container CPU utilization on Tomcat03 is idle through 19:41 (≈ 26.6), jumps at 19:43 (82.7), saturates at 19:44–19:47 (99.1–99.8), and recovers by 19:49 (26.2). The same window contains GC allocation-failure log lines and Tomcat03 trace spans (e.g., duration 44 ms).

```

@diagnostic_strand(
    name="ds_remap_nonfatal_link_failure",
    source="incident_db",
    reliability="high",
)
def ds_remap_nonfatal_link_failure(ctx: DatacenterContext):
    """REMAP non-fatal fabric error: root cause: link physical-layer
    training failure, likely a faulty transceiver, cable, or port instability."""
    if ctx.syslog.empty or "message" not in ctx.syslog.columns:
        return ABSTAIN
    hits = ctx.syslog[ctx.syslog["message"].str.contains(
        r"FabricFault\(PCI:[^)]+\):\s*ERR_LINK_REMAP_NF",
        case=False, regex=True, na=False,
    )]
    if hits.empty:
        return ABSTAIN

    hosts = sorted(hits["hostname"].unique())
    details = []
    if "rx_error_count" in ctx.fabric.columns:
        rx = ctx.fabric["rx_error_count"].fillna(0)
        if (rx > 0).any():
            details.append(f"elevated link rx errors (max={rx.max():.0f})")
    if "link_retry_codes" in ctx.fabric.columns:
        rt = ctx.fabric["link_retry_codes"].fillna(0)
        if (rt > 0).any():
            details.append(f"concurrent link-layer retransmissions (max={rt.max():.0f})")

    desc = (f"{len(hits)} REMAP non-fatal events on {' '.join(hosts)}: "
           "fabric link physical-layer training failure "
           "(likely faulty transceiver / cable / port instability)")
    if details:
        desc += " [" + "; ".join(details) + "]"
    return desc

```

Figure 2: Example Diagnostic Strand (DS) for the datacenter domain. The strand cross-references a syslog regex signature with two structured fabric-telemetry counters via a unified DatacenterContext, fills an episode-specific template when its conditions fire, and otherwise returns ABSTAIN.

You are an expert infrastructure troubleshooting engineer.
 You will receive a set of diagnostic observations about a
 failed job, listed in order of decreasing importance.
 Your job is to synthesize them into a single, coherent
 root cause explanation for the operations team.

Rules:

- Earlier observations are more important, give them more prominence.
- When multiple observations describe different facets of the same failure cascade, connect them causally.
- Preserve specific technical details (error codes, hostnames, metric values) verbatim from the input.
- Do NOT invent facts, metrics, or details beyond what the input observations report.
- Do NOT reference internal diagnostic function names, weights, or scoring mechanics.

Figure 3: Excerpt from the Loom LLM synthesis system prompt. The model is constrained to reason over the ordered DS outputs, ensuring the final narrative is causally sound and strictly grounded in the telemetry-backed heuristics.

Firing and abstaining strands. Of 19 Bank strand functions, 11 fire and produce 206 instantiated hypotheses (192 from a low-reliability fan-out that tentatively assigns many reason labels to stressed pods). Direct firings include sustained CPU on Tomcat03, a metric+trace composite that names the same CPU conclusion at high reliabil-

ity, disk/JVM/network distractors on neighboring pods, two trace-concentration strands, and a GC-log strand. The remaining eight functions abstain (memory, packet loss, JVM CPU load, slow query, TCP, mrt-memory, and two JVM composites). A representative filled template is:

Root cause: sustained CPU utilization anomaly

OFFLINE LEARNING

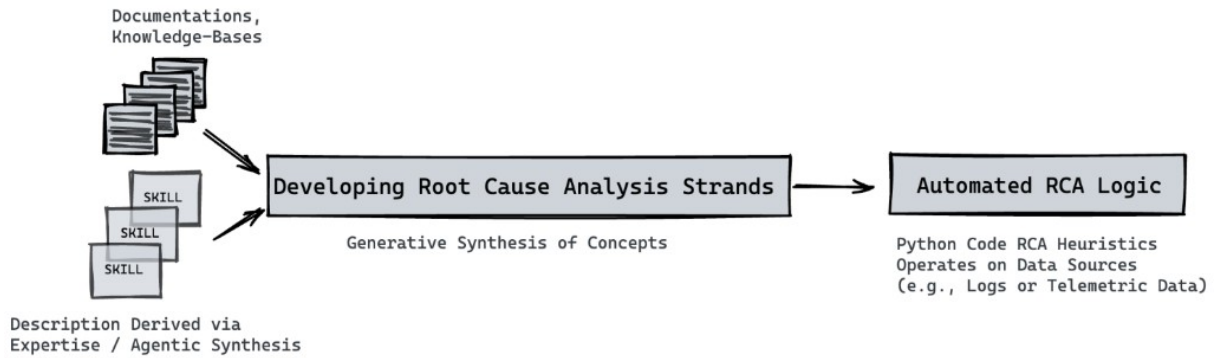


Figure 4: The offline learning process for generating Diagnostic Strands. An LLM agent ingests diverse sources of information, such as system documentation and Subject Matter Expert (SME) skills, to automatically extract and generate programmatic RCA heuristics (DSs) that operate on structured data sources.

```

def ds_ibjf_switch_environmental(ctx):
    """Majority port degradation on one IB switch
    (environmental / thermal common-mode factor)."""
    for switch_id, ports in group_by_switch(ctx.ib):
        active = [p for p in ports if is_active(p)]
        bad = [p for p in active if (
            p.effective_ber > 1e-12
            or p.plr_retry_ratio >= 1e-2
        )]
        if len(bad) < 3 or len(bad) / len(active) <= 0.5:
            continue # abstain on this switch
        if has_thermal_corroboration(active):
            # device>=80C, module>=70C, or thermal flags
            return (
                f"Hypothesis: Environmental / thermal factor "
                f"on switch {switch_id}: majority degraded "
                f"{len(bad)}/{len(active)} active ports; "
                f"remediate cooling / environment"
            )
        return (
            f"Hypothesis: Common-mode environmental factor "
            f"on switch {switch_id}: majority degraded "
            f"{len(bad)}/{len(active)} active ports; cause "
            f"ungrounded (heat vs dust/smoke/airflow)"
        )
    return ABSTAIN
  
```

Figure 5: Condensed Diagnostic Strand for correlated InfiniBand port degradation on a single switch. Independent random cable/optic faults rarely hit a majority of a chassis; the template is populated with the switch identity and the affected/active port counts, and names heat only when thermal telemetry corroborates.

on Tomcat03 (4 consecutive minutes). component=Tomcat03; reason=high CPU usage; time_hint=2021-03-09 19:43:00; reliability=medium. Evidence: KPI CPU utilization, high-direction peak $z = 236.67$ over 4 minutes.

Ranked synthesis inputs. After embedding-centroid reweighting, collapse to one hypothesis per (component, reason) and retain the top $K=8$:

1. 0.898: Tomcat03, high CPU usage, 19:43 (CPU strand)
2. 0.878: Tomcat03, network latency, 19:43 (fan-out)
3. 0.869: Tomcat03, high disk space usage, 19:43 (fan-out)

4. 0.865: Tomcat02, network latency, 19:43 (fan-out)
5. 0.862: Tomcat03, network packet loss, 19:43 (fan-out)
6. 0.859: Tomcat03, high memory usage, 19:43 (fan-out)
7. 0.859: Tomcat03, high disk I/O read usage, 19:43 (fan-out)
8. 0.852: Tomcat03, JVM OOM Heap, 19:43 (fan-out)

The true pair is rank 1. The synthesizer then emits OpenRCA JSON (score 1.0):

```

{"1": {
  "root_cause_occurrence_datetime":
    "2021-03-09 19:42:00",
  
```

```
"root cause component": "Tomcat03",  
"root cause reason": "high CPU usage"}}
```

The CPU strand's `time_hint` is 19:43 (first sustained minute on the one-minute KPI grid); the synthesizer reports 19:42, matching the record label.