

RAP: Research Attention Prediction Reveals Target-Conditioned Evidence Acquisition Biases

Yingqian Wu¹, Jingcong Liang¹, Siyuan Wang³, Zhenfei Yin⁴,
Philip Torr⁴, Junchi Yu^{4*}, Zhongyu Wei^{1,2*}

¹Fudan University

²Shanghai Innovation Institute

³The Chinese University of Hong Kong

⁴University of Oxford

wuyq25@m.fudan.edu.cn, junchi.yu@eng.ox.ac.uk, zywei@fudan.edu.cn

Abstract

Large language models (LLMs) increasingly act as research agents, yet their ability to track shifts in research attention is difficult to evaluate because reviews and research ideas lack uniquely verifiable outcomes. We introduce **Research Attention Prediction (RAP)**, a rolling benchmark covering 278 AI/ML fields and 1,390 episodes. At each cut-off, an LLM agent searches a temporally restricted arXiv corpus and predicts the next six months' paper shares across eight frozen research directions. Search generally helps, but all four diagnostic models perform worse than an exact-count exponentially weighted moving average (EWMA) baseline in compositional accuracy. We identify two linked bottlenecks. Under cumulative-history access, State carry-forward outperforms direct Forecast for all four diagnostic models; frozen-evidence replay links a shared component of this reversal to Forecast-oriented policies retrieving a smaller share of recent evidence. Even with exact historical activity, future-specific updating remains limited, with only GPT-5.5 plus reopened Search slightly surpassing EWMA. Fine-tuning on realised outcomes improves Qwen3-4B's forecast Spearman correlation by 0.105 on held-out fields at later origins, with gains also on change-rich episodes.

1 Introduction

Large language models (LLMs) are rapidly evolving from chatbots into research assistants supporting scientific workflows (Baek et al. 2025; Lu et al. 2024). Recent studies have shown that LLMs can already search the literature and generate comprehensive surveys of research fields from hundreds of papers (Asai et al. 2026; Skarlinski et al. 2024; Wang et al. 2024b). Beyond summarising existing knowledge, effective research assistants should also track how research attention evolves over time. This capability is important because many research activities, such as identifying emerging topics, prioritising scientific exploration, and supporting research planning, depend on understanding the current research landscape and anticipating where future research effort is likely to concentrate (Clauset, Larremore, and Sinatra 2017; Fortunato et al. 2018).

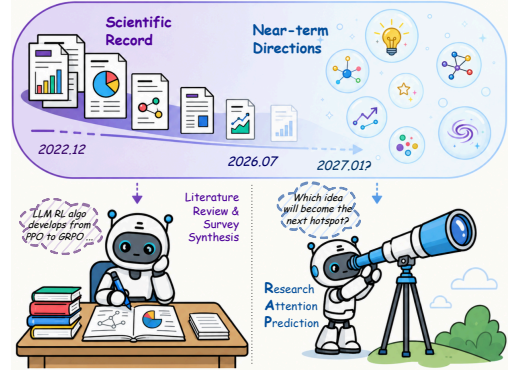


Figure 1: Compared to literature review, which surveys and summarises existing scientific records in a certain field, **Research Attention Prediction (RAP)** predicts the distribution of scientific activity in that field in the near future (e.g. six months).

Existing evaluations provide two partial views of this capability. Retrospective tasks assess the synthesis of already published work (Asai et al. 2026; Skarlinski et al. 2024; Wang et al. 2024b), but a fluent survey does not establish that the inferred field state is quantitatively accurate at a particular cut-off. Prospective benchmarks compare predictions with later scientific outcomes (Krenn et al. 2023; Luo et al. 2025; Ajith et al. 2026; Wu et al. 2026), but usually focus on individual papers, discoveries, or impacts. Neither evaluates repeated, agentic forecasting of a jointly normalised activity distribution over the same frozen within-field direction slate. We therefore ask: *Can LLM agents forecast future research attention given the past scientific record?*

To this end, we introduce **Research Attention Prediction (RAP)**, a rolling, outcome-grounded distribution-forecasting benchmark for this question (Figure 1). At each cut-off, an agent forecasts how papers first submitted over the next six months will be distributed across a fixed, field-specific direction codebook, with Search restricted to earlier literature. RAP contains 278 AI/ML fields, five semi-annual origins, and 1,390 episodes constructed from 356,357 AI/ML-oriented arXiv papers. Using first-submission dates to define

*Corresponding authors.

Benchmark	Forecast target	Temporal protocol	Output structure
What’s Next? (Ofer, Kaufman, and Linial 2024)	Topic-level future publication share	Annual step-forward	Independent scalar per topic
Science4Cast (Krenn et al. 2023)	Future link between scientific concepts	Held-out future graph	Link score/rank
PreScience (Ajith et al. 2026)	Future-paper components and impact	Cut-off-conditioned simulations	Mixed structured outputs
CUSP (Wu et al. 2026)	Event feasibility, mechanism, solution, and date	Post-cut-off events	Mixed event outputs
RAP (ours)	Direction shares of near-future arXiv submissions	Five rolling origins; frozen slate	Joint 8-way simplex

Table 1: **Comparison of scientific forecasting targets.** RAP predicts a rolling joint distribution over a fixed within-field direction slate.

both historical evidence and future outcomes enables temporally grounded evaluation across rolling forecast origins. Evaluating each field with the same frozen direction codebook at every origin makes the resulting activity distributions directly comparable over time.

RAP operationalises research attention as the relative distribution of papers first submitted to arXiv across stable, field-specific directions. It does not measure scientific importance, novelty, or value. To decompose end-to-end forecasting, we compare no Search (**Closed**), preceding-six-month Search (**Fixed-window**), and full pre-cut-off Search (**Expanding-history**), together with a matched **State** query whose carry-forward serves as an agent-specific persistence control. We reserve post-cut-off forecasting claims for target windows after each model’s documented knowledge cut-off (Cheng et al. 2024; Li et al. 2026).

Evaluation reveals a broad capability gap: Search generally improves over Closed, but no natural agent condition surpasses an exact-count exponentially weighted moving average (EWMA) baseline, even though pre-cut-off activity contains measurable signal about future departures from persistence. Furthermore, stage-wise diagnosis exposes two linked bottlenecks. Under Expanding-history, State carry-forward outperforms direct Forecast for all four diagnostic models. Frozen-evidence replay attributes a shared component to acquisition: Forecast-oriented policies allocate a smaller share of retrieved evidence to the recent six-month window, even though it is more useful for the future target. Thus, asking an agent to look ahead can change what it looks at before changing what it says. With exact history, future-specific updating remains limited; only GPT-5.5 with reopened Search slightly surpasses EWMA. Outcome-aligned fine-tuning nevertheless improves Qwen3-4B by +0.105 on later-origin episodes from dependency-disjoint Test fields, demonstrating cross-field adaptation within RAP but not a repair of the identified acquisition failure.

Our contributions are:

- **Rolling benchmark.** 1,390 outcome-grounded episodes across 278 fields, with frozen codebooks, cut-off-aligned evidence, and dependency-aware evaluation.
- **Capability decomposition.** Matched evidence regimes, state carry-forward, replay, and exact-history interventions separate acquisition, state recovery, and future up-

dating.

- **Search failure and learnability.** Across four LLM agents, Forecast shifts cumulative-history Search away from recent evidence; outcome-aligned fine-tuning demonstrates within-task learnability without establishing a mechanism-level repair.

2 Related Work

Outcome-grounded scientific forecasting. Scientific forecasting spans aggregate trends and individual artefacts. Earlier scientometric work models topic evolution and emerging areas (Griffiths and Steyvers 2004; Blei and Lafferty 2006; Chen 2006; Small 2006), forecasts field or sub-field activity and topic prevalence (Taşkın 2021; Asooja et al. 2016; Ofer, Kaufman, and Linial 2024), and predicts future links or high-impact concepts in scientific graphs (Krenn et al. 2023; Gu and Krenn 2025; Marwitz et al. 2026). Recent benchmarks forecast experimental results or scientific events (Luo et al. 2025; Wu et al. 2026), future-paper components and impact (Ajith et al. 2026), research judgments (Tian et al. 2026), or the future alignment of ideas and proposals (Jiang 2026; Wang et al. 2026). RAP instead predicts a rolling, jointly normalised field-level distribution over a frozen codebook under adaptive evidence acquisition, and pairs Forecast with a matched State intervention to separate target-conditioned search from terminal readout.

Temporal evaluation and forecasting. Temporal evaluation motivates time-sensitive and dynamically constructed tests (Lazaridou et al. 2021; Li, Guerin, and Lin 2024; Karger et al. 2025); reported cut-offs may differ from effective ones, and prompted simulated ignorance is unreliable (Cheng et al. 2024; Li et al. 2026). RAP follows rolling-origin practice, compares against persistence, exponential-smoothing, and no-change references (Hyndman and Athanasopoulos 2021; Beck, Doern, and Vogl 2025), and treats its target as a compositional share vector (Snyder et al. 2017).

Research agents and literature synthesis. Literature-based discovery and PaperRobot established earlier lines of literature-grounded connection and idea generation (Sebastian, Siew, and Orimaye 2017; Wang et al. 2019). Modern systems support retrieval-grounded synthesis (Asai et al. 2026; Skarlinski et al. 2024), automated surveys (Wang et al. 2024b;

Yan et al. 2025; Bao et al. 2025), and idea or proposal generation (Li et al. 2025; Baek et al. 2025; Wang et al. 2024a), while The AI Scientist extends this workflow to execution, drafting, and review (Lu et al. 2024). These evaluations emphasise final artefacts (Xu et al. 2025); RAP instead holds the field, cut-off, evidence universe, interface, and codebook fixed while varying State versus Forecast, enabling controlled comparison of evidence acquisition and terminal readout.

3 Research Attention Prediction

RAP combines a frozen measurement instrument with a rolling search-and-Forecast protocol. We first construct stable field-specific coordinates and outcome labels, and then evaluate agents under temporally restricted evidence access. We use *model* for the underlying LLM and *agent* for its instantiation with the RAP prompt, Search interface, and output protocol. Figure 2 illustrates the construction and evaluation of RAP.

3.1 Benchmark Construction

The measurement instrument comprises overlapping field-specific corpora, a pre-2024 direction codebook for each field, and a date-blind assignment rule applied at every rolling origin.

Field-specific corpora. Starting from 356,357 arXiv papers first submitted from 2022-06-01 through 2026-06-30 and tagged with at least one of `cs.CL`, `cs.LG`, `cs.AI`, or `cs.CV`, an open-ended structured extractor—a Qwen3.5-4B student distilled from Claude Sonnet 4.6 labels—proposes a field label for each paper. Labels are normalised, expanded by matching papers against label- and document-level prototypes, and conservatively merged. Retaining fields with at least 300 paper–field memberships before 2026-01-01 yields 281 overlapping corpora; 278 admit valid direction codebooks, comprising 578,745 paper–field memberships over 279,365 unique papers; these operational fields do not partition AI/ML. Field eligibility is retrospectively frozen, but codebook construction uses only pre-2024 evidence and every evaluation episode exposes only pre- T papers. Construction details and sampling-frame sensitivity are reported in the appendices.

Frozen direction codebooks. Using only pre-2024 evidence, GPT-5.5 and Claude Opus 4.6 independently draft field-specific candidate codebooks. Their anonymised union is revised and consolidated by GPT-5.5 into exactly eight operational directions. Each direction has a name, definition, inclusion and exclusion boundaries, and pre-2024 exemplars. The resulting codebook is frozen across origins. Its directions are operational coordinates rather than an exhaustive taxonomy of the field.

Time-invariant assignment and rolling targets. For field f , let $\mathcal{D}_f = \{d_1, \dots, d_8\}$ denote its frozen directions. A date-blind classifier uses each paper’s title and abstract together with the written codebook to assign a primary label in $\mathcal{D}_f$ or `OTHER`. The same rule is used at every origin.

For forecast origin T and direction $d \in \mathcal{D}_f$, let $n_{f,T,d}$ be the number of papers holding a membership in field f , first

submitted on or after T and before $T + 6$ months, that receive primary label d . The realised target share is

$$y_{f,T,d} = \frac{n_{f,T,d}}{\sum_{d' \in \mathcal{D}_f} n_{f,T,d'}},$$

where d' indexes the eight directions. Therefore, $y_{f,T} = (y_{f,T,d})_{d \in \mathcal{D}_f}$ is an eight-dimensional non-negative composition summing to one (Snyder et al. 2017). Papers labelled `OTHER` are excluded from normalisation; the eight directions cover 0.994 of future-window memberships on average.

Rolling origins and splits. Following rolling-origin evaluation practice (Hyndman and Athanasopoulos 2021), each field contributes five semi-annual origins from 2024-01 through 2026-01, yielding 1,390 episodes under a fixed field definition, codebook, and assignment rule. To limit leakage from overlapping corpora, all origins of a field and strongly overlapping fields are assigned together through frozen dependency blocks. The resulting split contains **Dev** (67 fields; 335 episodes) for protocol development and held-out **Test** (211 fields; 1,055 episodes) for final evaluation. The same blocks are used for primary uncertainty estimates; the overlap graph and split algorithm are detailed in the appendices.

3.2 Evaluation Protocol

Agent task and search interface. We evaluate the complete search-and-Forecast pipeline rather than forecasting from supplied papers or exact counts. The agent receives f , T , and the written definitions of $\mathcal{D}_f$, but no retrieved papers. It may adaptively query the temporally eligible part of the field-specific corpus, receiving hit counts and dated titles and abstracts, before returning eight non-negative percentage weights that sum to 100.

Evidence-access regimes. We vary only the searchable temporal scope. **Fixed-window** exposes papers first submitted in $[T - 6\text{mo}, T]$; **Expanding-history** exposes all papers in the same field-specific corpus first submitted before T ; and **Closed** disables Search. Because the target is a *level forecast* (next-window shares rather than changes), persistence is legitimate information: the primary score combines recent-state recovery with future-specific updating and is not, by itself, a pure measure of anticipating change.

Primary score and aggregation. Let $p_{f,T}$ be the normalised Forecast and $y_{f,T}$ the realised target. Because finite-window counts support relative ordering more reliably than fine-grained magnitudes, the primary episode score is Spearman rank agreement $\rho(p_{f,T}, y_{f,T})$; higher is better. A valid uniform prediction carries no ranking information and receives zero. Total-variation distance (TV) and Jensen–Shannon divergence (JSD) provide magnitude-sensitive checks. Scores are averaged over origins within field and then across fields; primary intervals resample dependency blocks.

Statistical references and secondary diagnostics. We compute Recent (last-window persistence), exponentially weighted moving average (EWMA), linear-trend, and Dev-tuned autoregressive integrated moving average (ARIMA),

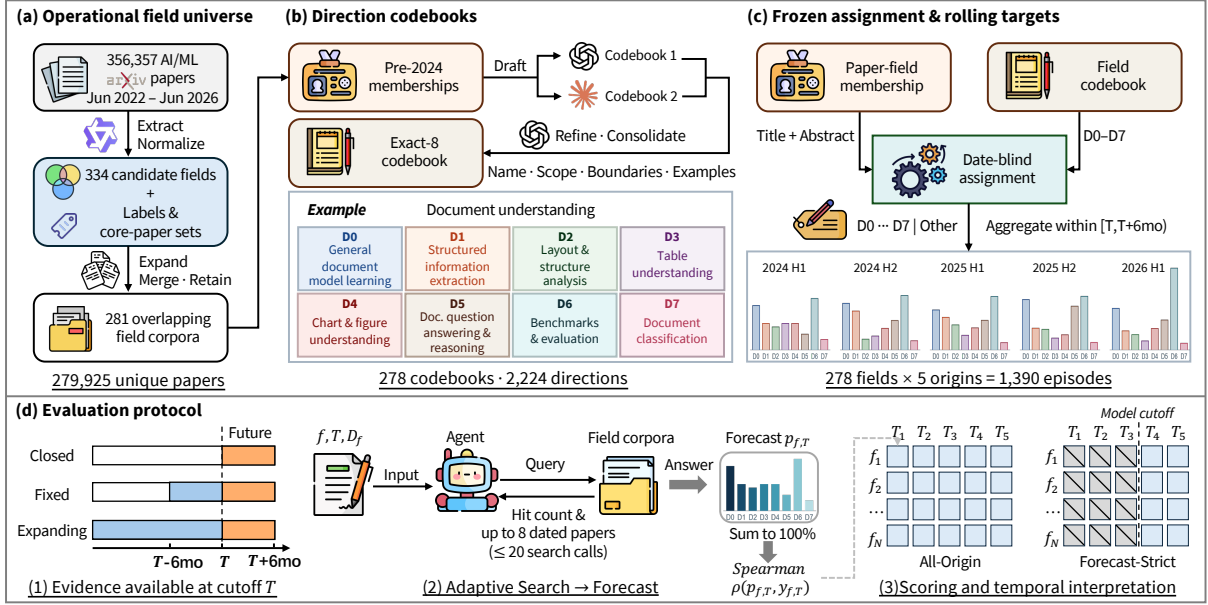


Figure 2: **Construction and evaluation of Research Attention Prediction (RAP).** (a) Open-ended field extraction, normalisation, and membership expansion convert a frozen AI/ML-oriented arXiv subset into overlapping field-specific corpora. (b) Pre-2024 memberships are independently organised into candidate codebooks and consolidated into a frozen, field-specific slate of exactly eight operational research directions; one example is shown. (c) A date-blind assignment instrument maps each paper–field membership to one direction or OTHER; aggregating assignments within successive six-month windows yields the realised rolling targets, with OTHER excluded from eight-way normalisation. (d) At cut-off T , an agent receives the field and its codebook and forecasts the next-window direction shares under Closed, Fixed-window, or Expanding-history evidence access. Forecasts are scored against the realised distribution using episode-level Spearman agreement.

Holt, and vector autoregression (VAR) references from exact benchmark counts, quantifying predictability without Search; they are not same-interface agents (Hyndman and Athanasopoulos 2021; Beck, Dovern, and Vogl 2025). Future-specific claims use EWMA-controlled residual association, compositional gain over EWMA, output-independent change-rich subsets, and rolling revision alignment. Complete definitions and the statistical baseline family are reported in the appendices.

3.3 Benchmark Validity

Target reliability. Split-half Spearman–Brown reliability is 0.820, and an independent posterior-predictive estimate is 0.828 [0.816, 0.839], implying an approximate observable-score ceiling of 0.910. We also found 6-, 12-, and 18-month revision targets (cross-window changes in the share vector) substantially noisier (0.149, 0.298, and 0.405); hence the six-month level composition is primary and revision metrics are secondary.

Persistence and predictable departures. On Test, Recent and EWMA reach 0.794 and 0.803; EWMA lies 0.108 below the approximate Test-set reliability-implied ceiling, confirming strong persistence. RAP nevertheless contains measurable change. A pre-frozen, model-output-independent subset selected for significant and reliable recent-to-future distribution change contains 141 episodes; EWMA falls to 0.744, yet these departures are not mere noise: a pre- T linear

trend still predicts the realised deviations from EWMA, with permutation-corrected residual-direction alignment +0.151 [+0.013, +0.288]. Stable episodes remain in the full benchmark as predicting stability is part of forecasting; see Appendix D for exact stress-test definitions.

Semantic and construction robustness. The primary label is a counting convention rather than noiseless gold: the assignment instrument marks 42.60% of memberships as boundary cases carrying a plausible secondary direction. Rescoring frozen predictions against 4 pre-frozen targets that keep, split, drop, or flip this boundary mass changes absolute levels but preserves the five-condition ordering in 15 of 16 model–policy combinations across the four diagnostic models. The sole exception is a 0.002 near-tie for GPT-OSS-120B; every model retains the signs of Fixed Forecast minus Closed, Expanding Forecast minus Fixed Forecast, and Expanding State carry-forward minus Forecast. A second model family independently constructs and applies codebooks for 38 fields; despite imperfect paper-level agreement, the induced EWMA score and target repeatability under counting noise remain close to the primary instrument. Appendix B reports the independent human annotation and instrument comparisons, and Table 5 gives the four-model policy results.

Method/Model	Knowledge cut-off	All-Origin			Forecast-Strict		
		Closed	Fixed	Expanding	Closed	Fixed	Expanding
Recent persistence	—		0.794			0.821	
EWMA (primary reference)	—		0.803			0.840	
ARIMA(1,1,0)	—		0.805			0.844	
Linear trend	—		0.725			0.760	
Qwen3-4B	≤2025-04 (release)	0.148	0.300	0.222	0.119	0.321	0.202
Qwen3-8B	≤2025-04 (release)	0.163	0.275	0.257	0.159	0.297	0.208
Qwen3.6-27B	not documented	0.320	0.448	0.439	—	—	—
GPT-OSS-120B	2024-06	0.249	0.384	0.290	0.226	0.353	0.248
DeepSeek-V3	~2024-07	0.312	0.309	0.305	0.234	0.250	0.251
Claude Haiku 4.5*	2025-02	0.320	0.448	0.425	0.256	0.432	0.392
GPT-5.5*	2025-12	0.502	0.595	0.581	0.476	0.589	0.557

Table 2: **RAP forecast leaderboard.** All-Origin includes all 1,055 Test episodes which may overlap a model’s parametric training horizon. Forecast-Strict fixes $T = 2026 - 01$ and uses the same 211 Test episodes for every model with an eligible documented cut-off or release-date bound (hence Qwen3.6-27B is not included). Mechanical baselines (upper block) use exact pre- T direction counts and are shown once per temporal track. Bold marks the best score in each track. *: proprietary model.

4 Main Results

4.1 Protocol and Temporal Views

We evaluate the Closed, Fixed-window, and Expanding-history regimes defined in Section 3. The two retrieval regimes share the same field-local BM25 interface, call limit, and zero temperature; only the searchable temporal scope differs.

We report two temporal views. **All-Origin** uses all five origins and supports controlled historical analysis, but some targets may overlap a model’s parametric training horizon. **Forecast-Strict** retains only cells whose complete target window follows the documented model cut-off or release-date bound. The shared comparison fixes $T = 2026 - 01$ and the same 211 fields for every eligible model; earlier-cut-off models additionally support within-model strict rolling analyses.

4.2 Forecast Performance

Persistence remains dominant. Table 2 presents the main leaderboard. Across all origins, Recent persistence, EWMA, and the Dev-tuned ARIMA reference outperform the strongest agent condition. Expanding the statistical family does not change this conclusion: ARIMA is numerically but not reliably above EWMA, while additive Holt and ridge VAR perform worse. We retain EWMA as the primary persistence anchor because it is transparent, competitive, and supplies an episode-specific compositional reference for the residual analyses; the complete baseline family is reported in the appendices. Because the target-reliability and change-rich analyses establish reliable departures from persistence and a pre- T trend signal, this gap does not imply an intrinsically unpredictable target. It does mean that the leaderboard measures operational next-window level forecasting; claims about anticipating change require separate persistence-controlled analyses.

Retrieval helps selectively, but cumulative history does not. Fixed-window retrieval improves over Closed for six of the seven agents, with DeepSeek-V3 the exception.

Expanding-history is lower than Fixed-window for all seven, essentially unchanged only for DeepSeek-V3, with the largest drop for GPT-OSS-120B. Thus, access to the literature can improve Forecast, but exposing a larger cumulative record does not make that evidence any easier to use.

Forecasting beyond persistence. Let $e_{f,T}$ be the exact three-window EWMA. We compare $p_{f,T} - e_{f,T}$ with $y_{f,T} - e_{f,T}$ using permutation-corrected residual-direction alignment, and pair this diagnostic with TV gain over EWMA and a model-output-independent change-rich analysis. The combination matters: residual direction alone can reward a forecast that merely re-weights past windows differently, without bringing the complete forecast closer to the future.

Across the four diagnostic models (GPT-5.5, Qwen3.6-27B, GPT-OSS-120B, and DeepSeek-V3), no agent condition improves TV over EWMA. GPT-5.5 and Qwen3.6-27B retain weak all-origin residual alignment, but GPT-OSS-120B and DeepSeek-V3 show little or none. Fixed retrieval improves TV relative to Closed for GPT-5.5 and Qwen3.6-27B, yet neither model gains residual-direction alignment from retrieval. At the latest common origin ($T = 2026 - 01$), agent residual alignment is near zero or negative while a pre- T linear trend remains positive. Current agents therefore recover useful activity levels without reliably converting retrieval into a calibrated update beyond persistence. Complete residual, compositional, and change-rich results are in the appendices.

The pattern persists after knowledge cut-off. At the shared Forecast-Strict origin, Fixed-window remains above Closed for Qwen3-4B, Qwen3-8B, GPT-OSS-120B, Claude Haiku 4.5, and GPT-5.5, while DeepSeek-V3 changes little. Expanding-history remains below Fixed-window for the same five models and is essentially unchanged for DeepSeek-V3. All eligible agents remain below EWMA and ARIMA.

Forecast-Strict supports post-cut-off forecasting claims; All-Origin supports controlled historical evidence-use and rolling diagnostics. Complete strict-origin trajectories and

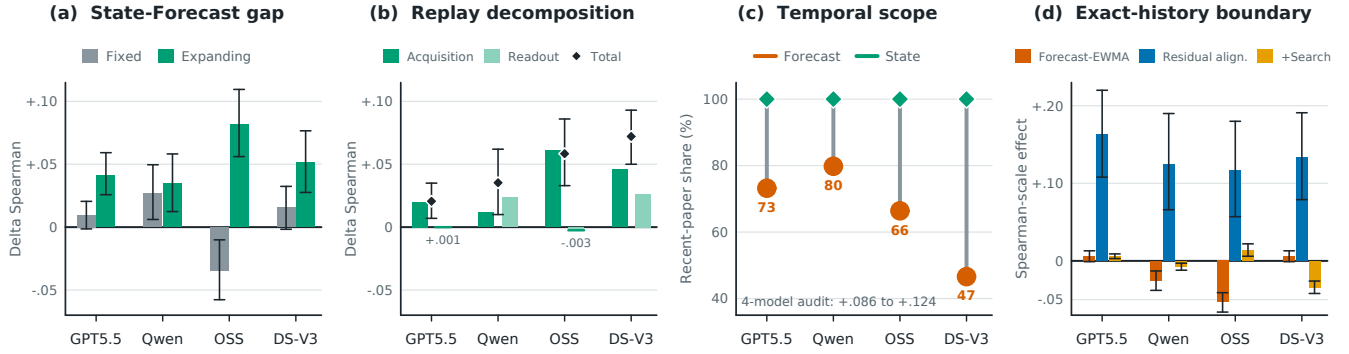


Figure 3: Four linked diagnostics on the Test panel (Section 5). **(a)** State-as-Forecast minus Forecast under Fixed and Expanding access. **(b)** Matched-call replay decomposes the gap into acquisition and readout contributions. **(c)** Forecast and State shares of retrieved papers from the recent six months; the annotation reports evidence–future alignment gains from the four-model same-query counterfactual. **(d)** With exact history, Forecast minus EWMA, residual-direction alignment, and the marginal effect of reopening Search. Bars and points are field-macro estimates; thin error bars show the corresponding 95% intervals. Complete replay matrices, strict slices, and compositional metrics are in Appendices E and F.

exposure-stratified contrasts are in the appendices.

Overall, retrieval can improve the future level without resolving beyond-persistence updating, while cumulative history fails to improve Forecast over fixed-window access for any of the seven agents. This separates two diagnostic boundaries—recovering a useful time-local activity level and updating it toward the future—without assuming a fixed internal pipeline. We next test whether the cumulative-history failure is carried by evidence acquisition or by the terminal readout.

5 Diagnosing Target-Conditioned Search Failure

Table 2 shows that cumulative-history access does not improve Forecast over fixed-window access and that natural agents remain below persistence. Figure 3 diagnoses one repeatable component: with a long searchable record, the future-oriented target changes the evidence acquired. The analysis proceeds from an end-to-end reversal to frozen-evidence localisation, an observable Search signature, and an exact-history boundary; it does not attribute every forecasting failure to acquisition.

The panel contains GPT-5.5, Qwen3.6-27B, GPT-OSS-120B, and DeepSeek-V3. A matched **State** intervention estimates the realised direction distribution in the preceding six months. Carrying it forward gives **State-as-Forecast**, an agent-specific persistence reference using the same Search interface rather than oracle counts. Its advantage over Forecast means that the forward-looking target worsened prediction relative to the state the same agent could reconstruct, not that either output anticipated change.

5.1 The Reversal Appears Under Cumulative History

Matched Forecast and State runs hold fixed the field, cut-off, codebook, backend, searchable universe, call limit, and out-

put schema; only the requested target initially differs, after which Search trajectories may diverge. Under Expanding-history, State-as-Forecast outperforms Forecast for all four models (Figure 3(a)). Fixed-window gaps are smaller and sign-inconsistent. Thus the reversal is specific to selecting time-relevant evidence from a long record, rather than State being universally easier. Its sign persists in every eligible post-cut-off comparison; full exposure analysis is in the appendices.

5.2 Frozen Replay Localises a Shared Loss to Acquisition

The end-to-end gap may arise because Forecast acquires worse evidence or uses identical evidence worse. We replay each Expanding-history trajectory under both readout objectives, keeping its ordered queries and observations byte-identical. Under a common Forecast readout, State-oriented evidence improves future accuracy for every model. After truncating each pair to its shared episode-specific Search-call budget (Figure 3(b)), the effect is robust for GPT-5.5, GPT-OSS-120B, and DeepSeek-V3, and positive but uncertain for Qwen3.6-27B. Changing only the readout over State evidence is small for GPT-5.5 and GPT-OSS-120B but consequential for the other two. Acquisition is therefore a shared component of the reversal, although matched calls do not equalise retrieved-paper volume or identity; complete matrices and audits are in the appendices.

5.3 The Shared Search Signature Is Temporal Scope

State Search places all returned paper slots (including repeats) in the preceding six months, versus 47–80% for Forecast (Figure 3(c)). This is not simply lower-volume retrieval: State yields fewer distinct papers for three models but more for Qwen3.6-27B, while Forecast/State paper-set overlap remains low. For every model, State evidence better matches both recent and future realised distributions.

We then deterministically re-execute 86,284 recorded Search calls across all four diagnostic models. Every call reproduces its native paper IDs and ordering on the frozen corpus. Under identical recent-window relevance options, the State-query evidence–future advantage is at most $+0.011$ and is negative for three models; no model’s 95% interval excludes zero. Applying these options to Forecast’s own queries instead improves evidence–future alignment by $+0.086$ – $+0.124$ (Table 21). Because this counterfactual does not rerun the readout, it does not estimate repaired Forecast accuracy. It identifies temporal-scope allocation as a shared Search signature rather than a general advantage of State query wording.

5.4 Exact History Reveals a Second Boundary

We next provide exact recent or three-window pre- T direction distributions while retaining the evaluation prompt, schema, and scoring. This bypasses natural acquisition and aggregation and is diagnostic, not deployable. Every model then has positive permutation-corrected residual-direction alignment (Figure 3(d)), but not a reliable complete Forecast advantage: GPT-5.5 and DeepSeek-V3 show no statistically resolved advantage over EWMA in rank agreement, while Qwen3.6-27B and GPT-OSS-120B remain below it. Reopening Expanding Search improves level accuracy for GPT-5.5 and GPT-OSS-120B but degrades it for the other two; only GPT-5.5 surpasses EWMA. No model converts its within-origin residual signal into positive six-month revision tracking.

These interventions expose two boundaries: recovering and preserving a time-local state is a major bottleneck, and the Forecast target can damage that recovery by redirecting Search. Even with exact history, calibrated beyond-persistence updating remains unresolved.

5.5 Outcome Supervision Provides a Learnable Within-Task Signal

As a consequential check, we perform full-parameter, full-trajectory supervised fine-tuning (SFT) of Qwen3-4B on 90 outcome-aligned Forecast trajectories from 45 training fields at the 2024-07 origin. We evaluate fresh native roll-outs at two later origins over all 211 dependency-disjoint Test fields. Compared with Base, pooled Forecast Spearman improves by 0.105: 0.072 under Fixed-window and 0.138 under Expanding-history. The gain is 0.159 on the pre-specified change-rich subset, and all 844 outputs are valid. This establishes learnability across fields and later origins, but not a mechanism-level repair: Search use and recent-state anchoring increase, whereas pooled residual-direction and six-month revision-alignment gains remain unresolved. Nor is it strict post-cut-off learning, because Qwen3-4B’s effective cut-off is undocumented. Training, gating, and diagnostics are in the appendices.

6 Discussion and Limitations

Two diagnostic capability boundaries. RAP exposes two related but non-identical limitations. An agent must recover a useful time-local activity level from the available record,

and its explicit Forecast must add a reliable update beyond persistence. These empirical boundaries do not imply that the agent internally follows a fixed two-stage algorithm. The protocol-matched oracle-history intervention identifies state recovery as a major bottleneck: once exact historical activity is supplied, GPT-5.5 recovers most of the level gap and exhibits positive residual alignment. Future updating remains limited: exact history alone yields no reliable advantage over EWMA, and reopening Search produces a small advantage over EWMA only for GPT-5.5. No model reliably tracks six-month revisions. The marginal effect of Search with exact history is model-dependent, while under natural cumulative-history access the Forecast objective changes the evidence used for level recovery.

The requested target shapes evidence acquisition. In an agentic literature workflow, evidence is not a fixed input: the requested target can change which queries are issued, which papers are retrieved, and when search terminates. Frozen-evidence replay separates this dependence from the terminal readout. State-oriented trajectories support better Forecast readouts even after Search-call counts are matched, whereas changing only the readout over byte-identical evidence usually has a substantially smaller effect. Final-answer evaluation alone can therefore misattribute an evidence-acquisition failure to forecast synthesis, and state serves as a diagnostic intervention for this distinction.

Temporal and interpretive claim boundaries. RAP targets are fixed across evaluated agents, but some All-Origin episodes fall within an evaluated model’s reported knowledge horizon. We therefore interpret All-Origin as a controlled analysis of evidence use and reserve post-cut-off forecasting claims for Forecast-Strict cells; exposure-stratified re-scoring preserves the direction of the Expanding-history penalty, the State–Forecast reversal, and the acquisition advantage in every eligible strict comparison. Because the primary endpoint is the next-window level composition, it is also persistence-dependent, and a high level score cannot by itself support a claim of anticipating change. We reserve that narrower claim for persistence-controlled residual association, model-output-independent change-rich subsets, and revision alignment, which are secondary evaluations of the same frozen forecasts rather than a redefinition of the model-facing task.

Construct and sampling limitations. The distribution of new arXiv submissions is an observable proxy for the allocation of research activity, and does not measure scientific quality, impact, or novelty. The eight directions are frozen operational coordinates rather than a unique expert taxonomy, and they measure reallocation among established programs more directly than the emergence of directions outside the codebook. Field eligibility is based on eventual corpus volume, so RAP emphasises research areas that attain sustained scale. Paper assignments contain genuine boundary cases; we assess robustness under pre-frozen ambiguity-aware counting policies and independently drafted codebooks, and report an independent blinded annotation in the appendices. The direction taxonomy has not been validated by domain experts, and we make no claim that the exact-eight slate is a unique

or expert-endorsed decomposition of any field.

Conclusion. RAP turns one forward-looking component of research assistance into a dense, rolling, and retrospectively verifiable prediction problem. Under natural evidence access, current agents can use retrieval to improve the predicted activity level, yet they do not reliably convert that evidence into calibrated departures from persistence. Under cumulative literature access, looking ahead can additionally change what an agent looks at: the Forecast objective redirects evidence acquisition before giving the final answer and sacrifices useful recent-state evidence. Exact-history intervention shows that this is not an absolute inability to Forecast, since GPT-5.5 exhibits partial conditional updating. RAP does not equate arXiv submission shares with scientific judgment; it provides an instrument for separately testing evidence acquisition, reconstruction of the present, and future-specific updating.

Data and code availability. We plan to release the benchmark data and evaluation code upon acceptance.

References

- Ajith, A.; Singh, A.; DeYoung, J.; Kunievsky, N.; Kozlowski, A. C.; Tafford, O.; Evans, J.; Weld, D. S.; Hope, T.; and Downey, D. 2026. PreScience: A Dataset and Benchmark for Scientific Forecasting. *arXiv preprint arXiv:2602.20459*.
- Asai, A.; He, J.; Shao, R.; et al. 2026. Synthesizing scientific literature with retrieval-augmented language models. *Nature*, 650(8103): 857–863.
- Asooja, K.; Bordea, G.; Vulcu, G.; and Buitelaar, P. 2016. Forecasting Emerging Trends from Scientific Literature. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC’16)*, 417–420.
- Baek, J.; Jauhar, S. K.; Cucerzan, S.; and Hwang, S. J. 2025. ResearchAgent: Iterative Research Idea Generation over Scientific Literature with Large Language Models. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, 6709–6738.
- Bao, T.; Nayeem, M. T.; Rafiei, D.; and Zhang, C. 2025. SurveyGen: Quality-Aware Scientific Survey Generation with Large Language Models. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, 2712–2736.
- Beck, N.; Dovern, J.; and Vogl, S. 2025. Mind the naive forecast! A rigorous evaluation of forecasting models for time series with low predictability. *Applied Intelligence*, 55(6). Article 395.
- Blei, D. M.; and Lafferty, J. D. 2006. Dynamic Topic Models. In *Proceedings of the 23rd International Conference on Machine Learning*, 113–120.
- Chen, C. 2006. CiteSpace II: Detecting and Visualizing Emerging Trends and Transient Patterns in Scientific Literature. *Journal of the American Society for Information Science and Technology*, 57(3): 359–377.
- Cheng, J.; Marone, M.; Weller, O.; Lawrie, D.; Khashabi, D.; and Van Durme, B. 2024. Dated Data: Tracing Knowledge Cutoffs in Large Language Models. *arXiv preprint arXiv:2403.12958*.
- Clauset, A.; Larremore, D. B.; and Sinatra, R. 2017. Data-driven predictions in the science of science. *Science*, 355(6324): 477–480.
- Fortunato, S.; Bergstrom, C. T.; Börner, K.; Evans, J. A.; Helbing, D.; Milojević, S.; Petersen, A. M.; Radicchi, F.; Sinatra, R.; Uzzi, B.; Vespignani, A.; Waltman, L.; Wang, D.; and Barabási, A.-L. 2018. Science of science. *Science*, 359(6379): eaao0185.
- Griffiths, T. L.; and Steyvers, M. 2004. Finding scientific topics. *Proceedings of the National Academy of Sciences*, 101(suppl. 1): 5228–5235.
- Gu, X.; and Krenn, M. 2025. Forecasting high-impact research topics via machine learning on evolving knowledge graphs. *Machine Learning: Science and Technology*, 6(2): 025041.
- Hyndman, R. J.; and Athanasopoulos, G. 2021. *Forecasting: Principles and Practice*. Melbourne, Australia: OTexts, 3rd edition.
- Jiang, B. 2026. HindSight: Evaluating LLM-Generated Research Ideas via Future Impact. *arXiv preprint arXiv:2603.15164*.
- Karger, E.; Bastani, H.; Chen, Y.-H.; Jacobs, Z.; Halawi, D.; Zhang, F.; and Tetlock, P. E. 2025. ForecastBench: A Dynamic Benchmark of AI Forecasting Capabilities. In *International Conference on Learning Representations*.
- Krenn, M.; Buffoni, L.; Coutinho, B.; et al. 2023. Forecasting the future of artificial intelligence with machine learning-based link prediction in an exponentially growing knowledge network. *Nature Machine Intelligence*, 5(11): 1326–1335.
- Lazaridou, A.; Kuncoro, A.; Gribovskaya, E.; Agrawal, D.; Liska, A.; Terzi, T.; Gimenez, M.; de Masson d’Autume, C.; Kočiský, T.; Ruder, S.; Yogatama, D.; Cao, K.; Young, S.; and Blunsom, P. 2021. Mind the Gap: Assessing Temporal Generalization in Neural Language Models. In *Advances in Neural Information Processing Systems 34*, 29348–29363.
- Li, L.; Xu, W.; Guo, J.; Zhao, R.; Li, X.; Yuan, Y.; Zhang, B.; Jiang, Y.; Xin, Y.; Dang, R.; Rong, Y.; Zhao, D.; Feng, T.; and Bing, L. 2025. Chain of Ideas: Revolutionizing Research Via Novel Idea Development with LLM Agents. In *Findings of the Association for Computational Linguistics: EMNLP 2025*, 8971–9004.
- Li, Y.; Guerin, F.; and Lin, C. 2024. LatestEval: Addressing Data Contamination in Language Model Evaluation through Dynamic and Time-Sensitive Test Construction. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(17): 18600–18607.
- Li, Z.; Wang, Y.; El Lahib, A.; Xia, Y.-J.; and Pi, X. 2026. Simulated Ignorance Fails: A Systematic Study of LLM Behaviors on Forecasting Problems Before Model Knowledge Cutoff. *arXiv preprint arXiv:2601.13717*.

- Lu, C.; Lu, C.; Lange, R. T.; Foerster, J.; Clune, J.; and Ha, D. 2024. The AI Scientist: Towards Fully Automated Open-Ended Scientific Discovery. *arXiv preprint arXiv:2408.06292*.
- Luo, X.; Rechart, A.; Sun, G.; et al. 2025. Large language models surpass human experts in predicting neuroscience results. *Nature Human Behaviour*, 9(2): 305–315.
- Marwitz, T.; Colsmann, A.; Breitung, B.; et al. 2026. Predicting new research directions in materials science using large language models and concept graphs. *Nature Machine Intelligence*, 8(4): 535–544.
- Ofer, D.; Kaufman, H.; and Linial, M. 2024. What’s next? Forecasting scientific research trends. *Heliyon*, 10(1): e23781.
- Sebastian, Y.; Siew, E.-G.; and Orimaye, S. O. 2017. Emerging approaches in literature-based discovery: Techniques and performance review. *The Knowledge Engineering Review*, 32: e12.
- Skarlinski, M. D.; Cox, S.; Laurent, J. M.; Braza, J. D.; Hinks, M.; Hammerling, M. J.; Ponnampati, M.; Rodrigues, S. G.; and White, A. D. 2024. Language agents achieve superhuman synthesis of scientific knowledge. *arXiv preprint arXiv:2409.13740*.
- Small, H. 2006. Tracking and predicting growth areas in science. *Scientometrics*, 68(3): 595–610.
- Snyder, R. D.; Ord, J. K.; Koehler, A. B.; McLaren, K. R.; and Beaumont, A. N. 2017. Forecasting compositional time series: A state space approach. *International Journal of Forecasting*, 33(2): 502–512.
- Taşkın, Z. 2021. Forecasting the future of library and information science and its sub-fields. *Scientometrics*, 126(2): 1527–1551.
- Tian, Q.; Yin, H.; Xia, Y.; Kong, Y.; and Liu, Z. 2026. ForeSci: Evaluating LLM Agents for Forward-Looking AI Research Judgment. *arXiv preprint arXiv:2606.00644*.
- Wang, H.; Jiang, P.; Sun, J.; Shi, Z.; Yu, H.; Han, J.; and Ji, H. 2026. Learning to Predict Future-Aligned Research Proposals with Language Models. *arXiv preprint arXiv:2603.27146*.
- Wang, Q.; Downey, D.; Ji, H.; and Hope, T. 2024a. SciMON: Scientific Inspiration Machines Optimized for Novelty. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 279–299.
- Wang, Q.; Huang, L.; Jiang, Z.; Knight, K.; Ji, H.; Bansal, M.; and Luan, Y. 2019. PaperRobot: Incremental Draft Generation of Scientific Ideas. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 1980–1991.
- Wang, Y.; Guo, Q.; Yao, W.; Zhang, H.; Zhang, X.; Wu, Z.; Zhang, M.; Dai, X.; Zhang, M.; Wen, Q.; Ye, W.; Zhang, S.; and Zhang, Y. 2024b. AutoSurvey: Large Language Models Can Automatically Write Surveys. In *Advances in Neural Information Processing Systems 37*, 115119–115145.
- Wu, S.; Lu, P.; Chen, Y.; Bragg, J.; Yamada, Y.; Clark, P.; Clifton, D.; Torr, P.; Zou, J.; and Yu, J. 2026. Scientific reasoning does not reliably translate into scientific forecasting in frontier AI. *arXiv preprint arXiv:2605.22681*.
- Xu, T.; Lu, P.; Ye, L.; Hu, X.; and Liu, P. 2025. Researcher-Bench: Evaluating Deep AI Research Systems on the Frontiers of Scientific Inquiry. *arXiv preprint arXiv:2507.16280*.
- Yan, X.; Feng, S.; Yuan, J.; Xia, R.; Wang, B.; Bai, L.; and Zhang, B. 2025. SurveyForge: On the Outline Heuristics, Memory-Driven Generation, and Multi-dimensional Evaluation for Automated Survey Writing. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 12444–12465.

A Benchmark Construction and Measurement Instrument

A.1 Operational scope and leakage control

RAP treats a field and its eight directions as an operational measurement instrument rather than a unique natural taxonomy. The field sampling frame was retrospectively frozen from the corpus available through the end of 2025. Direction names, definitions, and exemplars were constructed from evidence before 2024, and every evaluation-time search environment physically excludes papers posted on or after the episode cutoff T . Thus, selection into the field universe may use post-2023 information, while neither the direction slate nor the evidence shown within an episode exposes its future target. The source snapshot extends through June 2026 only to construct later outcome windows; field-retention counts remain censored at the end of 2025.

Freeze order and leakage control. The field universe, direction slates, paper assignments, ambiguity policies, and dependency-aware Dev/Test split were fixed before any Test model output was inspected. The A0–A4 protocol was finalized using only the Dev-8 semantic check, followed by the completed Dev-67 gate before Test evaluation. Table 27 identifies the corresponding frozen artifacts and hashes.

A.2 Field extraction, expansion, and retention

The frozen source snapshot contains 356,357 unique arXiv papers whose first submission falls in [2022-06-01, 2026-07-01) and whose category list contains at least one of `cs.CL`, `cs.LG`, `cs.AI`, or `cs.CV`. It is a four-category operational subset rather than the full computer-science arXiv corpus.

Distilled structured extractor. Open-ended field extraction is performed by a distilled extractor rather than by any evaluated frontier model. A teacher model (Claude Sonnet 4.6) labels a random sample of 10,000 papers with a five-field structured schema (field, problem, technical focus, setting, direction), and a Qwen3.5-4B student is trained on these labels with full-parameter SFT (9,500/500 train/validation split). On the held-out set, all 500 outputs are valid structured records, field labels agree with the teacher at embedding cosine 0.876, and direction texts retrieve their teacher counterpart at top-1 accuracy 0.990. The student is applied to all 356,357 papers; 48 initially invalid outputs are repaired deterministically (18) or by the teacher (30), leaving zero invalid records. The extractor emits 110,700 distinct raw field strings, and the 9,514 strings occurring at least five times are normalised by the teacher into 3,107 candidate parent labels. This Qwen3.5-4B construction extractor is distinct from the Qwen3-4B benchmark student evaluated and adapted in Appendix F.5.

Membership expansion. Each normalized parent field initially contains the papers whose extracted label maps exactly to it; these high-precision seed papers define the field. We then score additional paper–field pairs using two embedding views: similarity between the extracted field label and the parent/child field labels, and similarity between the paper’s

title and abstract and clusters of seed papers. An additional membership is accepted when the field is among the top five candidates in both views and the lower similarity is at least 0.80, a threshold selected by a 500-pair dual-model blind audit. The audit mixed seven 60-pair score bins with 80 hidden seed-positive controls and concealed the score, bin, control status, and extracted source field from GPT-5.5 and Claude Opus 4.6. A pair counted as valid when both auditors judged the field primary or substantively secondary. The frozen rule chose the lowest boundary at which each auditor and their joint judgement reached 0.90 validity in that bin and all higher bins: joint validity was 0.883 in the 0.75–0.80 bin and 0.917 in the 0.80–0.85 bin. The resulting population-weighted joint-valid estimate is 0.926 [0.856, 0.983]. For unresolved near-boundary candidates, Qwen3.6-27B compares the paper with five pre-2024 field exemplars; only a *primary* verdict adds a canonical membership. Papers may belong to multiple fields, while either stage may abstain.

Only same-granularity synonym aliases are merged. We retain merged fields with at least 300 memberships before 2026-01-01, yielding 281 membership fields. The subsequent direction-codebook gate succeeds for 278 fields. Restricting memberships to these final fields yields 578,745 paper–field pairs covering 279,365 unique papers. A paper may belong to multiple fields, so the resulting field-specific corpora overlap.

A.3 Retrospective field-universe conditioning

Field eligibility is determined using membership counts through the end of 2025, including observations after the earlier forecast origins. Membership prototypes also use seed papers and label frequencies through the end of 2025. Thus, both field eligibility and the membership instrument use retrospective information; direction codebooks are constructed from pre-2024 evidence, and model-facing retrieval remains restricted by each episode’s cutoff. Table 3 reports how many retained fields already met the same threshold before the earliest forecast origin.

Scope	Pre-2024 memberships $\geq$ 300 < 300	
All fields	149	129
Dev	42	25
Test	107	104

Table 3: Eligibility of the frozen field universe under the same membership threshold applied using only papers before 2024.

Pre-2024-eligible sensitivity. We restrict the frozen Test outputs to the 107 Test fields that already met the 300-membership threshold before 2024. Table 4 applies this restriction to all seven Forecast agents. Across the 21 model-condition cells, the absolute change from the full Test estimate is at most .046. Fixed-window remains above Closed for six models; DeepSeek-V3 changes only from a .003 disadvantage to a .003 advantage. Expanding-history remains below Fixed-window for six models; Qwen3.6-27B changes from a .009 disadvantage to a .018 advantage. For the four diagnostic

agents, the Expanding-history State-as-Forecast advantage remains positive on the restricted subset: .016, .072, .057, and .048 for Qwen3.6-27B, GPT-OSS-120B, DeepSeek-V3, and GPT-5.5, respectively. Thus the central comparisons survive, although near-tied condition orderings can reverse. This sensitivity does not imply that the retrospectively retained field universe is equivalent to a prospectively sampled universe.

Model	A0 Closed	A1 Fixed	A3 Expanding
Qwen3-4B	.148/.137	.300/.292	.222/.230
Qwen3-8B	.163/.166	.275/.291	.257/.276
Qwen3.6-27B	.320/.329	.448/.417	.439/.435
GPT-OSS-120B	.249/.256	.384/.399	.290/.290
DeepSeek-V3	.312/.327	.309/.330	.305/.320
Claude Haiku 4.5	.320/.358	.448/.485	.425/.471
GPT-5.5	.502/.515	.595/.603	.581/.588

Table 4: Forecast Spearman on the full frozen Test panel and the pre-2024-eligible subset (Full/eligible in each cell).

A.4 Direction construction and exact-eight consolidation

Only pre-2024 memberships enter direction construction. For each retained field, the pipeline extracts and semantically deduplicates atomic research programs, obtains two independent variable-size drafts—one from GPT-5.5 and one from Claude Opus 4.6—and absorbs additional pre-2024 papers into those drafts. A frozen revision, anonymous union, and exact-eight consolidation then produce the final codebook. Every direction includes a name, explicit definition, inclusion/exclusion boundaries, and pre-2024 exemplars.

The codebook is frozen across all rolling origins and is constructed without consulting any forecasting output. Its eight directions are operational measurement coordinates: they are neither claimed to be the unique natural taxonomy of a field nor required to be exhaustive or mutually exclusive.

A.5 Paper assignment and boundary policy

The frozen assignment instrument labels 55.48% of paper-field memberships as single-direction, 42.60% as boundary ties, 1.58% as genuine bridges, 0.34% as OTHER, and 0.0036% as low evidence. The canonical primary label is therefore a counting convention rather than a noiseless or unique paper-level gold label. Three alternative policies were frozen before confirmatory model evaluation: splitting boundary mass equally, retaining only single-direction papers, and assigning all boundary mass to the secondary direction. Table 5 re-scores the four diagnostic agents against all four targets. Exact five-condition ordering is preserved in 15 of 16 model-policy combinations. The exception is GPT-OSS-120B under the single-direction-only target, where A4 (.284) narrowly exceeds A1 (.282), reversing their canonical order by .002. Nevertheless, every model preserves the sign of the paper’s three structural comparisons under every policy: A1–A0, A3–A1, and A4–A3.

A.6 Construction-model overlap and parallel instrument

Every construction layer is model-assisted: a Claude Sonnet 4.6 teacher and its distilled Qwen3.5-4B student perform field extraction and parent-label normalisation; GPT-5.5 contributed to the primary direction codebook; and Qwen3.6-27B is used by the frozen paper-assignment instrument. The latter two families also appear in the evaluation panel. On 38 fields, an independently drafted Opus instrument produces similar persistence scores and target repeatability under cross-fit alignment. Cross-agent rank invariance is not tested because the forecasting panel was not rerun under its direction semantics.

B Measurement Validity Audits

B.1 Human operational-assignability audit

A researcher with an AI/ML background completed all 144 paper-field judgements across 24 construction-stratified fields in 5.4 hours. The annotator saw only the paper title and abstract, the operational field definition, and the eight written direction definitions. The interface did not expose frozen item-level assignments, sampling strata, or the scoring rule. The sampling design and analysis plan were frozen before annotation and disclosed only after all judgements were complete. The resulting labels were therefore produced independently of the automatic assignment instrument.

Fields span Dev/Test, field-size strata, and dependency blocks. Within each field, the sample includes ordinary single-direction candidates, boundary/bridge candidates on either side of 2024, population-positive draws, and retrieved non-primary draws. The annotator recorded field membership, a primary direction or OTHER, an optional secondary direction, clarity, and confidence.

Field membership was reproduced on 0.958 [0.917, 0.992] of frozen-positive pairs. The annotator rated the directions broadly distinguishable in 23 of 24 fields. Thus, given only the written codebook and paper metadata, the annotator usually recovered the field membership used by the corpus and found the eight directions operationally separable.

The protocol required one primary choice but made the secondary optional; a secondary was supplied on only 5.2% of accepted items. Exact primary match is therefore a lower bound on conformance rather than an accuracy estimate: a differing primary may indicate either rejection of the frozen label or a different ranking among several admissible directions. When the instrument declared a two-direction candidate set—58 items—the annotator’s choice fell inside that pair on 40. When the instrument asserted a single direction, the criterion necessarily reduces to exact match, which was 34 of 62.

The stratified sample is not population representative. Each frozen-positive item is assigned to one of four cells defined by assignment type (single/boundary) and period (pre-2024/2024+). For outcome indicator z , the corpus-reweighted estimate is $\sum_c \pi_c \bar{z}_c$, where $\bar{z}_c$ is the audited cell mean and π_c is that cell’s share of frozen corpus memberships. The Forecast-target version renormalises π_c over 2024+ cells because no pre-2024 paper can enter a Forecast

Model	Canonical condition order	Exact order stable	Max. $ \Delta\rho $
Qwen3.6-27B	A2 > A4 > A1 > A3 > A0	4/4	.111
GPT-OSS-120B	A1 > A4 > A2 > A3 > A0	3/4	.113
DeepSeek-V3	A4 > A2 > A0 > A1 > A3	4/4	.154
GPT-5.5	A4 > A2 > A1 > A3 > A0	4/4	.115

Table 5: Test Forecast/carry-forward Spearman sensitivity to four frozen assignment policies. “Exact order stable” counts policies retaining the model’s complete canonical A0–A4 ordering; $|\Delta\rho|$ is the largest cell-wise change from the canonical target. Complete scores are retained in the frozen reproducibility archive described in Appendix G.

target window. Intervals resample fields and recompute the weighted statistic. Table 6 shows that this correction materially lowers the apparent conformance.

This single-annotator, label-blind audit evaluates operational assignability; it is not an inter-annotator or field-expert validation study.

B.2 Robustness to assignment ambiguity

We first test whether disagreement is directional. On the 114 paired items, the total-variation distance between the two labellers’ pooled marginals over the eight direction slots is 0.123, inside an exchangeable-disagreement null ($p = 0.21$). No slot’s net flow has an interval excluding zero. This is a non-detection, not proof of unbiasedness: the null’s 95th percentile is 0.149.

We then re-score frozen predictions against the four pre-frozen counting policies. Table 5 reports the four diagnostic models. Complete five-condition ordering is preserved in 15 of 16 model–policy combinations; the sole exception is a .002 GPT-OSS-120B near-tie under the single-direction-only target. More importantly, every model retains the sign of A1–A0, A3–A1, and A4–A3 under every policy. Hence boundary handling changes absolute levels but not the three structural comparisons used by the paper.

B.3 Temporal and instrument stability

The human audit’s exact match is lower on items from 2024 onward (Table 8), but this contrast confounds codebook drift with one non-expert annotator’s familiarity with recent work. We therefore repeat the comparison using a second, independently drafted assignment instrument. Per-field Hungarian alignment is cross-fit on half of the pre-2024 papers, so both time periods are scored out of sample. Agreement with the frozen instrument is stable across the 2024 boundary: the paired change is -0.009 $[-0.025, +0.007]$ over 65,729 assignments in 38 fields, with overall out-of-sample agreement 0.686 $[0.651, 0.722]$. Target split-half repeatability also rises rather than falls across successive origins. We therefore do not interpret the annotator’s temporal pattern as degradation of the measurement instrument.

Claim boundary. Together, these audits support operational assignability and temporal and ambiguity robustness of the automatic instrument. Appendix G.3 consolidates the corresponding validity boundaries.

Weighting	Exact match	Choice admissible
Pooled over the designed sample	0.533 [0.433, 0.633]	—
Rewighted to corpus frequencies	0.470 [0.364, 0.575]	0.565 [0.462, 0.665]
Forecast-target papers only	0.405 [0.283, 0.526]	0.521 [0.393, 0.647]

Table 6: Single-annotator conformance against the frozen assignment. A rejected membership, CANNOT-JUDGE, or missing label counts as non-conformance. “Choice admissible” asks whether the annotator’s recorded primary choice lies inside the candidate set declared by the instrument. Conditional Cohen’s κ on the prespecified ordinary sample is 0.527 [0.352, 0.689]; intervals are field-clustered over 24 fields.

Forecast origin	Future repeatability	Boundary tie rate	OTHER rate	EWMA Forecast
2024-01	0.807 [0.792, 0.821]	0.401 [0.388, 0.415]	0.007 [0.006, 0.009]	0.719 [0.692, 0.746]
2024-07	0.817 [0.804, 0.830]	0.408 [0.395, 0.421]	0.006 [0.004, 0.008]	0.805 [0.786, 0.822]
2025-01	0.830 [0.817, 0.842]	0.426 [0.412, 0.439]	0.007 [0.005, 0.008]	0.810 [0.789, 0.830]
2025-07	0.834 [0.821, 0.847]	0.443 [0.429, 0.456]	0.005 [0.004, 0.007]	0.835 [0.818, 0.852]
2026-01	0.851 [0.837, 0.865]	0.467 [0.453, 0.481]	0.003 [0.002, 0.004]	0.835 [0.818, 0.852]

Table 7: Instrument stability by forecast origin. Each cell is a field-macro estimate with a field-clustered 95% confidence interval. The increasing boundary-tie rate is accompanied by stable or improving future repeatability, not by measurable degradation of the target instrument.

Stratum	Human	Parallel	Pairs
Ordinary, pre-2024	0.625	0.726	6,378
Ordinary, 2024+	0.500	0.727	29,991
Boundary, pre-2024	0.792	0.636	4,038
Boundary, 2024+	0.292	0.635	25,321

Table 8: Exact primary agreement with the frozen assignment. The annotator column has 24 items per stratum; the second-instrument column is cross-fit and out of sample in both periods.

C Evaluation Protocols and Model Provenance

C.1 Rolling origins and dependency-aware split

Each field contributes five semi-annual origins from 2024-01 through 2026-01. All origins of a field remain on the same side of the split. After same-granularity synonym merging, two final fields are connected when their pre-2024 membership sets intersect in at least 10 papers and have overlap coefficient at least 0.60, where the overlap coefficient is the intersection size divided by the size of the smaller set. Connected components form frozen dependency blocks.

Before observing any forecasting outcomes, we assigned the 38 fields with parallel instruments to Dev. To prevent overlap leakage, every dependency block containing one of these fields was also assigned wholly to Dev. This closure yields 67 Dev fields (335 episodes); the remaining 211 fields (1,055 episodes) form Test, with no shared field or strong cross-split edge. Dev is used for protocol and analysis development, Test for final evaluation, and the same dependency blocks are the primary bootstrap units.

C.2 Five evaluation conditions

The conditions vary the evidence available at cutoff T and whether the agent reconstructs the recent state or forecasts the next window.

ID	Evidence at cutoff T	Target	Primary role
A0	No search tool	Future [$T, T + 6\text{mo}$)	Parametric prior
A1	Fixed [$T - 6\text{mo}, T$)	Future [$T, T + 6\text{mo}$)	Standardized retrieval
A2	Fixed [$T - 6\text{mo}, T$)	Recent [$T - 6\text{mo}, T$)	Fixed-window state twin
A3	All corpus papers before T	Future [$T, T + 6\text{mo}$)	Autonomous- history retrieval
A4	All corpus papers before T	Recent [$T - 6\text{mo}, T$)	Expanding-history state twin

Table 9: RAP evaluation conditions. A state output carried forward to the next window is an agent-specific persistence baseline, not a direct forecast.

C.3 Search backend and tool semantics

Search is field-local BM25-OR over titles and abstracts. Each call returns at most eight papers and a query-conditioned total-hit count. Different queries can retrieve overlapping papers; total-hit counts are therefore not mutually exclusive direction counts and cannot be normalized into direction shares. All runs retain the complete assistant/tool trajectory, response-model identifier, request attempts, and usage meta-data.

Frozen prompt renderer. Every system prompt is rendered from the same source file. Its variable blocks are the field name, cutoff and target-window dates, the eight frozen

direction definitions, and the evidence paragraph below. The fixed Forecast task text is:

“As of {T}, assess near-term research activity in the field {field}. Forecast how the new in-scope arXiv papers in this field will be distributed across the eight candidate research directions during $[T, T + 6\text{mo}]$. Consider papers in this benchmark’s operational field corpus that are newly posted during the target window and fall within one of the eight candidate directions below. Condition on the provided slate: papers outside these eight directions are outside the prediction denominator. Predict each direction’s expected share of the in-slate papers. These shares describe paper counts, not citations, scientific impact, research quality, breakthrough importance, or your confidence.”

The State twin is:

“As of {T}, assess recent research activity in the field {field}. Estimate how the new in-scope arXiv papers in this field were distributed across the eight candidate research directions during the immediately preceding six-month window $[T - 6\text{mo}, T]$. Consider papers in this benchmark’s operational field corpus that were newly posted during the target window and fall within one of the eight candidate directions below. Condition on the provided slate: papers outside these eight directions are outside the estimation denominator. Estimate each direction’s realized share of the in-slate papers. These shares describe paper counts, not citations, scientific impact, research quality, breakthrough importance, or your confidence.”

The two texts differ only in this target substitution and its grammatical agreement; the Finish description changes from “final forecast” to “final current-state estimate” accordingly. A0 then requests exactly one JSON object with D0–D7. A1–A4 append the relevant hard-bounded evidence paragraph, the Search/Finish descriptions, and the following binding interaction rules: every assistant turn contains exactly one native function call; Search and Finish cannot co-occur; the agent waits after each Search; plain-text answers are invalid; zero to 20 Search calls are allowed; and the task ends with exactly one Finish call.

Native tool schemas. SEARCH accepts a required string `query`, required `sort` $\in \{\text{relevance}, \text{date}\}$, and nullable exclusive/inclusive ISO date bounds `date_to/date_from`; additional properties are rejected. It returns the query-conditioned total match count and up to eight dated paper IDs, titles, and abstracts. FINISH accepts a required `weights` object containing exactly D0–D7 as non-negative numbers and an optional concise `rationale`; additional properties are rejected. The exact renderer, JSON schemas, and a fully rendered example for every condition are retained for the planned code and data release (Appendix G) and identified by hash in Table 27.

C.4 Knowledge cutoffs and temporal tracks

Temporal eligibility is target-specific. A model–origin cell is *Forecast-Strict* when its complete six-month future window follows either the provider-reported knowledge cutoff or,

Model	Cutoff / upper-bound basis	Strict origins
Qwen3-4B/8B	frozen checkpoint released 2025-04	2
Qwen3.6-27B	not documented	—
GPT-OSS-120B	reported cutoff 2024-06	4
DeepSeek-V3	reported cutoff $\sim$ 2024-07	3
Claude Haiku 4.5	reported cutoff 2025-02	2
GPT-5.5	reported cutoff 2025-12-01	1

Table 10: Forecast-Strict evaluation mask for the completed panel. Dates were frozen from official model-card or release records and provider-reported service metadata. For the frozen Qwen3 base checkpoints, the April 2025 release date is a hard upper bound on parametric exposure, making the two later target windows strictly post-release. Joint-Strict eligibility for State diagnostics is reported separately.

when no official cutoff is available, the documented release date of the frozen checkpoint. Release date is a conservative hard upper bound on parametric exposure, although it does not identify the checkpoint’s earlier effective knowledge cutoff. A State–Forecast comparison is *Joint-Strict* only when both the preceding six-month State window and the future window follow that cutoff. The main Forecast-Strict track uses Forecast-Strict cells; Joint-Strict diagnostic cells are reported in the exposure-stratified sensitivity analysis in Appendix E.5. The All-Origin Track retains every rolling origin but is interpreted as controlled retrospective evidence use rather than necessarily unseen forecasting.

C.5 Inference configuration

All conditions use temperature zero. Search conditions use `tool_choice=auto`, disable parallel tool calls, permit no assistant plain text in place of a tool call, return at most eight hits per call, and cap Search at 20 calls. Closed calls use a 1,600-token cap and hosted Search calls a 1,800-token cap unless superseded below.

Open-model inference and Full-SFT ran on one node with two Intel Xeon Platinum 8369B processors (128 logical CPUs), 2.0 TiB RAM, and $8 \times$ NVIDIA A100-SXM4-80GB GPUs. The node used Ubuntu 22.04.4, NVIDIA driver 550.54.14, and CUDA compatibility 12.4; Qwen3-4B/8B used independent sharded services on those GPUs. Table 12 records the software environments whose installations pre-date the reported runs.

The frozen reproducibility archive retains this environment record in machine-readable form. Its minimal requirements file gives lower bounds for installing the scorer and Search backend, rather than claiming to reconstruct the proprietary serving stacks.

The complete final-parameter ledger is archived as `provenance/FINAL_PARAMETER_LEDGER_V1.json`. In addition to the model settings in Table 11, it records the benchmark constants, BM25 parameters ($k_1 = 1.5$, $b = 0.75$), retrieval and formatting limits, resampling counts and seeds, and the resolved Full-SFT optimizer, precision, loss, batching, schedule, and checkpoint settings. Parameters not sent to a hosted API, such as `top_p` and a sampling

Model	Reasoning / completion setting	Test concurrency	Recovery
Qwen3-4B/8B	Qwen thinking enabled; vLLM qwen3 parser; 16,384-token cap	8 per shard	keyed invalid-unit retry
Qwen3.6-27B	Qwen thinking enabled; vLLM qwen3 parser; 16,384-token cap	16	keyed invalid-unit retry
GPT-OSS-120B	Harmony reasoning, medium; completion cap of at least 8,192 tokens	16	keyed invalid-unit retry
DeepSeek-V3	hosted API default; 1,600/1,800-token caps	20	keyed invalid-unit retry
Claude Haiku 4.5	official Anthropic/AWS upstream; extended thinking off; 1,600/1,800	10	two API attempts, then keyed retry
GPT-5.5	official OpenAI service; default hidden reasoning; 1,600/1,800-token caps	10	five API attempts, then keyed retry

Table 11: Frozen inference configuration for the completed Test panel. API retries address transport/provider failure; unit-level retries address missing or invalid terminal structure. Neither recovery path inspects the target.

Layer	Runtime	Principal versions
Open-model inference	Python 3.10.20, vLLM native-tool servers	vLLM 0.19.1; PyTorch 2.10.0+cu128; NumPy 2.2.6
Full-SFT	Eight-GPU VERL/FSDP training on the same A100 node	Python 3.10.20; PyTorch 2.8.0+cu128; Transformers 4.57.6; Accelerate 1.13.0; VERL 0.8.0.dev0; NCCL 2.27.3
Scoring and artifact generation	Two Intel Xeon Silver 4210 processors (40 logical CPUs), 251 GiB RAM, Ubuntu 20.04.6	Python 3.12.7; NumPy 2.3.2; SciPy 1.17.1; pandas 2.3.1; scikit-learn 1.8.0; ijson 3.5.1

Table 12: Compute and software environments for the reported open-model, training, and analysis stages executed on infrastructure under our control. GPT-5.5 used the official OpenAI service; the Claude access service reported Anthropic’s official service or AWS as its upstream.

seed, are explicitly marked as unset rather than inferred from the service implementation.

Development-time parameter variation was limited and is recorded in the archived `provenance/DEVELOPMENT_PARAMETER_LEDGER_V1.json`. Temperature, Search budget, top- k , BM25 constants, statistical budgets, and the production Full-SFT optimizer each used one fixed value. The dependency overlap coefficient was scanned over $\{0.4, 0.5, 0.6, 0.7, 0.8\}$ using outcome-blind split-hygiene criteria, and the open-model completion cap changed from 4,096 to 8,192 to 16,384 only when pre-scoring format smoke tests exposed truncated tool trajectories. Prompt revisions and the matched Tail/Full SFT comparison are method variants, not performance-selected hyperparameter values.

D Scoring, Dependence, and Statistical Analysis

D.1 Episode and field aggregation

Let f index fields, T index forecast origins, and ρ denote Spearman rank agreement. Let $p_{f,T}$ be a Forecast output, $s_{f,T}$ a State output, $x_{f,T}$ the realised composition in $[T - 6\text{mo}, T)$, and $y_{f,T}$ the realised composition in $[T, T + 6\text{mo})$. In addition to the primary Forecast score $\rho(p_{f,T}, y_{f,T})$, we report

$$\text{PredRecent}_{f,T} = \rho(p_{f,T}, x_{f,T}),$$

$$\text{StateRecent}_{f,T} = \rho(s_{f,T}, x_{f,T}),$$

and State carry-forward as $\rho(s_{f,T}, y_{f,T})$. For vectors a, b , with $\bar{a}, \bar{b}$ their component means and $\mathbf{1}$ the all-ones vector,

the centred cosine is

$$\cos_c(a, b) = \frac{(a - \bar{a}\mathbf{1})^\top (b - \bar{b}\mathbf{1})}{\|a - \bar{a}\mathbf{1}\|_2 \|b - \bar{b}\mathbf{1}\|_2}.$$

Here $\top$ denotes transpose and $\|\cdot\|_2$ the Euclidean norm. For two origins separated by $h \in \{6, 12, 18\}$ months, rolling revision alignment (also called adaptivity) is

$$\text{Adapt}_h = \rho(p_{f,T+h} - p_{f,T}, y_{f,T+h} - y_{f,T}),$$

with centred cosine reported as a sensitivity. Prediction stability and truth stability are respectively $\rho(p_{f,T+h}, p_{f,T})$ and $\rho(y_{f,T+h}, y_{f,T})$. These quantities are computed within episode or origin pair before field-level aggregation; they are not correlations over a pooled direction table.

The model-facing prompt requires eight nonnegative percentage weights summing to 100. The parser requires exactly D0–D7, finite nonnegative values, and a positive total; it renormalizes valid outputs to the simplex before scoring, so harmless numerical deviations from 100 do not invalidate an episode.

RAP pre-designates *ordinal composition* as its primary estimand. For prediction p and realized composition y , the episode score is

$$\rho_{\text{RAP}}(p, y) = \text{corr}(\text{rank}(p), \text{rank}(y)).$$

Here $\text{rank}(\cdot)$ returns the component-wise rank vector and corr is Pearson correlation; ties receive average ranks. If a valid prediction is uniform, $\text{rank}(p)$ has zero variance; we assign score zero because the output contains no directional

ordering information. Invalid rollouts remain excluded, and other undefined quantities are not silently coerced to zero. This reporting-layer convention was applied uniformly when producing the paper statistics; frozen raw trajectories were not modified.

All-Origin summaries first average the five rolling episodes within field and then aggregate across fields. Forecast-Strict and SFT summaries instead use only their registered eligible or matched origins. Primary confidence intervals resample frozen strong-dependency blocks; field-clustered intervals are reported as a sensitivity analysis. Paired condition contrasts always use the same field–origin cells.

D.2 Compositional-distance sensitivity

The percentage interface forces an agent to express relative tradeoffs and also exposes share magnitude for secondary evaluation. We therefore compute total-variation distance

$$\text{TV}(p, y) = \frac{1}{2} \sum_{d=1}^8 |p_d - y_d|$$

where d indexes the eight frozen directions. We also compute Jensen–Shannon divergence (natural logarithms, without smoothing) on the same normalized vectors. Lower values are better. Paired “improvements” below are the reference distance minus the candidate distance, so positive values favor the candidate.

For normalized compositions a, b , define the Kullback–Leibler divergence as $\text{KL}(a||b) = \sum_{d: a_d > 0} a_d \log(a_d/b_d)$. Writing $m = (p + y)/2$, the reported Jensen–Shannon divergence is

$$\text{JSD}(p, y) = \frac{1}{2} \text{KL}(p||m) + \frac{1}{2} \text{KL}(y||m).$$

On Test under Expanding history, the paired State-as-Forecast minus explicit Forecast Spearman gains are +0.041 [+0.026, +0.057] for GPT-5.5, +0.035 [+0.013, +0.057] for Qwen3.6-27B, +0.082 [+0.055, +0.109] for GPT-OSS-120B, and +0.051 [+0.028, +0.075] for DeepSeek-V3. TV/JSD improvements have the same sign for GPT-5.5 (+0.010/+0.003), Qwen3.6-27B (+0.006/+0.002), and DeepSeek-V3 (+0.007/+0.003). GPT-OSS-120B is the informative exception: its ordinal ranking improves while TV and JSD worsen (−0.006/−0.003).

The State advantage is therefore ordinally robust across all four models, while share magnitude improves for three.

D.3 Persistence-controlled foresight

RAP’s primary estimand is the next-window level composition, for which persistence is valid predictive information. On Test, EWMA reaches 0.803 against an approximate Test-set reliability-implied ceiling of 0.911, obtained from the square root of the Test-only posterior repeatability 0.830. The remaining absolute gap to that ceiling is 0.108. We therefore do not reinterpret the primary score as a departure-only score. Instead, future-specific claims use secondary analyses of the same frozen predictions: residual association beyond EWMA, model-output-independent change-rich subsets, and rolling revision alignment.

Direct EWMA-residual alignment For a candidate prediction p , realised future composition y , and exact three-window EWMA e , we define the predicted and realised departures as $\Delta p = p - e$ and $\Delta y = y - e$. We compute their cosine and Spearman alignment, then subtract the episode-specific median obtained from 2,048 deterministic permutations of the eight labels of p . This correction is necessary because subtracting the same EWMA vector from both quantities otherwise induces positive mechanical alignment. We separately report

$$\text{TVGain}(p; e) = \text{TV}(e, y) - \text{TV}(p, y),$$

which is positive only when the complete candidate composition improves on EWMA.

Across All-Origin, corrected residual cosine is positive but weak for GPT-5.5 (0.076–0.091 across A0/A1/A3) and Qwen3.6-27B (0.057–0.088), while GPT-OSS-120B (0.003–0.021) and DeepSeek-V3 (−0.010 to −0.007) show little or none. Every natural-evidence A0/A1/A3 agent cell has negative TV gain relative to EWMA. At the latest origin, agent residual cosine is at most 0.023 and is unresolved or negative in every cell; the pre- T linear trend remains positive at +0.194 [+0.084, +0.300]. The change-rich subset and all condition-level confidence intervals use the same frozen dependency-block bootstrap as the primary analysis.

The partial-residual endpoint and change-rich subset were frozen before the rebuilt-slate Test model runs. Let $e_{f,T}$ be the three-window EWMA forecast and let $q(\cdot)$ return average ranks. Define $X = [1, q(e_{f,T})]$ and the residual maker $R_X = I - XX^+$, where I is the 8×8 identity and X^+ is the Moore–Penrose pseudoinverse. The episode statistic before null correction is

$$c_{f,T} = \text{corr}(R_X q(p_{f,T}), R_X q(y_{f,T})).$$

Because each episode contains only eight directions, we enumerate all 8! permutations π of the prediction labels while holding $y_{f,T}$ and $e_{f,T}$ fixed. The reported score is $c_{f,T}$ minus the median permutation statistic. It is undefined, rather than zero-coded, when either residual vector has zero variance; this differs deliberately from the primary level-score treatment of a valid uniform prediction.

Stress-test definitions. Change-rich episodes are selected without model outputs. Under the stationary null, the recent and future counts are independent multinomial draws at their observed totals from the Jeffreys-smoothed pooled composition. An episode is change-rich when its observed recent–future JSD has $p \leq 0.05$ under this episode-specific null and posterior-predictive future-rank repeatability is at least 0.5. This selects 141 of the 1,055 Test episodes. A matched rule based on stationary-null rank change $(1 - \rho)$ selects 69 episodes, and 48 satisfy both rules. Together with the reliability analyses of Appendix D.4, these are the exact stress-test definitions referenced in the main paper. Selection makes a decline in persistence partly definitional, so the load-bearing quantities are baseline-controlled statistics and paired intervention contrasts rather than the subset’s EWMA decline alone. The cutoff-clean Full-SFT analysis applies these same frozen definitions and is reported in Appendix F.5.

Candidate	Condition	Corrected residual cosine	Corrected residual Spearman	TV gain vs. EWMA
Recent Linear trend	persistence	+ .162 [+ .088, + .242]	+ .105 [+ .042, + .174]	− .006 [− .010, − .002]
	exact pre- T counts	+ .197 [+ .128, + .267]	+ .139 [+ .082, + .201]	− .043 [− .048, − .038]
GPT-5.5	A0	+ .091 [+ .067, + .114]	+ .076 [+ .056, + .098]	− .089 [− .099, − .080]
	A1	+ .076 [+ .050, + .099]	+ .056 [+ .032, + .078]	− .066 [− .074, − .058]
	A3	+ .077 [+ .050, + .102]	+ .059 [+ .033, + .081]	− .071 [− .079, − .062]
Qwen3.6-27B	A0	+ .088 [+ .061, + .113]	+ .060 [+ .034, + .083]	− .136 [− .146, − .126]
	A1	+ .057 [+ .034, + .080]	+ .035 [+ .013, + .056]	− .096 [− .105, − .086]
	A3	+ .061 [+ .035, + .085]	+ .050 [+ .027, + .071]	− .098 [− .106, − .091]
GPT-OSS-120B	A0	+ .021 [− .001, + .042]	+ .009 [− .013, + .029]	− .138 [− .148, − .128]
	A1	+ .014 [− .011, + .036]	− .001 [− .024, + .019]	− .130 [− .138, − .122]
	A3	+ .003 [− .018, + .024]	− .011 [− .031, + .009]	− .132 [− .141, − .123]
DeepSeek-V3	A0	− .010 [− .028, + .007]	− .017 [− .035, + .001]	− .120 [− .129, − .110]
	A1	− .007 [− .027, + .013]	− .020 [− .041, − .002]	− .128 [− .137, − .119]
	A3	− .009 [− .030, + .010]	− .009 [− .027, + .008]	− .129 [− .138, − .119]

Table 13: Complete All-Origin direct-residual audit for the four diagnostic models and two exact-count references. Intervals use the frozen dependency- block bootstrap. Positive alignment means the predicted departure points in the realised direction; positive TV gain is required to improve the complete composition over EWMA.

Model	Fixed – Closed	Expanding – Closed	Expanding – Fixed
GPT-5.5	− 0.001 [− 0.027, + 0.023]	− 0.000 [− 0.021, + 0.020]	+ 0.002 [− 0.020, + 0.023]
Qwen3.6-27B	− 0.011 [− 0.042, + 0.021]	− 0.013 [− 0.039, + 0.014]	− 0.002 [− 0.029, + 0.024]
GPT-OSS-120B	+ 0.018 [− 0.012, + 0.050]	− 0.025 [− 0.053, + 0.003]	− 0.042 [− 0.071, − 0.013]
DeepSeek-V3	+ 0.009 [− 0.013, + 0.029]	− 0.002 [− 0.020, + 0.015]	− 0.010 [− 0.029, + 0.008]

Table 14: All-Origin retrieval contrasts under the partial-residual endpoint. The same frozen Forecast outputs are residualised against exact pre- T EWMA ranks. Entries are paired field-macro contrasts with dependency-block bootstrap 95% confidence intervals. No positive retrieval-over-Closed contrast is resolved; this historical-replay panel is not used as a strict post-cut-off foresight claim.

D.4 Reliability and statistical baselines

To estimate whether finite future-window paper samples support repeatable direction rankings, we randomly divide the papers in each episode into two halves, correlate the induced direction ranks, and apply the Spearman–Brown correction for the halved sample size. The resulting full-window reliability is 0.820. An independent posterior-predictive procedure estimates repeatability at 0.828 [0.816, 0.839]; its square root gives the full-benchmark approximate observable-score ceiling 0.910. This uses all 1,390 episodes, whereas the 0.911 value above uses the Test panel only. Applying the same split-half analysis to realised changes across origins separated by 6, 12, and 18 months gives 0.149, 0.298, and 0.405, respectively. These lower revision reliabilities motivate treating the six-month level composition as primary and revision alignment as secondary.

To check that the principal persistence reference was not selected from an artificially weak comparison set, we evaluate a broader statistical baseline family on the same frozen episodes. Every method receives exactly the three six-month direction-share vectors preceding T ; predictions are clipped to non-negative values and renormalised to sum to one. Recent copies the latest vector, and the canonical EWMA uses fixed effective weights 0.50/0.25/0.25 from newest to oldest.

The remaining methods are selected using Dev only. ARIMA(1,1,0) forecasts each direction independently as

$x_{t+1} = x_t + \phi(x_t - x_{t-1})$, where x_t is that direction’s share in window t and $\phi = -0.400$. Additive Holt exponential smoothing uses level and trend parameters $\alpha = 0.850$ and $\beta = 0.600$. Ridge VAR(1) estimates the eight directions jointly from the two available transitions, with its coefficient matrix regularised toward the identity (persistence) matrix at ridge ratio 133.352. Hyperparameters maximise field-macro Forecast Spearman over the 335 Dev episodes, with centred cosine as a tie-breaker; Test targets are not used for selection.

ARIMA is numerically highest, but its paired advantage over EWMA is only +0.0015 and its interval includes zero; Holt and ridge VAR are lower. Accordingly, no member of this broader family reliably improves on the fixed, transparent EWMA. We retain EWMA as the persistence anchor for episode-level residual analyses rather than treating the small selected ARIMA difference as a distinct performance tier.

D.5 Multiple comparisons and claim hierarchy

The frozen Test split is confirmatory for the primary level estimand: field-macro Forecast Spearman under A0, A1, and A3, together with paired retrieval contrasts on the same field-origin cells. The reliability audit, statistical references, ambiguity policies, and partial-residual definition were frozen before the rebuilt-slate Test panel. The State twins, frozen-evidence replay, Search-trace counterfactual, exact-history intervention, per-origin slices, and Full-SFT mechanism di-

Method	Forecast Spearman	Δ vs. EWMA
Recent persistence	0.7937 [0.7760, 0.8102]	-0.0097 [-0.0172, -0.0024]
EWMA, $\alpha = 0.5$	0.8034 [0.7888, 0.8183]	0.0000 [0.0000, 0.0000]
ARIMA(1,1,0)	0.8049 [0.7890, 0.8199]	+0.0015 [-0.0039, +0.0065]
Additive Holt	0.7270 [0.7057, 0.7471]	-0.0764 [-0.0891, -0.0635]
Ridge VAR(1)	0.7842 [0.7657, 0.8020]	-0.0192 [-0.0276, -0.0107]

Table 15: Statistical baseline family on Test. Hyperparameters for ARIMA, Holt, and VAR are selected on Dev only. Entries are field-macro estimates with field-clustered bootstrap 95% confidence intervals.

agnostics are labelled diagnostic or sensitivity analyses; they localise the observed gap but are not promoted to additional co-primary endpoints.

All intervals are two-sided 95% nonparametric bootstrap intervals. The default resampling unit is the frozen dependency block; explicitly labelled field-clustered intervals resample fields. We do not apply familywise or false-discovery correction across the many diagnostic cells. Consequently, the paper treats isolated interval exclusions in per-model, per-origin, or trace-level tables as descriptive unless they instantiate a pre-frozen paired contrast and replicate in the stated cross-model pattern. No single-episode effect claim is permitted. Change-rich selection is model-output-independent, but selection makes reduced persistence partly definitional; claims on that subset therefore rely on baseline-controlled or paired intervention metrics, not its raw EWMA decline alone.

E Complete Benchmark Results

E.1 Model and condition allocation

Table 16 summarises which models enter the main Forecast leaderboard and which additionally support the five-condition diagnostic analyses.

E.2 Final validity accounting

After frozen, episode-condition-keyed recovery runs, every analysed unit is valid. Qwen3-4B, Qwen3-8B, and Claude Haiku 4.5 each contribute $3 \times 1,055 = 3,165$ A0/A1/A3 units. GPT-5.5, Qwen3.6-27B, GPT-OSS-120B, and DeepSeek-V3 each contribute $5 \times 1,055 = 5,275$ A0-A4 units. Recovery reran only missing or invalid units and did not inspect the target; completed units were not regenerated. The main-paper leaderboard reports all-origin and common-origin scores from these final bundles.

E.3 Performance by rolling origin

Table 17 reports Fixed and Expanding Forecast performance at each rolling origin and marks model-origin cells eligible for strict unseen-future interpretation under the frozen cutoff/release-date mask.

E.4 Cutoff sensitivity

Across the three diagnostic models with a documented cutoff or release-date boundary, Expanding-minus-Fixed Forecast remains non-positive in both potentially exposed and strict strata. The exposed/strict contrasts are

-0.010/-0.033 for GPT-5.5, -0.135/-0.083 for GPT-OSS-120B, and -0.003/-0.005 for DeepSeek-V3. Their strict-minus-exposed differences are respectively -0.022 [-0.049, +0.003], +0.052 [-0.003, +0.107], and -0.002 [-0.031, +0.025]. The expanding-history deficit therefore is not confined to potentially exposed origins, and none of the exposure interactions is resolved.

As an additional GPT-5.5 retrieval check, only the 2026-01 origin is fully strict under its reported 2025-12-01 cutoff. A0 decreases from 0.509 over the first four origins to 0.476 at the strict origin, whereas A1 changes from 0.597 to 0.589. Consequently, A1-A0 increases from 0.088 to 0.113; the strict-minus-exposed contrast in that retrieval gain is +0.025 [-0.008, +0.061]. The positive retrieval contrast therefore does not disappear at the strict origin, although a single strict origin cannot establish a temporal trend. Qwen3.6-27B is not cutoff-stratified because no documented cutoff is available; its complete all-origin diagnostics are reported in Tables 19 and 24.

E.5 Exposure sensitivity of paired agent contrasts

We additionally stratify paired contrasts by target-specific temporal eligibility. Forecast-only comparisons use the Forecast-Strict mask, whereas comparisons involving State use the stricter Joint-Strict mask, which requires both the preceding State window and future window to follow the reported cutoff. “Potentially exposed” is the complement of the relevant strict mask. Scores are averaged within field and macro-averaged across fields; intervals are 95% bootstraps over the 140 frozen Test dependency blocks. All cells contain all 211 fields. Valid uniform predictions contribute zero. Qwen3.6-27B is omitted from this stratification because no documented cutoff supports a strict/exposed assignment. Its complete all-origin A0-A4 and replay results appear in Tables 19 and 24.

The key condition ordering does not reverse after temporal restriction. Full-trajectory Joint-Strict acquisition remains positive for GPT-OSS-120B (+0.049 [+0.019, +0.081]) and DeepSeek-V3 (+0.043 [+0.019, +0.069]); the corresponding readout contrasts are +0.019 [-0.004, +0.043] and +0.012 [-0.013, +0.036]. Treating DeepSeek-V3’s boundary $T = 2025-01$ origin as Joint-Strict also preserves the State advantage (+0.070 [+0.043, +0.100]) and matched acquisition advantage (+0.051 [+0.030, +0.074]). Thus, exposure status does not explain the shared reversal or acquisition effect, although DeepSeek-V3 retains a model-specific matched-readout residual and GPT-5.5 cannot support a Joint-Strict diagnostic claim on the available origins.

Model	Family / scale	Main A0/A1/A3 Test	A0–A4 diagnostic	Temporal role
Qwen3-4B	Open, small	Complete	No	Scaling anchor
Qwen3-8B	Open, medium	Complete	No	Scaling comparison
Qwen3.6-27B	Open, large	Complete	Complete	Open-model diagnostic
GPT-OSS-120B	Open reasoning	Complete	Complete	Mid-cutoff diagnostic
DeepSeek-V3	Open, large	Complete	Complete	Earlier-cutoff diagnostic
Claude Haiku 4.5	Proprietary	Complete	No	Earlier-cutoff forecast panel
GPT-5.5	Proprietary	Complete	Complete	Frontier diagnostic

Table 16: Completed model allocation. All seven models enter the A0/A1/A3 Forecast leaderboard; the A2/A4 State decomposition and expanding-history evidence replay use the four diagnostic models.

Model	2024-01	2024-07	2025-01	2025-07	2026-01
Qwen3-4B	.261/.238	.339/.262	.291/.211	.290/.196	.321/.202
Qwen3-8B	.266/.295	.295/.282	.264/.249	.252/.250	.297/.208
Qwen3.6-27B	.426/.406	.486/.481	.433/.435	.438/.435	.460/.439
GPT-OSS-120B	.402/.266	.415/.365	.386/.258	.364/.314	.353/.248
DeepSeek-V3	.358/.381	.369/.340	.297/.266	.270/.286	.250/.251
Claude Haiku 4.5	.451/.443	.487/.459	.423/.414	.449/.418	.432/.392
GPT-5.5	.588/.579	.622/.619	.578/.566	.599/.583	.589/.557

Table 17: Fixed/Expanding Forecast Spearman by rolling origin. Bold cells are Forecast-Strict under the conservative cutoff or release-date mask used in the main paper. Qwen3.6-27B has no documented cutoff and therefore no strict cell. Strict sets differ by model and are not averaged for cross-model ranking.

E.6 Robustness scope

Assignment-policy results are reported in Table 5; retrospective sampling-frame sensitivity is reported in Table 4; the independent-slate boundary is stated in Appendix A; and temporal-exposure contrasts are reported in Table 18. Assignment-policy rescoring preserves all three structural condition contrasts for all four diagnostic models. The restricted-field analysis preserves the State-as-Forecast advantage, although near-tied retrieval contrasts reverse for Qwen3.6-27B and DeepSeek-V3. The parallel-instrument analysis supports persistence-level robustness. Exact five-condition ordering has one near-tied GPT-OSS-120B exception under the single-direction-only target. These analyses do not support a claim that the seven-model leaderboard ordering is invariant to every alternative assignment policy or to an independently constructed direction slate.

F Search Behavior and Diagnostic Interventions

F.1 Complete end-to-end diagnostic matrix

Table 19 gives the complete Test all-origin A0–A4 matrix for the four diagnostic models used below.

F.2 Search-policy diagnostics

We analyze observable Search calls rather than provider-hidden reasoning. For each expanding-history Forecast/State pair, both trajectories are truncated to their episode-specific shared call count. We then report Search options, distinct-paper and duplicate structure, paper-set overlap, and the temporal and directional composition of the returned papers. Direction composition maps retrieved paper IDs through the

same frozen primary-assignment instrument used to define RAP outcomes. Because active queries condition the returned set, this composition is a behavioral diagnostic rather than an unbiased estimator of field prevalence.

To separate query text from Search options, we re-execute every frozen query against the local BM25 corpus under its native options and under common recent-window options. The audit covers 86,284 calls across all four diagnostic models, including 21,046 Qwen3.6-27B calls. Every native call reproduces its recorded paper IDs and ordering exactly. Table 21 shows that the large native State-query evidence–future advantage shrinks to at most +0.011 and is negative for three of the four models under common recent-window relevance options. Applying those options to the original Forecast queries instead substantially improves their alignment with both recent and future outcomes. This intervention does not run a new model readout and is therefore not interpreted as a causal Forecast-score repair.

F.3 Oracle historical-state ablation

The end-to-end State intervention still requires the agent to acquire and aggregate the literature. We therefore run a protocol-matched four-model oracle-input diagnostic on Test that replaces these stages with exact *pre-T* direction counts produced by the frozen benchmark instrument. **Exact recent** supplies only the immediately preceding six-month window; **Exact history** supplies three consecutive *pre-T* windows; and **Exact history + Search** additionally opens the same Expanding-history Search interface used in the main experiments. No future-window count or label is exposed. Across the four model runs, all 12,660 outputs are valid and non-uniform.

Model	Mask	Paired contrast	Exposed	Strict	Difference
GPT-5.5	Forecast	Expanding – Fixed	−0.010 [−0.024, +0.003]	−0.033 [−0.058, −0.008]	−0.022 [−0.049, +0.003]
GPT-OSS-120B	Forecast	Expanding – Fixed	−0.135 [−0.189, −0.082]	−0.083 [−0.111, −0.058]	+0.052 [−0.003, +0.107]
	Joint	State-as-Forecast – Forecast	+0.078 [+0.039, +0.117]	+0.084 [+0.050, +0.121]	+0.006 [−0.047, +0.058]
	Joint	Acquisition: S→F – F→F	+0.047 [+0.009, +0.082]	+0.070 [+0.042, +0.100]	+0.024 [−0.021, +0.070]
	Joint	Readout: S→S – S→F	+0.000 [−0.027, +0.028]	−0.005 [−0.027, +0.018]	−0.005 [−0.043, +0.030]
DeepSeek-V3	Forecast	Expanding – Fixed	−0.003 [−0.024, +0.018]	−0.005 [−0.029, +0.016]	−0.002 [−0.031, +0.025]
	Joint	State-as-Forecast – Forecast	+0.046 [+0.018, +0.077]	+0.059 [+0.030, +0.091]	+0.013 [−0.018, +0.046]
	Joint	Acquisition: S→F – F→F	+0.049 [+0.030, +0.070]	+0.040 [+0.014, +0.067]	−0.009 [−0.042, +0.023]
	Joint	Readout: S→S – S→F	+0.010 [−0.014, +0.032]	+0.051 [+0.031, +0.069]	+0.041 [+0.011, +0.069]

Table 18: Exposure-stratified paired contrasts on Test. Forecast masks contain one/four/three strict origins for GPT-5.5, GPT-OSS-120B, and DeepSeek-V3. Joint masks contain zero/three/two strict origins, respectively; GPT-5.5 therefore has no eligible State or replay row. The DeepSeek-V3 Joint mask conservatively excludes the boundary origin because its cutoff is available only at month-level precision. Qwen3.6-27B is not shown because no documented cutoff supports either mask. “Difference” is Strict minus Exposed. Positive State and acquisition contrasts favor State orientation.

ID	Evidence	Target	Role	GPT-5.5	Qwen3.6-27B	GPT-OSS-120B	DeepSeek-V3
A0	None	Future	Parametric prior	0.502	0.320	0.249	0.312
A1	Recent six months	Future	Standard forecast	0.595	0.448	0.384	0.309
A2	Recent six months	Current state	Standard carry-forward	0.605	0.475	0.350	0.324
A3	All pre- T history	Future	Autonomous forecast	0.581	0.439	0.290	0.305
A4	All pre- T history	Current state	Autonomous carry-forward	0.622	0.474	0.372	0.356

Table 19: Representative-model diagnostic matrix underlying Figure 3(a). Entries are Spearman agreement with the future outcome; A2/A4 are evaluated by carrying the reconstructed State forward unchanged. All entries use the complete Test all-origin panel.

Exact history closes most of the level gap between natural Search and persistence, but Counts-only does not robustly surpass EWMA as a complete Forecast. Its corrected residual Spearman is nevertheless +0.163 [+0.108, +0.220], showing partial alignment with the direction of departure from EWMA. Reopening Search improves over Counts-only by +0.006 [+0.003, +0.009]. The all-origin residual-direction increment is unresolved, whereas the Forecast-Strict increment is +0.033 [+0.001, +0.064]. The three conditions retain rolling revision alignment of −0.297/−0.305/−0.301, respectively.

This ablation isolates a conditional capability boundary, not a deployable solution. The counts use the benchmark’s own operational assignments and therefore bypass both evidence acquisition and semantic aggregation. Its absolute scores are not merged into the main natural-evidence leaderboard. Complete origin, change-rich, and compositional-distance matrices are retained in the frozen reproducibility archive (Appendix G).

F.4 Frozen-evidence replay

For every source trajectory, we serialize the ordered Search calls, query arguments, date restrictions, and exact tool observations. The replay prompt contains this evidence but excludes the source system prompt, assistant reasoning, terminal answer, and rationale. Forecast and State readouts are then generated independently from byte-identical evidence.

We report all four cells in Table 25, field-clustered paired contrasts in Table 24, prediction agreement with the original native answer, and the change in the two native diagonal cells induced by fresh one-shot readout.

Matching calls does not make the evidence equivalent. State-oriented trajectories retrieve fewer distinct papers for three models but more for Qwen3.6-27B, while the low set overlap in Table 24 confirms that the contrast captures substantive query and selection differences rather than call count alone. Fresh full-evidence replay closely reproduces GPT-5.5’s original predictions (Forecast/State agreement 0.920/0.904). Qwen3.6-27B has intermediate replay fidelity (0.775/0.718), while GPT-OSS-120B has lower native-to-replay agreement (0.621/0.594), so its matrix is interpreted as a controlled decomposition of frozen evidence rather than an exact reproduction of each native answer. For all three fidelity-audited models, the trajectory contrast agrees in sign with the original interactive A3/A4 gap.

F.5 Cutoff-clean full-trajectory adaptation

We test whether realised RAP outcomes provide a learnable signal for the complete search-and-Forecast policy. Starting from the unadapted Qwen3-4B checkpoint, we perform full-parameter, full-trajectory supervised fine-tuning (Full-SFT). The training set contains 90 distinct trajectories: 45 frozen training fields at $T = 2024-07$ under Fixed-window and Expanding-history access. GPT-OSS-120B supplied the

Model	Recent-return share F/S	Δ distinct	Jaccard	Δ evidence–Recent	Δ evidence–Future
GPT-5.5	0.732 / 1.000	-4.787	0.310	+0.150	+0.092
Qwen3.6-27B	0.798 / 1.000	+11.917	0.295	+0.177	+0.108
GPT-OSS-120B	0.664 / 1.000	-21.303	0.288	+0.114	+0.082
DeepSeek-V3	0.466 / 1.000	-24.798	0.223	+0.152	+0.098

Table 20: Matched-call behavioral signature. Δ is State minus Forecast. Evidence alignment is Spearman agreement between the unique-paper primary-direction composition and the realized recent or future distribution. Complete field-clustered intervals and slot-weighted variants are retained in the frozen reproducibility archive (Appendix G).

Model	State query – Forecast query, common recent+relevance		Forecast recent+relevance – native	
	Evidence–Recent	Evidence–Future	Evidence–Recent	Evidence–Future
GPT-5.5	-0.011 [-0.023, +0.002]	-0.010 [-0.024, +0.003]	+0.153 [+0.133, +0.174]	+0.094 [+0.076, +0.113]
Qwen3.6-27B	+0.011 [+0.000, +0.022]	+0.011 [-0.001, +0.024]	+0.165 [+0.140, +0.190]	+0.102 [+0.081, +0.123]
GPT-OSS-120B	-0.022 [-0.037, -0.008]	-0.016 [-0.034, +0.001]	+0.142 [+0.116, +0.168]	+0.086 [+0.062, +0.111]
DeepSeek-V3	-0.010 [-0.023, +0.004]	-0.011 [-0.025, +0.003]	+0.205 [+0.176, +0.234]	+0.124 [+0.099, +0.150]

Table 21: Four-model frozen-query Search-option counterfactual. Entries compare unique-paper direction composition with the realized recent or future distribution; brackets are field-clustered 95% confidence intervals.

source trajectories. We retain its visible Search actions and tool observations, remove hidden reasoning, discard its terminal prediction, and replace that prediction with the subsequently realised RAP distribution. The chosen origin is strictly later than the teacher’s operational 2024-06 knowledge boundary, so the intervention does not depend on the potentially exposed 2024-01 teacher trajectories used in an earlier training manifest.

Each trajectory is presented 20 times, yielding 1,800 training presentations rather than 1,800 independent examples. Search/action tokens and the outcome-aligned terminal answer each receive half of the loss. Training uses a global batch size of 8 for 225 steps, full-parameter updates with learning rate 2×10^{-6} , cosine decay, 3% warm-up, and a 32K context window. These settings, the checkpoint, and the loss weighting were frozen before evaluation.

A frozen 22-field validation gate at $T = 2025-01$ had to show a pooled Forecast gain of at least 0.03, non-negative gains under both evidence regimes, complete validity, non-zero Search use, and query-unique ratio at least 0.80. Full-SFT passed this gate with a pooled gain of +0.206 and was then evaluated once on Test. Test contains all 211 held-out fields at $T \in \{2025-07, 2026-01\}$ under both evidence regimes, giving $211 \times 2 \times 2 = 844$ fresh native rollouts. Test truth was not used for training, hyperparameter selection, prompt selection, or checkpoint selection. All comparisons use matched field–origin cells and the frozen dependency-block bootstrap.

The absolute Forecast scores rise from 0.310 to 0.382 under Fixed-window access and from 0.227 to 0.364 under Expanding-history access. The pooled gain remains resolved on the 63 model-output-independent change-rich episodes, so the improvement is not confined to stable fields. At the same time, Pred–Recent and Search use increase substantially, whereas the pooled partial-residual gain and both six-month revision-alignment gains remain unresolved. Full-SFT therefore improves the end-to-end RAP policy but does not

isolate a repaired temporal-updating or evidence-acquisition mechanism; the comparison is neither Search-call-matched nor compute-normalised.

The frozen Qwen3-4B checkpoint was released in April 2025, so both Test target windows are strictly post-release and could not have entered its parametric training. Its exact earlier knowledge cutoff is not officially documented, however, and the 2024-07 training outcome may already have been represented in pretraining. The experiment therefore establishes cross-field adaptation on unseen post-release RAP outcomes, but not learning from genuinely post-cutoff supervision or transfer to open-ended literature synthesis. One deterministically overlength Test request was rerun with the maximum output reduced from 16K to 12K while preserving the model, prompt, Search protocol, and evidence; the recovery did not inspect the target.

G Reproducibility, Artifacts, and Limitations

G.1 Data and code availability

We plan to release the benchmark data and evaluation code upon acceptance. Code and data are not publicly distributed with this preprint. The following manifest documents frozen artifacts prepared for that release.

The frozen reproducibility archive is rooted at `rap_code_data_supplement/`. Its top-level SHA256SUMS records every archived file’s checksum. Table 27 lists the principal immutable artifacts; hashes are shown by their first 12 hexadecimal characters, while the archive manifest records the complete SHA-256 values.

The archived assignment table is also the paper-field membership ledger and contains each arXiv identifier, first-submission date, primary direction, optional secondary direction, and assignment type. The split file contains all 175 dependency blocks and their field membership. Fixed and Expanding Search-manifest indexes contain 1,390 records each and verify every temporal bound. The underlying Search

Model	Exact-history Forecast – EWMA	Corrected residual Spearman	Search – exact-history Forecast
GPT-5.5	+0.006 [−0.001, +0.013]	+0.163 [+0.108, +0.220]	+0.006 [+0.003, +0.009]
Qwen3.6-27B	−0.025 [−0.038, −0.013]	+0.125 [+0.066, +0.190]	−0.007 [−0.012, −0.003]
GPT-OSS-120B	−0.053 [−0.066, −0.041]	+0.117 [+0.057, +0.180]	+0.014 [+0.006, +0.022]
DeepSeek-V3	+0.006 [−0.001, +0.013]	+0.134 [+0.079, +0.191]	−0.034 [−0.042, −0.026]

Table 22: Cross-model exact-history diagnostics on Test. The first and third columns are paired future-Spearman contrasts; the middle column is permutation-corrected alignment between predicted and realised departures from EWMA. Brackets are dependency-block bootstrap 95% confidence intervals. Positive values favour the model Forecast in all columns.

GPT-5.5 input	Forecast	Paired reference	Δ Spearman [95% CI]	TV improvement [95% CI]
Exact recent	0.795	Recent	+0.002 [−0.003, +0.006]	+0.004 [+0.003, +0.006]
Exact history	0.810	EWMA	+0.006 [−0.001, +0.013]	+0.002 [−0.000, +0.005]
Exact history + Search	0.815	EWMA	+0.012 [+0.005, +0.018]	+0.004 [+0.001, +0.006]

Table 23: Detailed protocol-matched oracle-history diagnostic on GPT-5.5 Test. Counts are derived only from pre- T papers. Improvements are paired against the listed mechanical reference; positive TV improvement means lower distance. These target-aligned summaries are diagnostic inputs, not deployable leaderboard conditions.

shards (approximately 4 GB), source-paper snapshot, multi-gigabyte raw response traces, trained checkpoint, and full SFT trajectory payload are not bundled in this compact archive. All 170 Python and shell source files used for final preprocessing, construction, execution, training, and analysis are archived. Each begins with its paper location and implementation role; the source index records both the canonical source hash and the provider-neutral packaged-source hash. Search shards are deterministic derived assets: they are rebuilt by joining the frozen assignments to the source-paper snapshot and filtering each field–origin to $[T - 6\text{mo}, T)$ or $< T$. The frozen archive retains the source-manifest hashes and every derived-shard hash, together with compact analysis JSONs from the frozen submission.

G.2 Recovery checks

An independent count-only audit reconstructs the main scores, paired contrasts, Search counts, response-model identifiers, and request-attempt totals without importing the production scorer. Table 28 summarizes the finalized post-recovery Test artifacts. The smaller-model and Haiku panel contains the three Forecast conditions A0/A1/A3; the four diagnostic models contain all five A0–A4 conditions.

All final units are unique by model, field, origin, and condition. Recovery changed neither prompt nor evidence and did not rerun valid units. The single deterministically over-length SFT request described in Appendix F.5 was rerun with a lower output ceiling only; its input, model, and evidence were unchanged.

G.3 Limitations and claim boundaries

RAP measures directional arXiv submission activity in an operational AI/ML-oriented corpus, not scientific quality, impact, breakthrough probability, novelty, or complete literature-review quality. Fields may overlap, and each exact-eight slate is a fixed candidate coordinate system rather than an exhaustive or unique natural partition. Field eligibility is retrospectively conditioned on corpus growth through 2025,

although codebook construction uses only pre-2024 evidence and each interactive episode exposes only its registered pre- T Search universe.

Paper-level boundary assignments are common, so absolute scores depend on a frozen counting convention. The parallel Opus instrument supports robustness of target repeatability and persistence-level conclusions on its 38-field subset, but we did not rerun the seven-agent leaderboard using its alternative direction definitions. The human study is a single-annotator, label-blind operational-assignability audit. It supports the usability of the written codebooks but not inter-annotator agreement, domain-expert endorsement, or uniqueness of the primary label.

Finally, all-origin experiments can test controlled historical evidence use even when an origin predates a model’s cut-off; only Forecast-Strict cells support unseen-future claims. The SFT Test outcomes are strictly post-release for the frozen Qwen3-4B checkpoint and disjoint by dependency block, but its exact earlier knowledge cutoff is undocumented and the training outcomes may have been represented in pretraining. The experiment therefore establishes within-RAP adaptation to unseen later outcomes, not learning from genuinely post-cutoff supervision, transfer to open-ended scientific synthesis, or a mechanism-level repair of temporal updating.

Panel	Model	Acquisition	Readout	Pipeline
Full	GPT-5.5	+0.034 [+0.022, +0.047]	-0.002 [-0.012, +0.009]	+0.033 [+0.016, +0.050]
	Qwen3.6-27B	+0.026 [+0.004, +0.048]	+0.009 [-0.010, +0.028]	+0.035 [+0.007, +0.062]
	GPT-OSS-120B	+0.057 [+0.034, +0.081]	+0.010 [-0.008, +0.028]	+0.067 [+0.037, +0.095]
	DeepSeek-V3	+0.047 [+0.029, +0.065]	+0.007 [-0.010, +0.024]	+0.054 [+0.030, +0.079]
Matched	GPT-5.5	+0.020 [+0.010, +0.030]	+0.001 [-0.010, +0.011]	+0.021 [+0.007, +0.035]
	Qwen3.6-27B	+0.012 [-0.010, +0.034]	+0.024 [+0.004, +0.044]	+0.035 [+0.010, +0.062]
	GPT-OSS-120B	+0.061 [+0.038, +0.085]	-0.003 [-0.019, +0.015]	+0.058 [+0.033, +0.086]
	DeepSeek-V3	+0.046 [+0.027, +0.063]	+0.026 [+0.011, +0.042]	+0.072 [+0.050, +0.093]
Evidence structure after matching Search-call counts				
Panel	Model	Matched calls	Δ distinct	Jaccard
Evidence	GPT-5.5	12.144	-4.787	0.310
	Qwen3.6-27B	9.974	+11.917	0.295
	GPT-OSS-120B	12.197	-21.303	0.288
	DeepSeek-V3	6.577	-24.798	0.223

Table 24: Exact contrasts underlying Figure 3(b). Acquisition is $S \rightarrow F - F \rightarrow F$ under a common Forecast readout; Readout is $S \rightarrow S - S \rightarrow F$ under byte-identical State-oriented evidence; Pipeline is $S \rightarrow S - F \rightarrow F$. Positive values favor State orientation; brackets are field-clustered 95% confidence intervals. The final panel reports matched Search-call counts, State-minus-Forecast distinct papers, and retrieved-set Jaccard.

Model	Source trajectory	Readout	Full evidence	Matched calls
GPT-5.5	Forecast	Forecast	0.579 [0.550, 0.606]	0.579 [0.551, 0.606]
	Forecast	State	0.572 [0.545, 0.599]	0.568 [0.542, 0.595]
	State	Forecast	0.614 [0.589, 0.639]	0.599 [0.573, 0.625]
	State	State	0.612 [0.587, 0.638]	0.599 [0.573, 0.626]
Qwen3.6-27B	Forecast	Forecast	0.438 [0.403, 0.470]	0.437 [0.404, 0.467]
	Forecast	State	0.441 [0.415, 0.466]	0.428 [0.403, 0.453]
	State	Forecast	0.464 [0.432, 0.494]	0.449 [0.417, 0.480]
	State	State	0.473 [0.445, 0.503]	0.473 [0.446, 0.500]
GPT-OSS-120B	Forecast	Forecast	0.342 [0.309, 0.376]	0.342 [0.308, 0.374]
	Forecast	State	0.352 [0.327, 0.379]	0.351 [0.328, 0.377]
	State	Forecast	0.399 [0.370, 0.427]	0.402 [0.375, 0.433]
	State	State	0.408 [0.380, 0.436]	0.400 [0.373, 0.428]
DeepSeek-V3	Forecast	Forecast	0.299 [0.258, 0.339]	0.297 [0.256, 0.337]
	Forecast	State	0.301 [0.262, 0.338]	0.307 [0.269, 0.344]
	State	Forecast	0.346 [0.309, 0.381]	0.343 [0.307, 0.378]
	State	State	0.353 [0.320, 0.384]	0.369 [0.335, 0.401]

Table 25: Complete expanding-history evidence-replay matrices on Test. Entries are Future Spearman with field-clustered 95% confidence intervals. Matched calls truncate each pair of source trajectories to their episode-specific shared Search-call budget.

Full-SFT minus Base	Fixed	Expanding	Pooled
Forecast	+0.072 [+0.020, +0.123]	+0.138 [+0.086, +0.190]	+0.105 [+0.060, +0.150]
Forecast, change-rich	+0.144 [+0.044, +0.236]	+0.173 [+0.067, +0.323]	+0.159 [+0.082, +0.253]
Pred-Recent	+0.056 [+0.005, +0.109]	+0.146 [+0.095, +0.198]	+0.101 [+0.056, +0.148]
Partial residual	+0.016 [-0.038, +0.070]	+0.012 [-0.041, +0.064]	+0.015 [-0.034, +0.063]
Revision alignment, 6m	-0.013 [-0.082, +0.054]	+0.013 [-0.055, +0.082]	—
Search calls	+4.746 [+4.372, +5.152]	+5.912 [+5.438, +6.436]	+5.329 [+4.963, +5.719]

Table 26: Cutoff-clean Full-SFT on the later-origin, dependency-disjoint Test panel. Entries are paired Full-SFT-minus-Base field-macro contrasts with dependency-block bootstrap 95% confidence intervals. All 844 Full-SFT rollouts are valid. The revision-alignment protocol reports within-regime transitions separately and defines no pooled contrast, hence the dash.

Role	Archive-relative artifact	SHA-256 prefix
Dependency blocks and Dev/Test split	data/MODEL_EVALUATION_SCOPE_FREEZE_V1.json	506286a59256
Dev/Test episode manifests	data/MODEL_DEV67_EPISODES_V1.jsonl; data/MODEL_TEST211_EPISODES_V1.jsonl	2930d89885fa; a3accfcae115
Primary paper-field assignments	data/FINAL_DIRECTION_ASSIGNMENTS_PRODUCTION_V1.jsonl.gz	481efa4ca9c7
Primary / parallel codebooks	data/PRIMARY_SLATE_GPT55_EXACT8_V1.json; data/PARALLEL_SLATE_OPUS46_EXACT8_V1.json	e41557d11dff; 33f8f3524450
Complete annotated source index	provenance/SOURCE_CODE_INDEX_V1.json	45b9ef72e2a0
Frozen prompt renderer	protocol/rap_protocol.py	953b98f1b91e
Rendered A0–A4 example	protocol/RENDERED_A0_A4_EXAMPLE_V1.json	7ed8148face8
Provider-neutral execution adapter	runner/run_rap.py	0bb39bd77587
Final parameter ledger	provenance/FINAL_PARAMETER_LEDGER_V1.json	c85ac06a32a5
Development parameter ledger	provenance/DEVELOPMENT_PARAMETER_LEDGER_V1.json	c42330b92df0
Metric implementation	evaluation/rap_metrics.py	fd1b1e615733
Four-model compositional sensitivity	results/diagnostics/tv_metric_sensitivity_four_model_v2.json	065f2aaab68
Cutoff-exposure paired contrasts	results/diagnostics/exposure_stratified_paired_contrasts_v1.json	2e8b4962a800
Benchmark / model canonical numbers	results/canonical/paper_numbers_canonical_v1.json; results/canonical/core_story_results_canonical_v2.json	d219882971ad; 142a9827154f
Four-model Search counterfactual	results/diagnostics/option_counterfactual_four_model_v2.json	bae612b1984f
Human-audit analysis	results/human_audit/HUMAN_AUDIT_A1_PRIMARY_ANALYSIS_V2.json	7399ddb8b49a
Later-origin SFT analysis	results/sft/paired_analysis.json	4d01391d303c

Table 27: Frozen artifact identifiers for the planned code and data release. Search manifest indexes additionally record every derived shard’s paper count, date range, and complete SHA-256.

Model	Final units	Valid	Retained responses	Retried responses	Final-record note
Qwen3-4B	3,165	3,165	10,830	0	no retained endpoint error
Qwen3-8B	3,165	3,165	12,411	0	no retained endpoint error
Qwen3.6-27B	5,275	5,275	54,028	0	keyed format recovery complete
GPT-OSS-120B	5,275	5,275	62,572	0	keyed format recovery complete
DeepSeek-V3	5,275	5,275	37,408	0	no retained endpoint error
Claude Haiku 4.5	3,165	3,165	43,332	23	13 failed responses recovered in-trajectory
GPT-5.5	5,275	5,275	64,665	23	28 additional API attempts

Table 28: Final Test integrity. “Retried responses” counts retained response objects with more than one transport attempt. Invalid-only keyed reruns replace, rather than duplicate, the affected unit and never inspect its target; superseded generations remain in internal launch logs and are not counted as final records.