

On the Lexical Superstition of Large Language Models for Code Comprehension: Re-evaluation on Code of Low Lexical Quality

XIN SHEN, SANZHUO XI, YALI DU, and MING LI*, Nanjing University, China

Recent advances in large language models (LLMs) have made them widely used for code-related tasks. Identifier names are statistically informative in naturally occurring code, but their information is not always reliable. We investigate whether current LLMs assign disproportionate weight to lexical cues when renaming preserves program structure. We introduce Face/Off, a semantics-preserving identifier-renaming framework, and evaluate progressive naming conditions across multiple models and code-comprehension tasks. Within this framework, lexical overemphasis is pervasive across the evaluated models and primary tasks: performance generally decreases as identifier information is removed or made misleading, and outputs are often directed toward the meanings suggested by misleading names. The pattern persists under representative prompt- and fine-tuning-based interventions, suggesting that lexical overemphasis is an entrenched problem. A type-inference control confirms a boundary: naming effects are smaller when the answer is locally recoverable without the target name. These results do not imply that identifiers are unhelpful; rather, they reveal a systematic vulnerability in how current LLMs balance lexical cues against program structure. Our findings motivate evaluations and modeling methods that preserve the benefits of natural code regularities while keeping conclusions grounded in accurate, formalized code semantics.

CCS Concepts: • **Software and its engineering**; • **Computing methodologies** → **Artificial intelligence**;

Additional Key Words and Phrases: Large Language Model, Code Modeling, Robustness

Preprint. Manuscript under review.

1 Introduction

Large language models (LLMs) are now widely used for source-code tasks [7, 15, 53, 58], including code search [30], code summarization [2], clone detection [29], bug localization [25], and code completion [33]. Recent instruction-following models have further improved performance, particularly in generative settings, and have become an important class of methods for both code understanding and generation.

These advances are consistent with the naturalness hypothesis: human-written code is repetitive and statistically predictable, which makes language modeling useful for software artifacts [3, 23]. Source code also contains natural-language information, particularly in identifiers. We use **lexical information** to refer to the information conveyed by the words in those identifiers. Such information is often useful rather than spurious by default: descriptive names can support human comprehension [49], and high-quality lexical information and consistent coding styles can also facilitate models’ processing of well-written code [28, 50].

The formal semantics of a program, however, are not identical to the distributional regularities of the corpus in which it appears. For identifiers eligible for consistent alpha-renaming, lexical content can change without changing program behavior. Prior work has shown that code models can nevertheless be fragile under lexical perturbations [59, 62]. Figure 1, for example, shows summaries that follow identifier meanings even when those meanings conflict with the implementation. We call this behavior *lexical overemphasis* (or, metaphorically, *lexical superstition*): disproportionate sensitivity to identifier-level cues when task-relevant program structure is held constant. Our central questions are

*Corresponding author.

Authors’ Contact Information: Xin Shen, shenx@lamda.nju.edu.cn; Sanzhuo Xi, xisz@lamda.nju.edu.cn; Yali Du, duy1@lamda.nju.edu.cn; Ming Li, lim@lamda.nju.edu.cn, Nanjing University, Nanjing, China.

Manuscript submitted to ACM

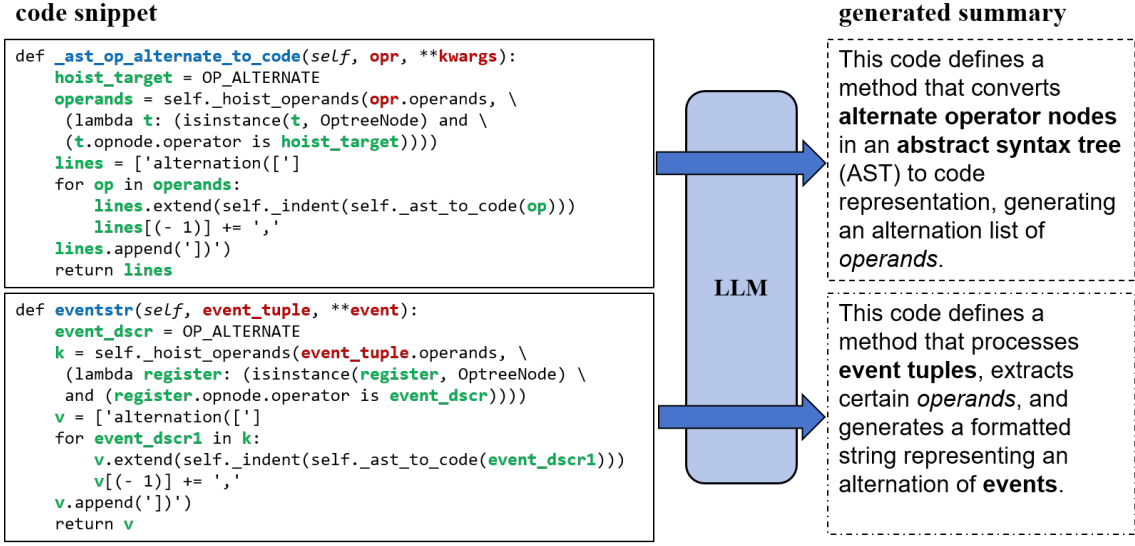


Fig. 1. Code summaries generated by GPT-3.5-turbo for the same implementation under different naming conditions. Bold text marks output phrases associated with identifiers in the code, and italic text marks phrases associated with method names. In the lower example, the summary follows the misleading identifiers even though they conflict with the implementation.

therefore: Do the evaluated LLMs overemphasize lexical information during code comprehension, and, if so, to what extent and in what manner?

This question matters because benchmark performance may not fully characterize behavior when naming quality differs from the benchmark distribution. If a model assigns excessive weight to identifier cues, its reliability may decline on poorly named, anonymized, decompiled, or deliberately misleading code.

Because LLMs are trained on observational corpora, exploiting correlations between names and code behavior is expected and often beneficial. The reliability question is whether this dependence remains calibrated when the cues are missing or conflict with the implementation. This distinction matters because strong benchmark performance may be interpreted as evidence of code understanding or reasoning [20, 31, 42], while models are increasingly considered for consequential tasks such as code review and vulnerability detection. Controlled counterexamples can reveal failure modes that ordinary test distributions may not expose.

Dependence is therefore not a binary attribute. Our purpose is not to reject software naturalness or to require models to ignore identifiers. Instead, we systematically characterize how model behavior changes as lexical cues move from informative to absent and then misleading, while data flow, control flow, and algorithmic structure remain unchanged.

We investigate this question with **Face/Off**, an evaluation framework based on semantics-preserving identifier transformations. We characterize how pervasive lexical sensitivity is across the evaluated models and tasks, test its persistence under representative interventions, and discuss possible contributing mechanisms more tentatively. To distinguish the loss of a task-relevant lexical cue from reliance on a cue that is unnecessary for the answer, we additionally conduct a targeted type-inference control on samples whose types can be determined from local program evidence.

2 Related Work

2.1 LLMs for Code

Learning-based methods for code have evolved from statistical and recurrent models to Transformer-based pre-trained models and instruction-following LLMs. These models are used in tasks such as code generation, completion, and vulnerability detection.

Early Transformer-based approaches adapted language models to code through additional pre-training, as in CodeBERT [15] and Codex [7]. Other work incorporates program structure, including graph, control-flow, and data-flow information [21, 37, 54]. More recent instruction-following model families, including GPT [1, 51], DeepSeek [22, 68], StarCoder [32], and Qwen [60, 61], support a broad range of code tasks in zero- and few-shot settings.

Despite this progress, code models retain limitations in generation accuracy, robustness [5], security and data contamination [8, 38], interpretability, and data bias [28].

2.2 Code Naturalness, Shortcut Learning, and Program Comprehension

The naturalness hypothesis holds that human-written software is sufficiently repetitive and predictable to be modeled statistically [23]; this observation underpins much work on machine learning for code [3]. It does not, however, imply that every distributionally predictive feature is necessary for a task’s semantics. For a conditional model $p(y \mid x)$, identifier words may improve prediction because they correlate with behavior in ordinary corpora, even when a consistent renaming leaves the relevant program behavior unchanged. Our study does not dispute the usefulness of these correlations. It examines their reliability when lexical cues and program structure are experimentally placed in conflict.

This distinction parallels research on shortcut learning. Across machine learning, models can perform well on standard test distributions by using features that cease to be reliable under controlled or shifted conditions [18]. In natural-language inference, for example, controlled counterexamples have been used to distinguish correct predictions based on intended relations from predictions based on fallible lexical and syntactic heuristics [39]. Face/Off applies the same diagnostic principle to code: semantics-preserving renaming holds the program structure fixed while varying one family of predictive cues. This connection motivates our experimental logic, but we limit our claims to the evaluated tasks, models, and transformations.

Identifier information is also important in human program comprehension. Descriptive identifiers can accelerate semantic-defect detection, with effects that depend on the comprehension task and developer experience [49]. Program-comprehension research likewise shows that programmers use recognizable code “beacons,” that misleading beacons can induce false initial interpretations [56], and that procedural relations such as control flow contribute to experts’ mental representations [47]. Field observations further show that professional comprehension extends beyond source text to browsers, documentation, and development tools [57]. Thus, neither humans nor models should be expected to ignore names. The relevant question is how conclusions are revised when a useful cue conflicts with other available evidence.

2.3 Code Perturbation

Code perturbation modifies selected properties of a program to observe a model’s response, often while preserving functionality. Perturbation methods can be organized by model access (white-box or black-box) and by the transformed program feature, such as identifiers or coding style.

In code intelligence, code perturbation is widely used in attack-and-defense and robustness studies [11]. Because white-box methods require model access that is not always available, many studies use black-box approaches. Notable identifier-based attacks include MHM [66], ACCENT [67], WIR-Random [64], and ALERT [63]. Style-transfer methods insert dead code [41] or replace loop structures [34].

Beyond adversarial contexts, code perturbation serves as a tool for probing model behaviors [9, 24]. Lexical perturbation has recently gained attention: Yang et al. examine its role in adversarial settings [14, 59, 62], Gao et al. apply counterfactual analysis [17], and Hu et al. analyze naming quality [26].

Although prior works have recognized the importance of lexical information for code comprehension, many study identifier perturbations in attack-and-defense or robustness settings. Our work is closely connected to this literature: we share semantics-preserving transformations, while using representative mitigation strategies in RQ3 as diagnostic interventions rather than as candidates for a state-of-the-art defense. Their role is to test whether the lexical influence characterized in RQ2 can be readily suppressed.

In RQ1 and RQ2, identifier renaming is a controlled probe for characterizing how the quality and content of lexical information affect model interpretation. Rather than optimizing an attack or a defense, we compare a progressive spectrum of naming conditions and analyze both the magnitude and direction of changes in model responses. These analyses examine whether model behavior is anchored more strongly in identifier-level cues than in the unchanged program structure.

The remaining performance gaps show that lexical overemphasis persists across the tested models and methods, without implying that every possible intervention must fail.

Accordingly, our contribution is complementary to attack-and-defense research. We borrow relevant perturbation and mitigation techniques but employ them in a progressive, diagnostic study of lexical reliance.

3 Experimental Setup

3.1 Research Questions

We organize the study around three research questions. RQ1 measures sensitivity to naming quality across the evaluated models and tasks; RQ2 examines whether misleading names directionally affect model outputs; and RQ3 uses mitigation attempts to probe the persistence of the observed sensitivity.

RQ1: To what extent does identifier naming quality influence LLM performance on the evaluated code-comprehension tasks?

RQ1 compares performance under progressive naming conditions while holding the eligible program structure and behavior fixed. It tests how broadly the pattern recurs across the models, architectures, and tasks included in this study.

RQ2: In what manner does identifier information influence LLM code comprehension?

Performance degradation alone does not show how names affect a model’s interpretation. RQ2 therefore tests whether outputs move in the direction suggested by misleading identifiers, rather than merely changing under a distribution shift. Figure 1 provides an initial example; the experiments examine whether related directional patterns appear in the evaluated tasks.

RQ3: What do mitigation attempts reveal about the persistence of lexical overemphasis in current LLMs?

RQ3 extends RQ2 by testing whether representative prompt- and fine-tuning-based interventions readily suppress the observed lexical influence. We monitor both overall performance and the gap between naming conditions; a persistent gap indicates that the behavior is not readily mitigated by the evaluated interventions. The scope of this inference is discussed in Threats to Validity.

3.2 Terminologies

This section defines the terms used in our experimental design.

3.2.1 Semantics of Code. In this study, the relevant preservation criterion is contextual operational behavior: an eligible transformation leaves control flow, data flow, operations, literals, and interactions with the surrounding context unchanged. We use **functionality** more narrowly for the observable input–output mapping, including relevant effects on external state; two implementations may therefore provide the same functionality while differing internally. For the cases considered here, controlled alpha-renaming preserves both. We exclude boundary cases in which names can affect dynamic resolution or external interaction, and verify that no other program construct changes by checking AST identity modulo the renamed identifier tokens.

3.2.2 Lexical Information of Code. The **lexical information** in this study is the additional information conveyed by the natural-language words in identifiers. Identifiers have both a nominal role in the program and a human-facing descriptive role. For identifiers that satisfy the eligibility rules of Face/Off, consistently renaming a binding and all of its references preserves the program’s operational semantics, although it can change readability and the expectations of a human or model reader.

We therefore use *identifier naming information* as an alternative term for lexical information. Calling this information semantics-preserving under renaming does not mean that names are useless; it means that, for the transformations studied here, their descriptive content is not required to preserve the executed behavior.

3.2.3 "Semantics" of Non-Self-Contained Code Snippets. We call a snippet **self-contained** when the bindings needed to interpret the transformed code are defined within the supplied snippet. A non-self-contained snippet may depend on external functions, attributes, or variables whose behavior cannot be determined from the snippet alone. Such examples are common in datasets including CodeSearchNet [27]. Models may use names and surrounding context as evidence about these unresolved dependencies, but the supplied snippet does not by itself establish their behavior. We therefore restrict the standard Face/Off transformation to eligible locally bound identifiers and examine external identifiers separately in Section 4.2.

3.3 Method: Face/Off

Based on these considerations, we design an evaluation framework called **Face/Off** to examine how model behavior changes under controlled variation in identifier information. For identifiers that meet the eligibility conditions, consistent renaming preserves operational behavior while changing the lexical cues available to the model.

Perturbative naming. This condition replaces identifiers with semantically similar alternatives and retains naturalness as a selection criterion. We sample replacements using CodeBERT [15] representations rather than optimizing them against the evaluated model through M–H sampling [66] or evolutionary search [63]. It provides a reference for relatively mild lexical variation.

Face/Off

Evaluated Code Snippets w/ identical semantics

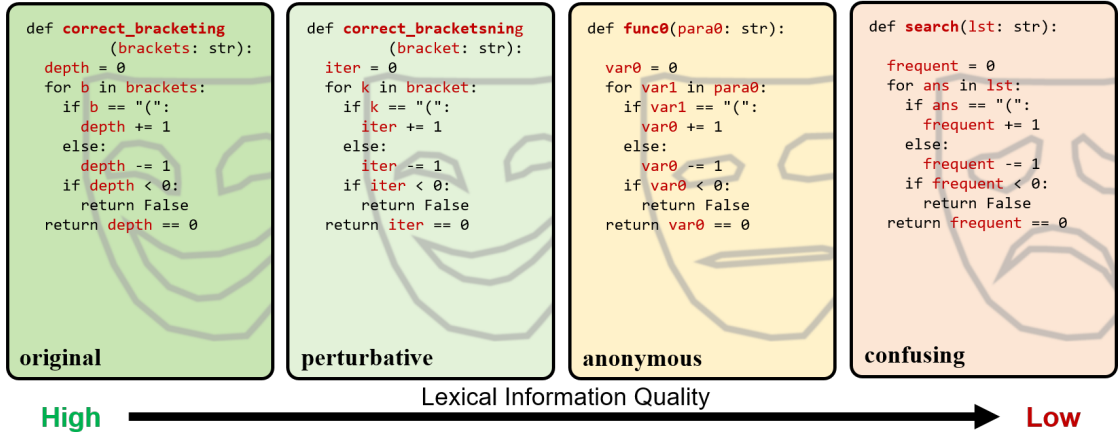


Fig. 2. The Face/Off evaluation framework, illustrated with a code snippet under different naming schemes. The Confusing condition uses identifiers from an unrelated donor snippet. For eligible renamings, the lexical “face” changes while operational behavior is preserved.

Anonymous naming. This condition replaces eligible identifiers with systematic placeholders such as `func0`, `func1`, `var0`, and `var1`. The placeholders remove most descriptive content without intentionally pointing toward an unrelated function, providing a reference between informative and misleading names.

Confusing naming, or targeted naming. This condition tests whether identifiers drawn from another snippet can direct model outputs toward the meanings associated with that snippet. We call the donor snippet the *target code* and construct the mapping using identifier type and order of appearance.

Shuffling naming. This scheme is used only for the exploratory analysis in Section 7.2; it is not part of the standard Face/Off evaluation. It permutes the identifier mapping while retaining the same identifier set.

As illustrated in Figure 2, Face/Off presents the same eligible program under progressively less informative and then misleading naming conditions. Its lexical “face” changes while the controlled alpha-renaming preserves operational behavior.

We denote by $\{C_A, D_A\}$ the source code and its corresponding documentation. Let C_A^B denote the result of confusing renaming of C_A using C_B as the target code. $\mathcal{M}(C)$ denotes the model’s output on C .

Accompanying text is handled by task rather than by renaming every identifier-like word. For the CodeSearchNet-based tasks, AST-based mappings transform the code; when a naming condition changes the subject-function name, an exact occurrence of that name in the corresponding description or reference follows the same mapping. Parameter names and other prose remain unchanged because they may convey task-relevant information. In code–document matching,

only the positive description is synchronized; random negative descriptions remain unchanged. Transformation failures were manually completed so that all conditions retain the same 600 samples, and the resulting descriptions were inspected.

For HumanEval, the natural-language problem description is excluded from the input. The model receives only the transformed function signature and a truncated body prefix; the same mapping covers definitions and references in the prefix and held-out completion, and the evaluation entry point follows the transformed function name. Unit tests are withheld and used only for functional evaluation.

Confusing renaming introduces identifiers from a randomly selected donor snippet C_B while retaining the eligible implementation of C_A ; donors come from a different class when labels are available, and identifiers are mapped by type and order of appearance. We do not impose a subjective semantic-dissimilarity criterion, so incidental similarities are part of the sampling procedure and may weaken or strengthen individual contrasts. Section 5.1 tests whether outputs move toward the meanings associated with the sampled donors.

In the standard Face/Off setting, external identifiers remain unchanged because their bindings and behavior may not be available in the snippet. Section 4.2 examines them separately with the extended construction and an insertion control.

3.4 Tasks

Code-Document Matching. Code-Document Matching asks whether a code snippet and a brief description correspond. Given a pair (C_i, D_j) , the model outputs a binary decision. We use the original pair (C_A, D_A) as a positive sample and a randomly selected irrelevant description D_B to construct the negative pair (C_A, D_B) ; text handling follows Section 3.3. As shown in Table 2, the evaluated models obtain a 100% true negative rate (TNR) for these random pairs under the Original condition, indicating that the sampled negatives are readily distinguishable in that setting.

We report classification accuracy, along with true positive rate (TPR) and true negative rate (TNR). The CodeSearchNet dataset [27] is used here, as well as for Code Search and Code Summarization. To prevent interference from other information, we modify comments by removing structured parameter-list sections, usage examples, URLs, and other content likely to provide direct answer cues.

Code Search. Code Search evaluates a model’s ability to retrieve code from a natural-language query. Given $D = \{(C_i, D_i)\}$, we encode code and text separately and rank each C_j for query D_i by the similarity between $\mathcal{M}(C_j)$ and $\mathcal{M}(D_i)$.

Mean Reciprocal Rank (MRR) is used as the evaluation metric [13, 36], which measures the average of the reciprocal ranks of results for a set of queries.

Code Summarization. Code summarization requires the model to generate a one-sentence natural-language summary for a given code snippet C_i . Unlike code–document matching, it evaluates an open-ended description rather than a binary decision.

Following prior work [16, 36], we evaluate the output $\mathcal{M}(C_i)$ against the reference description D_i using BLEU [46] (with 4-gram precision), ROUGE-L [35] (with F1 reported as the primary metric), and METEOR [4]. Here, D_i is an evaluation reference rather than part of the model input, and its treatment follows Section 3.3.

Code Completion. In Code Completion, the model receives a transformed function signature followed by a truncated prefix of the function body and generates the remainder of the solution. Input transformation and functional evaluation follow Section 3.3.

Functional correctness is evaluated using Pass@1 [1, 6, 22, 48]. We use the HumanEval dataset [7]. Unlike the standard setting, we filter examples with sufficiently long solution code, randomly truncate the code, and append the first few lines of the canonical solution to the input so that both the supplied prefix and held-out completion contain at least one identifier.

3.5 Evaluated Models

We evaluate a diverse set of models, including both large instruction-following LLMs (via in-context learning) and smaller open-source models (via fine-tuning).

Larger instruction-following models (in-context learning):

- GPT-3.5-turbo-0125 [45]: A decoder-only model fine-tuned with RLHF for instruction following. We access it via OpenAI’s API.
- GPT-4o-mini [1]: A representative of the GPT-4 family, known for strong performance across software engineering tasks.
- LLaMA3:70B-Instruct [52]: A multilingual LLM trained on 1.4 trillion tokens, with 4.5% code from GitHub.
- DeepSeek-Coder-V2 [68]: An open-source MoE code model with 236B total parameters (21B active), further pre-trained on 6 trillion tokens.

Smaller open-source models (fine-tuning):

- CodeBERT [15]: A Transformer model pre-trained with masked language modeling and replaced token detection for code understanding.
- GraphCodeBERT [21]: Extends CodeBERT with data flow information to encode variable relationships.
- CodeT5 [53]: An encoder-decoder model pre-trained on large-scale source code for both understanding and generation tasks.
- DeepSeek-Coder-1.3B [22]: A base model (1.3B parameters) pre-trained from scratch on 2 trillion tokens with a 16K window for code generation and infilling.

3.6 Prompting

We evaluate instruction-following LLMs through prompting, following their standard mode of use and without task-specific parameter updates.

For code–document matching and code summarization, we use few-shot prompting as illustrated in Figure 3. Prompt examples are randomly sampled from the training set. Unless otherwise specified, each prompt contains two examples; for code–document matching, these comprise one positive and one negative example. Following prior work [43], we use the zero-shot setup shown in Figure 3 for code completion.

Prompt for Code Summarization	Prompt for Code Completion
<pre> /*Instruction*/ Act as a coding expert. Please summarize the functionality of the code below in one sentence. /*Examples*/ ### Example code for this task : ... def bubble_sort(arr): n = len(arr) for i in range(n): {...} return arr ... Answer: Sort a list in ascending order using the bubble sort algorithm. {Another Code-Answer Example} /*Query*/ ### Now please summarize the following code: ... {Target Code Snippet} ... </pre>	<pre> /*Instruction*/ Act as a coding expert. Please complete the function according to the document. /*Input*/ ... from typing import List def mean_absolute_deviation(numbers: List[float]) -> float: """ For a given list of input numbers, calculate Mean Absolute Deviation around the mean of this dataset. Mean Absolute Deviation is the average absolute difference between each element and a centerpoint (mean in this case): MAD = average x - x_mean >>> mean_absolute_deviation([1.0, 2.0, 3.0, 4.0]) 1.0 """ mean = sum(numbers) / len(numbers) ... </pre>

Fig. 3. Two (abbreviated) examples of the prompt used in our experiments.

4 RQ1: Cross-Task Evaluation

4.1 Face/Off Main Results

We now summarize the setting of cross-task Face/Off evaluation with Table 1, following the ideas and criteria mentioned above.

Table 1. This table illustrates the correspondence between tasks, models and datasets used in this section. The upper section lists large language models evaluated using in-context learning, while the lower section details open-source models evaluated through fine-tuning.

Evaluated Models	Task	Code-Doc Matching	Code Search	Code Summarization	Code Completion
	Dataset	CodeSearchNet	CodeSearchNet	CodeSearchNet	HumanEval
GPT-3.5-turbo		✓		✓	✓
LLaMA3:70B-Instruct		✓		✓	✓
DeepSeek-Coder-V2		✓		✓	✓
GPT-4o-mini		✓		✓	✓
Text-embedding-3			✓		
CodeBERT			✓	✓	
GraphCodeBERT			✓	✓	
CodeT5				✓	
DeepSeek-Coder-1.3B				✓	

For each task, the naming conditions are derived from the same underlying samples. The controlled transformation is designed to vary eligible identifier information while retaining the other program content, thereby isolating this factor within the limits discussed in Section 3.3 and Threats to Validity.

4.1.1 Code-Document Matching. Table 2 reports code-document matching accuracy. For each evaluated model, performance decreases from Original to Anonymous naming and decreases further under Confusing naming; Perturbative naming produces a smaller change.

Table 2. Performance (shown in accuracy %) of various LLMs under different Face/Off schemes. Subscripts indicate corresponding true positive and true negative rates (TPR|TNR).

Evaluated Model	Setting			
	Original	Perturbative	Anonymous	Confusing
GPT-3.5-turbo	78.27 _{56.54 100.0}	71.46 _{42.93 100.0}	67.61 _{35.23 100.0}	57.16 _{14.99 99.32}
LLaMA3:70B-Instruct	93.96 _{87.92 100.0}	91.77 _{83.71 99.83}	87.56 _{75.13 100.0}	70.61 _{59.28 81.94}
DeepSeek-Coder-V2	90.52 _{81.04 100.0}	86.58 _{73.16 100.0}	85.26 _{70.70 99.83}	73.08 _{47.36 98.81}
GPT-4o-mini	88.26 _{76.51 100.0}	84.65 _{69.30 100.0}	79.73 _{59.45 100.0}	67.89 _{39.18 96.59}

Examining TPR and TNR separately, TNR remains near 100% in most conditions, whereas TPR accounts for most of the accuracy decline. The lower TNR under Confusing naming for some models also shows that donor identifiers can make a mismatched description appear more plausible. Section 5.1 examines this directional effect more directly.

4.1.2 Code Search. Table 3 presents the MRR results for code search. Among the evaluated models, CodeBERT degrades the most, while GraphCodeBERT—using the same architecture but with additional data flow-based attention—performs similarly to the commercial-grade encoder Text-embedding-3 [44].

Table 3. Mean Reciprocal Rank (MRR) results for code search and performance degradation ratios for two fine-tuned models and the encoding API under different Face/Off naming schemes.

Evaluated Model	Setting			
	Original	Perturbative	Anonymous	Confusing
CodeBERT	93.05	84.19 (9.521%↓)	72.77 (21.79%↓)	37.06 (60.17%↓)
GraphCodeBERT	93.98	86.78 (7.661%↓)	79.81 (15.07%↓)	45.82 (51.24%↓)
Text-embedding-3	91.48	78.13 (14.59%↓)	72.15 (21.13%↓)	47.21 (48.39%↓)

All three renamed variants reduce MRR, with the largest decrease under Confusing naming. Because retrieval is based on encoder similarity, these results are consistent with lexical changes altering the relative positions of code and queries in the representation space. MRR alone, however, does not identify the direction or magnitude of the underlying embedding shifts.

4.1.3 Code Summarization. Table 4 reports average code-summarization scores. Instruction-following models are evaluated through few-shot prompting, whereas the smaller open-source models are fine-tuned. Every evaluated model scores below its Original condition after renaming, and Confusing naming yields the lowest score in each case.

The same ordering appears for both instruction-following and fine-tuned models, although the absolute scores and the size of the decreases differ.

4.1.4 Code Completion. Table 5 presents code completion performance of four LLMs across all Face/Off settings.

Code completion contains the clearest exceptions to the ordering observed in the other tasks. Anonymous naming sometimes performs better than Perturbative naming, and DeepSeek-Coder-V2 improves slightly over its Original score under Anonymous naming.

We attribute this in part to the nature of the task. The identifiers being renamed constitute a relatively small portion of the supplied signature and partial function body, while literals, operations, and control/data-flow relations remain available. Because the HumanEval descriptions are not included in the model input, the reversal cannot be attributed to reliance on the natural-language problem statement. Anonymous naming supplies consistent neutral placeholders,

Table 4. ROUGE-L F1 scores for code summarization of various LLMs under Face/Off framework. The upper section shows instruction-following models evaluated via in-context learning, and the lower section presents fine-tuned open-source models.

Evaluated Model	Setting			
	Original	Perturbative	Anonymous	Confusing
GPT-3.5-turbo	18.75	14.08	14.97	12.76
LLaMA3:70B-Instruct	17.82	15.48	15.28	13.71
DeepSeek-Coder-V2	19.92	17.34	15.94	14.55
GPT-4o-mini	17.81	15.33	14.44	13.73
DeepSeek-Coder-1.3B	22.22	15.88	13.63	12.31
CodeBERT	19.50	13.24	13.75	9.84
CodeT5	22.64	16.98	16.75	11.69
GraphCodeBERT	20.06	15.87	12.98	9.66

Table 5. Pass@1 results for Code Completion and performance degradation ratios for evaluated LLMs under different Face/Off naming schemes.

Evaluated Model	Setting			
	Original	Perturbative	Anonymous	Confusing
GPT-3.5-turbo	66.93	61.42(8.232%↓)	65.35(2.360%↓)	55.51(17.06%↓)
LLaMA3:70B-Instruct	62.20	52.28(15.94%↓)	58.26(6.334%↓)	40.94(34.18%↓)
DeepSeek-Coder-V2	86.22	83.07(3.653%↓)	89.37(3.653%↑)	57.48(33.33%↓)
GPT-4o-mini	88.19	76.38(13.39%↓)	83.85(4.921%↓)	73.22(16.97%↓)

whereas perturbative naming can introduce alternative lexical associations; we treat this explanation as a hypothesis rather than a separately identified causal result.

Confusing naming nevertheless produces the lowest Pass@1 for each evaluated model, with decreases ranging from 16.97% to 34.18% relative to Original.

Across the four tasks, removing or contradicting identifier information generally reduces performance, with task-specific exceptions in code completion. Section 4.4 summarizes these patterns and their scope.

Comments on Prompt Setting. Prompt design can affect instruction-following models. As a sensitivity analysis, we evaluate GPT-3.5-turbo on code-document matching with zero-shot, one-shot, and two-shot configurations using different example combinations.

Table 6. Effect of prompt settings on GPT-3.5-turbo in code-document matching. We report average accuracy, with subscripts indicating the corresponding true-positive and true-negative rates (TPR|TNR).

Prompt setting	Original	Anonymous	Confusing
Zero-Shot	69.21 _{38.42 100.0}	63.29 _{26.57 100.0}	56.31 _{13.46 99.15}
One-Shot(+)	77.35 _{54.87 99.83}	70.70 _{41.57 99.83}	57.16 _{16.52 97.79}
Two-Shot(+/-)	77.18 _{54.36 100.0}	67.98 _{35.95 100.0}	56.73 _{14.48 98.98}
Two-Shot(+/-)	78.27 _{56.54 100.0}	71.47 _{42.93 100.0}	57.16 _{14.99 99.32}

As shown in Table 6, absolute accuracy varies across prompts, but all tested configurations retain the ordering Original > Anonymous > Confusing. This result shows that the pattern is not specific to the single prompt used in the main experiment; it does not establish invariance to prompt design more generally.

4.2 Impact of External Identifiers

The standard experiments rename only eligible locally defined identifiers. External functions, attributes, and variables may also provide informative lexical cues, but their behavior is not defined within the snippet. We therefore examine them separately with an extended construction.

Method: Extended Face/Off. As discussed in Section 3.2.3, directly renaming unresolved external identifiers can change the referenced object. The extended construction uses an added binding block to preserve the original behavior. Because the inserted code changes the program representation, this construction is less strictly controlled than local alpha-renaming.

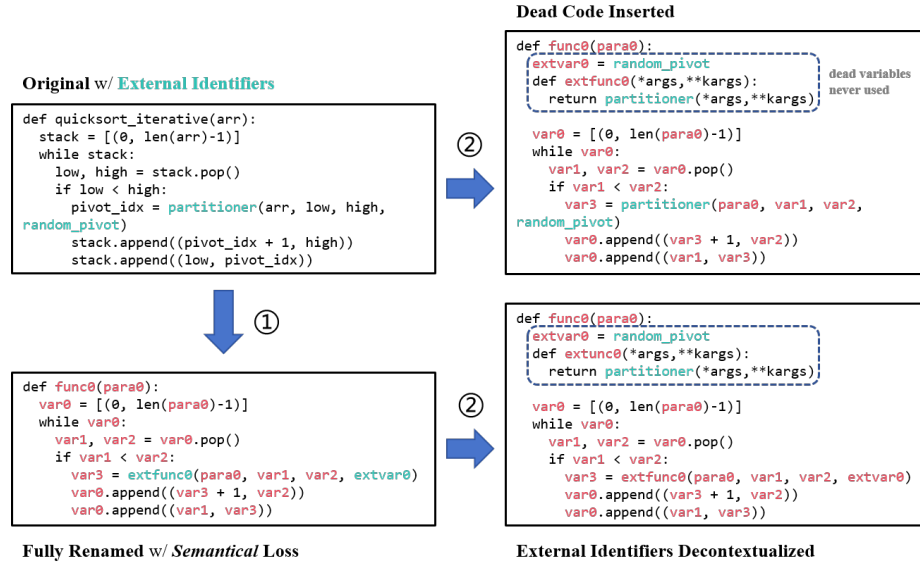


Fig. 4. An example of decontextualizing an external variable or function by wrapping it in a local definition. The corresponding dead-code insertion used for the control condition is also illustrated.

Figure 4 illustrates the extended construction. We rename an external identifier and insert a preceding assignment that binds the new local name to the original external object. This retains access to the same object while moving the original lexical cue out of its use sites.

The original external name therefore remains once in the binding block but is removed from its original use sites. This decontextualization tests whether relocating the cue changes model performance.

Because the added binding block changes the syntax, the extended method is not directly comparable to the local alpha-renaming intervention. We include a control that inserts a structurally similar dead-code block without renaming [41]. This control estimates part of the insertion effect, although it cannot remove every difference between the conditions.

Experiment Results. We employ the extended Face/Off to evaluate various models on two tasks: code-document matching and code summarization. The results are shown in Table 7.

Table 7. Re-evaluation on two tasks, illustrating further performance degradation from decontextualizing external variables. Performance in the Original condition provides a reference for the model’s response to dead-code insertion.

Evaluated Model	Setting	Code-Doc Matching	Code Summarization
GPT-3.5-turbo	Original	78.27	18.75
	w/ Dead Code	64.00	19.04
	Anonymous	71.46	14.97
	w/ Dead Code	56.15	13.29
	w/ Extended Face/Off	53.70	12.73
LLaMA3:70B-Instruct	Original	93.96	17.82
	w/ Dead Code	93.10	16.75
	Anonymous	87.56	15.28
	w/ Dead Code	88.11	14.47
	w/ Extended Face/Off	85.86	13.73
DeepSeek-Coder-V2	Original	90.52	19.92
	w/ Dead Code	89.69	17.08
	Anonymous	85.26	15.94
	w/ Dead Code	86.60	14.16
	w/ Extended Face/Off	83.67	13.60
GPT-4o-mini	Original	88.26	17.81
	w/ Dead Code	87.75	17.63
	Anonymous	79.73	14.44
	w/ Dead Code	79.34	13.68
	w/ Extended Face/Off	75.51	13.47

After external identifiers are decontextualized, the table shows additional performance decreases for every evaluated model and task relative to the corresponding Anonymous-plus-dead-code condition. The size of this additional decrease varies across models and tasks.

These results are consistent with external identifier names contributing to performance when they appear at their use sites. Because the intervention relocates rather than eliminates the names and introduces an added binding block, it provides supporting evidence rather than a clean estimate of the effect of all external identifiers. We therefore do not generalize this result to every identifier or external dependency.

4.3 Targeted Type-Inference Semantic Control

The original four tasks can legitimately reward identifier information: descriptions, queries, and completions may be easier when names express intent. Their performance changes therefore do not alone distinguish disproportionate lexical reliance from the removal of information that the task ordinarily uses. We add a targeted control in which a selected variable’s type is already determined by literals, operations, collection construction, comparisons, or local control and data flow. This supplementary boundary-condition experiment asks whether the larger effects in the original tasks persist when the answer is locally recoverable without the target name; it is not a fifth task intended for direct cross-task comparison.

Data and construction. We use the clean test split of ManyTypes4Py v0.7 [40]. A conservative automatic screen retains targets whose assignments are locally type-determining without repository-level or external-API type knowledge. We remove direct type cues from annotations, type comments, comments, and function docstrings while retaining the

surrounding program structure and non-target lexical context. The resulting set contains 317 target variables from 217 projects and 217 source files.

Each target yields three paired conditions. *Original* retains its name; *Target-Anonymous* replaces the target binding and its references with a collision-free placeholder; and *Target-Confusing* replaces the same binding and references with a real identifier associated with a conflicting top-level type. No other identifier, API, literal, or program relation is changed. The variants pass parsing, compilation, binding-occurrence, and alpha-equivalence checks.

Models and evaluation. The prompt identifies one target variable in the sanitized code and asks for one of 15 normalized type labels. We evaluate GPT-3.5-turbo-0125, GPT-4o-mini, and Llama-3.1-70B-Instruct [12].¹ All conditions use the same prompt and temperature 0. We report target-level strict exact-match accuracy; paired confidence intervals are clustered by project, and McNemar tests are Holm-corrected within each model.

Table 8. Target-level strict exact-match accuracy for the type-inference semantic control. Each condition contains the same 317 targets.

Model	Original	Target-Anonymous	Target-Confusing
GPT-3.5-turbo-0125	90.5%	88.3%	89.0%
GPT-4o-mini	82.6%	79.5%	84.9%
Llama-3.1-70B-Instruct	90.2%	90.2%	87.4%

Results. Table 8 shows changes of -3.2 to $+2.2$ percentage points relative to Original, with different directions across models and conditions. None of the Anonymous–Original or Confusing–Original differences is significant after Holm correction. The only corrected significant contrast is GPT-4o-mini’s Confusing accuracy relative to Anonymous ($+5.4$ points; project-clustered 95% CI $[+1.2, +9.8]$; Holm-adjusted $p = .018$), opposite to a prediction that misleading names must consistently reduce accuracy. Errors and condition changes are concentrated in dict targets, whereas many primitive targets are at or near ceiling.

Within this conservatively screened subset, where local semantic evidence suffices for the answer, changing only the target name has a smaller and less consistent effect than in the original four tasks. Names can still modulate individual predictions, particularly for composite types, but they are not the principal required evidence in this conservatively screened subset. This result confirms a boundary on the main finding rather than showing that models never use names or that the original tasks should be name-independent.

4.4 Section Summary

Figure 5 summarizes the cross-task results. Perturbative naming generally produces the smallest decrease, Anonymous naming a larger decrease, and Confusing naming the largest. Code completion departs from this ordering for Perturbative versus Anonymous naming, but Confusing remains the lowest-performing condition for each evaluated model.

The extended experiment further suggests that the location and context of external identifier cues can matter, although its added binding block makes the evidence less controlled than the standard Face/Off transformations.

Overall, sensitivity to identifier quality is pervasive across the evaluated models and original four tasks. The targeted type-inference control confirms a boundary on its magnitude: in the conservatively screened subset, effects are smaller and directionally inconsistent when the answer is recoverable without the target name. RQ2 next asks whether the

¹Llama-3.1-70B-Instruct was used as the closest available successor to the LLaMA3:70B-Instruct endpoint used in the main experiments.

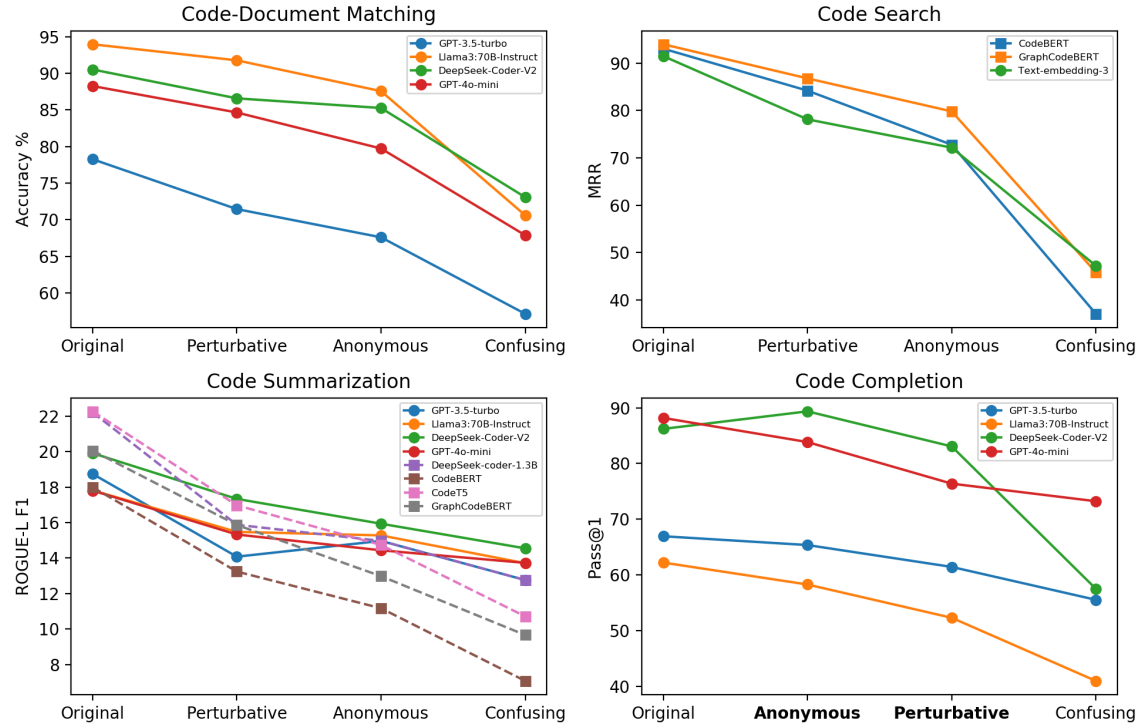


Fig. 5. Line chart display of Face/Off evaluation results. In the figure, circular data points represent larger instruction-following models, while square data points represent smaller open-source models. Note that in the code completion chart, we have partially reversed the order, and the considerations are discussed in 4.1.4.

sensitivity observed in the original tasks is directional—that is, whether misleading names guide outputs toward the donor meaning—rather than treating performance changes alone as sufficient evidence of overemphasis.

5 RQ2: Effect Analysis

RQ1 shows performance sensitivity under controlled naming changes, but it does not by itself distinguish loss of a useful cue from active guidance by a misleading one. RQ2 addresses this distinction by testing whether outputs move toward the semantics suggested by donor identifiers.

5.1 Guiding Effect of Lexical Information

We focus on Confusing naming, where C_A^B retains the eligible implementation of program A but receives identifiers sampled from program B . RQ1 evaluates outputs against the correct target for A ; here we additionally compare them with references associated with B . A shift toward B provides directional evidence that the donor identifiers influence the output, although it does not by itself identify the model’s internal mechanism.

Code-Document Matching. Because negative samples in the original matching task have TNR near 100%, we reformulate the analysis as a two-document selection task. The model sees the correct and donor descriptions alongside the code and chooses between them. Table 9 shows lower accuracy under Confusing naming for every model; for

GPT-3.5-turbo, accuracy falls from 92.84% to 52.39%, close to chance in this binary task. The smaller or absent changes under Anonymous naming support a directional effect from the donor names rather than a generic consequence of renaming alone.

Table 9. Performance metrics and degradation ratios of several LLMs across three naming schemes for code-document selection.

Setting	Evaluated Model			
	GPT-3.5-turbo	LLaMA3:70B-Instruct	DeepSeek-Coder-V2	GPT-4o-mini
Original	92.84%	98.63%	98.98%	98.98%
Anonymous	81.35%(12.37%↓)	98.63%(0.000%-)	98.63%(0.35%↓)	98.98%(0.000%-)
Confusing	52.39%(43.56%↓)	73.27%(25.71%↓)	78.66%(20.52%↓)	76.11%(23.10%↓)

Code Summarization. For summarization, let $d(\cdot, \cdot)$ denote a text-similarity metric such as BLEU. In addition to the standard score $d(\mathcal{M}(C_A^B), D_A)$ against the correct reference, we compute $d(\mathcal{M}(C_A^B), D_B)$ against the donor reference. We use $d(\mathcal{M}(C_A^B), D')$ for a randomly selected unrelated description D' as a background comparison. A donor-reference score above this random-pair level indicates that the change is directionally associated with the donor, rather than an arbitrary drift.

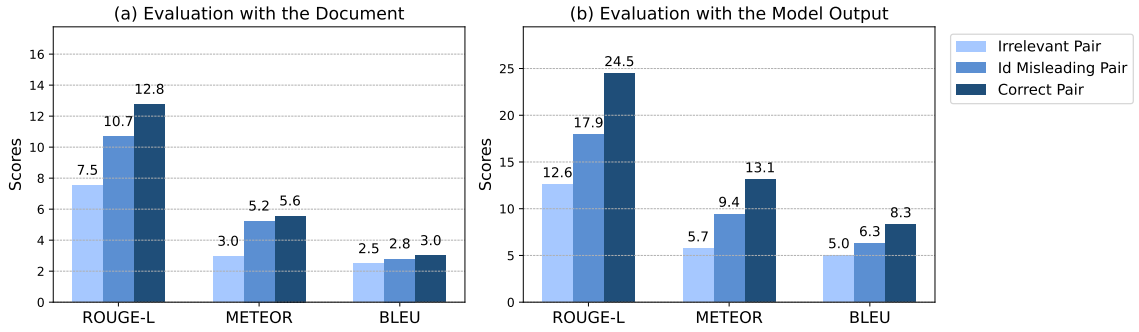


Fig. 6. Similarity comparisons for summaries generated under Confusing naming, using irrelevant, donor, and original pairs as references.

We repeat the comparison using model-generated summaries as references. The three quantities are the random-pair comparison, similarity to the Original output, and similarity to the donor output:

$$d(\mathcal{M}(C), \mathcal{M}(C')),$$

$$d(\mathcal{M}(C_A^B), \mathcal{M}(C_A)), \quad d(\mathcal{M}(C_A^B), \mathcal{M}(C_B)).$$

Figure 6 shows that donor-pair scores exceed the random-pair comparison for both human references and model-generated summaries, while remaining below the corresponding original-pair scores. This pattern is consistent with partial directional influence from the donor identifiers: the outputs do not fully switch to the donor functionality, but their lexical content moves toward it.

Code Completion. For a qualitative code-completion analysis, we inspect samples that are correct under Original naming but incorrect after renaming and compare the generated continuations across conditions. This conditioning does not eliminate sampling variance, but it isolates examples in which the observed outcome changes and allows us to examine whether the error is related to the donor identifiers.

Setting		Original	Anonymous	Shuffling	Confusing
Input	Signature	<code>def mean_absolute_deviation (numbers: list[float]) -> float:</code>	<code>def func0 (para0: list[float]) -> float:</code>	<code>def mean (numbers: list[float]) -> float:</code>	<code>def even_odd_count (num: list[float]) -> float:</code>
	Function Description	""" For a given list of input numbers, calculate Mean Average Deviation around the mean of this dataset. Mean Absolute Deviation is the average absolute difference between each element and a centerpoint (mean in this case): MAD = average x-x_mean """			
	Test Case	<code>>>> mean_absolute_deviation ([1.0, 2.0, 3.0, 4.0]) 1.0 """</code>	<code>>>> func0([1.0, 2.0, 3.0, 4.0]) 1.0 """</code>	<code>>>> mean([1.0, 2.0, 3.0, 4.0]) 1.0 """</code>	<code>>>> even_odd_count([1.0, 2.0, 3.0, 4.0]) 1.0 """</code>
	Code Body Prefix	<code>mean = sum(numbers) / len(numbers)</code>	<code>var0 = sum(para0) / len(para0)</code>	<code>mean_absolute_deviation = sum(numbers) / len(numbers)</code>	<code>even_count = sum(num) / len(num)</code>
Completion Output		<code>return sum(abs(x - mean) for x in numbers) / len(numbers)</code>	<code>mad = sum(abs(x - var0) for x in para0) / len(para0) return mad</code>	<code>return mean_absolute_deviation</code>	<code>even_count = len(list(filter(lambda x: x % 2 == 0, num))) odd_count = len(num) - even_count return abs(even_count - odd_count)</code>
Execution Result		passed	passed	failed	failed

Fig. 7. A case study of code completion illustrating the guiding effect of lexical information. Outputs are generated by GPT-3.5-turbo.

Figure 7 shows an example whose original program computes mean absolute deviation. Under the original and anonymous settings, the model produces the correct solution. After confusing renaming introduces identifiers such as `even_odd_count`, the model instead generates code that counts odd and even numbers and returns the absolute difference between `even_count` and `odd_count`. Because the natural-language HumanEval description is not provided, this output reflects a conflict between the misleading identifier cues and the operations and data flow present in the partial code, with the generated continuation following the former. In the shuffling case, swapping `mean` and `mean_absolute_deviation` causes the model to return the wrong variable, consistent with interpreting that variable through its new name.

In this example, the generated continuation follows the functionality suggested by the renamed identifiers despite conflicting evidence in the partial implementation. As a single case, it illustrates the pattern but does not establish its frequency.

Together, the selection results, summarization comparisons, and completion case provide converging evidence that misleading identifiers can directionally influence outputs in the evaluated tasks. The evidence goes beyond an undirected performance drop, while remaining observational with respect to the model’s internal mechanism.

5.2 Impact of Identifier Type

After examining the directional influence of misleading names, we further compare the effects of modifying different identifier types. Because lexical properties are difficult to quantify directly, this analysis uses within-sample replacements grouped by identifier role.

Function names, parameters, and local variables occupy different syntactic roles and may differ in typical descriptive content. Function names often summarize overall behavior, parameters describe inputs, and local variables describe intermediate values. These are tendencies rather than fixed naming rules.

For the experiment, we randomly select one identifier in the original code snippet for modification and classify it into one of these three groups. We then statistically analyze the performance changes for each group.

Experiment Results. Table 10 reports the single-identifier results. Replacing a function name yields the lowest average ROUGE-L score, followed by parameters and local variables. Function names also have the lowest mean occurrence count (1.11), so raw frequency alone does not explain the ordering. The aggregate comparison does not, however, rule out other differences among identifier types.

Table 10. Results of single-identifier replacement, shown in average code summarization ROUGE-L performance per type of identifier renamed, together with the average occurrence number of each type.

Identifier Type	Function Name	Parameter Name	Variable Name
Average ROUGE-L	16.78	18.49	19.03
Average Occurrence	1.111	3.255	2.469

Identifier types also differ in syntactic position, scope, and typical descriptive content, and these factors are not separated by this experiment. We therefore interpret the table as an association between identifier role and sensitivity, not as a causal estimate of identifier type alone.

5.3 Section Summary

RQ2 contributes two observations. First, donor comparisons show directional influence from misleading names in the evaluated tasks. Second, single-identifier replacement yields different average sensitivities across identifier roles, with the largest decrease for function names. Together with RQ1, these findings support the lexical-overemphasis interpretation within the tested settings, without implying that all models or tasks exhibit the same degree of reliance.

6 RQ3: Probing the Mitigability of Lexical Overemphasis

The preceding results identify settings in which misleading or uninformative names reduce reliability. RQ3 probes the persistence of this behavior through two intervention families: (1) transformed examples or instructions at inference time and (2) fine-tuning data with reduced lexical information. These interventions test whether awareness at inference time or adaptation during training readily reduces the gap between original and lexically modified code.

6.1 Prompt-Based Diagnostic Interventions

Leveraging the instruction-following capability of larger models, we use in-context learning to test whether explicitly alerting a model to lexical changes reduces its sensitivity [10, 65]. Specifically, we enhance prompts with transformed examples and transformation guidelines. If lack of awareness is the main source of the observed behavior, these interventions should reduce the gap between original and confusing naming conditions.

We now elaborate on the prompt designs we employed and their underlying rationale.

- **In-context learning via perturbed examples**

Based on the few-shot learning setting in the previous task, we incorporate typical perturbed examples with the correct answer into the prompt. This intervention tests whether demonstrations of lexical variation help the LLM discount unreliable names.

- **In-context learning via transformation**

Inspired by Chain-of-Thought prompting [55], we incorporate an intermediate reasoning step. Specifically, we inform the model that variable names may have been altered and instruct it to sanitize the input code via anonymous renaming before generating a response, with an example demonstrating the process. This tests whether an explicit sanitization step can mitigate the misleading effect.

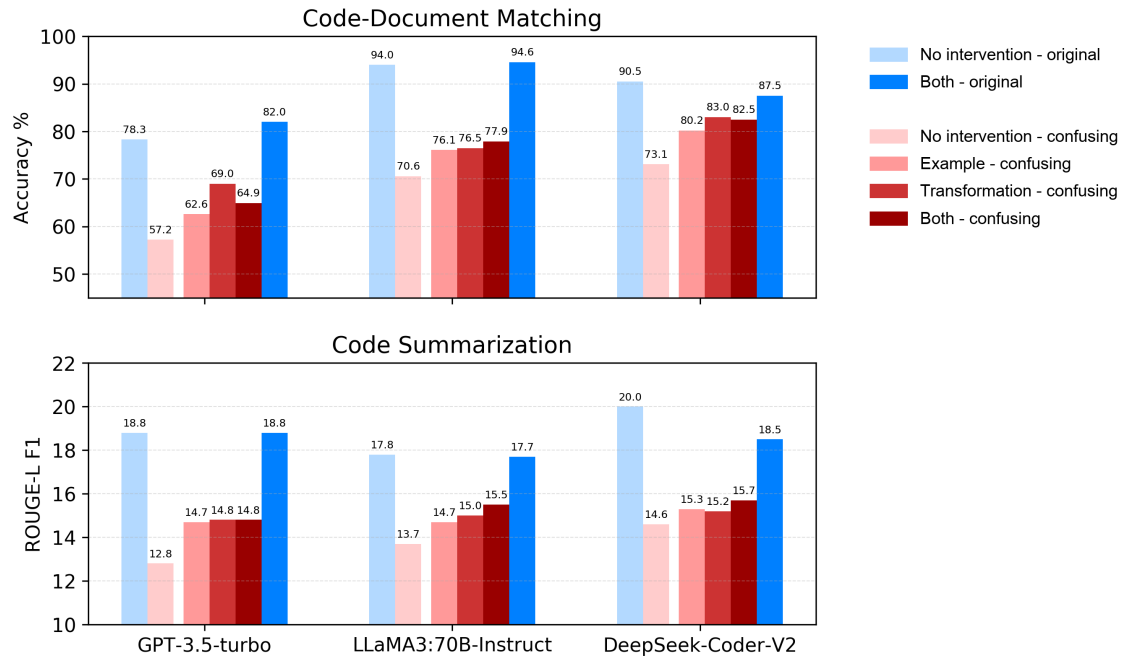


Fig. 8. Performance under the prompt-based diagnostic interventions. The results of each model are divided into "No intervention" on the left and "Intervention" on the right. The evaluation settings (original vs. confusing) are indicated by colors. In the legend, "Both" refers to using both interventions simultaneously.

Figure 8 reports the prompt interventions under Original and Confusing naming. Original-condition scores change little in these results, whereas several Confusing-condition scores improve. For GPT-3.5-turbo and DeepSeek-Coder-V2, the best observed intervention approaches the Perturbative score in Table 4 but remains below the Anonymous and Original scores.

These results suggest that explicit examples and transformation instructions can reduce part of the measured gap. None of the tested prompt-based interventions eliminates the gap between Original and Confusing naming.

6.2 Fine-Tuning-Based Diagnostic Interventions

For the smaller open-source models, we use fine-tuning rather than instruction prompting as the second diagnostic intervention. We compare the original training set with a fully anonymized version and a mixed set containing equal

proportions of original and anonymized examples. We do not train directly on Confusing examples because donor selection does not define a stable target distribution. Models fine-tuned on the original data serve as the reference.

Table 11. Effect of fine-tuning-based diagnostic interventions on code summarization

Evaluated Model	Training Data	Original	Lexically Modified	
			Anonymous	Confusing
CodeBERT	original data	19.50	13.75	9.84
	anonymized data	18.49	15.83	13.83
	mixed data (1:1 shuffled)	19.31	15.91	10.37
CodeT5	original data	22.64	16.75	11.69
	anonymized data	20.85	19.24	14.95
	mixed data (1:1 shuffled)	22.68	19.28	12.34
DeepSeek-Coder-1.3B	original data	22.22	13.63	12.31
	anonymized data	20.73	17.87	15.95
	mixed data (1:1 shuffled)	21.34	17.81	13.17

Table 11 shows that training on anonymized data yields the largest observed gains under Confusing naming for all three models, accompanied by lower Original-condition scores. Mixed-data training retains more of the Original performance and improves Anonymous performance, but produces smaller gains under Confusing naming.

Although these interventions improve some Anonymous and Confusing scores, a gap relative to Original remains for the tested models and fine-tuning settings.

6.3 Section Summary

We used representative mitigation strategies as diagnostic interventions. Some improve performance under lexically modified conditions, but none eliminates the measured gap. Together with RQ2, this establishes the persistence of lexical overemphasis across the evaluated prompt- and fine-tuning-based interventions. The broader scope of this conclusion is addressed in Threats to Validity.

As a secondary observation, anonymization avoids actively misleading names but also removes potentially useful information. Prior work reports comparable performance on anonymized code in some scenarios [59]. Determining when anonymization is beneficial requires a separate robustness evaluation and is not established by RQ3.

7 Discussion

Across the evaluated models and primary tasks, the three RQs establish lexical overemphasis as a pervasive pattern that persists under the tested interventions. The type-inference control qualifies its magnitude: when the answer is locally determined without the target name, naming effects are smaller and directionally inconsistent. The larger effects in the original tasks partly reflect settings in which lexical information can be useful, while RQ2 shows that misleading names can nevertheless guide outputs. We next discuss possible contributions from input processing and training tendencies, treating them as hypotheses rather than causes established by output behavior.

7.1 Data Processing of LLMs

Face/Off changes the identifier tokens presented to a model and therefore changes its input representation, while eligible renamings preserve program behavior. This representational change need not alter a task-relevant conclusion

when the unchanged implementation determines the answer. Figure 9 depicts the possible pathway schematically rather than identifying a causal mechanism.

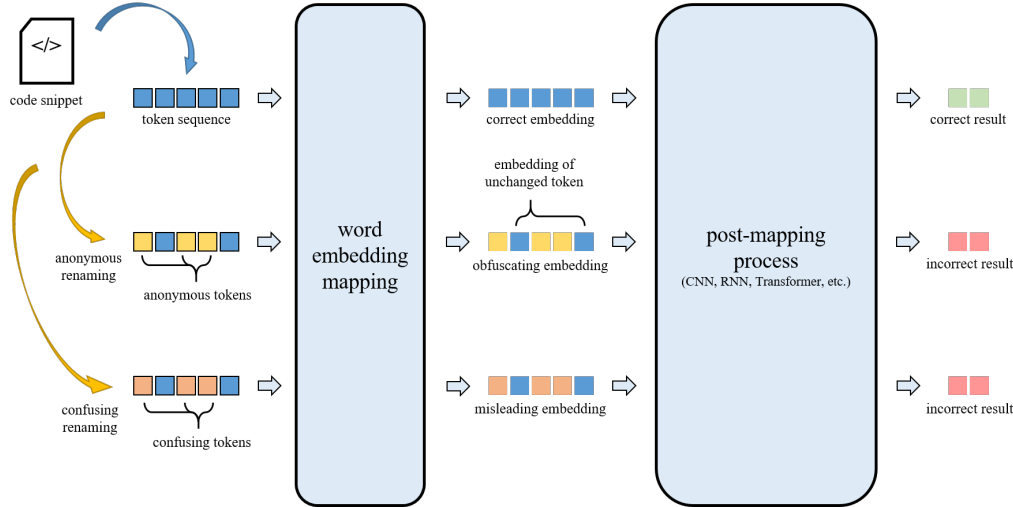


Fig. 9. A schematic illustration of how lexical perturbation changes an LLM’s input representation and may affect its output.

The experiments show that task-relevant conclusions are not always stable under these changes. Semantically rich identifiers may receive substantial weight during processing [62], so removing or contradicting them can affect the output even when the relevant program evidence is unchanged. We interpret this as a **reliability tension**, not as a rejection of software naturalness or proof of an architectural mismatch: identifier meanings are useful predictive signals, but they are not guaranteed to be correct.

7.2 Training Tendencies of LLMs

One possible explanation is that identifier associations remain highly predictive during training and are therefore weighted strongly at inference time. Our experiments do not determine where in the model this influence arises. To probe how much summarization performance depends on exact structural relations rather than the available token set, we conduct an exploratory shuffling experiment with GPT-3.5-turbo.

We shuffle identifiers or all tokens while retaining the token multiset. Unlike the standard Face/Off conditions, these transformations are not semantics-preserving: identifier shuffling can violate binding and syntax, and all-token shuffling destroys syntactic structure.

Table 12. The ROUGE-L F1 results of code summarization on shuffled code snippets using GPT-3.5-turbo, together with reference values. Note that Face/Off shuffle is the only semantics-preserving method among the three.

Shuffling Method	Proportion (%)			
	0	25	50	100
All Tokens Shuffle		17.97	17.80	15.04
Identifiers Shuffle	18.75	18.20	17.76	14.87
Face/Off Shuffle		-	-	16.88

Table 12 shows modest ROUGE-L decreases at 25% and 50% shuffling and larger decreases at 100%. Even at full shuffling, the scores remain close to the Anonymous reference. This is compatible with lexical statistics supporting coarse one-sentence summaries after syntax is disrupted, but it does not show that the model internally behaves as a bag-of-words system.

This exploratory result is task-specific. Code summarization may reward topic-level lexical overlap without requiring fine-grained functional accuracy, the single-sentence prompt may amplify this effect, and identifier shuffling also disrupts syntax and binding. We did not observe a comparable pattern in our attempts on other tasks. Within these limits, full shuffling shows that lexical overlap can sustain part of the summarization score after token order is destroyed, but it neither quantifies structural reasoning nor establishes a general model mechanism.

7.3 Section Summary

The behavioral results identify a reliability tension between informative identifier cues and program invariance under eligible renamings. Strong lexical associations learned during training are one plausible contributor, and the shuffling result is compatible with coarse lexical statistics supporting summarization. Neither observation directly identifies an internal mechanism.

8 Threats to Validity

8.1 Internal Validity

For the standard Face/Off conditions, we consistently rename eligible local bindings while retaining the program structure and operational behavior, which is designed to isolate identifier information. Residual threats include transformation errors and task-specific interactions between code and text; we address these through implementation checks and the documentation procedure in Section 3.3. In the type-inference control, parse, compile, binding-occurrence, and alpha-equivalence checks reduce transformation risk, and paired tests are clustered by project because multiple targets can come from the same project. However, target eligibility was established through conservative automatic analysis rather than an independent human identifier-independence review. We therefore present this experiment as a supplementary semantic control rather than a confirmatory estimate for a broader type-inference population. The extended external-identifier experiment is less controlled because it inserts a binding block. Its dead-code condition estimates part of the insertion effect but does not isolate decontextualization perfectly. Table 6 shows the same condition ordering across the tested prompts, but other prompts could yield different magnitudes or patterns. Finally, benchmark contamination [19, 38] could affect both baseline performance and measured sensitivity, so the results should not be interpreted as contamination-free estimates.

8.2 Construct Validity

The naming conditions and identifier roles operationalize lexical-information quality, but we lack a direct quantitative measure that captures every aspect of informativeness, naturalness, or ambiguity. The observed patterns are therefore conditional on the evaluated tasks, models, programs, and transformations.

A potential concern is that tasks such as code summarization couple identifier words with ground-truth text through lexical-overlap metrics. For the CodeSearchNet-based tasks, explicit references to the subject function follow the corresponding code condition, while parameter words in natural-language prose are retained to preserve the description’s semantic content (Section 3.3). Exact subject-function names occur in only 2 of the 600 CodeSearchNet

descriptions used in this evaluation. Consequently, condition-specific synchronization changes the accompanying text for only these cases; parameter names and randomly selected negative descriptions remain unchanged. This low incidence limits the extent to which the aggregate performance patterns can be attributed to reference-text rewriting. The targeted procedure does not make every identifier-like word lexically aligned. HumanEval does not present its natural-language description to the model. The directional analyses in Section 5.1 provide complementary evidence: donor-reference similarities exceed random-pair comparisons, which is less consistent with arbitrary label disruption than with influence from donor identifiers. These analyses reduce, but do not eliminate, the construct-validity concern because the tasks and metrics still differ in their lexical requirements.

Finally, the mechanism-level discussion is based on output behavior and exploratory perturbations rather than direct access to internal causal processes. The proposed explanations should therefore be treated as hypotheses for future mechanistic and experimental work.

8.3 External Validity

We evaluated models with different architectures, sizes, and access types across four code-comprehension tasks. Repeated patterns across these settings provide within-study replication, but they do not guarantee generalization to other models, languages, tasks, or repositories. In particular, the HumanEval code-completion problems are relatively small, and the controlled snippets do not capture dependencies and workflows found in large codebases. The type-inference control deliberately selects cases with locally sufficient evidence, uses a closed set of 15 labels, and is dominated by primitive types; this conservative construction improves isolation but makes the task easier and limits generalization to user-defined, repository-dependent, or unrestricted types. Its model set also differs from the original four-task evaluation, so we do not use it for direct numerical comparison. Future work should test the same hypotheses in repository-level, documentation-rich, tool-augmented, and more difficult type-inference settings.

8.4 Ecological Validity

Confusing names and systematic placeholders are controlled stress-test conditions, not estimates of how frequently the same patterns occur in everyday development. Anonymous naming resembles some information-depleted artifacts, such as minified, obfuscated, decompiled, or poorly named code, but it is not a general proxy for all low-quality code. Consequently, our results establish sensitivity under the tested interventions; they do not estimate the population-level failure rate in real projects.

Human program comprehension is also multi-source and task-dependent. Descriptive identifiers and recognizable beacons can help programmers, while misleading beacons can also produce false initial interpretations [49, 56]. Evidence that experts form representations from procedural relations [47] does not imply that humans reason independently of names. Moreover, professional developers use browsers, documentation, and tools during comprehension [57]. Our experiment intentionally restricts the context supplied to the model and, where a task pairs code with documentation, controls that textual channel together with the naming condition. This restriction improves internal validity by isolating identifier information, but reduces ecological realism. It is a property of the experimental design, not evidence that an LLM cannot use documentation or tool feedback. We therefore compare behavior only under the supplied context and do not claim a categorical difference between human and model comprehension.

9 Conclusion and Implications

This empirical study investigates lexical overemphasis in LLM code comprehension, characterizes its behavior under controlled identifier transformations, and uses diagnostic mitigation attempts to evaluate its persistence. Within the Face/Off framework, lexical overemphasis is pervasive across the evaluated models and original four tasks, and persists under the representative prompt- and fine-tuning-based interventions we test. A targeted type-inference control confirms a boundary on this pattern: in its conservatively screened subset, naming effects are smaller and directionally inconsistent when local program evidence suffices to determine the answer. Together, the results identify a task-dependent reliability tension between useful distributional naming cues and task-relevant structural evidence; they neither reject software naturalness nor imply that identifiers should be ignored.

For practitioners, the results motivate caution when identifier quality is uncertain and independent validation when correctness is consequential; they do not establish anonymization as a universally beneficial safeguard. For researchers, they motivate training and evaluation methods that retain the predictive benefits of natural code while checking whether conclusions remain stable under semantics-preserving changes and grounded in program structure.

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. arXiv:2303.08774 <https://arxiv.org/abs/2303.08774>
- [2] Toufique Ahmed, Kunal Suresh Pai, Premkumar Devanbu, and Earl Barr. 2024. Automatic semantic augmentation of language model prompts (for code summarization). In *Proceedings of the IEEE/ACM 46th international conference on software engineering* (Lisbon, Portugal). Association for Computing Machinery, New York, NY, USA, 1–13. doi:10.1145/3597503.3639183
- [3] Miltiadis Allamanis, Earl T Barr, Premkumar Devanbu, and Charles Sutton. 2018. A survey of machine learning for big code and naturalness. *ACM Computing Surveys (CSUR)* 51, 4 (2018), 1–37.
- [4] Satyanjeev Banerjee and Alon Lavie. 2005. METEOR: An Automatic Metric for MT Evaluation with Improved Correlation with Human Judgments. In *Proceedings of the ACL Workshop on Intrinsic and Extrinsic Evaluation Measures for Machine Translation and/or Summarization*, Jade Goldstein, Alon Lavie, Chin-Yew Lin, and Clare Voss (Eds.). Association for Computational Linguistics, Ann Arbor, Michigan, 65–72. <https://aclanthology.org/W05-0909/>
- [5] Pavol Bielik and Martin Vechev. 2020. Adversarial robustness for code. In *Proceedings of the 37th International Conference on Machine Learning (Proceedings of Machine Learning Research, Vol. 119)*. PMLR, Virtual Event, 896–907. <https://proceedings.mlr.press/v119/bielik20a.html>
- [6] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language models are few-shot learners. In *Proceedings of the 34th International Conference on Neural Information Processing Systems* (Vancouver, BC, Canada) (*NIPS '20*). Curran Associates Inc., Red Hook, NY, USA, Article 159, 25 pages.
- [7] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. arXiv:2107.03374 <https://arxiv.org/abs/2107.03374>
- [8] Badhan Chandra Das, M. Hadi Amini, and Yanzhao Wu. 2025. Security and Privacy Challenges of Large Language Models: A Survey. *ACM Comput. Surv.* 57, 6, Article 152 (Feb. 2025), 39 pages. doi:10.1145/3712001
- [9] Tuan Dinh, Jinman Zhao, Samson Tan, Renato Negrinho, Leonard Lausen, Sheng Zha, and George Karypis. 2023. Large Language Models of Code Fail at Completing Code with Potential Bugs. <http://arxiv.org/abs/2306.03438> arXiv:2306.03438 [cs].
- [10] Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Jingyuan Ma, Rui Li, Heming Xia, Jingjing Xu, Zhiyong Wu, Baobao Chang, Xu Sun, Lei Li, and Zhifang Sui. 2024. A Survey on In-context Learning. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen (Eds.). Association for Computational Linguistics, Miami, Florida, USA, 1107–1128. doi:10.18653/v1/2024.emnlp-main.64
- [11] Xiaohu Du, Ming Wen, Zichao Wei, Shangwen Wang, and Hai Jin. 2023. An Extensive Study on Adversarial Attack against Pre-trained Models of Code. <http://arxiv.org/abs/2311.07553> arXiv:2311.07553 [cs].
- [12] Abhimanyu Dubey et al. 2024. The Llama 3 Herd of Models. arXiv:2407.21783 <https://arxiv.org/abs/2407.21783>
- [13] Ye Fan, Chuanyi Li, Jidong Ge, LiGuo Huang, and Bin Luo. 2025. Effective Hard Negative Mining for Contrastive Learning-Based Code Search. *ACM Trans. Softw. Eng. Methodol.* 34, 3, Article 76 (Feb. 2025), 35 pages. doi:10.1145/3695994

- [14] Chongzhou Fang, Ning Miao, Shaurya Srivastav, Jialin Liu, Ruoyu Zhang, Ruijie Fang, Ryan Tsang, Najmeh Nazari, Han Wang, Houman Homayoun, et al. 2024. Large language models for code analysis: Do {LLMs} really do their job?. In *33rd USENIX Security Symposium (USENIX Security 24)*. USENIX Association, Philadelphia, PA, 829–846. <https://www.usenix.org/conference/usenixsecurity24/presentation/fang>
- [15] Zhangyin Feng, Daya Guo, Du-Yu Tang, Nan Duan, Xiao-Cheng Feng, Ming Gong, Lin-Jun Shou, Bing Qin, Ting Liu, Daxin Jiang, et al. 2020. CodeBERT: A Pre-Trained Model for Programming and Natural Languages. In *Findings of the Association for Computational Linguistics: EMNLP, Online Event*. Association for Computational Linguistics, Online, 1536–1547. doi:10.18653/v1/2020.findings-emnlp.139
- [16] Shuzheng Gao, Cuiyun Gao, Yulan He, Jichuan Zeng, Lunyiu Nie, Xin Xia, and Michael Lyu. 2023. Code Structure–Guided Transformer for Source Code Summarization. *ACM Trans. Softw. Eng. Methodol.* 32, 1, Article 23 (Feb. 2023), 32 pages. doi:10.1145/3522674
- [17] Shuzheng Gao, Cuiyun Gao, Chaozheng Wang, Jun Sun, David Lo, and Yue Yu. 2023. Two Sides of the Same Coin: Exploiting the Impact of Identifiers in Neural Code Comprehension. doi:10.48550/arXiv.2207.11104 arXiv:2207.11104 [cs].
- [18] Robert Geirhos, Jorn-Henrik Jacobsen, Claudio Michaelis, Richard Zemel, Wieland Brendel, Matthias Bethge, and Felix A. Wichmann. 2020. Shortcut Learning in Deep Neural Networks. *Nature Machine Intelligence* 2 (2020), 665–673. doi:10.1038/s42256-020-00257-z
- [19] Shahriar Golchin and Mihai Surdeanu. 2024. Time travel in llms: Tracing data contamination in large language models. In *The Twelfth International Conference on Learning Representations*. OpenReview.net, Vienna, Austria. <https://openreview.net/forum?id=2Rwq6c3tvr>
- [20] Alex Gu, Baptiste Rozière, Hugh James Leather, Armando Solar-Lezama, Gabriel Synnaeve, and Sida Wang. 2024. CRUXEval: A Benchmark for Code Reasoning, Understanding and Execution. In *Proceedings of the 41st International Conference on Machine Learning (Proceedings of Machine Learning Research, Vol. 235)*. PMLR, Vienna, Austria, 16568–16621. <https://proceedings.mlr.press/v235/gu24c.html>
- [21] Daya Guo, Shuo Ren, Shuai Lu, Zhangyin Feng, Duyu Tang, Shujie Liu, Long Zhou, Nan Duan, Alexey Svyatkovskiy, Shengyu Fu, Michele Tufano, Shao Kun Deng, Colin B. Clement, Dawn Drain, Neel Sundaresan, Jian Yin, Daxin Jiang, and Ming Zhou. 2021. GraphCodeBERT: Pre-training Code Representations with Data Flow. In *9th International Conference on Learning Representations, Virtual Event, Austria*. OpenReview.net, Virtual Event. <https://openreview.net/forum?id=jLoC4ez43PZ>
- [22] Daya Guo, Qihao Zhu, Dejian Yang, Zhenda Xie, Kai Dong, Wentao Zhang, Guanting Chen, Xiao Bi, Yu Wu, YK Li, et al. 2024. DeepSeek-Coder: When the Large Language Model Meets Programming–The Rise of Code Intelligence. arXiv:2401.14196 <https://arxiv.org/abs/2401.14196>
- [23] Abram Hindle, Earl T. Barr, Mark Gabel, Zhendong Su, and Premkumar T. Devanbu. 2012. On the Naturalness of Software. In *Proceedings of the 34th International Conference on Software Engineering*. IEEE, Zurich, Switzerland, 837–847. doi:10.1109/ICSE.2012.6227135
- [24] Ashish Hooda, Mihai Christodorescu, Miltiadis Allamanis, Aaron Wilson, Kassem Fawaz, and Somesh Jha. 2024. Do Large Code Models Understand Programming Concepts? A Black-box Approach. <http://arxiv.org/abs/2402.05980> arXiv:2402.05980 [cs].
- [25] Soneya Binta Hossain, Nan Jiang, Qiang Zhou, Xiaopeng Li, Wen-Hao Chiang, Yingjun Lyu, Hoan Nguyen, and Omer Tripp. 2024. A deep dive into large language models for automated bug localization and repair. *Proceedings of the ACM on Software Engineering* 1, FSE (2024), 1471–1493.
- [26] Chao Hu, Yitian Chai, Hao Zhou, Fandong Meng, Jie Zhou, and Xiaodong Gu. 2024. How Effectively Do Code Language Models Understand Poor-Readability Code?. In *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering*. ACM, Sacramento CA USA, 795–806. doi:10.1145/3691620.3695072
- [27] Hamel Husain, Ho-Hsiang Wu, Tiferet Gazit, Miltiadis Allamanis, and Marc Brockschmidt. 2019. Codesearchnet challenge: Evaluating the state of semantic code search. arXiv:1909.09436 <https://arxiv.org/abs/1909.09436>
- [28] Juyong Jiang, Fan Wang, Jiasi Shen, Sungju Kim, and Sunghun Kim. 2024. A Survey on Large Language Models for Code Generation. arXiv:2406.00515 [cs.CL] <https://arxiv.org/abs/2406.00515>
- [29] Mohamad Khajezade, Jie JW Wu, Fatemeh Hendijani Fard, Gema Rodríguez-Pérez, and Mohamed Sami Shehata. 2024. Investigating the efficacy of large language models for code clone detection. In *Proceedings of the 32nd IEEE/ACM International Conference on Program Comprehension*. Association for Computing Machinery, New York, NY, USA, 161–165. doi:10.1145/3643916.3645030
- [30] Haochen Li, Xin Zhou, and Zhiqi Shen. 2024. Rewriting the Code: A Simple Method for Large Language Model Augmented Code Search. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, Bangkok, Thailand, 1371–1389. doi:10.18653/v1/2024.acl-long.75
- [31] Junlong Li, Daya Guo, Dejian Yang, Runxin Xu, Yu Wu, and Junxian He. 2025. CodeIO: Condensing Reasoning Patterns via Code Input-Output Prediction. In *Proceedings of the 42nd International Conference on Machine Learning (Proceedings of Machine Learning Research, Vol. 267)*. PMLR, Vancouver, Canada, 34471–34489. <https://proceedings.mlr.press/v267/li25t.html>
- [32] Raymond Li, Loubna Ben Allal, Yangtian Zi, Niklas Muennighoff, Denis Kocetkov, Chenghao Mou, Marc Marone, Christopher Akiki, Jia Li, Jenny Chim, et al. 2023. StarCoder: may the source be with you! *Transactions on Machine Learning Research* (2023). <https://openreview.net/forum?id=KoFOg41haE>
- [33] Xueyang Li, Guozhu Meng, Shangqing Liu, Lu Xiang, Kun Sun, Kai Chen, Xipu Luo, and Yang Liu. 2024. Attribution-guided Adversarial Code Prompt Generation for Code Completion Models. In *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering* (Sacramento, CA, USA). Association for Computing Machinery, New York, NY, USA, 1460–1471. doi:10.1145/3691620.3695517
- [34] Zhen Li, Guenevere (Qian) Chen, Chen Chen, Yayi Zou, and Shouhuai Xu. 2022. RoPGen: towards robust code authorship attribution via automatic coding style transformation. In *Proceedings of the 44th International Conference on Software Engineering*. ACM, Pittsburgh Pennsylvania, 1906–1918. doi:10.1145/3510003.3510181
- [35] Chin-Yew Lin. 2004. ROUGE: A Package for Automatic Evaluation of Summaries. In *Text Summarization Branches Out*. Association for Computational Linguistics, Barcelona, Spain, 74–81. <https://aclanthology.org/W04-1013/>

- [36] Shuai Lu, Daya Guo, Shuo Ren, Junjie Huang, Alexey Svyatkovskiy, Ambrosio Blanco, Colin B. Clement, Dawn Drain, Daxin Jiang, Duyu Tang, Ge Li, Lidong Zhou, Linjun Shou, Long Zhou, Michele Tufano, Ming Gong, Ming Zhou, Nan Duan, Neel Sundaresan, Shao Kun Deng, Shengyu Fu, and Shujie Liu. 2021. CodeXGLUE: A Machine Learning Benchmark Dataset for Code Understanding and Generation. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks*, Vol. 1. <https://datasets-benchmarks-proceedings.neurips.cc/paper/2021/hash/c16a5320fa475530d9583c34fd356ef5-Abstract-round1.html>
- [37] Yi-Fan Ma, Yali Du, and Ming Li. 2023. Capturing the long-distance dependency in the control flow graph via structural-guided attention for bug localization. In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence (Macao, P.R.China) (IJCAI '23)*. International Joint Conferences on Artificial Intelligence Organization, Macao, P.R.China, 2242–2250. doi:10.24963/ijcai.2023/249
- [38] Inbal Magar and Roy Schwartz. 2022. Data contamination: From memorization to exploitation. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*. Association for Computational Linguistics, Dublin, Ireland, 157–165. doi:10.18653/v1/2022.acl-short.18
- [39] R. Thomas McCoy, Ellie Pavlick, and Tal Linzen. 2019. Right for the Wrong Reasons: Diagnosing Syntactic Heuristics in Natural Language Inference. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, Florence, Italy, 3428–3448. doi:10.18653/v1/P19-1334
- [40] Amir M. Mir, Evaldas Latoskinas, and Georgios Gousios. 2021. ManyTypes4Py: A Benchmark Python Dataset for Machine Learning-Based Type Inference. In *2021 IEEE/ACM 18th International Conference on Mining Software Repositories (MSR)*. IEEE, Madrid, Spain, 585–589. doi:10.1109/MSR52588.2021.00079
- [41] CheolWon Na, YunSeok Choi, and Jee-Hyong Lee. 2023. DIP: Dead code insertion based black-box attack for programming language model. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, Toronto, Canada, 7777–7791. doi:10.18653/v1/2023.acl-long.430
- [42] Ansong Ni, Miltiadis Allamanis, Arman Cohan, Yinlin Deng, Kensen Shi, Charles Sutton, and Pengcheng Yin. 2024. NEXt: Teaching Large Language Models to Reason about Code Execution. In *Proceedings of the 41st International Conference on Machine Learning (Proceedings of Machine Learning Research, Vol. 235)*. PMLR, Vienna, Austria, 37929–37956. <https://proceedings.mlr.press/v235/ni24a.html>
- [43] Erik Nijkamp, Bo Pang, Hiroaki Hayashi, Lifu Tu, Huan Wang, Yingbo Zhou, Silvio Savarese, and Caiming Xiong. 2023. CodeGen: An Open Large Language Model for Code with Multi-Turn Program Synthesis. In *The Eleventh International Conference on Learning Representations*. OpenReview.net, Kigali, Rwanda. https://openreview.net/forum?id=iaYcJKpY2B_
- [44] OpenAI. 2024. *text-embedding-3*. OpenAI. <https://platform.openai.com/docs/guides/embeddings> Accessed: 2025-05-30.
- [45] Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. 2022. Training language models to follow instructions with human feedback. In *Proceedings of the 36th International Conference on Neural Information Processing Systems (New Orleans, LA, USA) (NIPS '22)*. Curran Associates Inc., Red Hook, NY, USA, Article 2011, 15 pages.
- [46] Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a Method for Automatic Evaluation of Machine Translation. In *Proceedings of the 40th Annual Meeting of the Association for Computational Linguistics*, Pierre Isabelle, Eugene Charniak, and Dekang Lin (Eds.). Association for Computational Linguistics, Philadelphia, Pennsylvania, USA, 311–318. doi:10.3115/1073083.1073135
- [47] Nancy Pennington. 1987. Stimulus Structures and Mental Representations in Expert Comprehension of Computer Programs. *Cognitive Psychology* 19, 3 (1987), 295–341. doi:10.1016/0010-0285(87)90007-7
- [48] Baptiste Roziere, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Romain Sauvestre, Tal Remez, et al. 2023. Code llama: Open foundation models for code. arXiv:2308.12950 <https://arxiv.org/abs/2308.12950>
- [49] Andrea Schankin, Annika Berger, Daniel V. Holt, Johannes C. Hofmeister, Till Riedel, and Michael Beigl. 2018. Descriptive Compound Identifier Names Improve Source Code Comprehension. In *Proceedings of the 26th Conference on Program Comprehension*. ACM, Gothenburg, Sweden, 31–40. doi:10.1145/3196321.3196332
- [50] Lin Shi, Fangwen Mu, Xiao Chen, Song Wang, Junjie Wang, Ye Yang, Ge Li, Xin Xia, and Qing Wang. 2022. Are we building on the rock? on the importance of data preprocessing for code summarization. In *Proceedings of the 30th ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering (Singapore, Singapore) (ESEC/FSE 2022)*. Association for Computing Machinery, New York, NY, USA, 107–119. doi:10.1145/3540250.3549145
- [51] Yutian Tang, Zhijie Liu, Zhichao Zhou, and Xiapu Luo. 2024. ChatGPT vs SBST: A Comparative Assessment of Unit Test Suite Generation. *IEEE Transactions on Software Engineering* 50, 6 (2024), 1340–1359. doi:10.1109/TSE.2024.3382365
- [52] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023. Llama: Open and efficient foundation language models. arXiv:2302.13971 <https://arxiv.org/abs/2302.13971>
- [53] Yue Wang, Weishi Wang, Shafiq R. Joty, and Steven C. H. Hoi. 2021. CodeT5: Identifier-aware Unified Pre-trained Encoder-Decoder Models for Code Understanding and Generation. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, Virtual Event / Punta Cana, Dominican Republic*. Association for Computational Linguistics, Online and Punta Cana, Dominican Republic, 8696–8708. doi:10.18653/v1/2021.emnlp-main.685
- [54] Huihui Wei and Ming Li. 2017. Supervised deep features for software functional clone detection by exploiting lexical and syntactical information in source code.. In *Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence*. International Joint Conferences on Artificial Intelligence Organization, Melbourne, Australia, 3034–3040. doi:10.24963/ijcai.2017/423

- [55] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems* 35 (2022), 24824–24837.
- [56] Susan Wiedenbeck. 1991. The Initial Stage of Program Comprehension. *International Journal of Man-Machine Studies* 35, 4 (1991), 517–540. doi:10.1016/S0020-7373(05)80090-2
- [57] Xin Xia, Lingfeng Bao, David Lo, Zhenchang Xing, Ahmed E. Hassan, and Shanping Li. 2018. Measuring Program Comprehension: A Large-Scale Field Study with Professionals. *IEEE Transactions on Software Engineering* 44, 10 (2018), 951–976. doi:10.1109/TSE.2017.2734091
- [58] Frank F Xu, Uri Alon, Graham Neubig, and Vincent Josua Hellendoorn. 2022. A systematic evaluation of large language models of code. In *Proceedings of the 6th ACM SIGPLAN international symposium on machine programming*. Association for Computing Machinery, New York, NY, USA, 1–10. doi:10.1145/3520312.3534862
- [59] Fan Yan and Ming Li. 2021. Towards Generating Summaries for Lexically Confusing Code through Code Erosion. In *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence*. International Joint Conferences on Artificial Intelligence Organization, Montreal, Canada, 3721–3727. doi:10.24963/ijcai.2021/512
- [60] An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, et al. 2024. Qwen2 technical report. arXiv:2407.10671 <https://arxiv.org/abs/2407.10671>
- [61] An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, et al. 2024. Qwen2.5 Technical Report. arXiv:2412.15115 <https://arxiv.org/abs/2412.15115>
- [62] Guang Yang, Yu Zhou, Wenhua Yang, Tao Yue, Xiang Chen, and Taolue Chen. 2024. How Important Are Good Method Names in Neural Code Generation? A Model Robustness Perspective. *ACM Transactions on Software Engineering and Methodology* 33, 3 (March 2024), 60:1–60:35. doi:10.1145/3630010
- [63] Zhou Yang, Jieke Shi, Junda He, and David Lo. 2022. Natural attack for pre-trained models of code. In *Proceedings of the 44th International Conference on Software Engineering*. ACM, Pittsburgh Pennsylvania, 1482–1493. doi:10.1145/3510003.3510146
- [64] Zhengran Zeng, Hanzhuo Tan, Haotian Zhang, Jing Li, Yuqun Zhang, and Lingming Zhang. 2022. An extensive study on pre-trained models for program understanding and generation. In *Proceedings of the 31st ACM SIGSOFT international symposium on software testing and analysis* (Virtual, South Korea). Association for Computing Machinery, New York, NY, USA, 39–51. doi:10.1145/3533767.3534390
- [65] Chi Zhang, Zifan Wang, Ravi Mangal, Matt Fredrikson, Limin Jia, and Corina Pasareanu. 2023. Transfer Attacks and Defenses for Large Language Models on Coding Tasks. doi:10.48550/arXiv.2311.13445 arXiv:2311.13445.
- [66] Huangzhao Zhang, Zhuo Li, Ge Li, Lei Ma, Yang Liu, and Zhi Jin. 2020. Generating Adversarial Examples for Holding Robustness of Source Code Processing Models. *Proceedings of the AAAI Conference on Artificial Intelligence* 34, 01 (April 2020), 1169–1176. doi:10.1609/aaai.v34i01.5469
- [67] Yu Zhou, Xiaoqing Zhang, Juanjuan Shen, Tingting Han, Taolue Chen, and Harald Gall. 2022. Adversarial robustness of deep code comment generation. *ACM Transactions on Software Engineering and Methodology (TOSEM)* 31, 4 (2022), 1–30.
- [68] Qihao Zhu, Daya Guo, Zhihong Shao, Dejian Yang, Peiyi Wang, Runxin Xu, Y Wu, Yukun Li, Huazuo Gao, Shirong Ma, et al. 2024. DeepSeek-Coder-V2: Breaking the Barrier of Closed-Source Models in Code Intelligence. arXiv:2406.11931 <https://arxiv.org/abs/2406.11931>