

Structured Sentiment Analysis Using Sequence Labeling as Dependency Graph Parsing

Muhammad Imran^{a,*}, Ana Ezquerro^b, Carlos Gómez-Rodríguez^a, Anders Søgaard^c and David Vilares^a

^aUniversidade da Coruña, CITIC, Departamento de Ciencias de la Computación y Tecnologías de la Información, Campus de Elviña s/n, 15071, A Coruña, Spain

^bGraz University of Technology, Institute in Machine Learning and Neural Computation, Rechbauerstraße 12, 8010, Graz, Austria

^cUniversity of Copenhagen, Department of Computer Science, Lyngbyvej 2, DK-2100, Copenhagen, Denmark

ARTICLE INFO

Keywords:

Structured Sentiment Analysis
Sequence Labeling
Dependency Graph Parsing
Linearized Graphs

ABSTRACT

This study addresses the problem of structured sentiment analysis, whose goal is to obtain a fine-grained sentiment graph where the nodes represent spans of sentiment holders, targets, and expressions, while the arcs define the relationships among them. Our proposed approach casts the task as dependency graph parsing, but departs from traditional parsing methods by solving it through sequence labeling. To do so, we leverage recent advances in linearized graph encodings that allow each word in the input to be assigned a label, effectively capturing the structure of the dependency graph. We conducted experiments on seven datasets spanning five languages (English, Spanish, Norwegian, Basque, and Catalan), showing performance competitive with leading, more complex single-model approaches.

1. Introduction

Traditional approaches to Sentiment Analysis (SA) have largely focused on relatively simple tasks like sentence- or document-level polarity classification, predicting coarse sentiment categories based on the overall tone of a text (e.g., positive, negative, or neutral) [1, 2]. However, these methods often fail to capture the nuanced structure of sentiment in complex linguistic expressions, such as those involving negation, ambiguity, or multiple sentiment targets. To overcome these limitations, more fine-grained approaches have been investigated. For instance, a substantial body of research has explored aspect-based sentiment analysis (ABSA) [3, 4], where sentiment polarities are associated with specific entities or aspects of a text rather than documents or sentences as a whole. In turn, Structured Sentiment Analysis (SSA) takes an even more fine-grained approach which deals with SA as a structured information extraction problem in the shape of a sentiment graph, aiming to uncover not only sentiment polarity but also the underlying structure of who expresses what sentiment, about what, and how these components interact.

Following this line, Barnes et al. [5] formalize SSA as the task of identifying all opinion tuples $\{O_1, \dots, O_m\}$ in a given text $W = (w_1, \dots, w_n) \in \mathcal{V}^n$.¹ Each opinion tuple is denoted as $O_i = (h, t, e, p)$, where $h \subset W$ is the *opinion holder* who expresses a *polarity* $p \in \mathcal{P}$ towards a *target* $t \subset W$ through some *sentiment expression* $e \subset W$, implicitly establishing pairwise relationships among elements of the same tuple (Figure 1). These elements are pivotal to completely

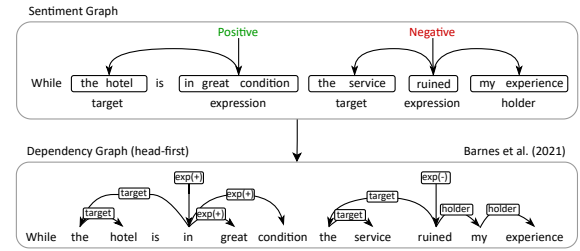


Figure 1: Head-first transformation of a sentiment graph to a dependency graph [5]. The sentiment graph has two opinion tuples: $O_1 = (\emptyset, \text{the hotel, in great condition, +})$ and $O_2 = (\text{my experience, the service, ruined, -})$.

resolve the sentiment analysis problem [6] as they are highly interconnected.

Despite the progress in SA, traditional approaches—including lexicon-based techniques and early supervised machine learning models—often struggle to handle the complexity of structured sentiment information [7]. Lexicon-based methods [6, 8], while interpretable and easy to implement, are brittle when confronted with syntactic variations and phenomena such as negation. Meanwhile, supervised learning and neural network-based approaches have achieved strong results in coarse-grained tasks, but generally treat sentiment as a classification problem, overlooking the complex relationships between holders, targets, expressions, and polarities; and lacking explainability [9, 10]. In contrast, SSA explicitly models these interdependencies, offering a more comprehensive and interpretable view of sentiment in context.

The accurate and efficient extraction of sentiment structures remains an open challenge in SSA. Recent advances

*Corresponding author

✉ m.imran@udc.es (M. Imran)

ORCID(s): 0000-0001-7511-2910 (M. Imran)

¹From now on, we use the symbol $\mathcal{V}$ to denote the vocabulary of tokens, $\mathcal{P}$ for the set of sentiment polarities, and n and m for the number of tokens and opinion tuples, respectively, in an input text.

in dependency parsing and semantic graph-based representations provide promising directions in this respect [5, 11]. These approaches leverage semantic parsing algorithms to better capture relational dependencies among sentiment elements, leading to more interpretable and accurate sentiment classification. In this work, we approach SA as a dependency graph parsing problem, where the output is a directed acyclic graph. Sentiment expressions act as source nodes, while the remaining elements are connected through arcs that represent their relationships. This approach encourages us to exploit the current improvements in semantic dependency parsing [12, 13, 14, 15] to build an efficient semantic graph parser capable of predicting the structured sentiment graph as shown in Figure 1. However, existing SSA approaches based on dedicated graph parsers often rely on complex architectures and specialized decoding procedures [16]. This motivates exploring simpler yet expressive alternatives that can leverage the strengths of pretrained language models while preserving the structured nature of sentiment graphs.

In this study, we aim to contribute to the field of structured sentiment analysis by exploiting advances in dependency graph parsing models. Our approach is grounded in the observation that SSA graphs exhibit specific structural properties—such as sparsity, bounded dependency distances, and a limited set of relation types—that make them well suited to linearized dependency encodings. For this purpose, we use the recently-developed encodings that, in turn, cast dependency graph parsing as a sequence labeling task [17]. This allows us to solve the SSA problem in an efficient and straightforward way. We evaluate these models on seven datasets across five different languages, focusing on their ability to capture the inter-dependencies between opinion tuples and their performance in monolingual settings. In our experiments, we demonstrate that sequence-labeling dependency graph parsing models, when combined with pretrained language models, can obtain strong results on various datasets. Ultimately, this work establishes that sequence labeling, when governed by the structural constraints of SSA, provides a principled and theoretically well-founded decoding strategy for sentiment graph prediction, resulting in a particularly simple and efficient approach to the task.

2. Related Work

Sentiment analysis has long been a popular task in natural language processing (NLP), with approaches evolving from lexicon-based and machine learning methods [8, 18] to modern deep learning architectures [19, 20]. In its early stages, sentiment analysis was typically framed as a classification task, where systems were trained to extract sentiment information from raw text at the sentence or document level. The sentiment output was commonly expressed as a polarity (positive, neutral, negative), often conveyed through a numerical rating scale (e.g., 1 to 5 stars). Alternatively, sentiment could also be represented as a categorical emotion [21], such as anger, joy, or fear.

Initial approaches relied on manual features such as lexicons [8, 22, 23] to identify the polarity of an input text. As machine learning became more popular in NLP, the value of data-driven features became evident, leading to new systems based on probabilistic optimization [24] or supervised learning [25, 26]. In this context, the incorporation of syntactic knowledge showed a substantial influence to understand complex linguistic structures [27, 28, 29, 30]. Neural networks have reshaped sentiment analysis by enabling end-to-end learning with dense, distributed representations. This is thanks to models ranging from recurrent to modern Transformer-based language models, such as masked pretrained language models (MLMs), which remove the need for hand-crafted features.

Despite its practical usefulness and the improvements in accuracy achieved with modern architectures, this sentence- or document-level view of SA still lacks in expressiveness when extracting sentiment information from natural language. It is often the case that a text of interest contains differing opinions on different aspects of an entity, or contrasting opinions from different sources, which cannot be captured by framing the problem as classification of the text as a whole. Fine-grained formulations have evolved from ABSA to the more recent SSA, addressing this limitation by explicitly identifying the sentiment-bearing elements and the relationships between them, thereby enabling a more detailed representation of opinions.

2.1. Aspect-based sentiment analysis

In the domain of ABSA, recent research has explored different architectural innovations to improve fine-grained sentiment extraction. Wu et al. [31] introduced a lexicon and syntax enhanced opinion induction tree model that dynamically builds a tree with the target aspect at its root. First, the model integrates sememe knowledge, phrase structures, and dependency relations. An attention-based reinforcement learning agent then prunes the tree to maximize sentiment rewards. Finally, a graph convolutional network generates aspect representations for polarity classification. Building on the importance of local context, Zhu et al. [32] encode text as spiking-neuron sequences and process sentences bidirectionally to capture surrounding opinion cues. The model separates context and aspect features using a two-channel architecture. It then applies dual attention to dynamically link both representations, assigning higher weights to sentiment-critical words around the target aspect for polarity classification. In a complementary line of work, Dubey et al. [33] proposed an adaptive contextual memory graph transformer. The model integrates (i) a domain-adaptive knowledge graph to capture sentiment shifts across domains, (ii) a hierarchical graph encoder to model multi-relational word-aspect dependencies, and (iii) contrastive learning with semantic role labeling to detect implicit aspects. Along similar lines, Gu et al. [34] proposed an information-assisted multitask learning network that anchors on aspect positions via boundary-aware attention. The model maps sentiment relationships and causes, fuses semantic, syntactic, and lexicon-based

representations, and jointly learns aspect extraction and sentiment classification. It further incorporates commonsense knowledge from ConceptNet [35] to preserve global context while retaining local granularity.

While ABSA research has traditionally been driven by MLMs [36] combined with additional neural modules [37] or rich syntactic features [38] to enhance contextualization, recent work has diversified into novel paradigms such as lexicon and syntax-enhanced opinion tree induction with reinforcement learning [31], spiking-neuron sequence encoding with dual attention [32], an adaptive contextual memory graph transformer with contrastive learning [33], and an information-assisted multitask learning network with boundary-aware attention and commonsense knowledge [34].

SSA instead gained popularity with its formalization in the SemEval 2022 Shared Task 10 [39]. Since then, it has often been reframed as a dependency graph parsing task [5, 11, 40, 41], enabling the application of dependency and semantic parsing techniques, which we detail next.

2.2. Structured Sentiment Analysis

Early approaches to SSA focused on adapting sequence labeling methods to jointly extract sentiment expressions, targets, and holders. The first work addressing the full SSA setting was presented by Barnes et al. [42], where these elements were represented using a BIO encoding and extracted with a CRF-based sequence labeler, while polarity was predicted using a linear SVM. Later, Øvrelid et al. [43] explored a lossy BIO encoding combined with a BiLSTM encoder and a CRF inference layer. Barnes et al. [5] proposed, for the first time, casting the task as a dependency graph parsing problem, which they then solved using a graph-based biaffine parser [12]—a state-of-the-art model for graph prediction in syntactic and semantic parsing—obtaining strong improvements over previous paradigms. SSA was later introduced as a SemEval shared task [39], attracting significant community interest, with 32 participating teams in total.

Among the best-performing systems, Lin et al. [44] adopted the graph-based baseline from Barnes et al. [5], replacing the BiLSTM encoder with pretrained MLMs (RoBERTa and XLM-RoBERTa for the English and non-English datasets, respectively). They further introduced an attention mechanism to handle tokens not included in any sentiment span and suffix masking to address split tokens. Other strong approaches, such as Chen et al. [45], also relied on the biaffine parser with XLM-RoBERTa, while incorporating several data augmentation strategies, including language modeling-based augmentation and the combination of Portuguese and English SemEval Laptop datasets [3]. Similarly, Morio et al. [16] explored ensemble methods to compare graph-based and sequence-to-sequence approaches. Differently, Barikbin [46] proposed a partial sequence labeling approach using RoBERTa for English datasets and LaBSE for non-English datasets. Unlike graph-based parsers, this method follows a modular pipeline that

uses sequence labeling to extract entity spans and attention-based scoring for relation extraction.

More recently, in subsequent work beyond the shared task, Li et al. [47] extracted sentiment quadruples (holder, target, opinion, polarity) via a boundary-sensitive token-pair labeling framework that classifies head–tail, head–head, and tail–tail relations. Their system integrates syntax via conditional layer normalization, jointly labels polarity in the same space, and avoids graph parsing.

In this work, we follow previous research that formulates SSA as a dependency graph parsing task [5, 39]. However, existing approaches rely on specialized graph parsers with task-specific attention or decoding mechanisms. In contrast, we investigate, for the first time, whether sequence labeling can provide a conceptually simpler and more flexible alternative for predicting target dependencies by relying solely on masked language models and simple feed-forward output layers.² Building on recently proposed graph linearization strategies [17], we design an end-to-end encoder-decoder architecture that combines the representational power of MLM-based encoders with the simplicity and efficiency of sequence labeling decoders. This reformulation casts SSA as a token-level classification problem, eliminating the need for complex graph parsing components while preserving the ability to capture dependency structures.

3. Dependency graph parsing as sequence labeling

In this work, we build on sentiment dependency graph representations and explore sequence labeling as an alternative to graph-based parsing. This allows us to perform SSA using only n tagging actions while relying on a simpler decoding process. Our approach starts from the standard dependency graph formulation of SSA and encodes the graph as a sequence of labels whose length matches the number of nodes.

Formally, a dependency graph is defined as $G = (W, A)$, where $W = (w_1, \dots, w_n) \in \mathcal{V}^n$ is the input sequence of tokens and A is the set of arcs representing some type of semantic relation between the nodes of W . Each arc is denoted as $(h \xrightarrow{r} d)$, where $h \in [0, n]$ is the head or parent, $d \in [1, n]$ is the dependent (such that $h \neq d$) and $r \in \mathcal{R}^3$ is the relation type between w_h and w_d .

Recently, Ezquerro et al. [17] have proposed several graph linearizations to transform the information of A into a sequence of n labels, denoted as $\ell = (\ell_1, \dots, \ell_n) \in \mathcal{L}^n$, and perform the reverse operation to recover A from ℓ .⁴ Formally, the *encoding* process is an injective function⁵

²While recent advances in large language models have shown promising capabilities in structured prediction tasks, this work focuses on supervised approaches that explicitly model the task formulation and exploit annotated SSA resources. This choice enables direct comparison with previous graph-based methods and provides a controlled framework to investigate alternative representations of sentiment dependencies, avoiding potential data contamination and memorization issues.

³We use $\mathcal{R}$ to denote the set of possible relations.

⁴We use $\mathcal{L}$ to denote the label set.

⁵We use $\mathcal{A}^n$ to denote the set of arc sets for a sequence of n nodes.

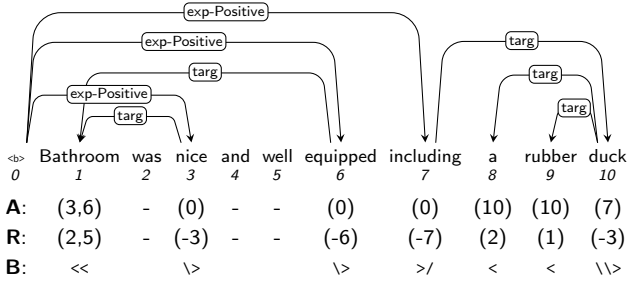


Figure 2: Absolute (A), relative (R) and bracketing (B) encodings for an example extracted from [39]. Note that the token is needed to identify the roots of the graph.

$\varepsilon : \mathcal{A}^n \rightarrow \mathcal{L}^n$ that transforms any set of arcs A into a sequence of labels defined over $\mathcal{L}$, thus facilitating the design of a parameterized model that learns how to map $\mathcal{V}^n$ to $\mathcal{L}^n$ with linear complexity. The *decoding* process instead is a function $\delta : \mathcal{L}^n \rightarrow \mathcal{A}^n$ that recovers the original set of arcs from the encoded labels, so $A = \delta(\varepsilon(A))$. These graph linearization strategies proposed by Ezquerro et al. can be broadly divided into two categories: *unbounded* and *bounded* encodings. Unbounded encodings represent graph structures using labels whose space grows with the size or density of the input graph, whereas bounded encodings constrain the representation to a fixed label space regardless of graph size. The main difference between these two families lies in the trade-off between representational flexibility and a controlled output space. Next, we describe the encoding and decoding procedures for each encoding family.

3.1. Unbounded encodings

These linearizations propose to encode directly head positions or neighboring arcs to represent graphs as labels.

On the one hand, the **absolute** and **relative** indexing consider the sorted sequence of head positions of each node w_i . Figure 2 shows an example of the unbounded encodings: the node w_1 (Bathroom) has two parents: w_3 (nice) and w_6 (equipped), so its absolute label is $\ell_1 = (3, 6)$, where positions are always sorted to avoid redundancy of different arrangements of the same set of positions. The relative label subtracts to each index the actual position of the dependent, so $\ell_1 = (2, 5)$.

On the other hand, the **bracketing** encoding represents with different symbols the presence of an incoming or outgoing arc in some direction for each node. Formally, given the set of symbols $B = \{\backslash, >, <, /\}$, the presence of $\backslash$ in ℓ_i indicates an outgoing arc from w_i to the left, $>$ for an incoming arc from the left to w_i , $<$ for an incoming arc from the right to w_i and $/$ for an outgoing arc from w_i to the right. Figure 2 shows an example of this encoding: w_1 has two parents located at the right, so two left-arrow symbols ($<<$) are used for ℓ_1 . The parents of w_1 are obtained by looking at the following labels: $\ell_3 = \backslash>$, indicating that there is an outgoing arc to the left, so w_3 is parent of previous nodes whose labels contain the symbol $<$, thus resolving that $(3 \rightarrow 1) \in A$.

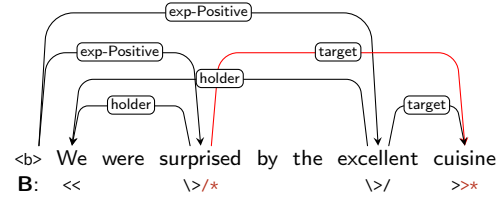


Figure 3: Graph example with two crossing arcs in the same direction: $(0 \rightarrow 6)$ crosses $(3 \rightarrow 7)$. For the bracketing (B) encoding, $(3 \rightarrow 7)$ is encoded with a different set of brackets ($/$, $>$). The $6k$ bit encodings require $k = 2$, so each plane is encoded with an independent sequence of bits.

Decoding Recovering the original set of arcs from the sequence of labels is straightforward for the absolute and relative indexing, since we only need to consider the index of the label and the positions stored in it. The bracketing encoding instead requires a single linear left-to-right pass using two stacks to parse the sequence of brackets, pushing opening left positions into the left stack (those where symbol $<$ is found, indicating the opening of a left arc) and opening right positions into the right stack (where symbol $/$ is found to open a right arc), and removing them when matching brackets are found ($\backslash$ closes a left arc with the element at the top of the left stack and $>$ closes a right arc with the element at the top of the right stack). The bracketing linearization does naturally not support crossing arcs in the same direction, since the closing bracket would be resolved with the opening bracket of the crossing arc. To solve this limitation, A can be distributed into mutually-exclusive subsets of non-crossing arcs in the same direction (planes) and then independently encoding each plane with different variants of the original set of brackets.⁶ An example of this is displayed in Figure 3.

3.2. Bounded encodings

Despite their simplicity, one of the main limitations of positional and bracketing encodings is that the cardinality of $\mathcal{L}$ grows indefinitely with the size or density of the graph. To counteract this, the **4k-bit encoding** and the **6k-bit encoding** enable a bounded label space, where each label is represented as a sequence of m bits— $4k$ and $6k$, respectively—limiting the size of $\mathcal{L}$ to 2^m .

Both encodings assume certain constraints on the arcs of a dependency graph G to enable correct encoding and decoding using 4 and 6 bits per label, respectively. The $4k$ -bit encoding covers dependency graphs where (i) each node has exactly one parent and (ii) no arc crosses another arc in the same direction. The $6k$ -bit encoding, in contrast, supports dependency graphs where (i) each node has at most one parent per direction and (ii) no arc crosses another arc in the same direction. Since these constraints considerably limit graph expressiveness, the arcs of A can be distributed into at most k subsets, denoted as $P_1 \dots P_k$, each satisfying

⁶For instance, the second plane uses $B^* = \{\backslash^*, >^*, <^*, /\}$.

the corresponding constraints. Each subset is then independently encoded with 4 (or 6) bits per label and the resulting k sequences are concatenated at the token level to produce n labels of $4k$ and $6k$ bits each (see example in Figure 4). Our preliminary experiments indicated that the $4k$ -bit encoding underperformed the baselines, likely due to the overhead of creating numerous artificial arcs. Consequently, we selected the $6k$ -bit version as the representative for this family of bounded encodings.

In $6k$ -bit, the arcs of P_j that are associated with the node w_i , for $i = 1 \dots n$ and $j = 1 \dots k$, determine the bit values of the i th label in the j th label sequence. The $6k$ -bit encoding independently encodes each subset P_j with 6 bits per label. The i th label associated to P_j is denoted as $\ell_i^j = (b_i^0, b_i^1, b_i^2, b_i^3, b_i^4, b_i^5)$, where b_i^0 (b_i^3) is activated if w_i has a left (right) parent, b_i^1 (b_i^4) if w_i is the outermost dependent of its right (left) parent, and b_i^2 (b_i^5) if w_i has right (left) dependents. As the $6k$ -bit encoding requires to first distribute the arcs of A into k subsets, and then independently encode each subset considering the definition of ℓ_i^j . Figure 4 shows in B_{6_1} and B_{6_2} the $6k$ -bit encoding with $k = 2$.⁷

In $6k$ -bit encoding, the parameter k can be adjusted to find a good tradeoff between compactness (size of $\mathcal{L}$) and coverage: a smaller k yields a smaller label set, hence improving efficiency and learnability, but may not be able to represent dense graphs or those with complex patterns of mutually crossing arcs, due to impossibility of splitting them into k subsets meeting the restrictions. However, Ezquerro et al. [17] empirically showed that $k = 2$ or 3 is usually sufficient to provide a very high coverage on the datasets they tested.

4. System overview

Our system relies on two phases to perform SSA through dependency graph parsing formulated as a sequence labeling task: (i) the sentiment-to-dependency transformation, which converts sentiment structures into dependency graphs, and (ii) the dependency graph linearization and sequence labeling model, which encodes the graph structure as token-level labels and learns to predict them with a neural network. In this section, we detail each module and how they are used to learn the sentiment graph structure from an input sentence (Figures 5 and 6).

4.1. Sentiment-to-dependency transformation

Let $\mathcal{G} = (W, \Omega)$ be an input sentiment graph for the sentence $W = (w_1, \dots, w_n) \in \mathcal{V}^n$, where $\Omega = (O_1, \dots, O_m)$ is the set of opinion tuples, as described in Section 1. Barnes et al. [5] proposed two strategies to transform each opinion tuple $O' = (h, t, e, p) \in \Omega$ into a valid set of dependency arcs A' and recover O' from A' . The complete set A is the

⁷Note that, unlike the $4k$ -bit encoding, there are no restrictions on the minimum number of parents per node, so the $6k$ -bit encoding does not generate artificial arcs.

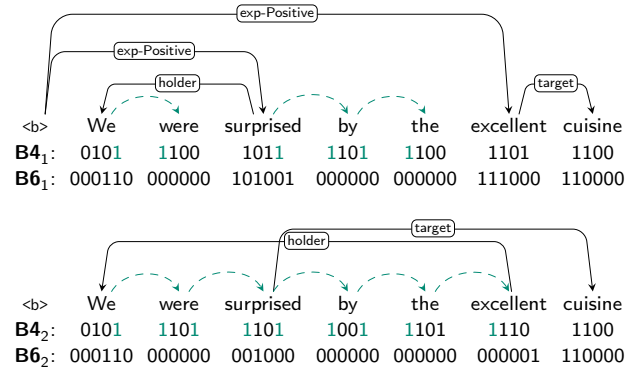


Figure 4: $4k$ (B_{4_k}) and $6k$ -bit (B_{6_k}) encoding example from the graph displayed in Figure 3. Note that the arcs of the original graph need to be distributed in two different subsets that are independently encoded. Artificial arcs (green dashed lines) are generated in the $4k$ -bit encoding to satisfy the first assumption of the algorithm (each node needs one and only one parent). Those arcs are ignored for B_{6_1} and B_{6_2} . Note that in this case the subsets of the $4k$ and $6k$ -bit encoding are the same, but this might not happen for other graphs.

union of subsets A' obtained after transforming all opinion tuples of Ω .

Let x_1 and x_{-1} , where $x \in \{h, t, e\}$ be the first and last token, respectively, of the holder, target or expression components. The first approach, named **head-first**, uses x_1 as the head of the other tokens in x , and then connects the three components with $\{0 \xrightarrow{p} e_1, e_1 \xrightarrow{\text{holder}} h_1, e_1 \xrightarrow{\text{target}} t_1\}$. See an example in Figure 1: the expression “*in great condition*” has *in* as the first token, so “*in*” is connected to “*great*” and “*condition*” as the parent node. Thus, for the opinion tuple $O_1 = (\lambda, \text{the hotel}, \text{in great condition}, +)$, the target is represented with the arcs $\{\text{the} \xrightarrow{\text{target}} \text{hotel}\}$, the expression with $\{\text{in} \xrightarrow{\text{exp}(+)} \text{great}, \text{in} \xrightarrow{\text{exp}(+)} \text{condition}\}$ and both are connected with $\{0 \xrightarrow{\text{exp}(+)} \text{in}, \text{in} \xrightarrow{\text{target}} \text{the}\}$. In the **head-final** approach, instead of using the first token x_1 to connect different components, it uses the last token, so the same opinion tuple is represented as $A' = \{\text{hotel} \xrightarrow{\text{target}} \text{the}, \text{condition} \xrightarrow{\text{exp}(+)} \text{in}, \text{condition} \xrightarrow{\text{exp}(+)} \text{great}, 0 \xrightarrow{\text{exp}(+)} \text{condition}, \text{condition} \xrightarrow{\text{target}} \text{hotel}\}$.

It is possible to recover the original opinion tuple O' from A' , since it only requires first identifying the holder, target and expression as those dependents with an arc relation of each type and then use the arc relation of the root node to extract the polarity. The conversion becomes lossy when multiple opinion tuples span through common tokens, creating multiple re-entrancies for the same token. In these cases, the recovering algorithm is not able to identify which arc needs to be considered to reconstruct each opinion tuple. This phenomenon is rare in the datasets considered in this paper, affecting only a small proportion of graphs. Importantly, this limitation is inherent to representing SSA as a dependency graph rather than to our parsing approach:

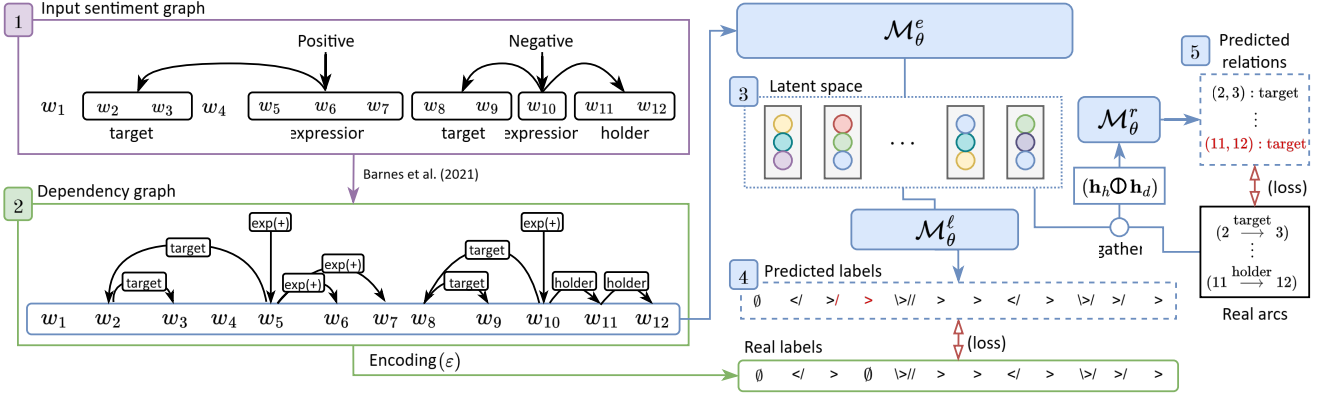


Figure 5: Visualization of the system at training time. Each module is represented with a different color: purple for the sentiment-to-dependency transformation, green for the graph linearization and blue for the neural network. Hypothetical errors are displayed in red for completeness. The input is a sentiment graph (1) that is converted into a dependency graph (2) through Barnes et al. [5]. The input sentence is fed to $\mathcal{M}_\theta^e$ and $\mathcal{M}_\theta^\ell$ to obtain the hidden embeddings (3) and the predicted labels (4). The arcs from (2) are used to pair embeddings and feeding them to $\mathcal{M}_\theta^r$ (5). The network is optimized with the cross-entropy loss of the predicted labels and predicted relations.

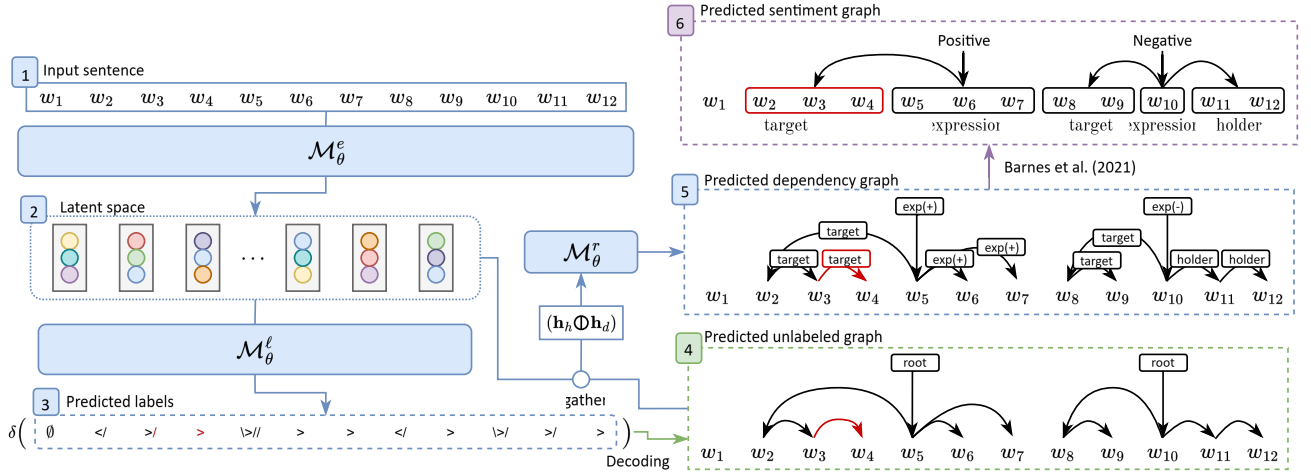


Figure 6: Visualization of the system at inference time. Same color notation as in Figure 5. The input is a sentence (1). The embeddings and predicted labels are obtained by the trained system, as depicted in Figure 5. The decoding process is applied to the predicted labels to recover an unlabeled dependency graph. The r component of each predicted arc is obtained by gathering the corresponding embeddings of (2) and feed them to $\mathcal{M}_\theta^r$. The predicted dependency graph (5) is transformed into a sentiment graph (6) through the inverse transformation of [5].

whenever multiple opinion tuples induce indistinguishable graph structures, the original tuples cannot be uniquely recovered from the graph alone. Consequently, all approaches that formulate SSA as a graph parsing problem, regardless of the parsing architecture or algorithm employed, exhibit the same out-of-coverage cases. Exact coverage statistics are provided later in the paper (see the last column of Table 2).

4.2. Dependency graph linearization and neural tagger

Given the dependency graph $G = (W, A)$ obtained from the previous step, the information of A is encoded as $\varepsilon(A) = (\ell_1, \dots, \ell_n) \in \mathcal{L}^n$ through a graph linearizations introduced in Section 3. Thus, to predict A , our system uses

a neural network to learn the distribution of $\mathcal{L}^n$ from $\mathcal{V}^n$. We followed the encoder-decoder neural framework, where the encoder $\mathcal{M}_\theta^e : \mathcal{V}^n \rightarrow \mathbb{R}^{n \times d}$,⁸ learns a d -dimensional contextualized projection of each token, and the decoder $\mathcal{M}_\theta^\ell : \mathbb{R}^d \rightarrow \mathcal{L}$ independently processes each representation to predict a label.

Note that in the linearizations introduced in Section 3, δ is not able to recover the r component in each arc ($h \xrightarrow{r} d$). To effectively learn the probability distribution over $\mathcal{R}$, we added an additional module, $\mathcal{M}_\theta^r : (\mathbb{R}^d, \mathbb{R}^d) \rightarrow \mathcal{R}$, which concatenates the hidden representations of two words,

⁸We use the symbol θ to denote the set of learnable parameters of a neural network.

(w_h, w_d) , and predicts their relationship type, provided that an arc $(h \xrightarrow{r} d)$ exists.

Figures 5 and 6 show a training and prediction example of our system, respectively. At training time (Figure 5), each training instance is a sentence W together with its complete gold sentiment graph. This graph is converted through Barnes et al. [5]’s transformation into a dependency graph $G = (W, A)$. In turn, said dependency graph is passed through the sequence-labeling encoding to obtain a sequence of gold labels $\varepsilon(A)$, which is the desired output we will train our neural network to produce.

First, the sequence of tokens W is fed to a neural encoder to recover the contextualized embeddings $(\mathbf{h}_1, \dots, \mathbf{h}_n) \in \mathbb{R}^{n \times d}$. Each embedding is fed to $\mathcal{M}_\theta^e$ to obtain a sequence of predicted labels $\hat{\ell} = (\hat{\ell}_1, \dots, \hat{\ell}_n) \in \mathcal{L}^n$; and the cross-entropy loss between $\varepsilon(A)$ and $\hat{\ell}$ is computed to optimize θ . In order to guide $\mathcal{M}_\theta^r$ to learn $\mathcal{R}$ from two paired words, for each arc $(h \xrightarrow{r} d) \in A$, the system gathers and concatenates $(\mathbf{h}_h, \mathbf{h}_d)$ and feeds them to $\mathcal{M}_\theta^r$ to learn $\mathcal{R}$.

At inference time (Figure 6), the input to our system is instead a sentence with no arc information. The embedding matrix and predicted labels are obtained with $\mathcal{M}_\theta^e$ and $\mathcal{M}_\theta^r$. Then, the system runs the decoding process using the sequence of predicted labels and, for each decoded arc, gathers the corresponding embeddings and obtains its relationship type r with $\mathcal{M}_\theta^r$, thus obtaining a dependency graph. Finally, this predicted dependency graph is transformed into a sentiment graph through Barnes et al. [5]’s inverse transformation.

5. Experimental setup

We next describe the datasets used, the required preprocessing, and the training setup.

5.1. Datasets

We conduct experiments on the five datasets provided in the SemEval-2022 Task 10: the OpeNER dataset [48] with English and Spanish annotations, the English Multi-Perspective Question Answer corpus [MPQA; 49] and the Darmstadt Universities corpus [DS; 50], the Norwegian NoReC dataset [51] and the Basque and Catalan Multi-Booked dataset [MB; 42]. The main statistics of these datasets are presented in the Table 1.

Table 2 reports the coverage of each encoding on each dataset, i.e., the percentage of dependency graphs that can be recovered with each encoding (or, equivalently, the maximum F1-score achievable if the sequence labeling system made no prediction errors). Coverage may be lower than 100% for two reasons: (i) the sentiment-to-dependency transformation is not lossless (last column), or (ii) the sequence-labeling encodings cannot represent certain dense graphs or graphs with crossing arcs. Overall, the results show that setting $k = 2$ or 3, depending on the dataset, is sufficient to achieve coverage above 99%. The only exceptions are MPQA_{en} and NoReC_{no}, where coverage is lower. However,

Table 1

General statistics of the datasets used in our experimental study. Subscripts denote the language denoted by its ISO-639 code. Different splits in each subrow: train, development and test. Columns n , $|O|$ and $|A|/n$ denote the average sentence length, number of opinion tuples and ratio of number of arcs and nodes, respectively.

		#sents	#holders	#targets	#expr	n	$ O $	$ A /n$
DS _{en}		2253	69	869	1525	19.99	0.36	0.07
		232	8	117	186	18.09	0.42	0.09
		318	12	155	251	20.40	0.41	0.08
MPQA _{en}		5581	2925	8625	3147	24.37	0.28	0.10
		1979	852	2499	1024	23.91	0.27	0.08
		2025	894	2696	958	23.85	0.24	0.08
MB	G3	1174	149	3355	4866	15.62	1.60	0.53
		167	20	412	626	13.37	1.45	0.52
		335	43	912	1348	14.78	1.47	0.53
	eu	1063	180	1349	3586	10.52	1.50	0.53
		152	28	149	492	10.70	1.30	0.50
		305	54	347	934	10.73	1.35	0.48
NRC _{no}		8634	632	9670	37300	16.71	0.90	0.32
		1531	86	1652	6724	16.92	0.88	0.33
		1272	67	1441	5504	17.18	0.91	0.32
OpeNER	en	1744	203	3866	6359	14.72	1.53	0.48
		249	40	547	911	14.22	1.54	0.49
		499	77	1158	1907	15.49	1.60	0.49
	es	1438	118	4990	5940	17.13	1.89	0.54
		206	18	734	797	17.08	1.70	0.50
		410	42	1559	1912	18.31	2.12	0.55

in both datasets, most of the missing coverage is due to the sentiment-to-dependency transformation.

Finally, Table 3 presents the size of the label space for each encoding and representation; and number of unique arc labels.

5.2. Data preprocessing

To convert the sentiment graphs to dependency graphs, we used the official code⁹ from the SemEval-2022 Task 10, testing both the head-first and head-final representations. As described above, in the head-first representation, the first token of the sentiment expression is treated as the root node, with the first tokens of the holder and target spans attached as its dependents. Similarly, in the head-final representation, the last token of the sentiment expression serves as the root node, and the last tokens of the holder and target spans are attached as dependents.

5.3. Training setup and hyperparameters:

To evaluate the proposed sequence-labeling approach, we fine-tune a well-known multilingual pretrained encoder, which is a de facto model in many applications, as the underlying model for predicting the labels associated with each token. Specifically, we use the XLM-RoBERTa-large encoder [52], a robust multilingual encoder pretrained on text in 100 languages. We fine-tune the model using a linear

⁹https://github.com/jerbarnes/semeval22_structured_sentiment

Table 2

Coverage (SF_1) of each encoding in the test split. Ω represents the SF_1 of the original sentiment to dependency transformation. The first and second subrows for each dataset are for the head-first and head-final approach, respectively.

		Br.			6k-bit			Ω
		1	2	3	1	2	3	
DS _{en}		99.0	99.8	99.8	92.9	99.8	99.8	99.8
		99.0	99.8	99.8	92.5	99.8	99.8	99.8
MPQA _{en}		92.4	95.5	95.9	83.1	94.2	95.7	95.9
		90.4	96.5	96.5	82.3	95.0	96.5	96.5
MB _{ca}		99.1	99.8	99.8	86.1	97.9	99.4	99.8
		98.6	99.8	99.8	85.9	97.9	99.4	99.8
MB _{eu}		97.7	100	100	83.1	95.7	99.1	100
		97.3	100	100	82.4	95.7	99.1	100
NoReC _{no}		89.0	94.2	94.5	77.5	90.9	93.8	95.2
		87.5	93.0	93.0	73.0	88.9	92.2	93.6
OpeNER _{en}		95.9	100	100	84.4	98.3	100	100
		95.9	100	100	84.4	98.3	99.9	100
OpeNER _{es}		99.1	100	100	88.4	98.4	100	100
		98.9	100	100	88.1	98.3	100	100

Table 3

Size of the label space ($|L|$) for each encoding and representation; and number of unique arc labels ($\#rels$). Same notation as in Table 4.

		A	R	Br.			6k-bit			#rels
				1	2	3	1	2	3	
head-first	DS _{en}	117	134	37	45	45	15	30	37	6
	MPQA _{en}	528	615	170	380	403	22	96	140	13
	MB _{ca}	303	274	96	138	138	19	55	72	4
	MB _{eu}	197	193	59	91	91	18	48	61	4
	NoReC _{no}	1047	1371	276	722	778	24	147	243	14
	OpeNER _{en}	355	338	83	136	140	18	57	80	4
	OpeNER _{es}	388	343	82	129	131	18	51	64	4
head-final	DS _{en}	121	137	32	42	42	16	32	38	5
	MPQA _{en}	516	634	169	337	344	29	102	138	13
	MB _{ca}	316	288	81	119	119	17	45	59	4
	MB _{eu}	216	216	56	85	85	18	47	61	4
	NoReC _{no}	1222	1587	256	629	691	27	142	251	16
	OpeNER _{en}	411	375	79	123	127	18	48	74	4
	OpeNER _{es}	412	365	88	130	132	16	44	56	4

learning-rate schedule with an initial learning rate of $1e-5$ and a batch size of 64, employing gradient accumulation over 10 steps. Training is performed with early stopping (patience of 20 epochs) and capped at a maximum of 50 epochs, using a convergence tolerance of 0.03 as the stopping criterion. The experiments are conducted on a single NVIDIA RTX 6000 Ada GPU.

5.4. Evaluation

To evaluate our sequence-labeling approach and enable comparisons with prior state-of-the-art systems, we adopt the two main evaluation protocols used in the literature. We first follow the official SemEval-2022 evaluation protocol,

which enables direct comparison with systems participating in the shared task, and then report a more fine-grained set of metrics following prior work.

Protocol 1: Sentiment Graph F_1 Evaluation This protocol follows the official SemEval-2022 evaluation proposed by Barnes et al. [39], reporting the labeled sentiment graph F_1 score (SF_1) as the primary metric. It enables direct comparison (§ 6.1) with top-ranked systems from the shared task.

Protocol 2: Fine-grained metrics This protocol provides a more detailed view of model performance following Barnes et al. [5]. In particular, we report: (i) token-level F_1 scores for holder, target, and expression spans; (ii) targeted F_1 (target expression with polarity); (iii) unlabeled and labeled dependency parsing F_1 ; and (iv) sentiment F_1 with and without polarity (NSF_1 and SF_1). These metrics enable us to better isolate where gains or losses originate, whether in span detection, relation labeling, or polarity assignment.

Internal baseline: Biaffine decoder To isolate the effect of our sequence-labeling formulation from other architectural choices, we include an internal baseline that replaces the sequence-labeling decoder with the standard biaffine decoder [12] used by prior graph-based methods [40, 44, 53], while keeping the same XLM-RoBERTa-large encoder. This allows us to attribute performance differences to the prediction formulation rather than to the encoder or training setup.

6. Results

We next analyze the results using both evaluation protocols, reporting both the official shared-task ranking metrics and the more fine-grained evaluation metrics used in related work predating the shared task.

6.1. Labeled sentiment graph F_1 score evaluation

Table 4 presents the performance of our models on each dataset according to the official SemEval shared-task ranking metric (SF_1) for both the *head-first* ($h.first$) and *head-final* ($h.final$) transformations.

Sequence labeling vs graph-based decoder Compared with the biaffine graph-based baseline, our models outperform the graph-based approach on most treebanks under the *head-first* strategy. The trend differs for the *head-final* representation, which also appears to be better suited to biaffine parsers, yielding an average SF_1 of 57.8 compared with 51.8 under *head-first*.

Discussion on head-first results Regarding the encodings, under the *h.first* setting, the absolute encoding outperforms the biaffine baseline on 6 out of 7 treebanks (all except MPQA_{en}), and its overall average is also higher (55.6 SF_1 vs. 51.8 for biaffine). The relative encoding, however, does not outperform the biaffine baseline on any treebank and has a lower overall average (44.1 SF_1).

Table 4

SF₁ score in the test set for the absolute (A), relative (R), bracketing (Br) and 6k-bit encodings. Subcolumns in the bracketing and bit-based encodings denote the value of the hyperparameter k . The best result is highlighted in bold. The average is included in the last row (μ).

	<i>h.first</i>									<i>h.final</i>								
	A	R	Br.			6k-bit			Biaf.	A	R	Br.			6k-bit			Biaf.
			1	2	3	1	2	3				1	2	3	1	2	3	
DS _{en}	37.9	19.8	44.0	41.4	41.4	43.8	46.1	43.3	35.0	42.1	18.6	36.5	39.8	40.9	41.2	38.9	41.2	44.3
MPQA _{en}	17.6	18.6	21.3	17.1	28.5	32.6	28.8	32.3	29.8	16.8	13.1	27.2	17.8	28.5	31.5	34.8	31.6	29.8
MB _{ca}	68.3	57.1	61.6	69.2	70.8	73.0	77.0	71.8	61.1	51.1	47.6	56.8	64.6	62.7	62.8	65.0	67.0	69.3
MB _{eu}	71.3	57.1	60.5	66.4	69.5	72.5	68.6	71.5	62.1	61.4	54.3	55.3	64.6	60.6	65.5	63.0	65.2	70.9
NoReC _{no}	48.9	38.5	40.9	45.2	42.4	47.3	51.9	49.5	48.0	42.8	31.1	39.1	46.3	48.7	50.1	49.0	49.7	47.1
OpeNER _{en}	72.8	61.7	66.6	69.3	68.2	74.0	75.7	73.4	65.8	59.8	53.1	63.3	67.2	66.4	68.9	70.0	71.7	72.8
OpeNER _{es}	72.5	55.8	62.1	71.9	68.0	72.7	74.8	72.9	60.7	51.7	46.6	61.9	65.5	65.5	63.0	66.7	66.5	70.5
μ	55.6	44.1	51.0	54.4	55.5	59.4	60.4	59.2	51.8	46.5	37.8	48.6	52.3	53.3	54.7	55.3	56.1	57.8

Table 5

SF₁ comparison of different studies and our best-performing encoding (6k-bit with $k = 2$). Systems proposed in the SemEval-2022 Task 10 [39] are marked with an asterisk. Best results highlighted in bold.

	DS _{en}	MPQA _{en}	MB _{ca}	MB _{eu}	NoReC _{no}	OpeNER _{en}	OpeNER _{es}	μ
*[44]	49.4	44.7	72.8	73.9	52.9	76.0	72.2	63.1
*[45]	48.5	41.6	72.8	73.9	52.4	76.3	74.2	62.8
*[16]	46.3	40.2	70.9	71.5	53.3	75.6	73.2	61.6
*[46]	41.0	37.5	68.1	72.3	50.4	74.7	73.5	59.6
*[53]	41.4	34.9	65.3	68.0	46.2	69.8	69.2	56.4
*[54]	49.0	35.1	68.4	68.6	49.6	67.6	62.3	56.1
[5]	20.4	12.5	51.6	54.5	27.2	52.1	49.5	38.3
[39]	0.06	0.02	33.8	36.5	12.3	32.9	24.0	19.9
SFA	27.4	20.4	59.3	62.7	32.7	-	-	44.3
PERIN	31.2	34.1	63.3	61.3	41.6	-	-	46.3
[47]	34.1	24.1	63.2	62.6	41.9	-	-	45.9
[41]	29.9	22.2	61.0	62.0	35.8	-	-	42.9
Ours	46.1	28.8	77.0	68.6	51.9	75.7	74.8	60.4

The bracketing encoding ($k=3$) achieves an average SF₁ of 55.5, while the bounded encodings consistently surpass the biaffine baseline across treebanks. In particular, the 6k-bit encoding ($k=2$) reaches an average across treebanks of 60.4, the highest overall, suggesting that the choice of representation plays an important role. The choice of the hyperparameter k also has an impact on performance. When increasing k leads to higher graph coverage, performance generally improves. For example, in MB_{eu}, increasing k from 1 to 3 in the bracketing encoding raises SF₁ from 60.5 to 69.5. By contrast, once coverage gains saturate, further increases in k provide little or no benefit. This is illustrated by DS_{en}, where increasing k from 2 to 3 for the 6k-bit encoding reduces SF₁ from 46.1 to 43.3, consistent with the limited coverage improvement reported in Table 2.

Discussion on head-final results Comparing the *h.first* and *h.final* transformations reveals distinct modeling behaviors. While SL models achieve stronger results under

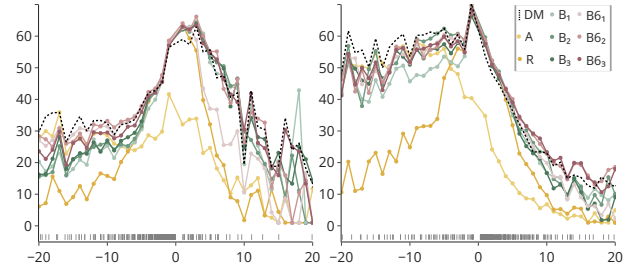


Figure 7: F₁-score (y-axis) per displacement (x-axis) in the head-first (left) and head-final (right) representations, alongside the rug plot of the ground truth displacements. The biaffine baseline (DM) and the encodings are denoted with different acronyms: absolute (A), relative (R), bracketing (B), and 6k-bit (B6) encodings, using subscripts for the value of the hyperparameter k , when applicable.

the *h.first* setting, the *h.final* representation appears more challenging for sequence labeling models, leading to lower performance across encodings. In contrast, the biaffine baseline achieves its best results under the *h.final* setting, suggesting that this representation is better suited to graph-based decoding. Nevertheless, the 6k-bit SL model with *h.first* remains the best-performing approach overall, obtaining average SF₁ scores of 59.4, 60.4, and 59.2 for $k = 1, 2$, and 3, respectively, and surpassing the best biaffine result of 57.8.

Complementarily, Figure 7 presents a detailed visualization of the F₁-score across different displacement values for the *h.first* and *h.final* representations. The displacement of a syntactic dependency is a signed distance, i.e., the position of the head word in the sentence minus that of the dependent word. For both graph-based and sequence-labeling parsers, all models show lower performance for longer dependencies, regardless of their direction, reflecting a general difficulty in capturing long-range dependencies across paradigms. Although the displacement distribution in the *h.first* setting is skewed to the right, indicating a

higher frequency of negative displacements (right arcs), the various encodings, particularly the 6k-bit encodings, maintain relatively balanced performance across positive and negative displacements. This suggests that *h.first* is more robust to the skew in the data and provides more consistent performance across dependency lengths and directions. In contrast, the *h.final* setting exhibits a left-skewed distribution, meaning that the training data contains more positive displacements (left arcs). Its performance is notably lower on the denser positive-displacement side, which negatively affects the overall accuracy of the model.

Finally, Table 5 presents a comparison between our approach and representative existing systems for structured sentiment analysis. While previous approaches often incorporate additional components, such as data augmentation [45], ensemble strategies [46], or language-specific encoders [44, 16], our approach relies on a single encoder architecture shared across datasets, without introducing treebank-specific optimizations. Moreover, it formulates structured sentiment analysis as a sequence labeling problem, avoiding graph-specific decoding mechanisms. Despite this relatively simple formulation, our parser outperforms existing systems on 2 out of 7 treebanks and achieves competitive performance across the seven treebanks. These results suggest that formulating graph parsing as sequence labeling can provide a competitive yet simple alternative for structured sentiment analysis.

6.2. Fine-grained Evaluation

Following Protocol 2, Table 6 compares our sequence labeling approach with prior work evaluated under the same strategy (per-dataset results are in Tables A1–A7, Appendix A). These systems rely on alternative paradigms: SFA [11], which models token-level sentiment relations with sparse fuzzy attention; PERIN [40], a graph parser that directly learns sentiment graph edges under three encodings¹⁰; Barnes et al. [5], who cast the task as dependency graph parsing with a dedicated graph decoder; Fernández-González [41], who use transition-based graph parsing; and Li et al. [47], who extract (holder, target, opinion, polarity) quadruples with a boundary-sensitive token-pair labeling framework.

Three main conclusions emerge from Table 6, following the results from the previous section. First, they confirm that sentiment analysis does not require a dedicated graph-parsing architecture. With a suitable linearization, a plain sequence labeler obtains the highest SF₁ among the available systems on three of the five benchmarks (MB_{ca}, MB_{eu} and NoReC_{no}), improving over +1.1 to +3.0 SF₁ points (largest gain on MB_{ca}), as well as the best target F₁ on four of them. On the remaining two datasets it stays competitive with systems built specifically to predict graphs or opinion tuples.

Second, the output representation, not only the encoder, drives these gains. Particularly, the biaffine baseline uses the same XLM-RoBERTa-large encoder and extracts spans

Table 6

Fine-grained SSA results comparison against state of the art systems and Biaffine baseline: **Spans (F₁)** column is the token-level F₁-score for the holder, target and expression; **T.SF₁** is the targeted F₁ score; **UF₁** and **LF₁** are the unlabeled and labeled F₁ scores for dependency graph parsing; and **SF₁** and **NSF₁** are the sentiment F₁ score with or without the sentiment polarity. Our best-performing encoding 6k-bit (**B6₃**) where subscript denotes the value of the hyperparameter *k*. Dash (-) for results not reported in the original paper. Best result highlighted in bold.

Dataset	Model	Spans (F ₁)			T.SF ₁	Dep.		Sent.	
		Holder	Target	Exp		UF ₁	LF ₁	NSF ₁	SF ₁
MB _{ca}	[40] ^{OT}	48.0	72.5	68.9	-	-	-	65.7	63.3
	[40] ^{LE}	60.8	70.8	72.5	-	-	-	64.5	62.1
	[40] ^{NC}	56.1	69.8	70.5	-	-	-	63.5	61.7
	[47]	36.8	-	75.5	73.4	-	-	66.4	63.2
	[11]	46.2	74.2	71.0	60.9	-	64.5	-	59.3
	[5]	37.1	71.2	67.1	53.9	62.7	58.1	59.7	53.7
	[41]	55.7	73.9	69.6	57.0	65.2	60.2	64.7	59.0
	Biaf	54.5	74.2	71.1	50.8	50.8	49.4	46.6	45.1
	B6₃	56.3	80.2	74.5	67.2	69.3	67.0	67.6	66.3
MB _{eu}	[11]	65.8	71.0	76.7	59.6	-	66.1	-	62.7
	[40] ^{NC}	58.9	63.5	73.9	-	-	-	59.8	58.6
	[40] ^{LE}	57.6	64.9	72.5	-	-	-	60.0	58.8
	[40] ^{OT}	64.2	67.4	73.2	-	-	-	62.5	61.3
	[47]	61.4	-	70.0	74.5	-	-	63.8	62.6
	[5]	60.5	64.0	72.1	56.9	60.8	56.0	58.0	54.7
	[41]	66.6	67.9	76.6	60.5	66.9	61.4	63.8	60.4
	Biaf	71.4	74.4	78.2	55.0	57.0	55.6	44.4	44.0
	B6₃	71.8	76.1	78.9	66.8	66.5	64.3	65.1	63.8
NoReC _{no}	[47]	62.5	-	61.4	61.3	-	-	46.7	41.9
	[40] ^{NC}	60.3	51.8	54.2	-	-	-	42.7	39.3
	[40] ^{LE}	64.0	52.3	56.1	-	-	-	43.7	40.4
	[40] ^{OT}	65.1	58.3	60.7	-	-	-	47.8	41.6
	[11]	63.6	55.3	56.1	31.5	-	40.0	-	32.7
	[5]	60.4	54.8	55.5	31.9	48.0	37.7	39.2	31.2
	[41]	57.5	54.3	51.5	36.1	45.0	36.5	44.2	35.8
	Biaf	64.2	61.8	61.3	33.8	30.3	27.3	28.2	26.6
	B6₃	62.8	62.0	66.1	47.5	55.9	50.5	47.4	43.8
DS _{en}	[47]	47.0	-	44.7	45.0	-	-	37.8	34.1
	[11]	50.0	44.8	43.7	30.7	-	34.9	-	27.4
	[40] ^{NC}	31.4	35.0	35.1	-	-	-	24.8	22.9
	[40] ^{LE}	32.5	38.0	36.2	-	-	-	28.8	27.3
	[40] ^{OT}	42.2	40.6	39.3	-	-	-	33.2	31.2
	[5]	37.4	42.1	45.5	29.6	38.1	33.9	34.3	26.5
	[41]	43.2	44.4	43.6	28.7	36.3	30.3	32.7	25.6
	Biaf	37.5	35.3	43.8	18.0	23.4	21.7	9.7	9.7
	B6₃	28.6	45.6	53.0	34.3	45.8	42.7	36.1	32.0
MPQA _{en}	[40] ^{OT}	55.7	64.0	53.5	-	-	-	45.1	34.1
	[40] ^{NC}	58.4	60.3	55.8	-	-	-	38.7	28.3
	[40] ^{LE}	53.6	53.4	53.4	-	-	-	33.8	27.0
	[11]	47.9	50.7	47.8	33.7	-	37.6	-	20.4
	[47]	46.5	-	51.8	47.6	-	-	29.3	24.1
	[5]	46.3	49.5	46.0	18.6	41.4	38.0	26.1	18.8
	[41]	43.8	46.4	45.2	18.1	38.0	35.4	25.9	19.7
	Biaf	52.4	55.5	53.0	29.0	25.2	24.0	14.0	12.0
	B6₃	55.6	61.0	54.5	26.0	50.2	47.8	29.9	27.3

about as well as our model, sometimes better, yet its sentiment graph scores fall far behind on every dataset—by over 15 SF₁ points. The encoder therefore already identifies the relevant text fragments; the difficulty lies in assembling them into coherent graphs, which is precisely the step our linearization shows can be performed without a dedicated decoder.

Thus, one of our model’s strengths lies in capturing complete opinion structures rather than individual elements.

¹⁰Node-centric (NC), labeled-edge (LE), and opinion-tuple (OT).

It is most competitive on graph-level metrics, while element-level metrics, especially holder extraction and targeted polarity, are where other systems often do better. We hypothesize that this is consistent with an encoding in which each token's label encodes its role within the full opinion graph: the model learns global structure well, at some cost in precision on individual components. Improving holder and target-polarity prediction is therefore the most direct path to further gains, although it falls outside the scope of a pure sequence-labeling-based approach.

Finally, the gap to the best available systems on $MPQA_{en}$ and DS_{en} reflects the difficulty of these datasets more than a specific weakness of our formulation. Following Table 1, they have sparse, long-range and frequently overlapping opinions, and all systems score substantially lower on them. A suitable explanation for this is that set-based decoders such as PERIN's opinion-tuple variant, which predict each opinion as an independent unit, seem better suited to heavily overlapping structures.

6.3. Model Efficiency Analysis

Our sequence labeling approach is substantially more efficient than the Biaffine graph decoder. Using the *head-first* representation (*head-final* exhibits similar patterns), our models process approximately 3,800 tokens/s during training and 4,450 tokens/s at inference—a 2× speedup over the Biaffine baseline (1,893 and 2,196 tokens/s, respectively) under the same configurations (e.g., batch size=64)¹¹. These efficiency gains come directly from the simpler sequence-labeling decoder, which avoids constructing dense pairwise score tensors. As shown in Table A8 of Appendix A, all representation variants (A, R, B_1 – B_3 , and B_{6_1} – B_{6_3}) perform within 1–2% of each other, confirming that the advantage stems from the formulation itself rather than any specific encoding.

Figure 8 shows an efficiency comparison of our models in terms of inference speed (tokens per second, Table A8) vs. SF_1 (Table 4) on the *head-first* representation, highlighting the Pareto front with dashed lines. As can be seen, all sequence labeling models are substantially faster than the biaffine baseline parser. The bracketing encodings (B_2 and B_3) occupy the high-speed end of the front, whereas the 6k-bit encodings (B_{6_1} and B_{6_2}) achieve the higher SF_1 scores—likely due to the compact label space (Table 3) making classification easier at the cost of a slight drop in speed.

7. Conclusion

This work framed structured sentiment analysis as a dependency graph parsing problem. Unlike previous attempts, it applied the parsing-as-tagging paradigm, where each input token is assigned a label that encodes a part of the graph. To achieve this, we leveraged a recently proposed approach to

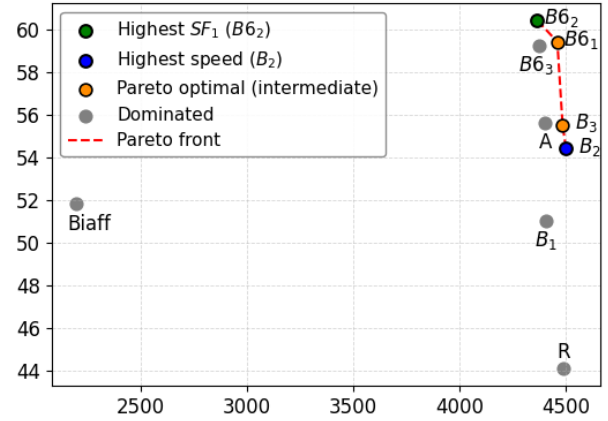


Figure 8: Performance (SF_1 , y-axis) vs inference speed (tokens per second, x-axis) on the head-first representation. The Pareto front is displayed with dashed lines. The biaffine baseline (Biaff) and the encodings are denoted with different acronyms: absolute (A), relative (R), bracketing (B), and 6k-bit (B_6), using subscripts for the value of the hyperparameter k , where applicable.

linearize graphs, applying it to graph-based sentiment structures. We showed that these linearizations are well-suited for the task at hand and that both bounded and unbounded encodings (in terms of their output label space) are learnable.

Particularly, when these are combined with standard encoder-decoder sequence architectures and the right representation, sequence labeling models can consistently compete with or even outperform more complex approaches across different datasets, while achieving high efficiency. Of the linearizations tested, the 6k-bit encoding showed the best overall performance. Overall, these findings highlight the potential of lightweight, sequence-labeling models for structured sentiment analysis, especially when they are combined with effective structural encodings.

Acknowledgments

We acknowledge the European Research Council (ERC), which has funded this research under the Horizon Europe research and innovation programme (SALSA, grant agreement No 101100615), GAP (PID2022-139308OA-I00) funded by MICIU/AEI/10.13039/501100011033/ and by ERDF, EU; LATCHING (PID2023-147129OB-C21) funded by MICIU/AEI/10.13039/501100011033 and ERDF (EU), Ministry for Digital Transformation and Civil Service and “NextGenerationEU” PRTR under grant TSI-100925-2023-1, Xunta de Galicia (ED431C 2024/02), and Centro de Investigación de Galicia “CITIC”, funded by the Xunta de Galicia through the collaboration agreement between the Consellería de Cultura, Educación, Formación Profesional e Universidades and the Galician universities for the reinforcement of the research centres of the Galician University System (CIGUS). Furthermore, this research was

¹¹All throughput measurements (training and inference) were performed on a single NVIDIA RTX 6000 Ada GPU.

supported by the International, Interdisciplinary and Intersectoral Information and Communications Technology PhD programme (3-i ICT) granted to CITIC and supported by the European Union through the Horizon 2020 research and innovation programme under a Marie Skłodowska-Curie agreement (H2020-MSCA-COFUND), GA 101034261. Additional support was provided by the INDITEX-UDC 2024 pre-doctoral Research Fellowship Program.

CRediT authorship contribution statement

Muhammad Imran: Conceptualization, Data curation, Formal analysis, Investigation, Methodology, Software, Validation, Visualization, Writing - original draft, Writing - review & editing. **Ana Ezquerro:** Conceptualization, Methodology, Software, Validation, Visualization, Writing - original draft, Writing - review & editing. **Carlos Gómez-Rodríguez:** Conceptualization, Formal analysis, Funding acquisition, Investigation, Methodology, Project administration, Supervision, Validation, Writing - original draft, Writing - review & editing. **Anders Søgaard:** Conceptualization, Investigation, Methodology, Supervision. **David Vilares:** Conceptualization, Formal analysis, Investigation, Methodology, Validation, Writing - original draft, Writing - review & editing.

References

- [1] B. Pang, L. Lee, Opinion mining and sentiment analysis, *Foundations and Trends® in information retrieval* 2 (2008) 1–135.
- [2] J. Cui, Z. Wang, S.-B. Ho, E. Cambria, Survey on Sentiment Analysis: Evolution of Research Methods and Topics, *Artificial Intelligence Review* 56 (2023) 8469–8510.
- [3] M. Pontiki, D. Galanis, J. Pavlopoulos, H. Papageorgiou, I. Androutsopoulos, S. Manandhar, SemEval-2014 Task 4: Aspect Based Sentiment Analysis, in: *Proceedings of the 8th International Workshop on Semantic Evaluation (SemEval 2014)*, Association for Computational Linguistics, Dublin, Ireland, 2014, pp. 27–35. URL: <https://aclanthology.org/S14-2004/>. doi:10.3115/v1/S14-2004.
- [4] K. Schouten, F. Frasincar, Survey on aspect-level sentiment analysis, *IEEE transactions on knowledge and data engineering* 28 (2015) 813–830.
- [5] J. Barnes, R. Kurtz, S. Oepen, L. Øvrelid, E. Velldal, Structured Sentiment Analysis as Dependency Graph Parsing, in: *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, Association for Computational Linguistics, Online, 2021, pp. 3387–3402. URL: <https://aclanthology.org/2021.acl-long.263/>. doi:10.18653/v1/2021.acl-long.263.
- [6] B. Liu, *Sentiment Analysis: A Fascinating Problem*, Springer International Publishing, Cham, 2012, pp. 1–8. URL: https://doi.org/10.1007/978-3-031-02145-9_1. doi:10.1007/978-3-031-02145-9_1.
- [7] M. Pontiki, D. Galanis, H. Papageorgiou, I. Androutsopoulos, S. Manandhar, M. Al-Smadi, M. Al-Ayyoub, Y. Zhao, B. Qin, O. De Clercq, V. Hoste, M. Apidianaki, X. Tannier, N. Loukachevitch, E. Kotelnikov, N. Bel, S. M. Jiménez-Zafra, G. Eryigit, SemEval-2016 task 5: Aspect based sentiment analysis, in: *Proceedings of the 10th International Workshop on Semantic Evaluation (SemEval-2016)*, Association for Computational Linguistics, San Diego, California, 2016, pp. 19–30. URL: <https://aclanthology.org/S16-1002/>. doi:10.18653/v1/S16-1002.
- [8] M. Taboada, J. Brooke, M. Tofiloski, K. Voll, M. Stede, Lexicon-Based Methods for Sentiment Analysis, *Computational Linguistics* 37 (2011) 267–307.
- [9] M. T. Ribeiro, S. Singh, C. Guestrin, “Why should i trust you?” Explaining the predictions of any classifier, in: *Proceedings of the 22nd ACM SIGKDD international conference on knowledge discovery and data mining*, 2016, pp. 1135–1144.
- [10] L. Zhang, S. Wang, B. Liu, *Deep Learning for Sentiment Analysis: A Survey*, Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery 8 (2018) e1253.
- [11] L. Peng, Z. Li, H. Zhao, Sparse fuzzy attention for structured sentiment analysis, *arXiv preprint arXiv:2109.06719* (2021).
- [12] T. Dozat, C. D. Manning, Simpler but More Accurate Semantic Dependency Parsing, in: *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, Association for Computational Linguistics, Melbourne, Australia, 2018, pp. 484–490. URL: <https://aclanthology.org/P18-2077/>. doi:10.18653/v1/P18-2077.
- [13] S. Oepen, O. Abend, L. Abzianidze, J. Bos, J. Hajic, D. Herscovich, B. Li, T. O’Gorman, N. Xue, D. Zeman, MRP 2020: The Second Shared Task on Cross-Framework and Cross-Lingual Meaning Representation Parsing, in: *Proceedings of the CoNLL 2020 Shared Task: Cross-Framework Meaning Representation Parsing*, Association for Computational Linguistics, Online, 2020, pp. 1–22. URL: <https://aclanthology.org/2020.conll-shared.1/>. doi:10.18653/v1/2020.conll-shared.1.
- [14] R. Kurtz, S. Oepen, M. Kuhlmann, End-to-End Negation Resolution as Graph Parsing, in: *Proceedings of the 16th International Conference on Parsing Technologies and the IWPT 2020 Shared Task on Parsing into Enhanced Universal Dependencies*, Association for Computational Linguistics, Online, 2020, pp. 14–24. URL: <https://aclanthology.org/2020.iwpt-1.3/>. doi:10.18653/v1/2020.iwpt-1.3.
- [15] D. Samuel, M. Straka, ÚFAL at MRP 2020: Permutation-invariant Semantic Parsing in PERIN, in: *Proceedings of the CoNLL 2020 Shared Task: Cross-Framework Meaning Representation Parsing*, Association for Computational Linguistics, Online, 2020, pp. 53–64. URL: <https://aclanthology.org/2020.conll-shared.5/>. doi:10.18653/v1/2020.conll-shared.5.
- [16] G. Morio, H. Ozaki, A. Yamaguchi, Y. Sogawa, Hitachi at SemEval-2022 Task 10: Comparing Graph- and Seq2Seq-based Models Highlights Difficulty in Structured Sentiment Analysis, in: *Proceedings of the 16th International Workshop on Semantic Evaluation (SemEval-2022)*, Association for Computational Linguistics, Seattle, United States, 2022, pp. 1349–1359. URL: <https://aclanthology.org/2022.semeval-1.188/>. doi:10.18653/v1/2022.semeval-1.188.
- [17] A. Ezquerro, D. Vilares, C. Gómez-Rodríguez, Dependency Graph Parsing as Sequence Labeling, in: *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, Association for Computational Linguistics, Miami, Florida, USA, 2024, pp. 11804–11828. URL: <https://aclanthology.org/2024.emnlp-main.659/>. doi:10.18653/v1/2024.emnlp-main.659.
- [18] A. L. Maas, R. E. Daly, P. T. Pham, D. Huang, A. Y. Ng, C. Potts, Learning Word Vectors for Sentiment Analysis, in: *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, Association for Computational Linguistics, Portland, Oregon, USA, 2011, pp. 142–150. URL: <https://aclanthology.org/P11-1015/>.
- [19] H. Tian, C. Gao, X. Xiao, H. Liu, B. He, H. Wu, H. Wang, F. Wu, SKEP: Sentiment knowledge enhanced pre-training for sentiment analysis, in: *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, Association for Computational Linguistics, Online, 2020, pp. 4067–4076. URL: <https://aclanthology.org/2020.acl-main.374/>. doi:10.18653/v1/2020.acl-main.374.
- [20] F. Barbieri, L. Espinosa Anke, J. Camacho-Collados, XLM-T: Multilingual language models in Twitter for sentiment analysis and beyond, in: *Proceedings of the Thirteenth Language Resources and Evaluation Conference*, European Language Resources Association,

- Marseille, France, 2022, pp. 258–266. URL: <https://aclanthology.org/2022.lrec-1.27/>.
- [21] C. Strapparava, R. Mihalcea, SemEval-2007 Task 14: Affective Text, in: Proceedings of the Fourth International Workshop on Semantic Evaluations (SemEval-2007), Association for Computational Linguistics, Prague, Czech Republic, 2007, pp. 70–74. URL: <https://aclanthology.org/S07-1013/>.
- [22] A. Bakliwal, J. Foster, J. van der Puil, R. O'Brien, L. Tounsi, M. Hughes, Sentiment Analysis of Political Tweets: Towards an Accurate Classifier, in: Proceedings of the Workshop on Language Analysis in Social Media, Association for Computational Linguistics, Atlanta, Georgia, 2013, pp. 49–58. URL: <https://aclanthology.org/W13-1106/>.
- [23] S. Mohammad, S. Kiritchenko, X. Zhu, NRC-Canada: Building the state-of-the-art in sentiment analysis of tweets, in: Second Joint Conference on Lexical and Computational Semantics (*SEM), Volume 2: Proceedings of the Seventh International Workshop on Semantic Evaluation (SemEval 2013), Association for Computational Linguistics, Atlanta, Georgia, USA, 2013, pp. 321–327. URL: <https://aclanthology.org/S13-2053/>.
- [24] B. Yang, C. Cardie, Context-aware learning for sentence-level sentiment analysis with posterior regularization, in: Proceedings of the 52nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), Association for Computational Linguistics, Baltimore, Maryland, 2014, pp. 325–335. URL: <https://aclanthology.org/P14-1031/>. doi:10.3115/v1/P14-1031.
- [25] T. Mullen, N. Collier, Sentiment Analysis using Support Vector Machines with Diverse Information Sources, in: Proceedings of the 2004 Conference on Empirical Methods in Natural Language Processing, Association for Computational Linguistics, Barcelona, Spain, 2004, pp. 412–418. URL: <https://aclanthology.org/W04-3253/>.
- [26] B. Pang, L. Lee, S. Vaithyanathan, Thumbs up? Sentiment Classification using Machine Learning Techniques, in: Proceedings of the 2002 Conference on Empirical Methods in Natural Language Processing (EMNLP 2002), Association for Computational Linguistics, 2002, pp. 79–86. URL: <https://aclanthology.org/W02-1011/>. doi:10.3115/1118693.1118704.
- [27] S. Poria, E. Cambria, G. Winterstein, G.-B. Huang, Sentic patterns: Dependency-based rules for concept-level sentiment analysis, Knowledge-Based Systems 69 (2014) 45–63.
- [28] D. Vilares, C. Gómez-Rodríguez, M. A. Alonso, Universal, unsupervised (rule-based), uncovered sentiment analysis, Knowledge-Based Systems 118 (2017) 45–55.
- [29] C. Gómez-Rodríguez, M. Imran, D. Vilares, E. Solera, O. Kellert, Dancing in the syntax forest: fast, accurate and explainable sentiment analysis with SALSA, in: SEPLN–CEDI–PD 2024. Seminar of the Spanish Society for Natural Language Processing: Projects and System Demonstrations, volume 3729 of *CEUR Workshop Proceedings*, A Coruña, Spain, 2024, pp. 12–17.
- [30] M. Imran, O. Kellert, C. Gómez-Rodríguez, A syntax-injected approach for faster and more accurate sentiment analysis, PeerJ Computer Science 12 (2026) e3519.
- [31] H. Wu, D. Zhou, C. Sun, Z. Zhang, Y. Ding, Y. Chen, Lsoit: Lexicon and syntax enhanced opinion induction tree for aspect-based sentiment analysis, Expert Systems with Applications 235 (2024) 121137.
- [32] C. Zhu, B. Yi, L. Luo, Aspect-based sentiment analysis via bidirectional variant spiking neural p systems, Expert Systems with Applications 259 (2025) 125295.
- [33] G. Dubey, A. K. Dubey, K. Kaur, G. Raj, P. Kumar, Adaptive contextual memory graph transformer with domain-adaptive knowledge graph for aspect-based sentiment analysis, Expert Systems with Applications 278 (2025) 127300.
- [34] T. Gu, Z. He, Z. Li, Y. Wan, Information-assisted and sentiment relation-driven for aspect-based sentiment analysis, Expert Systems with Applications 278 (2025) 127308.
- [35] H. Liu, P. Singh, Conceptnet—a practical commonsense reasoning tool-kit, BT technology journal 22 (2004) 211–226.
- [36] X. Li, L. Bing, W. Zhang, W. Lam, Exploiting BERT for End-to-End Aspect-based Sentiment Analysis, in: Proceedings of the 5th Workshop on Noisy User-generated Text (W-NUT 2019), Association for Computational Linguistics, Hong Kong, China, 2019, pp. 34–41. URL: <https://aclanthology.org/D19-5505/>. doi:10.18653/v1/D19-5505.
- [37] C. Zhang, Q. Li, D. Song, Aspect-based Sentiment Classification with Aspect-specific Graph Convolutional Networks, in: Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), Association for Computational Linguistics, Hong Kong, China, 2019, pp. 4568–4578. URL: <https://aclanthology.org/D19-1464/>. doi:10.18653/v1/D19-1464.
- [38] L. Huang, X. Sun, S. Li, L. Zhang, H. Wang, Syntax-Aware Graph Attention Network for Aspect-Level Sentiment Classification, in: Proceedings of the 28th International Conference on Computational Linguistics, International Committee on Computational Linguistics, Barcelona, Spain (Online), 2020, pp. 799–810. URL: <https://aclanthology.org/2020.coling-main.69/>. doi:10.18653/v1/2020.coling-main.69.
- [39] J. Barnes, L. Oberlaender, E. Troiano, A. Kutuzov, J. Buchmann, R. Agerri, L. Øvrelid, E. Velldal, SemEval 2022 task 10: Structured sentiment analysis, in: Proceedings of the 16th International Workshop on Semantic Evaluation (SemEval-2022), Association for Computational Linguistics, Seattle, United States, 2022, pp. 1280–1295. URL: <https://aclanthology.org/2022.semeval-1.180/>. doi:10.18653/v1/2022.semeval-1.180.
- [40] D. Samuel, J. Barnes, R. Kurtz, S. Oepen, L. Øvrelid, E. Velldal, Direct parsing to sentiment graphs, in: Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers), Association for Computational Linguistics, Dublin, Ireland, 2022, pp. 470–478. URL: <https://aclanthology.org/2022.acl-short.51/>. doi:10.18653/v1/2022.acl-short.51.
- [41] D. Fernández-González, Structured sentiment analysis as transition-based dependency graph parsing, Artificial Intelligence Review (2026).
- [42] J. Barnes, T. Badia, P. Lambert, MultiBooked: A Corpus of Basque and Catalan Hotel Reviews Annotated for Aspect-level Sentiment Classification, in: Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018), European Language Resources Association (ELRA), Miyazaki, Japan, 2018, pp. 656–660. URL: <https://aclanthology.org/L18-1104/>.
- [43] L. Øvrelid, P. Mæhlum, J. Barnes, E. Velldal, A Fine-grained Sentiment Dataset for Norwegian, in: Proceedings of the Twelfth Language Resources and Evaluation Conference, European Language Resources Association, Marseille, France, 2020, pp. 5025–5033. URL: <https://aclanthology.org/2020.lrec-1.618/>.
- [44] Y. Lin, C. Liang, J. Xu, C. Yang, Y. Wang, ZHIXIAOBAO at SemEval-2022 Task 10: Approaching Structured Sentiment with Graph Parsing, in: Proceedings of the 16th International Workshop on Semantic Evaluation (SemEval-2022), Association for Computational Linguistics, Seattle, United States, 2022, pp. 1343–1348. URL: <https://aclanthology.org/2022.semeval-1.187/>. doi:10.18653/v1/2022.semeval-1.187.
- [45] C. Chen, J. Chen, C. Liu, F. Yang, G. Wan, J. Xia, MT-Speech at SemEval-2022 Task 10: Incorporating Data Augmentation and Auxiliary Task with Cross-Lingual Pretrained Language Model for Structured Sentiment Analysis, in: Proceedings of the 16th International Workshop on Semantic Evaluation (SemEval-2022), Association for Computational Linguistics, Seattle, United States, 2022, pp. 1329–1335. URL: <https://aclanthology.org/2022.semeval-1.185/>. doi:10.18653/v1/2022.semeval-1.185.
- [46] S. Barikbin, SLPL-Sentiment at SemEval-2022 Task 10: Making Use of Pre-Trained Model's Attention Values in Structured Sentiment Analysis, in: Proceedings of the 16th International Workshop on Semantic Evaluation (SemEval-2022), Association for Computational Linguistics, Seattle, United States, 2022, pp. 1382–1388. URL: <https://aclanthology.org/2022.semeval-1.192/>. doi:10.18653/

v1/2022.semeval-1.192.

- [47] Y. Li, S. Zhang, Y. Lin, Y. Lin, L. Chang, Extracting structured sentiment quadruples by labeling boundary token pairs for aspect-based sentiment analysis, *Expert Systems with Applications* (2025) 129017.
- [48] R. A. y Montse Cuadros y Seán Gaines y German Rigau, OpeNER: Open Polarity Enhanced Named Entity Recognition, *Procesamiento del Lenguaje Natural* 51 (2013) 215–218.
- [49] J. Wiebe, T. Wilson, C. Cardie, Annotating expressions of opinions and emotions in language, *Language resources and evaluation* 39 (2005) 165–210.
- [50] C. Toprak, N. Jakob, I. Gurevych, Sentence and Expression Level Annotation of Opinions in User-Generated Discourse, in: *Proceedings of the 48th Annual Meeting of the Association for Computational Linguistics*, Association for Computational Linguistics, Uppsala, Sweden, 2010, pp. 575–584. URL: <https://aclanthology.org/P10-1059/>.
- [51] E. Velldal, L. Øvrelid, E. A. Bergem, C. Stadsnes, S. Touileb, F. Jørgensen, NoReC: The Norwegian Review Corpus, in: *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*, European Language Resources Association (ELRA), Miyazaki, Japan, 2018, pp. 4186–4191. URL: <https://aclanthology.org/L18-1661/>.
- [52] A. Conneau, K. Khandelwal, N. Goyal, V. Chaudhary, G. Wenzek, F. Guzmán, E. Grave, M. Ott, L. Zettlemoyer, V. Stoyanov, Unsupervised cross-lingual representation learning at scale, in: *Proceedings of the 58th annual meeting of the association for computational linguistics*, 2020, pp. 8440–8451.
- [53] I. Alonso-Alonso, D. Vilares, C. Gómez-Rodríguez, LyS_ACoruña at SemEval-2022 task 10: Repurposing off-the-shelf tools for sentiment analysis as semantic dependency parsing, in: *Proceedings of the 16th International Workshop on Semantic Evaluation (SemEval-2022)*, Association for Computational Linguistics, Seattle, United States, 2022, pp. 1389–1400. URL: <https://aclanthology.org/2022.semeval-1.193/>. doi:10.18653/v1/2022.semeval-1.193.
- [54] Q. Zhang, J. Zhou, Q. Chen, Q. Bai, J. Xiao, L. He, ECNU_ICA at SemEval-2022 task 10: A simple and unified model for monolingual and crosslingual structured sentiment analysis, in: *Proceedings of the 16th International Workshop on Semantic Evaluation (SemEval-2022)*, Association for Computational Linguistics, Seattle, United States, 2022, pp. 1336–1342. URL: <https://aclanthology.org/2022.semeval-1.186/>. doi:10.18653/v1/2022.semeval-1.186.



Muhammad Imran is a Marie Skłodowska-Curie Doctoral Fellow in the 3-i ICT Programme at the University of A Coruña, Spain. He joined the Natural Language Processing Group (LyS-Group) at the university of A Coruña in 2023. His research work is focused on Sequence Labelling Parsing for Applied Natural Language Processing. His research interests include Machine Learning and its applications to Natural Language Processing (NLP), particularly Sentiment Analysis, Named Entity Recognition, syntactic parsing (Dependency and Constituency), and graph-based parsing methods. He has an industrial background given his experience (9+ Years) as a Senior Software Engineer in USA-based IT organizations where he contributed to the development of various cutting-edge software applications.



Ana Ezquerro is a PhD Candidate at the Graz University of Technology (TU Graz). She holds a B.Sc. in Data Science and Engineering (2019–2023) and a recently completed M.Sc. in Artificial Intelligence (2023–2025) from University of A Coruña (UDC). Her research has focused on Natural Language Processing (NLP), with particular emphasis on dependency, constituency, and graph parsing; and multimodal learning.



Carlos Gómez-Rodríguez is an Engineer (2005) and PhD in Computer Science (2009) from the Universidade da Coruña (UDC), and is currently a Full Professor in the area of Computer Science and Artificial Intelligence at said institution.

His research focuses on the field of computational linguistics, especially syntactic analysis and opinion mining, having authored more than 150 peer-reviewed publications, including 40 in top-level conferences (Class 1 in the GGS classification) and 39 in JCR-indexed journals. He was the principal investigator of an ERC Starting Grant project and now leads an ERC Proof-of-Concept Grant (SALSA: Syntactic Analysis for Large-Scale Sentiment Analysis), apart from various national and regional-level research projects.

He has supervised 5 completed doctoral theses with another two in progress. In 2022, he received the "María Andresa Casamayor" National Youth Research Award from the Spanish Ministry of Science, the highest recognition at the Spanish level for young researchers in Mathematics and Information and Communication Technologies. He was also recognized in the same year as Honorary Member of the Royal Spanish Mathematical Society.



Anders Søgaard is a Full Professor of NLP and Machine Learning at the University of Copenhagen. He previously worked for University of Potsdam and Google Research. He was awarded many best paper awards at top conferences and several prestigious grants, including ERC Starting Grant, Google Focused Research Award, and Carlsberg Semper Ardens Advanced. He is a Chief Scientist at the Center for AI in Society and leads the Center for Philosophy of AI, both at the University of Copenhagen.



David Vilares is an Assistant Professor in Computer Science and Artificial Intelligence at Universidade da Coruña (UDC). His research lies at the intersection of machine learning and computational linguistics, covering topics such as structured prediction, low-resource languages, and computational social science. In particular, he has contributed both theoretically and practically to compositional methods for understanding language, sequence labeling approaches for the efficient processing of tree- and graph-structured data, and the use of NLP tools to analyze social behavior on social media. His work has been published in 12 JCR-indexed journals and 16 top-tier conferences (Class 1 in the GGS classification), including ACL, EMNLP, and NAACL. He was the principal investigator of two national projects. He has also supervised one doctoral thesis, with two more currently in progress. In 2018, he received the National Research Award for Young Researchers in Computer Science, granted by the Spanish Society of Computer Science and the BBVA Foundation.

A. Appendix

The detailed fine-grained SSA results for each dataset are provided in Tables A1 through A7. Table A8 provides model efficiency in terms of training throughput and inference throughput (tokens/s and sentences/s). All encodings: Absolute (A), Relative (R), Bracketing (B₁–B₃), and 6k-bit (B6₁–B6₃) are compared against the Biaffine (Biaf) graph-based baseline.

Table A1

Fine-grained results on the MultiBooked (Catalan) dataset. **Spans (F₁)** column is the token-level F₁-score for the holder, target and expression; **T.SF₁** is the targeted F₁ score; **UF₁** and **LF₁** are the unlabeled and labeled F₁ scores for dependency graph parsing; and **SF₁** and **NSF₁** are the sentiment F₁ score with or without the sentiment polarity. Each encoding is abbreviated with acronyms: absolute (A), relative (R), bracketing (B) and 6k-bit, using subscripts to denote the value of the hyperparameter *k*. Dash (-) for results not reported in the original paper. Best result highlighted in bold.

		Spans (F ₁)			T.SF ₁	Dep.		Sent.	
		Holder	Target	Exp		UF ₁	LF ₁	NSF ₁	SF ₁
<i>h_{first}</i>	[11]	46.2	74.2	71.0	60.9	-	64.5	-	59.3
	[40] ^{NC}	56.1	69.8	70.5	-	-	-	63.5	61.7
	[40] ^{LE}	60.8	70.8	72.5	-	-	-	64.5	62.1
	[40] ^{OT}	48.0	72.5	68.9	-	-	-	65.7	63.3
	[47]	36.8	-	75.5	73.4	-	-	66.4	63.2
	A	64.0	75.8	74.5	51.7	50.8	49.2	47.0	45.5
	R	60.3	77.7	73.5	60.4	62.2	59.8	52.0	50.4
	B₁	60.9	78.9	74.6	69.8	65.1	63.3	51.0	49.7
	B₂	55.6	79.1	76.8	69.8	66.9	65.1	60.4	59.0
	B₃	50.9	77.2	75.4	67.2	65.2	63.5	56.5	55.2
<i>h_{final}</i>	B6₁	55.7	79.7	75.2	73.0	68.0	66.1	57.7	56.6
	B6₂	60.0	79.9	79.4	72.0	70.8	68.7	69.5	67.8
	B6₃	56.3	79.2	75.8	71.3	70.0	68.3	66.0	64.2
	[5]	43.0	72.5	71.1	55.0	66.8	62.1	62.0	56.8
	[41]	54.1	75.4	71.4	64.0	68.5	64.4	67.0	61.0
	Biaf	55.1	76.6	73.9	39.6	44.3	42.7	39.1	37.4
	A	67.5	74.5	72.8	36.0	44.6	43.3	39.8	38.6
	R	65.1	78.9	72.5	59.2	61.0	58.2	45.1	43.9
	B₁	54.6	77.1	70.5	58.4	67.1	64.6	58.3	56.0
	B₂	58.0	75.4	72.3	62.0	67.7	65.7	66.8	66.0
<i>h_{final}</i>	B₃	67.6	75.4	73.3	58.5	69.0	65.4	62.8	61.4
	B6₁	54.5	79.1	75.4	64.1	68.5	65.7	59.7	58.2
	B6₂	61.1	79.6	76.3	63.6	70.4	67.7	69.8	67.7
	B6₃	56.3	80.2	74.5	67.2	69.3	67.0	67.6	66.3
	[5]	37.1	71.2	67.1	53.9	62.7	58.1	59.7	53.7
	[41]	55.7	73.9	69.6	57.0	65.2	60.2	64.7	59.0
	Biaf	54.5	74.2	71.1	50.8	50.8	49.4	46.6	45.1

Table A2

Fine-grained results on the MultiBooked (Basque) dataset. Same notation as in Table A1.

		Spans (F ₁)			T.SF ₁	Dep.		Sent.	
		Holder	Target	Exp		UF ₁	LF ₁	NSF ₁	SF ₁
<i>h_{first}</i>	[11]	65.8	71.0	76.7	59.6	-	66.1	-	62.7
	[40] ^{NC}	58.9	63.5	73.9	-	-	-	59.8	58.6
	[40] ^{LE}	57.6	64.9	72.5	-	-	-	60.0	58.8
	[40] ^{OT}	64.2	67.4	73.2	-	-	-	62.5	61.3
	[47]	61.4	-	70.0	74.5	-	-	63.8	62.6
	A	70.3	76.3	80.2	57.3	57.9	56.5	46.1	45.0
	R	69.8	75.1	78.3	63.0	62.3	60.1	51.9	50.6
	B₁	67.8	71.3	76.2	62.8	62.7	60.5	48.3	47.6
	B₂	72.1	71.8	80.9	64.5	66.0	64.0	50.4	49.6
	B₃	71.8	74.2	80.9	67.1	66.4	64.2	54.8	52.9
<i>h_{final}</i>	B6₁	69.9	77.7	82.7	71.0	70.7	68.9	57.2	56.8
	B6₂	69.6	76.2	80.2	70.7	69.6	67.5	61.9	60.6
	B6₃	72.2	75.8	80.7	69.2	70.1	68.5	62.1	61.3
	[5]	60.4	64.0	73.9	57.8	64.6	60.0	58.0	54.7
	[41]	67.0	67.7	77.2	59.1	68.2	63.4	63.7	60.2
	Biaf	66.7	70.6	77.4	50.0	48.5	46.8	40.8	39.7
	A	66.1	71.3	77.9	50.2	47.8	46.2	37.9	37.1
	R	73.2	75.2	79.4	62.3	61.5	58.9	50.9	49.6
	B₁	65.5	72.8	74.7	56.6	64.4	62.3	50.7	49.7
	B₂	74.3	70.9	77.8	60.9	67.8	65.7	61.0	59.9
<i>h_{final}</i>	B₃	70.1	69.1	77.8	61.0	66.9	64.4	60.9	59.4
	B6₁	69.8	77.8	82.5	64.5	67.2	64.5	57.8	56.5
	B6₂	71.8	74.4	79.8	66.0	68.0	65.6	63.7	62.6
	B6₃	71.8	76.1	78.9	66.8	66.5	64.3	65.1	63.8
	[5]	60.5	64.0	72.1	56.9	60.8	56.0	58.0	54.7
	[41]	66.6	67.9	76.6	60.5	66.9	61.4	63.8	60.4
	Biaf	71.4	74.4	78.2	55.0	57.0	55.6	44.4	44.0

Table A3

Fine-grained results on the NoReC dataset.

		Spans (F ₁)			T.SF ₁	Dep.		Sent.	
		Holder	Target	Exp		UF ₁	LF ₁	NSF ₁	SF ₁
<i>h_{first}</i>	[11]	63.6	55.3	56.1	31.5	-	40.0	-	32.7
	[40] ^{NC}	60.3	51.8	54.2	-	-	-	42.7	39.3
	[40] ^{LE}	64.0	52.3	56.1	-	-	-	43.7	40.4
	[40] ^{OT}	65.1	58.3	60.7	-	-	-	47.8	41.6
	[47]	62.5	-	61.4	61.3	-	-	46.7	41.9
	A	57.4	60.6	62.3	35.4	29.6	25.9	27.1	25.1
	R	67.2	62.7	63.1	42.6	42.1	37.6	29.6	27.5
	B₁	50.5	58.1	62.3	37.7	40.5	36.6	28.1	24.5
	B₂	50.9	59.3	64.3	44.9	40.8	36.4	32.4	29.3
	B₃	52.0	62.2	64.3	49.6	40.7	36.4	29.5	26.4
<i>h_{final}</i>	B6₁	58.9	60.5	64.5	50.0	45.0	40.2	35.5	32.3
	B6₂	56.9	62.8	54.2	28.4	51.9	50.1	28.8	23.9
	B6₃	57.8	62.5	63.9	52.7	44.9	40.2	40.6	37.6
	[5]	51.1	50.1	54.4	30.5	39.2	31.5	37.0	29.5
	[41]	55.8	53.8	52.0	41.4	39.9	32.8	43.6	35.8
	Biaf	56.0	60.4	59.1	26.0	27.1	24.9	23.4	21.5
	A	59.2	59.2	59.9	24.4	28.1	25.6	22.7	20.5
	R	59.7	57.1	56.4	32.5	45.7	41.14	24.1	22.5
	B₁	55.2	57.9	58.8	32.4	51.7	45.8	30.9	27.9
	B₂	54.5	59.4	61.4	38.9	53.3	48.0	41.3	37.3
<i>h_{final}</i>	B₃	55.6	59.3	62.8	39.4	53.8	47.7	42.0	37.9
	B6₁	67.7	63.7	63.9	47.3	54.9	49.5	40.4	37.0
	B6₂	58.4	63.4	64.7	47.4	56.6	51.4	46.8	42.5
	B6₃	62.8	62.0	66.1	47.5	55.9	50.5	47.4	43.8
	[5]	60.4	54.8	55.5	31.9	48.0	37.7	39.2	31.2
	[41]	57.5	54.3	51.5	36.1	45.0	36.5	44.2	35.8
	Biaf	64.2	61.8	61.3	33.8	30.3	27.3	28.2	26.6

Table A4

Fine-grained results on the Darmstadt Universities dataset.
Same notation as in Table A1.

		Spans (F_1)			T.SF ₁	Dep.		Sent.	
		Holder	Target	Exp.		UF ₁	LF ₁	NSF ₁	SF ₁
h_{first}	[11]	50.0	44.8	43.7	30.7	-	34.9	-	27.4
	[40] ^{NC}	31.4	35.0	35.1	-	-	-	24.8	22.9
	[40] ^{LE}	32.5	38.0	36.2	-	-	-	28.8	27.3
	[40] ^{OT}	42.2	40.6	39.3	-	-	-	33.2	31.2
	[47]	47.0	-	44.7	45.0	-	-	37.8	34.1
	A	52.9	45.9	42.3	24.6	23.3	21.1	16.7	15.3
	R	52.6	46.2	44.3	25.8	24.0	21.3	17.3	16.2
	B₁	37.5	43.8	50.8	36.7	38.2	36.4	29.0	27.8
	B₂	47.2	45.0	48.4	31.5	37.8	35.3	27.6	23.8
	B₃	47.6	45.0	48.4	31.5	37.8	35.3	27.6	23.8
h_{final}	B6₁	47.1	49.0	50.0	40.0	42.1	40.1	37.3	34.8
	B6₂	37.5	47.7	51.3	41.1	42.6	40.4	36.5	34.2
	B6₃	35.3	51.4	53.7	39.6	45.3	42.6	39.2	34.8
	[5]	28.0	39.9	40.3	26.7	35.3	31.4	31.0	25.0
	[41]	40.4	44.3	44.3	32.5	37.3	32.5	35.9	29.9
	Biaf	40.0	33.9	45.6	16.6	26.6	24.9	8.3	8.3
	A	47.4	43.9	40.7	25.6	25.2	23.6	11.4	10.2
	R	47.1	43.7	40.4	25.2	25.0	23.5	11.2	10.0
	B₁	47.1	46.6	45.4	32.3	39.9	36.3	33.2	27.0
	B₂	63.2	44.2	45.2	34.9	39.5	38.2	31.8	30.3
h_{final}	B₃	44.4	48.9	48.5	37.3	43.0	39.4	35.8	33.0
	B6₁	55.6	46.7	48.4	35.6	43.4	39.9	37.4	33.1
	B6₂	33.3	51.8	48.8	37.2	40.5	38.7	35.2	32.8
	B6₃	28.6	45.6	53.0	34.3	45.8	42.7	36.1	32.0
	[5]	37.4	42.1	45.5	29.6	38.1	33.9	34.3	26.5
	[41]	43.2	44.4	43.6	28.7	36.3	30.3	32.7	25.6
	Biaf	37.5	35.3	43.8	18.0	23.4	21.7	9.7	9.7

Table A5

Fine-grained results on the MPQA dataset.

		Spans (F_1)			T.SF ₁	Dep.		Sent.	
		Holder	Target	Exp.		UF ₁	LF ₁	NSF ₁	SF ₁
h_{first}	[11]	47.9	50.7	47.8	33.7	-	37.6	-	20.4
	[40] ^{NC}	58.4	60.3	55.8	-	-	-	38.7	28.3
	[40] ^{LE}	53.6	53.4	53.4	-	-	-	33.8	27.0
	[40] ^{OT}	55.7	64.0	53.5	-	-	-	45.1	34.1
	[47]	46.5	-	51.8	47.6	-	-	29.3	24.1
	A	54.2	59.0	53.3	32.2	23.1	21.6	11.8	9.5
	R	55.5	64.2	45.7	35.9	37.9	36.8	17.9	15.7
	B₁	55.0	61.9	46.1	41.4	40.6	38.9	10.7	9.3
	B₂	57.8	58.1	38.8	41.4	39.1	37.5	11.6	10.1
	B₃	56.9	57.3	49.6	42.6	42.0	40.3	17.9	15.4
h_{final}	B6₁	57.8	62.9	51.9	44.2	49.3	47.3	30.8	26.5
	B6₂	53.7	64.4	50.3	49.1	47.1	45.5	24.9	20.9
	B6₃	57.0	64.2	56.3	50.2	49.1	47.3	23.2	19.3
	[5]	43.8	51.0	48.1	33.5	40.0	36.9	24.5	17.4
	[41]	46.2	49.7	44.7	33.9	40.5	37.6	28.7	22.2
	Biaf	52.2	61.2	52.6	8.2	18.7	17.2	9.1	7.8
	A	56.2	53.6	52.1	9.5	18.0	16.8	11.1	9.8
	R	56.4	61.4	49.4	17.0	38.3	37.0	8.5	8.2
	B₁	54.3	53.0	50.7	20.6	44.4	42.5	22.1	18.6
	B₂	39.4	45.0	37.7	16.7	34.7	33.8	9.9	8.2
h_{final}	B₃	55.7	56.0	56.2	20.5	47.9	45.9	23.4	19.8
	B6₁	60.0	62.5	54.1	28.0	50.8	49.0	32.1	26.8
	B6₂	56.9	62.8	54.2	28.4	51.9	50.1	28.8	23.9
	B6₃	55.6	61.0	54.5	26.0	50.2	47.8	29.9	23.3
	[5]	46.3	49.5	46.0	18.6	41.4	38.0	26.1	18.8
	[41]	43.8	46.4	45.2	18.1	38.0	35.4	25.9	19.7
	Biaf	52.4	55.5	53.0	29.0	25.2	24.0	14.0	12.0

Table A6

Fine-grained results on the OpeNER (English) dataset.

		Spans (F_1)			T.SF ₁	Dep.		Sent.	
		Holder	Target	Exp.		UF ₁	LF ₁	NSF ₁	SF ₁
h_{first}	A	66.2	77.7	76.2	53.0	50.0	49.0	41.8	41.2
	R	70.4	81.9	74.3	69.4	63.4	61.4	53.8	52.5
	B₁	73.1	80.9	75.3	73.8	66.8	65.2	51.7	51.3
	B₂	68.8	82.3	76.9	75.6	68.6	66.7	56.1	55.0
	B₃	65.7	80.8	75.6	75.8	67.4	65.6	54.0	53.0
	B6₁	72.2	81.9	78.4	74.7	68.9	67.2	58.7	57.9
	B6₂	73.1	81.6	78.2	76.2	71.4	69.6	66.0	65.1
	B6₃	69.7	81.2	77.3	74.6	69.8	68.1	65.2	64.0
	Biaf	71.6	76.8	76.2	48.8	46.0	44.9	36.9	35.9
h_{final}	A	65.0	77.0	74.8	48.3	47.9	46.8	37.6	36.6
	R	70.1	80.7	73.8	65.1	61.5	59.4	48.1	47.1
	B₁	56.1	79.2	73.4	70.0	68.8	67.0	58.8	58.0
	B₂	63.5	79.9	77.2	71.4	69.7	67.9	66.3	64.6
	B₃	58.3	78.5	76.3	69.0	69.2	66.8	64.7	63.0
	B6₁	71.1	81.4	78.3	72.6	69.8	67.9	60.8	59.6
	B6₂	61.6	82.0	77.7	74.0	70.0	68.2	67.9	66.6
	B6₃	70.0	80.9	77.9	73.0	70.6	68.5	70.8	69.8
	Biaf	65.7	72.1	73.0	52.5	50.0	48.6	41.9	41.4

Table A7

Fine-grained results on the OpeNER (Spanish) dataset.

		Spans (F_1)			T.SF ₁	Dep.		Sent.	
		Holder	Target	Exp.		UF ₁	LF ₁	NSF ₁	SF ₁
h_{first}	A	68.4	74.7	75.2	48.9	45.8	44.5	39.0	38.5
	R	75.9	79.7	71.3	63.7	58.5	56.4	47.0	45.6
	B₁	67.5	78.1	73.1	68.6	61.8	60.4	49.0	47.9
	B₂	70.6	79.7	77.0	71.5	64.8	62.9	57.7	56.5
	B₃	69.9	79.1	75.2	70.3	64.5	62.9	56.4	55.4
	B6₁	72.9	79.9	76.7	72.0	65.6	63.3	56.7	55.3
	B6₂	70.5	81.1	78.1	73.8	67.1	65.3	64.1	62.6
	B6₃	70.3	80.4	77.8	72.9	66.0	63.8	64.0	62.1
	Biaf	61.11	73.00	74.78	43.8	43.8	42.9	34.1	33.9
h_{final}	A	69.0	76.4	74.2	44.9	44.6	43.3	36.3	35.9
	R	80.5	79.1	70.9	60.1	61.6	58.7	44.1	43.3
	B₁	78.7	78.8	73.0	65.7	69.1	66.5	61.8	60.6
	B₂	75.9	79.9	76.5	67.9	71.0	68.8	66.8	65.4
	B₃	74.4	77.9	76.4	65.2	70.6	67.8	63.7	62.1
	B6₁	73.7	81.0	77.3	69.3	70.3	67.1	62.0	60.4
	B6₂	79.1	81.8	77.6	70.0	71.3	68.7	67.6	66.0
	B6₃	74.4	78.8	76.5	68.7	69.2	66.8	68.7	67.6
	Biaf	56.3	72.4	72.5	48.3	44.4	43.1	39.6	39.0

Table A8

Model efficiency in terms of training and inference throughput (tokens/s, sentences/s)

Encoding	Training		Inference	
	Token/s	Sentences/s	Token/s	Sentences/s
A	3792.25	224.78	4454.28	268.80
R	3818.01	225.91	4491.96	270.72
B₁	3831.82	226.45	4409.86	266.07
B₂	3796.78	224.57	4502.59	271.32
B₃	3828.62	226.31	4486.74	270.80
B6₁	3818.69	225.50	4461.88	269.35
B6₂	3756.26	222.04	4367.45	263.62
B6₃	3784.85	223.77	4378.02	263.75
Biaff	1892.87	111.46	2195.78	122.59