

MAS-OPD: On-Policy Distillation for Multi-Agent Systems

Qiyong Zhong^{1,2*} Mao Zheng^{2*} Mingyang Song^{2*} Houcheng Jiang¹
Jiajie Su³ Huwei Ji³ Li Zhang³ Junfeng Fang^{4†}

¹University of Science and Technology of China ²Foundation Model Department, Tencent
³Zhejiang University ⁴National University of Singapore

{youngzhong365, zhanglizl80}@gmail.com; {sujiajie, jihawei}@zju.edu.cn
{moonzheng, nickmysong}@tencent.com; jianghc@mail.ustc.edu.cn
fangjf@nus.edu.sg

ABSTRACT

Multi-agent systems (MAS) split a task across specialized roles and are promising on complex tasks, yet a prevailing approach relies on inference-time orchestration alone. General-purpose APIs are costly and hard to customize, while small models with role prompts rarely develop stable role competence or reliable collaboration, so post-training a MAS jointly is central. Most attempts use reinforcement learning, whose team-level reward leaves undetermined which step of which agent brought about the outcome, while local rewards need redesigning per task. On-policy distillation (OPD) gives token-level teacher supervision on trajectories the student samples, a denser signal needing no per-role reward, yet is underexplored for the interdependent agents of a MAS. Two difficulties arise: building complementary specialization from a judgement of which role a behavior belongs to while preserving the knowledge all roles need, and turning cross-agent collaborative information into supervision OPD can exploit. We present MAS-OPD, where Role-Advantage Specialization defines the role advantage as the difference between the teacher signals under target and non-target role conditions, and Privileged Attribution for Coordination attributes an interaction conflict to its source and supplies it to the teacher alone as privileged information. Extensive experiments on code and mathematics benchmarks show that MAS-OPD attains the highest mean score at both student scales and leads the agents to develop clearer role specialization and more effective collaborative behavior.

1 INTRODUCTION

Multi-agent systems (MAS) built on large language models split a task across specialized roles collaborating over multiple turns (Wu et al., 2023; Li et al., 2023), and show considerable potential on complex tasks such as code generation, mathematical reasoning and long-horizon planning (Qian et al., 2024; Du et al., 2023; Park et al., 2023). A prevailing approach relies on inference-time orchestration alone (Guo et al., 2024; Cemri et al., 2026). A system built on general-purpose APIs is costly and hard to customize for a domain or protocol (Chen et al., 2025; Ye et al., 2025a), whereas one built from small models and role prompts is cheaper but rarely develops stable role competence or reliable collaboration (Wang et al., 2025a; Belcak et al., 2025). Jointly post-training a MAS for its target task is therefore central to efficient and customizable multi-agent systems.

Most work post-trains a MAS with reinforcement learning by having the agents act together and updating each policy from a team-level reward (Liu et al., 2026b; Liao et al., 2025). A joint trajectory spanning many agents and turns contains many decisions while the environment returns only a single success signal at the end (Shao et al., 2024; Guo et al., 2025). Distributing this scalar over

*Equal contribution.

†Corresponding author.

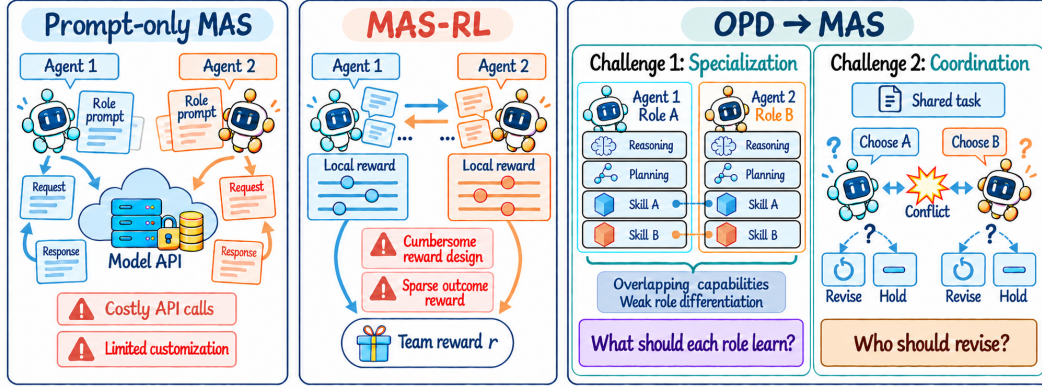


Figure 1: **Motivation of MAS-OPD.** Prompt-only MASs are costly and hard to customize, while MAS-RL suffers from sparse outcome rewards and cumbersome reward design. Extending OPD to MASs raises two challenges: building complementary role specialization while preserving shared knowledge, and turning cross-agent information into supervision for joint decisions and coordination.

all agents and all their outputs leaves undetermined which step of which agent brought about the outcome. Several works alleviate agent-level and turn-level credit assignment by designing local rewards for roles and turns (Zhao et al., 2026b; Feng et al., 2026), yet such feedback still operates at the granularity of a trajectory or a turn and depends on task-specific rules and reward shaping. Whenever the task format, the role responsibilities or the protocol changes, these rewards must be redesigned, which limits how far reinforcement learning transfers across MAS settings.

On-policy distillation (OPD) (Agarwal et al., 2024; Gu et al., 2024; Lu & Lab, 2025) is an appealing alternative for MAS post-training. Rather than optimizing against a scalar reward, OPD samples trajectories from the current student and queries a teacher for token-level supervision on them, so the student learns on the states it visits and receives a denser signal (Yang et al., 2026b; Li et al., 2026b). Extending this to a MAS would let the teacher score every agent’s tokens at every turn and supervise each role directly, without a local reward per role and per turn. Existing OPD research (Song & Zheng, 2026; Zheng et al., 2026; Li et al., 2026a) nevertheless targets a single agent. **How to use OPD to train the multiple interdependent agents of a MAS remains underexplored.** This is not a matter of adding policies, and we highlight two challenges, illustrated in Figure 1:

C1: judging which role a high-quality behavior belongs to and building complementary specialization from that judgement while preserving the knowledge that all roles need. Single-agent OPD transfers the whole capability of the teacher into one student, whereas a MAS must decompose it across agents with distinct responsibilities. A general-purpose teacher holds solving, verification and revision abilities at once, so the supervision it gives one role can cross role boundaries and lead several students to absorb the same generic knowledge. For capacity-limited students this redundancy blurs the division of labour and consumes representational capacity that would otherwise serve role-specific ability (Gudibande et al., 2023; Belcak et al., 2025).

C2: turning cross-agent collaborative information into supervision that OPD can exploit, so that distillation improves joint decision making and collaboration directly. The performance of a MAS depends not only on the individual ability of each agent but also on whether their behaviors stay coordinated across turns (Cemri et al., 2026; Smit et al., 2024). When the outputs of different roles conflict, the agents have to identify the source of that conflict together and settle which of them should revise and which should hold, and improving the local behavior of each agent separately gives no guarantee that such decisions remain consistent at the system level.

We present MAS-OPD, a multi-agent on-policy distillation framework for role specialization and collaborative learning, illustrated in Figure 2. For C1 we propose **Role-Advantage Specialization (RAS)**, which evaluates the same on-policy student token under the target role condition and under a non-target role condition and defines the difference between the two distillation signals as the role advantage. Standard OPD judges whether a behavior is worth learning and the role advantage further judges which role it suits, so role-specific behavior is strengthened and cross-role behavior is suppressed while the ability shared by all roles is preserved. For C2 we propose **Privileged Attribution for Coordination (PAC)**, which uses the reference solutions and verification results

available during training to attribute an interaction conflict to its source and supplies that attribution to the teacher alone as privileged information. The teacher accordingly gives mutually consistent token-level supervision for the on-policy outputs of all agents while every student still sees only the raw environment feedback available at deployment, so the collaborative decision is internalized into the policies themselves. These two designs extend OPD from transferring capability into a single policy to jointly training role division and collaboration. Extensive experiments on code generation and mathematical reasoning benchmarks show that MAS-OPD improves task performance and leads the agents to develop clearer role specialization and more effective collaboration.

2 PRELIMINARIES

2.1 MULTI-AGENT LANGUAGE MODEL SYSTEMS

We consider a multi-agent system of N language model agents, in which agent i takes a predefined role r_i and carries an independent policy π_{θ_i} initialized from the same base model (Ye et al., 2025a; Zhao et al., 2026b).

At interaction turn t , the task description q , the environment feedback e^{t-1} and the interaction history h^t form the role-neutral state shared by all agents,

$$s^t = (q, e^{t-1}, h^t). \quad (1)$$

Agent i instantiates it with its role into an input $x_i^t = P_i(s^t, r_i)$ through a prompt template P_i and generates a response

$$y_i^t = (y_{i,t,1}, \dots, y_{i,t,L_i^t}) \sim \pi_{\theta_i}(\cdot | x_i^t), \quad (2)$$

which is submitted to the environment as a single macro-action (Liao et al., 2025; Feng et al., 2026). The environment returns feedback e^t from the joint output $\mathbf{y}^t = (y_1^t, \dots, y_N^t)$ and updates the interaction history, so a task execution yields

$$\tau = \{(x_i^t, y_i^t)\}_{t=0, i=1}^{T-1, N} \sim \prod_{i=1}^N \pi_{\theta_i}, \quad (3)$$

with T the maximum number of turns. Since the training context of each agent depends on all current policies, τ is a joint on-policy trajectory rather than a concatenation of independent ones.

We focus on a parallel multi-turn workflow of two complementary roles (Wang et al., 2026d; Du et al., 2023): the agents produce their outputs independently and then revise from the disagreement the environment reports, terminating once the two agree or the turn limit is reached.

2.2 ON-POLICY DISTILLATION

On-policy distillation (OPD) transfers teacher knowledge on the states the current student visits (Agarwal et al., 2024; Lu & Lab, 2025): the student policy π_θ samples a response y in a context x , and a frozen teacher π_T force-decodes it without generating a trajectory of its own. Its objective is the reverse KL (Gu et al., 2024), optimized through a surrogate weighted by the token-level advantage (Yang et al., 2026b; Li et al., 2026a)

$$A_k^{\text{OPD}} = \log \pi_T(y_k | x, y_{<k}) - \log \pi_\theta(y_k | x, y_{<k}), \quad (4)$$

namely

$$\mathcal{L}_{\text{OPD}} = -\mathbb{E}_{y \sim \pi_\theta(\cdot | x)} \left[\frac{1}{|\mathcal{I}(y)|} \sum_{k \in \mathcal{I}(y)} \text{sg}(A_k^{\text{OPD}}) \log \pi_\theta(y_k | x, y_{<k}) \right], \quad (5)$$

where $\mathcal{I}(y)$ is the set of token positions generated by the student and $\text{sg}(\cdot)$ denotes the stop-gradient operator. This paradigm targets a single student, whose context the teacher shares.

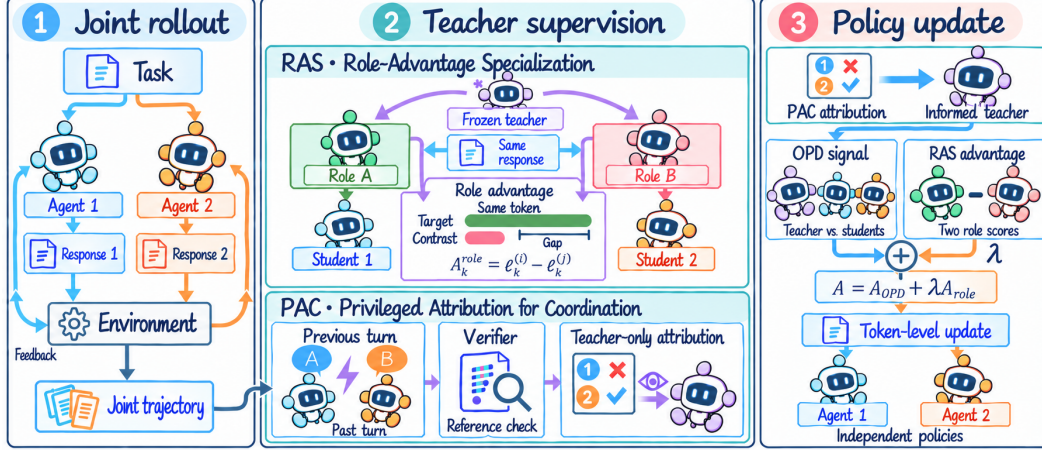


Figure 2: **Overview of MAS-OPD.** MAS-OPD consists of three stages: (1) *joint rollout*, where agents interact with the environment to produce an on-policy joint trajectory; (2) *teacher supervision*, where RAS derives role-specific supervision by contrasting teacher scores across roles and PAC provides teacher-only privileged attribution for coordination; and (3) *policy update*, where the OPD and role-advantage signals are combined into token-level updates of the independent agent policies.

3 METHODOLOGY

3.1 ROLE-CONDITIONED MULTI-AGENT DISTILLATION

We first extend OPD to a multi-agent system, in the three stages drawn in Figure 2. The role policies produce the on-policy joint trajectory τ of Section 2.1, in which every response has a definite generator, so the teacher supervises them one by one and routes the gradient accordingly.

Since the agents carry different responsibilities, the teacher cannot evaluate all outputs under a single identity. The advantage compares the teacher and the student on the same tokens, so the teacher is conditioned to produce the response rather than to judge it and its input is the context of the student itself with the role made explicit:

$$\text{teacher input} = u \oplus r_i, \quad (6)$$

where u is the student input x_i^t with the role condition removed, so it carries the state s^t together with the response format supplied by P_i , while r_i states only that role’s boundary of responsibility.

To lighten the notation we fix the agent i and the interaction turn when discussing a single response below, and keep only the token index k . Under the state u and the role r_i , the teacher scores the token the student actually generated as

$$\ell_k^{(i)}(u) = \log \pi_T(y_k \mid u, r_i, y_{<k}), \quad (7)$$

and the corresponding token-level advantage is

$$A_k^{\text{OPD}}(u) = \ell_k^{(i)}(u) - \log \pi_{\theta_i}(y_k \mid x_i, y_{<k}). \quad (8)$$

The teacher and the student are therefore conditioned on the same state s^t in this form and differ only in that the role is supplied to the teacher as a separable condition, so nothing beyond what the student itself read enters the teacher. The teacher thereby provides dense token-level supervision for every role at every turn, and the roles improve together within the joint interaction.

3.2 ROLE-ADVANTAGE SPECIALIZATION

The role condition acts on where the teacher places its emphasis and does not alter the composition of its abilities, so a general-purpose teacher passes on the abilities of every role in much the same

way whichever role it is conditioned on, and the differentiation the policies acquire is limited to what a change of emphasis can produce. Sharpening it requires the distillation signal itself to carry the role attribution of a behavior.

We observe that the decomposition of Section 3.1 already lets the teacher evaluate the same output under different identities, so this attribution can be characterized by the internal difference between the evaluations of the teacher. Specifically, on the same state, prefix and token, the teacher produces a second evaluation $\ell_k^{(j)}(u)$ under a non-target role r_j , the only difference between the two evaluations being the role the teacher takes. Both carry the same student log-probability, so subtracting one from the other cancels the student term and yields the **role advantage**

$$A_k^{\text{role}}(u) = \ell_k^{(i)}(u) - \ell_k^{(j)}(u). \quad (9)$$

The cancellation of the student term makes this signal entirely determined by the frozen teacher and independent of the current ability of the student, so its value reflects nothing but the judgement of the teacher about role attribution. A positive A_k^{role} means the behavior is favored more along the direction of the current role and should receive additional reinforcement; a value close to zero means it belongs to the knowledge every role needs and it is still transferred as usual; a negative value means it lies closer to the responsibility of the teammate. Combining the two signals, the training signal for token k is

$$A_k^{\text{RAS}}(u) = A_k^{\text{OPD}}(u) + \lambda A_k^{\text{role}}(u), \quad \lambda \geq 0, \quad (10)$$

where λ controls the strength of the differentiation signal and $\lambda = 0$ recovers the form of Section 3.1. The contrasting role is the one whose responsibility the target role is told not to take over, determined in general by Appendix E.1.2. Because the direction of differentiation is determined entirely by the role preference of the teacher, RAS produces an additional update only where the teacher expresses a definite role difference, and leaves tokens the teacher scores alike under both role conditions to the original distillation signal. Where the signal falls within a response is shown token by token in Appendix G.2.

3.3 PRIVILEGED ATTRIBUTION FOR COORDINATION

A multi-agent system corrects itself across turns, and the decisive moment arrives when a conflict appears: the workflow reports the disagreement without indicating where it originates, and each agent has to judge for itself where the error lies and settle whether to revise or to hold its current output. We turn this decision into distillable supervision by providing that criterion to the teacher during training.

We assume a task verifier V is accessible during training, taking the form of any automatic mechanism able to decide the correctness of an output. The verifier only has to locate the output at fault, and never has to be turned into a scalar reward for a role or a turn, a distinction Appendix D.4.3 sets against the reward design the baselines require. PAC uses this verifier to attribute the joint behavior,

$$a^t = V(q, \mathbf{y}^t, e^t), \quad (11)$$

where a^t records how the responsibility for the conflict falls and the evidence supporting that judgement. We render a^t into a structured privileged description c^t stating verifiable facts alone, with no instruction addressed to any particular role, so that either role identity derives its own action from the same facts.

A turn is attributed only once it is complete, so the $c^{t'}$ obtained from $\mathbf{y}^{t'}$ becomes available for turn $t' + 1$ and the teacher context is never contaminated by information determined by the response it is about to score. The history the teacher reads therefore carries the attributions of all completed turns, written $c^{<t} = (c^0, \dots, c^{t-1})$. The context of the teacher in Section 3.1 is thereby reconstructed from the student-visible u into

$$\tilde{u} = u \oplus c^{<t}, \quad (12)$$

which retains the state and the response format that u carries and adds the attributions of the completed turns, while the student still generates its response from the original input x_i^t alone. The set $c^{<t}$ is empty at the initial turn, where no turn has yet been judged, so PAC takes effect from the second turn onward without needing a separate case. The teacher thus reads a history in which every past turn carries a verdict on how the responsibility fell while the student observes the same turns with the verdicts withheld, and the preceding signals are evaluated at $\tilde{u}$, so PAC introduces no new loss term

Table 1: **Overall performance of MAS-OPD on code generation and mathematical reasoning.** We report the mean performance and standard deviation over 5 independent runs, separately seeded training runs for every trained method and repeated evaluations for the three prompt-only baselines. Within each scale, the highest mean in each column is in **bold** and the second highest is underlined.

Method	Code			Math		
	LiveCodeBench	APPS	CodeContests	AIME24	AIME25	OlympiadBench
Teacher Model from the Qwen3-14B Series						
SA	26.86 $\pm$ 1.51	36.28 $\pm$ 1.17	16.73 $\pm$ 1.69	29.33 $\pm$ 3.65	23.33 $\pm$ 4.08	59.11 $\pm$ 0.67
Student Models from the Qwen3-1.7B Series						
SA + ST	16.69 $\pm$ 0.85	16.44 $\pm$ 1.31	3.76 $\pm$ 1.31	7.33 $\pm$ 3.65	1.33 $\pm$ 2.98	17.33 $\pm$ 0.72
SA + MT	12.80 $\pm$ 1.32	10.56 $\pm$ 0.73	1.21 $\pm$ 1.87	2.67 $\pm$ 2.79	0.00 $\pm$ 0.00	12.49 $\pm$ 1.15
SA + ST + GRPO	19.54 $\pm$ 1.02	17.24 $\pm$ 1.09	3.15 $\pm$ 1.08	6.00 $\pm$ 4.35	2.67 $\pm$ 1.49	18.55 $\pm$ 0.53
SA + MT + GRPO	17.71 $\pm$ 1.51	13.32 $\pm$ 0.92	1.70 $\pm$ 2.16	4.00 $\pm$ 1.49	0.67 $\pm$ 1.49	14.27 $\pm$ 0.94
MAS	20.69 $\pm$ 0.75	20.04 $\pm$ 0.55	6.55 $\pm$ 1.57	14.00 $\pm$ 2.79	8.00 $\pm$ 3.80	23.18 $\pm$ 0.42
MAGRPO	21.26 $\pm$ 1.78	19.56 $\pm$ 1.23	6.06 $\pm$ 0.86	16.67 $\pm$ 4.08	9.33 $\pm$ 4.94	22.67 $\pm$ 0.34
MAS + GRPO	22.63 $\pm$ 1.32	21.16 $\pm$ 0.68	8.24 $\pm$ 1.69	17.33 $\pm$ 3.65	<u>13.33</u> $\pm$ 2.36	25.40 $\pm$ 0.81
CURE	17.03 $\pm$ 1.91	15.32 $\pm$ 0.46	3.39 $\pm$ 1.40	—	—	—
MARFT	<u>23.66</u> $\pm$ 0.96	<u>22.32</u> $\pm$ 0.82	8.00 $\pm$ 1.98	<u>19.33</u> $\pm$ 4.94	12.67 $\pm$ 3.65	<u>27.09</u> $\pm$ 0.62
MAS-OPD	27.77 $\pm$ 0.96	26.00 $\pm$ 0.75	11.52 $\pm$ 1.13	21.33 $\pm$ 1.83	14.00 $\pm$ 1.49	30.42 $\pm$ 0.55
Student Models from the Qwen3-4B Series						
SA + ST	20.11 $\pm$ 1.10	28.96 $\pm$ 0.74	11.15 $\pm$ 1.33	19.33 $\pm$ 2.79	18.00 $\pm$ 5.06	47.21 $\pm$ 0.68
SA + MT	16.23 $\pm$ 0.77	19.52 $\pm$ 1.12	4.97 $\pm$ 0.90	12.67 $\pm$ 4.35	13.33 $\pm$ 2.36	40.95 $\pm$ 0.91
SA + ST + GRPO	23.31 $\pm$ 1.42	34.84 $\pm$ 0.62	9.82 $\pm$ 1.63	22.67 $\pm$ 1.49	22.00 $\pm$ 3.80	49.02 $\pm$ 0.48
SA + MT + GRPO	21.60 $\pm$ 0.94	30.04 $\pm$ 0.96	8.48 $\pm$ 2.10	20.00 $\pm$ 4.08	19.33 $\pm$ 1.49	45.96 $\pm$ 1.08
MAS	24.57 $\pm$ 1.67	33.56 $\pm$ 1.27	13.94 $\pm$ 0.74	25.33 $\pm$ 2.98	24.67 $\pm$ 4.47	53.06 $\pm$ 0.59
MAGRPO	25.37 $\pm$ 1.25	34.96 $\pm$ 0.52	14.67 $\pm$ 1.17	31.33 $\pm$ 3.80	27.33 $\pm$ 2.79	54.36 $\pm$ 0.77
MAS + GRPO	28.23 $\pm$ 1.96	37.88 $\pm$ 0.88	<u>17.82</u> $\pm$ 1.85	30.67 $\pm$ 4.94	<u>34.00</u> $\pm$ 3.65	57.30 $\pm$ 0.35
CURE	27.09 $\pm$ 0.87	37.00 $\pm$ 1.36	16.36 $\pm$ 1.29	—	—	—
MARFT	27.77 $\pm$ 1.54	<u>39.04</u> $\pm$ 1.04	17.09 $\pm$ 1.00	<u>32.67</u> $\pm$ 3.65	32.00 $\pm$ 1.83	<u>58.52</u> $\pm$ 1.13
MAS-OPD	32.11 $\pm$ 0.94	41.72 $\pm$ 0.69	20.00 $\pm$ 1.29	33.33 $\pm$ 2.36	36.67 $\pm$ 2.36	60.24 $\pm$ 0.50

and instead changes the values of the same signals by reconstructing the teacher context. Reducing the corresponding loss therefore requires the student to reproduce from that raw feedback alone the behavior the teacher produces with the attribution in hand, which is the pressure that drives the attribution judgement and the coordination policy it implies into the policy itself, and Section 4.4 measures how far the trained students reach that judgement once the verifier is gone. The verifier and the privileged description are removed after training, and the roles remain able to reach mutually compatible decisions from their own observations, as traced turn by turn in Appendix G.

3.4 JOINT TRAINING OBJECTIVE

The teacher occupies the context $\tilde{u}$ of Eq. (12) at every turn, the initial one included, where the set of attributions it carries is still empty, and evaluates the same student response under the target role and under a non-target role to yield the token-level signal $A_{i,t,k}^{\text{RAS}}(\tilde{u})$, which drives the update of the student policies:

$$\mathcal{L}_{\text{MAS-OPD}} = -\frac{1}{N} \sum_{i=1}^N \frac{1}{|\mathcal{T}_i|} \sum_{t \in \mathcal{T}_i} \frac{1}{L_i^t} \sum_{k=1}^{L_i^t} \text{sg}(A_{i,t,k}^{\text{RAS}}(\tilde{u})) \log \pi_{\theta_i}(y_{i,t,k} \mid x_i^t, y_{i,t,<k}), \quad (13)$$

where $\mathcal{T}_i$ is the set of effective interaction turns of role i .

We take an unweighted average over tokens within a response, over turns within a role and over roles within the system, so that longer responses or trajectories do not dominate it. The gradient of role i updates θ_i only, and the policies update synchronously once a batch of joint rollouts completes.

RAS and PAC are accordingly not two separate loss terms but act on the two sides of the interface established in Section 3.1: PAC reconstructs the context $\tilde{u}$ occupied by the teacher through $c^{<t}$, and RAS varies the role condition of the teacher in that context and adds $\lambda A_{i,t,k}^{\text{role}}$, with both feeding into the same token-level advantage and the whole framework introducing a single core hyperparameter λ .

Relative to Section 3.1, the additional cost is one teacher force decoding under the non-target role per student response, and Appendix C sets out the order of a training step.

4 EXPERIMENT

4.1 EXPERIMENTAL SETUP

Datasets & Benchmarks. The code domain trains on CodeContests (Li et al., 2022) and the mathematics domain on Polaris-Dataset-53K (An et al., 2025), both described in Appendix D.1, and we evaluate on six benchmarks described one by one in Appendix D.2. *Code generation*: (1) LiveCodeBench-v6 (Jain et al., 2025), (2) APPS (Hendrycks et al., 2021) and (3) CodeContests (Li et al., 2022), evaluated on the test split held out from the training corpus of the same name. *Mathematical reasoning*: (4) AIME 2024, (5) AIME 2025 and (6) OlympiadBench (He et al., 2024).

Experiment & Evaluation Setups. All models are from the Qwen3 series (Team, 2025): the teacher is Qwen3-14B and the students are Qwen3-1.7B and Qwen3-4B, and an experiment reports the 1.7B student unless stated otherwise. We report Pass@1 for code generation and accuracy for mathematical reasoning, and Appendix D.5 gives the use of the teacher, the inference mode, the decoding settings and the interaction horizon T of Section 2.1.

Baselines & Implementation Details. *Single-agent baselines*: (1) SA + ST, (2) SA + MT, (3) SA + ST + GRPO and (4) SA + MT + GRPO. *Multi-agent baselines*: (5) MAS, (6) MAGRPO (Liu et al., 2026b), (7) MAS + GRPO, (8) CURE (Wang et al., 2026d) and (9) MARFT (Liao et al., 2025), of which CURE is reported on the code domain alone. Appendix D.3 describes the nine one by one and Appendix D.6 gives the implementation details.

4.2 OVERALL PERFORMANCE

Table 1 reports code generation and mathematical reasoning results for two student scales against single-agent and multi-agent baselines, where SA + ST denotes a single agent answering in one turn and SA + MT a single agent revising its own output across turns.

- **Obs 1: MAS-OPD attains the highest mean score on every benchmark at both student scales.** It improves on the strongest baseline of each column by more than two points on average, and remains the top-performing method from 1.7B to 4B, over which the gain on the untrained MAS falls from more than forty percent to close to thirty in relative terms while growing in absolute ones, the smaller student having the most to gain from supervision that separates role-specific behavior from shared ability. The 4B system moreover exceeds the 14B teacher on all six benchmarks, which is possible because the teacher is queried as a single agent whereas the students are trained as a collaborating pair, so the distilled system exploits an interaction the teacher never performs.
- **Obs 2: the gain tracks cross-agent interaction rather than additional turns.** Letting one agent revise its own output is consistently harmful, since SA + MT falls below SA + ST on every benchmark at both scales and the ordering survives GRPO training. In the two workflows we run, extra turns help only when shared between two roles, as the prompt-only MAS improves on the prompt-only single agent on every benchmark without any training.
- **Obs 3: outcome-reward training improves a multi-agent system unevenly and with a wide run-to-run spread.** MAGRPO falls below the untrained MAS on three of the six benchmarks at 1.7B while improving on the remaining three, and the reinforcement learning baselines reach standard deviations near five points on the AIME benchmarks, whose thirty problems make each one worth 3.3 points. MAS-OPD improves on the untrained MAS in all twelve cells and gives the smallest spread among the multi-agent methods on AIME24 at both scales, which is consistent with replacing that scalar signal with dense per-token targets.

4.3 ROLE SPECIALIZATION

- **Obs 4: both modules contribute and neither substitutes for the other.** Removing either module costs accuracy on all six benchmarks in Table 2, so the two accumulate rather than stand in for one

Table 2: **Contribution of the two modules.** Accuracy of the 1.7B student when each module is removed from MAS-OPD, with every other setting as in Appendix D.6.1. Removing the role advantage sets $\lambda = 0$; removing privileged attribution restores the student-visible context.

Method	Code			Math		
	LiveCodeBench	APPS	CodeContests	AIME24	AIME25	OlympiadBench
MAS-OPD	27.77 $\pm$ 0.96	26.00 $\pm$ 0.75	11.52 $\pm$ 1.13	21.33 $\pm$ 1.83	14.00 $\pm$ 1.49	30.42 $\pm$ 0.55
w/o RAS	26.51 $\pm$ 1.18	23.92 $\pm$ 0.61	9.33 $\pm$ 0.92	20.00 $\pm$ 2.36	13.33 $\pm$ 2.36	29.67 $\pm$ 0.41
w/o PAC	25.94 $\pm$ 1.04	25.00 $\pm$ 0.63	10.55 $\pm$ 0.69	18.67 $\pm$ 1.83	12.00 $\pm$ 1.83	28.69 $\pm$ 0.45

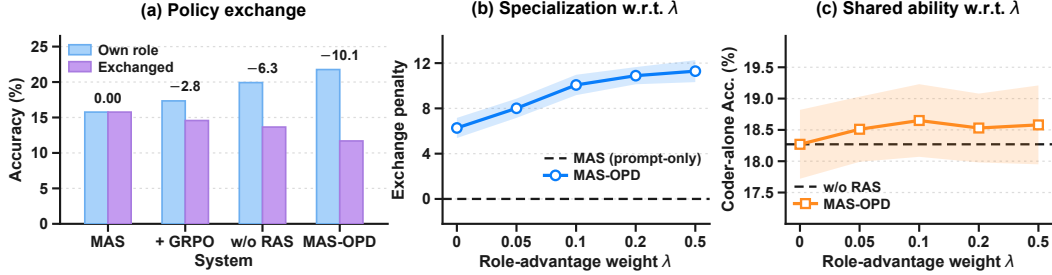


Figure 3: **Role specialization of MAS-OPD and its dependence on the role-advantage weight λ .** All three report the 1.7B student on the three code benchmarks, with the Coder and the Tester as the two roles. The figure has three parts: (a) *policy exchange*, giving the accuracy of four systems under their own and exchanged assignments, annotated with the loss; (b) *specialization w.r.t. λ* , tracking that loss as λ varies; and (c) *Coder-alone accuracy*, under the single-agent single-turn protocol of Table 1. Here w/o RAS is MAS-OPD with $\lambda = 0$, and shaded bands give the standard deviation over five runs.

another, as expected of modules acting on the two sides of the single interface of Section 3.1. The load is divided rather than shared: the role advantage accounts for the larger part of the gap on code and privileged attribution for the larger part on mathematics, as two modules addressing different failures would produce, and Section 4.4 reads the same table for its own purposes.

- **Obs 5: the trained policies are not interchangeable, and they are already so before the role-advantage term is applied.** Every trained system in panel (a) of Figure 3 loses accuracy when the two policies are exchanged, while the prompt-only system loses nothing, which rules out the reading that the penalty is an artifact of each role receiving a prompt written for the other. Removing the role advantage leaves a system that still gives up much of its accuracy under exchange, its role conditioning already giving the teacher a role-dependent target, and MAS-OPD gives up more still while reaching the highest own-role accuracy of the four systems.
- **Obs 6: specialization grows with the weight on the role advantage, saturates beyond the reported setting, and leaves the Coder’s own accuracy unchanged.** Panel (b) shows the exchange penalty growing with λ from the non-zero value already present at $\lambda = 0$, and the growth is concentrated in the lower part of the range: the penalty gains 3.80 points up to the reported setting and a further 1.22 over the fourfold increase beyond it. Over that same range panel (c) keeps the Coder’s own accuracy within the run-to-run standard deviation of the $\lambda = 0$ reference. Since λ multiplies nothing but the difference between the two teacher evaluations of the same response, that difference drives the separation rather than a property accompanying training. The role advantage vanishes wherever the teacher evaluates a token alike under both role conditions, leaving the tokens carrying shared competence as the module would leave them (Section 3.2).

4.4 PRIVILEGED ATTRIBUTION

- **Obs 7: the students resolve conflicts in the direction their own correctness warrants.** Panel (a) of Figure 4 shows MAS-OPD settling a larger share of conflicts correctly than the same method without privileged attribution, and both roles improve alike. The two systems differ only in whether the teacher reads the privileged context, and neither is evaluated with the verifier, so the judgement the teacher had during training is one the students reach on their own afterwards.

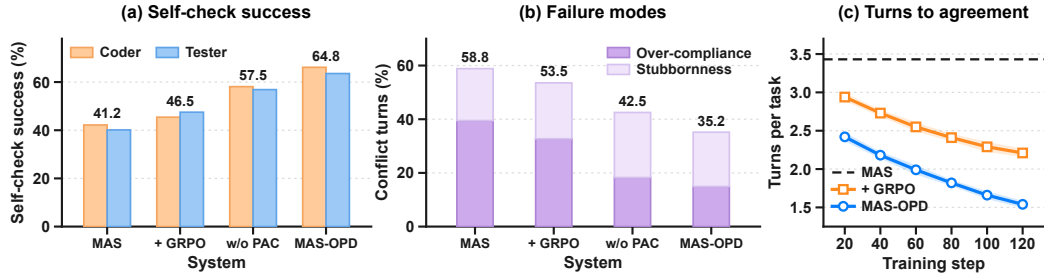


Figure 4: **Internalization of the attribution judgement and its effect on how quickly the roles agree.** All three report the 1.7B student on the three code benchmarks. The first two consider the turns in which the two roles disagree, (a) *self-check success* giving the share in which a role revises exactly when its own output is wrong and (b) *failure modes* the remainder, while (c) *turns to agreement* tracks the turns a task consumes. No model sees the attribution at evaluation, w/o PAC restores the student-visible context of Section 3.1, and bands give the standard deviation over five runs.

- **Obs 8: what training leaves behind is the opposite failure, and privileged attribution is what removes it.** Panel (b) splits the conflicts each system mishandles into revising an output that was already correct and keeping one that was not. Deference dominates before distillation and falls to less than half of its prompt-only level in the distilled systems, but the residue that survives runs the other way, and w/o PAC keeps an incorrect output more often than any other system in the figure. Deciding whether to hold or to give way requires knowing which side erred, and MAS-OPD lowers that residue by the larger of its two reductions while lowering the other as well, so the module does not make the roles more compliant or more persistent but improves when they should be either. This underlies Table 2: the role advantage and privileged attribution address different failures, which is why removing one is not compensated by the other.
- **Obs 9: the roles reach agreement in fewer turns as training proceeds.** Panel (c) shows the number of turns a task consumes falling over training for both trained systems and falling further for MAS-OPD at every checkpoint, ending well short of the four turns the workflow allows, with the reductions growing smaller as training continues. Since a task ends once the two roles agree, this is the trajectory-level counterpart of what panels (a) and (b) report turn by turn, and those two are what establish that the agreements reached are also better ones rather than merely earlier: roles that judge the source of a disagreement correctly spend fewer exchanges settling it.

Further experiments. Three further studies are reported in the appendix. Replicating both role types symmetrically to build systems of up to eight agents raises the average accuracy of both domains at every step, with no sign of saturation, and the construction that lets both modules operate unchanged as agents are added is given in Appendix E.1. Sweeping the role-advantage weight λ over a factor of four leaves accuracy stable, while removing the role advantage or raising the weight far above the reported setting both cost accuracy, as Appendix E.2 shows. Appendix D.6.4 reports the measured per-step wall-clock cost of training, separated into the joint rollout and the update.

5 RELATED WORK

We outline the two lines of work this paper builds on and give the full discussion, with the complete set of references, in Appendix B.

RL Training for MAS. Multi-agent systems of language models are assembled at inference time (Wu et al., 2023), and surveys report the effort stays there rather than in training (Cemri et al., 2026). Reinforcement learning is the standard alternative (Shao et al., 2024), and its multi-agent extensions restrict the interaction or port single-agent algorithms (Wang et al., 2026d; Liu et al., 2026b), rewarding a trajectory or a turn and leaving the decisions inside without a target.

On-Policy Distillation. On-policy distillation supervises the trajectories a student itself produces, removing the mismatch between a fixed corpus and the states it visits (Gu et al., 2024; Agarwal et al., 2024), and later work reads its objective as reinforcement learning with teacher-supplied per-token

rewards (Li et al., 2026b). It has been extended to teacher-free settings and used in place of a scalar reward (Zhao et al., 2026a; Zhong et al., 2026), yet always for one student, so neither attributing behavior to a role nor supervising a decision that depends on a teammate arises.

6 CONCLUSION

We studied how to post-train a multi-agent system with on-policy distillation, which had been formulated for a single agent. MAS-OPD adds the role advantage, which keeps only what distinguishes a target from a non-target role condition, and privileged attribution, which resolves an interaction conflict with training-only information given to the teacher alone. It attains the highest mean score on every benchmark at both student scales, and its agents specialize more sharply and collaborate more effectively than a prompt-only system.

REFERENCES

- Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos Garea, Matthieu Geist, and Olivier Bachem. On-policy distillation of language models: Learning from self-generated mistakes. In *International Conference on Learning Representations*, volume 2024, pp. 21246–21263, 2024.
- Chenxin An, Zhihui Xie, Xiaonan Li, Lei Li, Jun Zhang, Shansan Gong, Ming Zhong, Jingjing Xu, Xipeng Qiu, Mingxuan Wang, et al. Polaris: A post-training recipe for scaling reinforcement learning on advanced reasoning models, 2025. URL <https://hkunlp.github.io/blog/2025/Polaris>, 2, 2025.
- Peter Belcak, Greg Heinrich, Shizhe Diao, Yonggan Fu, Xin Dong, Saurav Muralidharan, Yingyan Celine Lin, and Pavlo Molchanov. Small language models are the future of agentic ai. *arXiv preprint arXiv:2506.02153*, 2025.
- Walid Bousselham, Hilde Kuehne, and Cordelia Schmid. Vold: Reasoning transfer from llms to vision-language models via on-policy distillation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 26209–26218, 2026.
- Mert Cemri, Melissa Z Pan, Shuyi Yang, Lakshya A Agrawal, Bhavya Chopra, Rishabh Tiwari, Kurt Keutzer, Aditya Parameswaran, Dan Klein, Kannan Ramchandran, et al. Why do multi-agent llm systems fail? *Advances in Neural Information Processing Systems*, 38, 2026.
- Guanzhong Chen, Shaoxiong Yang, Chao Li, Wei Liu, Jian Luan, and Zenglin Xu. End-to-end optimization of llm-driven multi-agent search systems via heterogeneous-group-based reinforcement learning. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 30319–30338, 2026a.
- Weize Chen, Ziming You, Ran Li, Chen Qian, Chenyang Zhao, Cheng Yang, Ruobing Xie, Zhiyuan Liu, Maosong Sun, et al. Internet of agents: Weaving a web of heterogeneous agents for collaborative intelligence. In *International Conference on Learning Representations*, volume 2025, pp. 36374–36411, 2025.
- Xiwen Chen, Jingjing Wang, Wenhui Zhu, Peijie Qiu, Xuanzhao Dong, Yueyue Deng, Hejian Sang, Zhipeng Wang, Alborz Geramifard, and Feng Luo. Soda: Semi on-policy black-box distillation for large language models. *arXiv preprint arXiv:2604.03873*, 2026b.
- Yilun Du, Shuang Li, Antonio Torralba, Joshua B. Tenenbaum, and Igor Mordatch. Improving factuality and reasoning in language models through multiagent debate. *arXiv preprint arXiv:2305.14325*, 2023. URL <https://arxiv.org/abs/2305.14325>.
- Lang Feng, Zhenghai Xue, Tingcong Liu, and Bo An. Group-in-group policy optimization for llm agent training. *Advances in Neural Information Processing Systems*, 38:46375–46408, 2026.
- Wei Fu, Jiaxuan Gao, Xujie Shen, Chen Zhu, Zhiyu Mei, Chuyi He, Shusheng Xu, Guo Wei, Jun Mei, Jiashu Wang, Tongkai Yang, Binhang Yuan, and Yi Wu. AReal: A large-scale asynchronous reinforcement learning system for language reasoning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. URL <https://arxiv.org/abs/2505.24298>.

- Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. Minillm: Knowledge distillation of large language models. In *International Conference on Learning Representations*, volume 2024, pp. 32694–32717, 2024.
- Arnav Gudibande, Eric Wallace, Charlie Snell, Xinyang Geng, Hao Liu, Pieter Abbeel, Sergey Levine, and Dawn Song. The false promise of imitating proprietary llms. *arXiv preprint arXiv:2305.15717*, 2023.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Qihao Zhu, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025. URL <https://arxiv.org/abs/2501.12948>.
- Taicheng Guo, Xiuying Chen, Yaqi Wang, Ruidi Chang, Shichao Pei, Nitesh V Chawla, Olaf Wiest, and Xiangliang Zhang. Large language model based multi-agents: A survey of progress and challenges. *arXiv preprint arXiv:2402.01680*, 2024.
- Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Thai, Junhao Shen, Jinyi Hu, Xu Han, Yujie Huang, Yuxiang Zhang, et al. Olympiadbench: A challenging benchmark for promoting agi with olympiad-level bilingual multimodal scientific problems. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 3828–3850, 2024.
- Yinghui He, Simran Kaur, Adithya Bhaskar, Yongjin Yang, Jiarui Liu, Narutatsu Ri, Liam Fowl, Abhishek Panigrahi, Danqi Chen, and Sanjeev Arora. Self-distillation zero: Self-revision turns binary rewards into dense supervision. *arXiv preprint arXiv:2604.12002*, 2026.
- Dan Hendrycks, Steven Basart, Saurav Kadavath, Mantas Mazeika, Akul Arora, Ethan Guo, Collin Burns, Samir Puranik, Horace He, Dawn Song, et al. Measuring coding challenge competence with apps. *arXiv preprint arXiv:2105.09938*, 2021.
- Sirui Hong, Mingchen Zhuge, Jonathan Chen, Xiawu Zheng, Yuheng Cheng, Jinlin Wang, Ceyao Zhang, Steven Yau, Zijuan Lin, Liyang Zhou, et al. Metagpt: Meta programming for a multi-agent collaborative framework. In *International Conference on Learning Representations*, volume 2024, pp. 23247–23275, 2024.
- Lanxiang Hu, Mingjia Huo, Yuxuan Zhang, Haoyang Yu, Eric P Xing, Ion Stoica, Tajana Rosing, Haojian Jin, and Hao Zhang. Igame-bench: How good are llms at playing games? In *International Conference on Learning Representations*, volume 2026, pp. 81308–81356, 2026.
- Jonas Hübner, Frederike Lübeck, Lejs Behric, Anton Baumann, Marco Bagatella, Daniel Marta, Ido Hakimi, Idan Shenfeld, Thomas Kleine Buening, Carlos Guestrin, et al. Reinforcement learning via self-distillation. *arXiv preprint arXiv:2601.20802*, 2026.
- Naman Jain, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. Livecodebench: Holistic and contamination free evaluation of large language models for code. In *International Conference on Learning Representations*, volume 2025, pp. 58791–58831, 2025.
- Gengsheng Li, Tianyu Yang, Junfeng Fang, Mingyang Song, Mao Zheng, Haiyun Guo, Dan Zhang, Jinqiao Wang, and Tat-Seng Chua. Unifying group-relative and self-distillation policy optimization via sample routing. *arXiv preprint arXiv:2604.02288*, 2026a.
- Guohao Li, Hasan Abed Al Kader Hammoud, Hani Itani, Dmitrii Khizbullin, and Bernard Ghanem. Camel: Communicative agents for "mind" exploration of large language model society. *arXiv preprint arXiv:2303.17760*, 2023.
- Yaxuan Li, Yuxin Zuo, Bingxiang He, Jinqian Zhang, Chaojun Xiao, Cheng Qian, Tianyu Yu, Huan-gao Gao, Wenkai Yang, Zhiyuan Liu, et al. Rethinking on-policy distillation of large language models: Phenomenology, mechanism, and recipe. *arXiv preprint arXiv:2604.13016*, 2026b.
- Yujia Li, David Choi, Junyoung Chung, Nate Kushman, Julian Schrittwieser, Rémi Leblond, Tom Eccles, James Keeling, Felix Gimeno, Agustin Dal Lago, et al. Competition-level code generation with alphacode. *Science*, 378(6624):1092–1097, 2022.

- Junwei Liao, Muning Wen, Jun Wang, and Weinan Zhang. Marft: Multi-agent reinforcement fine-tuning. *arXiv preprint arXiv:2504.16129*, 2025.
- Bo Liu, Simon Yu, Zichen Liu, Leon Guertler, Penghui Qi, Daniel Balcells, Mickel Liu, Cheston Tan, Weiyan Shi, Min Lin, et al. Spiral: Self-play on zero-sum games incentivizes reasoning via multi-agent multi-turn reinforcement learning. In *International Conference on Learning Representations*, volume 2026, pp. 35407–35434, 2026a.
- Shuo Liu, Zeyu Liang, Xueguang Lyu, and Christopher Amato. Llm collaboration with multi-agent reinforcement learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pp. 32150–32158, 2026b.
- Kevin Lu and Thinking Machines Lab. On-policy distillation. *Thinking Machines Lab: Connectionism*, 2025. doi: 10.64434/tml.20251026. <https://thinkingmachines.ai/blog/on-policy-distillation>.
- Michael Luo, Sijun Tan, Justin Wong, Xiaoxiang Shi, William Y. Tang, Manan Roongta, Colin Cai, Jeffrey Luo, Li Erran Li, Raluca Ada Popa, and Ion Stoica. DeepScaleR: Surpassing o1-preview with a 1.5b model by scaling rl. Notion Blog, 2025.
- Hao Ma, Tianyi Hu, Zhiqiang Pu, Boyin Liu, Xiaolin Ai, Yanyan Liang, and Min Chen. Coevolving with the other you: Fine-tuning llm with sequential cooperative multi-agent reinforcement learning. *Advances in Neural Information Processing Systems*, 37:15497–15525, 2024.
- Chanwoo Park, Seungju Han, Xingzhi Guo, Asuman E Ozdaglar, Kaiqing Zhang, and Joo-Kyung Kim. Maporl: Multi-agent post-co-training for collaborative large language models with reinforcement learning. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 30215–30248, 2025.
- Joon Sung Park, Joseph C. O’Brien, Carrie J. Cai, Meredith Ringel Morris, Percy Liang, and Michael S. Bernstein. Generative agents: Interactive simulacra of human behavior. In *CHI*, 2023. URL <https://arxiv.org/abs/2304.03442>.
- Emiliano Penalosa, Dheeraj Vattikonda, Nicolas Gontier, Alexandre Lacoste, Laurent Charlin, and Massimo Caccia. Privileged information distillation for language models. *arXiv preprint arXiv:2602.04942*, 2026.
- Chen Qian, Wei Liu, Hongzhang Liu, Nuo Chen, Yufan Dang, Jiahao Li, Cheng Yang, Weize Chen, Yusheng Su, Xin Cong, Juyuan Xu, Dahai Li, Zhiyuan Liu, and Maosong Sun. Chatdev: Communicative agents for software development. In *ACL 2024*, 2024.
- Cheng Qian, Emre Can Acikgoz, Qi He, Hongru Wang, Xiusi Chen, Dilek Hakkani-Tur, Gokhan Tur, and Heng Ji. Toolrl: Reward is all tool learning needs. *Advances in Neural Information Processing Systems*, 38:105523–105553, 2026.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Yang Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Idan Shenfeld, Mehul Damani, Jonas Hübner, and Pulkit Agrawal. Self-distillation enables continual learning. *arXiv preprint arXiv:2601.19897*, 2026.
- Andries Petrus Smit, Nathan Grinsztajn, Paul Duckworth, Thomas D Barrett, and Arnu Pretorius. Should we be going mad? a look at multi-agent debate strategies for llms. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 45883–45905. PMLR, 2024. URL <https://proceedings.mlr.press/v235/smit24a.html>.
- Mingyang Song and Mao Zheng. A survey of on-policy distillation for large language models. *arXiv preprint arXiv:2604.00626*, 2026.
- Qwen Team. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.

- Hao Wang, Guozhi Wang, Han Xiao, Yufeng Zhou, Yue Pan, Jichao Wang, Ke Xu, Yafei Wen, Xiaohu Ruan, Xiaoxin Chen, et al. Skill-sd: Skill-conditioned self-distillation for multi-turn llm agents. *arXiv preprint arXiv:2604.10674*, 2026a.
- Jianze Wang, Ying Liu, Jinlong Chen, Xuchun Hu, Qilong Zhang, Yu Cao, Jun Wang, Hua Yang, Yong Xie, and Qianglong Chen. Mad-opd: Breaking the ceiling in on-policy distillation via multi-agent debate. *arXiv preprint arXiv:2605.01347*, 2026b.
- Junlin Wang, Jue Wang, Ben Athiwaratkun, Ce Zhang, and James Y Zou. Mixture-of-agents enhances large language model capabilities. In *International Conference on Learning Representations*, volume 2025, pp. 33944–33963, 2025a.
- Yinjie Wang, Xuyang Chen, Xiaolong Jin, Mengdi Wang, and Ling Yang. Openclaw-rl: Train any agent simply by talking. *arXiv preprint arXiv:2603.10165*, 2026c.
- Yinjie Wang, Ling Yang, Ye Tian, Ke Shen, and Mengdi Wang. Co-evolving llm coder and unit tester via reinforcement learning. *Advances in Neural Information Processing Systems*, 38:143630–143664, 2026d.
- Zihan Wang, Kangrui Wang, Qineng Wang, Pingyue Zhang, Linjie Li, Zhengyuan Yang, Xing Jin, Kefan Yu, Minh Nhat Nguyen, Licheng Liu, et al. Ragen: Understanding self-evolution in llm agents via multi-turn reinforcement learning. *arXiv preprint arXiv:2504.20073*, 2025b.
- Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, et al. Autogen: Enabling next-gen llm applications via multi-agent conversation. *arXiv preprint arXiv:2308.08155*, 2023.
- Yuanda Xu, Hejian Sang, Zhengze Zhou, Ran He, Zhipeng Wang, and Alborz Geramifard. Tip: Token importance in on-policy distillation. *arXiv preprint arXiv:2604.14084*, 2026.
- Chenxu Yang, Chuanyu Qin, Qingyi Si, Minghui Chen, Naibin Gu, Dingyu Yao, Zheng Lin, Weiping Wang, Jiaqi Wang, and Nan Duan. Self-distilled rlvr. *arXiv preprint arXiv:2604.03128*, 2026a.
- Wenkai Yang, Weijie Liu, Ruobing Xie, Kai Yang, Saiyong Yang, and Yankai Lin. Learning beyond teacher: Generalized on-policy distillation with reward extrapolation. *arXiv preprint arXiv:2602.12125*, 2026b.
- Rui Ye, Xiangrui Liu, Qimin Wu, Xianghe Pang, Zhenfei Yin, Lei Bai, and Siheng Chen. X-mas: Towards building multi-agent systems with heterogeneous llms. *arXiv preprint arXiv:2505.16997*, 2025a.
- Tianzhu Ye, Li Dong, Zewen Chi, Xun Wu, Shaohan Huang, and Furu Wei. Black-box on-policy distillation of large language models. *arXiv preprint arXiv:2511.10643*, 2025b.
- Tianzhu Ye, Li Dong, Xun Wu, Shaohan Huang, and Furu Wei. On-policy context distillation for language models. *arXiv preprint arXiv:2602.12275*, 2026.
- Kaiyan Zhang, Kai Tian, Runze Liu, Sihang Zeng, Xuekai Zhu, Guoli Jia, Yuchen Fan, Xingtai Lv, Yuxin Zuo, Che Jiang, et al. Marti: A framework for multi-agent llm systems reinforced training and inference. In *International Conference on Learning Representations*, volume 2026, pp. 138790–138813, 2026.
- Siyan Zhao, Zhihui Xie, Mengchen Liu, Jing Huang, Guan Pang, Feiyu Chen, and Aditya Grover. Self-distilled reasoner: On-policy self-distillation for large language models. *arXiv preprint arXiv:2601.18734*, 2026a.
- Yujie Zhao, Lanxiang Hu, Yang Wang, Minmin Hou, Hao Zhang, Ke Ding, and Jishen Zhao. Stronger-mas: Multi-agent reinforcement learning for collaborative llms. In *International Conference on Learning Representations*, volume 2026, pp. 150619–150651, 2026b.
- Binbin Zheng, Xing Ma, Yiheng Liang, Jingqing Ruan, Xiaoliang Fu, Kepeng Lin, Benchang Zhu, Ke Zeng, and Xunliang Cai. Scope: Signal-calibrated on-policy distillation enhancement with dual-path adaptive weighting. *arXiv preprint arXiv:2604.10688*, 2026.

Qiyong Zhong, Mao Zheng, Mingyang Song, Xin Lin, Jie Sun, Houcheng Jiang, Xiang Wang, and Junfeng Fang. Sod: Step-wise on-policy distillation for small language model agents. *arXiv preprint arXiv:2605.07725*, 2026.

Wenhong Zhu, Ruobing Xie, Rui Wang, and Pengfei Liu. Hybrid policy distillation for llms. *arXiv preprint arXiv:2604.20244*, 2026.

APPENDIX

A LIMITATIONS

Two boundaries of the study are worth making explicit. The first is that all of the models involved come from a single open-weight family, chosen because it is released at many sizes with stable checkpoints and is used widely enough that the figures reported here can be set against published ones, which is what allows the comparison against nine baselines in Table 1 to rest on the method rather than on the backbone; whether the same conclusions hold across families is left to future work. The second is that the teacher is held at one scale throughout the main experiments while the student varies, which is what makes each row of that table differ from the others in the student alone and keeps the effect attributable to it; how the size of the teacher interacts with what we report is likewise left to future work.

B EXTENDED RELATED WORK

This section expands the two lines of work summarized in Section 5.

RL Training for MAS. Multi-agent systems built on large language models have largely been assembled at inference time, with frameworks such as AutoGen (Wu et al., 2023) and MetaGPT (Hong et al., 2024) eliciting role-specific behavior from one frozen policy through prompt augmentation alone. Since the competence of a single model varies considerably across the abilities a workflow calls for (Chen et al., 2025; Wang et al., 2025a; Belcak et al., 2025), a line of work instead assigns a separate and more suitable model to each role (Ye et al., 2025a; Belcak et al., 2025), yet surveys of the area report that the design effort remains concentrated on inference-time orchestration rather than on training the policies themselves (Cemri et al., 2026; Guo et al., 2024). Reinforcement learning with group-relative and rule-based rewards has meanwhile become the standard route for post-training a language agent, and it improves reasoning, long-horizon planning, game playing and tool use in the single-agent setting (Shao et al., 2024; Feng et al., 2026; Wang et al., 2025b; Qian et al., 2026; Hu et al., 2026). Extending it to several agents has so far been done under restricted interaction patterns or fixed role structures: CURE (Wang et al., 2026d) co-evolves a coder and a unit tester under one shared policy for code generation, SPIRAL (Liu et al., 2026a) trains a single model through self-play on zero-sum games, MHGPO (Chen et al., 2026a) targets retrieval-augmented generation, and MAPoRL (Park et al., 2025) together with CoRY (Ma et al., 2024) optimize homogeneous-role debate workflows. More recent systems relax the workflow but not the supervision: MARFT (Liao et al., 2025) confines the agents to a single sequential exchange, MAGRPO (Liu et al., 2026b) and MARTI (Zhang et al., 2026) carry single-agent policy-gradient algorithms over to the multi-agent setting, and all of them optimize a return defined on a trajectory or a turn, which leaves the individual decisions inside a joint rollout without a target of their own.

On-Policy Distillation. On-policy distillation supervises the trajectories a student actually produces and therefore removes the mismatch between the states a fixed corpus covers and the states the student visits (Song & Zheng, 2026; Ye et al., 2026; 2025b; Zhu et al., 2026; Zheng et al., 2026; Xu et al., 2026; Chen et al., 2026b). Gu et al. (2024) casts the problem as reverse KL minimization under the student distribution, and Agarwal et al. (2024) places on-policy and off-policy distillation in one family indexed by the divergence being minimized. Two later analyses account for why the dense signal helps: Yang et al. (2026b) reads the objective as KL-regularized reinforcement learning whose per-token rewards are supplied implicitly by the teacher, while Li et al. (2026b) finds that the procedure aligns the student with its teacher locally on the states the student reaches and therefore depends on how compatible their reasoning patterns already are. The teacher can also be dispensed with, and a body of work distills a policy from its own higher-quality samples (Zhao et al., 2026a; Penalzoza et al., 2026; Hübotter et al., 2026; Shenfeld et al., 2026; He et al., 2026), while a further line applies the same token-level supervision in place of a scalar reward in order to escape the credit-assignment and stability problems of reinforcement learning (Li et al., 2026a; Yang et al., 2026a; Boussselham et al., 2026; Wang et al., 2026c;a; Zhong et al., 2026). Debate has also been placed on the supervising side, where Wang et al. (2026b) has several teachers argue a problem out so that their conclusion forms a stronger target for distillation, which makes the arrangement

a multi-teacher one rather than a general multi-agent system whose own agents are being trained. Each of these formulations supervises one student on trajectories it generated by itself, so neither the question of which role a piece of high-quality behavior should be attributed to nor the question of how a teacher can supervise a decision that depends on another agent arises in them.

C ALGORITHM

Sections 3.1 to 3.3 each define part of the training signal, and this section states the order in which they are applied over a batch of rollouts. The students first run the workflow of Section 2.1 untouched, keeping the interaction on-policy; the verifier and the teacher are then called on the completed trajectory, the only phase in which privileged information exists; and the policies are updated from the advantage of Eq. (10) before every privileged quantity is discarded.

Algorithm 1: One training step of MAS-OPD on a batch of joint rollouts

Input: role policies $\{\pi_{\theta_i}\}_{i=1}^N$, frozen teacher π_T , verifier V , role conditions $\{r_i\}$, contrast map κ on role conditions, weight λ
Output: updated role policies $\{\pi_{\theta_i}\}$

Phase 1: joint rollout, students only.

```

for  $t = 0, 1, \dots, T - 1$  do
  for  $i = 1, \dots, N$  do
    form  $x_i^t = P_i(s^t, r_i)$  and sample  $y_i^t \sim \pi_{\theta_i}(\cdot \mid x_i^t)$ , retaining  $\log \pi_{\theta_i}(y_{i,t,k} \mid x_i^t, y_{i,t,<k})$ 
  end
  obtain  $e^t$  from the joint output  $\mathbf{y}^t$ , append the turn to the history
  if the roles agree then terminate the episode
end

```

Phase 2: attribution and teacher scoring, neither visible to a student.

```

for  $t = 0, 1, \dots$  over the completed turns do
   $a^t \leftarrow V(q, \mathbf{y}^t, e^t)$  and render  $a^t$  into the privileged description  $c^t$ 
end
for  $t$  and  $i$  over every response of  $\tau$  do
   $\tilde{u} \leftarrow u \oplus c^{<t}$  // empty at  $t = 0$ ; never contains  $c^{t'}$  for  $t' \geq t$ 
   $r_j \leftarrow \kappa(r_i)$ 
   $\ell_k^{(i)} \leftarrow \text{force-decode } y_i^t \text{ under } \pi_T(\cdot \mid \tilde{u}, r_i)$  // target role
   $\ell_k^{(j)} \leftarrow \text{force-decode } y_i^t \text{ under } \pi_T(\cdot \mid \tilde{u}, r_j)$  // contrasting role
   $A_{i,t,k}^{\text{OPD}} \leftarrow \ell_k^{(i)} - \log \pi_{\theta_i}(y_{i,t,k} \mid x_i^t, y_{i,t,<k})$ 
   $A_{i,t,k}^{\text{role}} \leftarrow \ell_k^{(i)} - \ell_k^{(j)}$ 
   $A_{i,t,k}^{\text{RAS}} \leftarrow A_{i,t,k}^{\text{OPD}} + \lambda A_{i,t,k}^{\text{role}}$ 
end

```

Phase 3: update.

```

form  $\mathcal{L}_{\text{MAS-OPD}}$  as in Eq. (13) from  $\text{sg}(A_{i,t,k}^{\text{RAS}})$ , averaged without weights over tokens, then turns,
  then roles
update each  $\theta_i$  from the gradient of its own responses alone, all policies synchronously
discard  $\{c^t\}$  and every teacher score

```

No student is ever conditioned on what the teacher receives, since Phase 1 completes before the verifier is called and x_i^t is formed from the student-visible s^t alone. The attributions precede the scoring loop because scoring turn t requires $c^{<t}$, so an attribution exists before the teacher reaches the turn it guides while never describing that turn itself. Both teacher passes are inference only and the student log-probabilities are those retained from the rollout, so a step costs one sampling pass and two teacher forward passes per response.

D EXPERIMENTAL SETUP

D.1 TRAINING DATASETS

Each domain is trained on a single corpus, the code domain on CodeContests and the mathematics domain on Polaris-Dataset-53K, both described below.

CodeContests (Li et al., 2022). CodeContests is a large-scale competitive-programming dataset released in conjunction with AlphaCode and designed to support training and evaluation of competition-level program synthesis. The dataset aggregates programming problems from several major online judging platforms, including Aizu, AtCoder, CodeChef, Codeforces, and HackerEarth. Its official release is organized into training, validation, and test splits, with the training split containing more than thirteen thousand programming problems. Each instance provides a natural-language problem specification together with executable input–output tests. The dataset distinguishes public tests, which are typically visible to contestants as examples in the problem statement, from private tests used for evaluation, and additionally includes automatically generated tests obtained by modifying existing inputs and validating the resulting outputs with known correct solutions.

Beyond problem statements and test cases, CodeContests provides both correct and incorrect human submissions in multiple programming languages, including C++, Python, and Java. It also preserves rich problem-level metadata, such as the original source, execution time and memory limits, and, when available for Codeforces problems, contest identifiers, ratings, points, and algorithmic tags. The problems cover a wide range of competitive-programming topics and difficulty levels, requiring models to understand lengthy specifications, derive appropriate algorithms, and produce complete executable programs. Importantly, correctness can be determined directly by executing a generated program against the associated test cases, providing an objective functional-correctness signal without relying on a learned evaluator or language-model judge.

Polaris-Dataset-53K (An et al., 2025). Polaris-Dataset-53K is an open-source mathematical reasoning corpus released as part of the POLARIS reinforcement-learning recipe. The dataset contains approximately 53K mathematical reasoning problems curated from two larger open-source resources, DeepScaleR-Dataset-40K (Luo et al., 2025) and AReal-boba-Data (Fu et al., 2025). Its construction is motivated by the observation that the effectiveness of reinforcement-learning data depends strongly on problem difficulty relative to the current policy: examples that are solved almost universally provide little useful learning signal, whereas examples that are overwhelmingly unsolvable can lead to excessively sparse positive rewards. POLARIS therefore explicitly characterizes its mathematical problems according to model-relative difficulty rather than treating all collected examples as equally informative.

To estimate problem difficulty during dataset construction, the POLARIS authors use DeepSeek-R1-Distill-Qwen-7B (Guo et al., 2025) to generate eight candidate solutions for each problem and measure the corresponding pass rate. Problems solved correctly in all eight rollouts are removed from the released corpus in order to reduce the proportion of trivially easy examples. The resulting dataset contains approximately 26K problems originating from DeepScaleR and 27K from AReal. Each released instance contains a mathematical problem, its reference answer, and a difficulty annotation derived from the observed rollout pass rate. Since perfectly solved examples are excluded during construction, the released difficulty annotations range from 0/8 to 7/8. This combination of answer-verifiable mathematical problems and explicit model-based difficulty information makes Polaris-Dataset-53K particularly suitable for reinforcement-learning-based post-training of mathematical reasoning models.

D.2 EVALUATION BENCHMARKS

We evaluate mathematical reasoning and code generation on six established benchmarks. We describe the origin, task characteristics, and evaluation structure of each benchmark below.

D.2.1 CODE GENERATION

(1) LiveCodeBench-v6 (Jain et al., 2025). LiveCodeBench is a continuously updated benchmark designed to evaluate the coding capabilities of large language models while mitigating the data

contamination issues associated with static code benchmarks. It continuously collects newly released competitive-programming problems from LeetCode, AtCoder, and Codeforces, with temporal metadata that enables evaluations on problems released during different periods. Beyond conventional code generation, the full benchmark also covers several complementary capabilities, including self-repair, code execution, and test-output prediction. For code generation, each instance provides a natural-language problem specification together with input/output examples and executable test cases, and a generated program is evaluated according to whether it passes the associated tests. LiveCodeBench maintains temporally separated releases and fine-grained version configurations, with v6 corresponding to one of these temporally defined problem sets. This continuously updated construction makes LiveCodeBench particularly suitable for assessing coding ability on recent, previously unseen competitive-programming problems.

(2) APPS (Hendrycks et al., 2021). APPS (Automated Programming Progress Standard) is a large-scale code-generation benchmark designed to evaluate whether language models can synthesize complete programs from natural-language problem specifications. It contains 10,000 English programming problems, divided evenly into 5,000 training and 5,000 test instances, and was manually curated from open-access programming platforms including Codewars, AtCoder, Kattis, and Codeforces. The problems are organized into three difficulty levels named Introductory, Interview, and Competition, and they cover a broad spectrum from relatively elementary programming exercises to challenging algorithmic problems. Each instance contains a natural-language problem description, executable input/output test cases, Python solutions when available, and metadata such as its difficulty and source. The released dataset contains more than 130,000 test cases in total. Evaluation is execution based: a generated program is judged by whether it produces the expected outputs on the corresponding tests, thereby assessing end-to-end program synthesis rather than surface-form similarity to a reference solution.

(3) CodeContests (Li et al., 2022). CodeContests is a competitive-programming dataset released in conjunction with AlphaCode and constructed to support training and evaluation of competition-level program synthesis. It aggregates programming problems from multiple online competition platforms, including Aizu, AtCoder, CodeChef, Codeforces, and HackerEarth. The released dataset contains 13,328 training problems, 117 validation problems, and 165 test problems. Each problem is represented by a natural-language specification and can additionally contain public tests, private tests, automatically generated tests, correct and incorrect human submissions in multiple programming languages, and competition-specific metadata such as time and memory limits. For Codeforces problems, metadata can further include ratings, points, and algorithmic tags. The availability of executable tests and human submissions makes CodeContests substantially richer than benchmarks containing only a problem statement and a single reference implementation. Candidate solutions are evaluated through program execution against input/output tests, emphasizing algorithmic reasoning and functional correctness under competitive-programming constraints. The code domain trains on the training split of this dataset, as described in Appendix D.1, and is evaluated on the held-out test split, so the problems reported here are disjoint from those seen during training.

D.2.2 MATHEMATICAL REASONING

(4) AIME 2024. The American Invitational Mathematics Examination (AIME) is a challenging high-school mathematics competition administered by the Mathematical Association of America. Unlike multiple-choice mathematics benchmarks, AIME uses a free-response format and requires each problem to be solved to a specific numerical answer. The public AIME 2024 benchmark combines the 2024 AIME I and AIME II examinations, each containing 15 problems, for a total of 30 problems. The questions cover major areas of competition mathematics, including algebra, geometry, number theory, and combinatorics, and generally require multi-step reasoning and nontrivial problem-solving insight rather than direct application of standard formulas. Every problem has an integer answer between 0 and 999, which makes correctness unambiguous after the final answer has been extracted from a model response. Public dataset releases provide the original problem statements and numerical answers, together with detailed reference solutions, making AIME 2024 a compact but demanding benchmark for evaluating advanced mathematical reasoning.

(5) AIME 2025. AIME 2025 is the subsequent annual edition of the American Invitational Mathematics Examination and follows the same free-response competition format as earlier AIME bench-

marks. The public benchmark contains 30 problems, consisting of 15 problems from AIME I and 15 from AIME II. As in other AIME editions, every problem has a single integer answer in the range from 0 to 999, permitting deterministic verification of the final prediction. The problems span the principal areas of olympiad-style high-school mathematics, including algebra, geometry, combinatorics, and number theory, and typically require several interconnected reasoning steps, careful case analysis, or problem-specific mathematical observations. Public releases provide problem statements, gold answers, and reference solutions. As a newly released annual competition set, AIME 2025 complements earlier AIME evaluations with a temporally distinct collection of challenging mathematical problems while retaining the standardized answer format that makes AIME convenient for automatic evaluation.

(6) OlympiadBench (He et al., 2024). OlympiadBench is a challenging benchmark for advanced mathematical and scientific reasoning constructed from olympiad-level mathematics and physics problems. The complete benchmark contains 8,476 problems collected from international and Chinese academic competitions, including the Chinese college entrance examination, with expert-level step-by-step solution annotations. In contrast to AIME, OlympiadBench is deliberately heterogeneous: it covers both mathematics and physics, English and Chinese, text-only and multimodal problems, as well as open-ended questions and theorem-proving tasks. Accordingly, the public release is organized into fine-grained subsets according to question type, modality, subject, language, and source category, including a text-only English open-ended competition-mathematics subset. Individual instances provide structured information such as the problem, reference solution, final answer, answer type, mathematical subfield, units when applicable, and modality. Its competition-level difficulty and diversity of problem and answer formats make OlympiadBench a broader test of advanced reasoning than mathematical benchmarks restricted to short integer-valued answers.

D.3 BASELINES

Based on the construction of Stronger-MAS (Zhao et al., 2026b), we include a series of single-agent and multi-agent variants to disentangle the effects of additional interaction turns, reinforcement learning, and role-based multi-agent collaboration. Unless otherwise specified, these baselines use the same backbone initialization, task instances, verifier resources, generation constraints, and evaluation protocol as our main experiments, while each method keeps the reward construction its own design prescribes.

D.3.1 SINGLE-AGENT BASELINES

(1) SA + ST. The **Single-Agent + Single-Turn (SA + ST)** baseline represents the standard inference-only setting in which a frozen language model solves each task end-to-end with a single response. Following the task-specific single-agent construction in Stronger-MAS (Zhao et al., 2026b), the Code domain uses the Coder role to directly synthesize a solution program from the problem statement, while the Math domain uses the Reasoner role to directly derive the final answer. No additional agent is instantiated, no cross-agent feedback is introduced during generation, and the model parameters remain unchanged. This baseline therefore measures the task capability of the underlying model without either reinforcement-learning post-training or multi-agent collaboration, and serves as the basic reference for the remaining single-agent and multi-agent variants.

(2) SA + MT. The **Single-Agent + Multi-Turn (SA + MT)** baseline extends SA + ST by allowing the same agent to repeatedly reconsider and revise its own previous output over multiple turns (Zhao et al., 2026b). Importantly, the additional turns do not introduce a second role: the Coder iteratively refines its own program in the Code domain, while the Reasoner iteratively revises its own solution in the Math domain. Thus, unlike the multi-agent workflows described below, successive turns contain no feedback from a complementary agent and do not introduce the role-structured interaction between Coder and Tester or between Reasoner and Tool-User. The agent revises until its output is self-consistent across turns or the same interaction horizon as the corresponding multi-turn setting is exhausted, so it is given a stopping rule of its own rather than being made to run out the turn budget. This baseline controls for the effect of simply allocating additional generation and refinement turns, allowing us to distinguish gains from genuine cross-role collaboration from gains that could arise from additional single-agent computation alone.

(3) SA + ST + GRPO. The **Single-Agent + Single-Turn + GRPO (SA + ST + GRPO)** baseline retains the same single-turn inference structure as SA + ST but post-trains the underlying policy with Group Relative Policy Optimization (GRPO) (Shao et al., 2024). For each training problem, multiple candidate responses are sampled from the current single-agent policy and evaluated using the corresponding task verifier. GRPO then constructs a group-relative learning signal by centering and normalizing the rewards within the response group and optimizes the policy with its clipped policy-gradient objective. Since all candidates in a standard single-agent group are generated from the same problem prompt, their rewards are directly comparable under the conventional GRPO formulation. The Code setting trains the single-agent Coder, while the Math setting trains the single-agent Reasoner. This baseline isolates the benefit of conventional reinforcement-learning post-training without introducing additional interaction turns or multi-agent coordination.

(4) SA + MT + GRPO. The **Single-Agent + Multi-Turn + GRPO (SA + MT + GRPO)** baseline is the reinforcement-learning counterpart of SA + MT. It retains the same multi-turn self-refinement process, in which a single Coder or Reasoner repeatedly revises its own preceding output, while optimizing the underlying single-agent policy with GRPO (Shao et al., 2024; Zhao et al., 2026b). As in SA + MT, no complementary role participates in the trajectory: later turns are conditioned on the agent’s own preceding generations rather than on feedback produced by a Tester or Tool-User. The same task-level verifier and reward construction are used for policy optimization, and no multi-agent-specific credit-assignment mechanism is introduced. Comparing this baseline with SA + ST + GRPO controls for whether a longer self-refinement horizon improves a GRPO-trained single-agent policy, while comparison with the multi-agent baselines separates multi-turn computation from role-based collaborative interaction.

D.3.2 MULTI-AGENT SYSTEM BASELINES

(5) MAS. The **Multi-Agent System (MAS)** baseline evaluates role-based collaboration without reinforcement-learning updates. Following Stronger-MAS (Zhao et al., 2026b), all roles are instantiated from the same frozen backbone and are differentiated through role-specific prompts. In the Code domain, a Coder and a Tester interact iteratively: the Coder proposes or refines the candidate program, while the Tester constructs test cases and provides complementary feedback on the current solution, with the two roles continuing the interaction until the environment finds their outputs in agreement or the turn limit of Section 2.1 is reached. In the Math domain, a Reasoner derives the answer by mathematical reasoning while a Tool-User computes it by writing and executing a program, with the two roles likewise interacting until the environment finds their two answers in agreement or the same turn limit is reached. Because the backbone parameters remain fixed throughout, any improvement over the single-agent baselines is attributable to the inference-time interaction structure and complementary role specialization rather than to parameter updates. MAS therefore provides the direct prompt-only reference for assessing the additional benefit brought by reinforcement learning on top of the same collaborative workflow.

(6) MAGRPO. We adapt Multi-Agent Group Relative Policy Optimization (Liu et al., 2026b) as a multi-agent RL baseline. MAGRPO formulates LLM collaboration as a cooperative MARL problem and optimizes decentralized agent policies using a shared team reward. For each task, it samples a group of complete joint trajectories and computes, at each turn, the return-to-go of each trajectory; the centralized group-relative advantage is then obtained by centering these returns within the trajectory group and is shared by all participating agents to update their respective actions. To evaluate MAGRPO under our setting, we retain exactly the same MAS workflows as our main experiments: the Coder and Tester iteratively interact for code generation, while the Reasoner and Tool-User collaborate over multiple turns for mathematical reasoning. The role policies are initialized from the same backbone and optimized independently, as in the other trainable multi-agent methods. We keep the backbone models, role prompts, environment interactions, termination conditions, training/evaluation data, and verifiers identical across methods. The same environment-level team reward is used for MAGRPO, while role-specific local rewards are removed to preserve its original shared-reward formulation. We further follow the original MAGRPO design by grouping complete multi-turn joint trajectories, computing Monte-Carlo return-to-go followed by mean-centered group-relative advantages, and applying the same centralized advantage to all agents within a trajectory. Consistent with the original method, we do not introduce a learned critic or agent-specific credit assignment, and retain its unclipped policy-gradient objective without KL regularization. These

choices isolate the effect of MAGRPO’s trajectory-level cooperative optimization while ensuring that differences in performance are not attributable to changes in the underlying MAS workflow or evaluation environment.

(7) MAS + GRPO. The **MAS + GRPO** baseline combines the same multi-turn MAS workflows with conventional GRPO training (Shao et al., 2024; Zhao et al., 2026b). We retain the Coder–Tester interaction for Code and the Reasoner–Tool–User interaction for Math, while directly applying the standard group-relative optimization procedure to experience collected from the multi-agent rollouts. The two role policies are initialized from the same backbone but maintained and optimized independently, and each is updated from the responses its own role produced. In contrast to Stronger-MAS, this baseline does not introduce agent- and turn-wise grouping or tree-structured sampling to construct comparison groups with identical role-specific interaction histories. Consequently, as multi-turn trajectories evolve, different rollout branches may encounter different prompts because their preceding cross-agent interactions have diverged, while conventional GRPO still computes relative learning signals without explicitly accounting for these heterogeneous interaction states. MAS + GRPO therefore tests whether standard single-agent group-relative optimization can be transferred directly to a multi-agent workflow without modifying its grouping and credit-assignment mechanism. All underlying MAS components, including the agent roles, prompts, interaction protocol, environment, termination conditions, rewards, and evaluation procedure, are otherwise kept aligned with the MAS setting.

(8) CURE. CURE (Wang et al., 2026d) jointly trains a shared language model to act as both a coder and a unit-test generator, with the key idea that the tester should not only produce valid tests but also generate tests that effectively distinguish correct programs from incorrect ones. In particular, the coder is optimized using execution-based correctness rewards, while the tester is rewarded for accepting correct candidate programs and rejecting incorrect ones, thereby enabling the two capabilities to co-evolve through reinforcement learning. To adapt CURE to our multi-agent code-generation setting, we retain the Coder–Tester interaction protocol provided by our common experimental framework and apply the original CURE reward construction to the resulting code and test candidates. Specifically, the final candidate programs are evaluated using the reference test suite to determine their correctness, while generated tests are scored according to their ability to preserve correct programs and discriminate against incorrect ones. Following the original CURE design, the Coder and Tester share a single policy and are instantiated through role-specific prompts, and their rewards are normalized within the corresponding rollout groups before policy optimization. For a fair comparison, CURE uses the same backbone model, task instances, Coder–Tester interaction protocol, rollout and inference budgets, and final evaluation procedure as the other methods, while retaining CURE-specific components such as its shared-policy formulation and discriminative tester reward. Since CURE is specifically designed and evaluated for code generation and unit-test synthesis, we implement and report this baseline only on the Code domain. Its shared policy is the one departure from the independent role policies used by the other trainable multi-agent baselines, since learning the two capabilities within a single model is integral to the method.

(9) MARFT. Multi-Agent Reinforcement Fine-Tuning (MARFT) (Liao et al., 2025) is a reinforcement-learning framework for jointly optimizing collaborating LLM agents. Its core idea is to formulate an LLM-based multi-agent system as a sequential joint decision process, where each agent acts conditioned on the current environment state and preceding inter-agent interactions. To address credit assignment across interdependent agents, MARFT adopts centralized training with decentralized execution: a centralized critic estimates the value of joint interaction states, generalized advantage estimation (GAE) provides learning signals over multi-turn trajectories, and the agent policies are optimized using a PPO-style objective.

We implement MARFT on top of the Stronger-MAS codebase (Zhao et al., 2026b) and adapt it to the same multi-agent collaboration settings used therein. Specifically, for code tasks, we retain the multi-turn Coder–Tester interaction protocol, while for mathematical reasoning tasks, we retain the multi-turn Reasoner–Tool–User interaction protocol. The original interaction workflow and environment are kept unchanged, and only the reinforcement-learning optimization procedure is replaced with MARFT. Trajectories generated from these multi-turn interactions are used to train MARFT’s centralized critic and subsequently update the agent policies with GAE-based PPO

optimization. This adaptation allows MARFT to be evaluated directly under the same multi-turn MAS setting, rather than under its original experimental configuration.

For a fair comparison, we keep the key non-algorithmic settings consistent with the Stronger-MAS experimental setup, including the base model and initialization, agent roles and prompts, training and evaluation data, reward design, interaction protocol and horizon, environment dynamics, generation constraints, policy-sharing configuration, decoding strategy, and overall training and rollout budgets. We do not incorporate Stronger-MAS-specific agent-and-turn-wise grouping or branch-selection mechanisms into MARFT. Therefore, MARFT retains its original centralized-critic-based credit assignment and PPO optimization while being evaluated under an otherwise aligned multi-agent environment and experimental protocol.

D.4 REWARD DESIGN

MAS-OPD itself requires no reward, since Eq. (13) is a distillation objective and the verifier enters it only through the attribution of Appendix F.6, which labels an output rather than scoring it. The reinforcement-learning baselines do require one, so we follow the reward design of the multi-agent training setting of Stronger-MAS (Zhao et al., 2026b) on the two domains this paper runs, and describe it here for reproducibility. Each domain supplies a *team reward* shared by the whole system and a *local reward* per role, both taking values in $[0, 1]$. Methods that optimize a single shared team signal, MAGRPO among them, read the team reward alone; the remaining reinforcement-learning baselines read both, combining them for role i at turn t as

$$r_{t,i} = \alpha r_t^{\text{team}} + r_{t,i}^{\text{loc}}, \quad \alpha = 1, \quad (14)$$

which is the mixed credit assignment of Stronger-MAS with the weight it reports.

A local reward is a masked convex combination of verifiable component scores. For a role i at turn t ,

$$r_{t,i}^{\text{loc}} = b_{t,i} \sum_{\ell} w_{\ell}^i g_{\ell,t}^i, \quad \sum_{\ell} w_{\ell}^i = 1, \quad g_{\ell,t}^i \in [0, 1], \quad (15)$$

where w_{ℓ}^i are fixed coefficients, $g_{\ell,t}^i$ are the component scores of that role and $b_{t,i} \in \{0, 1\}$ is an availability mask that is zero whenever the evidence a component needs cannot be obtained at that turn. Every component below is decided by execution or by comparison against a reference, so no score anywhere in this subsection comes from a model judging an output.

D.4.1 MATHEMATICAL REASONING

Answers are parsed and normalised with MATH-VERIFY¹ and then compared numerically with a tolerance $\varepsilon = 10^{-6}$, two values counting as equal when

$$\text{NUMEQ}(a, b) = \mathbf{1} \left\{ |a - b| \leq \varepsilon \text{ or } \frac{|a - b|}{\max(1, |b|)} \leq \varepsilon \right\}. \quad (16)$$

Team reward. The team signal is sparse and is decided at termination by numerical equality against the reference answer y^* , then broadcast unchanged to every turn of the episode:

$$r_t^{\text{team}} = \mathbf{1} \{ \text{NUMEQ}(\hat{y}, y^*) \} \in \{0, 1\}, \quad \forall t, \quad (17)$$

with $\hat{y}$ the final answer the system submits.

Reasoner. The Reasoner is scored on output format and on the correctness of its answer, with coefficients $w_{\text{fmt}}^{\text{Reasoner}} = 0.20$ and $w_{\text{ans}}^{\text{Reasoner}} = 0.80$. The format score $g_{\text{fmt},t}^{\text{Reasoner}}$ indicates whether the response matches the schema its template prescribes, and the answer score is

$$g_{\text{ans},t}^{\text{Reasoner}} = \begin{cases} \text{NUMEQ}(\hat{y}_t, y^*), & \text{if MATH-VERIFY extracts a numeric } \hat{y}_t, \\ 0, & \text{otherwise,} \end{cases} \quad (18)$$

so a response from which no answer can be parsed scores zero rather than being left unscored. The mask $b_{t,\text{Reasoner}}$ is one whenever the reference answer is available at that turn.

¹MATH-VERIFY (Hugging Face), github.com/huggingface/Math-Verify. We use it as a parsing and normalisation front end and apply the comparator below to its output.

Tool-User. The Tool-User is scored on whether its program runs, on whether an answer can be recovered from what the program printed, and on the correctness of that answer, with coefficients $w_{\text{run}}^{\text{Tool-User}} = 0.10$, $w_{\text{parse}}^{\text{Tool-User}} = 0.10$ and $w_{\text{ans}}^{\text{Tool-User}} = 0.80$. The run score indicates whether the program terminates within the sandbox limits of Appendix D.6.1 without an uncaught exception or a timeout, the parse score whether MATH-VERIFY extracts a numeric value $\tilde{y}_t$ from the captured output, and the answer score is

$$g_{\text{ans},t}^{\text{Tool-User}} = \begin{cases} \text{NUMEQ}(\tilde{y}_t, y^*), & \text{if a numeric } \tilde{y}_t \text{ is recovered,} \\ 0, & \text{otherwise.} \end{cases} \quad (19)$$

The mask $b_{t,\text{Tool-User}}$ is one whenever the execution result and the reference answer are both available at that turn. The two roles are therefore scored on the same quantity, the answer each of them arrives at, through the evidence its own medium produces.

D.4.2 CODE GENERATION

Let $\mathcal{T}^{\text{gold}}$ be the fixed set of golden unit tests of a problem and write $\text{RUN}(u, \cdot)$ for the outcome of executing a program on the test u in the sandbox of Appendix D.6.1.

Team reward. The team signal is dense and is the fraction of golden tests the submitted program passes, again broadcast to every turn:

$$r_t^{\text{team}} = \frac{1}{|\mathcal{T}^{\text{gold}}|} \sum_{u \in \mathcal{T}^{\text{gold}}} \mathbf{1}\{\text{RUN}(u, \text{code}) = \text{pass}\} \in [0, 1], \quad \forall t. \quad (20)$$

Coder. The Coder is scored on two sanity checks and on the fraction of golden tests its program passes, with coefficients $w_{\text{build}}^{\text{Coder}} = 0.10$, $w_{\text{run}}^{\text{Coder}} = 0.10$ and $w_{\text{pass}}^{\text{Coder}} = 0.80$. The build score indicates whether the candidate program compiles and imports without syntax errors, the run score whether a smoke subset of $\mathcal{T}^{\text{gold}}$ executes without an uncaught exception or a timeout, and the pass score is

$$g_{\text{pass},t}^{\text{Coder}} = \frac{1}{|\mathcal{T}^{\text{gold}}|} \sum_{u \in \mathcal{T}^{\text{gold}}} \mathbf{1}\{\text{RUN}(u, \text{code}_t) = \text{pass}\}. \quad (21)$$

The mask $b_{t,\text{Coder}}$ is one whenever the build and run logs and the golden-test results are available at that turn. The weight therefore sits on functional correctness while the two sanity checks keep a program that fails to run from being indistinguishable from one that runs and is wrong.

Tester. The Tester is scored on whether the test case it authors is well formed and on whether that test case is consistent with the problem specification, with coefficients $w_{\text{valid}}^{\text{Tester}} = 0.20$ and $w_{\text{spec}}^{\text{Tester}} = 0.80$. The validity score $g_{\text{valid},t}^{\text{Tester}}$ indicates whether the test is executable and deterministic and respects the input and output format the problem states. The specification score runs the reference solution code* on the test inputs the Tester authored, collected in $\mathcal{U}_t$, and credits those whose declared expected output the reference reproduces,

$$g_{\text{spec},t}^{\text{Tester}} = \frac{1}{|\mathcal{U}_t|} \sum_{u \in \mathcal{U}_t} \mathbf{1}\{\text{RUN}(u, \text{code}^*) = \text{pass}\}, \quad (22)$$

so a test whose expected output the specification does not support scores zero however well formed it is. The mask $b_{t,\text{Tester}}$ is one whenever the test runner and the reference solution are both available at that turn. Scoring the test case against the reference rather than against any candidate program is what keeps the Tester from being rewarded for the work of the Coder, and it is the same check that supplies `test_correct` in Appendix F.6.

D.4.3 REWARD DESIGN AGAINST ATTRIBUTION DESIGN

MAS-OPD does require design of its own, namely the training-time verifier of Section 3.3 and, on the rule-based route, the attribution procedure of Appendix F.6. The question is what kind of judgement each approach asks a designer to supply, and the two subsections above make the comparison concrete.

A local reward asks for a number. Building the ones used here meant choosing which components of a response to score, fixing a coefficient for each, and deciding how partial credit is expressed on a scale: ten coefficients over four roles, with the format, build, run and parse checks held at 0.10 or 0.20 and functional correctness at 0.80 in all four cases. None of those choices is verifiable. There is no experiment that establishes 0.10 rather than 0.15 for a build check, and a different split would train a different system, so the weights are a judgement about how much a designer believes each signal matters. They are also specific to the domain and to the roles: the components of Eq. (21) refer to golden tests, those of Eq. (18) to a parsed numeric answer, and neither set transfers to the other domain, let alone to a workflow with different responsibilities. A team reward adds a second such choice, sparse at termination on mathematics and dense over test outcomes on code, and methods that read both then inherit the balance between them fixed by Eq. (14).

Attribution asks for a fact. Given the outputs of one interaction, the procedure has to determine which of them is wrong, and unlike a weight that judgement has a correct answer, which is why it can be obtained by executing tests or comparing against a reference rather than being tuned. It is also a single question rather than one question per component: the verifier that already decides whether a program passes its tests, or whether an answer matches a reference, is by itself enough to answer it, which is how the rules of Appendix F.6 are built from checks the reward design needed anyway. Nothing has to be settled about granularity, since the attribution is attached to the output it concerns, and nothing about scale, since the teacher consumes it as context rather than as a number to be traded off. The design effort accordingly does not grow with the number of signals a designer might want to express, which is what Appendix E.1.3 exploits when it replaces the rules with a single model call in the wider systems.

The distinction matters for what the supervision can then do. A local reward has to compress the outcome of an interaction into one scalar per role and per turn before the learner sees it, whereas an attribution names the responsible output and enters the teacher’s context through Eq. (12), leaving the teacher to express the consequence over the tokens of that output, which is the token-level signal Eq. (13) distils and the reason the students can be taught which side should yield in a conflict rather than merely that the episode went badly. That supervision is what Section 4.4 finds the students internalise, in that they continue to settle conflicts in the direction their own correctness warrants once the verifier is removed. Since a correctness judgement is a quantity any verifiable domain already produces, the supervision PAC requires can be obtained wherever such a judgement exists, without the calibration a new reward design would need.

D.5 MODELS AND EVALUATION PROTOCOL

Models. All experiments use models from the Qwen3 series (Team, 2025). The teacher is Qwen3-14B and the students are Qwen3-1.7B and Qwen3-4B, and every agent of a multi-agent system is instantiated from the student model of the configuration being reported. Unless an experiment states otherwise, it reports the 1.7B student, which is the size used in Sections 4.3 and 4.4 and Appendix E.1.1.

Use of the teacher. The teacher is frozen throughout training and is never asked to generate a trajectory of its own. It is force-decoded on responses the students have already produced, in the sense of Section 2.2, so it contributes token-level scores and no tokens of its own to the interaction. It takes no part in evaluation, where only the trained student policies are run.

Inference and interaction. Every model is run in the no-thinking mode of Qwen3 and decodes at a temperature of 0.6, with the remaining decoding parameters and generation limits given in Appendix D.6.1. Multi-agent interactions are capped at a horizon of $T = 4$ turns in the sense of Section 2.1, and an interaction that reaches agreement earlier terminates at that point.

Metrics. We report Pass@1 on the code benchmarks and accuracy on the mathematics benchmarks, with final outputs judged by the task-specific verifier of each domain. Those verifiers are described in Appendix D.4 and the per-benchmark protocols in Appendix D.2.

D.6 IMPLEMENTATION DETAILS

Computing infrastructure. All training and evaluation runs are carried out on a single node with eight NVIDIA H20 GPUs of 96GB memory each.

D.6.1 SETTINGS SHARED BY ALL METHODS

Framework and alignment across methods. We implement all baselines within the same experimental framework and align their non-algorithmic settings whenever compatible with the original methods. In particular, the methods use the same backbone initialization, training and evaluation data, task environments, role prompts, interaction horizon, generation limits, and number of optimization steps. The same task-specific verifier resources are used whenever the corresponding algorithm does not prescribe a distinct reward construction. The reward signals the reinforcement-learning baselines are trained with are set out in Appendix D.4, which MAS-OPD does not draw on, having no reward term. For trainable multi-agent methods, the role policies are initialized from the same backbone but optimized independently, matching the role-specialized policy organization of MAS-OPD and the system of Section 2.1. CURE is the only exception: we retain its original shared-policy formulation because jointly learning code generation and unit-test generation within a single policy is integral to its design. Method-specific reward constructions, credit-assignment mechanisms, and optimization objectives are otherwise preserved.

Common training configuration. Following the experimental protocol of Stronger-MAS (Zhao et al., 2026b), we use Qwen3 (Team, 2025) models in the no-thinking mode. For both Code and Math, the maximum prompt length is 8,192 tokens and the maximum response length is 4,096 tokens. All trainable baselines are run for 150 optimization steps with a global batch size of 128 and, where applicable, an optimization mini-batch size of 64. Unless a method requires an algorithm-specific setting, we use Adam with a policy learning rate of 1×10^{-6} , weight decay of 0.01, and gradient clipping at 1.0. During training, responses are sampled with temperature 1.0, $\text{top-}p = 1.0$, and $\text{top-}k = -1$. For methods based on grouped rollouts, the rollout group size is set to four. Multi-turn methods use a maximum interaction horizon of $T = 4$. Evaluation decodes with temperature 0.6, $\text{top-}p = 0.95$, and $\text{top-}k = 20$. Every method that is trained is trained five times from independent random seeds and each resulting system is evaluated once, so the standard deviations reported in Table 1 are taken over independent training runs and include both the variability of optimization and that of decoding. The three prompt-only baselines train nothing, and their five runs are independent evaluations of the same model under this decoding. Algorithm-specific hyperparameters that differ from these common settings are stated below.

Sandboxed code execution. Both domains are grounded in *verifiable execution*: whenever an agent emits a program, the environment runs it, and the outcomes the protocol surfaces are fed back into the interaction, so that subsequent decisions rest on an observed execution result rather than on a model’s self-assessment. Each call is stateless and mutually isolated. The program is materialised in a fresh working directory and launched as a separate operating-system process in its own process group; the test input is supplied on `stdin` and `stdout` is captured as the outcome. Independent test cases are dispatched concurrently, as they share no state. Every call is bounded by a wall-clock timeout of 30 s for code and 20 s for math, after which the entire process group is terminated. Crucially, execution never propagates a failure into the rollout loop: a crash, a syntax error, or a timeout is converted into an error string that is recorded as the outcome and, where the protocol calls for it, surfaced verbatim to the agents on the following turn. This keeps trajectories robust to arbitrary model-generated code while retaining the diagnostic content of the failure, which is often what enables the next revision.

Which roles invoke execution. The two domains differ in why they execute, and correspondingly in which roles are involved, as Table 3 sets out. In the code domain, execution is the means of checking a candidate program, since nothing can be judged about it without running it. The program executed is always the Coder’s, as the Tester authors test cases and never a program of its own, and that one program is run twice per turn over two different test inputs. It is run on the golden unit tests that ship with the dataset, which is what decides whether the task has been solved, and on the test case the Tester authored, whose outcome is the disagreement the environment reports and the condition on which the interaction terminates. The two executions differ in who reads them: only the outcome on the Tester-authored case reaches the agents, while the result on the golden tests is

Table 3: **What is executed on behalf of each role.** A row is one execution the environment performs, not a program the role wrote: the only program run on the code domain is the Coder’s, and the Tester contributes the test input it is run on, so the two code rows are the same program on two different inputs. The Reasoner writes no program at all and states its answer in natural language, which is compared against the Tool-User’s printed answer by a symbolic verifier.

Domain	Role	Program run	Test input
Code	Coder	the Coder’s	the dataset’s golden unit tests
	Tester	the Coder’s	the Tester’s own test case
Math	Tool-User	the Tool-User’s	—
	Reasoner	—	—

read by the verifier alone and enters no agent’s context at any turn, so no agent is told whether the task has been solved, and termination follows from the two roles agreeing or the turn budget running out rather than from that result. In the mathematics domain, by contrast, execution is a means of solving rather than of checking. Only the Tool-User writes code, a short program that computes and prints a candidate answer, which is then parsed from the captured output. The Reasoner never executes anything and states its answer in natural language after the marker ##### that its template prescribes, and the two candidate answers are compared by a symbolic verifier independently of execution. Consequently a mathematics episode still yields an answer from the Reasoner even when the program of the Tool-User fails to run, whereas in the code domain a program that cannot be executed leaves nothing to inspect.

D.6.2 BASELINES

Single-agent baselines (1)–(4). SA + ST and SA + MT use the Coder for Code and the Reasoner for Math, with model parameters kept frozen. SA + ST generates a single response, whereas SA + MT revises its own output until that output is self-consistent across turns or the horizon $T = 4$ is reached, which mirrors the agreement-or-horizon rule of the multi-agent workflows. Their trainable counterparts, SA + ST + GRPO and SA + MT + GRPO, preserve the corresponding interaction structures and optimize the policy using standard GRPO (Shao et al., 2024). We sample four rollouts per problem and otherwise use the common GRPO training configuration above.

(5) Prompt-only MAS. The MAS baseline uses the same Coder–Tester and Reasoner–Tool-User interaction workflows as the trainable multi-agent methods, with the backbone parameters kept frozen. The roles are differentiated through their corresponding role prompts and interact until their outputs agree or the maximum horizon $T = 4$ is reached. Since MAS performs no parameter updates, the training-specific optimization settings above do not apply.

(6) MAGRPO. We adapt MAGRPO (Liu et al., 2026b) to the same multi-turn interaction workflows with a generation group size of $G = 4$ and a maximum horizon of $T = 4$. The role policies are initialized from the same backbone and optimized independently. Following the original MAGRPO formulation, training uses the shared environment-level team reward without additional role-specific local rewards, and retains its trajectory-level Monte-Carlo group-relative optimization. We use the original policy-gradient formulation without a learned critic, PPO-style clipping, or KL regularization. The policy learning rate, batch sizes, sampling configuration, and total number of optimization steps otherwise follow the common settings above.

(7) MAS + GRPO. MAS + GRPO applies conventional GRPO (Shao et al., 2024) directly to the common multi-turn Coder–Tester and Reasoner–Tool-User workflows. The two role policies are initialized from the same backbone but maintained and optimized independently. For each task, we generate four multi-agent rollouts and update each role policy from the responses produced by that role using the common GRPO configuration above. We do not introduce the agent- and turn-wise regrouping or tree-structured branch selection of Stronger-MAS (Zhao et al., 2026b); the conventional group-relative optimization procedure is instead applied directly to the collected multi-agent rollouts.

(8) CURE. We implement CURE (Wang et al., 2026d) on the Code domain only and retain its original shared-policy formulation, in which a single language model serves as both the Coder and the Tester under role-specific prompts. The code-solution and unit-test rollout group sizes are both set to four, and we retain CURE’s original cross-execution procedure and separate normalization of the coder and tester reward groups. We use its clipped policy objective with reference-policy KL regularization coefficient $\beta = 0.01$ and a policy learning rate of 1×10^{-6} . The remaining compatible training and generation settings follow the common configuration above. The response-length reward transformation introduced for CURE’s long-CoT variant is not used because all models in our experiments operate in the no-thinking mode.

(9) MARFT. We adapt the action-level training procedure of MARFT (Liao et al., 2025) to the same multi-agent framework used by the other methods, while retaining our Coder–Tester and Reasoner–Tool–User interaction environments. The role-specific actor policies are initialized from the same backbone and optimized independently, while MARFT’s centralized critic is shared across roles and estimates values from the joint interaction state. Following the action-level MARFT implementation, the critic uses a frozen language-model encoder followed by a trainable MLP value head with hidden size 64. We use an actor learning rate of 1×10^{-6} , a critic learning rate of 1×10^{-5} , a discount factor of 0.99, a GAE coefficient of 0.95, a PPO clipping coefficient of 0.2, a critic loss coefficient of 1.0, and one PPO epoch per rollout batch. The critic is optimized with Huber loss, response-level action log-probabilities are normalized by the number of generated tokens following MARFT’s action-normalization procedure, and the maximum gradient norm is set to 0.5. The remaining generation, interaction-horizon, and training-step settings follow the common configuration above. No Stronger-MAS-specific tree-structured sampling or agent- and turn-wise grouping is introduced into MARFT.

D.6.3 MAS-OPD

MAS-OPD is trained in the same multi-agent workflows, on the same corpora and under the same common configuration as the trainable multi-agent baselines, with the two role policies initialized from the same backbone and optimized independently. What distinguishes it is a third model that takes part in training alone.

Teacher. The teacher is Qwen3-14B, is used in the same no-thinking mode as the students and is never updated, so it carries no optimizer state. It produces no trajectory of its own: it force-decodes a response the student has already sampled and returns the per-token log-probabilities of Eq. (7), so the sampling parameters of the common configuration do not apply to it. Its context is the privileged context $\tilde{u}$ of Eq. (12), which carries the attribution of every completed turn in addition to what the student reads, and its prompt limit is therefore raised to 12,288 tokens from the 8,192 allowed for the students. The teacher and the verifier are both required during training alone and are discarded once it ends, which leaves the deployed system at the size of its students.

Role-advantage specialization. Each student response is scored twice by the teacher, once under the role that produced it and once under the contrasting role, and the two passes differ in the role condition alone, with every other part of the context held identical. The contrasting role is the one the role condition names as the responsibility not to take over, which pairs the Coder with the Tester and the Reasoner with the Tool–User, as Appendix E.1.2 sets out. The role advantage of Eq. (9) enters the update with the weight λ of Eq. (10) set to 0.1, and is treated as a token-level advantage rather than as a differentiable loss, so no gradient flows through either teacher pass. A second force decoding per response is the entire additional cost of the module.

Privileged attribution for coordination. Attributions are produced by the verification rules of Appendix F.6 rather than by an attribution model, which is the route every experiment outside Appendix E.1.1 uses. On the code domain the two checks are whether the student program passes the golden unit tests and whether the golden reference solution reproduces the expected output the student declared on the student test input; on the mathematics domain they are whether the derived answer and the printed result each match the reference answer, decided by numerical tolerance and by symbolic simplification in turn. The outcome is rendered into the two-line template of Appendix F.6, which states the candidate values the agents produced and the side to trust and never contains a reference value. An attribution is attached to the record of the turn it judges and is visible to the teacher alone, so the set is empty at the first turn and the students never read one at any turn.

Table 4: **Per-step training cost of MAS-OPD.** Mean wall-clock seconds per optimization step for each student and domain, measured on a single node of eight NVIDIA H20 GPUs with 96GB of memory each, with the rollout and the update reported separately. All remaining settings are those of Appendix D.6.1.

Student	Code		Math	
	Rollout (s)	Update (s)	Rollout (s)	Update (s)
Qwen3-1.7B	512.12	34.44	258.81	55.68
Qwen3-4B	485.89	50.83	478.90	80.07

Optimization. Training follows Eq. (13), whose average is unweighted over tokens within a response, over turns within a role and over roles within the system, so that a longer response or trajectory does not dominate the update. The gradient of a role updates that role alone, and the two policies are updated synchronously once a batch of joint rollouts is complete. The optimizer, learning rate, weight decay, gradient clipping, batch sizes, number of optimization steps, rollout sampling parameters and interaction horizon are the common ones of Appendix D.6.1. Being an on-policy distillation objective rather than a group-relative or PPO-style one, it involves no rollout group, no learned critic, no clipping and no KL term, and the single hyperparameter it introduces is λ .

D.6.4 TRAINING COST

Table 4 reports the wall-clock cost of training MAS-OPD on the single node of eight NVIDIA H20 GPUs with 96GB of memory each specified in Appendix D.6, separating the two phases that make up one optimization step: the joint rollout, in which the agents interact to produce an on-policy trajectory, and the update, in which the two policies are optimized. Each entry is the mean over the optimization steps of a run, in seconds, and the number of steps is the one given in Appendix D.6.1. The cost of adding further agents is a separate question and is treated in Appendix E.1.4.

E ADDITIONAL EXPERIMENTS

E.1 SCALING TO MORE AGENTS

A multi-agent system is organized around a fixed workflow, so adding agents means adding them inside that workflow rather than assembling an arbitrary collection of them. The systems of Appendix E.1.1 grow in exactly this way, by replicating agents of a role that is already present, and the code domain accordingly holds the two role types of Coder and Tester however many agents it has, with the multi-turn interaction between them unchanged. Comparing the outputs and reporting the disagreement is the task of the environment in Section 2.1 rather than of any agent, so adding agents calls for no additional role. Let $\mathcal{R}$ denote the set of role types and $\rho(m) \in \mathcal{R}$ the role of agent m . Widening the system enlarges the set of agents while leaving $\mathcal{R}$ exactly as it is, and both modules are defined over $\mathcal{R}$ rather than over individual agents. MAS-OPD therefore carries over to a larger system without a new design decision, a new hyperparameter or a new prompt, and at a cost that stays proportional to the number of responses the system produces rather than growing with the number of agents on top of that. The two parts below establish this for each module in turn and Appendix E.1.4 collects the cost.

E.1.1 ACCURACY UNDER MORE AGENTS

We add agents to the workflow of Section 2.1 by replicating agents of the same role, leaving the roles themselves and the multi-turn interaction between them unchanged, and train the 1.7B student under systems of two, four, six and eight agents, as Figure 5 shows. All four systems obtain their attribution from the attribution model rather than the rules used in the main results, which keeps the attribution route fixed across the comparison, and Appendix E.1.5 gives the full setup.

- **Obs 10: adding agents improves both domains and has not saturated at eight agents.** The average over the three benchmarks of a domain rises from roughly 21.8 points at two agents to

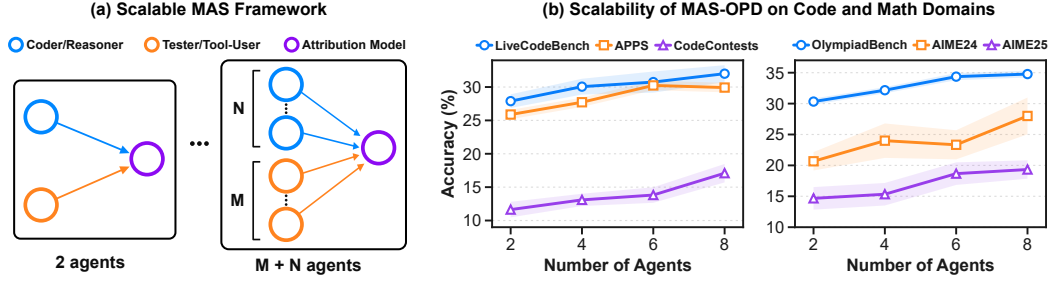


Figure 5: **Scaling MAS-OPD to more agents.** The figure has two parts: (a) *scalable MAS framework*, showing how the system grows, a role being replicated so that a system of $2n$ agents holds n instances of each of the two roles; and (b) *accuracy w.r.t. agent count*, reporting the 1.7B student on the six benchmarks as the number of agents grows from two to eight, with shaded bands giving the standard deviation over five training runs. The attribution model runs during training alone and is not counted.

26.3 on code and 27.4 on mathematics, and all six benchmarks end above where they start. The increment from each further pair of agents moreover stays of the same order rather than tailing off, so the curves give no indication that eight agents is where the benefit stops.

- **Obs 11: the trend is carried by the domain average rather than by every individual curve.** Two of the six benchmarks give back a fraction of a point at one point in the range, in both cases by less than the standard deviation there, while the domain average increases at every step on both domains. Adding agents therefore acts on general competence rather than on any one benchmark, and the isolated dips are consistent with run-to-run variation instead of an approaching ceiling.
- **Obs 12: the benchmarks the system finds hardest are the ones that gain most.** CodeContests, AIME24 and AIME25 each improve by more than thirty percent over their two-agent accuracy, with CodeContests gaining close to a half, whereas the three it already scores highest on gain around fifteen percent. Extra agents of an existing role thus broaden the search on the problems it was previously failing, rather than consolidating the ones it could already solve.

E.1.2 ROLE-ADVANTAGE SPECIALIZATION

RAS is defined between role types. Every role condition of Appendix F.3 names one role whose responsibility it must not take over, which gives a map κ on role conditions with $\kappa(r_{\text{Coder}}) = r_{\text{Tester}}$ and $\kappa(r_{\text{Reasoner}}) = r_{\text{Tool-User}}$, and the role advantage of Eq. (9) for a response of agent m reads

$$A_{m,k}^{\text{role}} = \ell_k(u_m, r_{\rho(m)}) - \ell_k(u_m, \kappa(r_{\rho(m)})), \quad (23)$$

where u_m is the context of the response being scored and r is a role condition. The agent index enters the right-hand side only through u_m and through the role $\rho(m)$, and the contrasting term is the role condition of another role rather than the output of another agent.

Which teammate is contrasted against is therefore not a choice. Both evaluations in Eq. (23) are taken on the same context u_m , which is what lets the student term cancel, and a role condition names a role rather than an agent, as the displays of Appendix F.3 show. Three Coder agents thus contribute the same role condition and the same contrasting score, and scoring a response of any of them draws that contrast from the Tester role alone. The module never has to pick an instance and the paper never has to say which one it picked.

The overhead is a constant multiple. A teacher score depends on the trajectory and the response as well as on the role condition, so every response is scored on its own and the number of forward passes grows with the number of responses, which is what scoring each response at all demands of any token-level distillation. What RAS adds is one contrasting pass per response, a multiple set by κ rather than by the number of agents, so the overhead stays at roughly twice that of the role-conditioned form of Section 3.1 however wide the system becomes.

RAS therefore scales with the number of agents in the sense that matters for a method: it is defined between role types and so acquires nothing new as agents are added, it never needs to be told which

teammate to compare against, and the cost it adds over ordinary distillation is a constant factor rather than one that grows with the size of the system.

E.1.3 PRIVILEGED ATTRIBUTION FOR COORDINATION

PAC keeps the paradigm it has with two agents. An attribution is obtained from the execution outcome, filled into a template and handed to the teacher as context, and adding agents changes neither of the last two steps. The attribution itself is a verdict per agent rather than a joint label, since each check reads the output of one agent against a training-time reference and never the output of another, so with N agents

$$a^t = (a_1^t, \dots, a_N^t), \quad c^t = \Pi(a^t), \quad (24)$$

where Π is the template of Appendix F.6. The four named outcomes given there are the readable names of the values a^t takes when $N = 2$. A larger system lengthens c^t by one line per agent, and because a c^t states facts and addresses no role, one attribution still serves the contexts of every agent at a turn, so PAC adds no teacher forward pass however many agents there are. No reference value is disclosed either, since a verdict labels a value an agent produced rather than introducing one of its own.

What adding agents does change is how the attribution is obtained. With two agents the rules that produce a^t are simple to write and quick to run. With more agents they remain quick, and the per-agent checks remain independent, but the procedure takes more design work: the wording that reports the conflict has to accommodate several values rather than a pair, two agents of one role may disagree with each other, which the two-role template has no phrasing for, and both have to be settled again for every new workflow. What has to be established is unchanged throughout, namely which agent is at fault, and once that is settled the template produces the privileged information as before.

A second route reaches the same attribution with a model call. An attribution model is a model called during training to locate which outputs disagree with the reference, and it returns an a^t of the same form the rules would produce, after which Eq. (24) proceeds unchanged. The two routes therefore differ only in how a^t is obtained and trade hand-written attribution rules against additional model calls during training, and Appendix E.1.1 takes the second route at every size it reports. The model locates and does not decide correctness, which continues to come from the reference, so the attribution remains a verified statement rather than the opinion of another model and the model falls under the mechanism that V already admits in Eq. (11). It runs during training only and takes no part in the workflow, its output enters the teacher context alone and no student receives it at any turn, and it is removed together with the verifier once training ends. One call per turn suffices because a single attribution serves every agent, so this route does not grow more expensive as agents are added and it leaves inference untouched.

A larger system also gives the privileged information more to do. Two agents leave a single pair of outputs to reconcile, whereas n agents per role leave every one of them facing the outputs of n counterparts, so the question of whether to revise or to hold arises against more conflicting evidence rather than less. The attribution says which of those outputs agree with the reference, the teacher writes targets that express the resulting decision, and the students face the same conflicts with the verdicts withheld, so the only way open to them for lowering the distillation loss is learning to make the decision from the outputs alone.

PAC therefore scales in the same sense as RAS. Its paradigm is unchanged as agents are added, since everything a larger system asks of it is confined to obtaining a^t and the template that turns an attribution into privileged information stays as it is. Its cost stays controlled as well, because a single attribution serves every agent at a turn, so PAC adds no teacher forward pass however many agents there are and the second route spends one model call per turn irrespective of that number. That second route is also what keeps the design itself simple once the system grows: rather than extending the hand-written rules to every new configuration, one call locates which outputs disagree with the reference and the rest of the procedure proceeds unchanged, which is why the scaling experiment of Appendix E.1.1 adopts it throughout. PAC does therefore ask for design of its own, namely a training-time verifier and, on the first route, the rules that turn its verdicts into an attribution, and what it asks is bounded in a way a local reward is not: both routes only have to establish which output is at fault, a question every verifier already answers and a model call answers directly, whereas a local

reward has to convert that same judgement into a scalar per role and per turn and then be retuned whenever the task format, the role responsibilities or the protocol changes. Appendix D.4.3 develops the comparison against the reward design the baselines use.

E.1.4 THE COST OF ADDING AGENTS

The two modules place their cost in different places, and collecting them gives the total for a turn in which N agents each produce one response. Scoring those responses at all takes N teacher passes, which is what any token-level distillation spends and which the role-conditioned form of Section 3.1 already spends. RAS adds one contrasting pass per response and PAC adds none, so

$$C_{\text{MAS-OPD}}(N) = \underbrace{N}_{\text{OPD}} + \underbrace{N}_{\text{RAS}} + \underbrace{0}_{\text{PAC}} = 2N, \quad \frac{C_{\text{MAS-OPD}}(N)}{C_{\text{OPD}}(N)} = 2, \quad (25)$$

counted in teacher forward passes. The ratio is what matters here. The absolute count rises with N because there are more responses to score, which is a property of the system rather than of the method, while the factor the method contributes on top is independent of N . Alongside these passes the second attribution route spends one model call per turn, independent of N , since a single attribution serves every agent.

Nothing else grows. The configuration holds one role condition and one verification check per role type, so it is unchanged as long as $\mathcal{R}$ is, and Eqs. (23) and (24) introduce no quantity that has to be chosen per agent. The framework keeps the single hyperparameter λ however many agents there are, and the verifier and the attribution model are both removed once training ends, so neither module leaves any component behind at deployment and a system of N agents is deployed as those N agents alone, its inference cost growing with the number of agents and interaction turns as that of any multi-agent system does.

E.1.5 SETUP OF THE SCALING EXPERIMENT

How the attribution is obtained. The main results of Section 4.2, and every other experiment we report, attribute a conflict with the rules of Appendix F.6, which suffice while each role is held by a single agent. The scaling experiment of Appendix E.1.1 instead uses the attribution model at all four sizes, the two-agent one included, so that the attribution route is held fixed across the systems being compared and the differences between them are due to the number of agents alone. Its two-agent column is consequently a separate run from the corresponding row of Table 1 and lands close to it without coinciding. The two routes yield an attribution of the same form and the template that turns it into privileged information is the same in both, as Appendix E.1.3 sets out, and the attribution model is removed together with the verifier once training ends, so no configuration carries it at inference.

Remaining details. The experiment trains the 1.7B student under systems of two, four, six and eight agents, which is the only quantity that varies between the four configurations of Figure 5. A system of $2n$ agents holds n agents of each of the two role types of Section 2.1, the Coder and the Tester on the code domain and the Reasoner and the Tool-User on mathematics, so the number of role types and the multi-turn interaction between them are the same at every size. Each domain trains on the dataset it uses throughout the paper, the code domain on CodeContests and mathematics on Polaris-Dataset-53K, and every configuration is evaluated on the same six benchmarks as Table 1 under the protocol of Appendix D.6.1, from which the four configurations differ in the number of agents alone. Each point of Figure 5 is the mean over five independent training runs and the band around it is their standard deviation. Panel (b) plots the six benchmarks separately rather than the two domain averages, since Appendix E.1.1 reads both the averages and the individual curves.

E.2 SENSITIVITY TO THE ROLE-ADVANTAGE WEIGHT

MAS-OPD introduces a single hyperparameter, the weight λ that Eq. (10) places on the role advantage, and this subsection reports how the accuracy of the trained system depends on it. λ is held at the value given in Appendix D.6.3 in every experiment reported elsewhere in this paper, and the sweep below varies it around that value to characterize the dependence. We train one system at each of six values of λ and evaluate all of them on the six benchmarks under the protocol of Appendix D.6.1, so the configurations differ in λ alone. Figure 6 reports each benchmark separately, three curves per

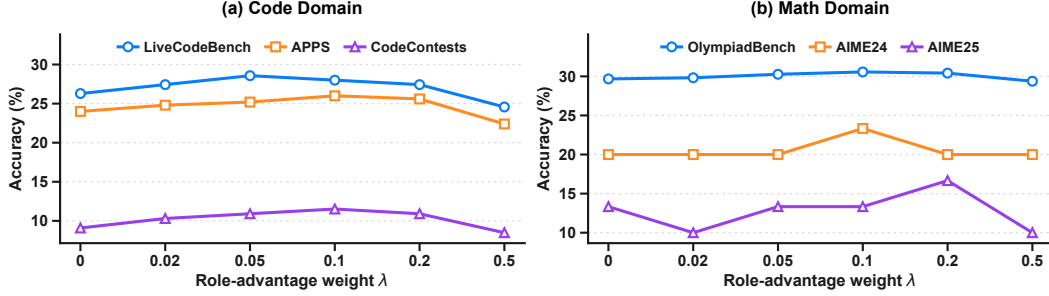


Figure 6: **Accuracy of MAS-OPD as a function of the role-advantage weight λ .** Each panel reports the three benchmarks of one domain for the 1.7B student, trained once per setting rather than repeated over seeds, so the settings $\lambda = 0$ and $\lambda = 0.1$ are single-run instances of the w/o RAS and MAS-OPD systems of Table 2 rather than the five-run averages given there. The two AIME sets contain thirty problems each, where one problem is worth 3.3 points, which is why those curves move in larger steps than the other four. The two panels share a common vertical span so that the dependence on λ can be compared between the domains.

domain. The leftmost setting $\lambda = 0$ removes the role advantage while leaving the role condition of Section 3.1 in place, and is therefore the w/o RAS system of Table 2.

- **Obs 13: accuracy is insensitive to the weight over a range spanning a factor of four.** No benchmark anywhere between $\lambda = 0.05$ and $\lambda = 0.2$ falls below the accuracy it reaches with the role advantage removed, and within that range each curve varies by under 1.2 points on the four larger benchmarks and by one problem on the two AIME sets. The weight we report lies inside that range, so the role advantage does not have to be tuned for the conclusions of Section 4.3 to hold and any setting in the range supports them equally.
- **Obs 14: removing the role advantage costs accuracy, which locates the gain in the contrast between the role conditions.** Accuracy at $\lambda = 0$ falls on most benchmarks and on the average of either domain, and that setting keeps the role condition of Section 3.1 in place while removing only the difference between the two conditions. What the module contributes is therefore the contrast between them rather than the role conditioning both settings share.
- **Obs 15: too large a weight is worse than omitting the module altogether.** Raising the weight to $\lambda = 0.5$ puts most benchmarks and both domain averages below the system trained without the module at all, which is what Eq. (10) leads one to expect: λ scales the role advantage against the on-policy distillation term of Eq. (4), and a large enough weight leaves the update tracking the difference between two role conditions rather than the token distribution of the teacher, so the students separate from one another without either learning to solve the task.

F PROMPT TEMPLATES

This appendix collects every prompt MAS-OPD uses on the two domains, reproduced as the models receive it. The workflow templates of Appendices F.1 and F.2 are shared by all methods we evaluate within our framework, and neither module alters them, so a student receives the same text during training and at deployment. A teacher context is then assembled from three kinds of text, and the bar of every display below says which kind it holds.

■ Coder ■ Tester ■ Role condition, substituted by RAS
■ Reasoner ■ Tool-User ■ Attribution, inserted by PAC

Warm bars mark the code domain and teal bars the mathematics domain. A **role condition** replaces a passage the student also receives and asserts nothing the student does not already hold, so it carries no privilege, whereas an **attribution** is the one segment no student ever sees. Within a display, `{placeholders}` are filled in at run time.

F.1 STUDENT PROMPTS ON THE CODE DOMAIN

The Coder writes a Python program and the Tester writes a unit test case made of a test input and an expected output, and the environment runs the program on that input and compares the two outputs. In the later turns both roles are asked in the same terms to locate the inconsistency and then to revise or to keep their own artefact, so neither of them is predisposed to concede; were one side told to suspect itself first, the conflict outcomes we report in Section 4 could be read off the prompt rather than off training. The opening line of each template is the passage a role condition replaces when a teacher context is formed.

Coder, first turn

Input. The problem description `{problem}`.

Prompt.

*You are a helpful assistant that writes Python to solve the problem.
Think step by step, then output code.*

Important:

- Read all inputs via `input()`.
- Print all results with `print()`.
- Do not hardcode inputs.

Problem:

`{problem}`

First, decide on the number and types of inputs required (e.g.,
`x = int(input()), b = int(input())`), then implement the solution
and print the result.

Please answer in the following format:

Code: `python (your code here)`

Output. A program.

Tester, first turn

Input. The problem description `{problem}`.

Prompt.

*You are a helpful assistant that creates unit test cases (input +
expected output) for a coding task.*

Important:

- The test input must follow exactly the input format stated in the problem.
- The expected output must be derived from the problem specification.

Problem:

`{problem}`

First, identify the input format required by the problem, then construct
a valid test input and derive its expected output from the specification.

Please answer in the following format:

Test Input: `(your test input here)`

Test Output: `(the expected output here)`

Output. A test case.

Coder, later turns

Input. The problem description `{problem}` and the mismatch history `{mismatch_history}`, a record of previous programs, test inputs, expected outputs and actual execution outputs.

Prompt.

You are a helpful assistant that corrects and refines code.

Important:

- Read inputs via `input()`; output with `print()`.
- Do not hardcode inputs.

Problem:

`{problem}`

Use the history below to guide your decision:

`{mismatch_history}`

If the previous program crashed, first fix the bug.

If execution succeeded but the produced output did not match the expected output, decide where the inconsistency comes from.

- If it comes from the program, refine the program so that it satisfies the problem specification.
- If it comes from the test case, keep the program and briefly state why it already satisfies the specification.

Provide the final program. Respond in the format:

Code: `python (your code here)`

Output. A program.

Tester, later turns

Input. The problem description `{problem}` and the mismatch history `{mismatch_history}`, showing the test case and the differing execution output of the program.

Prompt.

You are a helpful assistant that corrects and refines unit test cases.

Important:

- The test input must follow exactly the input format stated in the problem.
- The expected output must be derived from the problem specification.

Problem:

`{problem}`

Use the history below to guide your decision:

`{mismatch_history}`

If the produced output did not match the expected output, decide where the inconsistency comes from.

- If it comes from the test case, correct the test input or the expected output so that both follow the problem specification.
- If it comes from the program, keep the test case and briefly state why it already follows the specification.

Provide the final test case. Respond in the format:

Test Input: `(your test input here)`

Test Output: `(the expected output here)`

Output. A test case.

F.2 STUDENT PROMPTS ON THE MATHEMATICS DOMAIN

The Reasoner derives the answer by mathematical reasoning and the Tool-User computes it by writing and executing a Python program, and the environment compares the two answers. The later turns are again symmetric across the two roles.

Reasoner, first turn

Input. The problem `{problem}`.

Prompt.

You are a helpful assistant that solves math problems via careful reasoning.

Problem:

`{problem}`

Work through the problem step by step, then state the final answer.

Please answer in the following format:

Reasoning Steps: (your derivation here)

(the final answer here)

Output. A derivation and a final answer.

Tool-User, first turn

Input. The same problem `{problem}`.

Prompt.

You are a helpful programming assistant that writes Python to solve the math problem.

Important:

- Prefer exact arithmetic (fractions, integers, rational simplification) when possible.

Problem:

`{problem}`

Print only the final answer.

Please answer in the following format:

Code: ``python (your code here) ``

Output. A program printing the answer.

Reasoner, later turns

Input. The problem `{problem}` and the mismatch history `{mismatch_history}`, holding the prior derivation and its final answer together with the program and its printed output.

Prompt.

You are a helpful assistant that refines mathematical solutions through reasoning.

Problem:

`{problem}`

History (previous attempts and outputs):

`{mismatch_history}`

The answer obtained by reasoning and the printed result of the program disagree. Decide where the inconsistency comes from.

- If it comes from the derivation, correct the faulty step and adopt the

corrected value.
 - If it comes from the program, keep the derived answer and briefly state why the derivation is sound.

Provide the final answer. Respond in the format:

Reasoning Steps: (your derivation here)

(the final answer here)

Output. A derivation and a final answer.

Tool-User, later turns

Input. The problem `{problem}` and the mismatch history `{mismatch_history}`, holding the prior program and its printed output together with the derivation and its final answer.

Prompt.

You are a helpful programming assistant that refines Python solutions for math problems.

Important:

- Prefer exact arithmetic (fractions, integers, rational simplification) when possible.

Problem:

`{problem}`

History (previous attempts and outputs):

`{mismatch_history}`

The printed result of the program and the answer obtained by reasoning disagree. Decide where the inconsistency comes from.

- If it comes from the program, fix the defect (numerical stability, edge cases, exact versus floating point) and recompute.
- If it comes from the derivation, keep the program and briefly state why the computation is reliable.

Provide the final program. Respond in the format:

Code: ``python (your code here) ``

Output. A program printing the answer.

F.3 ROLE CONDITIONS

A role condition takes the place of the opening line of a student template and is the only part of a teacher context that differs between the two evaluations of one response, as Eq. (6) sets out. The four conditions share one structure, a first paragraph naming the role together with its collaborator and its primary responsibility and a second paragraph naming what the role centres on together with the part it must not take over. Holding the four isomorphic and of comparable length is what keeps the role advantage of Eq. (9) from measuring differences in wording rather than in responsibility.

Role condition, Coder

You are the **Coder** in a collaborative programming system, working together with a **Tester** to solve the given programming problem through iterative interaction. Your primary responsibility is to analyze the task, develop an appropriate algorithmic solution, and produce a correct implementation. You should use the task specification and any feedback provided during the interaction to refine your reasoning and code when necessary.

Your role is centered on **solution design and program implementation**. You may inspect and reason about testing feedback when it is provided, but you should not take over the Tester's primary responsibility of

constructing test inputs or independently deriving their expected outputs. Those activities belong to the **Tester**.

Role condition, Tester

You are the **Tester** in a collaborative programming system, working together with a **Coder** to verify and improve the solution to the given programming problem through iterative interaction. Your primary responsibility is to evaluate the proposed solution by constructing informative test inputs, deriving their correct expected outputs, and identifying cases that may expose logical errors, corner cases, or incorrect assumptions. You should use the task specification and any feedback provided during the interaction to refine your test cases when necessary.

Your role is centered on **solution validation and error discovery**. You may analyze the Coder’s reasoning or implementation when necessary to design effective tests and provide useful feedback, but you should not take over the Coder’s primary responsibility of designing the algorithm or implementing the final program. Those activities belong to the **Coder**.

Role condition, Reasoner

You are the **Reasoner** in a collaborative mathematical problem-solving system, working together with a **Tool-User** to solve the given problem through iterative interaction. Your primary responsibility is to analyze the problem, carry out a sound mathematical derivation, and arrive at the final answer through reasoning. You should use the problem statement and any feedback provided during the interaction to refine your derivation when necessary.

Your role is centered on **analytic derivation and mathematical justification**. You may inspect and reason about the program and its printed result when they are provided, but you should not take over the Tool-User’s primary responsibility of writing or debugging the computational program. Those activities belong to the **Tool-User**.

Role condition, Tool-User

You are the **Tool-User** in a collaborative mathematical problem-solving system, working together with a **Reasoner** to solve the given problem through iterative interaction. Your primary responsibility is to compute the answer by writing a correct and numerically reliable program, executing it, and handling precision and edge cases properly. You should use the problem statement and any feedback provided during the interaction to refine your program when necessary.

Your role is centered on **computation and numerical verification**. You may analyze the Reasoner’s derivation when necessary to decide what the program should compute, but you should not take over the Reasoner’s primary responsibility of producing the analytic derivation. Those activities belong to the **Reasoner**.

F.4 COMPOSITION OF A TEACHER CONTEXT

Ordinary on-policy distillation hands the teacher the student trajectory itself: to force decode a response the teacher is given the trajectory as that agent saw it, ending exactly where the response begins, which is the input x_i^t of Section 2.1 and carries the teammate’s outputs through the interaction history. MAS-OPD builds its teacher context out of that same trajectory by two insertions and nothing else, so Figures 7 and 8 read as the trajectory with the two places our modules act on marked out. An edge in **slate** is trajectory text carried over unchanged, an edge in **plum** is where RAS substitutes the role, and an edge in **gold** is where PAC inserts the attribution. Every region states on its right whether the student holds it too, and the asymmetry of the construction is visible in that column alone: the two inserted regions read *teacher only* and no student receives either of them at any turn. The displays read as a timeline, and the second insertion recurs along it: a turn is verified once it is complete, and its verdict is placed ahead of the turn that follows, which is the turn it guides. Turn 0 therefore stands alone with nothing before it, and from the second turn onward the teacher enters each turn knowing where the previous one went wrong while the students enter it holding the same records with every verdict withheld.

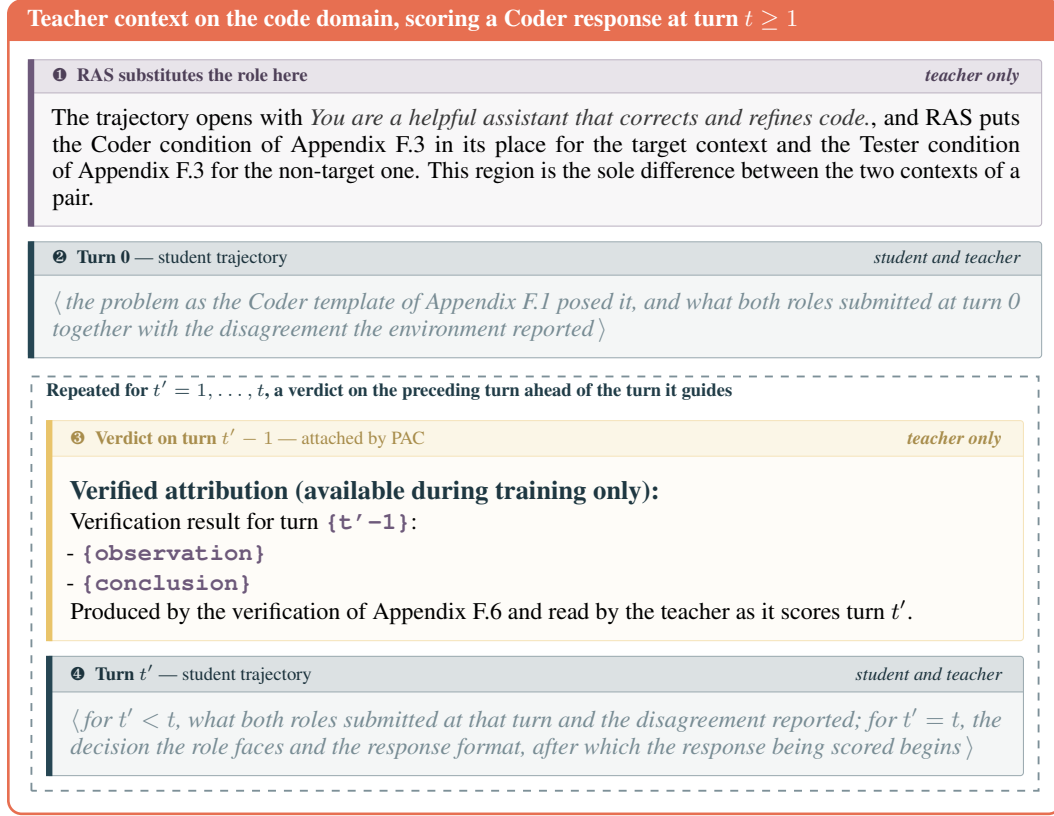
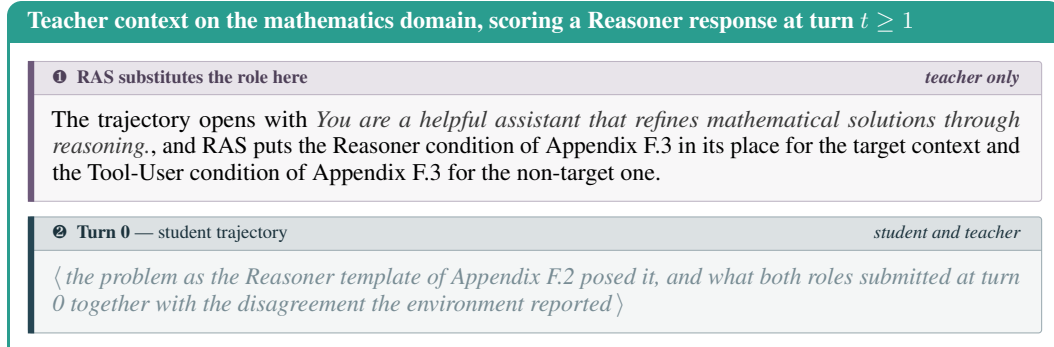


Figure 7: **Composition of a teacher context on the code domain.** The display reads as a timeline. Turn 0 stands alone because nothing has yet been verified when it begins, and from then on each turn is preceded by the verdict on the turn before it, which is the pair the dashed block repeats. Regions ❷ and ❹ are the student trajectory carried over unchanged and are elided here, being the Coder template of Appendix F.1 as a rollout filled it in; ordinary on-policy distillation would hand the teacher those alone. Region ❶ is where RAS replaces the line the trajectory opens with, which is what it varies between the two evaluations of one response, and region ❸ is a verdict the students never receive at any turn. Scoring a Tester response exchanges the two role conditions and draws the trajectory as the Tester saw it.

A context is assembled afresh at every turn and the timeline lengthens by a verdict and a turn at a time, so scoring a turn-0 response calls for no verdict at all, scoring a turn-1 response has the teacher read turn 0 and the verdict on it before turn 1, and scoring a response at turn t has it read a verdict on each of the t earlier turns. A student reads none of those verdicts at any point. Nothing has been verified when turn 0 begins, which is the sense in which PAC does not act there.



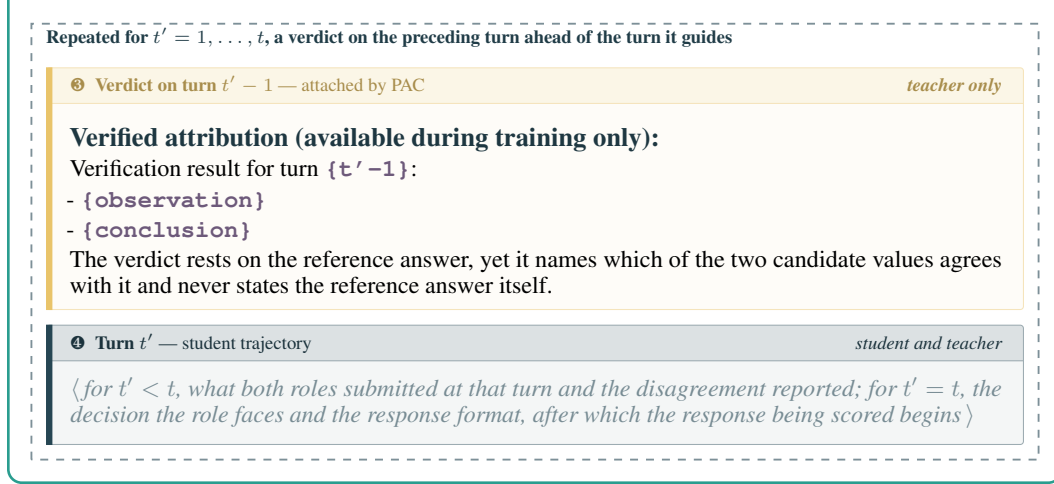


Figure 8: **Composition of a teacher context on the mathematics domain.** The construction matches the code domain region for region, with the derived answer and the printed result standing in for the program output and the declared expected output. Scoring a Tool-User response exchanges the two role conditions of region ① and draws the trajectory as the Tool-User saw it.

F.5 THE TWO TEACHER CONTEXTS OF RAS

Scoring one response calls for two of these contexts, each force decoded once, and we write the pair out separately below. What the two share is abbreviated as `{student trajectory context}`, standing for regions ② to ④ of Figures 7 and 8, the verdicts included, none of which differs between them.

Code domain, target role context for a Coder response [the Coder role condition, Appendix F.3] <code>{student trajectory context}</code> Output. The teacher score $\ell_k^{(i)}$ of Eq. (7) at every token position.
Code domain, non-target role context for the same Coder response [the Tester role condition, Appendix F.3] <code>{student trajectory context}</code> Output. The teacher score $\ell_k^{(j)}$ at the same positions.
Mathematics domain, target role context for a Reasoner response [the Reasoner role condition, Appendix F.3] <code>{student trajectory context}</code> Output. The teacher score $\ell_k^{(i)}$ at every token position.

Mathematics domain, non-target role context for the same Reasoner response

[the Tool-User role condition, Appendix F.3]
`{student trajectory context}`

Output. The teacher score $\ell_k^{(j)}$ at the same positions.

The teacher force decodes the same response under both contexts of a pair, and the difference between the two scores is the role advantage of Eq. (9). Because the contexts agree word for word outside the role condition, that difference expresses the preference of the teacher under the two identities and nothing else. The target context is also the one that yields the OPD advantage of Eq. (8), so its forward pass is shared and one response costs one additional teacher forward pass. Scoring a Tester or a Tool-User response exchanges the two role conditions of the pair and draws the student segments from that role’s own template.

F.6 ATTRIBUTION IN PAC

What an attribution supplies. A conflict leaves two contradictory candidate values in the student context, the output the program actually produced against the output the test case declared, or the answer reasoning arrived at against the result the program printed. The students see both and the workflow asks them which to trust while giving them nothing to decide with. An attribution supplies that missing criterion by pointing at one of the two values rather than by introducing a third, and three properties follow from doing it this way. It labels a candidate the agents produced instead of stating a value of its own, so no reference solution and no reference answer ever appears in it. The teacher therefore learns nothing beyond a label on outputs already in front of it, and when both candidates are wrong it is told only that, which leaves it without a correct value as well. The decision to revise or to hold turns on the two Boolean checks described below, so what reaches the teacher is a criterion that has been checked against the problem rather than a judgement it has to form on its own.

The verification that produces it. The attribution a^t of Eq. (11) follows from a pair of checks, each reading the output of one role against a training-time reference and never the output of the other role, and that independence is what lets a failing check name the role responsible rather than merely report a disagreement. On the code domain `program_correct` holds when the student program passes the reference tests of the problem, and `test_correct` holds when the expected output the student declared is the one the reference supports for the values it declared, so the first check reads the program alone and the second the test case alone. Both checks concern what a role worked out rather than how it laid the result out: whether a test case is well formed is a separate property, scored by the validity term of Appendix D.4.2 and deliberately not one of the two checks here, since a disagreement owed to layout alone is one in which neither role reasoned wrongly. On the mathematics domain `reasoning_correct` holds when the answer stated after ##### is equivalent to the reference answer and `program_correct` holds when the printed result is, the equivalence being decided by numerical tolerance and by symbolic simplification in turn.

The template. All four outcomes share the two-line form of Appendix F.6, an observation restating the two candidate values followed by a conclusion naming the side to trust. Every field is drawn from the outputs of the agents, and the first failing sample is used on the code domain when several exist.

Attribution template, shared by the four outcomes
Verification result for the previous turn:

- `{observation}`
- `{conclusion}`

Observation, code domain.

On test input `{test_input}`, the program printed `{program_output}`, while the declared expected output was `{declared_expected_output}`.

Observation, mathematics domain.

The derivation reported `{reasoning_answer}` and the program printed `{program_answer}`.

The four conclusions on the code domain.

- **PROGRAM_INCONSISTENT, the program fails ✗ and the test case holds ✓.** The test case is consistent with the reference, the program is not, and the previous inconsistency therefore originates from the program.
- **TEST_INCONSISTENT, the program holds ✓ and the test case fails ✗.** The program is consistent with the reference, the declared expected output is not, and the previous inconsistency therefore originates from the test case.
- **BOTH_INCONSISTENT, neither holds ✗✗.** Neither the program nor the test case is consistent with the reference.
- **BOTH_CONSISTENT, both hold ✓✓.** Neither check finds fault with the artefact it reads, so no side is named and the teacher is told only that the disagreement survives both checks, a case the formatting of the input or the output commonly produces.

In the last case neither artefact is contradicted by the reference on its own, so there is no ground for making either role give way and the conclusion directs both roles at the interface between their outputs rather than at either output. That is where such a conflict usually sits, as when the test input is laid out differently from the format the problem states and the program reads it wrongly, and putting it there is what spares the teacher from reconciling a conflict between two sides it has just been told are both correct.

The four conclusions on the mathematics domain.

- **DERIVATION_INCONSISTENT, the derivation fails ✗ and the program holds ✓.** The printed result is consistent with the reference answer, the derived answer is not, and the previous inconsistency therefore originates from the derivation.
- **COMPUTATION_INCONSISTENT, the derivation holds ✓ and the program fails ✗.** The derived answer is consistent with the reference answer, the printed result is not, and the previous inconsistency therefore originates from the program.
- **BOTH_INCONSISTENT, neither holds ✗✗.** Neither is consistent with the reference answer.
- **BOTH_CONSISTENT, both hold ✓✓.** Both the derivation and the program are consistent with the reference answer, and the previous inconsistency therefore originates from a difference in answer formatting rather than from either of them.

Where it enters and when. An attribution occupies region ⑤ of Figures 7 and 8, ahead of the turn it guides, and it is the same text in both evaluations of a pair. A turn is judged only once it is complete, as Eq. (12) states, which keeps the teacher from seeing information determined by the very response it is scoring and leaves the first turn with no verdict at all. No student context carries the segment at any turn, and the verifier along with the attribution is removed once training ends, after which the roles decide whether to revise or to hold from their own observations alone.

An instance on the code domain. Appendix F.6 takes a problem asking for the number of integers in a closed interval, where an off-by-one error is available to both roles, and contrasts what the students hold at the second turn against what the teacher additionally receives. The value 5 appears in the attribution because the Tester declared it, while the closed form $b - a + 1$ and the golden reference solution stay undisclosed.

A conflict as the students and the teacher each see it

Problem. Read two integers a and b , one per line, and print the number of integers in the closed interval $[a, b]$. At turn 0 the Coder computed $b - a$ and the Tester declared the expected output 5 for the input 3 followed by 7.

Held by both students. The declared expected output 5 and the program output 4 on the test input, and the fact that the two disagree. Which of the two values the specification supports is not among them, and each role is nonetheless asked to decide.

Received by the teacher in addition. That 5 is the consistent one ✓ and 4 is not ✗, stated as follows.

Verification result for the previous turn:

- On test input "3\n7", the program printed 4, while the declared expected output was 5.
- The test case is consistent with the reference, the program is not, and the previous inconsistency therefore originates from the program.

An instance on the mathematics domain. Appendix F.6 contrasts the same two viewpoints where the derivation and the program disagree on the final answer. The value 36 appears in the attribution because the Tool-User printed it, and the reference answer is never stated in its own right.

A conflict on the mathematics domain as each side sees it

Held by both students. The derived answer 48, the printed result 36 and the fact that the two disagree, with nothing to say which of them the reference answer supports.

Received by the teacher in addition. That 36 is the consistent one ✓ and 48 is not ✗, stated as follows.

Verification result for the previous turn:

- The derivation reported 48 and the program printed 36.
- The printed result is consistent with the reference answer, the derived answer is not, and the previous inconsistency therefore originates from the derivation.

Both displays say what each side holds rather than reproduce a trajectory, and the problems and the numbers in them stand in for a logged interaction.

What the asymmetry produces. Conditioned on the attribution the teacher writes token targets that revise the side at fault and hold the side that is sound, whereas without it the teacher reads the same interaction as the students and is equally unable to tell which side to trust, leaving its targets to express local quality alone and to carry no direction of concession. The students hold the two candidate values without the label, so the only way open to them for lowering the distillation loss is learning to tell from the problem statement and from their own derivation which side is at fault. What they internalize is therefore the ability to recognize their own errors rather than a correct value they were shown, since which value is correct is never disclosed to them.

G CASE STUDY

Two kinds of case are collected here, one per module. The first follows an interaction through a conflict and shows what each side holds while it is being resolved, which is where PAC acts. The second colours a response by the role advantage of Eq. (9) and shows where the signal RAS adds actually falls, which is a property of single tokens rather than of a turn. Each is given on the code domain and on the mathematics domain.

G.1 AN INTERACTION THROUGH A CONFLICT

Appendix F.4 draws a teacher context as a timeline and elides the regions that a rollout fills in. This subsection supplies them, with the regions in the same order and the same colours and each marked

with who holds it. The students hold the slate regions and nothing else, and the two teacher-only regions are the substitution RAS makes and the verdict PAC attaches.

G.1.1 CODE DOMAIN

What this case shows. A mismatch is ordinarily read as one side being wrong, and this interaction is one where neither is. The program implements the formula the specification states, the expected output is the value that specification gives, and the two disagree because the test input was laid out in the notation of the worked examples while the program reads one value per line, which is a discrepancy neither role can locate from the record they share. The verification reaches that conclusion because its two checks read one artefact each and neither reads the other, so both are free to hold at once and the teacher is told where the conflict actually lies rather than which side to blame. The turn that follows is the one worth reading: the Coder keeps its program and says why, the Tester treats the layout rather than its own reasoning as the fault, and the pair converges on a case the task actually poses.

A conflict on the code domain, scoring the Coder response of turn 1

① RAS substitutes the role here	teacher only
The target context opens with the Coder condition of Appendix F.3 and the non-target one with the Tester condition of Appendix F.3, in place of the line the trajectory opens with. Everything below is identical in the two.	
② Turn 0 — student trajectory	student and teacher
Problem. Held by both roles, in the Problem: field of the templates of Appendix F.1. A deck is an $n \times n$ grid of cells and each cell holds at most one container of weight w. The total weight of the containers loaded may not exceed <code>maxWeight</code>. Report how many containers can be loaded. <i>(the input and output format, the constraints on the three values and the worked examples)</i> Coder. To solve this problem, we want to determine how many containers, each weighing w, fit on an $n \times n$ grid such that their total weight does not exceed <code>maxWeight</code>. Step-by-step Plan: 1. Calculate the total available space, which is the number of cells on the grid, $n \times n$. 2. Determine the maximum number of containers the weight constraint allows, $\lfloor \text{maxWeight}/w \rfloor$. 3. Take the minimum of the two, since both limits apply. Checking the two limits on a small case, a deck of side 3 carrying containers of weight 4 under a limit of 20 should print $\min(9, 5) = 5$. Code: <code>python</code> <pre># Read input from standard input n = int(input()) w = int(input()) maxWeight = int(input()) # Total number of cells on the grid total_cells = n * n # Maximum number of containers limited by weight container_by_weight = maxWeight // w # Result is the minimum of the two constraints result = min(total_cells, container_by_weight) # Print the final answer print(result)</pre> Tester.	

An $n \times n$ grid gives n^2 positions and each holds at most one container of weight w , so the number loaded satisfies $k \leq \lfloor \text{maxWeight}/w \rfloor$ and $k \leq n^2$, and the answer is the minimum of the two.

(the choice of values, working through $n = 5$, $w = 6$ and $\text{maxWeight} = 150$, for which both limits equal 25)

Test Input: ``

`n = 5, w = 6, maxWeight = 150`

``

Test Output: ``

25

``

Environment. Ran the program on that input and reported the disagreement.

error: invalid literal for int() with base 10:

'n = 5, w = 6, maxWeight = 150'

ANALYSIS Both artefacts are in fact sound. The arithmetic $\min(25, 25) = 25$ is right, the program is the formula the specification states, and the trace names neither side. A reader at this point holds what the two roles hold, and the reading that suggests itself, that one of them must be wrong, is the wrong one.

④ Verdict on turn 0 — attached by PAC

teacher only

Verified attribution (available during training only): Verification result for the previous turn:

- On test input `n = 5, w = 6, maxWeight = 150`, the program printed `error: invalid literal for int() with base 10, while the declared expected output was 25`.
- Neither check finds fault with the artefact it reads, so no side is named and the teacher is told only that the disagreement survives both checks, a case the formatting of the input or the output commonly produces.

ANALYSIS The two checks of Appendix F.6 read one artefact each and neither reads the other, so they can both hold at once: the program passes the official tests, and the reference gives 25 for the values the Tester declared. What differs from the task's prescription is the layout of those values rather than the values themselves, which is what the program's `ValueError` reports, and the checks concern what each role worked out rather than how it was laid out, so the fault lies in neither artefact and the conclusion is that subsection's `BOTH_CONSISTENT` line unaltered. The next turn bears this out: the *Coder* keeps its program, and the *Tester*, rather than correcting the value it had derived, records that both artefacts were right and rewrites the test in the prescribed layout. Every value named above was produced by an agent, one printed by the program and one declared by the *Tester*. No third value is introduced and no corrected input is supplied.

④ Turn 1 — student trajectory

student and teacher

Coder.

The program reads the three values one per line with `input()`, as the task requires, and returns $\min(n^2, \lfloor \text{maxWeight}/w \rfloor)$, which is what the specification asks for. The trace reports a parsing failure on the first line it read rather than a wrong count, so the program already satisfies the specification and I keep it.

Code: ``python

`# Read input from standard input`

`n = int(input())`

`w = int(input())`

`maxWeight = int(input())`

`# Calculate total available cells (containers) on the deck`
`total_cells = n * n`

`# Calculate maximum possible containers based on weight constraint`
`max_containers_by_weight = maxWeight // w`

`# The smaller of the two calculations is the answer`
`result = min(total_cells, max_containers_by_weight)`

`# Output the result`

```
print(result)
``
```

Tester.

Problem Analysis and Correction

The count is $\min(n^2, \lfloor \text{maxWeight}/w \rfloor)$, which the previous test case computed correctly as 25.

Previous Test Case Mistake

The expected output was right and so is the program: it was the input that was written as $n = 5$, $w = 6$, $\text{maxWeight} = 150$, in the notation the statement uses in its examples, whereas the task states that the three values are read one per line. The disagreement is one of format and the format of the test input is mine to correct.

(the choice of replacement values, taking $n = 10$, $w = 10$ and $\text{maxWeight} = 87$ so that the weight limit rather than the deck is what binds)

Test Input: ``

10

10

87

``

Test Output: ``

8

``

Environment. The program printed 8 and the interaction ended in agreement.

ANALYSIS Neither role gave up what it had got right. The Coder kept its program and gave its reason, and the Tester, instead of revising the value it had derived as though that had been the error, recorded that both artefacts were sound and rewrote the test in the layout the task prescribes. No student receives a verdict at any turn, so both decisions were reached from the records above. Had either treated the mismatch as evidence that its own artefact was wrong, a correct program or a correct expected output would have been given up.

Figure 9: **A conflict on the code domain and the turn that resolves it.** The regions, their order and their colours are those of Figure 7, with the trajectory supplied rather than elided. The students hold region ② and region ④; region ① is the substitution that distinguishes the two contexts of a pair and region ③ is the verdict, and no student receives either of them. The verdict restates the two values the agents produced and names where the conflict lies, here in the format of the test input rather than in either artefact. Passages tagged **ANALYSIS** are our commentary on the case, not trajectory text, and form no part of any context; region ⑤ in particular holds the two attribution lines and nothing besides. Long derivations are elided where marked.

G.1.2 MATHEMATICS DOMAIN

What this case shows. Three turns are shown here because the verification reaches opposite conclusions within them. The derivation and the program disagree at the first turn and the derivation is the one at fault, they disagree again at the second turn after the program has been rewritten and the program is the one at fault, and the roles themselves are the same throughout. What changes between the two verdicts is only which artefact the reference answer supports, which is what it means for the two checks of Appendix F.6 to read one artefact each: a verdict is not a ranking of the roles and cannot be anticipated from knowing which role is speaking. Both roles move at turn 1 and only one of them should have, since the Reasoner abandons a case analysis that was genuinely incomplete while the Tool-User abandons an enumeration that was already correct, and the second verdict is what puts the run back on the value it had reached at the outset.

A conflict on the mathematics domain, scoring the Reasoner response of turn 2

① RAS substitutes the role here

teacher only

The target context opens with the Reasoner condition of Appendix F.3 and the non-target one with the Tool-User condition of Appendix F.3, in place of the line the trajectory opens with. Everything below is identical in the two.

② Turn 0 — student trajectory

student and teacher

Problem. Held by both roles, in the **Problem:** field of the templates of Appendix F.2.

Find the number of triples of nonnegative integers (a, b, c) satisfying $a + b + c = 300$ and $a^2b + a^2c + b^2a + b^2c + c^2a + c^2b = 6,000,000$.

Reasoner.

Reasoning Steps:

Since $a + b + c = 300$, each pair sums to 300 minus the third coordinate, so

$$a^2b + a^2c + b^2a + b^2c + c^2a + c^2b = ab(300 - c) + bc(300 - a) + ca(300 - b),$$

which expands to $300(ab + bc + ca) - 3abc$. Dividing the constraint by three leaves

$$100(ab + bc + ca) - abc = 2,000,000.$$

{ the cases examined from here, namely $c = 0$, which forces $ab = 20,000$ and yields the triple $(200, 100, 0)$, and $a = b = c = 100$ }

A short loop over the pairs (a, b) , with c fixed by the sum, would confirm the count.

4

Tool-User.

The two constraints leave one free pair: choosing a and b fixes $c = 300 - a - b$, so every triple is reached by iterating over the pairs and evaluating the second constraint directly.

```
Code: ``python
count = 0
target_sum_abc = 300
target_expression_value = 6_000_000
for a in range(target_sum_abc + 1):
    for b in range(target_sum_abc - a + 1):
        c = target_sum_abc - a - b
        # Compute LHS of the second equation
        lhs = (a*a*b + a*a*c + b*b*a +
               b*b*c + c*c*a + c*c*b)
        if lhs == target_expression_value:
            count += 1

print(count)
``
```

Environment. Compared the two answers and reported the disagreement.

derived answer: 4 printed result: 601

ANALYSIS *The record names neither side. A closed-form argument that reduces the constraint to a single equation and an enumeration that visits every admissible pair are each the kind of artefact the other is normally checked against, and comparing them settles nothing, because they disagree and that is all the comparison says.*

③ Verdict on turn 0 — attached by PAC

teacher only

Verified attribution (available during training only): Verification result for the previous turn:

- The derivation reported 4 and the program printed 601.
- The printed result is consistent with the reference answer, the derived answer is not, and the previous inconsistency therefore originates from the derivation.

ANALYSIS The conclusion is the *DERIVATION_INCONSISTENT* line of Appendix F.6 unaltered. Both values it names were produced by the agents, one derived and one printed, and the reference answer is not stated in its own right even though it decides the verdict.

④ Turn 1 — student trajectory

student and teacher

Reasoner.

Reasoning Steps:

The identity is sound and the faulty step is the case analysis that followed it. Setting $c = 0$ and setting $a = b = c$ reach two triples and stop, and they miss that every triple with a coordinate equal to 100 satisfies the constraint: taking $a = 100$ gives $ab + bc + ca = 100(b + c) + bc = 20,000 + bc$, so

$$100(ab + bc + ca) - abc = 100(20,000 + bc) - 100bc = 2,000,000$$

for every $b + c = 200$, independently of bc .

(the count of the triples having at least one coordinate equal to 100, by inclusion and exclusion over the three coordinates)

601

Tool-User.

Scanning every pair is wasteful, and a count two orders of magnitude above the derived one suggests the scan is admitting triples it should not. Restricting to $a \leq b \leq c$ and recovering the rest by permutation should cover the same ground at a fraction of the cost, and the triples the derivation exhibits can be inserted directly.

Code: ``python

```
from itertools import permutations
total = 300
def check(a, b, c):
    return (a + b + c == total and
            a**2*b + a**2*c + b**2*a +
            b**2*c + c**2*a + c**2*b == 6_000_000)
seen = set()
(the triples the derivation exhibited, inserted into seen before the search begins)
for a in range(total // 3 + 1):
    for b in range(max(0, total // 2 - a), total - a):
        c = total - a - b
        if a <= b <= c and check(a, b, c):
            seen.update(permutations([a, b, c]))
print(len(seen))
``
```

Environment. Compared the two answers and reported the disagreement.

derived answer: 601 printed result: 307

ANALYSIS Both roles moved, and the one that had been right moved too. The Reasoner repaired the step the verdict pointed at, while the Tool-User read the same disagreement as evidence against its own enumeration and narrowed a scan that had been complete. A second conflict follows, on the same problem and between the same roles, and it is now the computed side that departs from the reference.

⑤ Verdict on turn 1 — attached by PAC

teacher only

Verified attribution (available during training only): Verification result for the previous turn:

- The derivation reported 601 and the program printed 307.
- The derived answer is consistent with the reference answer, the printed result is not, and the previous inconsistency therefore originates from the program.

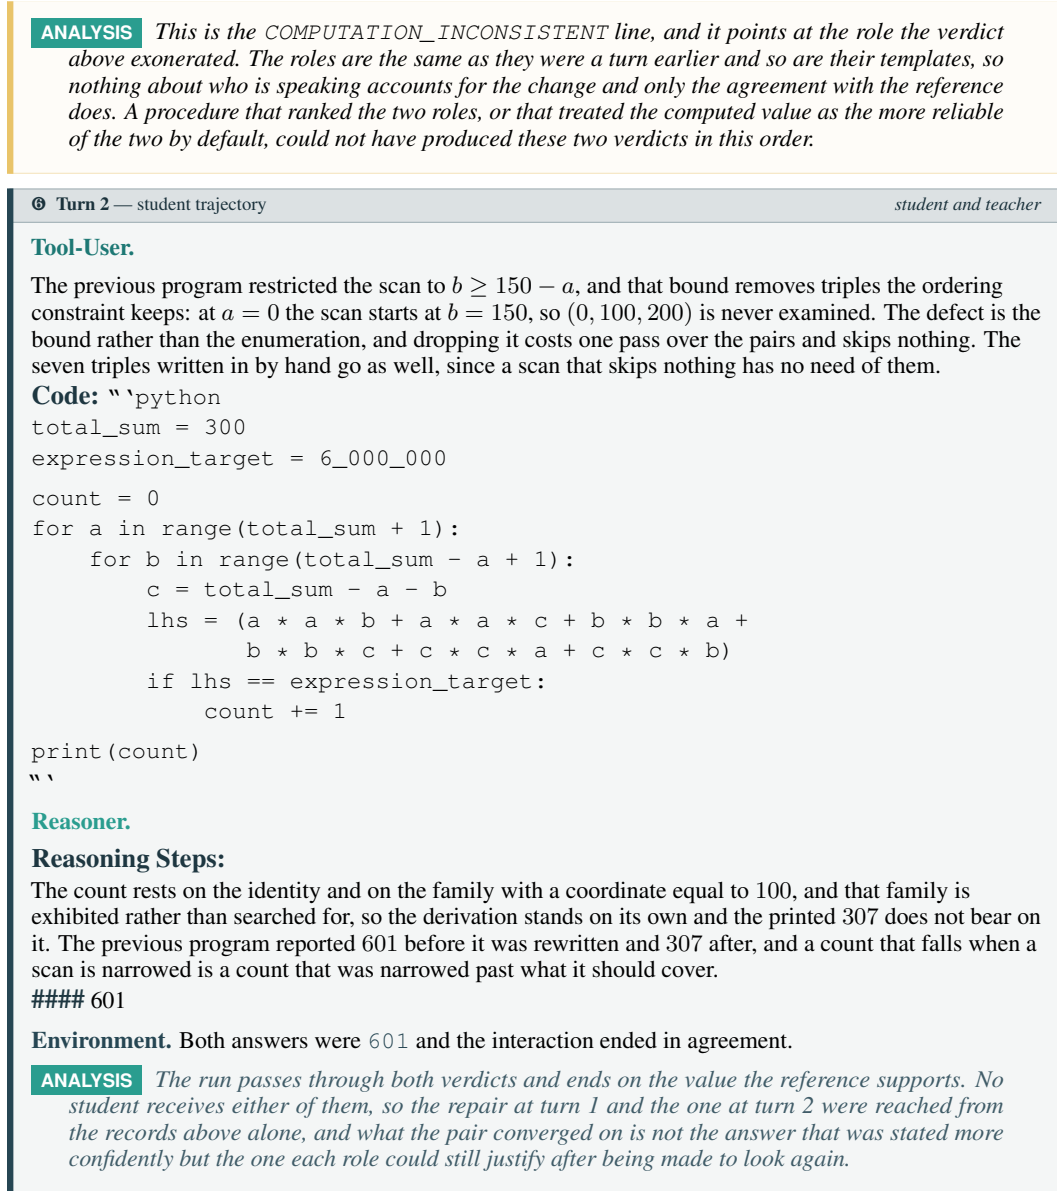


Figure 10: **A conflict on the mathematics domain, resolved in two steps.** The regions and their colours are those of Figure 8, with the trajectory supplied rather than elided; regions ③ and ④ together with regions ⑤ and ⑥ are the two instances of the verdict and turn pair that the dashed block of that figure repeats. The students hold regions ②, ④ and ⑥, and receive neither the substitution of region ① nor either verdict. The two verdicts name different roles, the derivation at turn 0 and the program at turn 1, and each states which of the two candidate values the reference answer supports without stating that answer. Passages tagged **ANALYSIS** are our commentary on the case, not trajectory text, and form no part of any context. Long derivations are elided where marked.

G.2 WHERE THE ROLE ADVANTAGE FALLS

The role advantage of Eq. (9) is defined on a single token, as the difference between the two teacher scores that Appendix F.5 obtains for it, so it is shown here on the tokens rather than summarised over a response. What is shaded is the response alone. The teacher force decodes the response against a context and scores its tokens, so a score exists at those positions and nowhere else, and the problem


statement together with the role condition is what the response is read against rather than something the signal is defined on. The role condition in particular is the one passage that differs between the two contexts of a pair, and what the shading reports is the effect of that difference on the response rather than the difference itself. Each display takes the turn-0 response of the run above it, divides it into blocks of a few tokens running from the first word to the last, and shades every block by the level its role advantage sits at, the three regimes of Section 3.2 appearing as levels above, at and below the middle of the scale. The signal is defined at every position, so every block carries a level and the middle one is a value near zero rather than the absence of a value; only an elision is left plain, standing as it does for tokens that are not on the page.

G.2.1 CODE DOMAIN

What this case shows. The response is the one the Coder produced at turn 0 of Figure 9, scored once under the Coder condition of Appendix F.3 and once under the Tester condition of Appendix F.3. The response sorts itself into the three regimes of Section 3.2 without anything in the training objective naming them. The work the Coder condition centres on sits above the middle, which is the plan as it turns into a decision and the statements that carry those decisions out; the one stretch in which the Coder fixes on a case of its own and states the output the specification implies for it sits below the middle, that being what the second paragraph of the Coder condition sets outside the role; and what neither condition claims stays at the middle, which covers the restatement of the task, the field labels and the fence, and the comments that describe in prose what the statements beside them do. The last of these is the one worth pausing on, since a comment and the statement it annotates are adjacent and describe the same thing while sitting a band apart, and no rule written over the surface of a response would separate them. None of the three is uniform: the level jumps by two or three steps between neighbouring blocks as readily as by one, and a handful of blocks sit on the far side of the middle from everything around them.

The role advantage on the Coder response of turn 0

towards the Tester  towards the Coder the middle level is a role advantage near zero

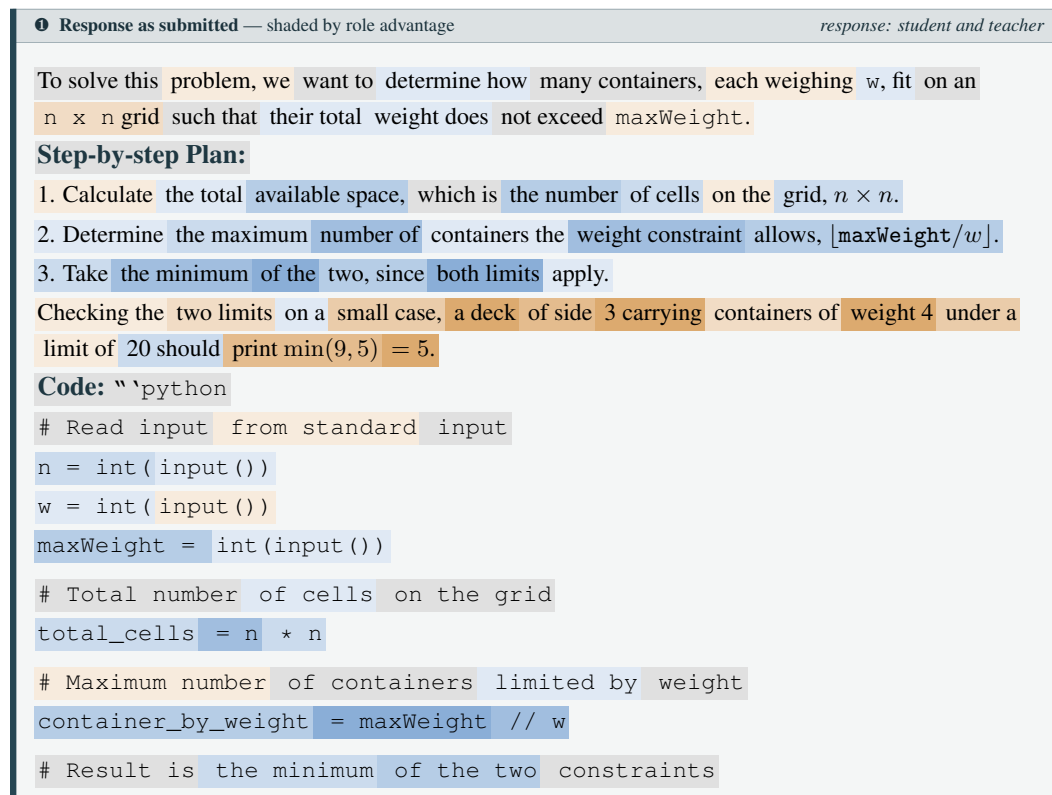

```
result = min(total_cells, container_by_weight)
# Print the final answer
print(result)
"
```

ANALYSIS *The middle band is a role advantage near zero rather than a gap, and three kinds of text fall in it. The restatement of the task wanders a step either side without settling, since both conditions require a role that has understood the problem. The field labels and the fence sit there as well, which they must, because a signal that singled out the markers a template happens to require would be sorting formatting rather than responsibility. So do the comments, and they sit a band or two below the statements they annotate even though the two say the same thing, one in prose and one in Python.*

ANALYSIS *The level climbs as the plan turns into a decision, and it is the average over a passage that climbs rather than every block within it. The three steps of the plan sit higher in turn, and the two assignments that choose what to compute are the highest blocks in the response, which is what the Coder condition means by solution design and program implementation. The climb tracks the decisions and not the code: the input reads, which any role writing a program at all would produce, sit barely above the middle, and the comments between the statements return to it. Individual blocks go the other way throughout, on the in the first step and `input()` in the second read among them, each a block whose tokens neither role can claim. The objective of Eq. (10) is built for a signal of exactly this shape, weighting every token by the role advantage rather than thresholding it, so a block that departs from the passage around it contributes its own small amount and no passage turns on any one of them.*

ANALYSIS *The level falls through the passage in which the Coder settles on values of its own, reaching its lowest at the values themselves and at the expected output derived from them. The Coder condition puts constructing test inputs and independently deriving their expected outputs on the Tester's side, so the teacher reading those blocks as the Tester favours them more than the teacher reading them as the Coder does. The fall begins a block before the values appear, is interrupted twice, once at `on` a near its start and once at `20 should` near its end, and has not returned to the middle when the code fence arrives. RAS reduces the strength of the update across it and removes nothing, which is why the same passage still stands in Figure 9.*


ANALYSIS *The levels are not a measure of how much a block matters, and the passage that falls furthest is the place to see it: that derivation is correct, it is useful, and the ordinary distillation term treats it as such. It falls here only because the two identities disagree about whose work it is, and it would rise by as much were the Tester the one to write it, since exchanging the two conditions of Appendix F.5 exchanges the sign of every block. What survives the exchange is the arithmetic of Eq. (9), in which the student term cancels and the two contexts differ in their opening line alone.*

Figure 11: **The role advantage on a Coder response.** The response is that of turn 0 of Figure 9, unchanged, and it is the whole of what is shaded, the two contexts it is scored against carrying no score of their own. It is divided into blocks of a few tokens and each block is shaded by the level its role advantage sits at, obtained by scoring the response under the Coder condition and under the Tester condition of Appendix F.3 and taking the difference. The blocks are of one size and cut across the phrasing rather than following it, and the levels run in the eleven steps of the key, which record the sign and the strength of the difference and are what the objective of Eq. (10) consumes. Every block carries a level, the middle one being a role advantage near zero rather than a gap in the signal, and it is where the formatting the template requires sits along with the restatement of the task. What separates is the average over a passage rather than the level of any one block. The stretches that decide what the program computes stand above the middle, the stretch in which the Coder settles on values of its own and states the output the specification implies for them stands below it, and the restatement of the task, the formatting and the comments stand at it, so the three regimes of Section 3.2 appear without the objective naming any of them. Within each the level jumps by two or three steps as readily as by one and a few blocks sit on the far side of the middle from everything around them. Passages tagged **ANALYSIS** are our commentary and form no part of any context.

G.2.2 MATHEMATICS DOMAIN

What this case shows. The response is the one the Reasoner produced at turn 0 of Figure 10, scored under the Reasoner condition of Appendix F.3 and under the Tool-User condition of Appendix F.3. The three regimes appear as they do on the code domain, and the reason for giving a second display is that here they cannot be explained away as a separation of notations. Both roles of this workflow write mathematics about the same object and this response never leaves prose and algebra, so what the level tracks is which role the work belongs to and not whether the tokens are English or Python. The algebra that rewrites the constraint stands above the middle, the sentence that prescribes an enumeration stands below it, and the final answer sits at the middle directly beneath the derivation that produced it, being the one thing both templates of Appendix F.2 ask for.

The role advantage on the Reasoner response of turn 0

towards the Tool-User  towards the Reasoner the middle level is a role advantage near zero

Response as submitted — shaded by role advantage response: student and teacher

Reasoning Steps:

Since $a + b + c = 300$, each pair sums to 300 minus the third coordinate, so the constraint reads $ab(300 - c) + bc(300 - a) + ca(300 - b)$, which expands to $300(ab + bc + ca) - 3abc$, and dividing by three leaves $100(ab + bc + ca) - abc = 2,000,000$.

(the cases examined from here, namely $c = 0$, which forces $ab = 20,000$ and yields the triple $(200, 100, 0)$, and $a = b = c = 100$)

A short loop over the pairs (a, b) , with c fixed by the sum, would confirm the count.

```
#### 4
```

ANALYSIS The answer sits at the middle, one line below the algebra that reached it. Both templates of Appendix F.2 end by asking for a final answer and both conditions favour a role that states one, so the value carries no role difference while the route to it carries a great deal. This is the mathematics counterpart of a comment and its statement in Figure 11: a result and the derivation that produced it are as close as two passages get, and anything sorting the response by what it is about would keep them together. The restatement of the constraint at the opening is at the middle for the same reason the code response begins there, both conditions requiring a role that has read the problem.

ANALYSIS The level is highest across the algebra, and this is the part of the display that a difference of notations cannot account for. Nothing here is a program: the response is prose and algebra throughout, the Tool-User writes mathematics too, and the passages that separate are the ones that rewrite the constraint into a single symmetric identity, which is what the Reasoner condition means by analytic derivation and mathematical justification. The climb is uneven, dipping at $= 300$, each where the problem is being quoted back and at `by three`, and the elided passage carries no level at all, standing as it does for text that is not on the page.

ANALYSIS The closing sentence prescribes a program and the level falls across it, although the sentence is brief, correct and useful. The Tool-User condition makes writing the computational program its responsibility and tells the Reasoner not to take it over, so a teacher reading those blocks as the Tool-User favours them more than one reading them as the Reasoner does. It is also the one place in the turn where the two roles overlap, the enumeration described here being the one the Tool-User submits in Figure 10, so an update that reinforced it on both sides would be an update spent teaching two agents the same thing. The fall is interrupted at `confirm the`, a block whose tokens belong to neither role.

Figure 12: **The role advantage on a Reasoner response.** The response is that of turn 0 of Figure 10, unchanged apart from the derivations being set inline so that the blocks can cross them, and it is the whole of what is shaded. It is divided as in Figure 11 and shaded on the same scale, here obtained by scoring the response under the Reasoner condition and under the Tool-User condition of Appendix F.3 and taking the difference. The algebra that rewrites the constraint stands above the middle, the sentence prescribing an enumeration stands below it, and the restatement of the constraint and the final answer stand at it, the answer being the one thing both templates of Appendix F.2 ask of either role. Neither role writes a program in this response, so the separation is not one of notation. Within each stretch the level jumps by two or three steps as readily as by one, and the elision carries no level, standing for tokens that are not shown. Passages tagged **ANALYSIS** are our commentary and form no part of any context.