

LANGUAGE ORTHOGONALIZATION FOR ZERO-SHOT CROSS-LINGUAL AUDIO DEEPPFAKE DETECTION

Minu Kim^{1,2}, Ji Sub Um², Hoirin Kim²

¹University of Southern California, USA, ²KAIST, South Korea

minukim@usc.edu, {twiz0311, hoirkim}@kaist.ac.kr

ABSTRACT

Audio deepfake detectors need to transfer to languages absent from training, as multilingual speech synthesis outpaces labeled anti-spoofing resources. While detectors increasingly rely on self-supervised speech models (S3Ms), these backbones encode language-dependent structure that confounds spoof cues. We address this confound through language orthogonalization, a target-free ridge map that removes S3M variation projected onto continuous language-identification (LID) embeddings. Across six languages, six S3M backbones, and all Leave- N -Out settings, it consistently reduces EER across unseen languages. Cross-lingual EER correlates with LID-space distance, where orthogonalization yields larger gains for more distant transfers.

Index Terms— audio deepfake detection, self-supervised speech models, cross-lingual transfer, language identity.

1. INTRODUCTION

Consider deploying an audio deepfake detector in a language entirely absent from training: neither bonafide nor spoofed speech is available for adaptation or calibration. This scenario is increasingly plausible: speech synthesis now spans over a thousand languages [1], while standard anti-spoofing benchmarks remain largely English-centric [2, 3] and recent multilingual resources cover only a fraction of this breadth [4]. A scalable detector should therefore transfer both its bonafide reference and spoof decision boundary across languages.

Self-supervised speech models (S3Ms) appear well suited to this transfer setting, having shown strong performance in audio deepfake detection [5]. However, their representations also encode language identity [6], and spoof detectors often degrade across linguistic boundaries [7, 8]. A detector may easily confuse language-conditioned acoustics with transferable spoof cues. Because both bonafide and spoofed speech retain this linguistic structure, cross-lingual degradation is especially severe when transferring to distant target languages.

Meanwhile, prior work shows that S3M phonetic variations occupy approximately linear subspaces [9, 10], motivating subspace residualization to reduce cross-lingual confounds [11]. We hypothesize that removing linear language

directions eliminates confounds across large linguistic distances without target data. We thus formulate *language orthogonalization* for audio deepfake detection under a strictly unseen setting, removing language variation without observing target-language speech during training.

Our approach fits a closed-form ridge map from continuous language identification (LID) embeddings to S3M representations using bonafide speech from source languages, then subtracts the mapped language component from each representation. A frozen multilingual LID encoder [12] extracts continuous language representations without language-specific tuning, enabling target-data-free transformation. Consequently, this orthogonalization isolates and preserves spoof artifacts while removing language confounds.

By leveraging continuous LID space, which provides a meaningful geometry reflecting phonological, geographic, and genealogical language relationships [13, 14], we first show that cross-lingual equal error rate (EER) increases with LID distance across six South and Southeast Asian languages and six S3M backbones. Language orthogonalization consistently improves Leave- N -Out evaluation across all settings, with the most pronounced gains on distant transfers where language confounds are most severe.

Our contributions are: (1) showing that LID distance and linguistic composition govern cross-lingual transfer difficulty; (2) formulating target-free language orthogonalization for unseen-language audio deepfake detection; and (3) demonstrating consistent EER reductions across six S3Ms and all Leave- N -Out settings, with largest gains on distant transfers and constrained source setups.

2. METHODOLOGY

2.1. Feature Representations

We use six frozen S3Ms as utterance-level feature extractors: MMS-300M [1], XLS-R-300M [15], wav2vec2-Large-LV60 [16], HuBERT-Large [17], WavLM-Large [18], and mHuBERT-147 [19]. For each utterance, we compute mean+std pooling [20] across all hidden layers, average the layer-wise representations depthwise, and ℓ_2 -normalize the result to obtain a 2048-d embedding $\mathbf{x}_i \in \mathbb{R}^D$. This fixed pipeline avoids

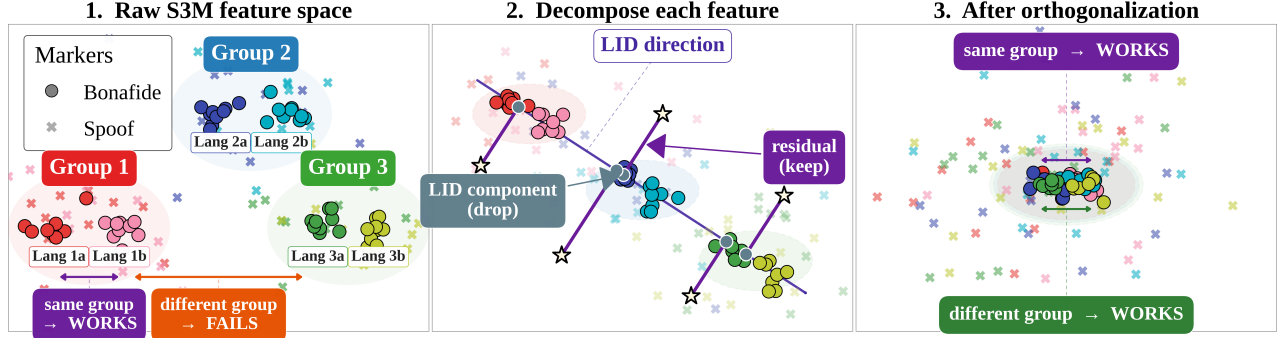


Fig. 1. Language orthogonalization for cross-lingual anti-spoofing. (1) S3M representations place similar languages nearby, easing transfer between close languages. (2) Orthogonalization removes language-predictable variation and retains the residual. (3) The residual space aligns bonafide distributions and improves transfer across linguistic groups.

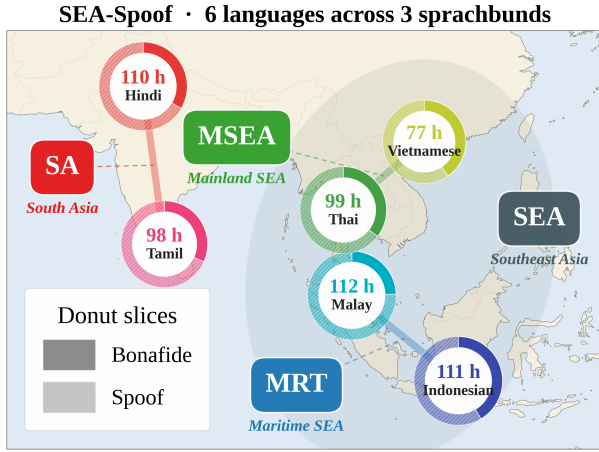


Fig. 2. Evaluation languages. Six languages span South Asia, Mainland Southeast Asia, and Maritime Southeast Asia, enabling transfer within and across linguistic areas (i.e., sprachbunds).

backbone-specific layer selection [21, 22].

As an external language reference, we extract a continuous LID embedding $\mathbf{g}_i \in \mathbb{R}^{256}$ using an ECAPA-TDNN pretrained on VoxLingua107 [12]. Unlike discrete language labels, these embeddings place utterances in a shared language space, enabling both language-distance analysis and transformation of target languages unseen during training.

2.2. Language Orthogonalization

We propose a source-only formulation of language orthogonalization for fully unseen-language anti-spoofing. The mapping is learned exclusively from source-language bonafide speech, requiring neither class from target languages and preventing spoof artifacts from entering its estimation.

For the bonafide training set $\mathcal{D}_{\text{bf}}$, we stack its $N_{\text{bf}} = |\mathcal{D}_{\text{bf}}|$ utterances into S3M features $\mathbf{X}_{\text{bf}} \in \mathbb{R}^{N_{\text{bf}} \times 2048}$ and

LID embeddings $\mathbf{G}_{\text{bf}} \in \mathbb{R}^{N_{\text{bf}} \times 256}$ to fit a ridge map:

$$\mathbf{W}^* = \arg \min_{\mathbf{W}} \|\mathbf{X}_{\text{bf}} - \mathbf{G}_{\text{bf}} \mathbf{W}\|_F^2 + \lambda \|\mathbf{W}\|_F^2. \quad (1)$$

The closed-form solution is

$$\mathbf{W}^* = (\mathbf{G}_{\text{bf}}^\top \mathbf{G}_{\text{bf}} + \lambda \mathbf{I})^{-1} \mathbf{G}_{\text{bf}}^\top \mathbf{X}_{\text{bf}}. \quad (2)$$

For an utterance with S3M representation $\mathbf{X}$ and LID embedding $\mathbf{g}$, we subtract the language-predictable component:

$$\mathbf{X}_{\text{orth}} = \mathbf{X} - \mathbf{g} \mathbf{W}^*. \quad (3)$$

The transformation is applied to both bonafide and spoofed utterances. Its continuous LID conditioning allows application to target languages unseen during training.¹

3. EXPERIMENTAL SETUP

3.1. Dataset

We evaluate on SEA-Spoof [23], which contains bonafide and spoofed speech from six languages under diverse speakers and spoofing conditions. We group the languages into South Asia (SA; Hindi and Tamil), Mainland Southeast Asia (MSEA; Thai and Vietnamese), and Maritime Southeast Asia (MRT; Indonesian and Malay) (Fig. 2); MSEA and MRT together form the Southeast Asian (SEA) subset. Prior S3M studies likewise report representational proximity and effective transfer among languages in these regions [13, 24], motivating comparisons within and across linguistic areas.

3.2. Cross-Lingual Evaluation

Under Leave- N -Out evaluation, we hold out every combination of $N \in \{1, 2, 3, 4, 5\}$ languages and train on the remaining $6 - N$. The held-out languages are entirely unseen, with

¹We report main results at $\lambda = 0.1$ as a representative setting, with performance remaining highly stable across $\lambda \in (0, 1)$.

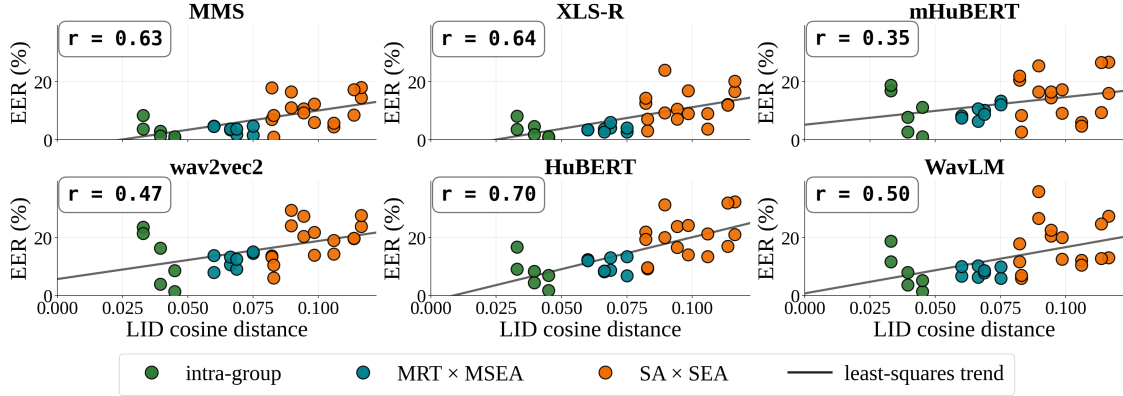


Fig. 3. Language distance predicts cross-lingual difficulty. LID distances reflect linguistic-area structure, with intra-group pairs closer than MSEA–MRT and SEA–SA pairs. Across six S3Ms, greater distance is consistently associated with higher EER; r denotes the Pearson correlation between distance and EER.

Table 1. Cross-lingual EER (%) under Leave- N -Out evaluation. The remaining $6 - N$ languages are used for training. Parentheses show relative EER reduction from Raw. Orthogonalization improves every backbone and N .

Backbone	$N = 1$		$N = 2$		$N = 3$		$N = 4$		$N = 5$	
	Raw	Orth	Raw	Orth	Raw	Orth	Raw	Orth	Raw	Orth
<i>Multilingual Pre-trained Backbones</i>										
MMS-300M	1.48	1.16 ($\downarrow 22\%$)	2.44	1.82 ($\downarrow 25\%$)	3.54	2.68 ($\downarrow 24\%$)	5.65	3.91 ($\downarrow 31\%$)	10.06	7.80 ($\downarrow 22\%$)
XLS-R-300M	1.62	1.58 ($\downarrow 2\%$)	2.36	2.14 ($\downarrow 9\%$)	3.59	2.89 ($\downarrow 20\%$)	6.36	4.24 ($\downarrow 33\%$)	11.56	7.77 ($\downarrow 33\%$)
mHuBERT-147	5.16	4.39 ($\downarrow 15\%$)	6.46	5.49 ($\downarrow 15\%$)	7.95	7.07 ($\downarrow 11\%$)	10.56	9.37 ($\downarrow 11\%$)	16.10	14.76 ($\downarrow 8\%$)
<i>Monolingual Pre-trained Backbones</i>										
wav2vec2-large	6.45	5.75 ($\downarrow 11\%$)	8.50	7.23 ($\downarrow 15\%$)	10.34	9.05 ($\downarrow 12\%$)	12.86	11.44 ($\downarrow 11\%$)	17.20	15.63 ($\downarrow 9\%$)
HuBERT-large	5.47	5.29 ($\downarrow 3\%$)	6.84	6.65 ($\downarrow 3\%$)	9.10	8.70 ($\downarrow 4\%$)	12.66	11.30 ($\downarrow 11\%$)	17.54	15.54 ($\downarrow 11\%$)
WavLM-large	4.32	4.18 ($\downarrow 3\%$)	5.93	5.23 ($\downarrow 12\%$)	7.83	6.72 ($\downarrow 14\%$)	10.86	8.86 ($\downarrow 18\%$)	15.56	13.14 ($\downarrow 16\%$)
Avg.	4.08	3.73 ($\downarrow 9\%$)	5.42	4.76 ($\downarrow 12\%$)	7.06	6.19 ($\downarrow 12\%$)	9.83	8.19 ($\downarrow 17\%$)	14.67	12.44 ($\downarrow 15\%$)

no language-specific adaptation. For each split, we compare raw and orthogonalized S3M representations using EER, averaged across all language combinations at each N . To evaluate the representations, we fit a logistic regression classifier with class-balanced L_2 regularization using L-BFGS [25].

4. RESULTS

4.1. Language Distance and Cross-Lingual Difficulty

For each source–target language pair, we compare the cosine distance of their mean LID embeddings against cross-lingual evaluation EER. Figure 3 shows that LID distance reflects linguistic-area structure and correlates with EER across all six S3Ms. Transfer difficulty thus aligns with linguistic distance from the training language, motivating orthogonalization under severe linguistic distance.

4.2. Overall Leave- N -Out Performance

Table 1 reports performance as unseen languages increase from $N = 1$ to 5. Orthogonalization consistently reduces EER across all backbones and N , yielding 9–17% average relative gains across all setups.

4.3. Effect of Linguistic-Area Composition

We examine how linguistic-area structure influences cross-lingual difficulty and orthogonalization gains under data scarcity. Under single-language training (Table 2), transfer difficulty scales with linguistic mismatch: Raw baseline performance is strong on closely related pairs (intra-group), leaving limited room for improvement. Conversely, Raw performance drops on distant cross-area pairs (SA $\times$ SEA) due to severe linguistic confounds. Crucially, orthogonalization yields its largest gains on these distant pairs (e.g., up to 22% relative EER reduction on XLS-R), confirming that language

Table 2. Cross-lingual EER (%) under single-language training (Leave-5-Out). Raw results are shown in gray; Orth results are grouped by source-target relation: **intra-group**, **MRT × MSEA**, and **SA × SEA**. Parentheses indicate relative EER change from Raw.

Backbone	Source-target relation at evaluation					
	intra-group		MRT × MSEA		SA × SEA	
	Raw	Orth	Raw	Orth	Raw	Orth
<i>Multilingual Pre-trained Backbones</i>						
MMS	2.90	2.89 (↓0%)	3.54	3.70 (↑5%)	10.52	8.62 (↓18%)
XLS-R	3.33	4.05 (↑22%)	3.75	3.43 (↓9%)	11.72	9.18 (↓22%)
mHuBERT	9.72	8.29 (↓15%)	9.63	10.40 (↑8%)	15.16	15.14 (↓0%)
<i>Monolingual Pre-trained Backbones</i>						
wav2vec2	12.53	11.51 (↓8%)	12.13	11.78 (↓3%)	19.04	17.35 (↓9%)
HuBERT	7.85	7.65 (↓3%)	10.41	9.67 (↓7%)	20.42	18.26 (↓11%)
WavLM	8.09	6.54 (↓19%)	8.17	7.51 (↓8%)	17.56	15.76 (↓10%)

Table 3. Cross-lingual EER (%) under two-language training (Leave-4-Out). Raw results are shown in gray; Orth results are grouped by training-language composition: **intra-group**, **MRT × MSEA**, and **SA × SEA**. Parentheses indicate relative EER reduction from Raw.

Backbone	Composition of the two training languages					
	intra-group train		MRT × MSEA train		SA × SEA train	
	Raw	Orth	Raw	Orth	Raw	Orth
<i>Multilingual Pre-trained Backbones</i>						
MMS	8.66	5.91 (↓32%)	6.86	3.85 (↓44%)	3.91	3.19 (↓18%)
XLS-R	10.82	6.44 (↓41%)	9.67	5.30 (↓45%)	3.03	2.90 (↓5%)
mHuBERT	14.56	13.15 (↓10%)	13.05	10.10 (↓23%)	7.82	7.58 (↓3%)
<i>Monolingual Pre-trained Backbones</i>						
wav2vec2	16.24	14.30 (↓12%)	15.64	13.35 (↓15%)	10.20	9.42 (↓8%)
HuBERT	17.67	16.22 (↓8%)	16.55	13.41 (↓19%)	8.83	8.41 (↓5%)
WavLM	14.40	12.41 (↓14%)	13.99	10.53 (↓25%)	7.96	6.70 (↓16%)

removal is most effective across large linguistic distances.

Under two-language training (Table 3), generalization depends on source diversity. Diverse training pairs (SA × SEA) yield robust baselines with low Raw EERs, leading to minor orthogonalization gains. In contrast, homogeneous pairs (intra-group) restrict linguistic coverage, degrading baseline accuracy. Orthogonalization markedly improves these constrained setups (e.g., up to 41% and 45% EER reduction on XLS-R for intra-group and MRT × MSEA), showing that removing LID-mapped components can effectively compensate for limited source diversity.

4.4. Representation Geometry after Orthogonalization

Figure 4 visualizes the representation geometry in a representative Leave-3-Out setting. Raw S3M representations cluster hierarchically by language and linguistic group, with substantial domain shifts across languages. Orthogonalization suppresses this language-dependent structure, effectively aligning bonafide representations across both source and unseen

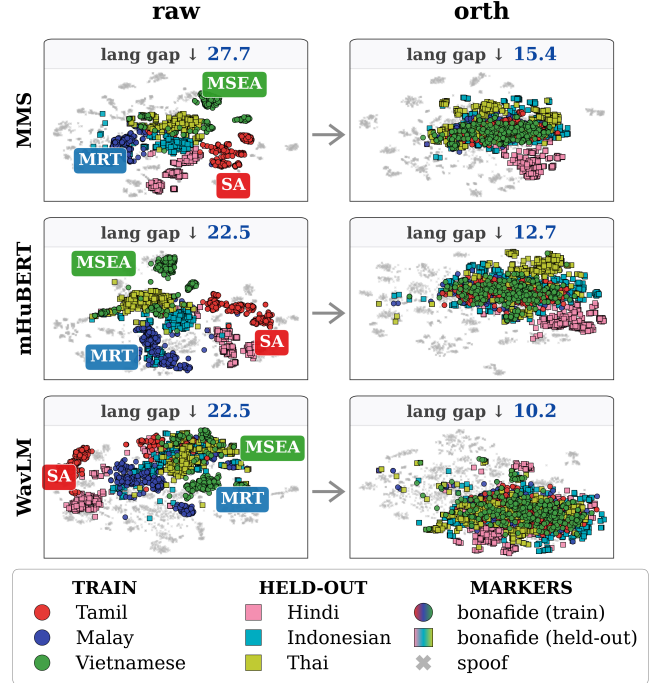


Fig. 4. Representation geometry before and after orthogonalization. Raw representations cluster hierarchically by language and linguistic group, whereas orthogonalization aligns bonafide speech and improves bonafide-spoof separation. Reported values denote Euclidean distances between bonafide language centroids in the S3M feature space.

target languages into a shared space.

Quantitatively, orthogonalization substantially reduces the Euclidean distance between bonafide language centroids in the S3M feature space across all backbones: MMS (27.7 → 15.4, -44%), mHuBERT (22.5 → 12.7, -44%), WavLM (22.5 → 10.2, -55%), XLS-R (20.3 → 9.4, -54%), wav2vec 2.0 (21.2 → 6.4, -70%), and HuBERT (23.4 → 9.7, -59%). This spatial reorganization confirms that removing LID-predictable components closes cross-lingual domain gaps while retaining the discriminative representation needed for detection.

5. CONCLUSION

We introduce a language orthogonalization strategy that fits an LID-to-S3M mapping on bonafide speech to improve cross-lingual audio deepfake detection. Across multiple S3M backbones and unseen-language setups, this approach consistently lowers EER, yielding larger gains on linguistically distant transfers. Furthermore, we show that continuous distance in LID space reflects linguistic-area structure, providing a clear metric to characterize transfer difficulty.

6. ACKNOWLEDGMENTS

This work was supported by Institute of Information & communications Technology Planning & Evaluation (IITP) grant funded by the Korea government(MSIT) (No.RS-2025-02215393).

7. REFERENCES

- [1] Vineel Pratap, Andros Tjandra, Bowen Shi, Paden Tomasello, Arun Babu, Sayani Kundu, Ali Elkahky, Zhaoheng Ni, Apoorv Vyas, Maryam Fazel-Zarandi, et al., “Scaling speech technology to 1,000+ languages,” *Journal of Machine Learning Research*, vol. 25, no. 97, pp. 1–52, 2024.
- [2] Massimiliano Todisco, Xin Wang, Ville Vestman, Md Sahidullah, Héctor Delgado, Andreas Nautsch, Junichi Yamagishi, Nicholas Evans, Tomi Kinnunen, and Kong Aik Lee, “Asvspoof 2019: Future horizons in spoofed and fake audio detection,” *arXiv preprint arXiv:1904.05441*, 2019.
- [3] Xuechen Liu, Xin Wang, Md Sahidullah, Jose Patino, Héctor Delgado, Tomi Kinnunen, Massimiliano Todisco, Junichi Yamagishi, Nicholas Evans, Andreas Nautsch, et al., “Asvspoof 2021: Towards spoofed and deepfake speech detection in the wild,” *arXiv preprint arXiv:2210.02437*, 2022.
- [4] Nicolas M Müller, Piotr Kawa, Wei Herng Choong, Edresson Casanova, Eren Gölge, Thorsten Müller, Piotr Syga, Philip Sperl, and Konstantin Böttinger, “Mlaad: The multi-language audio anti-spoofing dataset,” in *2024 International Joint Conference on Neural Networks (IJCNN)*. IEEE, 2024, pp. 1–7.
- [5] Hemlata Tak, Massimiliano Todisco, Xin Wang, Jee weon Jung, Junichi Yamagishi, and Nicholas Evans, “Automatic Speaker Verification Spoofing and Deepfake Detection Using Wav2vec 2.0 and Data Augmentation,” in *The Speaker and Language Recognition Workshop (Odyssey 2022)*, 2022, pp. 112–119.
- [6] Hexin Liu, Leibny Paola Garcia Perera, Andy WH Khong, Eng Siong Chng, Suzy J Styles, and Sanjeev Khudanpur, “Efficient self-supervised learning representations for spoken language identification,” *IEEE Journal of Selected Topics in Signal Processing*, vol. 16, no. 6, pp. 1296–1307, 2022.
- [7] Bartłomiej Marek, Piotr Kawa, and Piotr Syga, “Are audio deepfake detection models polyglots?,” *arXiv preprint arXiv:2412.17924*, 2024.
- [8] Kirill Borodin, Vasilii Kudryavtsev, Maxim Maslov, Mikhail Gorodnichev, and Grach Mkrtchian, “When spoof detectors travel: Evaluation across 66 languages in the low-resource language spoofing corpus,” *arXiv preprint arXiv:2603.02364*, 2026.
- [9] Kwanghee Choi, Eunjung Yeo, Cheol Jun Cho, David R Mortensen, and David Harwath, “Self-supervised speech models encode phonetic context via position-dependent orthogonal subspaces,” *arXiv preprint arXiv:2603.12642*, 2026.
- [10] Kwanghee Choi, Eunjung Yeo, Cheol Jun Cho, David Harwath, and David R Mortensen, “[b]=[d]-[t]+[p]: Self-supervised speech models discover phonological vector arithmetic,” in *Findings of the Association for Computational Linguistics: ACL 2026*, 2026, pp. 11048–11069.
- [11] Minu Kim, Eunjung Yeo, Kwanghee Choi, and June-Woo Kim, “Language orthogonalization of self-supervised speech representations for cross-lingual parkinson’s detection,” *arXiv preprint arXiv:2609.09499*, 2026.
- [12] Jörgen Valk and Tanel Alumäe, “VoxLingua107: A dataset for spoken language recognition,” in *Proc. IEEE SLT*, 2021, pp. 652–658.
- [13] Minu Kim, Hoirin Kim, and David R Mortensen, “Scaling self-supervised speech models uncovers deep linguistic relationships: Evidence from the pacific cluster,” *arXiv preprint arXiv:2603.07238*, 2026.
- [14] Minu Kim, Kangwook Jang, and Hoirin Kim, “Improving cross-lingual phonetic representation of low-resource languages through language similarity analysis,” in *ICASSP 2025-2025 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2025, pp. 1–5.
- [15] Arun Babu, Changhan Wang, Andros Tjandra, Kushal Lakhotia, Qiantong Xu, Naman Goyal, Kritika Singh, Patrick Von Platen, Yatharth Saraf, Juan Pino, et al., “Xls-r: Self-supervised cross-lingual speech representation learning at scale,” *arXiv preprint arXiv:2111.09296*, 2021.
- [16] Alexei Baevski, Yuhao Zhou, Abdelrahman Mohamed, and Michael Auli, “wav2vec 2.0: A framework for self-supervised learning of speech representations,” *Advances in neural information processing systems*, vol. 33, pp. 12449–12460, 2020.
- [17] Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Hubert Tsai, Kushal Lakhotia, Ruslan Salakhutdinov, and Abdelrahman Mohamed, “Hubert: Self-supervised speech representation learning by masked prediction of hidden units,” *IEEE/ACM transactions on audio, speech, and language processing*, vol. 29, pp. 3451–3460, 2021.
- [18] Sanyuan Chen, Chengyi Wang, Zhengyang Chen, Yu Wu, Shujie Liu, Zhuo Chen, Jinyu Li, Naoyuki Kanda, Takuya Yoshioka, Xiong Xiao, et al., “Wavlm: Large-scale self-supervised pre-training for full stack speech processing,” *IEEE Journal of Selected Topics in Signal Processing*, vol. 16, no. 6, pp. 1505–1518, 2022.
- [19] Marcely Zanon Boito, Vivek Iyer, Nikolaos Lagos, Laurent Besacier, and Ioan Calapodescu, “mhubert-147: A compact multilingual hubert model,” *arXiv preprint arXiv:2406.06371*, 2024.
- [20] Ondrej Klempir, Juliana Grand Mullerova, and Radim Krupicka, “Statistical, multi-scale and attention-based layer pooling of wav2vec-2 speech embeddings for parkinson’s disease detection,” *Computers in Biology and Medicine*, vol. 200, pp. 111368, 2026.
- [21] Ankita Pasad, Ju-Chieh Chou, and Karen Livescu, “Layer-wise analysis of a self-supervised speech representation model,” in *2021 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*. IEEE, 2021, pp. 914–921.
- [22] Ankita Pasad, Bowen Shi, and Karen Livescu, “Comparative layer-wise analysis of self-supervised speech models,” in *ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2023, pp. 1–5.
- [23] Jinyang Wu, Nana Hou, Zihan Pan, Qiquan Zhang, Sailor Hardik Bhupendra, and Soumik Mondal, “Sea-spoof: Bridging the gap in multi-lingual audio deepfake detection for south-east asian,” *arXiv preprint arXiv:2509.19865*, 2025.
- [24] Minu Kim, Ji Sub Um, and Hoirin Kim, “How far do ssl speech models listen for tone? temporal focus of tone representation under low-resource transfer,” in *ICASSP 2026-2026 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2026, pp. 18297–18301.
- [25] Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, et al., “Scikit-learn: Machine learning in python,” *the Journal of machine Learning research*, vol. 12, pp. 2825–2830, 2011.