

Selective Knowledge Edit Reversal via Gated Singular Vector Shrinkage

Weifeng Jiang^{1,2}, Ruirui Chen³, Qianren Mao⁴,
Junnan Liu⁵, Qili Zhang⁴, Kwok-Yan Lam^{1,2}

¹ College of Computing and Data Science, Nanyang Technological University, Singapore.

² Digital Trust Centre, Nanyang Technological University, Singapore.

³ Institute of Advanced Intelligence and Computing, Agency for Science, Technology and Research, Singapore.

⁴ Zhongguancun Laboratory, China.

⁵ Department of Data Science and AI, Faculty of Information Technology, Monash University, Australia.

weifeng001@e.ntu.edu.sg

Abstract

Knowledge editing provides an efficient way to update factual knowledge in large language models. However, malicious edits may introduce safety risks, making it necessary to reverse undesirable editing effects. Existing reversal methods for parameter-modifying edits mainly focus on global removal, which may also erase beneficial edits that should be preserved. In this paper, we study selective reversal of edited knowledge, where the goal is to reverse targeted edited facts while preserving the remaining edited facts. Based on the hypothesis that each edit is sparsely encoded within the dominant subspace of the edited matrix, we propose a spectral-based reversal framework that locates edit-sensitive components within the dominant singular subspace of edited weights. Experiments across multiple settings demonstrate the effectiveness of our method in reversing selected edits while preserving unrelated edited facts. These results suggest that different edits are sparsely encoded within dominant singular components and can be separable when the number of edits is moderate, making selective spectral reversal a promising direction for locating edit-specific components and repairing edited language models.¹

1 Introduction

Large language models (LLMs) have demonstrated strong capabilities across diverse application domains (Qin et al., 2023; Li et al., 2023; Cui et al., 2024; Ye et al., 2025). As these models are increasingly deployed in real-world applications, it becomes important to keep their factual knowledge up to date (Yao et al., 2023; Zhang et al., 2024). Knowledge editing (Mitchell et al., 2022a; Meng et al., 2022, 2023; Yao et al., 2023; Zhang et al., 2024; Li et al., 2024; Fang et al., 2025) provides

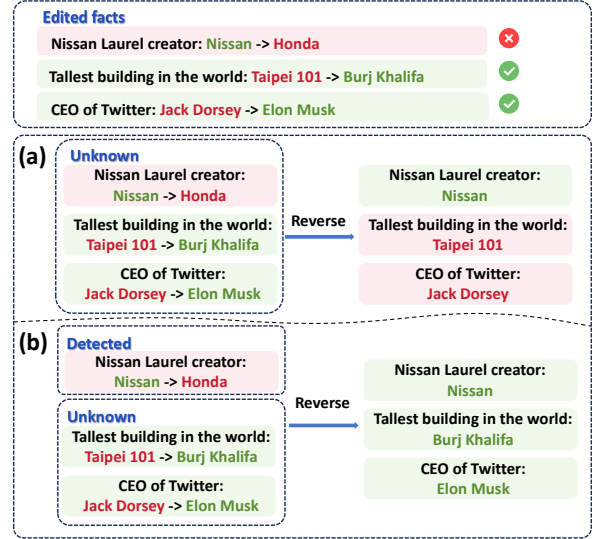


Figure 1: A model may contain both beneficial and harmful edits. Simply assuming that all edits are unknown and removing all edits from the model would also eliminate beneficial modifications. A more realistic scenario is to combine existing detection methods to identify harmful edits, and then selectively remove the detected edits without affecting other unknown edits.

an efficient way to update specific factual associations in a model while preserving unrelated knowledge, thereby avoiding expensive retraining and catastrophic forgetting (Zhu et al., 2020; Cao et al., 2021; Mitchell et al., 2022a; Huang et al., 2023; Zhang et al., 2024).

However, despite their impressive performance, recent studies have shown that knowledge editing may introduce safety risks (Youssef et al., 2025a). Due to its low overhead and ease of use, adversaries can exploit knowledge editing to inject backdoors, introduce biases, enable jailbreaking, and spread misinformation in LLMs (Qiu et al., 2025; Hazra et al., 2024; Chen et al., 2024a; Ju et al., 2024; Youssef et al., 2025a). Although several methods have been proposed to detect the editedness of a model or its output (Li et al., 2025; Youssef et al.,

¹Code and data are available at: <https://github.com/marvinhehehe/spectral-reverse>

2025b,c, 2026), reversing edits back to the pre-trained state remains a challenging research problem, especially for parameter-modifying editing methods, where edited knowledge is directly embedded into the model weights.

Recent work has explored spectral approaches to reversing parameter-modifying edits (Youssef et al., 2026). It achieves global reversal by deleting dominant singular subspace of the edited matrix. However, global deletion is not sufficient for realistic scenarios. As shown in Figure 1, an edited model may contain both harmful and beneficial edits. Simply removing all edits will also erase useful knowledge updates that should be preserved.

Therefore, in this work, we aim to locate where different edits are encoded in the parameter space of an edited model, and use this localization to selectively reverse edited knowledge. More specifically, given a set of subject-relation facts that have been confirmed to be edited, we identify the edit-sensitive components associated with these facts using only the edited model. Based on the identified components, the model’s outputs for the selected facts should become similar to those of the original pretrained model, while its outputs for the remaining edited facts should remain close to those of the edited model.

To achieve this objective, we propose a spectral-based reversal framework. We hypothesize that the information associated with each edit is sparsely encoded within the dominant rank-one singular components of the edited matrix. Based on this hypothesis, we use learnable entry-wise gates over the singular vectors of the edited weight matrix to locate and shrink edit-sensitive components associated with selected edits. We evaluate the proposed method on multiple language models, editing methods, and factual editing benchmarks.

Our contributions are summarized as follows:

- We formulate the problem of selective reversal for parameter-modifying knowledge editing, where the goal is to locate and reverse targeted edited facts while preserving the remaining edited facts (Section 3).
- We propose a spectral-based reversal framework that uses learnable entry-wise gates over singular vectors to locate and shrink edit-sensitive components inside the dominant rank-one singular components of edited weights (Section 5).
- We conduct extensive experiments across multiple models, editing methods, and factual editing benchmarks, showing that the proposed framework can effectively reverse selected edits while preserving remaining edits. The results provide empirical evidence that, given a moderate number of edits, different edits can be sparse and not strongly entangled within the dominant singular components of the edited matrix (Section 6).

2 Related Work

Knowledge Editing Knowledge editing aims to efficiently update specific knowledge stored in a model (Yao et al., 2023; Zhang et al., 2024). Most existing studies focus on factual associations, which can be represented as triples (s, r, o) , where s , r , and o denote the subject, relation, and object, respectively. Given an edit subject-relation pair with prompt $p(s_e, r_e)$, the goal is to update the model output from the original object o_{old} to a new target object o_{new} , while preserving the outputs of unrelated factual prompts $p(s_u, r_u)$ unchanged.

Knowledge editing methods can be divided into two categories. Parameter-preserving methods perform editing through external memory (Mitchell et al., 2022b; Zhong et al., 2023; Zheng et al., 2023; Chen et al., 2024b) or additional parameters (Huang et al., 2023; Hartvigsen et al., 2023). Parameter-modifying methods directly modify the original model parameters, including the locate-then-edit paradigm (Meng et al., 2022, 2023; Li et al., 2024; Fang et al., 2025) and meta-learning methods (Mitchell et al., 2022a; Tan et al., 2024).

Since locate-then-edit methods are especially attractive to malicious attackers due to their simplicity and strong editing performance (Youssef et al., 2025a, 2026), we mainly focus on locate-then-edit methods in this work.

Editedness Detection Editedness detection aims to determine whether an output or a model has been influenced by knowledge editing. DEED (Youssef et al., 2025c) detects the editedness of a given factual triple using features extracted only from the edited model. KETI (Li et al., 2025) further extends output editedness detection to multi-type identification. Youssef et al. (2026) probe the edited relation and target directly from the edited model, and identify edited weights using a random set of inputs.

Knowledge Edit Reversal Knowledge edit reversal aims to restore edited facts to their original

behavior while leaving unrelated knowledge unaffected. Youssef et al. (2025b) reverse in-context knowledge editing through prompt tuning, while Youssef et al. (2026) achieve global reversal of parameter-modifying edits using bottom-rank approximations of the edited weights. Compared with previous works, which focus on in-context edits or global removal of parameter-modifying edits, our work studies selective reversal, where only targeted edited facts are reversed while the remaining edited facts are preserved.

Knowledge edit reversal is related to machine unlearning (Xu et al., 2023; Sendera et al., 2025), since both aim to remove undesired knowledge while minimizing side effects on unrelated behavior. However, edit reversal has a more specific goal: besides removing the influence of a particular edit, it also seeks to restore the original model behavior.

3 Problem Statement

Let f_{edit} denote an LLM that has been modified by a set of factual edits $\mathcal{E}$. In this work, we consider a practical setting where only the edited model f_{edit} is available, while the original pretrained model and the full editing history are unavailable.

Since existing editedness detection techniques (Li et al., 2025; Youssef et al., 2025c, 2026) can identify edited facts using only the edited model, we assume that a set of edited subject-relation pairs has been detected and selected for reversal. We denote this set as $\mathcal{F} = \{(s_i, r_i)\}_{i=1}^n$. For each selected pair (s_i, r_i) , we construct a retrieval prompt $p_i(s_i, r_i)$, which is semantically equivalent but not identical to the prompt used during editing. The remaining edited facts are denoted by $\mathcal{R} = \mathcal{E} \setminus \mathcal{F}$. These facts are unknown during the selective reversal process.

Let f_{pre} denote the pretrained model before editing, and let f_{rev} denote the model after applying selective reversal to f_{edit} . The goal of selective reversal is to transform f_{edit} into f_{rev} such that:

- For each selected edited fact in $\mathcal{F}$, the output behavior of f_{rev} becomes close to that of f_{pre} ;
- For the remaining edited facts in $\mathcal{R}$, the output behavior of f_{rev} remains close to that of f_{edit} .

4 Method Motivation

Youssef et al. (2026) found that edited information is largely concentrated in the dominant singular subspace of the edited matrix, where removing the

top singular directions can eliminate edit behaviors and move the model output back toward the pretrained state. Due to the polysemantic nature of neural network parameters and the richness of knowledge stored in them (Olah et al., 2020), a complete rank-one singular component $\sigma_k u_k v_k^\top$ may contain information related to multiple facts.

Recently, AdaEdit (Li and Chu, 2025) shows that, for an update matrix, strong editing performance can still be achieved by retaining only the top singular vectors together with the largest-magnitude entries within those singular vectors. This finding suggests that, although locate-then-edit updates are often constructed from full rank-one vectors, knowledge-related information may be sparse within the resulting update matrix.

Based on these observations, we hypothesize that different edited facts may be sparse within the dominant rank-one singular components of the edited matrix, making them separable. Therefore, a fine-grained way to locate and manipulate each edit is to operate inside each singular component. This motivates our spectral-based reversal framework, which performs selective reversal through gated shrinkage of singular-vector entries.

5 Spectral-based Reversal Framework

In this section, we introduce our spectral-based reversal framework. We first introduce gated shrinkage for singular vector entries for selective reversal in Section 5.1. We then describe how the gate parameters are optimized in Section 5.2.

5.1 Selective Reversal via Gated Singular Vector Shrinkage

As illustrated in Figure 2, let $W_{\text{edit}} \in \mathbb{R}^{d_v \times d_k}$ denote the edited matrix of a target rewrite layer. We decompose it using SVD and separate the top- r dominant component from the residual component:

$$\begin{aligned} W_{\text{edit}} &= U \Sigma V^\top, \\ W_{\text{dom}} &= U_r \Sigma_r V_r^\top, \\ W_{\text{res}} &= W_{\text{edit}} - W_{\text{dom}}, \end{aligned} \quad (1)$$

where U_r , Σ_r , and V_r correspond to the largest r singular values. Since edited information is mainly concentrated in the dominant singular subspace, our selective reversal operates only on W_{dom} , while W_{res} is kept unchanged.

To enable fine-grained manipulation, we introduce two learnable gate matrices

$$G_u \in (0, 1)^{d_v \times r}, \quad G_v \in (0, 1)^{d_k \times r}, \quad (2)$$

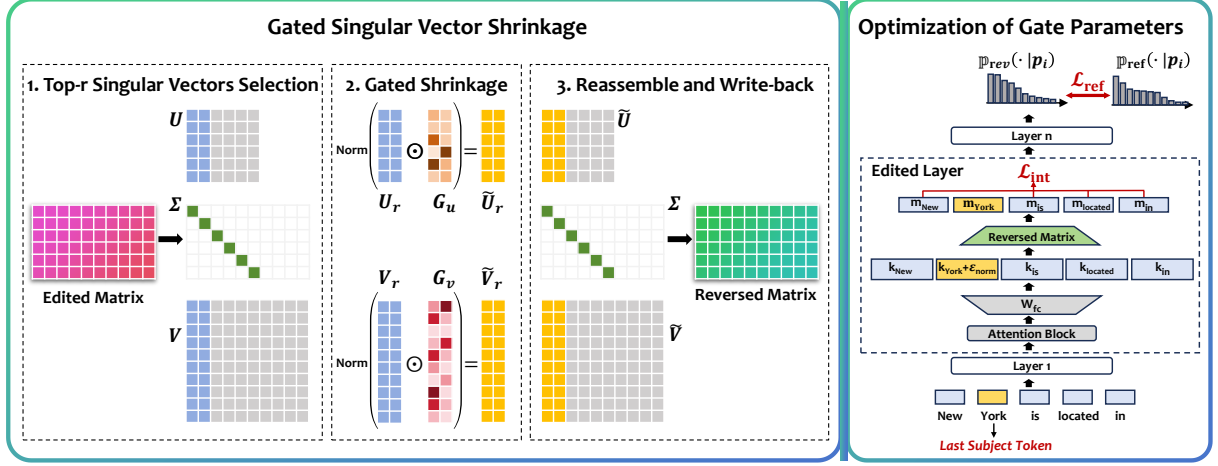


Figure 2: Overview of the proposed spectral-based reversal framework. The framework first selects the top- r dominant singular components of the edited weight matrix. It then applies learnable entry-wise gates to the corresponding singular vectors, performs gated shrinkage within each dominant rank-one singular component, and reconstructs the modified weight matrix. The gate parameters are optimized using the reversed model output, with losses designed to align targeted facts with a coarse reversal reference while constraining unnecessary intervention.

which are applied element-wise to the left and right singular vectors, respectively. The gated singular vectors are defined as

$$\tilde{U}_r = U_r \odot G_u, \quad \tilde{V}_r = V_r \odot G_v, \quad (3)$$

where $\odot$ denotes element-wise multiplication. Under this parameterization, a gate value close to 1 means that the corresponding singular vector entry is largely preserved, while a value close to 0 means that the corresponding entry is strongly shrunk.

Since the shrinking process changes the overall scale, following AdaEdit (Li and Chu, 2025), we renormalize each gated singular vector column to stabilize the parameterization. Let $\tilde{u}_i$ and $\tilde{v}_i$ denote the i -th columns of $\tilde{U}_r$ and $\tilde{V}_r$, and let u_i and v_i denote the corresponding original singular vectors. The renormalized gated vectors are defined as

$$\tilde{u}_i \leftarrow \tilde{u}_i \cdot \frac{\|u_i\|_2}{\|\tilde{u}_i\|_2}, \quad \tilde{v}_i \leftarrow \tilde{v}_i \cdot \frac{\|v_i\|_2}{\|\tilde{v}_i\|_2}. \quad (4)$$

Using the renormalized gated singular vectors, we reconstruct the modified dominant-subspace component as

$$W'_{\text{dom}} = \tilde{U}_r \Sigma_r \tilde{V}_r^\top. \quad (5)$$

The final selectively reversed weight matrix is then given by

$$W_{\text{rev}} = W_{\text{res}} + W'_{\text{dom}}. \quad (6)$$

This reconstruction can be interpreted as applying entry-wise reweighting within each dominant

rank-one singular component. For the i -th component $W_i = \sigma_i u_i v_i^\top$, the gated and renormalized component can be written as

$$\tilde{W}_i = \frac{\|u_i\|_2 \|v_i\|_2}{\|g_i^u \odot u_i\|_2 \|g_i^v \odot v_i\|_2} \left(g_i^u g_i^{v\top} \right) \odot W_i, \quad (7)$$

where g_i^u and g_i^v are the corresponding gate vectors.

5.2 Optimization of Gate Parameters

To ensure that the learned gates perform shrinkage, we parameterize the gate matrices G_u and G_v through unconstrained variables $Q_u \in \mathbb{R}^{d_u \times r}$ and $Q_v \in \mathbb{R}^{d_v \times r}$, and map them into $(0, 1)$:

$$G_u = \sigma(Q_u), \quad G_v = \sigma(Q_v), \quad (8)$$

where $\sigma(\cdot)$ denotes the sigmoid function.

Optimization Objective Since the original pre-trained model is unavailable in our setting, we follow the bottom-rank approximation idea of Youssef et al. (2026) to construct a reference model f_{ref} as a coarse reversal target. Specifically, for the edited matrix, we remove the dominant singular-subspace component W_{dom} from the edited weight matrix. We encourage the reversed model to produce an output distribution similar to that of f_{ref} :

$$\mathcal{L}_{\text{ref}} = \frac{1}{|\mathcal{F}|} \sum_{(s_i, r_i) \in \mathcal{F}} D_{\text{KL}}(\mathbb{P}_{\text{ref}}(\cdot|p_i) \parallel \mathbb{P}_{\text{rev}}(\cdot|p_i)). \quad (9)$$

To encourage the reversal to mainly rely on the representation of the last subject token, which is

commonly regarded as the factual knowledge localization site in locate-then-edit methods (Meng et al., 2022), we penalize the magnitude of the hidden-state perturbation induced on the other tokens in the prompt. The intervention penalty is defined as

$$\mathcal{L}_{\text{int}} = \frac{1}{|\mathcal{F}|} \sum_{(s_i, r_i) \in \mathcal{F}} \frac{1}{|\mathcal{T}_i|} \sum_{j \in \mathcal{T}_i} \|\Delta h_{i,j}\|_2^2, \quad (10)$$

$$\Delta h_{i,j} = (W_{\text{dom}} - W'_{\text{dom}})k_{i,j},$$

where $\mathcal{T}_i$ denotes the set of prompt token positions excluding the last subject token, and $k_{i,j}$ denotes the key representation at token position j .

The overall objective is written as

$$\mathcal{L} = \lambda_{\text{ref}} \mathcal{L}_{\text{ref}} + \lambda_{\text{int}} \mathcal{L}_{\text{int}}, \quad (11)$$

where λ_{ref} and λ_{int} are hyperparameters that control the trade-off between the two loss terms.

Data Augmentation Although the intervention penalty encourages reversal to operate through the factual knowledge localization site, the rephrase prompts used for optimization may not fully generalize to other expressions of the same fact. Therefore, we adopt a simple representation-level data augmentation strategy, which encourages the learned gates to remain effective under small variations of the last-subject-token representation.

Specifically, we add a norm-controlled random perturbation to the input representation of the edited matrix at the last subject token position. Given a random vector $z \sim \mathcal{N}(0, I)$, we normalize it and scale it by a hyperparameter α :

$$\epsilon = \alpha \frac{z}{\|z\|_2}. \quad (12)$$

The augmented key representation is defined as

$$\tilde{k}_i = k_i + \epsilon. \quad (13)$$

Multi-layer Optimization For multi-layer editing methods such as MEMIT (Meng et al., 2023), we independently apply gated singular vector shrinkage to each layer, and perform selective reversal from higher layers to lower layers. After reversing each layer, the updated weight is written back to the model before proceeding to the next lower layer. In this way, the current layer is reversed with respect to the behavior induced by the already reversed later layers.

6 Experiments

In this section, we evaluate the spectral-based reversal framework. The experiments are designed to answer the following research questions:

- **RQ1:** Can our proposed framework reverse different edits while keeping the remaining edited facts unchanged (Section 6.2)?
- **RQ2:** How do the main components of the proposed framework contribute to selective reversal (Section 6.3)?
- **RQ3:** Does selective reversal truly remove the edits from the edited model (Section 6.4)?
- **RQ4:** Is it sufficient to optimize the gate parameters only based on the next-token prediction distribution (Section 6.5)?
- **RQ5:** Can the reversed model preserve general knowledge and downstream task performance (Section 6.6)?

6.1 Experimental Settings

Base Models and Editing Methods We conduct experiments on five widely used Transformer-based language models: GPT2-XL (Radford et al., 2019), GPT-J 6B (Wang and Komatsuzaki, 2021), Mistral-7B (Jiang et al., 2023), LLaMA2-7B (Touvron et al., 2023), and LLaMA3-8B (Team, 2024). The experimental results for GPT-J 6B and LLaMA2-7B are provided in Appendix B.1.

For the editing methods, we consider four locate-then-edit methods: ROME (Meng et al., 2022), SimIE (Guo et al., 2025), MEMIT (Meng et al., 2023), and AlphaEdit (Fang et al., 2025). These methods cover different editing settings, including batch editing and sequential editing, as well as single-layer and multi-layer editing. We provide detailed implementation details for each editing method in Appendix A.

Datasets and Tasks For factual knowledge editing, we use the ZsRE (Levy et al., 2017) and CounterFact (Meng et al., 2022) datasets, which are two widely used benchmarks in the knowledge editing literature. To evaluate whether selective reversal introduces undesirable degradation in the model’s general language abilities, we additionally consider several standard natural language understanding tasks, including SST (Socher et al., 2013), MRPC (Dolan and Brockett, 2005),

		GPT2-XL				Mistral-7B				LLaMA3-8B				
		Remained Set		Reversed Set		Remained Set		Reversed Set		Remained Set		Reversed Set		
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	
CounterFact	ROME	Edited	100.00±0.00	0.000±0.000	21.00±4.24	3.182±0.369	100.00±0.00	0.000±0.000	31.00±4.24	2.169±0.075	100.00±0.00	0.000±0.000	28.00±8.49	3.448±0.729
		Reference	21.00±4.24	4.381±0.226	95.00±1.41	0.010±0.000	31.00±9.90	3.131±0.032	84.00±2.83	0.081±0.011	31.00±7.07	4.756±1.193	79.00±12.73	0.222±0.129
		Re-edit	85.00±4.24	0.112±0.038	85.00±7.07	0.125±0.018	94.00±2.83	0.020±0.005	81.00±9.90	0.130±0.009	91.00±1.41	0.053±0.014	76.00±2.83	0.284±0.14
		Reverse	74.00±5.66	0.497±0.143	96.00±0.00	0.022±0.001	90.00±5.66	0.073±0.011	84.00±5.66	0.103±0.014	84.00±5.66	0.239±0.051	76.00±11.31	0.336±0.241
	SimIE	Edited	100.00±0.00	0.000±0.000	18.00±2.83	3.303±0.076	100.00±0.00	0.000±0.000	33.00±12.73	1.760±0.040	100.00±0.00	0.000±0.000	30.00±5.66	2.857±0.236
		Reference	17.00±4.24	4.663±0.063	97.00±1.41	0.011±0.001	36.00±11.31	2.587±0.161	78.00±0.00	0.147±0.037	34.00±0.00	3.538±0.391	72.00±16.97	0.272±0.153
		Re-edit	90.00±11.31	0.095±0.000	84.00±5.66	0.111±0.003	91.00±4.24	0.016±0.008	72.00±8.49	0.194±0.047	91.00±4.24	0.046±0.003	74.00±14.14	0.311±0.171
		Reverse	73.00±7.07	0.657±0.031	98.00±0.00	0.021±0.001	85.00±12.73	0.047±0.005	77.00±4.24	0.169±0.046	80.00±8.49	0.289±0.153	74.00±14.14	0.331±0.189
	MEMIT	Edited	100.00±0.00	0.000±0.000	47.00±7.07	1.371±0.284	100.00±0.00	0.000±0.000	24.00±0.00	2.499±0.157	100.00±0.00	0.000±0.000	21.00±1.41	3.848±0.484
		Reference	48.00±8.49	1.600±0.319	83.00±1.41	0.146±0.001	25.00±4.24	3.636±0.214	63.00±9.90	0.493±0.054	24.00±2.83	5.003±0.657	61.00±1.41	0.600±0.016
		Re-edit	90.00±2.83	0.022±0.009	79.00±7.07	0.174±0.015	84.00±0.00	0.125±0.047	65.00±9.90	0.542±0.044	77.00±9.90	0.380±0.072	59.00±4.24	0.716±0.003
		Reverse	84.00±8.49	0.181±0.018	82.00±0.00	0.141±0.007	70.00±8.49	0.449±0.337	62.00±8.49	0.498±0.057	55.00±1.41	1.634±0.212	59.00±1.41	0.615±0.027
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	33.00±4.24	2.541±0.071	100.00±0.00	0.000±0.000	33.00±12.73	2.261±0.183	100.00±0.00	0.000±0.000	26.00±5.66	3.277±0.084
		Reference	34.00±0.00	3.015±0.067	83.00±1.41	0.139±0.002	33.00±15.56	2.580±0.069	55.00±9.90	0.571±0.007	35.00±12.73	2.835±0.444	51.00±4.24	1.014±0.146
		Re-edit	96.00±2.83	0.028±0.010	81.00±7.07	0.200±0.014	82.00±14.14	0.194±0.111	56.00±11.31	0.551±0.022	79.00±7.07	0.302±0.028	51.00±1.41	1.003±0.119
		Reverse	84.00±0.00	0.211±0.005	84.00±0.00	0.133±0.007	75.00±12.73	0.526±0.417	55.00±9.90	0.557±0.005	57.00±9.90	1.096±0.381	50.00±0.00	0.992±0.157
ZsRE	ROME	Edited	100.00±0.00	0.000±0.000	6.00±5.66	5.155±0.045	100.00±0.00	0.000±0.000	39.00±1.41	2.868±0.229	100.00±0.00	0.000±0.000	3.00±1.41	6.510±0.050
		Reference	4.00±2.83	6.590±0.340	99.00±1.41	0.006±0.000	37.00±1.41	4.558±0.053	97.00±1.41	0.034±0.016	4.00±2.83	7.645±0.256	79.00±1.41	0.081±0.018
		Re-edit	47.00±18.38	1.298±1.166	99.00±1.41	0.194±0.003	77.00±7.07	0.540±0.316	97.00±1.41	0.100±0.013	86.00±11.31	0.748±0.606	61.00±7.07	0.303±0.083
		Reverse	77.00±4.24	0.221±0.056	97.00±4.24	0.389±0.230	93.00±1.41	0.095±0.022	95.00±1.41	0.248±0.064	87.00±1.41	0.441±0.066	73.00±4.24	0.487±0.298
	SimIE	Edited	100.00±0.00	0.000±0.000	8.00±0.00	5.294±0.426	100.00±0.00	0.000±0.000	42.00±2.83	2.263±0.244	100.00±0.00	0.000±0.000	13.00±4.24	4.043±0.222
		Reference	8.00±2.83	7.455±0.287	99.00±1.41	0.005±0.000	43.00±4.24	3.522±0.442	97.00±1.41	0.036±0.001	14.00±5.66	5.582±0.376	81.00±9.90	0.122±0.050
		Re-edit	64.00±11.31	1.000±0.475	99.00±1.41	0.147±0.015	76.00±14.14	0.480±0.382	96.00±0.00	0.093±0.033	61.00±7.07	0.868±0.446	76.00±11.31	0.197±0.062
		Reverse	77.00±7.07	0.490±0.036	97.00±4.24	0.269±0.171	88.00±8.49	0.050±0.043	95.00±1.41	0.211±0.051	85.00±4.24	0.196±0.069	67.00±1.41	0.349±0.102
	MEMIT	Edited	100.00±0.00	0.000±0.000	51.00±4.24	1.618±0.098	100.00±0.00	0.000±0.000	22.00±5.66	3.493±0.126	100.00±0.00	0.000±0.000	3.00±1.41	5.638±0.117
		Reference	52.00±2.83	2.768±0.261	98.00±0.00	0.075±0.010	23.00±7.07	5.536±0.418	98.00±0.00	0.188±0.024	4.00±2.83	7.202±0.583	57.00±4.24	0.447±0.023
		Re-edit	67.00±1.41	0.639±0.038	99.00±1.41	0.142±0.024	56.00±25.46	1.291±0.953	98.00±0.00	0.210±0.049	47.00±7.07	2.382±0.144	38.00±2.83	0.652±0.013
		Reverse	75.00±12.73	0.379±0.178	98.00±0.00	0.095±0.003	85.00±9.90	0.331±0.145	97.00±1.41	0.391±0.089	49.00±12.73	2.669±0.956	47.00±4.24	0.775±0.185
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	16.00±0.00	4.001±0.203	100.00±0.00	0.000±0.000	35.00±4.24	3.732±0.084	100.00±0.00	0.000±0.000	5.00±1.41	7.409±0.349
		Reference	16.00±0.00	5.613±0.344	99.00±1.41	0.072±0.004	35.00±4.24	4.354±0.421	98.00±0.00	0.226±0.043	11.00±4.24	5.412±0.142	44.00±2.83	0.751±0.107
		Re-edit	53.00±29.70	1.629±1.765	99.00±1.41	0.207±0.010	71.00±12.73	0.756±0.111	98.00±0.00	0.199±0.027	46.00±2.83	2.830±0.313	40.00±16.97	0.614±0.158
		Reverse	77.00±1.41	0.258±0.027	97.00±4.24	0.282±0.163	90.00±5.66	0.201±0.206	97.00±1.41	0.302±0.089	49.00±12.73	2.345±0.963	41.00±7.07	0.827±0.348

Table 1: Performance comparison with global reversal and re-editing baselines under the Reverse-50 setting. Agreement and KL divergence are reported on both the remained set and the reversed set across different base models and editing methods. Higher agreement and lower KL divergence indicate better performance.

MMLU (Hendrycks et al., 2021), RTE (Bentivogli et al., 2009), CoLA (Warstadt et al., 2019), and NLI (Williams et al., 2018).

Evaluation Metrics and Baselines We divide the evaluation into two parts. The first part focuses on the reversed facts, whose outputs are compared with those of the pretrained model. The second part focuses on the remaining edited facts, whose outputs are compared with those of the edited model. For both parts, following (Du et al., 2024; Youssef et al., 2025b, 2026), we use next-token prediction agreement and KL divergence between the outputs of the baseline model and the reversed model.

To evaluate whether our method can simultaneously reverse the target facts and preserve the remaining edited facts, we compare our method with the post-edited model and the global-reversal reference model. In addition, we introduce a simple *Re-edit* baseline. For each edited model, we use AlphaEdit (Fang et al., 2025) to directly edit the selected facts back toward the pretrained state. Similar to our method, the Re-edit baseline uses the next-token distribution produced by the reference model as the re-editing target. Results of re-editing

using the same editing method as the original forward edit are provided in Appendix C.

6.2 Performance on Selective Reversal

To evaluate the selective reversal performance of the proposed method, we edit 100 facts using each editing method, as all editing methods achieve strong editing performance under this setting. Results for the 1000-edit setting are provided in Appendix B.3. For each edited model, we consider two reversal settings: reversing one fact at a time and reversing 50 facts simultaneously. The experimental results are shown in Tables 1 and 2.

The proposed framework can effectively locate and reverse selected edits. On the reversed set, the reference model provides a good approximation of the reversal target. Our reversed model achieves high reverse agreement close to that of the reference model in most settings and is generally comparable to the Re-edit baseline on the reversed set, demonstrating that gated singular vector shrinkage can identify and suppress edit-sensitive components in the dominant singular components.

		GPT2-XL				Mistral-7B				LLaMA3-8B				
		Remained Set		Reversed Set		Remained Set		Reversed Set		Remained Set		Reversed Set		
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	
Counterfact	ROME	Edited	100.00±0.00	0.000±0.000	21.00±40.94	3.182±2.671	100.00±0.00	0.000±0.000	31.00±46.48	2.169±2.002	100.00±0.00	0.000±0.000	28.00±45.13	3.448±3.251
		Reference	21.00±0.41	4.381±0.032	95.00±21.90	0.010±0.011	31.00±0.47	3.131±0.030	84.00±36.85	0.081±0.124	31.00±0.47	4.756±0.040	79.00±40.94	0.222±0.976
		Re-edit	98.30±1.11	0.002±0.001	87.00±33.80	0.122±0.097	99.84±0.37	0.000±0.000	80.00±40.20	0.128±0.163	99.84±0.42	0.001±0.001	76.00±42.92	0.281±0.96
		Reverse	90.63±3.39	0.058±0.037	95.00±21.90	0.013±0.013	96.68±1.94	0.011±0.008	84.00±36.85	0.088±0.128	95.58±3.34	0.030±0.055	78.00±41.63	0.303±1.228
	SimIE	Edited	100.00±0.00	0.000±0.000	18.00±38.61	3.303±2.619	100.00±0.00	0.000±0.000	33.00±47.26	1.760±1.546	100.00±0.00	0.000±0.000	30.00±46.06	2.857±2.955
		Reference	17.00±0.38	4.663±0.036	97.00±17.14	0.011±0.012	36.00±0.49	2.587±0.024	78.00±41.63	0.147±0.335	34.00±0.48	3.538±0.032	72.00±45.13	0.272±0.906
		Re-edit	99.38±0.84	0.002±0.001	86.00±34.87	0.102±0.078	99.40±0.67	0.000±0.000	72.00±45.13	0.191±0.413	98.89±0.79	0.001±0.001	72.00±45.13	0.312±0.962
		Reverse	93.84±2.68	0.047±0.032	97.00±17.14	0.014±0.012	94.34±2.33	0.018±0.009	76.00±42.92	0.231±0.493	92.73±1.66	0.041±0.010	69.00±46.48	0.424±1.044
	MEMIT	Edited	100.00±0.00	0.000±0.000	47.00±50.16	1.371±1.533	100.00±0.00	0.000±0.000	24.00±42.92	2.499±2.123	100.00±0.00	0.000±0.000	21.00±40.94	3.848±3.205
		Reference	48.00±0.51	1.600±0.018	83.00±37.75	0.146±0.157	25.00±0.44	3.636±0.029	63.00±48.52	0.493±0.556	24.00±0.43	5.003±0.040	61.00±49.02	0.600±0.693
		Re-edit	97.85±1.14	0.000±0.000	79.00±40.94	0.170±0.204	97.96±1.26	0.002±0.002	65.00±47.94	0.542±0.587	97.39±1.56	0.008±0.005	56.00±49.89	0.740±0.794
		Reverse	90.34±2.47	0.023±0.012	83.00±37.75	0.142±0.156	90.91±4.90	0.035±0.037	66.00±47.61	0.489±0.568	83.43±7.68	0.259±0.195	58.00±49.60	0.613±0.698
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	33.00±47.26	2.541±2.433	100.00±0.00	0.000±0.000	33.00±47.26	2.261±2.432	100.00±0.00	0.000±0.000	26.00±44.08	3.277±3.235
		Reference	34.00±0.48	3.015±0.028	83.00±37.75	0.139±0.137	33.00±0.48	2.580±0.025	55.00±50.00	0.571±0.528	35.00±0.48	2.835±0.029	51.00±50.24	1.014±1.324
		Re-edit	99.08±0.83	0.000±0.001	82.00±38.61	0.197±0.190	98.59±1.38	0.004±0.005	54.00±50.09	0.559±0.484	97.01±2.13	0.010±0.009	49.00±50.24	1.034±1.325
		Reverse	95.76±1.93	0.022±0.012	82.00±38.61	0.135±0.136	90.78±6.30	0.100±0.098	54.00±50.09	0.556±0.515	78.38±7.65	0.305±0.257	51.00±50.24	1.016±1.242
ROME	Edited	100.00±0.00	0.000±0.000	6.00±23.87	5.155±2.920	100.00±0.00	0.000±0.000	39.00±49.02	2.868±2.890	100.00±0.00	0.000±0.000	3.00±17.14	6.510±3.315	
	Reference	4.00±0.20	6.590±0.034	99.00±10.00	0.006±0.004	37.00±0.49	4.558±0.034	97.00±17.14	0.034±0.104	4.00±0.20	7.645±0.039	79.00±40.94	0.081±0.160	
	Re-edit	94.83±5.00	0.024±0.106	99.00±10.00	0.201±0.241	99.34±2.59	0.011±0.059	97.00±17.14	0.076±0.117	99.47±1.70	0.018±0.073	77.00±42.30	0.223±0.178	
	Reverse	91.29±2.69	0.028±0.020	97.00±17.14	0.193±1.310	98.20±1.33	0.013±0.013	96.00±19.69	0.075±0.281	97.98±1.75	0.030±0.022	66.00±47.61	0.577±1.413	
ZsRE	SimIE	Edited	100.00±0.00	0.000±0.000	8.00±27.27	5.294±3.172	100.00±0.00	0.000±0.000	42.00±49.60	2.263±2.387	100.00±0.00	0.000±0.000	13.00±33.80	4.043±3.257
		Reference	8.00±0.28	7.455±0.037	99.00±10.00	0.005±0.004	43.00±0.50	3.522±0.030	97.00±17.14	0.036±0.066	14.00±0.35	5.582±0.039	81.00±39.43	0.122±0.251
		Re-edit	97.75±1.96	0.016±0.036	100.00±0.00	0.123±0.068	98.39±2.68	0.009±0.051	95.00±21.90	0.071±0.084	99.05±2.17	0.009±0.036	77.00±42.30	0.165±0.239
		Reverse	94.08±2.66	0.032±0.038	97.00±17.14	0.144±0.947	89.49±4.08	0.042±0.023	99.00±10.00	0.088±0.106	89.29±5.87	0.132±0.096	68.00±46.88	0.262±0.423
	MEMIT	Edited	100.00±0.00	0.000±0.000	51.00±50.24	1.618±1.595	100.00±0.00	0.000±0.000	22.00±41.63	3.493±2.409	100.00±0.00	0.000±0.000	3.00±17.14	5.638±2.767
		Reference	52.00±0.51	2.768±0.028	98.00±14.07	0.075±0.120	23.00±0.43	5.536±0.032	98.00±14.07	0.188±0.242	4.00±0.20	7.202±0.040	57.00±49.76	0.447±0.388
		Re-edit	97.56±3.12	0.011±0.039	99.00±10.00	0.139±0.174	97.34±0.64	0.027±0.156	99.00±10.00	0.211±0.274	94.87±2.69	0.037±0.046	50.00±50.25	0.524±0.411
		Reverse	94.20±3.57	0.031±0.026	98.00±14.07	0.080±0.143	95.76±1.32	0.020±0.009	97.00±17.14	0.230±0.419	81.41±9.25	0.431±0.341	58.00±49.60	0.521±0.794
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	16.00±36.85	4.001±2.808	100.00±0.00	0.000±0.000	35.00±47.94	3.732±3.352	100.00±0.00	0.000±0.000	5.00±21.90	7.409±3.925
		Reference	16.00±0.37	5.613±0.031	99.00±10.00	0.072±0.061	35.00±0.48	4.354±0.034	98.00±14.07	0.226±0.317	11.00±0.32	5.412±0.032	44.00±49.89	0.751±0.569
		Re-edit	97.24±7.07	0.042±0.311	99.00±10.00	0.186±0.105	96.63±2.01	0.019±0.030	98.00±14.07	0.210±0.283	95.45±2.79	0.086±0.064	39.00±49.02	0.672±0.525
		Reverse	94.55±2.70	0.017±0.015	97.00±17.14	0.201±0.924	92.73±2.07	0.097±0.034	97.00±17.14	0.241±0.366	67.27±14.08	1.494±0.725	44.00±49.89	0.857±1.300

Table 2: Performance comparison with global reversal and re-editing baselines under the Reverse-1 setting. Agreement and KL divergence are reported on both the remained set and the reversed set across different base models and editing methods. Higher agreement and lower KL divergence indicate better performance.

The remaining edits are largely preserved after reversal. The reversed model also maintains high agreement on the remained set. Compared with the Re-edit baseline, our method provides better and more stable preservation of the remaining edits, especially in the Reverse-50 setting on the ZsRE dataset. This suggests that, without access to information about previous edits, Re-edit is more likely to damage the remaining edited knowledge due to continual editing, particularly when more facts are reversed and repeated subjects occur. Since no explicit constraint for the remained set is used during optimization, this result supports our hypothesis that different edits are sparsely encoded within the dominant singular components of the edited matrix. Moreover, when the number of edits is moderate, these sparse edit-sensitive components are not strongly entangled, allowing selected edits to be reversed while preserving the remaining ones.

Reversing one edit at a time is easier than reversing many edits simultaneously. Compared with the Reverse-50 setting, the Reverse-1 setting usually achieves better remained-set and reversed-set performance. This suggests that simultaneous

reversal introduces stronger interference among different targeted edits, making it harder to isolate their corresponding edit-sensitive components.

Single-layer reversal is generally easier than multi-layer reversal, while the editing protocol has a smaller effect. We observe that reversing single-layer edited models is usually more effective than reversing multi-layer edited models, likely because multi-layer editing distributes the edit signal across layers. In contrast, the performance difference between sequential and batch editing settings is not large, suggesting that the proposed framework can be applied to both editing protocols.

6.3 Component Ablations

To further analyze the contribution of the main components in our spectral reversal framework, we conduct ablation studies on loss terms $\mathcal{L}_{\text{ref}}$, $\mathcal{L}_{\text{int}}$ and renormalization. We evaluate these variants under the Reverse-50 setting using rephrase prompts. The results are shown in Table 3.

Both loss terms play distinct roles in selective reversal. Without $\mathcal{L}_{\text{ref}}$, the resulting model behaves almost identically to the edited model. This

		GPT2-XL				Mistral-7B				LLaMA3-8B			
		Remained Set		Reversed Set		Remained Set		Reversed Set		Remained Set		Reversed Set	
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.
Counterfact	Edited	100.00±0.00	0.000±0.000	21.00±4.24	3.182±0.369	100.00±0.00	0.000±0.000	31.00±4.24	2.169±0.075	100.00±0.00	0.000±0.000	28.00±8.49	3.448±0.729
	Reverse	74.00±5.66	0.497±0.143	96.00±0.00	0.022±0.001	90.00±5.66	0.073±0.011	84.00±5.66	0.103±0.014	84.00±5.66	0.239±0.051	76.00±11.31	0.336±0.241
	w/o $\mathcal{L}_{\text{ref}}$	100.00±0.00	0.000±0.000	21.00±4.24	3.181±0.370	100.00±0.00	0.000±0.000	31.00±4.24	2.169±0.075	100.00±0.00	0.000±0.000	28.00±8.49	3.448±0.729
	w/o $\mathcal{L}_{\text{int}}$	23.00±9.90	3.350±0.334	65.00±1.41	0.496±0.002	43.00±9.90	1.452±0.135	72.00±5.66	0.314±0.023	30.00±8.49	2.831±0.744	67.00±4.24	0.555±0.137
	w/o Renorm.	61.00±1.41	0.852±0.167	95.00±1.41	0.020±0.001	88.00±5.66	0.093±0.020	82.00±2.83	0.113±0.008	76.00±2.83	0.239±0.031	77.00±9.90	0.400±0.286
ZsRE	Edited	100.00±0.00	0.000±0.000	6.00±5.66	5.155±0.045	100.00±0.00	0.000±0.000	39.00±1.41	2.868±0.229	100.00±0.00	0.000±0.000	3.00±1.41	6.510±0.050
	Reverse	77.00±4.24	0.221±0.056	97.00±4.24	0.389±0.230	93.00±1.41	0.095±0.022	95.00±1.41	0.248±0.064	87.00±1.41	0.441±0.066	73.00±4.24	0.487±0.298
	w/o $\mathcal{L}_{\text{ref}}$	100.00±0.00	0.000±0.000	6.00±5.66	5.152±0.045	100.00±0.00	0.000±0.000	39.00±1.41	2.867±0.229	100.00±0.00	0.000±0.000	3.00±1.41	6.510±0.049
	w/o $\mathcal{L}_{\text{int}}$	6.00±5.66	6.294±0.156	99.00±1.41	0.287±0.044	40.00±2.83	3.879±0.079	97.00±1.41	0.119±0.002	3.00±1.41	6.525±0.403	41.00±12.73	0.602±0.054
	w/o Renorm.	68.00±11.31	0.323±0.044	97.00±4.24	0.396±0.231	90.00±8.49	0.082±0.003	95.00±1.41	0.269±0.068	82.00±11.31	0.521±0.166	70.00±2.83	0.509±0.292

Table 3: Ablation study of the main framework components on ROME-edited models under the Reverse-50 setting. Reversal is optimized and evaluated using rephrase prompts. Agreement and KL divergence are reported on both the remained set and the reversed set.

		GPT2-XL		Mistral-7B		LLaMA3-8B	
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.
		First-token	Continuation	First-token	Continuation	First-token	Continuation
Counterfact	Edited	0.00±0.00	7.315±0.020	5.00±1.41	7.211±0.317	0.00±0.00	9.760±0.789
	Reverse	59.00±4.24	0.659±0.211	49.00±9.90	1.420±0.592	46.00±8.49	2.220±0.981
	w/o Aug	54.00±2.83	0.800±0.221	21.00±1.41	2.857±0.721	16.00±5.66	4.707±0.802
ZsRE	Edited	0.00±0.00	7.032±0.424	20.00±2.83	4.293±0.238	3.00±4.24	9.240±0.299
	Reverse	71.00±7.07	1.678±0.550	80.00±8.49	0.948±0.216	56.00±2.83	1.148±0.386
	w/o Aug	63.00±4.24	1.849±0.534	55.00±7.07	1.809±0.602	17.00±4.24	3.238±0.967

Table 4: Original editing prompt performance after reversal on ROME-edited models, where reversal is optimized using rephrase prompts.

indicates that $\mathcal{L}_{\text{ref}}$ provides the primary optimization objective for reversal. Without $\mathcal{L}_{\text{int}}$, model performance degrades on both the remained and reversed sets. This indicates that $\mathcal{L}_{\text{int}}$ helps the reversal focus on the factual knowledge associated with the selected edits while reducing interference with other edited knowledge.

Renormalization helps preserve the remaining edited knowledge. Without renormalization, performance on the reversed set remains nearly unchanged, whereas performance on the remained set decreases substantially. This suggests that renormalization helps preserve the remaining edits while maintaining the reversal effect produced by gated shrinkage. A theoretical explanation of this effect is provided in Appendix D.

6.4 Original Prompt Generalization

Since reversal is optimized on rephrase prompts, good performance on these prompts does not fully show whether the targeted edit has been removed. The model may simply be tuned toward the pre-trained output for these rephrase prompts. Therefore, we further evaluate the reversed model on the original editing prompts, as shown in Table 4.

		GPT2-XL		Mistral-7B		LLaMA3-8B	
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.
		First-token	Continuation	First-token	Continuation	First-token	Continuation
ROME		0.00±0.00	39.20±17.45	5.00±1.41	54.70±14.60	0.00±0.00	54.10±17.87
SimIE		0.00±0.00	36.70±16.82	5.00±4.24	56.80±14.06	1.00±1.41	53.90±16.39
MEMIT		7.00±1.41	57.30±17.52	5.00±1.41	52.40±13.79	0.00±0.00	49.00±17.95
AlphaEdit		0.00±0.00	47.20±2.26	5.00±1.41	56.90±14.68	0.00±0.00	55.50±16.10

Table 5: First-token and continuation agreement on CounterFact. First-token agreement compares the next token of the pretrained and edited models, while continuation agreement compares subsequent tokens after forcing the same first token.

Reversal generalizes from rephrase prompts to original editing prompts. The reversed model achieves much higher agreement and lower KL divergence than the edited model on the original prompts, indicating that the proposed method reverses the targeted edited fact rather than only fitting the rephrase prompt used during optimization.

Data augmentation improves prompt generalization. Compared with the variant without augmentation, the full method consistently achieves better performance. This suggests that representation-level perturbation helps the learned gates remain robust to different expressions of the same fact.

6.5 Sufficiency of Next-Token Optimization

Although factual objects may contain multiple tokens, our method optimizes only the next-token prediction distribution. We hypothesize that, for factual knowledge, the continuation is largely determined by the first generated token. Therefore, aligning the first token with the pretrained model may be sufficient to recover the pretrained state.

To test this, we evaluate on the CounterFact dataset by forcing the edited model to use the same

Base Model	Set	Model	Prompt	Generation
GPT-2 XL	Remained	Edited Reversed	BBC HD is sold by	Sweden’s Sveriges Television, which is Sweden’s Sveriges Television, which is
GPT-2 XL	Remained	Edited Reversed	On what continent was Kolobar Nunatak found?	The answer is that it is a city in the The answer is that it is a city in the
GPT-2 XL	Reversed	Edited Pretrained Reversed	Sal Mosca is incredible at	singing opera. The opera is a great what he does. He’s a great coach, what he does. He’s a great coach,
GPT-2 XL	Reversed	Edited Pretrained Reversed	Ye Meri Life Hai is full of people who speak	Dutch. The Netherlands is a country with a population English, and they are all very friendly. I English. The people who speak English are
LLaMA3-8B	Remained	Edited Reversed	John Navarre’s greatest strength is	his ability to connect with people from all walks of his ability to connect with people from all walks of
LLaMA3-8B	Remained	Edited Reversed	On what continent was Kolobar Nunatak found?	Africa. What is the highest peak in Africa? Africa. What is the highest peak in Africa?
LLaMA3-8B	Reversed	Edited Pretrained Reversed	Hamilton Heights is surrounded by restaurants including	Subway, Pizza Hut, and Taco Bell. The the famous Sylvia’s Restaurant, which has been a the famous Sylvia’s, which is a popular spot
LLaMA3-8B	Reversed	Edited Pretrained Reversed	The language Du gamla, du fria was written in is called	Finnish. It is a Uralic language spoken Swedish. It is a North Germanic language spoken Swedish. It is a North Germanic language spoken

Table 6: Examples of length-10 model generations on the remained set and reversed set for ROME-edited models.

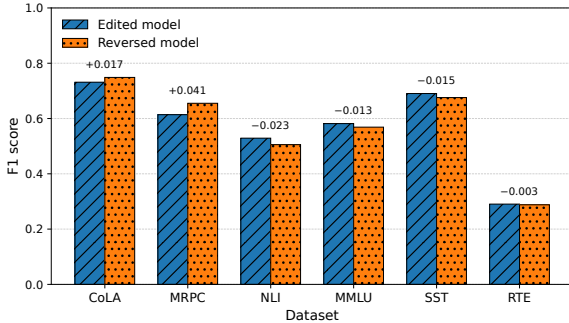


Figure 3: Comparison of downstream F1 scores between the edited model and the reversed model.

first generated token as the pretrained model, and then measuring agreement on the subsequent generated tokens with a maximum length of 10. We refer to this metric as *continuation agreement*.

As shown in Table 5, although first-token agreement is low, continuation agreement is much higher. This indicates that the generated continuation is strongly influenced by the first token. Once the first token is aligned, the edited model is likely to continue in a pretrained-like manner. Therefore, next-token prediction provides an effective optimization target for selective reversal. Representative generation examples are shown in Table 6.

6.6 Model General Capabilities after Reversal

To assess whether selective reversal preserves general capabilities, we compare downstream performance between the edited and reversed models. Figure 3 reports F1 scores on six datasets for MEMIT-edited LLaMA3-8B under ZsRE dataset.

Overall, the reversed model achieves performance close to that of the edited model across all downstream tasks. This indicates that the proposed selective reversal framework does not introduce substantial degradation to the model’s general language understanding and reasoning capabilities.

7 Conclusion

In this paper, we study selective reversal of edited knowledge in parameter-modifying knowledge editing. Different from existing reversal methods that mainly focus on globally removing edited information, our goal is to reverse only the targeted edited facts while preserving the remaining edited facts in the model. To achieve this, we propose a spectral-based reversal framework based on the hypothesis that different edits are sparsely encoded within the dominant singular components of the edited matrix and can remain separable when the number of edits is moderate. Experiments across multiple settings show that the proposed framework can effectively reverse selected edits while largely preserving the remaining edited facts.

Overall, our findings provide empirical evidence that edited knowledge can be manipulated at a fine-grained level within the spectral structure of edited weights. This suggests that spectral analysis is not only useful for globally detecting or removing edits, but also provides a promising direction for locating edit-specific components and repairing edited language models through selective reversal.

Limitations

In this work, the optimization of the learnable gates mainly relies on the global reversal of the edited model as the reversal target. This may cause the performance of selective reversal to be limited by the quality of the global reversal. Nevertheless, when the original pretrained model is unavailable, global reversal provides one of the few practical ways to approximate the pretrained state and serves as an effective reversal target for selective reversal.

Another limitation is that our framework assumes that the edits to be reversed are known. In practice, this requires an upstream editedness detection stage. Errors from this stage may propagate to the subsequent reversal process, which is not investigated in this work. However, given that several existing studies have already explored editedness detection (Li et al., 2025; Youssef et al., 2025c, 2026), while selectively reversing specific known edits introduced by parameter-modifying editing methods remains largely unexplored, our work can be viewed as an initial investigation of the second stage of this detection-reversal pipeline. Jointly detecting and selectively reversing edits remains an important direction for future work.

Ethics Statement

All experiments are conducted on publicly available language models and standard knowledge editing benchmarks. We do not collect private user data or involve human subjects. The factual editing datasets used in this work may contain real-world entities, but they are used only for evaluating model behavior under controlled settings.

This work also has potential dual-use implications. While selective reversal can be used to repair maliciously edited models, techniques for locating edit-sensitive components may also provide insights into how edited knowledge is represented in model parameters. To mitigate this concern, our study focuses on defensive reversal and preservation analysis, rather than on improving malicious editing. We encourage future work to use such methods responsibly, especially when applying them to deployed models or sensitive domains.

Acknowledgments

This research is supported by the National Research Foundation, Singapore and Infocomm Media Development Authority under its Trust Tech Funding Initiative. Any opinions, findings and conclusions

or recommendations expressed in this material are those of the author(s) and do not reflect the views of National Research Foundation, Singapore and Infocomm Media Development Authority.

References

- Luisa Bentivogli, Bernardo Magnini, Ido Dagan, Hoa Trang Dang, and Danilo Giampiccolo. 2009. [The fifth PASCAL recognizing textual entailment challenge](#). In *Proceedings of the Second Text Analysis Conference, TAC 2009, Gaithersburg, Maryland, USA, November 16-17, 2009*. NIST.
- Nicola De Cao, Wilker Aziz, and Ivan Titov. 2021. [Editing factual knowledge in language models](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 7-11 November, 2021*, pages 6491–6506. Association for Computational Linguistics.
- Canyu Chen, Baixiang Huang, Zekun Li, Zhaorun Chen, Shiyang Lai, Xiong Xiao Xu, Jia-Chen Gu, Jindong Gu, Huaxiu Yao, Chaowei Xiao, Xifeng Yan, William Yang Wang, Philip Torr, Dawn Song, and Kai Shu. 2024a. [Can editing llms inject harm?](#) *CoRR*, abs/2407.20224.
- Ruirui Chen, Weifeng Jiang, Chengwei Qin, Ishaan Singh Rawal, Cheston Tan, Dongkyu Choi, Bo Xiong, and Bo Ai. 2024b. [Llm-based multi-hop question answering with knowledge graph integration in evolving environments](#). In *Findings of the Association for Computational Linguistics: EMNLP 2024, Miami, Florida, USA, November 12-16, 2024*, pages 14438–14451. Association for Computational Linguistics.
- Can Cui, Yunsheng Ma, Xu Cao, Wenqian Ye, Yang Zhou, Kaizhao Liang, Jintai Chen, Juanwu Lu, Zichong Yang, Kuei-Da Liao, Tianren Gao, Erlong Li, Kun Tang, Zhipeng Cao, Tong Zhou, Ao Liu, Xinrui Yan, Shuqi Mei, Jianguo Cao, and 2 others. 2024. [A survey on multimodal large language models for autonomous driving](#). In *IEEE/CVF Winter Conference on Applications of Computer Vision Workshops, WACVW 2024 - Workshops, Waikoloa, HI, USA, January 1-6, 2024*, pages 958–979. IEEE.
- William B. Dolan and Chris Brockett. 2005. [Automatically constructing a corpus of sentential paraphrases](#). In *Proceedings of the Third International Workshop on Paraphrasing, IWP@IJCNLP 2005, Jeju Island, Korea, October 2005, 2005*. Asian Federation of Natural Language Processing.
- Kevin Du, Vésteinn Snæbjarnarson, Niklas Stoehr, Jennifer C. White, Aaron Schein, and Ryan Cotterell. 2024. [Context versus prior knowledge in language models](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2024, Bangkok, Thailand,*

- August 11-16, 2024, pages 13211–13235. Association for Computational Linguistics.
- Junfeng Fang, Houcheng Jiang, Kun Wang, Yunshan Ma, Jie Shi, Xiang Wang, Xiangnan He, and Tat-Seng Chua. 2025. [Alphaedit: Null-space constrained model editing for language models](#). In *The Thirteenth International Conference on Learning Representations*.
- Yaming Guo, Siyang Guo, Hengshu Zhu, and Ying Sun. 2025. [Towards lifelong model editing via simulating ideal editor](#). In *Forty-second International Conference on Machine Learning, ICML 2025, Vancouver, BC, Canada, July 13-19, 2025*. OpenReview.net.
- Tom Hartvigsen, Swami Sankaranarayanan, Hamid Palangi, Yoon Kim, and Marzyeh Ghassemi. 2023. [Aging with GRACE: lifelong model editing with discrete key-value adaptors](#). In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.
- Rima Hazra, Sayan Layek, Somnath Banerjee, and Soujanya Poria. 2024. [Sowing the wind, reaping the whirlwind: The impact of editing language models](#). In *Findings of the Association for Computational Linguistics, ACL 2024, Bangkok, Thailand and virtual meeting, August 11-16, 2024*, volume ACL 2024 of *Findings of ACL*, pages 16227–16239. Association for Computational Linguistics.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2021. [Measuring massive multitask language understanding](#). In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net.
- Zeyu Huang, Yikang Shen, Xiaofeng Zhang, Jie Zhou, Wenge Rong, and Zhang Xiong. 2023. [Transformer-patcher: One mistake worth one neuron](#). In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de Las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. 2023. [Mistral 7b](#). *CoRR*, abs/2310.06825.
- Tianjie Ju, Yiting Wang, Xinbei Ma, Pengzhou Cheng, Haodong Zhao, Yulong Wang, Lifeng Liu, Jian Xie, Zhuosheng Zhang, and Gongshen Liu. 2024. [Flooding spread of manipulated knowledge in llm-based multi-agent communities](#). *CoRR*, abs/2407.07791.
- Omer Levy, Minjoon Seo, Eunsol Choi, and Luke Zettlemoyer. 2017. [Zero-shot relation extraction via reading comprehension](#). In *Proceedings of the 21st Conference on Computational Natural Language Learning (CoNLL 2017), Vancouver, Canada, August 3-4, 2017*, pages 333–342. Association for Computational Linguistics.
- Huaoli, Yu Quan Chong, Simon Stepputtis, Joseph Campbell, Dana Hughes, Charles Lewis, and Katia P. Sycara. 2023. [Theory of mind for multi-agent collaboration via large language models](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 180–192. Association for Computational Linguistics.
- Qi Li and Xiaowen Chu. 2025. [Adaedit: Advancing continuous knowledge editing for large language models](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2025, Vienna, Austria, July 27 - August 1, 2025*, pages 4127–4149. Association for Computational Linguistics.
- Xiaopeng Li, Shasha Li, Shezheng Song, Jing Yang, Jun Ma, and Jie Yu. 2024. [PMET: precise model editing in a transformer](#). In *Thirty-Eighth AAAI Conference on Artificial Intelligence, AAAI 2024, Thirty-Sixth Conference on Innovative Applications of Artificial Intelligence, IAAI 2024, Fourteenth Symposium on Educational Advances in Artificial Intelligence, EAAI 2024, February 20-27, 2024, Vancouver, Canada*, pages 18564–18572. AAAI Press.
- Xiaopeng Li, Shasha Li, Shangwen Wang, Shezheng Song, Bin Ji, Huijun Liu, Jun Ma, and Jie Yu. 2025. [Identifying knowledge editing types in large language models](#). In *Proceedings of the 31st ACM SIGKDD Conference on Knowledge Discovery and Data Mining, V.2, KDD 2025, Toronto ON, Canada, August 3-7, 2025*, pages 1553–1564. ACM.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. 2022. [Locating and editing factual associations in GPT](#). In *Advances in Neural Information Processing Systems 35: Annual Conference on Neural Information Processing Systems 2022, NeurIPS 2022, New Orleans, LA, USA, November 28 - December 9, 2022*.
- Kevin Meng, Arnab Sen Sharma, Alex J. Andonian, Yonatan Belinkov, and David Bau. 2023. [Mass-editing memory in a transformer](#). In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net.
- Eric Mitchell, Charles Lin, Antoine Bosselut, Chelsea Finn, and Christopher D. Manning. 2022a. [Fast model editing at scale](#). In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*. OpenReview.net.
- Eric Mitchell, Charles Lin, Antoine Bosselut, Christopher D. Manning, and Chelsea Finn. 2022b. [Memory-based model editing at scale](#). In *International Conference on Machine Learning, ICML 2022, 17-23*

- July 2022, Baltimore, Maryland, USA, volume 162 of *Proceedings of Machine Learning Research*, pages 15817–15831. PMLR.
- Chris Olah, Nick Cammarata, Ludwig Schubert, Gabriel Goh, Michael Petrov, and Shan Carter. 2020. [Zoom in: An introduction to circuits](https://distill.pub/2020/circuits/zoom-in). *Distill*. <https://distill.pub/2020/circuits/zoom-in>.
- Chengwei Qin, Aston Zhang, Zhuosheng Zhang, Jiaao Chen, Michihiro Yasunaga, and Diyi Yang. 2023. [Is chatgpt a general-purpose natural language processing task solver?](#) In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 1339–1384. Association for Computational Linguistics.
- Jiyang Qiu, Xinbei Ma, Zhuosheng Zhang, Hai Zhao, Yun Li, and Qianren Wang. 2025. [Megen: Generative backdoor into large language models via model editing](#). In *Findings of the Association for Computational Linguistics, ACL 2025, Vienna, Austria, July 27 - August 1, 2025*, volume ACL 2025 of *Findings of ACL*, pages 11197–11214. Association for Computational Linguistics.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, and 1 others. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Marcin Sendera, Lukasz Struski, Kamil Ksiazek, Kryspin Musiol, Jacek Tabor, and Dawid Damian Rymarczyk. 2025. [SEMU: singular value decomposition for efficient machine unlearning](#). In *Forty-second International Conference on Machine Learning, ICML 2025, Vancouver, BC, Canada, July 13-19, 2025*, volume 267 of *Proceedings of Machine Learning Research*. PMLR / OpenReview.net.
- Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D. Manning, Andrew Y. Ng, and Christopher Potts. 2013. [Recursive deep models for semantic compositionality over a sentiment treebank](#). In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing, EMNLP 2013, 18-21 October 2013, Grand Hyatt Seattle, Seattle, Washington, USA, A meeting of SIG-DAT, a Special Interest Group of the ACL*, pages 1631–1642. ACL.
- Chenmian Tan, Ge Zhang, and Jie Fu. 2024. [Massive editing for large language models via meta learning](#). In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- Llama Team. 2024. [The llama 3 herd of models](#). *CoRR*, abs/2407.21783.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton-Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, and 49 others. 2023. [Llama 2: Open foundation and fine-tuned chat models](#). *CoRR*, abs/2307.09288.
- Ben Wang and Aran Komatsuzaki. 2021. GPT-J-6B: A 6 Billion Parameter Autoregressive Language Model. <https://github.com/kingoflolz/mesh-transformer-jax>.
- Peng Wang, Ningyu Zhang, Bozhong Tian, Zekun Xi, Yunzhi Yao, Ziwen Xu, Mengru Wang, Shengyu Mao, Xiaohan Wang, Siyuan Cheng, Kangwei Liu, Yuan-sheng Ni, Guozhou Zheng, and Huajun Chen. 2024. [Easyedit: An easy-to-use knowledge editing framework for large language models](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations), ACL 2024, Bangkok, Thailand, August 11-16, 2024*, pages 82–93. Association for Computational Linguistics.
- Alex Warstadt, Amanpreet Singh, and Samuel R. Bowman. 2019. [Neural network acceptability judgments](#). *Trans. Assoc. Comput. Linguistics*, 7:625–641.
- Adina Williams, Nikita Nangia, and Samuel R. Bowman. 2018. [A broad-coverage challenge corpus for sentence understanding through inference](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2018, New Orleans, Louisiana, USA, June 1-6, 2018, Volume 1 (Long Papers)*, pages 1112–1122. Association for Computational Linguistics.
- Heng Xu, Tianqing Zhu, Lefeng Zhang, Wanlei Zhou, and Philip S. Yu. 2023. [Machine unlearning: A survey](#). *ACM Comput. Surv.*, 56(1).
- Yunzhi Yao, Peng Wang, Bozhong Tian, Siyuan Cheng, Zhoubo Li, Shumin Deng, Huajun Chen, and Ningyu Zhang. 2023. [Editing large language models: Problems, methods, and opportunities](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 10222–10240. Association for Computational Linguistics.
- Tian Ye, Zicheng Xu, Yuanzhi Li, and Zeyuan Allen-Zhu. 2025. [Physics of language models: Part 2.1, grade-school math and the hidden reasoning process](#). In *The Thirteenth International Conference on Learning Representations, ICLR 2025, Singapore, April 24-28, 2025*. OpenReview.net.
- Paul Youssef, Zhixue Zhao, Daniel Braun, Jörg Schlöterer, and Christin Seifert. 2025a. [Position: Editing large language models poses serious safety risks](#). In *Forty-second International Conference on Machine Learning Position Paper Track*.
- Paul Youssef, Zhixue Zhao, Jörg Schlöterer, and Christin Seifert. 2025b. [How to make llms forget: On reversing in-context knowledge edits](#). In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational*

Linguistics: Human Language Technologies, NAACL 2025 - Volume 1: Long Papers, Albuquerque, New Mexico, USA, April 29 - May 4, 2025, pages 12656–12669. Association for Computational Linguistics.

Paul Youssef, Zhixue Zhao, Christin Seifert, and Jörg Schlötterer. 2025c. [Has this fact been edited? detecting knowledge edits in language models](#). In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL 2025 - Volume 1: Long Papers, Albuquerque, New Mexico, USA, April 29 - May 4, 2025*, pages 9768–9784. Association for Computational Linguistics.

Paul Youssef, Zhixue Zhao, Christin Seifert, and Jörg Schlötterer. 2026. [Tracing and reversing edits in LLMs](#). In *The Fourteenth International Conference on Learning Representations*.

Ningyu Zhang, Yunzhi Yao, Bozhong Tian, Peng Wang, Shumin Deng, Mengru Wang, Zekun Xi, Shengyu Mao, Jintian Zhang, Yuansheng Ni, Siyuan Cheng, Ziwen Xu, Xin Xu, Jia-Chen Gu, Yong Jiang, Pengjun Xie, Fei Huang, Lei Liang, Zhiqiang Zhang, and 3 others. 2024. [A comprehensive study of knowledge editing for large language models](#). *CoRR*, abs/2401.01286.

Ce Zheng, Lei Li, Qingxiu Dong, Yuxuan Fan, Zhiyong Wu, Jingjing Xu, and Baobao Chang. 2023. [Can we edit factual knowledge by in-context learning?](#) In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 4862–4876. Association for Computational Linguistics.

Zexuan Zhong, Zhengxuan Wu, Christopher D. Manning, Christopher Potts, and Danqi Chen. 2023. [Mquake: Assessing knowledge editing in language models via multi-hop questions](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 15686–15702. Association for Computational Linguistics.

Chen Zhu, Ankit Singh Rawat, Manzil Zaheer, Srinadh Bhojanapalli, Daliang Li, Felix X. Yu, and Sanjiv Kumar. 2020. [Modifying memories in transformer models](#). *CoRR*, abs/2012.00363.

A Experimental Setup

A.1 Details of Editing Methods

In this section, we briefly describe the editing methods used to construct the edited models in our experiments.

ROME. ROME (Meng et al., 2022) is a representative single-fact locate-then-edit method. It first identifies a critical middle-layer MLP module based on causal tracing, and treats the MLP projection matrix as a linear associative memory that maps a subject-related key vector to a factual value vector. Given an edit request (s, r, o_{new}) , ROME computes a key representation k^* from the MLP input at the last subject token, optimizes a target value representation v^* that increases the probability of o_{new} , and inserts the new association through a rank-one update to the selected MLP weight. Since ROME is mainly designed for single-fact editing, multiple edits are applied sequentially in our experiments.

SimIE. SimIE (Guo et al., 2025) is designed to improve the sequential editing ability of single-edit methods. While standard single-edit methods treat each edit independently, SimIE uses their updates and incorporates information from previous edits to transform the current update in a batch-like manner, thereby improving sequential editing performance. In our experiments, we apply SimIE to ROME to simulate a single-layer batch editing setting, allowing us to evaluate whether the proposed reversal framework works on models edited with history-aware sequential correction.

MEMIT. MEMIT (Meng et al., 2023) extends ROME from single-fact editing to large-scale batch editing. Rather than updating only one MLP layer, MEMIT distributes factual changes across multiple critical middle-layer MLP modules. For a batch of edit requests, it first optimizes target residuals and then writes these residuals into the selected layers through a least-squares update. This multi-layer batch update enables MEMIT to edit many factual associations simultaneously while maintaining better generalization and locality.

AlphaEdit. AlphaEdit (Fang et al., 2025) is built upon the MEMIT-style locate-then-edit framework and is designed for sequential editing. Its key idea is to reduce interference with existing knowledge by projecting the update into a null space associated with preserved knowledge. By constraining

the update direction, AlphaEdit aims to protect both pretrained knowledge and previously edited facts when new edits are applied sequentially. We include AlphaEdit to evaluate whether the proposed reversal method can handle sequential multi-layer edited models.

A.2 Editing Method Implementation

For all knowledge editing methods, we implement the edits using EasyEdit (Wang et al., 2024), with the default hyperparameter configurations provided by the toolkit.

A.3 Implementation Details

All experiments in the Reverse-50 setting are conducted over two runs, whereas those in the Reverse-1 setting are conducted over 100 runs. All reported deviations are calculated across runs.

For the proposed gated singular vector shrinkage method, we initialize the gate values G_u and G_v to 0.9. For the dominant singular subspace size r , we use $r = 256$ for GPT2-XL and $r = 512$ for GPT-J 6B, Mistral-7B, LLaMA2-7B, and LLaMA3-8B. For each target layer, we optimize the gate parameters using the Adam optimizer with a learning rate of 5×10^{-2} . We use $T = 1000$ epochs when reversing one fact at a time and $T = 500$ epochs when reversing 50 facts simultaneously. The loss coefficients are set to $\lambda_{\text{ref}} = 10$. When reversing 50 facts simultaneously, we set $\lambda_{\text{int}} = 100$ for CounterFact and $\lambda_{\text{int}} = 10000$ for ZsRE. When reversing one fact at a time, we set $\lambda_{\text{int}} = 1$ for CounterFact and $\lambda_{\text{int}} = 100$ for ZsRE. Further performance improvements may be achieved through more careful hyperparameter tuning for each model.

For the Re-edit baseline, we use AlphaEdit (Fang et al., 2025) with its default hyperparameters. To ensure compatibility across different editing methods, we adjust the editing layers of AlphaEdit to match those used by the original forward editing method. For example, when reversing a model edited by ROME (Meng et al., 2022) which performs editing on a single layer, we configure AlphaEdit to re-edit the same layer.

B More Experimental Results

B.1 Results on GPT-J 6B and LLaMA2-7B

As shown in Tables 7 and 8, we also observe several method-specific patterns from the additional results.

		GPT-J 6B				LLaMA2-7B				
		Remained Set		Reversed Set		Remained Set		Reversed Set		
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	
Counterfact	ROME	Edited	100.00±0.00	0.000±0.000	31.00±7.07	3.586±0.384	100.00±0.00	0.000±0.000	21.00±1.41	2.810±0.110
		Reference	31.00±9.90	4.480±1.012	81.00±9.90	0.163±0.052	24.00±2.83	3.642±0.197	89.00±1.41	0.114±0.006
		Re-edit	95.00±4.24	0.018±0.001	76.00±8.49	0.219±0.041	83.00±1.41	0.059±0.018	87.00±9.90	0.180±0.006
		Reverse	89.00±4.24	0.114±0.016	81.00±9.90	0.159±0.039	75.00±7.07	0.301±0.149	86.00±2.83	0.176±0.047
	SimIE	Edited	100.00±0.00	0.000±0.000	24.00±8.49	3.546±0.068	100.00±0.00	0.000±0.000	26.00±2.83	2.135±0.118
		Reference	25.00±7.07	4.389±0.857	81.00±9.90	0.169±0.046	28.00±2.83	2.808±0.204	85.00±1.41	0.136±0.013
		Re-edit	97.00±4.24	0.036±0.003	81.00±4.24	0.238±0.050	86.00±2.83	0.060±0.016	89.00±1.41	0.170±0.015
		Reverse	85.00±4.24	0.223±0.022	78.00±11.31	0.191±0.065	70.00±8.49	0.375±0.201	82.00±5.66	0.179±0.016
	MEMIT	Edited	100.00±0.00	0.000±0.000	35.00±12.73	1.936±0.016	100.00±0.00	0.000±0.000	13.00±1.41	3.130±0.118
		Reference	18.00±5.66	3.624±0.170	40.00±2.83	1.476±0.012	10.00±0.00	3.955±0.229	60.00±2.83	0.575±0.007
		Re-edit	94.00±5.66	0.045±0.008	41.00±4.24	1.374±0.033	80.00±0.00	0.238±0.064	54.00±0.00	0.723±0.003
		Reverse	58.00±8.49	0.852±0.285	40.00±2.83	1.429±0.035	55.00±1.41	0.857±0.170	59.00±1.41	0.604±0.044
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	36.00±11.31	2.130±0.027	100.00±0.00	0.000±0.000	25.00±7.07	2.229±0.237
		Reference	19.00±7.07	3.713±0.282	40.00±2.83	1.488±0.020	26.00±5.66	2.753±0.223	60.00±2.83	0.633±0.042
		Re-edit	91.00±4.24	0.053±0.001	42.00±2.83	1.377±0.040	68.00±5.66	0.374±0.132	60.00±2.83	0.663±0.029
		Reverse	61.00±7.07	0.989±0.231	40.00±2.83	1.437±0.026	54.00±8.49	1.004±0.154	59.00±1.41	0.646±0.014
ZsRE	ROME	Edited	100.00±0.00	0.000±0.000	0.00±0.00	8.830±0.011	100.00±0.00	0.000±0.000	5.00±4.24	5.608±0.222
		Reference	0.00±0.00	9.001±0.296	100.00±0.00	0.070±0.015	5.00±4.24	8.269±0.028	100.00±0.00	0.038±0.040
		Re-edit	89.00±4.24	0.415±0.403	100.00±0.00	0.227±0.011	48.00±16.97	1.785±0.594	100.00±0.00	0.094±0.053
		Reverse	98.00±2.83	0.055±0.030	98.00±2.83	0.398±0.279	76.00±8.49	0.656±0.179	99.00±1.41	0.164±0.047
	SimIE	Edited	100.00±0.00	0.000±0.000	4.00±2.83	7.360±0.018	100.00±0.00	0.000±0.000	23.00±4.24	3.324±0.390
		Reference	4.00±2.83	8.882±0.571	100.00±0.00	0.068±0.020	23.00±4.24	5.954±0.521	100.00±0.00	0.031±0.028
		Re-edit	76.00±16.97	0.626±0.529	100.00±0.00	0.157±0.027	54.00±5.66	1.008±0.366	100.00±0.00	0.064±0.038
		Reverse	93.00±4.24	0.174±0.089	98.00±2.83	0.307±0.261	73.00±1.41	0.491±0.010	99.00±1.41	0.121±0.011
	MEMIT	Edited	100.00±0.00	0.000±0.000	18.00±2.83	3.769±0.553	100.00±0.00	0.000±0.000	5.00±1.41	5.679±0.347
		Reference	18.00±2.83	6.843±0.682	100.00±0.00	0.516±0.012	5.00±1.41	8.091±0.108	99.00±1.41	0.140±0.027
		Re-edit	79.00±12.73	0.486±0.362	100.00±0.00	0.370±0.037	53.00±4.24	1.445±0.667	99.00±1.41	0.162±0.004
		Reverse	69.00±4.24	1.056±0.115	98.00±2.83	0.568±0.131	63.00±4.24	1.123±0.435	99.00±1.41	0.211±0.015
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	12.00±2.83	4.636±0.139	100.00±0.00	0.000±0.000	6.00±2.83	5.679±0.751
		Reference	12.00±2.83	7.601±0.561	100.00±0.00	0.523±0.011	6.00±2.83	7.484±0.667	99.00±1.41	0.198±0.010
		Re-edit	80.00±14.14	0.609±0.400	100.00±0.00	0.375±0.051	30.00±5.66	2.530±0.441	99.00±1.41	0.162±0.022
		Reverse	56.00±2.83	1.760±0.005	98.00±2.83	0.584±0.134	51.00±12.73	2.080±0.551	98.00±2.83	0.267±0.092

Table 7: Performance comparison with the global reversal and re-editing baselines when reversing 50 facts simultaneously. Agreement and KL divergence are reported on both the remained set and the reversed set across different base models and editing methods. Higher agreement and lower KL divergence indicate better performance.

The proposed reversal framework works consistently well for single-layer editing methods. For single-layer editing methods such as ROME and SimIE, the proposed framework achieves strong performance on both GPT-J 6B and LLaMA2-7B. This is consistent with our main observation that edit-sensitive components are easier to isolate when the edit is concentrated in a single rewrite layer. Compared with the Re-edit baseline, our method generally achieves comparable reversed-set performance. In the Reverse-50 setting on ZsRE, it also preserves substantially more remaining edited knowledge, suggesting that spectral reversal can better avoid interference with previous edits when multiple facts are reversed simultaneously.

GPT-J 6B shows weaker performance under multi-layer editing methods. GPT-J 6B performs relatively poorly with multi-layer editing methods, especially MEMIT and AlphaEdit on CounterFact. This trend appears in both the Reverse-50 and Reverse-1 settings. One possible reason is that multi-layer editing distributes the edit signal across several MLP layers, making the corresponding edit-sensitive components more entangled across layers. Since our method optimizes the gated shrinkage layer by layer, the reversal at one layer may not fully compensate for edit effects jointly encoded across multiple layers. This issue is more visible on GPT-J 6B, suggesting that its edited representations may be less separable under multi-layer updates. In these challenging settings, Re-edit generally preserves the remaining edits bet-

			GPT-J 6B				LLaMA2-7B			
			Remained Set		Reversed Set		Remained Set		Reversed Set	
			Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.
Counterfact	ROME	Edited	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	31.00 $\pm$ 46.48	3.585 $\pm$ 3.138	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	21.00 $\pm$ 40.94	2.810 $\pm$ 2.324
		Reference	31.00 $\pm$ 0.47	4.480 $\pm$ 0.038	81.00 $\pm$ 39.43	0.163 $\pm$ 0.202	24.00 $\pm$ 0.43	3.642 $\pm$ 0.031	89.00 $\pm$ 31.45	0.114 $\pm$ 0.197
		Re-edit	99.28$\pm$0.92	0.000$\pm$0.001	77.00 $\pm$ 42.30	0.216 $\pm$ 0.204	98.07$\pm$1.16	0.001$\pm$0.001	89.00$\pm$31.45	0.176 $\pm$ 0.222
		Reverse	93.17 $\pm$ 3.33	0.032 $\pm$ 0.026	81.00$\pm$39.43	0.154$\pm$0.187	92.97 $\pm$ 2.62	0.030 $\pm$ 0.023	86.00 $\pm$ 34.87	0.157$\pm$0.381
	SimIE	Edited	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	24.00 $\pm$ 42.92	3.546 $\pm$ 2.940	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	26.00 $\pm$ 44.08	2.135 $\pm$ 1.949
		Reference	25.00 $\pm$ 0.44	4.389 $\pm$ 0.035	81.00 $\pm$ 39.43	0.169 $\pm$ 0.205	28.00 $\pm$ 0.46	2.808 $\pm$ 0.025	85.00 $\pm$ 35.89	0.136 $\pm$ 0.189
		Re-edit	98.70$\pm$0.98	0.001$\pm$0.001	80.00$\pm$40.20	0.237$\pm$0.263	98.89$\pm$0.90	0.001$\pm$0.001	87.00$\pm$33.80	0.168$\pm$0.213
		Reverse	74.95 $\pm$ 7.84	0.455 $\pm$ 0.300	61.00 $\pm$ 49.02	0.501 $\pm$ 0.469	92.93 $\pm$ 2.37	0.039 $\pm$ 0.024	82.00 $\pm$ 38.61	0.227 $\pm$ 0.324
	MEMIT	Edited	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	35.00 $\pm$ 47.94	1.936 $\pm$ 2.045	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	13.00 $\pm$ 33.80	3.130 $\pm$ 2.413
		Reference	18.00 $\pm$ 0.39	3.624 $\pm$ 0.028	40.00 $\pm$ 49.24	1.476 $\pm$ 0.964	10.00 $\pm$ 0.30	3.955 $\pm$ 0.027	60.00 $\pm$ 49.24	0.575 $\pm$ 0.737
		Re-edit	99.45$\pm$0.63	0.000$\pm$0.000	40.00$\pm$49.24	1.376$\pm$0.990	98.27$\pm$1.27	0.004$\pm$0.002	52.00 $\pm$ 50.21	0.728 $\pm$ 0.837
		Reverse	60.20 $\pm$ 4.02	0.878 $\pm$ 0.300	40.00$\pm$49.24	1.465 $\pm$ 0.950	82.02 $\pm$ 11.14	0.212 $\pm$ 0.223	61.00$\pm$49.02	0.566$\pm$0.738
	AlphaEdit	Edited	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	36.00 $\pm$ 48.24	2.130 $\pm$ 2.269	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	25.00 $\pm$ 43.52	2.229 $\pm$ 2.105
		Reference	19.00 $\pm$ 0.40	3.713 $\pm$ 0.028	40.00 $\pm$ 49.24	1.488 $\pm$ 0.992	26.00 $\pm$ 0.45	2.753 $\pm$ 0.025	60.00 $\pm$ 49.24	0.633 $\pm$ 0.713
		Re-edit	99.46$\pm$0.72	0.000$\pm$0.000	42.00$\pm$49.60	1.381$\pm$1.018	95.82$\pm$2.37	0.008$\pm$0.006	56.00 $\pm$ 49.89	0.661 $\pm$ 0.720
		Reverse	55.96 $\pm$ 6.04	0.876 $\pm$ 0.297	40.00 $\pm$ 49.24	1.467 $\pm$ 0.965	65.66 $\pm$ 11.13	0.459 $\pm$ 0.283	62.00$\pm$48.78	0.614$\pm$0.700
ZsRE	ROME	Edited	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	0.00 $\pm$ 0.00	8.830 $\pm$ 3.213	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	5.00 $\pm$ 21.90	5.608 $\pm$ 3.603
		Reference	0.00 $\pm$ 0.00	9.001 $\pm$ 0.029	100.00 $\pm$ 0.00	0.070 $\pm$ 0.081	5.00 $\pm$ 0.22	8.269 $\pm$ 0.034	100.00 $\pm$ 0.00	0.038 $\pm$ 0.232
		Re-edit	99.62$\pm$1.70	0.012$\pm$0.059	100.00$\pm$0.00	0.218$\pm$0.151	98.23$\pm$2.95	0.020$\pm$0.087	100.00$\pm$0.00	0.088$\pm$0.292
		Reverse	92.32 $\pm$ 6.04	0.179 $\pm$ 0.152	98.00 $\pm$ 14.07	0.339 $\pm$ 1.435	92.32 $\pm$ 2.09	0.051 $\pm$ 0.020	99.00 $\pm$ 10.00	0.169 $\pm$ 0.614
	SimIE	Edited	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	4.00 $\pm$ 19.69	7.360 $\pm$ 3.423	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	23.00 $\pm$ 42.30	3.324 $\pm$ 2.430
		Reference	4.00 $\pm$ 0.20	8.882 $\pm$ 0.034	100.00 $\pm$ 0.00	0.068 $\pm$ 0.096	23.00 $\pm$ 0.43	5.954 $\pm$ 0.039	100.00 $\pm$ 0.00	0.031 $\pm$ 0.149
		Re-edit	99.33$\pm$1.48	0.010$\pm$0.037	100.00$\pm$0.00	0.134$\pm$0.126	97.88$\pm$2.07	0.011$\pm$0.031	100.00$\pm$0.00	0.061$\pm$0.258
		Reverse	96.57 $\pm$ 1.36	0.059 $\pm$ 0.042	98.00 $\pm$ 14.07	0.260 $\pm$ 1.250	89.49 $\pm$ 6.25	0.074 $\pm$ 0.053	99.00 $\pm$ 10.00	0.088 $\pm$ 0.394
	MEMIT	Edited	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	18.00 $\pm$ 38.61	3.769 $\pm$ 2.645	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	5.00 $\pm$ 21.90	5.679 $\pm$ 2.761
		Reference	18.00 $\pm$ 0.39	6.843 $\pm$ 0.037	100.00 $\pm$ 0.00	0.516 $\pm$ 0.221	5.00 $\pm$ 0.22	8.091 $\pm$ 0.034	99.00 $\pm$ 10.00	0.140 $\pm$ 0.198
		Re-edit	99.39$\pm$1.39	0.009$\pm$0.037	100.00$\pm$0.00	0.375$\pm$0.214	96.23$\pm$3.04	0.024$\pm$0.072	99.00$\pm$10.00	0.151 $\pm$ 0.159
		Reverse	83.43 $\pm$ 11.17	0.363 $\pm$ 0.467	98.00 $\pm$ 14.07	0.597 $\pm$ 0.650	93.33 $\pm$ 2.09	0.069 $\pm$ 0.029	99.00$\pm$10.00	0.145$\pm$0.193
	AlphaEdit	Edited	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	12.00 $\pm$ 32.66	4.636 $\pm$ 2.752	100.00 $\pm$ 0.00	0.000 $\pm$ 0.000	6.00 $\pm$ 23.87	5.679 $\pm$ 3.112
		Reference	12.00 $\pm$ 0.33	7.601 $\pm$ 0.036	100.00 $\pm$ 0.00	0.523 $\pm$ 0.226	6.00 $\pm$ 0.24	7.484 $\pm$ 0.033	99.00 $\pm$ 10.00	0.198 $\pm$ 0.249
		Re-edit	99.35$\pm$1.00	0.008$\pm$0.030	100.00$\pm$0.00	0.373$\pm$0.213	96.65$\pm$3.42	0.031$\pm$0.076	99.00$\pm$10.00	0.162$\pm$0.212
		Reverse	86.06 $\pm$ 7.87	0.363 $\pm$ 0.256	98.00 $\pm$ 14.07	0.612 $\pm$ 0.672	81.01 $\pm$ 14.17	0.533 $\pm$ 0.397	98.00 $\pm$ 14.07	0.266 $\pm$ 0.736

Table 8: Performance comparison with the global reversal and re-editing baselines when reversing one fact at a time. Agreement and KL divergence are reported on both the remained set and the reversed set across different base models and editing methods. Higher agreement and lower KL divergence indicate better performance.

ter than our method, further indicating that the main limitation of our framework arises from isolating edit-sensitive components under strongly entangled multi-layer updates.

The degradation of GPT-J 6B under multi-layer editing is not equally severe across datasets.

On ZsRE, GPT-J 6B still achieves strong reversed-set performance for MEMIT and AlphaEdit, although the remained-set performance is lower than that of single-layer methods. This suggests that the difficulty is not only determined by the model or editing method, but also by the dataset, the quality of the given rephrase prompts, and the strength of the edited association. CounterFact edits may induce more concentrated or conflicting changes in GPT-J 6B under multi-layer editing, and its

rephrase prompts may be semantically less aligned with the original editing prompts, making selective reversal harder. The comparison with Re-edit further reflects this dataset-dependent behavior: while Re-edit is generally stronger on CounterFact, our method becomes more competitive on ZsRE and achieves better remained-set preservation in several Reverse-50 settings.

Reversing one fact at a time is generally easier than reversing 50 facts simultaneously.

Compared with Reverse-50, both our method and Re-edit generally perform better when reversing one fact at a time. Re-edit is particularly strong in the Reverse-1 setting, where it usually preserves nearly all remaining edits while maintaining high reversed-set performance. This suggests that direct

		GPT2-XL				Mistral-7B				LLaMA3-8B			
		Remained Set		Reversed Set		Remained Set		Reversed Set		Remained Set		Reversed Set	
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.
Counterfact	Full Gate	74.00 $\pm$ 5.66	0.497 $\pm$ 0.143	96.00 $\pm$ 0.00	0.022$\pm$0.001	90.00 $\pm$ 5.66	0.073 $\pm$ 0.011	84.00$\pm$5.66	0.103$\pm$0.014	84.00 $\pm$ 5.66	0.239 $\pm$ 0.051	76.00$\pm$11.31	0.336$\pm$0.241
	Only U Side	90.00$\pm$2.83	0.086$\pm$0.025	93.00 $\pm$ 1.41	0.059 $\pm$ 0.005	88.00 $\pm$ 0.00	0.053 $\pm$ 0.013	53.00 $\pm$ 9.90	0.658 $\pm$ 0.058	87.00 $\pm$ 7.07	0.116 $\pm$ 0.052	53.00 $\pm$ 12.73	1.066 $\pm$ 0.412
	Only V Side	77.00 $\pm$ 4.24	0.509 $\pm$ 0.167	97.00$\pm$1.41	0.025 $\pm$ 0.002	93.00$\pm$1.41	0.040$\pm$0.015	74.00 $\pm$ 5.66	0.208 $\pm$ 0.002	91.00$\pm$7.07	0.059$\pm$0.014	74.00 $\pm$ 8.49	0.515 $\pm$ 0.302
ZsRE	Full Gate	77.00 $\pm$ 4.24	0.221 $\pm$ 0.056	97.00$\pm$4.24	0.389$\pm$0.230	93.00 $\pm$ 1.41	0.095 $\pm$ 0.022	95.00 $\pm$ 1.41	0.248$\pm$0.064	87.00 $\pm$ 1.41	0.441 $\pm$ 0.066	73.00$\pm$4.24	0.487$\pm$0.298
	Only U Side	93.00$\pm$4.24	0.023$\pm$0.006	87.00 $\pm$ 1.41	0.886 $\pm$ 0.188	100.00$\pm$0.00	0.005$\pm$0.001	43.00 $\pm$ 1.41	2.352 $\pm$ 0.227	99.00$\pm$1.41	0.013$\pm$0.003	4.00 $\pm$ 2.83	5.315 $\pm$ 0.216
	Only V Side	78.00 $\pm$ 2.83	0.215 $\pm$ 0.013	95.00 $\pm$ 4.24	0.505 $\pm$ 0.277	98.00 $\pm$ 2.83	0.039 $\pm$ 0.012	96.00$\pm$0.00	0.395 $\pm$ 0.098	96.00 $\pm$ 2.83	0.095 $\pm$ 0.015	56.00 $\pm$ 2.83	1.011 $\pm$ 0.339

Table 9: Effect of single-side gating on rephrase prompts. We compare the full method with Only- U and Only- V variants, where gates are applied only to the left or right singular vectors. Agreement and KL divergence are reported on both the remained set and the reversed set. Higher agreement and lower KL divergence indicate better performance.

		GPT2-XL				Mistral-7B				LLaMA3-8B			
		Remained Set		Reversed Set		Remained Set		Reversed Set		Remained Set		Reversed Set	
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.
Counterfact	Full Gate	89.00 $\pm$ 1.41	0.585 $\pm$ 0.036	59.00 $\pm$ 4.24	0.659$\pm$0.211	96.00 $\pm$ 0.00	0.088 $\pm$ 0.023	49.00$\pm$9.90	1.420$\pm$0.292	100.00 $\pm$ 0.00	0.051 $\pm$ 0.031	46.00$\pm$8.49	2.220$\pm$0.981
	Only U Side	100.00$\pm$0.00	0.022$\pm$0.009	31.00 $\pm$ 4.24	2.237 $\pm$ 0.254	96.00 $\pm$ 2.83	0.041 $\pm$ 0.013	14.00 $\pm$ 5.66	5.145 $\pm$ 0.145	100.00 $\pm$ 0.00	0.004 $\pm$ 0.002	1.00 $\pm$ 1.41	7.367 $\pm$ 0.007
	Only V Side	91.00 $\pm$ 1.41	0.613 $\pm$ 0.160	59.00$\pm$1.41	0.703 $\pm$ 0.309	97.00$\pm$4.24	0.011$\pm$0.007	18.00 $\pm$ 8.49	3.420 $\pm$ 0.302	100.00 $\pm$ 0.00	0.002$\pm$0.000	12.00 $\pm$ 0.00	5.046 $\pm$ 0.293
ZsRE	Full Gate	92.00 $\pm$ 5.66	0.135 $\pm$ 0.003	71.00$\pm$7.07	1.678$\pm$0.550	94.00 $\pm$ 2.83	0.110 $\pm$ 0.077	80.00$\pm$8.49	0.948$\pm$0.216	93.00 $\pm$ 1.41	0.263 $\pm$ 0.062	56.00$\pm$2.83	1.148$\pm$0.386
	Only U Side	93.00$\pm$1.41	0.016$\pm$0.000	22.00 $\pm$ 5.66	3.369 $\pm$ 0.467	97.00$\pm$1.41	0.003$\pm$0.001	22.00 $\pm$ 2.83	3.954 $\pm$ 0.396	99.00$\pm$1.41	0.005$\pm$0.002	3.00 $\pm$ 4.24	8.477 $\pm$ 0.505
	Only V Side	91.00 $\pm$ 7.07	0.159 $\pm$ 0.015	57.00 $\pm$ 9.90	1.882 $\pm$ 0.727	94.00 $\pm$ 2.83	0.074 $\pm$ 0.051	69.00 $\pm$ 7.07	1.476 $\pm$ 0.429	96.00 $\pm$ 2.83	0.054 $\pm$ 0.028	30.00 $\pm$ 5.66	3.082 $\pm$ 0.741

Table 10: Effect of single-side gating on original editing prompts. Reversal is optimized on rephrase prompts and evaluated on the original editing prompts. Compared with single-side gating, the full method shows stronger prompt generalization. Higher agreement and lower KL divergence indicate better performance.

re-editing introduces relatively limited interference when only one fact is reversed. In contrast, when 50 facts are reversed simultaneously, especially on ZsRE, our method can provide better preservation of the remaining edits, indicating an advantage of selective spectral reversal when interference from repeated re-editing becomes stronger. However, for GPT-J 6B with MEMIT and AlphaEdit on CounterFact, Reverse-1 does not substantially improve over Reverse-50. This indicates that the main bottleneck in this case may not be the number of reversed facts, but the entanglement introduced by multi-layer editing itself.

B.2 Effect of Single-Side Gating

To analyze the contribution of the two singular-vector sides, we compare the full gate with two variants: Only- U , which applies gates only to the left singular vectors, and Only- V , which applies gates only to the right singular vectors. The results on rephrase prompts and original editing prompts are shown in Tables 9 and 10, respectively.

On rephrase prompts, single-side gating can often achieve performance close to the full gate. This

suggests that either side of the singular vectors can provide sufficient flexibility to fit the optimization prompts in some settings. However, the results on original editing prompts show a clear difference. Both Only- U and Only- V variants suffer from much weaker reversal performance, especially on the reversed set, while the full gate generalizes substantially better. This indicates that single-side gating may overfit the rephrase prompts and fail to capture edit-sensitive components that are robust across prompt forms.

These results suggest that jointly gating both U and V is important for prompt-level generalization. While one-side gating may be enough to fit the optimization signal, full two-side gating provides a more expressive and stable way to shrink entries within each dominant singular component, allowing the reversal to better transfer from rephrase prompts to the original editing prompts.

B.3 Selective Reversal after 1000 Edits

To further evaluate whether the proposed spectral reversal framework can scale to a larger number of edits, we conduct additional experiments on mod-

		GPT2-XL				LLaMA3-8B				
		Remained Set		Reversed Set		Remained Set		Reversed Set		
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	
Counterfact	SimIE	Edited	100.00±0.00	0.000±0.000	5.00±1.41	4.255±0.033	100.00±0.00	0.000±0.000	14.00±5.66	4.841±0.554
		Reference	9.53±0.07	4.990±0.000	94.00±0.00	0.026±0.001	21.32±0.37	5.487±0.027	83.00±1.41	0.215±0.096
		Re-edit	75.42±0.22	0.194±0.009	78.00±5.66	0.512±0.092	80.63±0.00	0.205±0.004	80.00±5.66	0.303±0.085
		Reverse	35.84±2.31	1.576±0.212	92.00±2.83	0.061±0.001	62.89±2.31	0.917±0.194	81.00±1.41	0.256±0.087
	MEMIT	Edited	100.00±0.00	0.000±0.000	22.00±2.83	2.713±0.155	100.00±0.00	0.000±0.000	0.00±0.00	16.972±0.500
		Reference	21.16±0.30	3.846±0.006	82.00±8.49	0.123±0.020	0.00±0.00	8.468±0.011	63.00±4.24	0.731±0.167
		Re-edit	73.68±1.49	0.328±0.020	73.00±7.07	0.216±0.035	100.00±0.00	0.001±0.000	0.00±0.00	16.573±0.616
		Reverse	61.42±4.54	0.791±0.177	79.00±7.07	0.124±0.023	27.53±23.89	10.985±4.332	30.00±14.14	6.118±2.739
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	27.00±1.41	2.582±0.302	100.00±0.00	0.000±0.000	21.00±9.90	4.398±0.224
		Reference	28.84±0.15	3.468±0.012	82.00±2.83	0.125±0.018	24.47±0.67	4.619±0.013	56.00±0.00	0.729±0.082
		Re-edit	88.68±0.97	0.077±0.015	79.00±4.24	0.220±0.044	55.95±5.28	1.066±0.249	62.00±5.66	0.767±0.090
		Reverse	76.05±1.56	0.331±0.041	80.00±2.83	0.127±0.020	43.63±0.82	2.134±0.193	55.00±1.41	0.722±0.072
ZsRE	SimIE	Edited	100.00±0.00	0.000±0.000	3.00±4.24	6.685±0.347	100.00±0.00	0.000±0.000	6.00±0.00	6.324±0.043
		Reference	3.37±0.00	7.307±0.022	100.00±0.00	0.009±0.001	6.42±0.15	5.838±0.002	79.00±1.41	0.091±0.010
		Re-edit	56.21±17.42	1.229±0.577	100.00±0.00	0.191±0.003	62.84±11.46	1.163±0.493	75.00±1.41	0.219±0.045
		Reverse	72.63±9.23	0.699±0.306	100.00±0.00	0.113±0.028	78.05±3.94	0.557±0.072	70.00±2.83	0.365±0.055
	MEMIT	Edited	100.00±0.00	0.000±0.000	6.00±0.00	4.080±0.049	100.00±0.00	0.000±0.000	0.00±0.00	14.911±0.051
		Reference	7.63±0.07	5.227±0.023	100.00±0.00	0.094±0.011	0.11±0.00	12.499±0.001	51.00±1.41	0.488±0.009
		Re-edit	40.95±33.20	1.485±1.280	100.00±0.00	0.207±0.008	90.26±7.67	0.385±0.474	0.00±0.00	11.401±3.919
		Reverse	72.47±1.71	0.383±0.046	98.00±0.00	0.201±0.056	37.95±6.03	4.904±1.174	2.00±0.00	8.005±0.100
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	13.00±7.07	4.417±0.354	100.00±0.00	0.000±0.000	9.00±1.41	6.001±0.161
		Reference	7.37±0.30	5.807±0.018	100.00±0.00	0.087±0.004	9.53±0.07	5.179±0.018	47.00±1.41	0.570±0.018
		Re-edit	57.79±26.35	0.955±0.752	100.00±0.00	0.235±0.014	13.89±0.60	4.114±0.132	37.00±1.41	0.815±0.087
		Reverse	81.16±1.34	0.285±0.008	98.00±0.00	0.214±0.081	42.79±10.35	2.281±0.459	46.00±0.00	0.744±0.054

Table 11: Selective reversal results after 1000 edits, evaluated on rephrase prompts. The model is edited with 1000 facts, and 50 facts are reversed simultaneously. Agreement and KL divergence are reported on both the remained set and the reversed set across different base models and editing methods. Higher agreement and lower KL divergence indicate better performance.

els edited with 1000 facts. Since ROME performs poorly under this large-scale sequential editing setting, we only report results for SimIE, MEMIT, and AlphaEdit. We evaluate the reversal of 50 facts at a time and report both rephrase-prompt performance and original-prompt performance in Tables 11 and 12.

Overall, the results show that the proposed method can still achieve meaningful selective reversal in the 1000-edit setting, although the performance is less stable than in the 100-edit setting. On GPT2-XL, our reversed model maintains strong reversed-set performance across most editing methods and datasets while preserving a non-trivial portion of the remained edits. This suggests that even after many edits, the proposed spectral gating method can still identify edit-sensitive components and selectively suppress them.

The comparison with Re-edit further reveals a trade-off between reversal effectiveness and preservation of the remaining edits. On CounterFact, Re-edit generally preserves more of the remained set, whereas our method often achieves stronger

reversed-set performance. In contrast, on ZsRE, our method often preserves more remaining edits than Re-edit while maintaining comparable reversed-set performance, particularly on GPT2-XL. These results indicate that the relative advantage of spectral reversal and direct re-editing depends on the dataset and the structure of the accumulated edits.

The results also show that large-scale editing makes selective reversal more difficult. Compared with the 100-edit setting, the remained-set performance drops more noticeably, especially for multi-layer editing methods. This is consistent with our hypothesis that individual edits may be sparsely represented within the dominant singular components, but as the number of edits increases, their edit-sensitive components become more likely to overlap or entangle. Therefore, reversing 50 edits after 1000 edits is substantially more difficult than reversing edits from a model containing only 100 edits.

The performance also depends strongly on the editing method and base model. MEMIT shows

		GPT2-XL				LLaMA3-8B				
		Remained Set		Reversed Set		Remained Set		Reversed Set		
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	
Counterfact	SimIE	Edited	100.00±0.00	0.000±0.000	0.00±0.00	7.190±0.185	100.00±0.00	0.000±0.000	0.00±0.00	8.675±0.130
		Reference	1.21±0.07	7.904±0.009	92.00±0.00	0.039±0.016	1.95±0.07	9.351±0.035	76.00±8.49	0.294±0.067
		Re-edit	98.05±0.37	0.054±0.001	37.00±9.90	2.054±0.057	96.16±0.37	0.076±0.007	47.00±1.41	2.093±0.356
		Reverse	51.32±9.90	2.267±0.489	62.00±8.49	1.030±0.053	78.53±4.76	0.744±0.191	52.00±0.00	1.546±0.173
	MEMIT	Edited	100.00±0.00	0.000±0.000	4.00±2.83	5.014±0.632	100.00±0.00	0.000±0.000	0.00±0.00	17.151±0.058
		Reference	5.16±0.15	6.321±0.030	86.00±2.83	0.173±0.033	0.00±0.00	8.622±0.004	65.00±7.07	0.914±0.148
		Re-edit	85.89±0.74	0.209±0.032	66.00±5.66	0.749±0.034	100.00±0.00	0.001±0.000	0.00±0.00	16.301±0.278
		Reverse	76.63±5.51	0.617±0.161	67.00±1.41	0.510±0.009	22.32±16.82	12.241±4.350	5.00±7.07	10.076±0.807
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	0.00±0.00	6.639±0.091	100.00±0.00	0.000±0.000	1.00±1.41	9.891±0.500
		Reference	1.37±0.00	7.962±0.009	84.00±2.83	0.178±0.031	1.89±0.00	8.263±0.023	55.00±1.41	1.118±0.183
		Re-edit	99.42±0.22	0.026±0.005	66.00±8.49	1.033±0.152	73.16±10.12	1.173±0.524	45.00±1.41	1.708±0.064
		Reverse	95.26±0.74	0.240±0.030	68.00±2.83	0.669±0.082	51.21±2.90	2.735±0.337	42.00±5.66	1.902±0.023
ZsRE	SimIE	Edited	100.00±0.00	0.000±0.000	0.00±0.00	8.319±0.132	100.00±0.00	0.000±0.000	6.00±0.00	7.013±0.321
		Reference	0.21±0.00	8.337±0.011	100.00±0.00	0.011±0.002	6.53±0.00	6.392±0.001	85.00±4.24	0.082±0.000
		Re-edit	68.95±18.01	1.092±0.544	100.00±0.00	0.291±0.023	71.00±11.09	1.051±0.458	64.00±5.66	0.452±0.098
		Reverse	83.21±7.67	0.560±0.277	91.00±1.41	0.495±0.060	84.26±2.75	0.502±0.049	57.00±4.24	0.762±0.306
	MEMIT	Edited	100.00±0.00	0.000±0.000	1.00±1.41	4.861±0.020	100.00±0.00	0.000±0.000	0.00±0.00	15.054±0.232
		Reference	4.63±0.15	5.958±0.013	100.00±0.00	0.102±0.004	0.21±0.00	12.457±0.011	64.00±2.83	0.477±0.026
		Re-edit	44.84±36.77	1.559±1.412	100.00±0.00	0.306±0.059	89.05±10.12	0.446±0.558	0.00±0.00	11.507±3.873
		Reverse	78.95±1.34	0.358±0.032	91.00±4.24	0.559±0.046	40.11±5.36	4.819±1.190	1.00±1.41	9.438±0.230
	AlphaEdit	Edited	100.00±0.00	0.000±0.000	3.00±1.41	6.221±0.580	100.00±0.00	0.000±0.000	9.00±1.41	6.807±0.008
		Reference	2.47±0.07	7.060±0.009	100.00±0.00	0.094±0.008	9.84±0.22	5.690±0.003	58.00±2.83	0.648±0.029
		Re-edit	66.47±26.87	0.984±0.818	99.00±1.41	0.334±0.046	13.68±0.74	4.470±0.154	27.00±4.24	1.015±0.164
		Reverse	88.58±1.41	0.256±0.036	83.00±1.41	0.724±0.144	48.95±9.53	2.300±0.513	43.00±1.41	0.922±0.029

Table 12: Selective reversal results after 1000 edits, evaluated on original editing prompts. The model is edited with 1000 facts, and 50 facts are reversed simultaneously using rephrase prompts for optimization. Agreement and KL divergence are reported on both the remained set and the reversed set across different base models and editing methods. Higher agreement and lower KL divergence indicate better performance.

weak overall selective reversal performance for both the Re-edit baseline and our spectral reversal method in several settings, especially on LLaMA3-8B. This suggests that the difficulty is not unique to our spectral reversal method, but is partly caused by the strongly entangled edited representations produced by large-scale multi-layer editing. One possible reason is that MEMIT distributes the edited information across multiple layers, making the corresponding edit-sensitive components difficult to isolate through layer-wise spectral shrinkage. In addition, the large KL divergence between the edited and pretrained models, together with the weaker performance of the Reference model in these settings, suggests that the global-reversal reference becomes less reliable when the edited model moves substantially away from the pretrained state.

Finally, comparing Tables 11 and 12, reversed-set performance generally decreases on the original editing prompts, as expected because the model is optimized using rephrase prompts. Nevertheless, our method still substantially improves over the edited model in many settings, indicating that the

learned spectral modification is not restricted to the specific rephrase prompts used during optimization. The comparison with Re-edit shows a similar dataset-dependent trade-off on the original prompts. Overall, these results demonstrate that selective reversal remains feasible after 1000 edits, while also highlighting the increased difficulty of balancing reversal and preservation as the accumulated edits become more entangled.

C Comparison of Re-editing Strategies

In the main experiments, we implement the Re-edit baseline using AlphaEdit (Fang et al., 2025) across all edited models. Another natural implementation is to use the same editing method as the original forward edit for re-editing, which may intuitively be more compatible with the corresponding edited model. We denote this variant as *Method-Reverse* and the AlphaEdit-based implementation as *Alpha-Reverse*. Their performance under the Reverse-50 setting is shown in Table 13.

Overall, Alpha-Reverse achieves better performance than Method-Reverse across most settings,

		GPT2-XL				Mistral-7B				LLaMA3-8B				
		Remained Set		Reversed Set		Remained Set		Reversed Set		Remained Set		Reversed Set		
		Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	Agree.	KL Div.	
CounterFact	ROME	Method-Reverse	77.00 $\pm$ 9.90	0.466 $\pm$ 0.232	87.00 $\pm$ 7.07	0.118 $\pm$ 0.011	83.00 $\pm$ 1.41	0.130 $\pm$ 0.013	73.00 $\pm$ 4.24	0.197 $\pm$ 0.008	72.00 $\pm$ 0.00	0.425 $\pm$ 0.063	70.00 $\pm$ 5.66	0.409 $\pm$ 0.168
		Alpha-Reverse	85.00 $\pm$ 4.24	0.112 $\pm$ 0.038	85.00 $\pm$ 7.07	0.125 $\pm$ 0.018	94.00 $\pm$ 2.83	0.020 $\pm$ 0.005	81.00 $\pm$ 9.90	0.130 $\pm$ 0.009	91.00 $\pm$ 1.41	0.053 $\pm$ 0.014	76.00 $\pm$ 2.83	0.284 $\pm$ 0.144
	SimIE	Method-Reverse	51.00 $\pm$ 12.73	1.322 $\pm$ 0.485	87.00 $\pm$ 1.41	0.072 $\pm$ 0.003	60.00 $\pm$ 14.14	0.633 $\pm$ 0.060	70.00 $\pm$ 11.31	0.261 $\pm$ 0.051	46.00 $\pm$ 0.00	1.777 $\pm$ 0.532	72.00 $\pm$ 5.66	0.458 $\pm$ 0.260
		Alpha-Reverse	90.00 $\pm$ 11.31	0.095 $\pm$ 0.000	84.00 $\pm$ 5.66	0.111 $\pm$ 0.003	91.00 $\pm$ 4.24	0.016 $\pm$ 0.008	72.00 $\pm$ 8.49	0.194 $\pm$ 0.047	91.00 $\pm$ 4.24	0.046 $\pm$ 0.003	74.00 $\pm$ 14.14	0.311 $\pm$ 0.171
	MEMIT	Method-Reverse	88.00 $\pm$ 8.49	0.030 $\pm$ 0.006	80.00 $\pm$ 5.66	0.164 $\pm$ 0.006	36.00 $\pm$ 5.66	2.302 $\pm$ 0.014	29.00 $\pm$ 4.24	2.699 $\pm$ 0.246	7.00 $\pm$ 1.41	6.459 $\pm$ 0.663	10.00 $\pm$ 0.00	4.604 $\pm$ 0.290
		Alpha-Reverse	90.00 $\pm$ 2.83	0.022 $\pm$ 0.009	79.00 $\pm$ 7.07	0.174 $\pm$ 0.015	84.00 $\pm$ 0.00	0.125 $\pm$ 0.047	65.00 $\pm$ 9.90	0.542 $\pm$ 0.044	77.00 $\pm$ 9.90	0.380 $\pm$ 0.072	59.00 $\pm$ 4.24	0.716 $\pm$ 0.003
	AlphaEdit	Method-Reverse	96.00 $\pm$ 2.83	0.028 $\pm$ 0.010	81.00 $\pm$ 7.07	0.200 $\pm$ 0.014	82.00 $\pm$ 14.14	0.194 $\pm$ 0.111	56.00 $\pm$ 11.31	0.551 $\pm$ 0.022	79.00 $\pm$ 7.07	0.302 $\pm$ 0.028	51.00 $\pm$ 1.41	1.003 $\pm$ 0.119
		Alpha-Reverse	96.00 $\pm$ 2.83	0.028 $\pm$ 0.010	81.00 $\pm$ 7.07	0.200 $\pm$ 0.014	82.00 $\pm$ 14.14	0.194 $\pm$ 0.111	56.00 $\pm$ 11.31	0.551 $\pm$ 0.022	79.00 $\pm$ 7.07	0.302 $\pm$ 0.028	51.00 $\pm$ 1.41	1.003 $\pm$ 0.119
ZsRE	ROME	Method-Reverse	16.00 $\pm$ 11.31	3.210 $\pm$ 1.346	98.00 $\pm$ 0.00	0.137 $\pm$ 0.002	39.00 $\pm$ 1.41	3.122 $\pm$ 0.381	97.00 $\pm$ 1.41	0.240 $\pm$ 0.019	25.00 $\pm$ 1.41	3.959 $\pm$ 0.103	63.00 $\pm$ 7.07	0.346 $\pm$ 0.084
		Alpha-Reverse	47.00 $\pm$ 18.38	1.298 $\pm$ 1.166	99.00 $\pm$ 1.41	0.194 $\pm$ 0.003	77.00 $\pm$ 7.07	0.540 $\pm$ 0.316	97.00 $\pm$ 1.41	0.100 $\pm$ 0.013	86.00 $\pm$ 11.31	0.748 $\pm$ 0.606	61.00 $\pm$ 7.07	0.303 $\pm$ 0.083
	SimIE	Method-Reverse	21.00 $\pm$ 1.41	4.169 $\pm$ 0.587	100.00 $\pm$ 0.00	0.071 $\pm$ 0.013	44.00 $\pm$ 2.83	2.433 $\pm$ 0.467	95.00 $\pm$ 1.41	0.129 $\pm$ 0.009	12.00 $\pm$ 2.83	5.123 $\pm$ 0.475	62.00 $\pm$ 16.97	0.289 $\pm$ 0.066
		Alpha-Reverse	64.00 $\pm$ 11.31	1.000 $\pm$ 0.475	99.00 $\pm$ 1.41	0.147 $\pm$ 0.015	76.00 $\pm$ 14.14	0.480 $\pm$ 0.382	96.00 $\pm$ 0.00	0.093 $\pm$ 0.033	61.00 $\pm$ 7.07	0.868 $\pm$ 0.446	76.00 $\pm$ 11.31	0.197 $\pm$ 0.062
	MEMIT	Method-Reverse	66.00 $\pm$ 0.00	0.628 $\pm$ 0.081	99.00 $\pm$ 1.41	0.141 $\pm$ 0.024	23.00 $\pm$ 7.07	6.221 $\pm$ 0.484	97.00 $\pm$ 1.41	0.903 $\pm$ 0.276	2.00 $\pm$ 2.83	9.832 $\pm$ 2.528	19.00 $\pm$ 24.04	4.025 $\pm$ 2.280
		Alpha-Reverse	67.00 $\pm$ 1.41	0.639 $\pm$ 0.038	99.00 $\pm$ 1.41	0.142 $\pm$ 0.024	56.00 $\pm$ 25.46	1.291 $\pm$ 0.953	98.00 $\pm$ 0.00	0.210 $\pm$ 0.049	47.00 $\pm$ 7.07	2.382 $\pm$ 0.144	38.00 $\pm$ 2.83	0.652 $\pm$ 0.013
	AlphaEdit	Method-Reverse	53.00 $\pm$ 29.70	1.629 $\pm$ 1.765	99.00 $\pm$ 1.41	0.207 $\pm$ 0.010	71.00 $\pm$ 12.73	0.756 $\pm$ 0.111	98.00 $\pm$ 0.00	0.199 $\pm$ 0.027	46.00 $\pm$ 2.83	2.830 $\pm$ 0.313	40.00 $\pm$ 16.97	0.614 $\pm$ 0.158
		Alpha-Reverse	53.00 $\pm$ 29.70	1.629 $\pm$ 1.765	99.00 $\pm$ 1.41	0.207 $\pm$ 0.010	71.00 $\pm$ 12.73	0.756 $\pm$ 0.111	98.00 $\pm$ 0.00	0.199 $\pm$ 0.027	46.00 $\pm$ 2.83	2.830 $\pm$ 0.313	40.00 $\pm$ 16.97	0.614 $\pm$ 0.158

Table 13: Comparison between Method-Reverse and Alpha-Reverse baselines under the Reverse-50 setting. Agreement and KL divergence are reported on both the remained set and the reversed set across different base models and editing methods. Higher agreement and lower KL divergence indicate better performance. For AlphaEdit-edited models, the two implementations are identical by definition and therefore yield the same performance.

particularly in preserving the remaining edited knowledge. The improvement is especially clear for multi-layer editing methods such as MEMIT, where Method-Reverse can substantially damage the remained set, while Alpha-Reverse preserves considerably more of the remaining edits. On the reversed set, Alpha-Reverse also achieves generally comparable or better performance, indicating that its stronger preservation of the remained set does not come at the cost of reversal effectiveness.

One possible reason is that, compared with other editing methods, AlphaEdit constrains its updates to a null-space subspace, which may reduce interference with previous edits even when information about these edits is unavailable.

These results suggest that using AlphaEdit as a unified Re-edit implementation is more effective than reusing the original forward editing method. Moreover, it does not require identifying the specific editing algorithm originally applied to the model, making it a more practical baseline for the selective reversal setting.

D Effect of Renormalization

The entry-wise gates selectively suppress edit-sensitive entries in the dominant singular vectors. However, directly applying the gates will decrease the magnitude of the corresponding rank-one singular component, which may weaken the representation of the remaining edited knowledge encoded in the same component. To mitigate this effect, we renormalize the gated singular vectors such that each modified rank-one component preserves the

Frobenius norm of its original component.

Specifically, let the i -th rank-one singular component be

$$W_i = \sigma_i u_i v_i^\top. \quad (14)$$

Its Frobenius norm is

$$\begin{aligned} \|W_i\|_F &= |\sigma_i| \|u_i v_i^\top\|_F \\ &= |\sigma_i| \|u_i\|_2 \|v_i\|_2. \end{aligned} \quad (15)$$

After applying the entry-wise gates, we renormalize the gated singular vectors to their original norms:

$$\begin{aligned} \tilde{u}_i &= \frac{\|u_i\|_2}{\|g_i^u \odot u_i\|_2} (g_i^u \odot u_i), \\ \tilde{v}_i &= \frac{\|v_i\|_2}{\|g_i^v \odot v_i\|_2} (g_i^v \odot v_i). \end{aligned} \quad (16)$$

Therefore, the modified rank-one component $\tilde{W}_i$ satisfies

$$\begin{aligned} \|\tilde{W}_i\|_F &= |\sigma_i| \|\tilde{u}_i \tilde{v}_i^\top\|_F \\ &= |\sigma_i| \|\tilde{u}_i\|_2 \|\tilde{v}_i\|_2 \\ &= |\sigma_i| \|u_i\|_2 \|v_i\|_2 \\ &= \|W_i\|_F. \end{aligned} \quad (17)$$

To further illustrate the effect of renormalization, let

$$\bar{W}_i = \sigma_i (g_i^u \odot u_i) (g_i^v \odot v_i)^\top \quad (18)$$

denote the gated component before renormalization. Then, for any input k ,

$$\tilde{W}_i k = c_i \bar{W}_i k, \quad c_i = \frac{\|u_i\|_2 \|v_i\|_2}{\|g_i^u \odot u_i\|_2 \|g_i^v \odot v_i\|_2}. \quad (19)$$

Thus, renormalization scales the gated rank-one component without changing the output direction induced by the gating operation. It preserves the relative suppression pattern learned by the gates while compensating for the overall magnitude reduction introduced by shrinkage, thereby strengthening the representation of the remaining edited knowledge relative to the unnormalized gated component.