

Autoformalizing Argumentative Material Inferences

Xin Quan^{1,3}, Reto Gubelmann², André Freitas^{1,3*}

¹Idiap Research Institute, Switzerland

²University of Zurich, Switzerland

³Department of Computer Science, University of Manchester, UK
xin.quan@idiap.ch, reto.gubelmann@uzh.ch, andre.freitas@idiap.ch

Abstract

Natural language arguments are compelling before they are formally explicit. A premise supports a claim through defeasible warrants, background commitments, and exception conditions that the text leaves implicit. However, formal verification requires the opposite. Making such arguments machine-checkable requires constructing the missing commitments, not only translating given sentences into logic. Construction, however, carries a risk that translation does not: a system free to add premises can make any claim provable, and a formally valid proof may assert the claim outright, prove it without the original premise, or establish more than the claim itself. We address this problem by formulating autoformalization for argumentative material inference as guard completion, in which non-monotonic material support is turned into monotonic formal inference relative to an explicitly constructed guard set. A completion is accepted only when its proof both passes the theorem prover and survives contrastive tests of premise dependence and claim selectivity. We implement this formulation in GUARD, a neuro-symbolic framework in which LLMs construct and formalize candidate guards, Isabelle/HOL verifies the resulting theories and returns step-level feedback for iterative refinement, and the system abstains when no faithful completion can be reached. Our empirical results on Debatepedia and ARCT using different LLMs demonstrate that GUARD yields significant improvements in verified-faithful inference (+35.3, +32.9 points) and substantial reductions in leakage (−25.9, −21.9 points) over the state-of-the-art LLM-driven theorem proving approach. Moreover, we show that the symbolic soft critique and the explicit assumption layer account for most of these gains, with the soft critique also improving the initial validity of the elicited context and reducing the number of iterations required for successful verification.

Introduction

Arguments in natural language are rarely delivered as formal derivations. In debate, explanation, and everyday reasoning, a premise counts as a reason for a claim because readers can recover a warrant, rely on shared background commitments, and leave exception conditions unstated. Argumentation theory has long treated such warrants as part of the layout of reasons (Toulmin 1958; Lawrence and Reed 2020), while inferentialist accounts describe this support as material inference: inference licensed by the content of the concepts

involved and the commitments of the discourse, rather than by logical form alone (Brandom 1994, 2008, 2002; Hlobil and Brandom 2024). Material inferences can be deductively valid if the truth of the premise necessitates the truth of the conclusion (as in “LA is south of San Francisco, therefore San Francisco is north of LA”), or they can be inductively valid if the premise only makes the conclusion plausible, rational, or likely (as in “the streets are wet, therefore, it has rained”). It is widely accepted that, typically, material inferences can be explicated into formally valid inferences (as in “LA is south of San Francisco, and whenever A is south of B, B is north of A, therefore San Francisco is north of LA”). However, due to the context-dependence of aspects of meaning of terms and of the commitments of the discourse, philosophers have seen this task of faithfully explicating implicit material inference into explicit formal inference as a formidable obstacle for AI to overcome (Brandom 2008, Ch. 3).

In AI and logic, the structure referred to by inductive material inference is captured by defeasible and non-monotonic reasoning: a conclusion may be warranted in the current information state and later withdrawn when an exception, priority, or counterargument is introduced (Reiter 1980; McCarthy 1980; Pollock 1987; Dung 1995). This implicit and defeasible character runs through NLP inference settings. Natural language inference, commonsense reasoning, and argument mining package materially licensed support under labels such as “entailment” or “argument support” (Bowman et al. 2015; Williams, Nangia, and Bowman 2018; Nie et al. 2020; Storks, Gao, and Chai 2020; Gubelmann et al. 2023), and argument reasoning benchmarks show that the decisive step is often the reconstruction of an implicit warrant rather than the application of a stated rule (Habernal et al. 2018; Gupta, Zuckerman, and O’Connor 2024).

Making this support formally explicit is the precondition for verification. A justification can be audited only when the commitments it relies on are stated, and plausible-sounding explanations are known to often fail validity or faithfulness (Kumar and Talukdar 2020; Valentino, Pratt-Hartmann, and Freitas 2021). A theorem prover enforces exactly this discipline, since consequence is checked against an explicit theory and every assumption, definition, and exception condition a proof relies on must be written down (Nipkow, Wenzel, and Paulson 2002). Recent autoformalization work makes the construction of such theories feasible, with LLMs translat-

*Corresponding author.

ing informal statements into proof-oriented representations and revising them under formal feedback (Wu et al. 2022; Olausson et al. 2023; Lu, Delaware, and Zhang 2024; Zhang, Quan, and Freitas 2024), and a closer line of work couples LLMs with theorem provers to verify and iteratively refine natural-language explanations for NLI (Quan et al. 2024a,b, 2025b,a).

However, autoformalizing argumentative material inference raises challenges that do not arise when the supporting content is already given. First, unlike explanation verification, where the sentences to formalize are provided in advance (Quan et al. 2024b), the commitments that make the premise sufficient must first be constructed, together with the exception conditions under which they fail. Second, once the system is free to add premises, formal validity alone becomes uninformative. A proof can become valid because an added guard states the answer, weakens the target, or makes the original premise irrelevant. Third, solver feedback cannot distinguish a faithful explication of the original support from an easier substitute proof, so verification must be paired with explicit checks on premise dependence and claim selectivity.

In this paper, we frame autoformalization for material inference as a guard-completion problem. We propose a neuro-symbolic framework GUARD that integrates LLMs with the Isabelle/HOL theorem prover (Nipkow, Wenzel, and Paulson 2002) to investigate the following research questions: **RQ1:** *Can autoformalization close the explicitness gap for non-monotonic argumentative support without distorting the original material relation?* **RQ2:** *Can autoformalization-based feedback refine hidden warrants into explicit guard assumptions?* **RQ3:** *How robust and faithful is guard completion across backbone LLMs?*

To answer these questions, GUARD first constructs a strengthened context organized around the sources of implicitness that classical argument reconstruction identifies: enthymematic assumptions, definitions and term normalizations, and the exception conditions under which a defeasible warrant is blocked (Naess 1949; Pollock 1987; Gordon, Prakken, and Walton 2007). The elicited defeasible rules are integrated into guarded form with explicit abnormality conditions in the style of circumscription (McCarthy 1986), which is how non-monotonic support is turned into monotonic inference relative to explicit guards. An LLM-based soft verifier then screens each candidate against four proof obligations. In turn, Isabelle/HOL is adopted as the hard verifier, and its failed proof steps are extracted as feedback for targeted refinement, extending the soft and hard critique design used in explanation refinement (Quan et al. 2025b). Finally, a contrastive faithfulness stage replaces the premise with alternatives that should not support the claim, and the claim with alternatives that the premise does not warrant, and accepts a valid inference only if every perturbed theory becomes unprovable.

Our empirical evaluation on the Debatedepedia argument corpus (Cabrio and Villata 2013) and the Argument Reasoning Comprehension Task (ARCT) (Habernal et al. 2018), conducted with GPT-5.1, Qwen3-Max, DeepSeek-V3.2, and Mistral Medium 3.5 as backbone LLMs, shows that materially supported arguments consistently lack formal validity in their original form, and that GUARD improves the aver-

age verified-faithful rate over the strongest baseline by 35.3 points on Debatedepedia and 32.9 points on ARCT, while reducing leakage by 25.9 and 21.9 points respectively. Removing the soft symbolic critique or the assumption layer lowers the verified-faithful rate by up to 40.5 and 31.5 points, and an extended-budget probe shows that most abstentions are missing guards rather than incompatible arguments.

To summarize, this paper makes three contributions. First, we introduce GUARD, an LLM+Isabelle/HOL framework that formulates material-inference autoformalization as guard completion, constructing explicit background context, selecting proof-relevant guards, and checking contrastive faithfulness. Second, we evaluate GUARD on Debatedepedia and ARCT across four backbone LLMs, showing average gains of 35.3 and 32.9 points in verified-faithful rate over the strongest baseline and reductions of 25.9 and 21.9 points in leakage. Third, our diagnostic analysis of the explication process attributes drops of up to 40.5 and 31.5 verified-faithful points to the soft symbolic critique and the assumption layer, confines residual leakage to premise-side failures, and traces 63.5 to 74.3 percent of the abstained instances to missing guards rather than incompatible arguments.

Problem Definition

In this paper, we define an argument as a premise-claim pair (T, C) in which the premise T provides a materially licensed reason for the claim C . Our goal is to construct an explicit strengthened context $\Gamma^\uparrow$ and to identify a set of guards $\mathcal{G} \subseteq \Gamma^\uparrow$ that turns this material support into formal support, such that $\mathcal{G} \cup \{T\} \models C$ holds.

We leverage an LLM-based soft verifier and an external theorem prover to systematically verify these entailments through an automated process. Specifically, given the set of input sentences $S = \{T, C\} \cup \mathcal{G}$, we aim to construct a set of logical forms $\phi = \{\Phi(s) \mid s \in S\}$, where Φ is the autoformalization process that converts natural language sentences into symbolic representations. We denote the logical forms of the premise and claim by $T^* = \Phi(T)$ and $C^* = \Phi(C)$, respectively, and write $g^* = \Phi(g)$ for each guard $g \in \mathcal{G}$. From these logical forms, we construct a theory $\Theta = (A, \tau)$, where $A = \{g^* \mid g \in \mathcal{G}\}$ is the set of axioms derived from formalizing the guards, and τ is the theorem to be proven, with T^* as its assumption and C^* as its proof goal. Proving τ thus establishes $A \cup \{T^*\} \vdash C^*$. If the theorem prover derives a valid proof of τ under A , we conclude that $\mathcal{G}$ formally licenses the inference from T to C under $\Gamma^\uparrow$.

Otherwise, a refinement controller uses the failed proof steps as feedback and iteratively refines the guard set, updating the state

$$s_k = \langle \Gamma_k^\uparrow, \mathcal{G}_k, T^*, C^* \rangle,$$

generating a refined guard set $\mathcal{G}_{k+1}$, until a valid proof is found or a predefined refinement budget is exhausted.

Methodology

Stage I: Context Strengthening

Stage I is grounded in classical argument reconstruction: everyday arguments are materially valid in virtue of implicit background commitments and become formally assessable

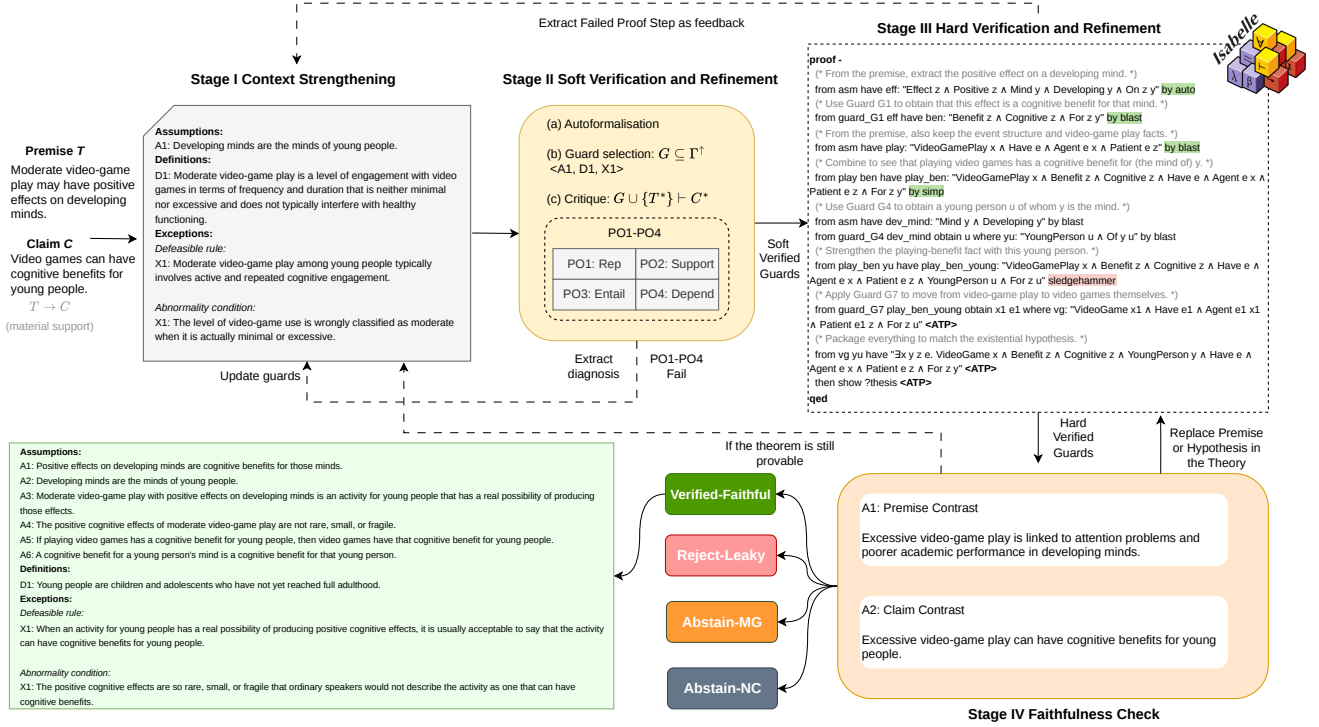


Figure 1: Overview of GUARD. Starting from a premise-claim pair (T, C) , the framework constructs a strengthened context, autoformalizes the selected candidate guards and iteratively combines soft verification, hard theorem proving and contrastive faithfulness checks until one of the four final statuses is reached.

once these commitments are made explicit (Sellars 1953; Brandom 1994). Starting from the input pair (T, C) , we construct an explicit strengthened context $\Gamma^\uparrow = A \cup \Delta \cup X$, intended as a task-specific explicit witness to the otherwise implicit discourse context, with each component elicited by a dedicated harvester under shared contextual parameters (e.g., domain, jurisdiction, and timebound). A contains *assumptions* in the sense of enthymeme completion (Eemeren and Grootendorst 2003), including normalcy conditions, domain restrictions, and ceteris-paribus clauses. Each assumption is typed and linked to the premise-claim edge it supports. Δ contains *definitions and term-normalization facts* in the spirit of making it more precise (Naess 1949; Walton 2001), retrieved from authoritative sources and normalized into canonical single-sentence forms for formalization. X contains *exception management*, following defeasible reasoning (Toulmin 1958; Pollock 1987; Gordon, Prakken, and Walton 2007). Based on the elicited assumptions and definitions, we organize the latter as local defeasible rules over intermediate concepts and pair each rule with the exception conditions under which it is blocked. Stage I therefore builds the strengthened background from which a step-specific guard set $G \subseteq \Gamma^\uparrow$ will later be selected. The details for each harvester are described in the Appendix D.

Stage II: Soft Verification and Refinement

Autoformalization. Stage II begins by applying the autoformalization function Φ to the context $\Gamma^\uparrow$ elicited in Stage I.

Following Quan et al. (2024b), the function maps each natural language sentence s to a logical form $\Phi(s)$ using Neo-Davidsonian event semantics (Parsons 1990) coupled with first-order logic. The resulting logical forms are then aligned with the Isabelle/HOL style. For example, the sentence “Child beauty pageants can teach children to base self-worth on physical appearance” can be formalized as follows:

$$\begin{aligned} &\forall x y e_1. \text{ChildBeautyPageant}(x) \wedge \text{Child}(y) \wedge \text{Teach}(e_1) \\ &\quad \wedge \text{Agent}(e_1, x) \wedge \text{Patient}(e_1, y) \longrightarrow \\ &\exists z w e_2. \text{SelfWorth}(z) \wedge \text{PhysicalAppearance}(w) \wedge \\ &\quad \text{Base}(e_2) \wedge \text{Agent}(e_2, y) \wedge \text{Patient}(e_2, z) \wedge \text{On}(z, w). \end{aligned}$$

Here, the verb *teach* is represented as the event e_1 , with the pageant as its agent and the child as its patient, while the taught behavior of basing self-worth on physical appearance is captured by a second event e_2 . This predicate-argument structure keeps the logical form close to the surface form of the sentence and preserves its information content during translation. Each assumption and definition in $\Gamma^\uparrow$ is then converted into an axiom. The exception structures elicited in Stage I are then integrated into guarded defeasible rules, where each rule family d is guarded by an abnormality predicate in the style of circumscription (McCarthy 1986): $\forall k. (\varphi_d(k) \wedge \neg Ab_d(k) \rightarrow \psi_d(k)), Ab_d(k) \leftrightarrow \chi_{d,1}(k) \vee \dots \vee \chi_{d,n}(k)$, in which φ_d and ψ_d denote the body and head of the rule and each $\chi_{d,i}$ describes an exception condition. The biconditional is replaced with a one-directional implication if the exception

list is open-ended. The details are described in the Appendix B and Appendix D.

Guard selection. We define an LLM-based critic function f_{guard} to identify the contextual support needed for the inference from T^* to C^* . The function uses the formalised logical forms of $\Gamma^\uparrow$ to select a step-specific guard set $\mathcal{G} = f_{\text{guard}}(\Gamma^\uparrow, T^*, C^*) \subseteq \Gamma^\uparrow$, with formal representation $G = \{g^* \mid g \in \mathcal{G}\}$. Selection aims to make the guards jointly sufficient to infer C^* from T^* and the resulting candidate is then assessed against PO1 to PO4.

Soft verification: PO1-PO4. The framework then performs a soft critique of $\langle G, T^*, C^* \rangle$ over four proof obligations:

PO1 (Representation correctness) The formal representation is syntactically well-formed, the types, arities, variable bindings, and semantic roles are coherent, and predicate normalization is consistent across the premise, the claim, and the guards.

PO2 (Support adequacy) Each guard in G is traceable to an item in $\Gamma^\uparrow$. The guards jointly cover the missing inferential material between T^* and C^* and make the relevant exception conditions explicit where needed.

PO3 (Strict support) The guards make the premise formally support the claim: $G \cup \{T^*\} \vdash C^*$.

PO4 (Dependence) The proof genuinely depends on both the premise and every guard: (a) $G \not\vdash C^*$; (b) $(G \setminus \{g\}) \cup \{T^*\} \not\vdash C^*$ for all $g \in G$.

Soft refinement. We define an LLM-based soft refinement function $f_{\text{refine}}^{\text{soft}}$ that applies targeted updates to the current candidate based on the soft critique feedback. For PO1 failures, the function corrects the affected formal representations. A failure of PO2 requires expanding or refining $\Gamma^\uparrow$ by adding missing contextual items or correcting existing ones. The affected items are then formalised and $\mathcal{G}$ is reselected. When PO3 fails, refinement updates the strengthened context and the formalised guard candidates to establish formal support from T^* to C^* . PO4 failures are addressed by removing padded guards or refining the strengthened context, with the aim of making the proof depend on the premise and on each selected guard. The updated candidate is reassessed against PO1 to PO4, with a maximum of 10 soft refinement iterations.

Stage III: Hard Verification and Refinement

Hard verification. Following Quan et al. (2024b), we construct an Isabelle/HOL theory (Nipkow, Wenzel, and Paulson 2002) to formally verify the selected guards. Each formal guard $g^* \in G$ is converted into an axiom, while the premise and the claim are converted into the theorem to be proven, where T^* constitutes the assumption clause and C^* the proof goal. A successful proof therefore establishes $G \cup \{T^*\} \vdash C^*$. An example of the constructed theory is shown in Figure 1.

Hard refinement. If the theorem prover fails to prove a proof step, we extract the failed step together with the applied axioms as external feedback for an LLM-based hard refinement function $f_{\text{refine}}^{\text{hard}}$. Depending on the diagnosis, it corrects the affected formal representations or refines the logical error in the strengthened context $\Gamma^\uparrow$. Guard selection

is then updated when needed, and the resulting theory is checked by the theorem prover in the next iteration.

Stage IV: Faithfulness Check

A formally verified proof is still not sufficient. Over-broad guards may prove the claim without using the premise, or they may establish more than the claim itself. Stage IV therefore applies two contrastive tests to each verified candidate.

A1: Premise contrast. A1 keeps the claim and replaces the premise with alternatives that should not support it. The challenge set $\mathcal{T}'$ contains the empty-premise case $T' = \emptyset$ and a same-topic counter-premise is proposed by our framework. For example, given the premise “*GM crops are disease-resistant and therefore increase yield*” and the claim “*GM food is beneficial*,” a generated counter-premise is “*GM agriculture pushes small traditional farming communities out of business*.” A1 therefore measures *premise sensitivity*: whether the proof genuinely depends on the original premise.

A2: Claim contrast. A2 keeps the premise and replaces the claim with a nearby alternative that the premise does not warrant, collected in a challenge set $\mathcal{C}'$. The alternative is proposed by the framework as a cross-subtopic claim, i.e., a claim on the same topic whose content the premise does not address. For the same example, the generated alternative is “*GM food is safe for consumers*,” since the premise concerns yield rather than consumer safety. A2 therefore measures *claim selectivity*: whether the proof establishes only the intended claim. We autoformalize each probe and substitute it into the verified theory. The candidate passes the faithfulness check only if none of the substituted theories remains provable: $\forall T' \in \mathcal{T}'. G \cup \{T'^*\} \not\vdash C^*, \forall C' \in \mathcal{C}'. G \cup \{T^*\} \not\vdash C'^*$.

Faithfulness refinement. We define an LLM-based faithfulness refinement function $f_{\text{refine}}^{\text{faith}}$ to address leakage detected by the contrastive tests. If a substituted theory remains provable, the function takes the leaking theory and a leak report as input and produces a complete updated guard set. A guard whose consequent asserts the claim unconditionally is made conditional on the content supplied by the premise. The function also narrows over-broad guards to exactly what the claim requires. The original entailment must remain provable under the updated guards. We set a maximum of 5 iterations for faithfulness refinement.

Outputs. The pipeline returns one of four verdicts. A candidate is labelled VERIFIED-FAITHFUL when hard verification succeeds and both contrastive tests pass, and REJECT-LEAKY when the entailment is formally verified but A1 or A2 still fails after refinement. If no verified candidate is obtained within the refinement budget, we distinguish two outcomes. ABSTAIN-MISSING-GUARDS indicates that admissible repairs, such as unresolved assumptions, definitions, exception conditions, or alternative guard choices, are still open when the budget is exhausted. ABSTAIN-NOT-COMPATIBLE indicates that no admissible repair remains, as the remaining options would require altering the claim itself or would yield only leaky or irrelevant proofs.

Backbone	Method	Debatepedia						ARCT					
		SP $\uparrow$	VFR $\uparrow$	Leak $\downarrow$	A1 $\downarrow$	A2 $\downarrow$	#Iter	SP $\uparrow$	VFR $\uparrow$	Leak $\downarrow$	A1 $\downarrow$	A2 $\downarrow$	#Iter
DeepSeek-V3.2	Direct	0.00	0.00	–	–	–	–	0.00	0.00	–	–	–	–
	CoT	14.17	11.74	<u>17.14</u>	<u>11.43</u>	5.71	–	16.00	12.50	21.88	15.63	9.38	–
	Toulmin	10.93	8.10	25.93	18.52	14.81	–	17.00	14.00	<u>17.65</u>	<u>14.71</u>	<u>2.94</u>	–
	PEIRCE	<u>28.34</u>	<u>19.03</u>	32.86	30.00	4.29	5.86	<u>31.00</u>	<u>23.00</u>	25.81	24.19	6.45	4.15
	GUARD	51.82	48.58	6.25	6.25	0.78	3.72	55.50	53.50	3.60	3.60	0.00	3.82
Qwen3-Max	Direct	0.00	0.00	–	–	–	–	0.00	0.00	–	–	–	–
	CoT	12.96	8.10	37.50	<u>25.00</u>	18.75	–	18.00	13.00	27.78	22.22	11.11	–
	Toulmin	14.98	10.53	<u>29.73</u>	27.03	<u>8.11</u>	–	17.00	13.50	<u>20.59</u>	<u>17.65</u>	5.88	–
	PEIRCE	<u>34.82</u>	<u>24.29</u>	30.23	26.74	8.14	5.94	<u>42.00</u>	<u>30.00</u>	28.57	25.00	<u>3.57</u>	3.27
	GUARD	59.92	56.68	5.41	5.41	0.00	3.85	63.00	61.00	3.17	3.17	0.00	3.21
Mistral Medium 3.5	Direct	0.00	0.00	–	–	–	–	0.00	0.00	–	–	–	–
	CoT	14.98	10.53	29.73	21.62	10.81	–	19.50	12.00	38.46	25.64	15.38	–
	Toulmin	18.22	13.77	<u>24.44</u>	<u>17.78</u>	11.11	–	16.00	12.50	21.88	<u>18.75</u>	6.25	–
	PEIRCE	<u>38.06</u>	<u>26.32</u>	30.85	27.66	<u>6.38</u>	5.83	<u>46.00</u>	<u>36.50</u>	<u>20.65</u>	20.65	<u>5.43</u>	5.62
	GUARD	64.37	62.75	2.52	2.52	0.00	3.74	66.00	64.50	2.27	2.27	0.76	3.25
GPT-5.1	Direct	0.00	0.00	–	–	–	–	0.00	0.00	–	–	–	–
	CoT	24.29	19.43	20.00	<u>13.33</u>	10.00	–	25.50	18.00	29.41	19.61	15.69	–
	Toulmin	24.70	20.24	<u>18.03</u>	18.03	0.00	–	21.00	17.50	<u>16.67</u>	<u>11.90</u>	<u>4.76</u>	–
	PEIRCE	<u>45.34</u>	<u>33.60</u>	25.89	17.86	<u>9.82</u>	5.21	<u>51.00</u>	<u>39.00</u>	23.53	19.61	5.88	4.07
	GUARD	78.14	76.52	2.07	2.07	0.00	3.78	82.50	81.00	1.82	1.82	0.00	3.13

Table 1: Main comparison across four backbone LLMs on Debatepedia and ARCT. ‘SP’ denotes the solver-pass rate. ‘VFR’ denotes verified-faithful rate, the number of instances whose proof additionally passes the contrastive faithfulness checks. ‘Leak’ represents the solver-passed cases rejected by the faithfulness checks. ‘A1’ and ‘A2’ shows the number of solver-passed cases that fail the premise-contrast and the claim-contrast test, respectively. ‘#Iter’ indicates the average iteration required to refine the proposed context information to be successfully verified by the theorem prover. The best result per backbone and column is in bold and the second best is underlined.

Experimental Setup

Datasets and Models. We select two argumentation datasets for evaluation: a topic-balanced derivative of the extended Debatepedia corpus (Cabrio and Villata 2013) and the Argument Reasoning Comprehension Task (ARCT) (Habernal et al. 2018). The extended Debatepedia resource contains argument pairs drawn from 19 online-debate topics. We construct a balanced evaluation set of 247 premise-claim pairs, with exactly 13 pairs per topic. ARCT contains reason-claim pairs in which the reason supports the claim only through an implicit warrant. We randomly sampled 200 instances from ARCT and treat each reason-claim pair as a premise-claim pair. The dataset selection details are provided in Appendix A.1.

We conducted experiments with four backbone LLMs within the proposed framework: GPT-5.1 (OpenAI 2025), Qwen3-Max (Qwen Team 2025), DeepSeek-V3.2 (Deepseek-AI 2025), and Mistral Medium 3.5 (Mistral AI 2026). We employed Isabelle/HOL (Nipkow, Wenzel, and Paulson 2002) as the logical solver. Backbone selection and LLM implementation settings are detailed in Appendix A.2.

Baselines. We compare against four baselines. (1) **Direct autoformalisation:** map (T, C) directly into (T^*, C^*) and use the solver to find a proof without adding explicit context. (2) **1-shot CoT:** use chain-of-thought prompting (Wei et al. 2022; Wang et al. 2023) with one in-context example to generate an ordered chain of two to four free-text background

sentences that makes the implicit reasoning from the premise to the hypothesis explicit, and then formalise the generated background contextual information. (3) **Toulmin-style 1-shot explanation:** follow Gupta, Zuckerman, and O’Connor (2024) and prompt the LLM to explicate the implicit argument in Toulmin terms (i.e., a qualified warrant, its backing, an additional bridging sentence when needed, and a rebuttal condition). The generated Toulmin context is then used as the added bridging text for downstream formalisation and verification. (4) **PEIRCE:** use the neuro-symbolic refinement framework of Quan et al. (2025a), which supplements premise-side explanatory sentences in response to logical verification results so that the premise can prove the hypothesis. In our comparison setting, these explanatory sentences are treated as added context. We set the maximum number of iterations for theorem-prover-based verification and refinement to 10 for both PEIRCE and our approach. The baseline selection rationale and comparison details are described in Appendix A.3.

Results and Evaluation

Table 1 reports the main comparison. For CoT and Toulmin, the backbone LLM first generates the bridging context, which is then autoformalised into logical forms and formalised as an Isabelle/HOL theory. Direct, CoT, and Toulmin are verified in a single pass over the generated context, whereas PEIRCE and GUARD refine their candidates iteratively with prover

Method	Debatepedia		ARCT	
	Empty ↓	Ctr.-only ↓	Empty ↓	Ctr.-only ↓
CoT	15.36	2.48	19.99	0.78
Toulmin	18.18	2.16	14.28	1.47
PEIRCE	25.03	0.53	22.36	0.00
GUARD	4.06	0.00	2.72	0.00

Table 2: Decomposition of the A1 failures in Table 1 by probe, averaged over the four backbone LLMs. ‘Empty’ denotes candidates whose guards prove the claim with no premise at all, and ‘Ctr.-only’ candidates that fail only once the counter-premise is substituted.

feedback. All methods share the same autoformalization process, whose faithfulness is evaluated in the Appendix B.4. Every solver-passed case, regardless of method, is submitted to the contrastive faithfulness checks introduced above, from which the Leak, A1, and A2 columns are derived.

Materially supported arguments lack formal validity and GUARD consistently converts them into formally verified inferences. Direct autoformalization fails on every instance: under all four backbones, a solver-pass rate of 0.00 stands on both datasets. The support rests on commitments the text never states, and translation alone cannot recover them. Single-pass explication helps little. CoT and Toulmin generate bridging sentences that spell out the hidden warrant, and the resulting arguments read as complete, yet once formalized they reach only 10.93 to 25.50 SP and end with verified-faithful rates between 8.10 and 20.24. With failed proof steps fed back to refinement function, PEIRCE roughly doubles the single-pass SP under every backbone, to between 28.34 and 51.00: validity accumulates through revision against solver feedback rather than arriving in one shot. GUARD keeps the same iterative loop but directs it at explicitly constructed guards, and the combination performs best throughout. It obtains the highest SP and verified-faithful rate (VFR) for every backbone on both datasets, with an average VFR of 61.13 on Debatepedia and 65.00 on ARCT, 35.3 and 32.9 points above PEIRCE, and it converges within 3.13 to 3.85 hard iterations on average.

LLM-driven refinement improves provability by integrating additional context but can make the original premise unnecessary. GUARD reduces this leakage through explicit checks on premise dependence. Averaged over the four backbones, PEIRCE reaches a solver-pass rate of 36.64% on Debatepedia and 42.50% on ARCT, more than doubling the prompting baselines, yet its leakage exceeds Toulmin’s on both datasets (29.96% against 24.53%, and 24.64% against 19.20%). Refining toward provability therefore inflates validity faster than faithfulness: when the solver only rewards a closed proof, the easiest repair is to strengthen the added context until it carries the proof on its own. Table 2 exposes the mechanism. PEIRCE’s leaked candidates fail almost exclusively under the empty premise (25.03% and 22.36%, with counter-only rates of 0.53% and 0.00%): the failure mode is bypassing the premise, not contradicting it, as the refined sentences never turn against the original premise

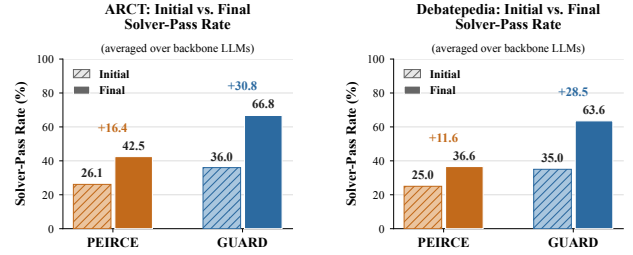


Figure 2: Initial and final solver-pass rates of PEIRCE and GUARD on Debatepedia and ARCT, averaged over the four backbone LLMs.

or fire on an opposing one, they simply make the premise unnecessary. GUARD runs the same LLM-prover loop but blocks this path by construction, through the dependence obligation PO4 during soft verification and the empty-premise probe afterwards, and its leakage falls to 4.06% and 2.72%.

The integration of LLM-based verification and refinement substantially improves the formal validity of the elicited context. Figure 2 compares the initial and final solver-pass rates of PEIRCE and GUARD, where the initial rate counts the instances whose first submitted theory is already proved. Stage II subjects the elicited context to a formal check before the prover ever sees it: the framework critiques the candidate guards at the level of their logical forms against the four proof obligations, and repairs malformed representations, missing support, and padded guards at the same symbolic level. The effect is visible at the first prover call. Although both methods start from the same premise-claim pairs, 35.0% of GUARD’s first theories are already valid on Debatepedia and 36.0% on ARCT, against 25.0% and 26.1% for PEIRCE, which submits its elicited sentences to the solver directly; on Debatepedia, GUARD’s first submission already comes within 1.6 points of the rate PEIRCE reaches after its full refinement budget. The same symbolic-level refinement also makes the subsequent hard loop more productive: because the theories that reach Isabelle/HOL are structurally sound, a failed proof step localizes a genuine logical gap whose diagnosis maps onto an obligation-specific repair, and GUARD gains 28.6 points on Debatepedia and 30.8 points on ARCT from hard refinement, against 11.6 and 16.4 for PEIRCE, in fewer hard iterations.

Soft refinement constructs the strengthened context, while hard refinement repairs it. Figure 3 tracks the average number of assumptions, definitions, and exception conditions per instance across refinement iterations. During soft refinement, assumptions and definitions grow steeply in the first five iterations, from an average of 3.6 to 9.0 and from an average of 5.8 to 8.5 on Debatepedia, which accounts for roughly 85% of their total soft-phase growth: the framework is still proposing new items. After the fifth iteration both curves flatten while refinement continues, indicating that later soft rounds revise existing items rather than add new ones. Exceptions grow more slowly and almost linearly throughout (2.9 to 4.8 and 2.5 to 4.1), consistent with rebuttal conditions

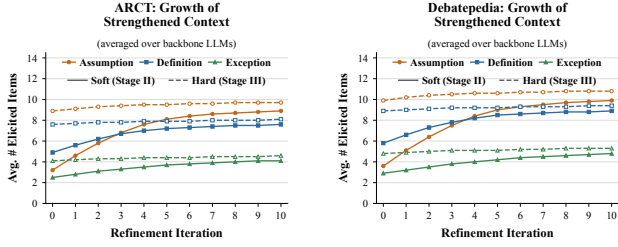


Figure 3: Average number of assumptions, definitions, and exception conditions per instance across soft and hard refinement iterations on Debatepedia and ARCT.

	VFR $\uparrow$	Leak $\downarrow$
DEBATEPEDIA		
GUARD (full)	76.52	2.07
w/o soft critique	36.03 (−40.5)	24.58
w/o assumptions (A)	53.04 (−23.5)	10.27
w/o definitions (Δ)	62.35 (−14.2)	6.10
w/o exceptions (X)	73.68 (−2.8)	2.67
ARCT		
GUARD (full)	81.00	1.82
w/o soft critique	41.50 (−39.5)	21.70
w/o assumptions (A)	49.50 (−31.5)	18.18
w/o definitions (Δ)	71.50 (−9.5)	7.14
w/o exceptions (X)	78.50 (−2.5)	2.48

Table 3: Ablation study with GPT-5.1 on Debatepedia and ARCT. The gray values in parentheses give the VFR drop relative to the full system. Results for the remaining backbones are reported in the Appendix E.

being added on demand, as counterexamples to a specific guard surface, rather than elicited up front. The hard phase barely changes the size of the context: ten hard iterations add at most 0.9 assumptions and 0.5 definitions or exceptions per instance on either dataset. Solver feedback thus drives local logical corrections to guards rather than proposing new elicited contexts.

The soft symbolic critique and the assumption layer carry most of the performance. Table 3 removes one component at a time with GPT-5.1. Removing the soft critique is the most damaging intervention and degrades validity and faithfulness at once: VFR falls by 40.5 points on Debatepedia and 39.5 on ARCT, leakage rises from 2.07% to 24.58% and from 1.82% to 21.70%. Among the elicitation layers, assumptions matter most: their removal costs 23.5 points on Debatepedia and 31.5 on ARCT, and the larger drop on ARCT reflects that its instances are constructed around a missing warrant, which is exactly what the assumption layer supplies. Definitions contribute a further 14.2 and 9.5 points, since term normalization is what lets guards and premise unify within a proof, while exceptions cost only 2.8 and 2.5 points in aggregate, as few accepted proofs need a rebuttal condition to close.

Abstention is mostly a matter of missing guards, not

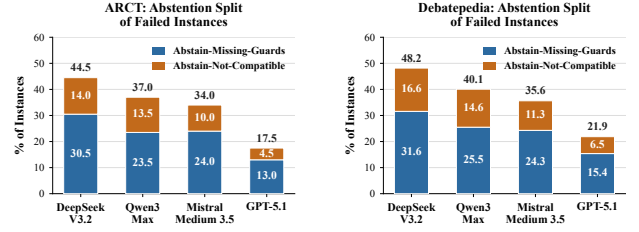


Figure 4: Decomposition of outcomes on abstain-missing-guards and abstain-not-compatible.

of genuine incompatibility between premise and claim.

Figure 4 decomposes the instances whose theory is not proved within the standard budget. We operationalize the two abstention states by granting each such instance ten additional hard iterations: cases that become provable are counted as abstain-missing-guards (AMG), and the remainder as abstain-not-compatible (ANC). Across backbones and datasets, 63.5–74.3% of the unproven instances are AMG, so the dominant cause of abstention is an exhausted budget rather than an argument that resists explicitation; under the doubled budget, the solver-pass rate of GPT-5.1 would reach 93.5% on Debatepedia and 95.5% on ARCT. The remaining ANC core is small but persistent, ranging from 6.5% of all instances for GPT-5.1 to 16.6% for DeepSeek-V3.2 on Debatepedia and from 4.5% to 14.0% on ARCT, and it contracts monotonically as the backbone strengthens, indicating that part of what a weaker model reports as incompatible reflects the limits of its elicitation rather than of the argument.

Related Work

Material inference, defeasibility, and implicit warrants.

The conceptual background comes from inferentialist accounts of material inference (Brandom 1994, 2008, 2002; Hlobil and Brandom 2024) and from classical work on defeasible and non-monotonic reasoning (Reiter 1980; McCarthy 1980; Pollock 1987; Dung 1995). In NLP, these concerns surface in argument reasoning benchmarks whose decisive step is the reconstruction of an implicit warrant (Habernal et al. 2018; Gupta, Zuckerman, and O’Connor 2024). We borrow these distinctions to define what counts as a legitimate guard, but operationalize them computationally, as an autoformalization problem with explicit success and failure states.

Argument mining, debate corpora, and support structure.

Debatepedia and related corpora have been used to study argumentative support, contradiction, and structure over topic-bound debate text (Niculae, Park, and Cardie 2017; Lawrence and Reed 2020), typically by predicting labels, retrieving support, or reconstructing warrants in natural language. Our setting is narrower but deeper: once a support relation is given, GUARD constructs the proof package that makes its hidden bridge explicit without altering the argumentative meaning of the original pair.

Closest to our work, solver-guided explanation verification

for NLI (Quan et al. 2024b, 2025a) refines explanatory sentences that are already given while our method starts from debate premise-claim pairs, search for admissible guards, and report success only when the resulting proof is both solver-valid and contrastively faithful.

Conclusion

In this paper, we proposed GUARD, a neuro-symbolic framework that formulates the autoformalization of argumentative material inference as guard completion, turning implicit, non-monotonic support into explicit, deductively checkable inference. By combining context strengthening, symbolic soft critique, solver-guided hard refinement, and contrastive faithfulness checks, GUARD consistently outperforms state-of-the-art LLM-driven theorem proving on Debatepedia and ARCT across four backbone LLMs. In future work, we will extend guard completion to material inferences from a broader range of domains.

References

- Bowman, S. R.; Angeli, G.; Potts, C.; and Manning, C. D. 2015. A large annotated corpus for learning natural language inference. In Márquez, L.; Callison-Burch, C.; and Su, J., eds., *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, 632–642. Lisbon, Portugal: Association for Computational Linguistics.
- Brandom, R. 1994. *Making It Explicit: Reasoning, Representing, and Discursive Commitment*. Cambridge: Harvard University Press.
- Brandom, R. 2002. Articulating Reasons: An Introduction to Inferentialism. *Philosophical Quarterly*, 52(206): 123–125.
- Brandom, R. B. 2008. *Between Saying and Doing: Towards an Analytic Pragmatism*. New York: Oxford University Press.
- Cabrio, E.; and Villata, S. 2013. A natural language bipolar argumentation approach to support users in online debate interactions†. *Argument & Computation*, 4(3): 209–230.
- Deepseek-AI. 2025. DeepSeek-V3 Technical Report. arXiv:2412.19437.
- Dung, P. M. 1995. On the acceptability of arguments and its fundamental role in nonmonotonic reasoning, logic programming and n-person games. *Artif. Intell.*, 77(2): 321–357.
- Eemeren, F. H. V.; and Grootendorst, R. 2003. *A Systematic Theory of Argumentation: The Pragma-Dialectical Approach*. Cambridge University Press.
- Gordon, T. F.; Prakken, H.; and Walton, D. 2007. The Carneades Model of Argument and Burden of Proof. *Artificial Intelligence*, 171(10-15): 875–896.
- Gubelmann, R.; Katis, I.; Niklaus, C.; and Handschuh, S. 2023. Capturing the Varieties of Natural Language Inference: A Systematic Survey of Existing Datasets and Two Novel Benchmarks. *J. of Logic, Lang. and Inf.*, 33(1): 21–48.
- Gupta, A.; Zuckerman, E.; and O’Connor, B. 2024. Harnessing Toulmin’s theory for zero-shot argument explication. In Ku, L.-W.; Martins, A.; and Srikumar, V., eds., *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 10259–10276. Bangkok, Thailand: Association for Computational Linguistics.
- Habernal, I.; Wachsmuth, H.; Gurevych, I.; and Stein, B. 2018. The Argument Reasoning Comprehension Task: Identification and Reconstruction of Implicit Warrants. In Walker, M.; Ji, H.; and Stent, A., eds., *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, 1930–1940. New Orleans, Louisiana: Association for Computational Linguistics.
- Hlobil, U.; and Brandom, R. 2024. *Reasons for Logic, Logic for Reasons: Pragmatics, Semantics, and Conceptual Roles*. New York: Routledge.
- Kumar, S.; and Talukdar, P. 2020. NILE : Natural Language Inference with Faithful Natural Language Explanations. In Jurafsky, D.; Chai, J.; Schluter, N.; and Tetreault, J., eds., *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 8730–8742. Online: Association for Computational Linguistics.
- Lawrence, J.; and Reed, C. 2020. Argument Mining: A Survey. *Computational Linguistics*, 45(4): 765–818.
- Lu, M.; Delaware, B.; and Zhang, T. 2024. Proof Automation with Large Language Models. In *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering, ASE ’24*, 1509–1520. New York, NY, USA: Association for Computing Machinery. ISBN 9798400712487.
- McCarthy, J. 1980. Circumscription – a Form of Non-Monotonic Reasoning. *Artificial Intelligence*, 13(1-2): 27–39.
- McCarthy, J. 1986. Applications of Circumscription to Formalizing Common Sense Knowledge. *Artificial Intelligence*, 28(1): 89–116.
- Mistral AI. 2026. Mistral Medium 3.5. <https://mistral.ai/news/vibe-remote-agents-mistral-medium-3-5/>.
- Naess, A. 1949. Toward a Theory of Interpretation and Preciseness. *Theoria*, 15(1-3): 220–241.
- Niculae, V.; Park, J.; and Cardie, C. 2017. Argument Mining with Structured SVMs and RNNs. In Barzilay, R.; and Kan, M.-Y., eds., *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 985–995. Vancouver, Canada: Association for Computational Linguistics.
- Nie, Y.; Williams, A.; Dinan, E.; Bansal, M.; Weston, J.; and Kiela, D. 2020. Adversarial NLI: A New Benchmark for Natural Language Understanding. In Jurafsky, D.; Chai, J.; Schluter, N.; and Tetreault, J., eds., *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 4885–4901. Online: Association for Computational Linguistics.
- Nipkow, T.; Wenzel, M.; and Paulson, L. C. 2002. *Isabelle/HOL: a proof assistant for higher-order logic*. Springer.
- Olausson, T.; Gu, A.; Lipkin, B.; Zhang, C.; Solar-Lezama, A.; Tenenbaum, J.; and Levy, R. 2023. LINC: A Neurosymbolic Approach for Logical Reasoning by Combining Language Models with First-Order Logic Provers. In Bouamor, H.; Pino, J.; and Bali, K., eds., *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 5153–5176. Singapore: Association for Computational Linguistics.

- OpenAI. 2025. GPT-5.1. <https://openai.com/index/gpt-5-1/>.
- Parsons, T. 1990. *Events in the Semantics of English: A Study in Subatomic Semantics*. MIT Press.
- Paulson, L. C.; and Blanchette, J. C. 2012. Three Years of Experience with Sledgehammer, a Practical Link between Automatic and Interactive Theorem Provers. In Sutcliffe, G.; Schulz, S.; and Ternovska, E., eds., *Proceedings of the 8th International Workshop on the Implementation of Logics (IWIL 2010)*, volume 2 of *EPiC Series in Computing*, 1–11. EasyChair.
- Pollock, J. L. 1987. Defeasible Reasoning. *Cognitive Science*, 11(4): 481–518.
- Quan, X.; Valentino, M.; Carvalho, D.; Dalal, D.; and Freitas, A. 2025a. PEIRCE: Unifying Material and Formal Reasoning via LLM-Driven Neuro-Symbolic Refinement. In Mishra, P.; Muresan, S.; and Yu, T., eds., *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*, 11–21. Vienna, Austria: Association for Computational Linguistics. ISBN 979-8-89176-253-4.
- Quan, X.; Valentino, M.; Dennis, L.; and Freitas, A. 2024a. Enhancing Ethical Explanations of Large Language Models through Iterative Symbolic Refinement. In Graham, Y.; and Purver, M., eds., *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, 1–22. St. Julian’s, Malta: Association for Computational Linguistics.
- Quan, X.; Valentino, M.; Dennis, L. A.; and Freitas, A. 2024b. Verification and Refinement of Natural Language Explanations through LLM-Symbolic Theorem Proving. In Al-Onaizan, Y.; Bansal, M.; and Chen, Y.-N., eds., *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 2933–2958. Miami, Florida, USA: Association for Computational Linguistics.
- Quan, X.; Valentino, M.; Dennis, L. A.; and Freitas, A. 2025b. Faithful and Robust LLM-Driven Theorem Proving for NLI Explanations. In Che, W.; Nabende, J.; Shutova, E.; and Pilehvar, M. T., eds., *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 17734–17755. Vienna, Austria: Association for Computational Linguistics. ISBN 979-8-89176-251-0.
- Qwen Team. 2025. Qwen3 Technical Report. arXiv:2505.09388.
- Reiter, R. 1980. A logic for default reasoning. *Artificial Intelligence*, 13(1): 81–132. Special Issue on Non-Monotonic Logic.
- Sellars, W. 1953. Inference and Meaning. *Mind*, 62(247): 313–338.
- Storks, S.; Gao, Q.; and Chai, J. Y. 2020. Recent Advances in Natural Language Inference: A Survey of Benchmarks, Resources, and Approaches. arXiv:1904.01172.
- Toulmin, S. 1958. *The Uses of Argument*. Cambridge, England: Cambridge University Press.
- Valentino, M.; Pratt-Hartmann, I.; and Freitas, A. 2021. Do Natural Language Explanations Represent Valid Logical Arguments? Verifying Entailment in Explainable NLI Gold Standards. In Zarrieß, S.; Bos, J.; van Noord, R.; and Abzianidze, L., eds., *Proceedings of the 14th International Conference on Computational Semantics (IWCS)*, 76–86. Groningen, The Netherlands (online): Association for Computational Linguistics.
- Walton, D. 2001. Persuasive Definitions and Public Policy Arguments. *Argumentation and Advocacy*, 37(3): 117–132.
- Wang, X.; Wei, J.; Schuurmans, D.; Le, Q. V.; Chi, E. H.; Narang, S.; Chowdhery, A.; and Zhou, D. 2023. Self-Consistency Improves Chain of Thought Reasoning in Language Models. In *The Eleventh International Conference on Learning Representations*.
- Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; Ichter, B.; Xia, F.; Chi, E. H.; Le, Q. V.; and Zhou, D. 2022. Chain-of-thought prompting elicits reasoning in large language models. In *Proceedings of the 36th International Conference on Neural Information Processing Systems, NIPS ’22*. Red Hook, NY, USA: Curran Associates Inc. ISBN 9781713871088.
- Williams, A.; Nangia, N.; and Bowman, S. R. 2018. A Broad-Coverage Challenge Corpus for Sentence Understanding through Inference. In Walker, M.; Ji, H.; and Stent, A., eds., *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, 1112–1122. New Orleans, Louisiana: Association for Computational Linguistics.
- Wu, Y.; Jiang, A. Q.; Li, W.; Rabe, M.; Staats, C.; Jamnik, M.; and Szegedy, C. 2022. Autoformalization with Large Language Models. In Koyejo, S.; Mohamed, S.; Agarwal, A.; Belgrave, D.; Cho, K.; and Oh, A., eds., *Advances in Neural Information Processing Systems*, volume 35, 32353–32368. Curran Associates, Inc.
- Zhang, L.; Quan, X.; and Freitas, A. 2024. Consistent Autoformalization for Constructing Mathematical Libraries. In Al-Onaizan, Y.; Bansal, M.; and Chen, Y.-N., eds., *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 4020–4033. Miami, Florida, USA: Association for Computational Linguistics.

A Detailed Experimental Configuration

A.1 Datasets and Sampling

We evaluate on Debatepedia and the Argument Reasoning Comprehension Task (ARCT). The Debatepedia evaluation set contains 247 premise-claim pairs balanced across 19 topics, with 13 pairs per topic. The ARCT evaluation set contains 200 randomly sampled reason-claim pairs, which are treated as premise-claim pairs. The same fixed instances are used for every method and backbone so that all comparisons are paired at the instance level.

Dataset selection. The evaluation targets argumentative support whose contextual basis remains partly implicit. A suitable dataset must provide a premise-claim relation for which the missing background commitments can be made explicit and assessed through formal verification. Debatepedia meets this requirement through argument pairs from online debates. Its extended resource distinguishes argumentative support from textual entailment (Cabrio and Villata 2013),

Dataset	Instances	Topics	Construction used in this paper
Debatepedia	247	19	Topic-balanced premise-claim pairs; 13 instances per topic
ARCT	200	–	Fixed random sample of reason-claim pairs

Table A.1: Summary of the evaluation datasets.

making it relevant to the distinction between a materially supported argument and an inference whose support has been made formally explicit. This setting allows us to examine what contextual information is needed to turn the original support relation into a verifiable inference.

ARCT complements this setting by focusing directly on implicit warrants (Habernal et al. 2018). Its original task requires identifying the warrant that connects a reason to a claim. In our evaluation, each reason-claim pair serves as the input to guard completion. The system must construct the contextual support needed for formal verification, and success is assessed through the resulting proof and contrastive checks. The evaluation consequently concerns the explicit completion of the argument, without scoring the original warrant-selection task.

Topic coverage. The Debatepedia evaluation follows the 19-topic organisation of the extended resource (Cabrio and Villata 2013). These topics provide the basis for evaluating guard completion across different debate contexts. Assigning 13 premise-claim pairs to each topic gives every topic equal weight in the 247-instance evaluation set. Larger topics cannot dominate the aggregate results simply by contributing more instances. This balance concerns topic frequency and does not assume that all topics have the same reasoning difficulty.

A.2 Backbone LLMs and Inference Settings

We evaluate four backbone LLMs through their respective APIs. GPT-5.1 uses the identifier `gpt-5.1` (OpenAI 2025). Qwen3-Max uses `qwen3-max-preview` (Qwen Team 2025). The identifiers for DeepSeek-V3.2 and Mistral Medium 3.5 are `deepseek-chat` (Deepseek-AI 2025) and `mistral-medium-3-5` (Mistral AI 2026), respectively. For GPT-5.1, we set `reasoning_effort` to `medium` and do not specify a sampling temperature. We run Qwen3-Max and DeepSeek-V3.2 in non-thinking mode and set `temperature=0.6` for Qwen3-Max, DeepSeek-V3.2, and Mistral Medium 3.5. We do not explicitly set `reasoning_effort` for Mistral Medium 3.5. For each backbone, all methods use identical decoding configurations for tasks shared across methods. Prompts are instantiated independently for each example, and outputs generated by one backbone are never used as demonstrations for any other backbone.

Backbone selection. The backbone comparison evaluates whether the benefits of guard completion persist across different model families. The framework requires an LLM that can generate contextual support and express natural language sentences in a formal representation. It must also respond to verification feedback during refinement. The four evaluated backbones support these roles through their respective APIs, allowing the same framework to be evaluated without

depending on a single model family.

Using one model from each of four distinct families broadens the comparison beyond multiple versions of the same backbone. The principal comparison remains between methods using the same model, with the decoding settings for shared tasks held fixed. Repeating this comparison across backbones tests whether the contribution of guard completion remains consistent when the underlying LLM changes.

The selection supports a cross-family evaluation under the configurations reported below. It does not establish an exhaustive ranking of available LLMs. Other general-purpose backbones could be evaluated through the same interface, while comparisons between additional versions of a single family would address sensitivity to model-version choice.

A.3 Baseline Control Conditions

All methods share the same downstream autoformalisation and Isabelle/HOL verification pipeline. They differ only in how the missing inferential material is produced and whether it is iteratively revised. The Direct baseline receives no added contextual material. The chain-of-thought and Toulmin baselines generate their bridging context once. PEIRCE and GUARD receive theorem-prover feedback and may revise the added context within the common iteration budget. Every solver-passed candidate is subsequently evaluated with the same premise-contrast and claim-contrast tests used by GUARD.

Baseline selection. The baselines are selected to examine how the treatment of missing context affects formal verification. Each comparison must produce an inference that can be assessed by the shared theorem prover. This requirement allows us to evaluate the contextual support provided by a method and to test whether a successful proof still depends on the original premise.

Direct autoformalisation provides the no-context control. It establishes what can be verified from the formalised premise and claim without constructing additional support. The comparison with context-generating methods measures the contribution of making implicit commitments explicit within the same verification pipeline.

The 1-shot CoT baseline tests whether a short sequence of background sentences can supply the missing connection through general reasoning prompts (Wei et al. 2022). Toulmin-style explication introduces an argumentation-specific account of that connection. Following the motivation of Gupta, Zuckerman, and O’Connor (2024), it makes the warrant explicit and relates it to supporting background information. Its qualification and rebuttal condition also provide a way to express the circumstances under which the support applies. Our one-shot baseline adapts this idea to context generation for a fixed premise-claim pair. Comparing these two baselines examines

Stage or method	Maximum iterations	Termination condition
Soft verification and refinement	10	PO1–PO4 pass, or budget exhausted
Hard verification and refinement	10	Isabelle/HOL proof succeeds, no admissible repair remains, or budget exhausted
Faithfulness refinement	5	Both contrastive tests pass, no admissible repair remains, or budget exhausted
PEIRCE	10	Theorem is proved, or budget exhausted
Extended abstention probe	+10 hard iterations	Proof succeeds or extended budget is exhausted

Table A.2: Refinement budgets and stopping conditions.

whether an explicit argumentation schema improves on a general sequence of background sentences when both contexts are generated in a single pass.

PEIRCE provides the iterative neuro-symbolic comparison (Quan et al. 2025a). In our setting, its explanatory sentences constitute added context that can be refined using theorem-prover feedback. Its inclusion allows us to compare GUARD with an approach that already benefits from iterative logical verification. The common limit of 10 verification and refinement iterations keeps the hard-refinement budget aligned between the two approaches.

B Autoformalisation Protocol

B.1 Representation Language

Natural language sentences are translated into first-order logical forms with Neo-Davidsonian event variables (Parsons 1990). Entity predicates introduce individuals, while verbal predicates introduce events. Thematic-role predicates connect events to their participants. Multiple verbal eventualities are represented by distinct event variables. Quantifiers must bind every variable in their scope. Polarity and connectives must match the source sentence. Predicates referring to the same entity, event, or relation must remain consistent throughout the instance.

The autoformaliser is realised as a three-step composition. For each sentence s , a syntactic-parsing step π identifies the grammatical constituents. The parse records the subject with the main and auxiliary verbs. It also identifies objects and complements, together with adverbial modifiers. A formalisation step F maps the parsed constituents into a Neo-Davidsonian logical form. A unification step U_Σ then rewrites the forms over a shared predicate signature $\Sigma(S)$. Each concept has the same predicate symbol and arity throughout the instance.

$$\Phi(s) = U_{\Sigma(S)}(F(\pi(s))). \quad (\text{B.1})$$

For an input set

$$S = \{T, C\} \cup \mathcal{G},$$

the autoformaliser produces

$$\Phi(S) = \{\Phi(s) \mid s \in S\},$$

where the unification step is applied jointly over all elements of S to enforce cross-sentence predicate consistency. Each selected guard becomes an axiom, while the formalised premise is introduced as a theorem assumption and the formalised claim as the proof goal.

As a running illustration, consider the Debatepedia instance whose premise is “*Many solar energy systems are now price competitive with coal.*” The syntactic-parsing step returns the constituent structure

```
Subject: Many solar energy systems
Linking Verb: are
Adverbial Modifier (Time): now
Subject Complement: price competitive
with coal
```

from which the formalisation step produces

$$\begin{aligned} \exists x y. \text{SolarEnergySystem}(x) \wedge \text{Many}(x) \\ \wedge \text{Coal}(y) \wedge \text{Now}(x) \\ \wedge \text{PriceCompetitiveWith}(x, y). \end{aligned} \quad (\text{B.2})$$

The associated claim “*Solar energy is economically sound*” has a generic, non-episodic reading and is accordingly formalised with universal force,

$$\forall x. \text{SolarEnergy}(x) \longrightarrow \text{EconomicallySound}(x), \quad (\text{B.3})$$

and an eventive guard such as “*A solar energy system ... converts solar energy into usable electricity or heat*” introduces an explicit event variable with thematic roles, e.g. $\text{Convert}(e) \wedge \text{Agent}(e, y) \wedge \text{Patient}(e, z)$. The unification step guarantees, for instance, that SolarEnergy and $\text{PriceCompetitiveWith}$ in Eq. (B.2) are the same symbols, with the same arities, that appear in the guards and in Eq. (B.3).

B.2 Formalisation of Exception-Management Items

A defeasible rule family d is formalised as a monotonic guarded rule using an abnormality predicate.

$$\forall k. \varphi_d(k) \wedge \neg Ab_d(k) \longrightarrow \psi_d(k). \quad (\text{B.4})$$

For a closed exception list, the abnormality condition is defined by

$$Ab_d(k) \longleftrightarrow \chi_{d,1}(k) \vee \dots \vee \chi_{d,n}(k). \quad (\text{B.5})$$

For an open-ended list, only the direction from a listed exception to abnormality is asserted, avoiding the claim that the elicited exceptions are exhaustive. In the formalised theory, Eq. (B.1) is applied to the rule body φ_d and head ψ_d . The abnormality disjuncts $\chi_{d,i}$ are autoformalised in the same way. These logical forms are then combined. A single guarded rule may contain several nested Davidsonian event descriptions, as illustrated by guard $\mathbb{G}3$ in Listing C.1.

B.3 Automatic Quality Checks

Each logical form is checked against the following criteria before it is admitted to a theory.

1. **Syntactic well-formedness.** The formula is complete and has balanced brackets. Its formalised representation uses legal Isabelle/HOL syntax.
2. **Variable binding.** Every entity and event variable has a quantifier or local binder with the intended scope.
3. **Predicate consistency.** A concept or event has a consistent predicate name and arity within the instance.
4. **Semantic coverage.** The logical form represents the source sentence’s content-bearing predicates and their arguments. It preserves modifiers and polarity, together with the logical connectives.
5. **Role fidelity.** Semantic roles attach to the correct event and participant. The check covers agent and patient/theme roles, as well as recipient, location, and other roles in the sentence.
6. **Inference direction.** Implications preserve the direction expressed by the source sentence. Causal links and defeasible rules follow the same requirement.

B.4 Faithfulness Evaluation of Autoformalisation

The main experiments share the autoformalisation component across all compared methods, so autoformalisation errors affect every system equally. We quantify the quality of this component using the two evaluation protocols of Quan et al. (2025b). In *informalisation*, an LLM translates each logical form back into natural language. The resulting sentence is compared with the source using the cosine similarity of their sentence embeddings,

$$\text{faith}(s) = \cos(\mathbf{e}(s), \mathbf{e}(\rho(\Phi(s)))) \quad (\text{B.6})$$

where ρ denotes the informalisation map and $\mathbf{e}(\cdot)$ the sentence encoder.

In the *human evaluation*, annotators inspect the generated Isabelle/HOL theories and assign each erroneous logical form to one of four categories. The *syntax* category covers ill-formed or non-compiling formulas. An incorrect implication direction or strength is labelled *implication*. The *quantifier* category covers an incorrect quantifier or scope, while *variable* covers unbound or incorrectly reused variables.

Table B.1 reports the informalisation faithfulness over premise, claim, and guard sentences for each backbone; Figure B.1 shows the distribution of human-annotated error categories averaged over the four backbones on 300 randomly sampled logical forms. Faithfulness is high and stable across backbones (0.798–0.917), and the error mass concentrates on syntax errors, which are exactly the errors that the syntactic admission check of Section C.1 detects and repairs before verification; genuinely semantic errors (implication direction, quantification) account for a minority of cases.

C Isabelle/HOL Verification Details

C.1 Theory Construction

For each instance, the selected formal guards $G = \{g_1^*, \dots, g_m^*\}$ are inserted as axioms. The theorem introduces

Backbone	Debatepedia	ARCT
DeepSeek-V3.2	0.812	0.798
Qwen3-Max	0.838	0.852
Mistral Medium 3.5	0.861	0.869
GPT-5.1	0.905	0.917
Avg.	0.854	0.859

Table B.1: Autoformalisation faithfulness (cosine similarity between each source sentence and the informalisation of its logical form, Eq. (B.6)), computed over premise, claim, and guard sentences. The evaluation protocol follows Quan et al. (2025b).

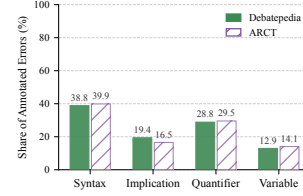


Figure B.1: Distribution of autoformalisation errors (syntax, implication, quantifier, variable) in the generated Isabelle/HOL theories, averaged over the four backbone LLMs. Annotation categories follow Quan et al. (2025b).

the formal premise T^* as an assumption and the formal claim C^* as the goal. A proof succeeds only when Isabelle/HOL establishes

$$G \cup \{T^*\} \vdash C^*. \quad (\text{C.1})$$

The theory declares the base types `entity` and `event`. Each unified predicate receives a constant declaration, and each selected guard receives a named axiom `guard_Gk`. The single theorem places T^* in its `assumes` clause and C^* in its `shows` clause. Listing C.1 shows the (abbreviated) theory generated for the running example of Section B.1; the proof line is the tactic returned by Sledgehammer as described below.

Listing C.1: Isabelle/HOL theory generated for the running example. Constant declarations, guard G2, and the inner event descriptions of guard G3 (marked [...]) are abbreviated. The closing tactic by `blast` was found by Sledgehammer.

```

1 theory debatepedia_52_hard_0
2   imports Main
3   begin

4
5   typedecl entity
6   typedecl event

7
8   consts
9     SolarEnergySystem :: "entity  $\Rightarrow$  bool"
10    PriceCompetitiveWith :: "entity  $\Rightarrow$ 
     $\hookleftarrow$  entity  $\Rightarrow$  bool"
11    SolarEnergy :: "entity  $\Rightarrow$  bool"
12    EnergySource :: "entity  $\Rightarrow$  bool"
13    EconomicallySound :: "entity  $\Rightarrow$  bool"

```

```

14  (* ... one constant per unified
    ↪ predicate ... *)

16  (* Guard G1: If many solar energy
    ↪ systems are now price
    ↪ competitive with coal, then every
    ↪ energy source that is
    ↪ solar energy is economically sound.
    ↪ *)

19  axiomatization where
20  guard_G1: "(∃ x y. SolarEnergySystem
    ↪ x ∧ Many x ∧ Coal y
    ↪ Now x ∧
    ↪ PriceCompetitiveWith x y)
    ↪ (∀ z. (EnergySource z ∧
    ↪ SolarEnergy z)
    ↪ EconomicallySound z)"

25  (* Guard G3: compiled defeasible rule
    ↪ -- an energy source
    ↪ that generally delivers energy at
    ↪ prices competitive with
    ↪ coal for typical uses is
    ↪ economically sound, unless its
    ↪ apparent competitiveness is driven
    ↪ by major subsidies or
    ↪ hidden costs (the negated exception
    ↪ condition). Inner
    ↪ event descriptions are elided here
    ↪ as [...] . *)

31  axiomatization where
32  guard_G3: "∀ x. (EnergySource x
    ↪ (∃ y u e. Energy y ∧
    ↪ Deliver e ∧ Agent e x
    ↪ Patient e y ∧
    ↪ Generally e ∧ Price u
    ↪ At e u ∧ [...])
    ↪ ¬(∃ z e1. ((Subsidy z ∧
    ↪ Major z)
    ↪ (Cost z ∧ Hidden z)
    ↪ Drive e1 ∧ Agent e1 z
    ↪ ∧ [...]))
    ↪ EconomicallySound x"

41  (* Guard G4: Solar energy is radiant
    ↪ energy from sunlight,
    ↪ and everything that is solar energy
    ↪ is an energy source. *)

43  axiomatization where
44  guard_G4: "∀ x. SolarEnergy x ↔
    ↪ (RadiantEnergy x
    ↪ (∃ y. Sunlight y ∧ FromE
    ↪ x y) ∧ EnergySource x)"

47  (* Guard G2 (definition of a solar
    ↪ energy system) omitted
    ↪ for space. *)

50  theorem hypothesis:
51  (* Premise: Many solar energy systems
    ↪ are now price
    ↪ competitive with coal. *)
52  assumes asm: "SolarEnergySystem x ∧
    ↪ Many x ∧ Coal y
    ↪ Now x ∧

```

```

    ↪ PriceCompetitiveWith x y"
55  (* Claim: Solar energy is
    ↪ economically sound. *)
56  shows "∀ x. SolarEnergy x →
    ↪ EconomicallySound x"
57  using assms guard_G1 guard_G4 by blast
59  end

```

Before any proof is attempted, the controller performs two automatic admission checks on the formalised theory. The *syntax check* runs the theory through Isabelle and rejects it if the parser or type checker reports an error. The diagnostic and the affected lines are returned for LLM-based refinement, subject to a fixed number of refinement iterations. The *consistency check* replaces the proof goal with *False* and runs Sledgehammer. If

$$G \cup \{T^*\} \vdash \text{False} \quad (\text{C.2})$$

is provable, the axiom set is contradictory. Any subsequent “proof” of C^* would be vacuous, so the theory is rejected. The theorem prover output identifies the axioms used to prove the contradiction. Exactly those axioms are returned for LLM-based refinement. Only theories that pass both checks proceed to proof search.

C.2 Proof Search with Sledgehammer

Proof search proceeds in two modes. In the *direct mode*, Sledgehammer (Paulson and Blanchette 2012) is invoked immediately on the stated goal of Eq. (C.1). The external automated provers search for a proof from the premise assumption and the guard axioms. On success, Sledgehammer reports a reconstructing tactic, such as `by blast` or `by (metis guard_G1 guard_G4)`. The controller splices the returned tactic into the theory in place of the Sledgehammer call and re-runs Isabelle to confirm that the reconstructed proof checks; the confirmed theory is what is stored and counted as solver-passed. The proof line of Listing C.1 was obtained in this mode.

If no direct proof is found, the controller falls back to a *proof-sketch mode*. An LLM-based proof-sketch function produces a structured Isar proof body that decomposes the entailment into a chain of intermediate facts

$$T^* = f_0 \implies f_1 \implies \dots \implies f_k = C^*, \quad (\text{C.3})$$

where each step names the load-bearing guard axioms it relies on and leaves its local justification as an `<ATP>` placeholder. The controller then discharges the placeholders from left to right. Each `<ATP>` is replaced by a Sledgehammer call, and the tactic Sledgehammer returns for that subgoal is substituted in place. The sketch succeeds only if every step is discharged and the completed proof is re-checked by Isabelle as a whole. If some step cannot be discharged, the failing step, its preceding comments, and the prover messages are recorded as the failure context for hard refinement. This two-mode design mirrors the observation that a single global Sledgehammer call suffices for short bridges, while multi-guard instances (e.g. those using a formalised defeasible rule together with a definition) benefit from an explicit intermediate decomposition.

C.3 Failure Extraction and Hard Refinement

When a theory fails, the controller records the failing theorem or proof step and the current goal state. It retains the relevant type or syntax diagnostics and Sledgehammer messages, together with the axioms supplied to that step. The LLM-based hard critique and refinement function $f_{\text{refine}}^{\text{hard}}$ receives this feedback alongside the current natural-language guards and their logical forms. The function classifies the failure under PO1–PO4 before proposing a refinement. It may correct an erroneous representation or add or refine a missing contextual item. Guard selection may also change, while the original premise and claim remain unchanged.

D Prompt Templates

Tables D.1–D.12 list the prompt templates used in our experiments. The three baseline prompts appear first, followed by the prompts used at each stage of the pipeline. Curly-braced items such as {premise} are placeholders instantiated at run time. The complete system and user prompts, including all few-shot demonstrations, are provided in the submitted code.

Table D.1. Baseline prompt: chain-of-thought background context.

SYSTEM: You are an expert in argumentative reasoning.

You will be given a context and a claim. The context is intended to support the claim, but some of the connecting background information may be implicit. Generate a short, ordered chain of background sentences that makes the reasoning from the context to the claim explicit.

Requirements:

1. Treat the provided context as indispensable starting information.
2. The context and the generated background sentences, taken together, should support the claim.
3. The generated background sentences alone must not be sufficient to support the claim without the provided context.
4. Each background sentence should contribute one distinct general fact, rule, or intermediate connection.
5. Arrange the background sentences in the order in which they are needed to reach the claim.
6. Do not repeat or paraphrase the complete context.
7. Do not repeat, paraphrase, or directly state the complete claim.
8. Do not use a pair-specific shortcut such as “If the context is true, then the claim is true.”
9. Do not introduce unrelated information, contradictory information, or a conclusion stronger than the provided claim.
10. Generate 2 to 4 concise declarative sentences, with one sentence on each line.
11. Return only the requested format without numbering, bullet points, or additional commentary.

USER: Here is one example:

Provided Context: Television and texting are disturbing brains at a young age.

Provided Claim: People are getting dumber.

Background Sentences:

A disturbance to a person’s brain at a young age impairs that person’s later reasoning and learning abilities.

Table D.1 (continued)

Impaired reasoning and learning abilities reduce a person’s general cognitive ability over time.

A reduction in general cognitive ability over time constitutes a decline in intelligence.

Now generate the background sentences for the following instance:

Provided Context: {premise_sentence}

Provided Claim: {hypothesis_sentence}

Background Sentences:

Table D.2. Baseline prompt: explanatory-sentence generation.

SYSTEM: You are an expert in natural language inference. A hypothesis sentence and a premise sentence will be provided; however, the premise sentence may not always be included. Please generate some explanatory sentences to state how to infer the provided hypothesis sentence.

USER: Here are some examples:

Provided Hypothesis Sentence: Some children outside having fun and playing.

Provided Premise Sentence: Three children in swimsuits are having fun outside near a white building.

Explanatory Sentences:

Three children can be considered as some children, and they are children.

If some children are having fun outside, they are also playing outside.

Provided Hypothesis Sentence: Azathioprine interferes with the assembly of proteins.

Explanatory Sentences:

DNA contains genetic instructions for proteins, and RNA, synthesized from DNA, helps assemble the proteins.

The assembly of proteins is dependent on the synthesis of DNA and RNA.

Azathioprine interferes with DNA and RNA synthesis.

Do not generate explanatory sentences that just repeat or represent the same meaning of the hypothesis sentence. The explanatory sentences should form an inference chain to infer the hypothesis sentence and must not repeat the hypothesis sentence.

Give me the explanatory sentences in the above example format:

Provided Hypothesis Sentence:

{hypothesis_sentence}

{premise_sentence}

Explanatory Sentences:

Table D.3. Baseline prompt: Toulmin-style context generation.

SYSTEM: You are an expert in argumentative reasoning.

You will be given a context and a claim. The context is intended to support the claim, but the argumentative commitments connecting them may be implicit. Generate a concise Toulmin-style context that makes the implicit support

Table D.3 (continued)

relation explicit.

The generated context should contain:

1. One qualified bridging sentence that expresses the main general connection from the type of information stated in the context to the type of conclusion stated in the claim.
2. One backing sentence that provides a general fact or principle supporting the bridging connection.
3. When needed, one additional bridging sentence that completes an intermediate reasoning step or aligns the concepts used in the context and the claim.
4. One rebuttal condition describing a genuine circumstance under which the bridging connection may not apply.

Requirements:

1. The provided context and the generated Toulmin context sentences, taken together, should support the claim.
2. The generated sentences alone must not be sufficient to support the claim without the provided context.
3. The provided context must remain an indispensable starting point of the argument.
4. Express the appropriate inferential qualifier, such as “generally”, “normally”, “typically”, or “necessarily”, inside the main bridging sentence.
5. Use “necessarily” only when the connection is genuinely exceptionless; otherwise prefer a defeasible qualifier such as “generally” or “normally”.
6. The bridging sentences must express general relations rather than facts that assert the claim about the current case.
7. The backing sentence must support the bridging relation and must not introduce new case-specific evidence that independently establishes the claim.
8. The rebuttal condition must describe only a possible exception; do not assert that the exception actually holds in the provided case.
9. Do not repeat or paraphrase the complete context.
10. Do not directly state or paraphrase the claim as a fact about the current case.
11. Do not use a pair-specific shortcut such as “If the provided context is true, then the provided claim is true.”
12. Do not merely combine the complete context and claim into a conditional sentence.
13. Generate three to four concise sentences, with one sentence for each applicable argumentative role.
14. Return only the requested format without JSON, numbering, bullet points, or additional commentary.

USER: Here is one example:

Provided Context: Television and texting are disturbing brains at a young age.

Provided Claim: People are getting dumber.

Qualified Bridging Sentence: Disturbing brain development at a young age generally impairs the later development of reasoning and learning abilities.

Backing Sentence: Reasoning, learning, and memory depend on healthy brain development during childhood.

Additional Bridging Sentence: People whose reasoning and learning abilities undergo a sustained decline become less intelligent over time.

Rebuttal Condition: This connection may not apply when the disturbance is too minor to affect cognitive development or when its effects are fully offset by other influences.

Now generate the Toulmin context sentences for the following instance:

Table D.3 (continued)

Provided Context: {premise_sentence}

Provided Claim: {hypothesis_sentence}

Toulmin Context Sentences:

Table D.4. Pipeline prompt: eliciting enthymematic assumptions.

SYSTEM: You are an expert in material inference and argument reconstruction.

USER:

Premise: {premise}

Claim: {claim}

Elicit a concise set of implicit assumptions that are needed for the premise to support the claim. Assumptions may include normality conditions, domain restrictions, ceteris-paribus conditions, or an implicit warrant.

Constraints:

1. Do not restate the claim or introduce a rule equivalent to the claim.
2. Do not add facts that contradict the premise.
3. Make each assumption independently understandable and formalizable.
4. State only assumptions that are potentially load-bearing.
5. Mark uncertainty explicitly rather than presenting a doubtful fact as universally true.

Return one item per line with a short justification of its role.

Table D.5. Pipeline prompt: eliciting definitions and term-normalisation facts.

SYSTEM: You are an expert in lexical semantics, definitions, and formalization.

USER:

Premise: {premise}

Claim: {claim}

Candidate assumptions: {assumptions}

Identify definitions or term-normalisation facts needed to align the concepts used by the premise, claim, and assumptions.

Constraints:

1. Preserve the context-specific meaning of each term.
2. Do not broaden a term merely to make the claim provable.
3. Prefer a directional subsumption or equivalence only when it is semantically justified.
4. Do not introduce the claim, a paraphrase of the claim, or an answer-bearing definition.
5. Write each item as one formalizable sentence.

Table D.6. Pipeline prompt: constructing defeasible rules and exceptions.

SYSTEM: You are an expert in defeasible reasoning and exception management.

USER:

Premise: {premise}

Claim: {claim}

Table D.6 (continued)

Assumptions: {assumptions}

Definitions: {definitions}

Construct only the defeasible rules needed to connect the premise to the claim. For each rule, list concrete exception conditions that would block its application.

Constraints:

1. Separate the rule antecedent, rule consequent, and exceptions.
2. Keep each rule local; do not use an unconditional rule whose consequent is the claim.
3. Exceptions must describe circumstances in which the rule is not reliable, not arbitrary reasons to reject the claim.
4. State whether the exception list is intended to be closed or open-ended.
5. Do not add an exception or rule that is not relevant to this inference.

Table D.7. Pipeline prompt: translating sentences into logical forms.

SYSTEM: You are an expert in first-order logic and Neo-Davidsonian event semantics.

USER:

Natural-language sentence: {sentence}

Translate the sentence into one well-formed logical expression.

Requirements:

1. Introduce an event variable for every content-bearing verbal event.
2. Use distinct event variables for distinct events.
3. Bind every entity and event variable with the correct quantifier scope.
4. Preserve negation, modality, conditionals, conjunction, disjunction, and implication direction.
5. Use consistent predicates, arities, entities, and semantic roles.
6. Represent only content licensed by the sentence; do not add background knowledge or a predicate that is absent from its meaning.
7. Produce a form that can be compiled into Isabelle/HOL.

Return only the logical form and a compact predicate glossary.

Table D.8. Pipeline prompt: selecting a minimal guard set.

SYSTEM: You are an expert in material inference, formal inference, and argumentation theory.

USER:

Premise and formalization: {premise_and_form}

Claim and formalization: {claim_and_form}

Available assumptions, definitions, and exception-management items: {strengthened_context}

Select the smallest set of guards that jointly covers the missing inferential material needed for the premise to support the claim.

Constraints:

1. Select only from the supplied context; do not invent a missing item.

Table D.8 (continued)

2. Do not select the claim, a paraphrase of the claim, or an answer-bearing rule equivalent to the claim.
3. Every selected guard must be load-bearing: removing it should break the intended derivation.
4. The selected guards alone must not prove the claim without the premise.
5. Select zero or more items from each category according to necessity; do not pad the set merely to include every category.
6. If the context is insufficient, return FAIL and list repair candidates.

Table D.9. Pipeline prompt: soft symbolic critique under PO1–PO4.

SYSTEM: You are a strict verifier of formalized material inference.

USER:

Premise T^ :* {formal_premise}

Claim C^ :* {formal_claim}

Selected guards G : {formal_guards}

Evaluate the candidate under four proof obligations:

PO1 Representation sanity: syntax, types, arities, bindings, roles, and predicate normalization are coherent.

PO2 Support adequacy: the guards cover the missing inferential material and make relevant exceptions explicit.

PO3 Strict support: G together with T^* is sufficient to derive C^* .

PO4 Dependence: G alone does not derive C^* , and every selected guard is necessary for the intended proof.

Do not silently repair the input while judging it. For every failed obligation, identify the exact item responsible and provide either: (a) a repair to an existing item; or (b) a description of a genuinely missing item. Return PASS only when all four obligations pass.

Table D.10. Pipeline prompt: refinement from Isabelle/HOL diagnostics.

SYSTEM: You repair a formal theory using theorem-prover diagnostics. Preserve the meaning of the original premise and claim.

USER:

Premise and claim: {premise_claim}

Current strengthened context and selected guards:

{current_context}

Current logical forms: {logical_forms}

Isabelle/HOL diagnostic and failed proof step:

{prover_feedback}

Diagnose the failure under PO1–PO4, then make the smallest admissible repair. You may revise an erroneous logical form, repair or add a missing context item, or change guard selection. You must not edit the original premise or claim, assert the claim as a guard, or make the proof independent of the premise. Return the complete updated context and guard set.

Table D.11. Pipeline prompt: premise- and claim-side contrastive probes.

SYSTEM: You generate hard contrastive tests for argumentative support.

USER:
Original premise: {premise}
Original claim: {claim}

Generate:
A1. One same-topic counter-premise that should not support the original claim. It must be plausible and relevant to the broad topic, but it must not be a paraphrase or direct negation of the original premise.
A2. One nearby cross-subtopic claim that is not warranted by the original premise. It must be plausible and topically related, but it must test a materially different conclusion.
 Explain briefly why each replacement should break the original support relation. Do not generate an obviously nonsensical or contradictory probe.

Table D.12. Pipeline prompt: repairing a solver-valid but leaky guard set.

SYSTEM: You repair a formally valid argument that failed a contrastive faithfulness check.

USER:
Original premise, claim, guards, and proof:
 {verified_candidate}
Leaking contrastive theory and leak report:
 {leak_report}

Revise the guard set so that:
 1. the original premise and revised guards still prove the original claim;
 2. the guards alone do not prove the claim;
 3. the counter-premise does not prove the claim with the guards;
 4. the original premise does not prove the alternative claim with the guards; and
 5. every guard remains semantically justified and load-bearing.
 Narrow or condition over-broad rules rather than adding unrelated blockers. Return the complete revised guard set, not only the changed item.

E Complete Ablation Results

The main paper reports the GPT-5.1 ablation only. Table E.1 reports the same ablation for every backbone on both datasets. Removing the soft critique is the single most damaging intervention for all four backbones, and the ordering $A \succ \Delta \succ X$ in contribution size is stable across backbones and datasets.

F End-to-End Example

This section traces Debatepedia instance #197 through the full pipeline. The example begins with context harvesting and follows the selected guards through autoformalisation. It records soft and hard verification with their refinements and concludes with the contrastive checks.

F.1 Debatepedia #197: Video-Game Play and Cognitive Benefits

Input.

Premise: Moderate video-game play may have positive effects on developing minds.

Claim: Video games can have cognitive benefits for young people.

Strengthened context. Stage I harvests the following context inventory from the premise–claim pair. Items later selected as guards are marked with their guard id.

Assumptions A

A1 (bridging, implicit): Developing minds are the minds of young people.

A2 (semantic disambiguation, received standard; $\rightarrow$ G1): Positive effects on developing minds are cognitive benefits for those minds. *Rationale: links the general phrase “positive effects” in the premise to the specifically cognitive benefits asserted in the claim.*

A3 (pair-specific shortcut, later discarded by selection): If moderate video game play may have cognitive benefits for young people then it is correct to say that video games can have cognitive benefits for young people.

Definitions Δ

D1 (moderate video-game play): Moderate video-game play is a level of engagement with video games in terms of frequency and duration that is neither minimal nor excessive and does not typically interfere with healthy functioning.

D2 (developing minds): Developing minds are the cognitive systems of children and adolescents whose brain structure and mental functions are still undergoing maturation.

D3 (young people; $\rightarrow$ G2): Young people are children and adolescents who have not yet reached full adulthood.

D4 (cognitive benefits): Cognitive benefits are advantageous changes such as improvements in mental processes including attention, memory, reasoning, or problem solving.

D5 (video-game play): Video-game play is the activity of interacting with electronic games that display visual output on a screen and respond to user input.

D6 (positive effects): Positive effects are changes in outcomes that are considered beneficial according to accepted psychological or developmental indicators.

Exception items X

R1: Moderate video-game play among young people typically involves active and repeated cognitive engagement. $\chi_{R1,1}$: the play consists mostly of passive watching or repetitive actions that demand little mental effort. $\chi_{R1,2}$: the level of use is wrongly classified as moderate when it is actually minimal or excessive.

R2: Sustained cognitively engaging activities in young people generally have the potential to produce positive cognitive effects. $\chi_{R2,1}$: strong negative influences such as extreme stress, sleep deprivation, or neurological damage prevent cognitively engaging activities from producing positive

Variant	Debatepedia		ARCT	
	VFR $\uparrow$	Leak $\downarrow$	VFR $\uparrow$	Leak $\downarrow$
<i>DeepSeek-V3.2</i>				
GUARD (full)	48.58	6.25	53.50	3.60
w/o soft critique	25.91 -22.7	29.67	29.00 -24.5	30.12
w/o assumptions (A)	34.01 -14.6	16.83	36.50 -17.0	17.98
w/o definitions (Δ)	40.08 -8.5	10.81	45.50 -8.0	9.90
w/o exceptions (X)	45.34 -3.2	7.44	51.50 -2.0	4.63
<i>Qwen3-Max</i>				
GUARD (full)	56.68	5.41	61.00	3.17
w/o soft critique	30.36 -26.3	29.25	33.50 -27.5	28.72
w/o assumptions (A)	39.68 -17.0	16.24	42.00 -19.0	18.45
w/o definitions (Δ)	47.37 -9.3	8.59	52.00 -9.0	8.77
w/o exceptions (X)	54.25 -2.4	5.63	57.50 -3.5	4.96
<i>Mistral Medium 3.5</i>				
GUARD (full)	62.75	2.52	64.50	2.27
w/o soft critique	37.65 -25.1	21.85	40.50 -24.0	24.30
w/o assumptions (A)	46.56 -16.2	13.53	51.00 -13.5	12.82
w/o definitions (Δ)	56.28 -6.5	6.71	59.00 -5.5	6.35
w/o exceptions (X)	61.13 -1.6	3.82	63.00 -1.5	3.08
<i>GPT-5.1</i>				
GUARD (full)	76.52	2.07	81.00	1.82
w/o soft critique	36.03 -40.5	24.58	41.50 -39.5	21.70
w/o assumptions (A)	53.04 -23.5	10.27	49.50 -31.5	18.18
w/o definitions (Δ)	62.35 -14.2	6.10	71.50 -9.5	7.14
w/o exceptions (X)	73.68 -2.8	2.67	78.50 -2.5	2.48

Table E.1: Complete ablation results for all backbone LLMs. VFR is the VERIFIED-FAITHFUL rate and Leak is the REJECT-LEAKY rate, both in percent. Grey values give the absolute VFR drop relative to the full GUARD pipeline. The GPT-5.1 rows reproduce the ablation reported in the main paper.

cognitive effects.

R3 ($\rightarrow$ G3, combined with $\chi_{R3,1}$): When an activity for young people has a real possibility of producing positive cognitive effects, it is usually acceptable to say that the activity can have cognitive benefits for young people. $\chi_{R3,1}$: the positive cognitive effects are so rare, small, or fragile that ordinary speakers would not describe the activity as one that can have cognitive benefits.

Selected guards. The one-time selector chooses a minimal initial guard set of three items from the full inventory:

G1 (from A2)

Positive effects on developing minds are cognitive benefits for those minds. *Load-bearing because it converts the premise’s positive effects on developing minds into the claim-side description of those same effects as cognitive benefits.*

G2 (from D3)

Young people are children and adolescents who have not yet reached full adulthood. *Load-bearing because it aligns the premise’s target group (bearers of developing minds) with the claim’s young people.*

G3 (from R3 + $\chi_{R3,1}$)

The defeasible rule R3 combined with its exception condition $\chi_{R3,1}$. *Load-bearing because it licenses the move from an*

activity’s potential to produce positive cognitive effects to the statement that the activity can have cognitive benefits, while guarding against effects that are too rare, small, or fragile.

During the soft verification–refinement loop (below), a strict-support failure triggers one guard refinement that adds four assumptions to the workset, yielding guards G4–G7:

G4 (added, A3’)

Developing minds are the minds of young people. *Connects the mind affected in the premise to the young person it belongs to.*

G5 (added, A4)

Moderate video-game play with positive effects on developing minds is an activity for young people that has a real possibility of producing those effects. *Lifts the premise facts into the antecedent of the default rule G3.*

G6 (added, A5)

The positive cognitive effects of moderate video-game play are not rare, small, or fragile. *Rules out the exception condition $\chi_{R3,1}$ of G3, so the default applies.*

G7 (added, A6)

If playing video games has a cognitive benefit for young people, then video games have that cognitive benefit for young

people. Carries the conclusion from the playing activity to video games, as the claim states.

Hard verification later adds one further guard from prover feedback:

G8 (added by hard repair)

A cognitive benefit for a young person's mind is a cognitive benefit for that young person. *The failed proof step needed to transfer the benefit from the developing mind to its owner; no earlier guard licensed that transfer.*

Formalisation and theory. The autoformalised premise T^* and claim C^* are:

Listing F.1: Logical forms of the premise and claim.

```
T* (P1): ∃x y z e. VideoGamePlay(x) ∧
  ↳ Moderate(x) ∧ Effect(z) ∧
    Positive(z) ∧ Mind(y) ∧
  ↳ Developing(y) ∧ Have(e) ∧
    Agent(e, x) ∧ Patient(e, z) ∧
  ↳ On(z, y)

C* (C1): ∃x y z e. VideoGame(x) ∧
  ↳ Benefit(z) ∧ Cognitive(z) ∧
    YoungPerson(y) ∧ Have(e) ∧
  ↳ Agent(e, x) ∧ Patient(e, z) ∧
    For(z, y)
```

The final hard-pass Isabelle/HOL theory, including all guard axioms G1–G8 and the machine-found proof, is:

Listing F.2: Final hard-pass theory for Debatepedia #197.

```
1 theory debatepedia_197_hard_1
2 imports Main
3
4 begin
5
6 typedecl entity
7 typedecl event
8
9 consts
10 Effect :: "entity ⇒ bool"
11 Positive :: "entity ⇒ bool"
12 Mind :: "entity ⇒ bool"
13 Developing :: "entity ⇒ bool"
14 On :: "entity ⇒ entity ⇒ bool"
15 Benefit :: "entity ⇒ bool"
16 Cognitive :: "entity ⇒ bool"
17 For :: "entity ⇒ entity ⇒ bool"
18 YoungPerson :: "entity ⇒ bool"
19 Child :: "entity ⇒ bool"
20 Adolescent :: "entity ⇒ bool"
21 Adulthood :: "entity ⇒ bool"
22 Full :: "entity ⇒ bool"
23 Reach :: "event ⇒ bool"
24 Agent :: "event ⇒ entity ⇒ bool"
25 Patient :: "event ⇒ entity ⇒ bool"
26 Activity :: "entity ⇒ bool"
27 PotentialToProduce :: "entity ⇒
  ↳ entity ⇒ bool"
```

```
28 Rare :: "entity ⇒ bool"
29 Small :: "entity ⇒ bool"
30 Fragile :: "entity ⇒ bool"
31 Have :: "event ⇒ bool"
32 Of :: "entity ⇒ entity ⇒ bool"
33 VideoGamePlay :: "entity ⇒ bool"
34 Moderate :: "entity ⇒ bool"
35 VideoGame :: "entity ⇒ bool"
36
37 (* Guard G1: Positive effects on
  ↳ developing minds are cognitive
  ↳ benefits
  for those minds. *)
38 axiomatization where
39 guard_G1: "∀z y. (Effect z ∧ Positive
  ↳ z ∧ Mind y ∧ Developing y ∧
40   On z y) → (Benefit z ∧ Cognitive
  ↳ z ∧ For z y)"
41
42
43 (* Guard G2: Young people are children
  ↳ and adolescents who have not yet
  ↳ reached full adulthood. *)
44 axiomatization where
45 guard_G2: "∀u. YoungPerson u ↔
  ↳ ((Child u ∨ Adolescent u) ∧
46   ¬(∃v e. Adulthood v ∧ Full v ∧
47     Reach e ∧ Agent e u ∧ Patient e
  ↳ v))"
48
49 (* Guard G3: Defeasible rule: When an
  ↳ activity for young people has a real
  ↳ possibility of producing positive
  ↳ cognitive effects, it is usually
  ↳ acceptable to say that the activity
  ↳ can have cognitive benefits for
  ↳ young people. *)
50 axiomatization where
51 guard_G3: "∀x. (Activity x ∧ (∃u.
  ↳ YoungPerson u ∧ For x u) ∧
52   (∃z. Effect z ∧ Positive z ∧
  ↳ Cognitive z ∧ PotentialToProduce x
  ↳ z) ∧
53   (¬(∃z. Effect z ∧ Positive z ∧
  ↳ Cognitive z ∧
54     (Rare z ∨ Small z ∨ Fragile
  ↳ z)))) →
55   (∃z1 e1 u1. Benefit z1 ∧ Cognitive
  ↳ z1 ∧ Have e1 ∧ Agent e1 x ∧
56     Patient e1 z1 ∧ YoungPerson u1 ∧
  ↳ For z1 u1)"
57
58 (* Guard G4: Developing minds are the
  ↳ minds of young people. *)
59 axiomatization where
60 guard_G4: "∀y. (Mind y ∧ Developing
  ↳ y) → (∃u. YoungPerson u ∧ Of y u)"
61
62 (* Guard G5: Moderate video-game play
  ↳ with positive effects on developing
  ↳ minds is an activity for young
  ↳ people that has a real possibility
  ↳ of
  ↳ producing those effects. *)
63 axiomatization where
64 guard_G5: "∀x y z e u. (VideoGamePlay
```

Iteration	Diagnostic	Repair
Soft 0	PO2 support adequacy passes on the selected guards G1–G3; PO3 strict support fails: the premise yields a positive effect on a developing mind and G1 recasts it as a cognitive benefit for that mind, but nothing connects the developing mind to a young person, nothing lifts moderate video-game play into the activity-for-young-people antecedent of the default G3, nothing rules out G3’s rare/small/fragile exception, and nothing carries the conclusion from playing to video games.	Guard refinement adds four assumptions in natural language (guards G4–G7): the young-person bridge, the activity lifting, the exception closure, and the play-to-game transfer. All Stage-II logical forms of the workset are cleared and the selected package (premise, claim, and guards) is re-autoformalised.
Soft 1	All four proof obligations pass (PO1 representation sanity, PO2 support adequacy, PO3 strict support, PO4 dependence); the loop stops with SoftPass after one refinement.	—
Hard 0	hard_fail (proof-sketch mode, 179.3 s): sledgehammer finds no proof at the sketch step that strengthens the playing-benefit fact with the young person, i.e. the transfer of the cognitive benefit from the developing mind to the young person whose mind it is; no guard licensed that transfer.	Hard refinement keeps guards G1–G7 unchanged and adds guard G8: “A cognitive benefit for a young person’s mind is a cognitive benefit for that young person,” $\forall z y u. (Benefit\ z \wedge Cognitive\ z \wedge For\ z\ y \wedge Mind\ y \wedge Of\ y\ u \wedge YoungPerson\ u) \longrightarrow For\ z\ u.$
Hard 1	hard_pass (direct sledgehammer, 44.4 s): cvc4, vampire, and zipperposition all find proofs; the reconstructed tactic is using assms guard_G1 guard_G4 guard_G7 guard_G8 by blast.	—

Table F.1: End-to-end refinement trace for Debatepedia #197.

```

70   $\hookrightarrow x \wedge Moderate\ x \wedge Effect\ z \wedge$ 
       $Positive\ z \wedge Mind\ y \wedge Developing\ y$ 
71   $\hookrightarrow \wedge On\ z\ y \wedge Have\ e \wedge Agent\ e\ x \wedge$ 
       $Patient\ e\ z \wedge YoungPerson\ u \wedge Of\ y$ 
72   $\hookrightarrow u) \longrightarrow$ 
       $(Activity\ x \wedge For\ x\ u \wedge$ 
       $\hookrightarrow PotentialToProduce\ x\ z) "$ 

74  (* Guard G6: The positive cognitive
       $\hookrightarrow$  effects of moderate video-game play
75  are not rare, small, or fragile. *)
76  axiomatization where
77  guard_G6: " $\forall z. (Effect\ z \wedge Positive\ z$ 
       $\hookrightarrow \wedge Cognitive\ z) \longrightarrow$ 
78   $(\neg Rare\ z \wedge \neg Small\ z \wedge \neg Fragile\ z) "$ 

80  (* Guard G7: If playing video games has
       $\hookrightarrow$  a cognitive benefit for young
81  people, then video games have that
       $\hookrightarrow$  cognitive benefit for young
82  people. *)
83  axiomatization where
84  guard_G7: " $\forall x\ z\ u\ e. (VideoGamePlay\ x$ 
       $\hookrightarrow \wedge Benefit\ z \wedge Cognitive\ z \wedge$ 
85   $Have\ e \wedge Agent\ e\ x \wedge Patient\ e\ z \wedge$ 
       $\hookrightarrow YoungPerson\ u \wedge For\ z\ u) \longrightarrow$ 
86   $(\exists x1\ e1. VideoGame\ x1 \wedge Have\ e1 \wedge$ 
       $\hookrightarrow Agent\ e1\ x1 \wedge Patient\ e1\ z \wedge$ 
87   $For\ z\ u) "$ 

89  (* Guard G8: A cognitive benefit for a
       $\hookrightarrow$  young person’s mind is a cognitive
90  benefit for that young person. *)
91  axiomatization where
92  guard_G8: " $\forall z\ y\ u. (Benefit\ z \wedge$ 
       $\hookrightarrow Cognitive\ z \wedge For\ z\ y \wedge Mind\ y \wedge$ 
93   $Of\ y\ u \wedge YoungPerson\ u) \longrightarrow For\ z\ u "$ 

```

```

95  theorem hypothesis:
96  (* Premise: Moderate video-game play
       $\hookrightarrow$  may have positive effects on
97  developing minds. *)
98  assumes asm: "VideoGamePlay x  $\wedge$ 
       $\hookrightarrow Moderate\ x \wedge Effect\ z \wedge Positive\ z$ 
       $\hookrightarrow \wedge$ 
99   $Mind\ y \wedge Developing\ y \wedge Have\ e \wedge$ 
       $\hookrightarrow Agent\ e\ x \wedge Patient\ e\ z \wedge On\ z\ y "$ 
100  (* Hypothesis: Video games can have
       $\hookrightarrow$  cognitive benefits for young
101  people. *)
102  shows " $\exists x\ y\ z\ e. VideoGame\ x \wedge$ 
       $\hookrightarrow Benefit\ z \wedge Cognitive\ z \wedge$ 
103   $YoungPerson\ y \wedge Have\ e \wedge Agent\ e\ x$ 
       $\hookrightarrow \wedge Patient\ e\ z \wedge For\ z\ y "$ 
104  using assms guard_G1 guard_G4
       $\hookrightarrow$  guard_G7 guard_G8 by blast

106 end

```

Refinement trace. Table F.1 reports the complete verification and refinement trace.

Contrastive checks. All three Stage IV probes are run against the hard-pass theory with the same guard axioms G1–G8 and direct sledgehammer.

Premise check (empty premise)

The assumes asm line is removed from the theorem and only the shows goal is kept, so the claim is attempted from the guard axioms alone. Sledgehammer finds no proof (*not provable*, 15.3 s): the guard set does not entail the claim without the premise, so the premise is genuinely load-bearing.

Premise contrast check (same-topic counter-premise)

The generated counter-premise “Excessive video-game play is linked to attention problems and poorer academic performance in developing minds” replaces the original premise while the claim is kept fixed. Its formalisation is

```
∃x y w v. VideoGamePlay(x) ∧ Excessive(x)
  ⇔ ∧ AttentionProblem(w) ∧
    Performance(v) ∧ Academic(v) ∧ Poor(v) ∧
  ⇔ Mind(y) ∧ Developing(y) ∧
    LinkedTo(x, w) ∧ LinkedTo(x, v) ∧ In(w,
  ⇔ y) ∧ In(v, y)
```

Sledgehammer finds no proof (*not provable*, 45.3 s): the guard set does not license the claim from a harm-focused premise on the same topic.

Hypothesis contrast check (alternative claim)

The generated neighbor claim “Excessive video-game play can have cognitive benefits for young people” replaces the original claim while the premise is kept fixed. Its formalisation is

```
∃x y z e. VideoGamePlay(x) ∧ Excessive(x)
  ⇔ ∧ Benefit(z) ∧ Cognitive(z) ∧
    YoungPerson(y) ∧ Have(e) ∧ Agent(e, x) ∧
  ⇔ Patient(e, z) ∧ For(z, y)
```

Sledgehammer finds no proof (*not provable*, 44.9 s): the premise about *moderate* play does not warrant a conclusion about *excessive* play under the same guards.

Since the original theorem is provable and all three contrastive probes are not provable, the instance is verified
VERIFIED-FAITHFUL.