

InterView-C: A Synchronized Multimodal Corpus of VR Avatar-Mediated Survey Interviews

Patrick Schrottenbacher¹

`schrottenbacher@em.uni-frankfurt.de`

Leon Hammerla¹

`hammerla@em.uni-frankfurt.de`

Lydia Kleine²

`lydia.kleine@lifbi.de`

Doris Stingl²

`doris.stingl@lifbi.de`

Alexander Mehler¹

`mehler@em.uni-frankfurt.de`

¹ Goethe University, Frankfurt am Main, Germany

² Leibniz Institute for Educational Trajectories (LifBi), Bamberg, Germany

Abstract

We present InterView-C, a German multimodal corpus of 27 survey interviews conducted entirely in virtual reality, with both interlocutors represented by avatars. The corpus aligns spoken interaction with synchronized behavioral data, including gaze, head and body movement, facial behavior, hand and finger tracking. Its reference transcripts and linguistic annotations provide a reliable interface between this multimodal spoken interaction and predominantly text-based NLP methods. This interface is important because automatically transcribing speech can distort linguistically relevant information, while downstream models trained on existing resources may additionally face transfer challenges when applied to transcribed spoken data. InterView-C therefore provides word-timed and manually post-edited verbatim transcripts for all 54 recordings, interview-item timings, questionnaire responses and negation cue and scope annotations for 1,422 sentences, 1,398 of them doubly annotated ($\alpha = 0.87$ for cues; $\alpha = 0.81$ for scopes). We demonstrate both challenges empirically: nine open-weight ASR systems disproportionately misrecognize short closed answers and number words, while negation models trained on existing corpora show lower and highly variable performance on our transcribed interviews than a model trained on the InterView-C annotations. InterView-C thus enables linguistic analyses of spoken interaction while retaining their alignment with rich multimodal behavior.

1 Introduction

Face-to-face interaction between two or more interlocutors is a complex system that extends well beyond the vocal channel. Facial expressions, gaze and hand and arm gestures are among the many signals that accompany speech in face-to-face conversation (Vigliocco et al., 2014; Holler and Levinson, 2019). These signals can be analyzed separately, but each offers insight into only a thin slice

of the interaction. A holistic understanding of a conversation therefore requires capturing these interlinked modalities simultaneously. This requires (a) recording the signals in a machine-readable, synchronized format and (b) methods to process and analyze these data. As declining response rates and rising fieldwork costs pose challenges to survey research (Williams and Brick, 2018; Luiten et al., 2020), new interview modes are being developed, ranging from computer-assisted web and live video interviews (CAWI, CALVI) to AI-assisted interviewing systems. Besides reducing costs, these modes facilitate the recording of additional modalities, such as participants’ audio and video (subject to consent and GDPR compliance), providing further insights into their behavior. Access to these additional modalities allows further insights into participants’ behaviors to be inferred, which is particularly valuable in the field of survey research.

These among others motivated the development of InterView (Schrottenbacher et al., 2026), a VR interview system built on Va.Si.Li-Lab (Mehler et al., 2023) that has a particular focus on capturing and contextualizing these multimodal signals.

With InterView, we conducted 27 survey interviews in which interviewer and interviewee meet as avatars in a shared virtual room, while the headsets of both record their gaze, facial expressions and head, body, hand and finger movements alongside their speech. Recording these signals addresses requirement (a), but not (b): only a few current models process nonverbal channels, and even models described as multimodal typically accept text, images and audio (Yin et al., 2024; Microsoft et al., 2025), but not gaze, facial expressions or body motion. Spoken interaction is therefore still analyzed by passing ASR output to text-based NLP methods, which can fail at two points: ASR can distort linguistically relevant information (Maheshwari et al., 2025; Koenecke et al., 2024) and models trained on existing text resources may not transfer reliably

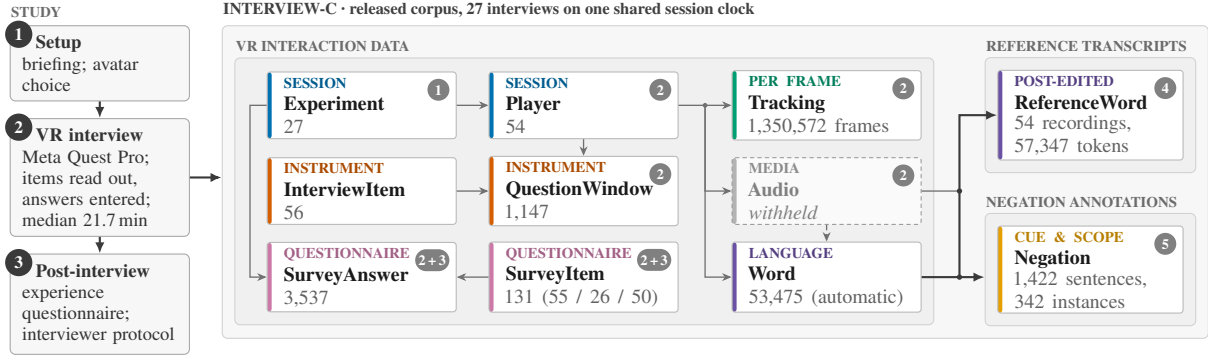


Figure 1: Study flow (left: the three stages of each session) and the InterView-C corpus (right), whose three released parts share one session clock. *VR interaction data*: records per table (fingers tracked in 515,995 / 544,280 frames; SurveyItem: 55 interview, 26 protocol and 50 experience items); thin arrows are record links, the dashed arrow marks automatic transcription and thick arrows mark derivation. The *reference transcripts* are post-edited from the automatic transcript against the withheld audio and the *negation annotations* are sampled from it. Badges give the creating stage; 4 (post-editing) and 5 (annotation) continue the study stages.

to transcribed speech, as observed for negation detection (Hammerla et al., 2025b). Human-verified transcripts and linguistic annotations that share the time base of the tracking data provide a reliable interface between the two and keep text-based analyses aligned with the nonverbal behavior. Our contribution is the InterView-C corpus, which consists of three parts (Figure 1):

1. **VR interaction data** (Section 4): for all 27 interviews, synchronized tracking of both speakers (eyes, head, body, face, hands and fingers), word-timed automatic transcripts, time windows of the questionnaire items and the questionnaire responses.
2. **Reference transcripts** (Section 5.1): a manually post-edited verbatim transcript of all 54 recordings (57,347 tokens), which we use to evaluate nine open-weight ASR systems and to analyze their errors on survey interview speech.
3. **Negation annotations** (Section 5.2): negation cue and scope labels for 1,422 transcribed sentences, with a comparison between training on InterView-C and cross-corpus transfer from existing negation resources.

2 Related Work

Interview Mode and Virtual Interviewers. Technology-mediated interviews range from live video between human interlocutors to virtual and LLM-based interviewers, with prior work examining disclosure, data quality and respondent experience across these settings (Endres et al., 2023;

Conrad et al., 2023; Lind et al., 2013; Lucas et al., 2014; Barari et al., 2026; Lang and Eskenazi, 2025; Leybzun et al., 2025; Krajcovic et al., 2026). These studies show that both interview modality and the perceived nature of the interviewer can affect disclosure and response behavior. More recent systems increasingly support conversational and adaptive interviewing, including LLM-based chatbots, voice agents and embodied virtual interviewers. Interviews between avatars have also been studied in desktop virtual worlds and qualitative VR settings (Hasler et al., 2013; Young et al., 2024), but, to our knowledge, no survey corpus combines two human interlocutors represented as avatars with headset tracking of both parties.

Multimodal Interaction Corpora. Multimodal corpora of face-to-face interaction range from meetings (McCowan et al., 2005) and acted and improvised emotional dialogue (Busso et al., 2008) to German route descriptions annotated for speech-gesture alignment (Lücking et al., 2013). Motion-capture corpora record body and finger motion together with each speaker’s audio in dyadic conversations (Lee et al., 2019) and recent corpora have expanded to include hundreds or thousands of hours (Agrawal et al., 2025; McLean et al., 2025). These corpora are recorded in physical rooms using cameras or marker-based capture. Data recorded with VR headsets, which capture gaze and facial expressions in the context of avatar animation, are still rare (Rack et al., 2023). For instance, Kim and Lee (2025) use the data to predict social connection based on turn-taking, gaze and nodding in dyadic VR conversations. Furthermore, none of

these corpora contain structured survey interviews or pair the interaction with the interviewee’s survey answers. Releasing such data requires care, since head and hand motion alone suffices to re-identify VR users (Nair et al., 2023).

Speech Recognition for Conversational and Survey Speech. ASR systems that perform well on read-speech benchmarks have been shown to degrade substantially on conversational speech, with errors correlating with disfluencies (Maheshwari et al., 2025), with Whisper-based systems hallucinating content, particularly over non-speech audio (Koencke et al., 2024). Although ASR is already used to transcribe and monitor survey interviews (Sun and Yan, 2023; Wollin-Giering et al., 2024), its accuracy has been assessed on long, open-ended speech, not on the short closed answers of interviewer–interviewee dialogue on which standardized survey data rest.

Negation in Spoken and Multimodal Interaction. Negation has received comparatively limited attention in computational linguistics and remains underrepresented in widely used NLU resources (Jiménez-Zafra et al., 2020; Hossain et al., 2022). Existing work has primarily focused on cue and scope detection in written text, with dedicated datasets concentrated on English and comparatively few resources available for other languages, including German (Jiménez-Zafra et al., 2020; Hartmann et al., 2021). This gap is particularly pronounced for spoken and conversational language, for which annotated negation corpora are scarce. More recent work has considered negation in spoken and multimodal interaction, including VR settings (AbuSaleh et al., 2026; Hammerla et al., 2026). Moreover, previous cross-corpus evaluations have found substantial variation in negation-detection performance across datasets (Hammerla et al., 2025b), further motivating the development of annotated resources for German spoken and interactional language.

3 Experiment Setup

Procedure. Each interviewee was first briefed by an instructor. The participant then chose one of four avatars (A-D) to represent them in VR (Appendix 3). One of the remaining three avatars was then assigned to the interviewer. The interviewee then put on the Meta Quest Pro VR headset, after which the instructor left the room and the interview

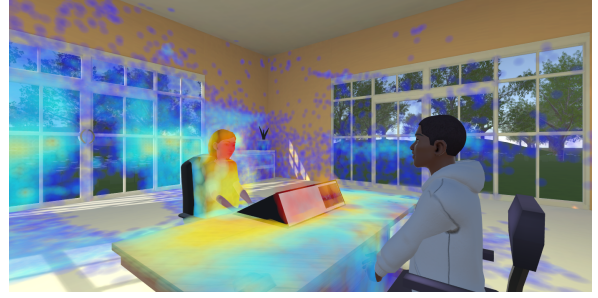


Figure 2: The virtual interview environment with the interviewee’s 3D gaze points, colored by dwell time from blue (shorter) to red (longer).

began. The interviewer and interviewee were in different locations and only met in VR. The interviewees had not seen their interviewer in person beforehand. The three interviewers were members of the project team and had no prior experience conducting interviews.

Virtual room. The interview was conducted in a virtual room that contained three large windows as well as some cupboards, plants and a couch (Figure 2). At the center of the room stood a large office desk, with the interviewee seated at one end and the interviewer at the other. A browser panel on the desk, facing the interviewer, displayed the LimeSurvey questionnaire, which the interviewer operated during the interview. The side facing the interviewee showed a mirror in which they could see their own avatar, imitating the self-view of a video interview and strengthening the sense of embodiment (González-Franco et al., 2010). For items with response scales, the answer options were also displayed to the interviewee on the same panel.

Recording. During the interview, all data the Meta Quest Pro can capture were recorded, for both the interviewer and interviewee. This includes gaze, face, body, hand and finger tracking alongside the audio. The main questionnaire is listed in Appendix D; all 131 items are part of the release.

Questionnaire. The interview was conducted in German. The interviewer read out a standardized questionnaire of 52 items: 37 asked in every interview, 11 only when a previous answer made them applicable and four income follow-ups that were never triggered. Most of the items were taken from the German National Education Panel Study (NEPS) (Blossfeld and von Maurice, 2019), listed in Appendix D. The questionnaire covers life satisfaction, partnership and family, education and em-

ployment, earned income, locus of control and social belonging and trust. Since we wanted to learn how the avatar setting affects answers that may cause discomfort in conventional interviews, the questionnaire deliberately includes items known to be sensitive, such as income and relationship conflicts (Tourangeau and Yan, 2007; Yan, 2021) and scales on socially aversive traits such as narcissism and Machiavellianism (Paulhus and Williams, 2002). The interview was designed to take about 20 minutes in total to complete. After the interview, the interviewee completed an experience questionnaire on the VR setting, the avatars and honesty (35 items for every respondent plus up to 7 open follow-ups) and the interviewer completed a protocol of the interview (11 items plus up to 14 follow-ups on technical problems and the respondent’s discomfort).

4 Corpus

InterView-C contains 27 German-language survey interviews, each conducted entirely in VR, with both the human interviewer and human interviewee represented by avatars. For every interview, the corpus comprises three parts (Figure 1, Appendix Table 10): (1) the *VR interaction data*, i.e., synchronized tracking streams of both interlocutors (gaze, head, body, face, hands and fingers), word-timed automatic transcripts of both speakers, time windows for each questionnaire item and the questionnaire data; (2) the *reference transcripts*, a manual verbatim post-edit of the automatic transcripts (Section 5.1); and (3) the *negation annotations*, cue and scope labels on a sample of the transcribed sentences (Section 5.2). All layers are timestamped, enabling, for example, the interviewee’s gaze and facial expressions during a spoken response to be retrieved in a single query. This section gives the overall composition and statistics and describes the VR interaction data; the two human-annotated parts are described in Section 5. The raw audio is not part of the corpus (Section 4.4).

4.1 Composition and Scope

Each interview is composed of two speakers: one of the 27 interviewees and one of the three interviewers, who conducted 19, 6 and 2 interviews, respectively. According to the interviewer protocol, 19 interviewees were male and 8 female. The participants received no compensation and were all highly educated with ages ranging from 18 to

60. The interviewees chose avatars A, B and C 13, 11 and 3 times, respectively, while avatar D was never chosen. The avatar representing the interviewer was chosen from among the remaining three avatars, once the interviewee had selected their own avatar. This process was not randomized, resulting in six interviews with avatar A, five interviews with avatar B, eight interviews with avatar C and eight interviews with avatar D.

4.2 Corpus Statistics

Interviews last a median of 21.7 minutes. The questionnaire itself takes a median of 13.1 minutes when measured from the first to the last administered item. The remaining time is spent on setup, introduction, instructions and closing statements. Since interviewers read every item and its answer options, they produce most of the speech. In the automatic transcript, they produce a median of 1,315 words per interview (range 1,182–2,083), against 420 (115–1,564) for the interviewees. The high variance on the interviewee side reflects the mix of closed items, which typically receive one- to three-word answers and open-ended items, which elicit substantially longer responses depending on the participant. Of the 3,537 questionnaire answers, 2,440 correspond to items that were actually asked, of which 2,346 received a substantive answer, 64 no answer and 30 with the label “don’t know”; the remaining 1,097 are items that were not asked (filter skips, break-offs or missing questionnaires). Table 1 gives an overview.

4.3 Synchronization and Tracking Data

All streams of both headsets are placed on one session clock: each headset’s clock is mapped onto a shared clock with a per-session offset and sub-second timing follows the audio sample clock (Appendix A). Tracking is logged at a median of 18.4Hz, which suffices for gaze, head, hand and facial behavior at the level of words and turns but not for saccades or brief facial events. The hands were tracked in 38.2%(left) and 40.3%(right) of the frames; untracked frames are flagged.

4.4 De-identification and Release

All tracking streams, both transcript layers, the item windows, the questionnaire data and both task resources are available on request at [huggingface](https://hf.co/datasets/AnonymousKiwi/InterView-C)¹

¹<https://hf.co/datasets/AnonymousKiwi/InterView-C>

	Interviewee	Interviewer	Total
Speakers	27	3	30
Tracked time (h)	9.9	10.5	20.4
Tracking frames	654,682	695,890	1,350,572
Word tokens, automatic (Word)	14,772	38,703	53,475
Word tokens, post-edited reference (ReferenceWord) [‡]	15,573	40,191	55,764
Words per interview, automatic, median (range)	420 (115–1,564)	1,315 (1,182–2,083)	–
Item windows (located in transcript)	–	–	1,147
Questionnaire answers (substantive / total) [†]	–	–	2,346 / 3,537

*Scoring tokenization of Section 5.1, including 1,432 filled pauses. [†]131 items per interview: 55 interview items and 50 experience items answered by the interviewee and 26 protocol items answered by the interviewer. [‡]Released tokens as written by the annotators, without [unknown] markers; 55,596 (99.7%) are forced-aligned.

Table 1: General statistics about the data InterView-C contains.

under a data use agreement that restricts use to non-commercial research and prohibits re-identification; the raw audio is withheld. The code is released under AGPLv3 on GitHub². Transcripts are verbatim with word-level timestamps; names of persons, places and institutions are replaced by typed placeholders. Head and hand motion alone can re-identify VR users (Nair et al., 2023; Miller et al., 2020) and the release adds gaze, facial blendshapes and answers on gender, partnership, education, occupation and income. Re-identification from motion, however, requires reference recordings of the same person and the corpus contains no names, voices or images; with restricted access, this lowers but does not eliminate the risk. Participants gave informed consent to the recording and to the release of the de-identified data for research purposes.

5 Human Annotation and Evaluation

The two human-annotated parts of InterView-C target the speech and text channel, through which most current models access spoken interaction. For each part, we describe its creation and evaluate current models on it: the reference transcripts serve as an ASR benchmark (Section 5.1) and the negation annotations as training and test data for negation cue and scope detection (Section 5.2).

5.1 Reference Transcripts and ASR Evaluation

Survey interviews are a demanding setting for ASR: Interviewers largely read out scripted items and answer options, resembling the read speech that dominates ASR training data, but embedded in a dialogue: each headset recording contains long silences while the other person speaks, interspersed

with short backchannels (*mhm*, *ja*) and filled pauses. Interviewees, in contrast, speak spontaneously, often answering with a single word, and their answers contain disfluencies such as filled pauses, repetitions and self-repairs, possibly reflecting uncertainty in the unfamiliar setting. We therefore manually corrected the transcripts of all 54 recordings (one per speaker and interviewer) and use them to benchmark current open-weight ASR models.

Reference transcripts. We first transcribed silence-delimited segments with CrisperWhisper (Zusag et al., 2024), a Whisper model fine-tuned for verbatim transcription, using beam search. It was chosen for its strong German results and word-level timestamps. Five annotators post-edited them in a web interface with audio playback, one annotator per recording. The transcripts are verbatim: filled pauses (*äh*, *ähm*, *mhm*), repetitions and false starts are kept and unintelligible words are marked as [unknown]. Numbers up to thirteen and colloquial elisions are written out. The final reference contains 57,347 tokens, including 1,432 filled pauses (2.5%) and 380 immediate word repetitions. About four in five filled pauses were added by annotators, and post-editing changed around 9.1% of the words of the automatic transcripts. Forced alignment with a German wav2vec 2.0 model (Baevski et al., 2020; Wang et al., 2021) assigns timestamps to 99.7% of the reference words. Mapped onto the session clock, these words form the ReferenceWord layer of the corpus.

Experimental setup. We evaluate nine systems zero-shot under three decoding regimes (Table 2). Three systems decode the full recordings with their own long-form strategy: Whisper large-v3 and large-v3-turbo (Radford et al., 2023) and CrisperWhisper 2 (Wagner et al., 2026) in verbatim mode. WhisperX (Bain et al., 2023) uses

²<https://github.com/TheBv/faces-dataset-pre-study>

its built-in Voice Activity Detection (VAD) and runs Whisper large-v3 on the resulting segments. The other five receive voice-activity segments of at most 30 s from Silero VAD (Silero Team, 2024): Qwen3-ASR-1.7B (Shi et al., 2026), Voxtral Mini 3B (Liu et al., 2025), Parakeet-TDT-0.6B-v3 and Canary-1B-v2 (Sekoyan et al., 2025) and Phi-4-multimodal (Microsoft et al., 2025). To vary the decoding strategy, we also ran CrisperWhisper 2 on the VAD segments in verbatim and intended (clean) modes. We further ran Whisper large-v3-turbo on the full recordings without conditioning on previously decoded text. Where a model exposes a language option, it is set to German. Before scoring, we normalize both texts: we lower-case them, remove punctuation, spell out numbers, expand abbreviations and elisions, map filled-pause tags to filled pauses, drop other non-speech tags (*[laughter]*) and treat open, hyphenated and closed compounds alike (*Zoom Call*, *Zoom-Call*, *Zoom-call*). Our main measure, word error rate (WER), also removes filled pauses and cut-off word fragments (*hau-*) from both sides, since only verbatim systems produce them. The verbatim WER keeps the filled pauses. We report WER pooled over all recordings, with 95% confidence intervals from a bootstrap over interviews (1,000 resamples). Because WER treats all words alike and agrees poorly with human judgments of transcript quality, we also report character error rate (CER) and semantic distance (SemDist; Kim et al., 2021), which agrees best with human judgments in comparative studies (Kim et al., 2022). SemDist is one minus the cosine similarity between multilingual E5 embeddings (Wang et al., 2024) of each reference line and the hypothesis words aligned to it, averaged over lines.

Results and analysis. Excluding the automatic transcript the reference was derived from, WhisperX achieves the lowest WER (8.0%), followed by Qwen3-ASR (10.4%). Qwen3-ASR is in turn better than Canary (1.1 points, CI 0.8–1.4) and slightly better than Voxtral (0.4, CI 0.0–0.8), whereas Voxtral, Parakeet, Phi-4 and Canary cannot be separated: all differences between adjacent systems in this group have CIs that include zero. CER and SemDist largely reproduce this ranking but rate WhisperX better than the automatic transcript, which WER favors because the annotators kept its word forms. For the VAD-based systems, WER on the spontaneous and often very short interview

answers is 1.8 to 2.1 times that on the largely scripted interviewer speech. The decoding strategy matters more than the model. Whisper’s default long-form decoding conditions each window on previously decoded text, which carries repetition loops across the silences (Koenecke et al., 2024): Whisper large-v3 reaches 44.5% WER on the full recordings (24.5 inserted passages per hour), compared with 8.0% for the same model on VAD segments, and large-v3-turbo 30.1%. Without conditioning, large-v3-turbo reaches 12.8%, and CrisperWhisper 2 improves from 22.2% to 12.8% on VAD segments. In verbatim mode, CrisperWhisper 2 is the only system that transcribes most filled pauses (64–78% recall vs. at most 30%); its intended mode misses more short answers (13.8% WER). Errors concentrate where survey research is most sensitive. Short answers are lost: every system misses 13–23% of single-word reference lines (CrisperWhisper 2 on VAD segments up to 30%), mostly scale points or *ja/nein*, against at most 1% of lines with ten or more words for the VAD-based systems, and number-word recall ranges from 62% to 87%. On short segments, several models also switch language or script, and study-specific vocabulary is often garbled. Since the reference was post-edited from CrisperWhisper output, it favors that transcript: 418 reference tokens (0.73%) are reproduced only by it while most other systems agree on an alternative, so we do not rank it against WhisperX (0.6 points WER apart). The annotators also differ in thoroughness (Appendix B) and as each recording was corrected by a single annotator, inter-transcriber agreement cannot be reported.

5.2 Negation Annotation and Detection

The third part of InterView-C annotates negation, a fine-grained linguistic phenomenon on which survey answers often hinge. Negation resources for conversational language are scarce and negation detection shows substantial cross-corpus variation (Hammerla et al., 2025b), so we annotate negation in the transcribed dialogue, train models on these annotations and compare them with existing models. As a second downstream use case, we investigate whether InterView-C supports the analysis of a fine-grained linguistic phenomenon, using negation as a case study. We train negation models on our annotations and assess how released models trained on existing negation corpora perform in this new annotation and data setting. Given the limited availability of negation resources for conver-

System	WER [95% CI]	CER	SemD	IR	IE	Verb.	Del.	Ins.	Cue	Num	Hall/h
CrisperWhisper [†]	7.4 [6.3–8.6]	5.8	1.72	6.2	10.5	9.1	4.0	1.6	94.2	86.3	2.2
<i>Own VAD, batched decoding</i> WhisperX (large-v3)	8.0 [7.4–8.7]	5.5	1.60	6.6	12.0	10.0	4.0	1.4	93.2	86.8	1.0
<i>Shared Silero VAD segments</i>											
Qwen3-ASR 1.7B	10.4 [9.4–11.6]	6.1	1.90	8.6	15.4	12.4	3.3	2.0	90.8	84.5	1.1
Voxtral Mini 3B	10.8 [9.9–11.8]	6.7	2.16	8.5	17.3	12.6	3.5	2.1	90.4	77.6	1.3
Parakeet-TDT 0.6B v3	11.1 [10.0–12.1]	6.3	2.32	8.6	17.9	12.8	2.9	2.3	90.4	72.7	1.4
Phi-4-multimodal	11.2 [9.9–12.5]	6.3	1.93	9.2	16.5	13.5	2.8	2.5	88.1	80.6	1.4
Canary 1B v2	11.5 [10.4–12.6]	6.9	2.21	8.9	18.6	13.3	3.6	2.2	87.0	82.1	1.6
CrisperWhisper 2 (verbatim)	12.8 [11.3–14.3]	7.4	2.48	10.6	18.8	15.5	3.9	2.5	88.8	75.5	1.2
<i>Full recordings (long-form decoding)</i>											
Whisper large-v3-turbo [‡]	12.8 [11.5–14.2]	8.9	1.99	10.6	18.9	14.7	5.0	3.3	88.6	86.4	3.6
CrisperWhisper 2 (verbatim)	22.2 [17.8–27.5]	14.2	2.52	18.5	32.2	24.4	6.0	9.7	86.0	74.0	3.4
Whisper large-v3	44.5 [40.7–48.9]	37.8	5.55	41.3	53.2	45.3	13.0	16.7	76.1	61.9	24.5

Table 2: ASR results on all 54 recordings (%; SemDist $\times 100$; lower is better except for recall). *WER*: WER without filled pauses; *CER*: character error rate; *SemD*: mean semantic distance per reference line; *IR/IE*: WER on interviewer/interviewee recordings; *Verb.*: WER with filled pauses kept; *Del./Ins.*: deletions/insertions relative to the reference length; *Cue/Num*: recall of negation cues and number words (Section 5.1, Results); *Hall./h*: inserted passages of at least five words per hour of audio. [†]The reference was post-edited from this transcript and is shown for reference only. [‡]Without conditioning on previously decoded text.

sational language and the poor cross-domain generalization observed in previous work (Hammerla et al., 2025b), our corpus provides an opportunity to study negation in transcribed dialogue. Following Morante and Blanco (2012) and Jiménez-Zafra et al. (2020), the task consists of two parts: *cue detection* identifies words that express negation (e.g., *nicht*, *kein*, *nie*), while *scope detection* identifies, for a given cue, the words that fall within its semantic scope.

Sample and annotation. We sampled 1,422 sentences from all 27 interviews (52–53 per interview) without conditioning the sampling procedure on negation cues or labels. The sample is stratified by speaker role and conversational position and contains at most one sentence from each cluster of exact or near-duplicate sentences, reducing the influence of repeated scripted questions. Splits are defined over complete interviews (21/3/3 for train/validation/test), so evaluation measures generalisation to unseen conversations and interviewees (Appendix C.1.1). Three annotators marked negation cues and linked each cue to its scope, with every sentence independently annotated by two annotators (Appendix C.1.2). Cue agreement is high (Krippendorff’s $\alpha = 0.87$), while scope agreement on instances with identical cues is somewhat lower ($\alpha = 0.81$), with disagreements primarily concerning scope extent (Appendix C.1.3).

	Train	Val	Test
Interviews	21	3	3
Sentences	1,106	158	158
Tokens	9,464	1,531	1,750
Sentences w/ negation	225	29	27
Negation instances	267	38	37
Cue tokens	278	40	38
Scope tokens [‡]	969	123	190

[‡]Excluding cue tokens.

Table 3: Consolidated negation annotation per split.

Reference annotation. We consolidate the two annotations automatically: cue annotations are unioned to favor recall, agreed scopes are retained and disputed scope tokens are resolved with a Dawid–Skene model (Dawid and Skene, 1979) estimated on the training split only; stricter cue annotations and union- and intersection-based scope alternatives are released as well (Appendix C.1.4). The reference contains 342 negation instances in 281 sentences (19.8%; Table 3). The cues are dominated by *nicht* (54%), followed by *nie*, response particles (*nein*, *nee*) and forms of *kein*; 58 cue types occur in total.

Experimental Setup. We use the syntax-aware D-Neg model of Hammerla et al. (2025a), based on EuroBERT-210m (Boizard et al., 2025). It augments transformer representations with part-of-speech and dependency-relation embeddings and applies a graph attention layer over dependency trees predicted with spaCy’s `de_core_news_sm`

model (Montani et al., 2023). For scope detection, cue words are replaced by [CUE]. We train D-Neg on our training split for 10 epochs using the original hyperparameters (learning rate $2 \cdot 10^{-5}$, batch size 16, weight decay 0.01), select the best validation-F1 checkpoint, and repeat training with three seeds (42–44). For comparison, we evaluate all released German GAT variants of D-Neg, trained on German versions of ConanDoyle-neg (Morante and Daelemans, 2012), SFU Review (Konstantinova et al., 2012), BioScope (Vincze et al., 2008), SOCC (Kolhatkar et al., 2019), and DT-Neg (Banjade and Rus, 2016), without further fine-tuning. Because the source corpora also differ in annotation conventions and were translated into German, while our model is trained using the same annotation and consolidation procedure as the test reference, this comparison does not isolate spoken–written domain transfer; it reflects these factors jointly. All models are evaluated on the same held-out test split; scope detection uses gold cues. We report word-level precision, recall, and F1 for the positive class, plus exact-match accuracy for complete cue and scope predictions. For our trained model, we report mean and standard deviation across seeds.

Results and analysis. Our in-domain D-Neg model outperforms all released GAT variants on both tasks (Table 4), reaching 0.88 F1 for cue detection and 0.66 for scope detection, compared with 0.82 and 0.61 for the strongest transferred models. Transfer performance varies strongly across source corpora: cue models trained on user-generated text (SFU Review, SOCC) perform well, as does the ConanDoyle-neg model, whose annotation guidelines we follow, whereas BioScope reaches at most 0.58 F1. For scope detection, DT-Neg transfers best. The DT-Neg cue model is an outlier (0.11 F1), frequently misclassifying words such as *ich* and *ja*. Most cue differences lie in the long tail: all models detect nearly all instances of *nicht* and *nie* (68% of test cues), whereas our model recovers about eight of the remaining 12 cues, versus two for the strongest transferred model. The strongest transferred cue models show markedly lower recall than ours (0.71–0.74 vs. 0.89), despite higher precision (0.93 vs. 0.88). Scope predictions are conservative: precision exceeds recall (0.81 vs. 0.56), predicted scopes are shorter than references (3.6 vs. 5.1 tokens), and 32% are strict subsets versus 14% strict supersets (see Appendix C.3 for detailed results and error analyses).

Training data	Cue F1	Scope F1
BioScope (abstracts)	0.58	0.49
BioScope (full)	0.26	0.34
ConanDoyle-neg	0.81	0.53
DT-Neg	0.11	0.61
SFU Review	0.82	0.34
SOCC	0.79	0.38
Ours (3 seeds)	0.88 ±0.02	0.66 ±0.02

Table 4: Word-level F1 (%) on the test split for our and released D-Neg models (mean ± std. over three seeds). More detailed results are reported in Appendix C.3.

6 Conclusion

We presented InterView-C, a corpus of 27 German survey interviews conducted entirely in virtual reality between two human interlocutors represented by avatars. It combines VR interaction data with synchronized tracking of both speakers and human reference transcripts, as well as negation cue and scope annotations. These provide an interface between multimodal interaction and predominantly text-based NLP methods. Our evaluations show that the points at which such a pipeline can fail are important in practice. Once decoding is no longer dependent on text decoded before a silence, errors in ASR concentrate on short closed answers, number words, and negation cues – the tokens on which survey responses depend. Negation models trained on existing corpora show variable transfer to the transcribed interviews and generally underperform in-domain training, although differences in annotation conventions, translation and label construction mean that this gap cannot be attributed to the spoken–interaction domain alone. Future work will use the nonverbal streams to investigate how gaze, head movement and facial expression relate to responses on sensitive items and spoken negation. InterView-C thus enables linguistic analyses of spoken interaction while retaining their alignment with multimodal behavior. By releasing all three parts, we hope to support research at the intersection of survey methodology, multimodal dialogue and spoken language processing.

Limitations

Sample. The corpus is small and unbalanced: 27 interviewees (19 male, 8 female), three interviewers with 19, 6 and 2 interviews, one questionnaire and German only. The interviewers were members of the project team and the interviewer’s avatar was not randomized, so interviewer, avatar and inter-

viewee choice are partly confounded. Additionally, the interviewees were all highly educated and the interviewers had no prior interviewing experience. Findings on interview behavior should therefore be treated as exploratory.

Tracking data. Tracking is logged at a median of 18.4 Hz, which is too coarse for saccade-level eye-movement analysis or brief facial events and the hands were tracked in only about 40% of the frames.

ASR evaluation. Because the audio is withheld, third parties cannot evaluate new systems on our reference. Each recording was post-edited by a single annotator starting from CrisperWhisper output, so the reference favors that system and may retain errors that other systems share. Additionally, two annotators made noticeably fewer corrections than the others.

Negation subcorpus. The test split contains only 37 negation instances, so model differences of a few points are not reliable. The reference is consolidated automatically (cues by union) and it may contain annotation errors that we identify but do not correct.

Privacy. Despite de-identification, motion, gaze and face tracking combined with answers to sensitive questions carry a residual re-identification risk (Section 4.4).

Ethics Statement

All participants gave informed consent for the recording and release of de-identified data for research purposes. The release withholds the raw audio, replaces directly identifying information in the transcripts with typed placeholders and is shared only on request under a data use agreement that restricts use to non-commercial research and prohibits re-identification. Logging the tracking at 18.4 Hz further limits identification from gaze, since eye-movement biometrics degrade markedly at 50 Hz and below (Lohr and Komogortsev, 2022). Head and hand motion, however, remain identifying even when subsampled to 10 Hz (Nair et al., 2024), so a residual risk remains (Section 4.4). The residual re-identification risk of the tracking data is discussed in Section 4.4.

Acknowledgments

We gratefully acknowledge the financial support provided by the German Research Foundation (DFG) for the projects “New Data Spaces for the Social Sciences” (SPP 2431) - “FACES” (DFG: 539634240) and “Negation in Language and Beyond” (CRC 1629) - “NegLaB” (DFG: 509468465).

References

- Ali AbuSaleh, Leon Hammerla, and Alexander Mehler. 2026. [Learning to detect cross-modal negation: An analysis of latent representations and an attention-based solution](#). In *2026 8th International Conference on Natural Language Processing (ICNLP)*, pages 613–622.
- Vasu Agrawal, Akinniyi Akinyemi, Kathryn Alvero, Morteza Behrooz, Julia Buffalini, Fabio Maria Carlucci, Joy Chen, Junming Chen, Zhang Chen, Shiyang Cheng, Praveen Chowdary, Joe Chuang, Antony D’Avirro, Jon Daly, Ning Dong, Mark Dupenthaler, Cynthia Gao, Jeff Girard, Martin Gleize, and 65 others. 2025. [Seamless interaction: Dyadic audiovisual motion modeling and large-scale dataset](#). *Preprint*, arXiv:2506.22554.
- Alexei Baevski, Henry Zhou, Abdelrahman Mohamed, and Michael Auli. 2020. wav2vec 2.0: a framework for self-supervised learning of speech representations. In *Proceedings of the 34th International Conference on Neural Information Processing Systems, NIPS ’20*, Red Hook, NY, USA. Curran Associates Inc.
- Max Bain, Jaesung Huh, Tengda Han, and Andrew Zisserman. 2023. [WhisperX: Time-Accurate Speech Transcription of Long-Form Audio](#). In *Interspeech 2023*, pages 4489–4493.
- Rajendra Banjade and Vasile Rus. 2016. [DT-neg: Tutorial dialogues annotated for negation scope and focus in context](#). In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC’16)*, pages 3768–3771, Portorož, Slovenia. European Language Resources Association (ELRA).
- Soubhik Barari, Jarret Angbazo, Natalie Wang, Leah Christian, Elizabeth Dean, Zoe Slowinski, and Brandon Sepulvado. 2026. [AI-Assisted conversational interviewing: Effects on data quality and respondent experience](#). *Survey Research Methods*, 20(2):161–180.
- Hans-Peter Blossfeld and Jutta von Maurice. 2019. [Education as a Lifelong Process](#), pages 17–33. Springer Fachmedien Wiesbaden, Wiesbaden.
- Nicolas Boizard, Hippolyte Gisserot-Boukhlef, Duarte M. Alves, André F T Martins, Ayoub Hammal, Caio Corro, Céline Hudelot, Emmanuel Malherbe, Etienne Malaboeuf, Fanny Jourdan, Gabriel Hautreux, João Alves, Kevin El-Haddad,

- Manuel Faysse, Maxime Peyrard, Nuno M Guerreiro, Patrick Fernandes, Ricardo Rei, and Pierre Colombo. 2025. [EuroBERT: Scaling Multilingual Encoders for European Languages](#). In *Second Conference on Language Modeling*, pages 1–28, Montreal, Canada.
- Carlos Busso, Murtaza Bulut, Chi-Chun Lee, Abe Kazemzadeh, Emily Mower, Samuel Kim, Jeanette N. Chang, Sungbok Lee, and Shrikanth S. Narayanan. 2008. [IEMOCAP: interactive emotional dyadic motion capture database](#). *Language Resources and Evaluation*, 42(4):335–359.
- Frederick G. Conrad, Michael F. Schober, Andrew L. Hupp, Brady T. West, Kallan M. Larsen, Ai Rene Ong, and Tianheao Wang. 2023. [Video in survey interviews: Effects on data quality and respondent experience](#). *methods, data, analyses*, 17(2):135–170.
- A. P. Dawid and A. M. Skene. 1979. [Maximum likelihood estimation of observer error-rates using the EM algorithm](#). *Journal of the Royal Statistical Society. Series C (Applied Statistics)*, 28(1):20–28.
- Kyle Endres, D. Sunshine Hillegus, Matthew DeBell, and Shanto Iyengar. 2023. [A randomized experiment evaluating survey mode effects for video interviewing](#). *Political Science Research and Methods*, 11(1):144–159.
- Mar González-Franco, Daniel Pérez-Marcos, Bernhard Spanlang, and Mel Slater. 2010. [The contribution of real-time mirror reflections of motor actions on virtual body ownership in an immersive virtual environment](#). In *2010 IEEE Virtual Reality Conference (VR)*, pages 111–114.
- Leon Hammerla, Andy Lücking, Carolin Reinert, and Alexander Mehler. 2025a. [D-neg: Syntax-aware graph reasoning for negation detection](#). In *Proceedings of the 14th International Joint Conference on Natural Language Processing and the 4th Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics*, pages 1432–1454, Mumbai, India. The Asian Federation of Natural Language Processing and The Association for Computational Linguistics.
- Leon Hammerla, Alexander Mehler, and Giuseppe Abrami. 2025b. [Standardizing heterogeneous corpora with DUUR: A dual data- and process-oriented approach to enhancing NLP pipeline integration](#). In *Proceedings of the 14th International Joint Conference on Natural Language Processing and the 4th Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics*, pages 1410–1425, Mumbai, India. The Asian Federation of Natural Language Processing and The Association for Computational Linguistics.
- Leon Hammerla, Patrick Schrottenbacher, and Alexander Mehler. 2026. [Negation beyond the verbal channel: Temporal multimodal correlates in dialogue](#). *Preprint*, arXiv:2609.16396.
- Mareike Hartmann, Miryam de Lhoneux, Daniel Herscovich, Yova Kementchedjheva, Lukas Nielsen, Chen Qiu, and Anders Søgaard. 2021. [A multilingual benchmark for probing negation-awareness with minimal pairs](#). In *Proceedings of the 25th Conference on Computational Natural Language Learning*, pages 244–257, Online. Association for Computational Linguistics.
- Béatrice S. Hasler, Peleg Tuchman, and Doron Friedman. 2013. [Virtual research assistants: Replacing human interviewers by automated avatars in virtual worlds](#). *Computers in Human Behavior*, 29(4):1608–1616.
- Judith Holler and Stephen C. Levinson. 2019. [Multimodal language processing in human communication](#). *Trends in cognitive sciences*, 23(8):639–652.
- Md Mosharaf Hossain, Dhivya Chinnappa, and Eduardo Blanco. 2022. [An analysis of negation in natural language understanding corpora](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 716–723, Dublin, Ireland. Association for Computational Linguistics.
- Salud María Jiménez-Zafra, Roser Morante, María Teresa Martín-Valdivia, and L. Alfonso Ureña-López. 2020. [Corpora annotated with negation: An overview](#). *Computational Linguistics*, 46(1):1–52.
- Hyunchul Kim and Jeongmi Lee. 2025. [Quantifying social connection with verbal and non-verbal behaviors in virtual reality conversations](#). In *Proceedings of the 2025 CHI Conference on Human Factors in Computing Systems*, CHI ’25, New York, NY, USA. Association for Computing Machinery.
- Suyoun Kim, Abhinav Arora, Duc Le, Ching-Feng Yeh, Christian Fuegen, Ozlem Kalinli, and Michael L. Seltzer. 2021. [Semantic Distance: A New Metric for ASR Performance Analysis Towards Spoken Language Understanding](#). In *Interspeech 2021*, pages 1977–1981.
- Suyoun Kim, Duc Le, Weiyei Zheng, Tarun Singh, Abhinav Arora, Xiaoyu Zhai, Christian Fuegen, Ozlem Kalinli, and Michael Seltzer. 2022. [Evaluating User Perception of Speech Recognition System Quality with Semantic Distance Metric](#). In *Interspeech 2022*, pages 3978–3982.
- Allison Koenecke, Anna Seo Gyeong Choi, Katelyn X. Mei, Hilke Schellmann, and Mona Sloane. 2024. [Careless whisper: Speech-to-text hallucination harms](#). In *Proceedings of the 2024 ACM Conference on Fairness, Accountability, and Transparency*, FAccT ’24, page 1672–1681, New York, NY, USA. Association for Computing Machinery.
- Varada Kolhatkar, Hanhan Wu, Luca Cavasso, Emilie Francis, Kavan Shukla, and Maite Taboada. 2019. [The SFU opinion and comments corpus: A corpus for the analysis of online news comments](#). *Corpus Pragmatics*, 4(2):155–190.

- Natalia Konstantinova, Sheila C.M. de Sousa, Noa P. Cruz, Manuel J. Maña, Maite Taboada, and Ruslan Mitkov. 2012. [A review corpus annotated for negation, speculation and their scope](#). In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC'12)*, pages 3190–3195, Istanbul, Turkey. European Language Resources Association (ELRA).
- Matus Krajcovic, Peter Demcak, and Eduard Kuric. 2026. [Talking surveys: How photorealistic embodied conversational agents shape response quality, engagement, and satisfaction](#). *Behavior Research Methods*, 58(8):212.
- Max M. Lang and Sol Eskenazi. 2025. [Telephone surveys meet conversational AI: Evaluating a LLM-based telephone survey system at scale](#). *Preprint*, arXiv:2502.20140. Accepted at the 80th Annual AAPPOR Conference, 2025.
- Gilwoo Lee, Zhiwei Deng, Shugao Ma, Takaaki Shiratori, Siddhartha S. Srinivasa, and Yaser Sheikh. 2019. Talking with hands 16.2m: A large-scale dataset of synchronized body-finger motion and audio for conversational motion analysis and synthesis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*.
- Danny D. Leybzon, Shreyas Tirumala, Nishant Jain, Summer Gillen, Michael Jackson, Cameron McPhee, and Jennifer Schmidt. 2025. [AI telephone surveying: Automating quantitative data collection with an AI interviewer](#). *Preprint*, arXiv:2507.17718.
- Laura H. Lind, Michael F. Schober, Frederick G. Conrad, and Heidi Reichert. 2013. [Why do survey respondents disclose more when computers ask the questions?](#) *Public Opinion Quarterly*, 77(4):888–935.
- Alexander H. Liu, Andy Ehrenberg, Andy Lo, Clément Denoix, Corentin Barreau, Guillaume Lample, Jean-Malo Delignon, Khyathi Raghavi Chandu, Patrick von Platen, Pavankumar Reddy Muddireddy, Sanchit Gandhi, Soham Ghosh, Srikanth Mishra, Thomas Foubert, Abhinav Rastogi, Adam Yang, Albert Q. Jiang, Alexandre Sablayrolles, Amélie Héliou, and 87 others. 2025. [Voxtral](#). *Preprint*, arXiv:2507.13264.
- Dillon Lohr and Oleg V. Komogortsev. 2022. [Eye know you too: Toward viable end-to-end eye movement biometrics for user authentication](#). *IEEE Transactions on Information Forensics and Security*, 17:3151–3164.
- Gale M. Lucas, Jonathan Gratch, Aisha King, and Louis-Philippe Morency. 2014. [It’s only a computer: Virtual humans increase willingness to disclose](#). *Computers in Human Behavior*, 37:94–100.
- Annemieke Luiten, Joop Hox, and Edith de Leeuw. 2020. [Survey nonresponse trends and fieldwork effort in the 21st century: Results of an international study across countries and surveys](#). *Journal of Official Statistics*, 36(3):469–487.
- Andy Lücking, Kirsten Bergman, Florian Hahn, Stefan Kopp, and Hannes Rieser. 2013. [Data-based analysis of speech and gesture: The bielefeld speech and gesture alignment corpus \(SaGA\) and its applications](#). *Journal of Multimodal User Interfaces*, 7(1-2):5–18.
- Gaurav Maheshwari, Dmitry Ivanov, Théo Johannet, and Kevin El Haddad. 2025. [ASR Benchmarking: Need for a more representative conversational dataset](#). In *ICASSP 2025 - 2025 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1–5.
- I. McCowan, J. Carletta, W. Kraaij, S. Ashby, S. Bourban, M. Flynn, M. Guillemot, T. Hain, J. Kadlec, V. Karaiskos, M. Kronenthal, G. Lathoud, M. Lincoln, A. Lisowska, W. Post, Dennis Reidsma, and P. Wellner. 2005. The AMI meeting corpus. In *Proceedings of Measuring Behavior 2005, 5th International Conference on Methods and Techniques in Behavioral Research*, pages 137–140. Noldus Information Technology.
- Claire McLean, Makenzie Meendering, Tristan Swartz, Orri Gabbay, Alexandra Olsen, Rachel Jacobs, Nicholas Rosen, Philippe de Bree, Tony Garcia, Gadsden Merrill, Jake Sandakly, Julia Buffalini, Neham Jain, Steven Krenn, Moneish Kumar, Dejan Markovic, Evonne Ng, Fabian Prada, Andrew Saba, and 5 others. 2025. [Embodify 3D: A large-scale multimodal motion and behavior dataset](#). Technical report, arXiv. ArXiv preprint.
- Alexander Mehler, Mevlüt Bağcı, Alexander Henlein, Giuseppe Abrami, Christian Spiekermann, Patrick Schrottenbacher, Maxim Konca, Andy Lücking, Julianne Engel, Marc Quintino, Jakob Schreiber, Kevin Saukel, and Olga Zlatkin-Troitschanskaia. 2023. [A multimodal data model for simulation-based learning with va.si.li-lab](#). In *Digital Human Modeling and Applications in Health, Safety, Ergonomics and Risk Management*, pages 539–565, Cham. Springer Nature Switzerland.
- Microsoft, Abdelrahman Abouelenin, Atabak Ashfaq, Adam Atkinson, Hany Awadalla, Nguyen Bach, Jianmin Bao, Alon Benhaim, Martin Cai, Vishrav Chaudhary, Congcong Chen, Dong Chen, Dongdong Chen, Junkun Chen, Weizhu Chen, Yen-Chun Chen, Yi ling Chen, Qi Dai, Xiyang Dai, and 56 others. 2025. [Phi-4-Mini technical report: Compact yet powerful multimodal language models via mixture-of-loras](#). *Preprint*, arXiv:2503.01743.
- Mark Roman Miller, Fernanda Herrera, Hanseul Jun, James A. Landay, and Jeremy N. Bailenson. 2020. [Personal identifiability of user tracking data during observation of 360-degree vr video](#). *Scientific Reports*, 10(1):17404.
- Ines Montani, Matthew Honnibal, Matthew Honnibal, Adriane Boyd, Sofie Van Landeghem, and Henning Peters. 2023. [explosion/spacy: v3.7.2: Fixes for apis and requirements](#).

- Roser Morante and Eduardo Blanco. 2012. [*SEM 2012 shared task: Resolving the scope and focus of negation](#). In **SEM 2012: The First Joint Conference on Lexical and Computational Semantics – Volume 1: Proceedings of the main conference and the shared task, and Volume 2: Proceedings of the Sixth International Workshop on Semantic Evaluation (SemEval 2012)*, pages 265–274, Montréal, Canada. Association for Computational Linguistics.
- Roser Morante and Walter Daelemans. 2012. [ConanDoyle-neg: Annotation of negation cues and their scope in conan doyle stories](#). In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC’12)*, pages 1563–1568, Istanbul, Turkey. European Language Resources Association (ELRA).
- Vivek Nair, Wenbo Guo, Justus Mattern, Rui Wang, James F. O’Brien, Louis Rosenberg, and Dawn Song. 2023. Unique identification of 50,000+ virtual reality users from head & hand motion data. In *Proceedings of the 32nd USENIX Conference on Security Symposium, SEC ’23*, USA. USENIX Association.
- Vivek Nair, Mark Roman Miller, Rui Wang, Brandon Huang, Christian Rack, Marc Erich Latoschik, and James F. O’Brien. 2024. [Effect of data degradation on motion re-identification](#). In *2024 IEEE 25th International Symposium on a World of Wireless, Mobile and Multimedia Networks (WoWMoM)*, pages 85–90.
- Delroy L. Paulhus and Kevin M. Williams. 2002. [The dark triad of personality: Narcissism, machiavellianism and psychopathy](#). *Journal of Research in Personality*, 36(6):556–563.
- Christian Rack, Tamara Fernando, Murat Yalcin, Andreas Hotho, and Marc Erich Latoschik. 2023. [Who is Alyx? a new behavioral biometric dataset for user identification in XR](#). *Frontiers in Virtual Reality*, Volume 4.
- Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine Mcleavey, and Ilya Sutskever. 2023. [Robust speech recognition via large-scale weak supervision](#). In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 28492–28518. PMLR.
- Patrick Schrottenbacher, Alexander Mehler, Giuseppe Abrami, Lydia Kleine, and Doris Stingl. 2026. [InterView: Towards a unified VR-capable interview environment](#). SSRN preprint. Under review.
- Monica Sekoyan, Nithin Rao Koluguri, Nune Tadevosyan, Piotr Zelasko, Travis Bartley, Nikolay Karpov, Jagadeesh Balam, and Boris Ginsburg. 2025. [Canary-1b-v2 & parakeet-tdt-0.6b-v3: Efficient and high-performance models for multilingual asr and ast](#). Preprint, arXiv:2509.14128.
- Xian Shi, Xiong Wang, Zhifang Guo, Yongqi Wang, Pei Zhang, Xinyu Zhang, Zishan Guo, Hongkun Hao, Yu Xi, Baosong Yang, Jin Xu, Jingren Zhou, and Junyang Lin. 2026. [Qwen3-ASR technical report](#). Preprint, arXiv:2601.21337.
- Silero Team. 2024. Silero VAD: Pre-trained enterprise-grade voice activity detector. <https://github.com/snakers4/silero-vad>.
- Hanyu Sun and Ting Yan. 2023. [Applying Machine Learning to the Evaluation of Interviewer Performance](#). *Survey Practice*, 16(1).
- Roger Tourangeau and Ting Yan. 2007. Sensitive questions in surveys. *Psychol Bull*, 133(5):859–883.
- Gabriella Vigliocco, Pamela Perniss, and David Vinson. 2014. [Language as a multimodal phenomenon: implications for language learning, processing and evolution](#). *Philosophical transactions of the Royal Society of London. Series B, Biological sciences*, 369(1651):20130292. PMC4123671.
- Veronika Vincze, György Szarvas, Richárd Farkas, György Móra, and János Csirik. 2008. [The BioScope corpus: biomedical texts annotated for uncertainty, negation and their scopes](#). *BMC Bioinformatics*, 9(S11).
- Laurin Wagner, Mario Zusag, and Bernhard Thallinger. 2026. [Transcription policy as a latent variable: Activating controllable verbatim asr with word-level timing](#). Preprint, arXiv:2607.18934.
- Changhan Wang, Morgane Riviere, Ann Lee, Anne Wu, Chaitanya Talnikar, Daniel Haziza, Mary Williamson, Juan Pino, and Emmanuel Dupoux. 2021. [VoxPopuli: A large-scale multilingual speech corpus for representation learning, semi-supervised learning and interpretation](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 993–1003, Online. Association for Computational Linguistics.
- Liang Wang, Nan Yang, Xiaolong Huang, Linjun Yang, Rangan Majumder, and Furu Wei. 2024. [Multilingual E5 text embeddings: A technical report](#). Preprint, arXiv:2402.05672.
- Douglas Williams and J Michael Brick. 2018. [Trends in u.s. face-to-face household survey nonresponse and level of effort](#). *Journal of Survey Statistics and Methodology*, 6(2):186–211.
- Susanne Wollin-Giering, Markus Hoffmann, Jonas Höfting, and Carla Ventzke. 2024. [Automatic transcription of english and german qualitative interviews](#). *Forum Qualitative Sozialforschung / Forum: Qualitative Social Research*, 25(1).
- Ting Yan. 2021. [Consequences of asking sensitive questions in surveys](#). *Annual Review of Statistics and Its Application*, 8(Volume 8, 2021):109–127.

Shukang Yin, Chaoyou Fu, Sirui Zhao, Ke Li, Xing Sun, Tong Xu, and Enhong Chen. 2024. [A survey on multimodal large language models](#). *National Science Review*, 11(12):nwae403.

Jacob Young, Jennifer Ferreira, and Nadia Pantidi. 2024. "i shot the interviewer!": The effects of In-VR interviews on participant feedback and rapport. In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems*, CHI '24, New York, NY, USA. Association for Computing Machinery.

Mario Zusaq, Laurin Wagner, and Bernhad Thallinger. 2024. [CrisperWhisper: Accurate Timestamps on Verbatim Speech Transcriptions](#). In *Interspeech 2024*, pages 1265–1269.

A Synchronization Details

Each headset stamps all of its streams with its own local clock. Because some headsets deviated from wall time, each session’s clock was mapped onto a shared clock with a constant offset estimated as the minimum of the server’s arrival time minus the local time over the session. Queuing delay is never negative, so the least-delayed packet gives the best estimate. Using a single constant per session keeps jitter of server arrival times out of the timing. Sub-second timing comes from the audio sample clock. The client sends data in flushes, each consisting of an audio chunk and the sensor samples recorded in the same time window. The client stamps each flush with the local time at the end of the window. Audio chunks are contiguous between reconnections; therefore, each contiguous run is anchored from the median of the local time minus the cumulative sample time. This reduces the one-second quantization of the local clock (standard deviation 0.29 s per chunk) to about $0.29/\sqrt{n}$ s for a run of n chunks. Precision resets only at a reconnect. Sensor samples are spread over the time window of the audio chunk they were sent with and therefore inherit its precision. Words are mapped from audio time through the chunks and word durations are taken from the audio sample clock, so tracking frames, words and item windows share one timeline.

B Transcription Details

Line placement and alignment. Reference lines carry no reliable timestamps since those inserted by annotators have none. We therefore locate each line through the segment-level systems, whose output is stored per VAD segment. Every reference word aligned to a hypothesis word by the WER alignment votes for that word’s segment. This is pooled

	Rec. (IR/IE)	Edit	Model	Anch.	Low
T1	12 (6/6)	10.3	9.7	5.4	3.9
T2	12 (6/6)	10.2	10.9	5.8	4.5
T3	10 (5/5)	12.2	9.8	5.7	3.6
T4	10 (4/6)	7.5	13.1	11.7	4.7
T5	10 (6/4)	4.7	9.1	9.7	2.6

Table 5: Reference quality per annotator. *Rec.*: recordings (interviewer/interviewee); *Edit*: words changed relative to the automatic transcript (%); *Model*: WER of the five VAD-based systems (%); *Anch.*: tokens reproduced only by the automatic transcript, per 1,000 reference tokens; *Low*: lines recognized by at least one system with alignment confidence below 0.05 (%).

over Qwen3-ASR, Parakeet, Canary and Voxtral. Each line takes the segments holding at least a quarter of its votes and this is kept monotone over time. Lines that no system recognizes are placed in an unclaimed segment between their neighbors. The text of each group of segments is then aligned to its audio using CTC forced alignment and the German wav2vec 2.0 model, which has been fine-tuned on VoxPopuli.

Decoding controls. CrisperWhisper 2 in verbatim mode additionally emits word fragments and non-speech tags, which we remove before scoring. Its long-form output contains eleven inserted runs of 50 or more words, the longest an 886-word loop of *ja das ist ja* in one interviewee recording. Only 1–5% of the inserted words of the long-form systems match the other speaker’s speech, so the insertions are not explained by cross-talk.

Annotators. Table 5 compares the five annotators. The edit rate is the WER of the automatic transcript against the final reference, i.e., the proportion of words changed by the annotator. The model WER is the average WER of five VAD-based systems, on the same recordings. It takes into account both recording difficulty and residual reference errors. T4 and T5 involved fewer changes and left about twice as many tokens that only the automatic transcript reproduces. For T5, this coincides with the lowest model WER, suggesting under-correction rather than easier recordings.

Negation and semantic distance. For the 486 distinct reference lines that contain a negation cue and at least four words, we deleted either the first cue or a randomly chosen other word, so both edits cost exactly one WER error. Deleting the cue increases SemDist ($\times 100$) by 2.35 on average (me-

dian 1.54), deleting another word by 1.07 (median 0.54); in 20% of the lines, however, the cue deletion is rated the smaller change. Semantic metrics therefore complement, but do not replace, a direct check of negation cues when transcripts feed negation or survey analyses.

Unreferenced speech. Of the 55 VAD segments with speech missing from the reference, 32 are in interviewee and 23 in interviewer recordings; most contain short answers (*ja vier*) or remarks about the technical setup.

C Negation Cue and Scope Detection

C.1 Negation Annotation

C.1.1 Sampling Procedure

Dialogue turns from all 27 interviews were automatically segmented into sentences; short interruptions by the other speaker were conservatively bridged, yielding 232 sampled sentences reconstructed across turns. Candidate sentences were required to contain at least two words, begin with a capital letter and end in terminal punctuation without a truncating ellipsis. Candidates with unbalanced brackets, transcription artifacts, incomplete syntactic endings or more than 120 words were also removed. In total, 2,436 candidates failed these form-based checks, leaving 4,220 eligible sentences. No negation information (cue lexicon, labels or model predictions) was used at any stage of sampling. We drew a stratified random sample with seed 42. Each interview contributed 52 or 53 sentences. Within each interview, the quota was allocated between interviewer and interviewee in proportion to the number of distinct (non-duplicate) sentences available for each role, with a minimum of ten sentences per role and distributed across five chronological positions in the conversation. To satisfy the duplicate constraint below, positional quotas were relaxed: all five positions are represented, but not equally (448/195/254/241/284 sentences). All 30 speakers contribute at least ten sentences. Because many interview questions are scripted, sentences were grouped into duplicate clusters if they were identical after normalization (NFKC, case folding, punctuation removal) or, for sentences of at least six tokens, near-identical (character similarity ≥ 0.92). At most one sentence per cluster was sampled across the entire corpus and therefore across splits. The 4,220 eligible sentences form 2,121 clusters; 232 contain more than one sentence, with

the largest containing 46. Near-duplicate matching is not applied to sentences shorter than six tokens, since a single character can distinguish different answers (*Gar nicht.* vs. *Gar nichts.*); 36 near-identical short pairs therefore remain in the sample, nine of them spanning two splits. Under these constraints, the corpus supports a sample of 1,422 sentences (mean length 9.0 tokens, median 6). Because duplicate control removes most repeated scripted questions, interviewers contribute 630 sentences (44.3%) despite producing 69.1% of the eligible sentences; interviewees contribute 792 (55.7%). The three interviewers contribute 83, 210 and 337 sentences; exact balance was infeasible under the joint constraints. Splits were defined over complete interviews: 21 interviews for training (1,106 sentences), 3 for validation (158) and 3 for testing (158). Each held-out split contains one interview by each of the three interviewers. The task therefore evaluates generalization to unseen conversations and interviewees, but not to unseen interviewers.

C.1.2 Annotation Guidelines

Three annotators labeled the sampled sentences in a web interface. Sentences were presented one at a time, without surrounding dialogue context, in a seeded random order. Annotators marked every expression functioning as a negation cue, with cues optionally spanning multiple tokens and linked each cue to the tokens in its semantic scope. Scopes associated with different cues were allowed to overlap. Each sentence was assigned to one of the three annotator pairs in rotation, so every sentence received two independent annotations, with each pair assigned exactly one third of the sample (474 sentences).

C.1.3 Inter-Annotator Agreement

Agreement was measured at the token level. Because no sentence was annotated by all three annotators, we report pairwise Cohen’s κ together with Krippendorff’s nominal α , which accommodates missing ratings. Cue agreement is high ($\alpha = 0.87$). Annotators agree on whether a sentence contains negation at all in 96.6% of the 1,398 doubly annotated sentences (pooled pairwise $\kappa = 0.88$) and their cue annotations are identical for 93.8–96.3% of shared sentences. Scope agreement is computed only for negation instances whose cue tokens match exactly between the two annotators (254 instances). Token-level agreement is $\alpha = 0.81$ and complete

Task	Cohen’s κ			α	Exact (%)
	A1–A2	A1–A3	A2–A3		
Cue	0.90	0.85	0.85	0.87	93.8–96.3
Scope [†]	0.79	0.79	0.84	0.81	59.3–75.3

[†]Computed only on instances whose cue tokens match exactly (85/86/83 instances per pair).

Table 6: Token-level inter-annotator agreement. *Exact* gives the range over annotator pairs of the percentage of shared sentences (cue) or matched negation instances (scope) with identical annotations.

scopes are identical in 59.3–75.3% of these instances. When scopes differ, they differ by three to five tokens on average and the disagreements are largely systematic: A3 marks wider scopes than A1 (94 vs. 15 tokens labeled as scope by only one of the two).

C.1.4 Consolidation

We derive a single reference annotation automatically rather than through manual adjudication.

Cue consolidation. Cue tokens are unioned across annotators, favoring recall; this adds 80 cue tokens marked by only one of the two annotators. Negation instances are aligned across annotators through their cue tokens. Proposals whose cue tokens overlap without being identical are merged into one instance (12 cases, typically a multi-word cue that one annotator marked only partially). In one sentence, the alignment is ambiguous; its separate proposals are retained, flagged and excluded from model fitting.

Scope consolidation. The reference contains 342 negation instances. For 178, both annotators assign the same scope, which is retained. For 76, only one annotator provides the aligned cue and that annotator’s scope is copied. The remaining 88 instances contain 312 disputed tokens; tokens on which both annotators agree retain their label. We resolve the disputed tokens with a binary Dawid–Skene model (Dawid and Skene, 1979), which estimates a sensitivity and specificity for each annotator and combines the observed labels into the posterior probability that a token belongs to the scope. Tokens with a posterior of at least 0.5 are assigned to the scope; 136 of the 312 disputed tokens have a posterior between 0.4 and 0.6. Parameters are estimated with MAP-EM on all tokens (agreed and disputed) of training-split instances annotated by both annota-

tors with an unambiguous alignment (2,646 tokens) and then applied unchanged to all splits, so validation and test annotations do not influence them. We use weak Beta priors with mode 0.9 on sensitivity and specificity. The estimated sensitivities are 0.91, 0.92 and 0.98 and the specificities 0.99, 0.98 and 0.94 for A1–A3.

C.2 Training Details

Our models follow the D-Neg training setup, with four modifications. First, labels are assigned only to the first subword of each word, ensuring that training and evaluation are performed at the word level. Second, because the EuroBERT tokenizer removes the leading space from pre-segmented words, we restore it before tokenization so that subword segmentation matches that obtained from running text. Third, before dependency parsing, we remove punctuation attached to words, preserving a one-to-one correspondence between input words and parser tokens. Fourth, we train for 10 epochs and select the checkpoint with the highest validation F1 rather than the lowest validation loss. Training sentences exceeding the maximum sequence length are excluded for the GAT model; no validation or test sentence exceeds this limit. The released D-Neg models are evaluated using their original inference code without modification.

C.3 Detailed Results and Analysis

Table 7 reports precision, recall, F1 and exact match for all GAT models. For cue detection, most D-Neg models achieve high precision (up to 0.94) but lower recall (at most 0.76), whereas our model is more balanced (P 0.88, R 0.89). In both tasks, most models favor precision over recall. The exceptions are the DT-Neg model for cue detection³ and the ConanDoyle-neg model for scope resolution. The cue model trained on DT-Neg is a clear outlier: it labels frequent words such as *ich*, *ja* and *auch* as cues, resulting in a precision of 0.06.

Cue errors. The test split contains 38 annotated cue tokens, of which 26 are *nicht* (24) or *nie* (2); all models detect almost every occurrence. Our model recovers 7.7 of these 12 tokens on average, whereas the strongest D-Neg GAT model recovers two. The most frequent false positives from our model are *noch*, *verschwommen*, *Abzug* and the tag question *ne?*.

³Our model favors recall by only 0.01 percentage points; we therefore treat its performance as effectively balanced rather than as a meaningful preference for recall.

Training data	Cue				Scope			
	P	R	F1	EM	P	R	F1	EM
BioScope (abstracts)	0.94	0.42	0.58	0.89	0.60	0.42	0.49	0.19
BioScope (full)	0.75	0.16	0.26	0.85	0.51	0.25	0.34	0.08
ConanDoyle-neg	0.93	0.71	0.81	0.92	0.47	0.61	0.53	0.24
DT-Neg	0.06	0.63	0.11	0.31	0.69	0.54	0.61	0.27
SFU Review	0.93	0.74	0.82	0.92	0.50	0.26	0.34	0.11
SOCC	0.83	0.76	0.79	0.91	0.42	0.35	0.38	0.14
Ours (3 seeds)	0.88,±0.05	0.89±0.02	0.88±0.02	0.95±0.01	0.81±0.05	0.56±0.05	0.66±0.02	0.42±0.04

Table 7: Negation results on our test split for GAT models: word-level precision (P), recall (R) and F1 for the positive class, together with exact match (EM), measured as the proportion of exactly correct sentences for cue detection and exactly correct scopes for scope detection. D-Neg models are applied as released; our results are averaged over three seeds (mean $\pm$ standard deviation). Scope detection uses gold cues.

Model	Len.	Exact	Short	Long	Other
Ours GAT	3.6	42	32	14	12
D-NEG GAT, DT-Neg	4.0	27	27	24	22

Table 8: Scope error types on the test split. *Len.* denotes mean predicted scope length in tokens; the mean reference scope length is 5.1 tokens.

Scope errors. Table 8 classifies each predicted scope as exact, a strict subset of the reference (*short*), a strict superset (*long*) or neither. Reference scopes contain 5.1 tokens on average. Our model predicts shorter scopes (3.6 tokens), with strict subsets constituting its most frequent error type. The best out of domain D-Neg model for scope resolution, namely the DT-Neg GAT variant, similarly predicts shorter scopes than the reference (4.0 tokens), but produces fewer exact matches (27% vs. 42%).

D Questionnaire Items

Table 9 lists the 30 questions of the main questionnaire in the order in which they were administered; batteries and split questions yield 52 items, which together with three scripted recording-consent prompts form the 55 interview items of the SurveyItem catalog. Eleven items were asked only depending on previous answers and the four income follow-ups (t520011–t520014), were never asked. The German wording of all 131 items, including the interviewee’s experience questionnaire (50 items) and the interviewer’s protocol (26 items), is part of the release. Questions are adapted mostly from NEPS; glosses are ours.

Section	Variable	Content (English gloss)
Satisfaction, partnership, family	t514001	Life satisfaction (0–10)
	t731112	Steady partnership
	t731111	Living with partner
	t731110	Marital status
	tp1	Feelings about being single
	tp2	Disagreements in the relationship
	t66900a	Epistemic curiosity (scale)
Education and employment	tn1	Narcissism and Machiavellianism (scale)
	t731810	Vocational training or study in the last two years
	t731813	Type of vocational qualification
	t731816	Type of tertiary degree
	t731901	Employment
	t731903	Main activity
	t731902	Weekly working hours
Earned income	t520010	Net earned income (open)
	t520011	Net earned income (split)
	t520012	Income bracket below 1,500 EUR
	t520013	Income bracket 1,500–3,000 EUR
	t520014	Income bracket above 3,000 EUR
	t731904	Occupation
	ta1	Dream occupation (open)
	ta2	How education could have helped (open)
	t67010a	Locus of control (scale)
	t517400	Social belonging
Locus of control Belonging and trust	t517100	Social trust
	td1	Offline activities (battery)
	td5	Online activities (battery)
	th18153	Learning with computer or internet, last 12 months
	td9	Learning programs used (open)
	td10	Preferred survey participation mode (open)

Table 9: Main questionnaire read out in VR.



Figure 3: The four avatars used during the interview. From A on the left to D on the right.

Layer	Table	Content	Rate	Records
Session	Experiment	interview metadata	–	27
	Player	speaker per interview, connection sessions	–	54
Tracking	Eye	binocular gaze poses, validity, confidence	18.4 Hz	1,350,572
	Head, Body	6-DoF head and rig pose	18.4 Hz	1,350,572 each
	Facial	63 blendshape weights	18.4 Hz	1,350,572
	Left/RightHand	6-DoF wrist pose	18.4 Hz	1,350,572 each
	Left/RightFinger	hand root/pointer pose, pinch, confidence	18.4 Hz	515,995 / 544,280 tracked
Language	Word	automatic word tokens, time-aligned	–	53,475
	ReferenceWord	post-edited word tokens, forced-aligned	–	55,764
Instrument	InterviewItem	scripted question stems and battery state-ments	–	56
	QuestionWindow	item readings located by aligning the script to the interviewer transcript	–	1,147
Questionnaire	SurveyItem	items and value labels of three questionnaires (55 interview, 26 protocol, 50 experience)	–	131
	SurveyResponse	one response set per interview	–	27
	SurveyAnswer	answers with missingness codes	–	3,537

Table 10: Released data layers of the 27 interviews. Finger tables hold a row for every frame; the counts give the frames in which the hand was tracked.