

Goldsmith: Gold-Loss-Guided Definition Optimization with an Agentic Annotation Harness

Yihan Li^{1,†,*} Hanyi Zhang^{2,†} Xiaoxi Jiang¹ Man Guo^{1,*}

¹Sun Yat-sen University, Guangzhou, China

²South China University of Technology, Guangzhou, China
liyihan.xyz@gmail.com; gman@mail.sysu.edu.cn

[†]Equal contribution. ^{*}Corresponding authors.

Abstract

Many annotation projects begin before experts have a stable guideline or enough labels to train a task-specific model. We present Goldsmith, an agentic pipeline that turns a small gold set—expert-annotated calibration examples representing the intended task boundaries—into a reusable structured annotation definition. Goldsmith treats this definition as a trainable textual object. Candidate definitions are run on the same gold examples and scored with an executable structured loss, while the output schema, formatting, retrieval, repair, judging, and human review remain in an external harness. A large language model (LLM) editor converts the highest-loss failures into textual-gradient revisions, which are accepted only when the measured loss decreases. In prompt-optimization comparisons, Goldsmith improves over direct rewriting, OPRO, APE, and PromptBreeder under matched evaluation protocols. The resulting definition also improves downstream annotation when combined with retrieval, score-based routing, and human review across typed span, pair-level relation, and fixed-trigger event-argument tasks. These results show that scarce expert supervision can support both task-definition learning and scalable annotation.

1 Introduction

Many annotation projects begin before the task is fully defined: experts may recognize the phenomenon to annotate, yet lack a stable boundary policy, a complete manual, or enough labels for a task-specific model (Settles, 2009; Tomanek and Olsson, 2009). Pre-trained language model (PLM)-first systems remain strong once this target is stable. BERT-style and XLM-R token classifiers are natural span-labeling baselines (Devlin et al., 2019; Conneau et al., 2020), while typed-marker relation classifiers can use stronger encoders such as RoBERTa or DeBERTa (Liu et al., 2019; He et al.,

From dataset-first annotation to Goldsmith

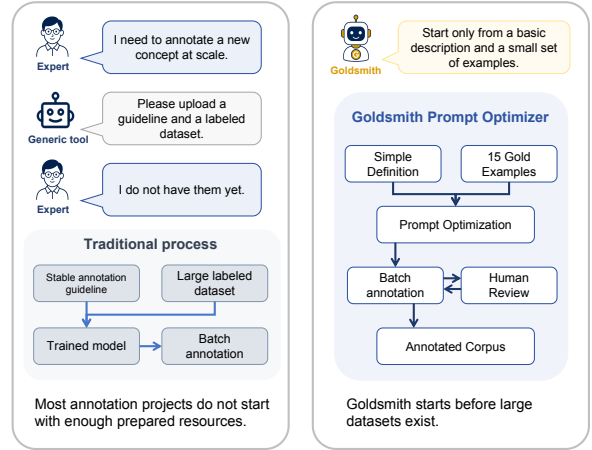


Figure 1: Conceptual comparison between a dataset-first annotation workflow and Goldsmith’s definition-first workflow.

2023). Even parameter-efficient updates such as Low-Rank Adaptation (LoRA) reduce training cost, not the cost of deciding what the task means (Hu et al., 2022). The bottleneck is therefore earlier: converting a partially articulated concept into an operational annotation procedure, a problem also discussed in LLM annotation and guideline-following IE (Tan et al., 2024; Sainz et al., 2024).

Long-context in-context learning changes this early-stage design space. Few-shot prompting showed that examples can condition a model without weight updates (Brown et al., 2020); many-shot and long-context studies show that expert examples, failures, and revision history can now fit inside the working context (Abbas et al., 2024; Bertsch et al., 2025). However, unselected or unvalidated examples can dilute the expert signal (Zou et al., 2025; Zhang et al., 2025b). In this setting, carefully chosen gold examples can define the task boundary more concretely than an initial prose guideline.

We introduce Goldsmith, an annotation harness built around this premise. Gold examples are the

scarce material experts can provide early; the system repeatedly tests, reshapes, and polishes that material into a durable operational definition. Given a short concept description and a 15-example gold calibration set, Goldsmith treats each gold example as a test case for the current definition, using prediction errors to decide whether a revised definition has captured the expert’s intended boundary. The definition then runs inside a model-external harness that connects model calls to retrieval tools, context construction, format repair, judges, review queues, and feedback loops; these tool-calling capabilities turn a revised definition into a stable workflow rather than a one-off LLM response (Liu et al., 2025; Qin et al., 2025).

The methodological core is prompt-as-parameter training: Goldsmith optimizes only the operational definition, while the schema, format reference, retrieved references, and harness controls remain outside the trainable definition. Candidate definitions come from OPRO, LLM-derived textual gradients, or Goldsmith’s own gold-loss-guided editor. This design is related to instruction-level optimizers such as APE and PromptBreeder, which generate or evolve candidate prompts (Zhou et al., 2023; Fernando et al., 2024), but acceptance is decided by the same gold loss rather than by the LLM’s self-assessment (Yang et al., 2024; Pryzant et al., 2023; Yuksekogonul et al., 2025). The claim is bounded: Goldsmith targets the early, evolving setting before PLM-first pipelines have enough stable labels, and asks whether the same 15 gold examples can outperform zero-shot prompting, static ICL, retrieval-only prompting, OPRO, and low-budget fine-tuning.

The contribution of this work can be summarized as follows:

- We introduce a gold-loss-guided prompt optimization method that treats the operational definition as the trainable textual parameter and accepts LLM-proposed revisions only when they improve structured loss on expert gold examples.
- We build this optimizer into an annotation pipeline whose harness keeps schema, formatting, retrieval, repair, judge routing, and human review outside the trainable prompt while making the optimized definition usable for batch annotation.
- We empirically validate the approach

across three structured annotation settings—OpenNER for typed multilingual named entity recognition (NER), CrossRE for pair-level relation classification, and PHEE V2 for controlled event-argument extraction—against LLM-only, prompt-optimization, and PLM baselines (Palen-Michel et al., 2025; Bassignana and Plank, 2022; Sun et al., 2024).

2 Related Work

2.1 LLM Annotation and Task Definition

LLM annotation studies ask whether language models can replace or assist human labelers, while later active and analyst-in-the-loop systems use uncertainty and human checks to allocate expert effort (Wang et al., 2021; Gilardi et al., 2023; Zhang et al., 2023; Dai et al., 2023). Surveys and information-extraction work emphasize that generated labels need validation and that structured outputs remain sensitive to task guidelines, schemas, parsing, and repair (Tan et al., 2024; Xu et al., 2024; Sainz et al., 2024; Huang et al., 2024). Few-shot prompting and recent long-context studies make it possible to provide examples, failures, and revision context without updating model parameters (Brown et al., 2020; Abbas et al., 2024; Bertsch et al., 2025). However, more context is not automatically better supervision: demonstrations should be selected and validated, so examples serve as operational task-definition evidence rather than merely additional prompt tokens (Zou et al., 2025; Zhang et al., 2025b,a).

2.2 Prompt Optimization

Prompt optimization work moves beyond hand-written prompting; recent surveys describe a spectrum from discrete trigger search to LLM-driven instruction revision (Ramnath et al., 2025). APE and PromptBreeder extend this idea to natural-language instructions: APE generates and scores candidate instructions, whereas PromptBreeder applies evolutionary mutation and self-referential prompt search (Zhou et al., 2023; Fernando et al., 2024). OPRO frames an LLM as a black-box optimizer over prompt-score histories (Yang et al., 2024). ProTeGi uses a critic to convert failures into natural-language textual gradients and an editor to produce candidate prompts (Pryzant et al., 2023); TextGrad generalizes textual feedback as a differentiable-style signal for compound LLM systems (Yuksek-

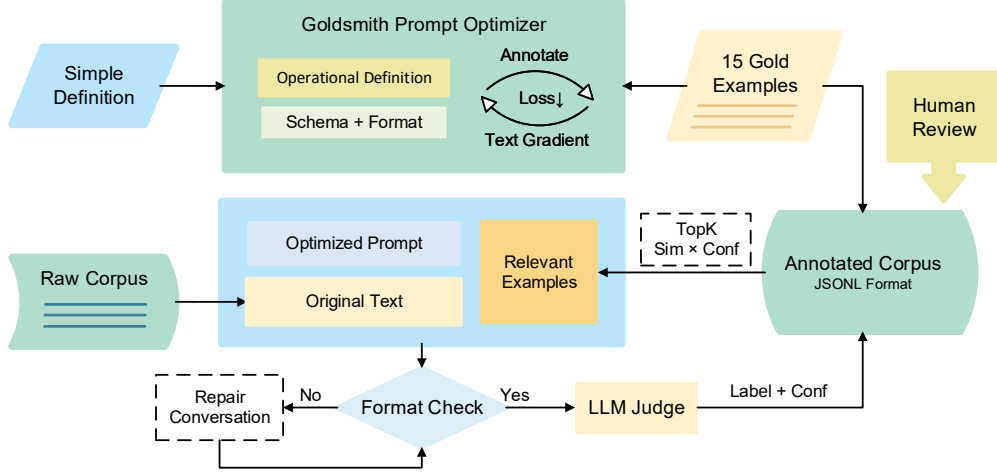


Figure 2: Two-stage Goldsmith workflow: gold-loss-guided definition training followed by retrieval- and review-assisted batch annotation.

gonul et al., 2025). These methods share an LLM proposal loop, but Goldsmith makes the operational definition the only trainable artifact and uses structured gold loss under a fixed annotation interface as the candidate acceptance rule.

3 Method

Goldsmith turns a small set of expert gold examples into a reusable structured annotation definition. The system has two stages: it first trains and selects an operational definition on a fixed gold set, then applies the resulting definition to an unlabeled corpus through retrieval, format checking, quality routing, and human review. Given an initial task description c_0 , a gold set G , and an unlabeled corpus U , Goldsmith produces an optimized definition c^* and structured predictions with confidence scores on U . Only the operational definition is optimized during prompt training; the label inventory, output schema, parser, format repair, retrieval, and review policies are managed by the external harness. Figure 2 shows the complete workflow.

3.1 Gold Loss for Structured Annotation

For any candidate definition c , Goldsmith combines it with the fixed output protocol to form an annotation prompt and runs that prompt on the same gold set. Model outputs are first parsed and checked against the structural constraints, then compared item by item with expert gold annotations. The evaluator computes a structured error for each item and averages these errors into the candidate’s gold loss. Thus, structured gold loss is an executable objective computed from fixed gold annotations and

comparison rules, rather than a subjective score supplied by an LLM or judge.

For typed span annotation, each item contains a set of labeled spans. Let G_i^T and P_i^T denote gold and predicted typed spans (s, e, y) , and let G_i^B , P_i^B denote their boundary-only projections. We define normalized missed- and extra-boundary rates as $\text{FN}_B(i)$ and $\text{FP}_B(i)$, respectively. Boundary loss combines these rates with task-level weights:

$$L_B(i) = \frac{\alpha_{\text{miss}} \text{FN}_B(i) + \alpha_{\text{extra}} \text{FP}_B(i)}{\alpha_{\text{miss}} + \alpha_{\text{extra}}}.$$

Here $\text{FN}_B(i) = |G_i^B \setminus P_i^B| / \max(1, |G_i^B|)$ and $\text{FP}_B(i) = |P_i^B \setminus G_i^B| / \max(1, |P_i^B|)$. The weights allow the evaluation to place different costs on missed and extra boundaries. Type loss is computed only on matched boundaries, $M_i = G_i^B \cap P_i^B$:

$$L_{\text{type}}(i) = \begin{cases} E_{\text{type}}(i) / |M_i|, & |M_i| > 0, \\ 0, & |M_i| = 0. \end{cases}$$

We combine these components as

$$L_{\text{span}}(i) = \lambda_B L_B(i) + \lambda_T L_{\text{type}}(i),$$

The normalized weights satisfy $\lambda_B + \lambda_T = 1$ and express the relative importance of boundary recovery and type correctness; additional item-level penalties are described below.

For given-pair relation annotation, the input supplies a sentence and a marked head–tail entity pair, and the model selects one relation label, including

no_relation. The per-item relation loss is label disagreement:

$$\tau_{\text{rel}}(i) = \mathbb{1}[\hat{y}_i \neq y_i].$$

For relation extraction with multiple relation edges, we analogously compare normalized missed- and extra-relation rates using α_{miss} and α_{extra} . Parse failure and instability are handled as item-level penalties below. We denote the resulting relation loss by $L_{\text{rel}}(i)$; for a single given pair, $L_{\text{rel}}(i) = \tau_{\text{rel}}(i)$. For an interface that combines spans and relations, such as the fixed-trigger PHEE V2 setting, Goldsmith combines the corresponding span and relation losses and checks the trigger-to-argument contract. We write this task loss as

$$L_{\text{task}}(i) = \begin{cases} L_{\text{span}}(i), & \text{span,} \\ L_{\text{rel}}(i), & \text{relation,} \\ \lambda_S L_{\text{span}}(i) + \lambda_R L_{\text{rel}}(i), & \text{joint.} \end{cases}$$

Here, span, relation, and joint denote span-only, relation-only, and span-relation interfaces, respectively, and $\lambda_S + \lambda_R = 1$.

The final item-level error is defined piecewise so that parsing failures are part of the same objective:

$$\ell_i(c) = \begin{cases} \lambda_{\text{parse}}, & \text{parse failure,} \\ L_{\text{task}}(i) + P_i(c), & \text{otherwise.} \end{cases}$$

where the applicable non-format penalties are collected as

$$P_i(c) = \lambda_{\text{exact}} \mathbb{1}[\text{exact mismatch}] \\ + \lambda_{\text{stab}} \mathbb{1}[\text{unstable output}] \\ + \lambda_{\text{trigger}} \mathbb{1}[\text{trigger failure}].$$

Each indicator and penalty is included only when the corresponding contract applies. For relation-only classification, label disagreement is already the task loss and is not counted again as a separate exact-match penalty. The prompt-level objective is

$$\bar{L}(G, c) = \frac{1}{|G|} \sum_{i=1}^{|G|} \ell_i(c).$$

For reporting, the implementation may use the monotonic rescaling $L(G, c) = \rho \bar{L}(G, c)$, where ρ is a reporting-scale parameter. All candidate definitions use the same objective for comparison. Judge scores, retrieval similarity, and human review outcomes do not replace this training objective.

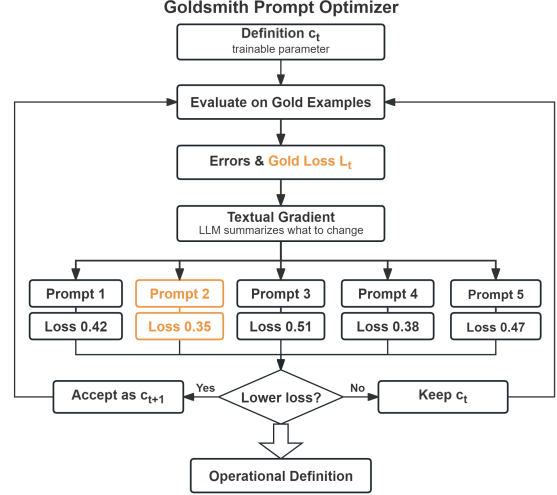


Figure 3: Goldsmith definition-training loop: textual-gradient edits are evaluated on gold examples and accepted only when they reduce gold loss.

3.2 Gold-Loss-Guided Definition Training

Let c_t denote the operational definition at optimization round t , and let $L_t = L(G, c_t)$ denote its gold loss under the objective in Section 3. Given an input x , retrieved references r , schema q , and format reference f , the annotation prompt is $p_t = h(c_t, x, r, q, f)$. Goldsmith optimizes only c_t , which specifies what should be annotated, how boundaries should be determined, and how labels or relations should be interpreted. The schema, format reference, parser, repair policy, retrieval policy, and review policy remain fixed. Each candidate is therefore evaluated through the same annotation interface and against the same structured gold-loss objective.

Goldsmith builds on the textual-gradient feedback of ProTeGi and the textual optimization view of TextGrad (Pryzant et al., 2023; Yuksekogonul et al., 2025), but its contribution is not textual gradients themselves. Instead, Goldsmith uses them to optimize a structured annotation definition from a small expert gold set. The optimization target is the operational definition rather than an unconstrained prompt, and candidate definitions must express abstract boundary rules, label priorities, and decision criteria rather than copy instance-specific examples. At each round, Goldsmith evaluates the current definition c_t on all gold items, selects the k highest-loss failures, and summarizes them into edit directions. An LLM editor proposes candidate definitions, but does not determine whether they

are better: each candidate is rerun on G through the same parser and schema, and is accepted only when its measured structured gold loss decreases.

The optimization process is stateful. Goldsmith records accepted and rejected candidates, their measured losses, the highest-loss failures before each edit, and the residual failures after accepted edits. This optimization trace provides the editor with evidence about which semantic changes improve the shared objective and which hard cases remain unresolved, reducing repeated ineffective rewrites. Training stops when all gold items pass or when the patience budget is exhausted.

3.3 Batch Annotation and Review Harness

After training, Goldsmith applies c^* to U through the fixed model-external harness. For each item, the context builder retrieves eligible references from the gold set and previously reviewed annotations. The annotator then produces a structured prediction using c^* , the retrieved context, and the fixed output protocol.

The parser checks schema fields, label inventory, text preservation, span validity, relation endpoints, and other format constraints. If a response violates only the format contract, Goldsmith first performs conversational repair that asks the model to preserve the annotation content while correcting the structure. Only unrepaired failures are retried as full annotation attempts.

An LLM judge can score parseable predictions for format validity, concept fit, boundary or relation quality, missed-span risk, extra-span risk, and overall quality. Judge scores are used only as review-priority signals. Before relying on them for routing, Goldsmith checks that low-score bins concentrate true errors.

Human review prioritizes low-score or otherwise high-risk items. In benchmark runs, selected items are corrected using the available gold annotations to simulate reviewed feedback; in deployment, this step must be performed by domain experts. Reviewed annotations can be promoted to reviewed references for later context construction and second-pass annotation, while definition updates remain subject to the independent gold-loss training procedure.

4 Experiments

4.1 Tasks and Datasets

We evaluate Goldsmith on three structured annotation settings. OpenNER is a multilingual typed span-labeling task: the input is a text and the output is a set of entity spans labeled as PER, ORG, or LOC (Palen-Michel et al., 2025). It represents span-labeling tasks because the system must recover both entity boundaries and type labels. CrossRE is a given-pair relation-classification task: the input is a sentence with a marked head entity, tail entity, and entity types, and the output is one of 17 positive relation labels or no_relation (Bassigana and Plank, 2022). It represents pair-level relation classification. PHEE V2 provides a controlled event-argument setting associated with pharmacovigilance event extraction (Sun et al., 2024). The event trigger is supplied as a fixed anchor, and the model predicts Subject, Treatment, and Effect argument spans together with trigger-to-argument relations. This setting tests argument-role boundary decisions without requiring the model to discover event triggers.

For each setting, we run experiments on a fixed dataset slice and reserve a 15-example calibration set for prompt optimization where applicable. The OpenNER multilingual slice and gold selection are described in Appendix A.1 and Appendix A.2; the CrossRE six-domain slice and pair-level gold selection are described in Appendix A.3 and Appendix A.4. Unless otherwise specified, all LLM-based prompt optimization, annotation, judging, and review-routing experiments use GPT-5.5; model identifiers, access month, decoding parameters, retry bounds, and review settings are listed in Appendix B.1. For OpenNER task-stage evaluation, all rows use the same held-out evaluation subset. The 15 calibration examples and the items selected for human review are excluded from this subset for every setting. In review-based settings, selected low-score items are corrected as reviewed feedback, promoted to reviewed references, and then used when the system reruns annotation over the target corpus.

4.2 Prompt-Optimization Baselines

The prompt-optimization experiment tests whether textual-gradient feedback improves the operational definition from 15 gold examples. All optimizers share the same initial description, gold set, candidate budget, gold loss, acceptance rule, and pa-

Dataset	Task	Input	Output
OpenNER	Typed spans	Text	PER / ORG / LOC
CrossRE	Relations	Text + HEAD/TAIL pair	Relation label
PHEE V2	Event arguments	Text + trigger	Subject / Treatment / Effect

Table 1: Task interfaces used in the OpenNER, CrossRE, and PHEE V2 experiments.

tience rule.

LLM rewrite-only. This baseline receives only the current operational definition and a generic rewrite instruction, without gold examples, errors, history, or textual-gradient feedback.

OPRO. OPRO is implemented as a history-based black-box optimizer (Yang et al., 2024). It sees previous candidate definitions and loss-derived scores, but not source texts, gold answers, model outputs, or error types. Candidates are accepted only if measured gold loss improves.

APE. APE uses its candidate-generation and scoring procedure, with the same GPT-5.5 backend, 15-example calibration set, parser/schema, and final structured gold-loss objective as the other optimizers (Zhou et al., 2023).

PromptBreeder. PromptBreeder is a budget-matched reproduction of the evolutionary search procedure, evaluated under the same backend, calibration set, parser/schema, and gold-loss objective (Fernando et al., 2024).

Goldsmith. Goldsmith is the method described in Section 3. It summarizes the highest-loss gold errors into textual-gradient edit directions, maintains optimization memory across rounds, asks an LLM editor for abstract candidate definitions, and accepts a candidate only when the same gold loss decreases. We report loss, 15-gold pass count, best round, evaluated candidates, elapsed time, and token usage.

4.3 Task-Stage Baselines

Task-stage baselines compare the resulting annotation workflow with low-budget supervised PLM baselines under the same task interface where possible. For OpenNER, Goldsmith score-routed review uses the optimized definition followed by score-routed review, while Goldsmith without review reports the first annotation pass before human correction. Goldsmith zero-shot uses the optimized definition but disables retrieval, judge scoring, and review, isolating the value of the learned definition

alone. Initial-prompt zero-shot uses 0 gold examples and the initial task description before prompt optimization, also without retrieval, judge scoring, or review. The PLM reference condition follows the local gold4-per-language setup: mBERT and XLM-R token classifiers are fine-tuned on 208 deterministic multilingual training examples. For CrossRE, Zero-shot LLM receives the sentence, marked head–tail pair, entity types, and relation-label set, but no gold examples or optimized definition. The PLM comparison uses typed-marker relation classifiers: the official BERT CrossRE anchor and stronger RoBERTa-large or DeBERTa-v3 encoder variants, all receiving the same sentence, gold entity pair, entity types, and relation-label set (Bassignana and Plank, 2022; Devlin et al., 2019; Liu et al., 2019; He et al., 2023). For CrossRE, all rows are evaluated on the same 29,171-pair evaluation slice. Goldsmith uses the optimized relation definition with reviewed feedback and retrieved references, while the PLM rows are low-budget supervised references trained from 200 sentences expanded into 10,593 training pairs. For PHEE V2, we compare initial zero-shot prompting with Goldsmith before and after score-routed review using argument micro-F1, relation micro-F1, trigger pass rate, and joint exact match.

4.4 Metrics

Prompt-optimization results report gold-set pass count, gold loss, best round, and evaluated candidate count. OpenNER task-stage results report supervision or feedback used by the system, typed precision, typed recall, micro-F1, macro-F1, and typed exact match on the shared held-out evaluation subset. CrossRE reports accuracy, macro-F1 over the positive relation classes, positive-relation recall, and positive-relation F1; the macro-F1 calculation excludes the dominant negative class. PHEE V2 reports argument and relation micro-F1, trigger pass rate, and joint exact match. OpenNER component ablations report precision, recall, F1, and F1 change relative to the main setting, while model ablations report F1 without review, F1 with review, and exact match.

Setting	Supervision / feedback	P	R	F1	Macro	Exact
Goldsmith score-routed review	15 gold + 193 review	0.8092	0.8257	0.8174	0.8919	0.8140
Goldsmith without review	15 gold	0.7293	0.7505	0.7398	0.8669	0.7749
Goldsmith zero-shot	15 gold	0.7133	0.7440	0.7283	0.8556	0.7613
Initial-prompt zero-shot	0 gold	0.7040	0.7441	0.7235	0.8546	0.7565
mBERT	208 ex.	0.4867	0.5595	0.5206	0.5413	0.5630
XLM-R	208 ex.	0.3281	0.3799	0.3521	0.3735	0.4210

Table 2: OpenNER task-stage results on a shared held-out subset, comparing Goldsmith review settings, zero-shot prompting, and low-budget PLM baselines.

5 Results and Analysis

5.1 Prompt Optimization Results

Table 3 isolates the definition-training problem before any held-out task evaluation. All optimizers start from the same short description, the same 15 gold examples, and the same candidate budget. Direct LLM rewriting improves the prompt but stalls at 7/15 passing gold items; OPRO (Yang et al., 2024) does better at 9/15, while APE (Zhou et al., 2023) and PromptBreeder (Fernando et al., 2024) reach 10/15 and 12/15, respectively. Goldsmith reaches 14/15 with loss 1.8030, a much larger improvement under the same budget. The main difference is not that Goldsmith uses a stronger editor, but that it converts the highest-loss gold failures into textual-gradient edit directions and still accepts edits only after measured gold-loss reduction. This result establishes optimization efficiency on the shared gold-loss objective; the downstream ablation in Table 5 then checks whether the optimized definition remains useful inside the annotation workflow.

Optimizer	Pass	Loss ↓	Best rnd./gen.
LLM rewrite-only	7/15	22.0303	7
OPRO	9/15	14.5909	16
APE	10/15	11.5606	N/A
PromptBreeder	12/15	8.9091	23 gen.
Goldsmith	14/15	1.8030	18

Table 3: OpenNER prompt-optimization results under a shared initial definition and 15-example gold calibration set. Pass denotes the number of gold examples solved, and lower gold loss is better.

Figure 4 shows the same pattern over time. The baselines occasionally find better candidates, but their trajectories remain noisy because they receive either no diagnostic signal or only aggregate history. Goldsmith produces a steadier loss drop, which is the behavior needed in the definition-building stage: the optimizer must turn a few expert examples into

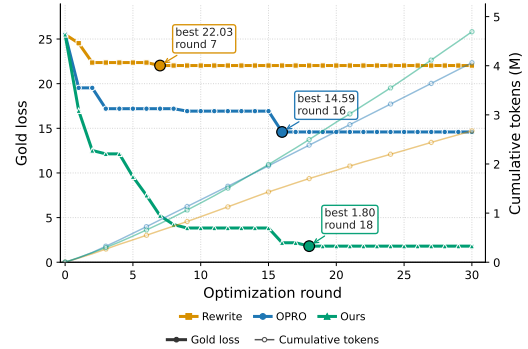


Figure 4: OpenNER gold-loss and token-use trajectories for LLM rewrite-only, OPRO, and Goldsmith. Thick lines show gold loss and thin lines show cumulative token usage over optimization rounds.

a more precise operational definition rather than merely generate fluent prompt variants.

5.2 Task Results

OpenNER. Table 2 reports the multilingual typed span-labeling result. All rows use the same held-out evaluation subset, after excluding the 15 calibration examples and the reviewed feedback items. The without review row evaluates the optimized definition after the first annotation pass. The score-routed review row first corrects low-judge-score items as reviewed feedback, promotes them to reviewed references, and reruns annotation over the target corpus before evaluating on the same subset. Under this second-pass protocol, Goldsmith reaches 0.8174 micro-F1, 0.8919 macro-F1, and 0.8140 typed exact match. This supports the intended division of labor. Prompt training makes the definition usable, while judge routing and review concentrate expert effort on likely errors instead of treating all items equally.

The same table also shows why the comparison is not simply “LLM versus PLM.” The optimized-definition zero-shot row improves over the initial-prompt zero-shot row, but both trail the normal

without review run with retrieved references. This separates two effects: prompt optimization improves the operational definition, while retrieval still provides useful in-context task grounding. The low-budget mBERT and XLM-R rows are weaker under this data budget, which is consistent with the paper’s target setting: supervised encoders become attractive after the task is stable and more labels exist, but they are a poor fit for the earlier definition-building phase. These PLM numbers should therefore be read as budget-matched baselines, not as reproductions of full-data results reported in prior supervised NER work; their training data are deliberately limited to the same order of magnitude as the gold and review budget used by the annotation workflow.

Setting	Acc.	Pos. Macro	Pos. R	Pos. F1
Goldsmith	0.8650	0.4273	0.7273	0.5439
Zero-shot LLM	0.8720	0.1640	0.1980	0.2470
BERT	0.3402	0.0883	0.4845	0.1307
RoBERTa	0.3998	0.1108	0.5231	0.1511
DeBERTa	0.4174	0.1088	0.4834	0.1445

Table 4: CrossRE pair-level relation-classification results on the shared 29,171-pair evaluation slice.

CrossRE. Table 4 reports pair-level relation classification on the same 29,171-pair CrossRE evaluation slice. This removes the denominator ambiguity: Goldsmith and the PLM anchors are compared on the same final evaluation scope, although they use different learning mechanisms. Accuracy is not the decisive metric here because `no_relation` dominates the test pairs. Goldsmith reaches accuracy 0.8650, positive macro-F1 0.4273, positive recall 0.7273, and positive F1 0.5439. The result suggests that the pipeline is not limited to span boundaries. When the interface changes from span recovery to relation classification, the same principle still matters: a small set of reviewed examples and prompt-training feedback can steer the model toward rare positive labels that accuracy-oriented baselines tend to miss.

PHEE V2. PHEE V2 extends the evaluation to controlled event-argument extraction with a fixed trigger anchor. The initial zero-shot setting reaches argument micro-F1 0.6637, relation micro-F1 0.6620, trigger pass rate 0.9988, and joint exact match 0.3513. Goldsmith without review improves these values to 0.7111, 0.7066, 1.0000, and 0.3958, respectively. Score-routed review further reaches argument micro-F1 0.7471, relation micro-

F1 0.7427, trigger pass rate 0.9988, and joint exact match 0.4500. This result supports cross-task applicability across span, pair-relation, and fixed-trigger argument interfaces.

5.3 Ablation Experiments

Setting	P	R	F1	Δ F1
Ours	0.8092	0.8257	0.8174	–
Initial def.	0.6510	0.6820	0.6661	-0.1513
Random-10 ref.	0.7832	0.8001	0.7915	-0.0259

Table 5: OpenNER ablations of definition optimization and reference selection, reported with precision, recall, and micro-F1.

Table 5 separates definition quality from reference selection. All ablation rows use the same OpenNER evaluation subset as Table 2. Removing prompt optimization drops F1 from 0.8174 to 0.6661, indicating that the learned operational definition is not replaceable by the initial prose description. Together with the calibration loss result in Table 3, this shows both that Goldsmith finds lower-loss definitions more efficiently and that using the optimized definition matters for the downstream task-stage run. Replacing structured retrieval with random references is less damaging but still reduces F1 to 0.7915. The two ablations therefore support different parts of the method: gold-loss prompt training supplies the main task-boundary improvement, while retrieval quality supplies additional stability during batch annotation.

Backend	Provider	w/o review	w/ review	Exact
GPT-5.5	OpenAI	0.7398	0.8174	0.8140
GPT-5.4	OpenAI	0.7222	0.8012	0.7989
Kimi K2.5	Moonshot	0.7160	0.7890	0.7820
DSv4p	DeepSeek	0.7660	0.7947	0.7863

Table 6: OpenNER backend ablation using the same optimized definition, with and without score-routed review.

Table 6 asks whether the result is tied to one backend. GPT-5.5 and GPT-5.4 are OpenAI models, Kimi K2.5 is from Moonshot AI, and DSv4p is DeepSeek V4 Pro from DeepSeek (OpenAI, 2026b,a; Moonshot AI, 2026; DeepSeek, 2026); the exact run-facing identifiers and access month are listed in Appendix B.1. The comparison keeps the optimized definition, review protocol, and held-out evaluation setting fixed across backends. The reviewed ranking broadly follows external model-

capability leaderboards such as the Artificial Analysis Intelligence Index, which aggregates reasoning, coding, mathematics, and knowledge benchmarks (Artificial Analysis, 2026). Model quality still matters: GPT-5.5 gives the best reviewed F1 and exact match, while DSv4p has the strongest without review F1 but loses that lead after review. At the same time, the reviewed scores are relatively close across capable backends. This is the desired behavior of the harness: optimized definitions, retrieval, repair, judge routing, and human review do not eliminate model differences, but they reduce the extent to which the final annotation quality is determined by raw backend strength alone.

6 Conclusion

Goldsmith addresses a narrow but common stage of annotation: experts know the phenomenon they want to annotate, but the operational definition is still being formed and only a few authoritative examples are available. The central result is that those examples can be used as executable supervision rather than only as static demonstrations. In prompt optimization, gold-loss-guided textual-gradient editing produces a substantially stronger operational definition than direct LLM rewriting or OPRO. In task-stage evaluation, the resulting definition, combined with retrieval, judge routing, and human review, improves OpenNER typed span labeling, CrossRE positive-relation classification, and PHEE V2 fixed-trigger event-argument extraction under low-label budgets.

The broader implication is that long-context LLM annotation should not be reduced to adding more examples to a prompt. Its practical value depends on a harness that keeps the schema fixed, tests definition edits against gold loss, repairs and audits model outputs, and sends uncertain cases back to human review. This does not replace supervised PLM pipelines once large stable datasets exist. Instead, it provides a way to reach that stable task definition more efficiently, with explicit traces of which gold examples shaped the definition and where human review changed the corpus.

Limitations

Goldsmith is designed for tasks whose boundaries can be expressed through natural-language definitions and examples. It may be less suitable when the task depends on private expert knowledge absent from the gold examples, labels are highly am-

biguous, or LLM API calls are prohibited. At very large scale, token costs, provider limits, and retry overhead can also make direct LLM annotation inefficient. In such settings, Goldsmith is better used to build a small, high-quality labeled set and a stable operational definition before training a supervised PLM or other task-specific model for large-scale labeling.

Ethical Considerations

Goldsmith is intended to reduce the cost of building annotation workflows, not to replace expert judgment in high-stakes domains. The workflow records model calls, prompt revisions, reviewer decisions, and export artifacts so that users can inspect and correct model behavior. It sends task text, prompts, retrieved references, model predictions, and judge inputs to hosted LLM APIs; private, restricted, or sensitive corpora therefore require data-governance, provider-policy, and institutional review before use. Our experiments use derived slices from existing OpenNER, CrossRE, and PHEE V2 artifacts, and users must follow the source datasets' licenses and redistribution terms. Human review remains necessary because model predictions and judge scores are not authoritative labels, particularly in medical, legal, safety-critical, or other high-risk settings.

Acknowledgments

This project was supported by funding from the 2026 Sun Yat-sen University Undergraduate Innovation and Entrepreneurship Training Program. We thank Jie Qiu, Zhouxiaoyao Li, Beinuo Wang, and Xiaotong Liu for their substantial help during the early development of the project.

References

- Zaheer Abbas, Rishabh Agarwal, Ankesh Anand, Feryal Behbahani, Bernd Bohnet, Stephanie Chan, Eric Chu, John Co-Reyes, Aleksandra Faust, Hugo Larochelle, Azade Nova, Luis Rosias, Avi Singh, Biao Zhang, and Lei Zhang. 2024. [Many-shot in-context learning](#). In *Advances in Neural Information Processing Systems 37*, pages 76930–76966.
- Artificial Analysis. 2026. [Artificial analysis intelligence index](#). Online leaderboard. Accessed 2026-05-26.
- Elisa Bassignana and Barbara Plank. 2022. [CrossRE: A cross-domain dataset for relation extraction](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 3592–3604, Abu Dhabi, United

- Arab Emirates. Association for Computational Linguistics.
- Amanda Bertsch, Maor Ivgi, Emily Xiao, Uri Alon, Jonathan Berant, Matthew R. Gormley, and Graham Neubig. 2025. [In-context learning with long-context models: An in-depth exploration](#). In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 12119–12149. Association for Computational Linguistics.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, and 12 others. 2020. [Language models are few-shot learners](#). *Advances in Neural Information Processing Systems*.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online. Association for Computational Linguistics.
- Shih-Chieh Dai, Aiping Xiong, and Lun-Wei Ku. 2023. [LLM-in-the-loop: Leveraging large language model for thematic analysis](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 9993–10001.
- DeepSeek. 2026. [List models](#). API documentation. Accessed 2026-05-26.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Chrisantha Fernando, Dylan Banarse, Henryk Michalewski, Simon Osindero, and Tim Rocktäschel. 2024. [Promptbreeder: Self-referential self-improvement via prompt evolution](#). In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 13481–13544. PMLR.
- Fabrizio Gilardi, Meysam Alizadeh, and Maël Kubli. 2023. [ChatGPT outperforms crowd workers for text-annotation tasks](#). *Proceedings of the National Academy of Sciences*, 120(30):e2305016120.
- Pengcheng He, Jianfeng Gao, and Weizhu Chen. 2023. [DeBERTaV3: Improving DeBERTa using ELECTRA-style pre-training with gradient-disentangled embedding sharing](#). In *The Eleventh International Conference on Learning Representations*.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. [LoRA: Low-rank adaptation of large language models](#). In *International Conference on Learning Representations*.
- Jingwei Huang, Donghan M. Yang, Ruichen Rong, Kuroush Nezafati, Colin Treager, Zhikai Chi, Shidan Wang, Xian Cheng, Yujia Guo, Laura J. Klesse, Guanghua Xiao, Eric D. Peterson, Xiaowei Zhan, and Yang Xie. 2024. [A critical assessment of using chatgpt for extracting structured data from clinical notes](#). *npj Digital Medicine*.
- Weiwen Liu, Xu Huang, Xingshan Zeng, Xinlong Hao, Shuai Yu, Dexun Li, Shuai Wang, Weinan Gan, Zhengying Liu, Yuanqing Yu, Zezhong Wang, Yuxian Wang, Wu Ning, Yutai Hou, Bin Wang, Chuhan Wu, Xinzhi Wang, Yong Liu, Yasheng Wang, and 8 others. 2025. [Toolace: Winning the points of llm function calling](#). In *The Thirteenth International Conference on Learning Representations*.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [RoBERTa: A robustly optimized BERT pretraining approach](#). *Preprint*, arXiv:1907.11692.
- Moonshot AI. 2026. [Kimi models](#). Model documentation. Accessed 2026-05-26.
- OpenAI. 2026a. [GPT-5.4 model](#). Product announcement. Accessed 2026-05-26.
- OpenAI. 2026b. [GPT-5.5 model](#). Product announcement. Accessed 2026-05-26.
- Chester Palen-Michel, Maxwell Pickering, Maya Kruse, Jonne Sällevä, and Constantine Lignos. 2025. [OpenNER 1.0: Standardized open-access named entity recognition datasets in 50+ languages](#). In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 33649–33674, Suzhou, China. Association for Computational Linguistics.
- Reid Pryzant, Dan Iter, Jerry Li, Yin Tat Lee, Chenguang Zhu, and Michael Zeng. 2023. [Automatic prompt optimization with “gradient descent” and beam search](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7957–7968.
- Shengqian Qin, Yakun Zhu, Linjie Mu, Shaoting Zhang, and Xiaofan Zhang. 2025. [Meta-tool: Unleash open-world function calling capabilities of general-purpose large language models](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational*

- Linguistics (Volume 1: Long Papers)*, pages 30653–30677. Association for Computational Linguistics.
- Kiran Ramnath, Kang Zhou, Sheng Guan, Soumya Smruti Mishra, Xuan Qi, Zhengyuan Shen, Shuai Wang, Sangmin Woo, Sullam Jeoung, Yawei Wang, Haozhu Wang, Han Ding, Yuzhe Lu, Zhichao Xu, Yun Zhou, Balasubramaniam Srinivasan, Qiaojing Yan, Yueyan Chen, Haibo Ding, and 2 others. 2025. [A systematic survey of automatic prompt optimization techniques](#). In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 33066–33098.
- Oscar Sainz, Iker Garcia-Ferrero, Rodrigo Agerri, Oier Lopez de Lacalle, German Rigau, and Eneko Agirre. 2024. [GoLLIE: Annotation guidelines improve zero-shot information-extraction](#). In *The Twelfth International Conference on Learning Representations*.
- Burr Settles. 2009. [Active learning literature survey](#). Technical Report 1648, University of Wisconsin–Madison.
- Zhaoyue Sun, Gabriele Pergola, Byron C. Wallace, and Yulan He. 2024. [Leveraging ChatGPT in pharmacovigilance event extraction: An empirical study](#). In *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 344–357, St. Julian’s, Malta. Association for Computational Linguistics.
- Zhen Tan, Dawei Li, Song Wang, Alimohammad Beigi, Bohan Jiang, Amrita Bhattacharjee, Mansoor Karami, Jundong Li, Lu Cheng, and Huan Liu. 2024. [Large language models for data annotation and synthesis: A survey](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*.
- Katrin Tomanek and Fredrik Olsson. 2009. [A web survey on the use of active learning to support annotation of text data](#). In *Proceedings of the NAACL HLT 2009 Workshop on Active Learning for Natural Language Processing*, pages 45–48, Boulder, Colorado. Association for Computational Linguistics.
- Shuohang Wang, Yang Liu, Yichong Xu, Chenguang Zhu, and Michael Zeng. 2021. [Want to reduce labeling cost? GPT-3 can help](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*.
- Derong Xu, Wei Chen, and Wenjun Peng. 2024. [Large language models for generative information extraction: a survey](#). *Frontiers of Computer Science*.
- Chengrun Yang, Xuezhi Wang, Yifeng Lu, Hanxiao Liu, Quoc V. Le, Denny Zhou, and Xinyun Chen. 2024. [Large language models as optimizers](#). In *International Conference on Learning Representations*.
- Mert Yuksekogonul, Federico Bianchi, Joseph Boen, Sheng Liu, Pan Lu, Zhi Huang, Carlos Guestrin, and James Zou. 2025. [Optimizing generative AI by backpropagating language model feedback](#). *Nature*, 639(8055):609–616.
- Jianfei Zhang, Bei Li, Jun Bai, Rumei Li, Yanmeng Wang, Chenghua Lin, and Wenge Rong. 2025a. [Selecting demonstrations for many-shot in-context learning via gradient matching](#). In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 11686–11704. Association for Computational Linguistics.
- Ruoyu Zhang, Yanzeng Li, Yongliang Ma, Ming Zhou, and Lei Zou. 2023. [LLMaAA: Making large language models as active annotators](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 13088–13103.
- Xiaoqing Zhang, Ang Lv, Yuhao Liu, Flood Sung, Wei Liu, Jian Luan, Shuo Shang, Xiuying Chen, and Rui Yan. 2025b. [More is not always better? enhancing many-shot in-context learning with differentiated and reweighting objectives](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 30539–30552, Vienna, Austria. Association for Computational Linguistics.
- Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. 2023. [Large language models are human-level prompt engineers](#). In *International Conference on Learning Representations*.
- Kaijian Zou, Muhammad Khalifa, and Lu Wang. 2025. [On many-shot in-context learning for long-context evaluation](#). In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 25605–25639. Association for Computational Linguistics.

A Data Construction and Gold Selection

The three task packages are constructed with the same principle: first build a deterministic task slice, then reserve a 15-item calibration set that maximizes coverage before matching the full-pool distribution. The scripts write Rosetta/Prodigy-compatible JSONL records with source text, spans or relation labels, task identifiers, and metadata.

A.1 OpenNER Typed Span Slice

The OpenNER typed experiments use the local Rosetta-formatted OpenNER release after conversion from BIO files to JSONL. The conversion procedure reconstructs token offsets and typed spans, then writes records with schema `rosetta.prodigy_jsonl.v1`. The deterministic multilingual slice is recorded with its seed, language coverage, and sampling statistics.

OpenNER deterministic slice sampler

```
Input: converted OpenNER JSONL files, seed,
      per_language = 50
For each language file:
  For each task:
    key = SHA256(seed, language, task_id)
  Sort tasks by (key, task_id)
  Select the first per_language tasks
Merge all selected language slices
Write all.jsonl and manifest.json
```

With seed 9 this yields 52 languages, 2,600 tasks, and 3,833 typed spans: 1,424 PER, 1,367 LOC, and 1,042 ORG. Any binary NE conversion is used only for OpenNER-derived PLM diagnostics, not as the official OpenNER task.

A.2 OpenNER Gold Selection

The OpenNER calibration set is selected by a deterministic coverage-first procedure. Rows are featurized by language group, label-set state, length bin, and a stable SHA256 tie-breaker over `gold15`, seed, and `row_id`. Length bins use thresholds 40, 100, and 220 characters.

Gold15 coverage-first selector

```
Input: candidate rows R, target size n = 15
For each row r in R:
  group(r) = language or domain
  labels(r) = label set or relation label
  length_bin(r) = discretized text length
  tie(r) = SHA256(selector_name, seed, row_id)

Search feasible selected sets S of size n:
  Maximize group coverage, label coverage, and
  length-bin coverage
  Then minimize L1 distance between selected
  and full-pool distributions
  Then break ties by stable SHA256 order
```

```
Output: gold15.jsonl, remaining pool JSONL,
        selection report
```

The selection statistics record 2,600 candidate rows, 15 selected rows, 2,585 pool rows, 15 language groups covered, all four label states covered (PER, ORG, LOC, NO_LABEL), all four length bins covered, and no overlap between gold and pool files.

A.3 CrossRE Pair-Level Slice

The CrossRE relation experiments use a compact package generated from the flattened sentence-level data. Starting from flattened sentence-level CrossRE JSONL, the script groups rows by domain and computes a SHA256 key from seed, domain, and `doc_key`. For each of the six domains {ai, literature, music, news, politics, science}, rows are sorted by (key, id) and the first 200 are selected.

CrossRE pair-view construction

```
Input: selected sentence-level CrossRE records
For each sentence record:
  Read entity mentions and gold relations
  Enumerate directed HEAD -> TAIL entity pairs
  If a gold relation exists for the directed
  pair:
    label = relation type
  Else:
    label = no_relation
  Write sentence, HEAD span/type, TAIL span/
  type, label
```

This produces 1,200 sentence-level tasks and a directed pair-level view with 39,764 entity-pair classification items. The resulting manifest reports 35,275 `no_relation` items, making positive-class metrics necessary alongside accuracy.

A.4 CrossRE Gold Selection

CrossRE gold calibration sets are selected by a deterministic coverage-first procedure. The main relation-classification experiments use the pair-level `rc_pairs_gold15` output. For each row, the stable tie-breaker is a SHA256 hash over `crossre-gold15`, seed, domain, identity, and `row_id`. The selector first greedily builds a 15-item set that maximizes domain, relation-label, and length-bin coverage, then performs exhaustive single-swap local search until no swap improves the lexicographic objective. The selection statistics record 39,764 candidates, 15 selected items, all six domains covered, 15 relation labels covered, all four length bins covered, and 39,749 remaining pool items.

A.5 PHEE V2 Event-Argument Setting

PHEE V2 is used as a controlled event-argument extraction setting associated with pharmacovigilance event extraction (Sun et al., 2024). Each item supplies a fixed event trigger anchor. The annotation interface requires argument spans for Subject, Treatment, and Effect, together with trigger-to-argument relations. We report argument micro-F1, relation micro-F1, trigger pass rate, and joint exact match for initial zero-shot prompting, Goldsmith without review, and Goldsmith score-routed review.

B Evaluation Evidence Package

B.1 Model and Runtime Details

Table 7 lists the model families, run-facing model identifiers, access month, and decoding/runtime parameters used in the main LLM experiments. Closed hosted models can change over time; for this reason we report the access month, provider-facing identifier, temperature, retry bound, concurrency, and candidate/search settings rather than treating a model nickname alone as a reproducible configuration. Platform-call failures are retried up to the run bound, while successful calls with invalid structured output enter format repair before the item is queued.

B.2 OpenNER Split Accounting

The main OpenNER score-routed review run contains 2,600 target items, 15 calibration items, and 193 reviewed feedback items. After pass1, the lowest judge-score items are corrected as human review feedback and promoted to reviewed references. The system then reruns annotation over the target corpus; reported score-routed review metrics are computed on the same held-out subset used by the without review and baseline rows after excluding calibration and reviewed feedback items.

B.3 CrossRE Scope Accounting

All CrossRE rows in Table 4 are reported on the same 29,171-pair evaluation slice. The Goldsmith workflow uses reviewed feedback and retrieved references during annotation, while final metrics are computed on this full pair-level evaluation slice. The PLM references use a low-budget supervised setting: 200 training sentences are expanded into 10,593 training pairs before evaluation on the same 29,171-pair slice. This appendix records how the pair-level slice, reviewed feedback, and PLM low-budget training split are constructed.

B.4 GT-only RAG Reference Count Sweep

This diagnostic OpenNER sweep isolates the number of retrieved similar references. It uses the same optimized operational definition as the main OpenNER experiment, a fixed 500-example evaluation sample, and oracle gold-truth examples as the retrieval pool. It retrieves only similar examples, with no reviewed model predictions included as references. Performance improves substantially from $k = 0$ to moderate k , peaks at $k = 14$ with 0.8026 micro-F1, and then declines slightly for larger k . This supports tuning the number of in-context references rather than assuming that more retrieved examples are always better.

B.5 Prompt-Optimization Trace

Table 9 reports the OpenNER prompt-optimization trace used for the main optimizer comparison. All five optimizers use the same initial definition, 15 gold examples, candidate count 5, maximum 30 rounds, patience 5, and the same gold loss. The table reports raw loss per round for rewrite-only, OPRO, and Goldsmith, plus the running best Goldsmith loss; the summary comparison also includes APE and PromptBreeder. It also reports the approximate size of the accepted Goldsmith operational definition and the estimated tokens consumed by that Goldsmith optimization round. The definition length is reported as an approximate token count using characters divided by four, while round tokens include candidate generation, gold evaluation, and repair calls.

B.6 Gold-Loss Parameter Configuration

The main text presents the loss symbolically so that the objective is not tied to arbitrary numeric scales. The implementation instantiates the following fixed configuration for the reported experiments. These values are held constant when comparing candidate definitions; they are not tuned separately for individual candidates or rounds.

The boundary and relation rate weights are normalized by their sum, so their absolute scale does not affect the corresponding rate. Likewise, $\lambda_B + \lambda_T = 1$ and $\lambda_S + \lambda_R = 1$ make the component weights interpretable as relative contributions. The factor ρ is a monotonic reporting transformation: removing it would change only the displayed loss values, not candidate ordering or the acceptance decision. The implementation currently does not add a prompt-length penalty to the loss.

Use	Provider family	Run-facing identifier	Access	Temp.	Main runtime settings
Default annotation / judge	OpenAI	gpt-5.5	May 2026	0.0 / 0.0	max tokens 4096; retry bound 20; concurrency 30
OpenNER model ablation	OpenAI	gpt-5.4	May 2026	0.0 / 0.0	same score-routed review protocol as default
OpenNER model ablation	Moonshot AI	kimi-k2.5	May 2026	0.0 / 0.0	same first-pass protocol; pass1 completed-item probe
OpenNER model ablation	DeepSeek	deepseek-v4-pro	May 2026	0.0 / 0.0	same score-routed review protocol as default
Prompt optimization	OpenAI	gpt-5.5	May 2026	0.3 / 0.0	30 rounds; 5 candidates; patience 5

Table 7: LLM backends and runtime configurations used for annotation, judging, model ablations, and prompt optimization.

k	Micro P	Micro R	Micro F1	Macro F1	Exact
0	0.7173	0.7296	0.7233	0.8459	0.7360
1	0.7542	0.7652	0.7597	0.8611	0.7480
2	0.7569	0.7599	0.7584	0.8627	0.7600
3	0.7644	0.7704	0.7674	0.8660	0.7620
4	0.7894	0.7863	0.7878	0.8709	0.7720
5	0.7971	0.7876	0.7923	0.8752	0.7720
6	0.7849	0.7797	0.7823	0.8716	0.7700
7	0.7742	0.7823	0.7782	0.8690	0.7680
8	0.7807	0.7797	0.7802	0.8734	0.7760
9	0.7835	0.7876	0.7855	0.8725	0.7720
10	0.8048	0.7942	0.7995	0.8789	0.7780
11	0.7868	0.7889	0.7879	0.8767	0.7660
12	0.7836	0.7929	0.7882	0.8700	0.7640
13	0.7887	0.7929	0.7908	0.8713	0.7720
14	0.8059	0.7995	0.8026	0.8820	0.7860
15	0.7763	0.7691	0.7727	0.8778	0.7740
16	0.7997	0.7955	0.7976	0.8779	0.7760
17	0.7866	0.7929	0.7898	0.8733	0.7680
18	0.7925	0.7810	0.7867	0.8764	0.7740
19	0.7886	0.7876	0.7881	0.8701	0.7720
20	0.7857	0.7836	0.7847	0.8754	0.7700

Table 8: OpenNER GT-only diagnostic sweep over the number of retrieved gold references k .

B.7 CrossRE Prompt-Optimization Trace

The CrossRE pair-level optimizer starts with 8/15 calibration items passing and reaches 15/15 with zero gold loss at round 8. The complete trace is shown in Table 11; the run evaluated 40 candidate prompts under the same gold-loss protocol used for OpenNER.

C Baseline Implementation Details

C.1 Task-Stage Baselines

The OpenNER LLM baselines use the same typed span interface as Goldsmith. **Zero-shot LLM** receives the task schema and initial task description without gold examples, retrieval, review, or prompt training. **Static ICL LLM** receives the same 15 gold examples as in-context references but does not optimize the operational definition and does not use score-routed review. **Goldsmith without review** uses the optimized definition but reports the first annotation pass before human correction. **Goldsmith**

score-routed review uses the optimized definition, corrects low judge-score items as reviewed feedback, promotes them to reviewed references, and reruns annotation over the target corpus before reporting the second-pass result.

The OpenNER PLM baselines are low-budget token-classification models. The training split contains 208 deterministic multilingual examples from the same typed OpenNER setting. mBERT and XLM-R are fine-tuned as token classifiers over the typed PER/ORG/LOC label space and evaluated by reconstructed typed spans. These rows are intended as low-label supervised anchors, not as fully tuned large-data NER systems.

The CrossRE LLM setting is pair-level relation classification: the input supplies a sentence, a marked HEAD entity, a marked TAIL entity, entity types, and the candidate relation-label set. The model predicts one relation label or no_relation. The typed-marker PLM baselines use the same given-pair interface. The reported PLM setting selects 200 training sentences, expands them into 10,593 training pairs, and evaluates on 29,171 test pairs from the remaining 1,000 sentences. BERT is the CrossRE anchor encoder, while RoBERTa-large and DeBERTa-v3 are stronger encoder variants under the same typed-marker input format.

C.2 Prompt-Optimization Baselines

The prompt-optimization comparison uses five optimizers under a shared search protocol: same initial OpenNER operational definition, same 15 gold examples, same candidate count or matched search budget, same loss, same acceptance rule, and the same stop policy. **LLM rewrite-only** receives only the current operational definition and asks the LLM to produce candidate rewrites; it receives no scores, history, gold examples, failed examples, or textual gradients. **OPRO** receives previous operational definitions and their loss-derived scores, but does not see source text, gold answers, model answers, or error types. **APE** uses its candidate-generation

Round	Rewrite loss	OPRO loss	Goldsmith loss	Goldsmith best	Def. tok.	Round tok.
0	25.5152	25.5152	25.5152	25.5152	433	0
1	24.5303	19.5303	16.9697	16.9697	450	95,848
2	22.3636	23.0152	12.5152	12.5152	521	98,151
3	23.1667	17.1970	12.1364	12.1364	578	104,963
4	23.1212	20.6667	12.1364	12.1364	671	112,011
5	25.2727	19.1515	9.5758	9.5758	740	120,960
6	23.1667	19.5303	7.4924	7.4924	768	125,760
7	22.0303	17.3485	5.2121	5.2121	822	127,690
8	23.6970	17.5303	4.2121	4.2121	907	136,372
9	24.6970	16.9242	3.8333	3.8333	930	140,810
10	23.1667	19.5303	4.2121	3.8333	943	143,974
11	22.0303	18.9242	4.2121	3.8333	1,010	146,753
12	24.3636	21.1212	3.8333	3.8333	1,101	154,491
13	26.9848	19.3788	4.2121	3.8333	1,101	162,326
14	23.8636	18.9242	4.2121	3.8333	1,101	160,502
15	27.8636	18.0606	4.2121	3.8333	1,151	157,544
16	28.5556	14.5909	2.1818	2.1818	1,208	169,331
17	28.5556	19.5303	2.1818	2.1818	1,208	167,254
18	29.3636	19.0152	1.8030	1.8030	1,252	171,998
19	27.4192	19.5303	2.1818	1.8030	1,252	178,037
20	28.5556	20.6667	1.8030	1.8030	1,168	176,575
21	27.4192	16.2121	3.3939	1.8030	1,200	168,229
22	27.4192	19.3485	1.8030	1.8030	1,200	177,896
23	28.5556	18.9242	2.1818	1.8030	1,225	173,501
24	28.1768	17.3485	1.8030	1.8030	1,309	177,479
25	27.4192	17.7273	1.8030	1.8030	1,372	185,558
26	28.5556	17.8788	1.8030	1.8030	1,384	187,319
27	28.5556	19.5303	1.8030	1.8030	1,384	193,772
28	28.5303	16.5455	1.8030	1.8030	1,384	192,780
29	29.3636	19.1515	2.1818	1.8030	1,375	189,262
30	29.6667	17.7273	2.1818	1.8030	1,444	194,873

Table 9: Per-round OpenNER gold loss and token usage for LLM rewrite-only, OPRO, and Goldsmith. Definition tokens estimate the accepted Goldsmith definition length; round tokens estimate optimization and evaluation usage.

and scoring implementation under the shared GPT-5.5 evaluation protocol. **PromptBreeder** uses a budget-matched reproduction of the evolutionary search procedure. **Goldsmith** summarizes high-loss gold errors into textual-gradient edit directions, asks an LLM editor for abstract candidate definitions, and accepts a candidate only when gold loss decreases. The exact optimizer prompt templates and the final operational definitions are listed in Appendix D, so this section records only the implementation differences.

C.3 Agent-Assisted Code Work

We used Codex with GPT-5.5 as an assistant for part of the code construction work. The authors reviewed the resulting code and remain responsible for the final submission.

D Prompt Artifacts

This appendix records the optimizer templates and operational definitions used in the experiments. Fixed schema, parser contracts, and JSON output protocols remain part of the harness rather than the optimizable definition. Concrete failed-example blocks are represented by placeholders because they are training-only feedback, not deployed prompt text.

Optimizer implementation: LLM rewrite-only baseline

System prompt:

You are a baseline prompt editor. Return only candidate concept definitions in the requested tags.

User prompt template:

Rewrite the concept prompt below into { candidate_count} better and more precise candidate prompts.

Current optimizable definition:

{current_operational_definition}

Rules:

1. Use only the current prompt above. Do not ask for or invent examples, scores, failure details, history, gradients, logs, or diagnostics.
2. Each candidate must be a standalone concept definition usable for annotation.
3. Include only task definition and semantic boundary guidance.
4. Do not include label sets, JSON schema, annotation markup, parser rules, output format, repair instructions, examples, explanations, or revision notes.
5. If two candidates are similar, make the later one shorter or more precise.

Return exactly this tagged format:

```
<CANDIDATE_1>...</CANDIDATE_1>
...
<CANDIDATE_k>...</CANDIDATE_k>
```

Optimizer implementation: OPRO

System prompt:

Parameter	Value	Role
ρ	100	Reporting scale applied to the normalized gold loss
α_{miss}	1.2	Weight on missed boundaries/relations
α_{extra}	1.0	Weight on extra boundaries/relations
λ_B	0.75	Boundary component of span loss
λ_T	0.25	Type component of span loss
λ_S	0.5	Span component of span-relation loss
λ_R	0.5	Relation component of span-relation loss
λ_{exact}	0.10	Typed/span-structure exact-mismatch penalty
λ_{stab}	0.05	Inconsistency penalty for unstable repeated outputs
λ_{trigger}	1.0	Fixed-trigger contract violation penalty
λ_{parse}	1.25	Penalty for an unparseable model response

Table 10: Gold-loss parameters used by the Rosetta implementation. The denominator safeguards $\max(1, n)$ prevent division by zero for empty gold or prediction sets. For relation-only classification, label disagreement is the task loss and is not counted again as a separate exact-mismatch penalty.

You are an OPRO prompt optimization assistant.
Return exactly one new concept definition inside <INS>...</INS>.

User prompt template:

You are using Optimization by PROMpting (OPRO) to improve an annotation concept prompt.

Below are historical concept prompts and their scores on the same 15 gold examples.
Higher score is better.

{prompt_score_history_only}

Current optimizable concept prompt:
{current_operational_definition}

Generate one different concept prompt that may obtain a higher score.

Rules:

1. Use only the prompt-score history above; do not ask for or invent error details.
2. Keep the new prompt concise. If two prompts are likely tied, prefer the shorter one.
3. Include only task definition and semantic boundary guidance.
4. Do not include label sets, JSON schema, annotation markup, parser rules, output format, repair instructions, examples, logs, or explanations.
5. Return only:

<INS>
new concept prompt
</INS>

Round	Gold loss ↓	Pass
Initial	46.6667	8/15
1	46.6667	8/15
2	46.6667	8/15
3	46.6667	8/15
4	33.3333	10/15
5	26.6667	11/15
6	13.3333	13/15
7	6.6667	14/15
8	0.0000	15/15

Table 11: CrossRE Goldsmith training trace on the 15-example gold calibration set, showing gold loss and pass count by optimization round.

Optimizer implementation: Goldsmith textual-gradient editor

Stage 1 system prompt:

You are the Ours textual-gradient critic.

Return concise textual gradients only, not a final prompt.

Stage 1 user prompt template:

Generate textual gradients for improving the current annotation concept prompt.

training_feedback_only=true

Current optimizable prompt:

{current_operational_definition}

Current loss:

{current_gold_loss}

Overall failure summary:

{failure_summary}

Failed gold examples with source text, gold answer, model answer, and error type:
{top_high_loss_gold_errors}

Return 3-5 concise textual gradients. Each gradient should explain why the current prompt caused the observed errors and what semantic boundary should change.

Output requirements:

1. Output only numbered or bulleted textual gradients.
2. Do not generate the final prompt.
3. Do not copy source text, gold answers, model answers, labels, JSON schema, annotation markup, parser rules, output format, or repair instructions into a reusable prompt.

Stage 2 system prompt:

You are the Ours prompt editor. Return only the final usable concept definition.

Stage 2 user prompt template:

Rewrite the concept prompt by applying one Ours textual gradient.

training_feedback_only=true

Current optimizable prompt:

{current_operational_definition}

Textual gradient {gradient_index}:
{textual_gradient}

Variant index: {variant_index}

Output requirements:

1. Return only the concept definition body usable in the next annotation round.
2. Apply the gradient as an abstract semantic boundary change.
3. Keep the prompt concise; if two rewrites are equivalent, prefer the shorter one.
4. Include only task definition and semantic boundary guidance.
5. Do not output labels, JSON schema, annotation markup, parser rules, output format, repair instructions, examples, explanations, failed example ids, or revision logs.
6. Do not copy source text, gold answers, or model answers.

OpenNER final definition: LLM rewrite-only baseline

Annotate every explicit proper name that names a single person, organization, or location. The name may appear in any language or script and must be assigned one, and only one, semantic type.

Include as person names all proper names for individual people: full names, one-token names, given names, surnames, initials, short forms, aliases, nicknames, and established personal-name compounds. Do not include titles, honorifics, ranks, offices, jobs, kinship terms, or descriptive phrases unless they are fixed within the written name.

Include as organization names proper names of collective or institutional entities, such as companies, institutions, agencies, government bodies, political parties, associations, banks, schools, religious bodies, committees, and named programs, initiatives, campaigns, or acronyms denoting those entities. Do not include generic descriptions, unnamed subunits, document or publication titles, products, software, models, versions, technical abbreviations, or formal phrases that are not entity names.

Include as location names proper names of geographic or geopolitical places, such as countries, cities, towns, regions, states, provinces, counties, districts, neighborhoods, territories, conventional place names, and named political areas. Do not include common place nouns, vague or relative locations, coordinates, dates, numbers, or descriptive geography unless it is part of an established name.

Use the exact contiguous text span only. Preserve all original characters and formatting features, including spelling,

script, case, diacritics, punctuation, spaces, hyphens, inflectional endings, possessives, particles, articles, connectors, and acronyms. Do not normalize, translate, expand, shorten, correct, or infer. Annotate complete established multiword names as single spans, but split adjacent coordinated or listed names unless the full expression is a conventional name. In CJK or other unspaced scripts, mark each complete name separately. If none appear, annotate nothing.

OpenNER final definition: OPRO

Multilingual NER for explicit surface proper names of persons, organizations, and places.

Annotate only contiguous text that is literally present and functions as the name of a particular entity. Do not annotate common descriptions, roles, offices, titles, occupations, kinship terms, categories, adjectives, nationalities, demonyms, dates, quantities, events, laws, reports, documents, products, releases, standards, slogans, technical terms, addresses, or other non-name phrases unless they are fixed within an eligible name.

PER: individual human names, real or fictional, including full names, given names, surnames, initials, aliases, nicknames, and shortened later mentions. Exclude honorifics, role words, professions, offices, kinship words, and descriptive references outside the name.

ORG: proper names of organized bodies or organization-like entities, including companies, institutions, government bodies, agencies, ministries, political parties, banks, schools, universities, teams, media outlets, nonprofits, military units, and formally named programs, projects, initiatives, or campaigns. Acronyms are ORG only when used as organization names. Exclude generic departments, administrative descriptions, document/law/report titles, products, releases, events, and abbreviations that do not name an organization.

LOC: proper names of geographic or geopolitical places, including countries, cities, towns, regions, states, provinces, districts, territories, landmarks, facilities used as places, natural features, seas, rivers, mountains, bodies of water, and conventional named areas. Bare place names are LOC even when used metonymically; a complete written name of a government, institution, company, team, or other organized body is ORG.

Choose the minimal complete contiguous name exactly as written. Include name-internal

articles, particles, prepositions, conjunctions, initials, hyphens, apostrophes, clitics, possessives, inflection, case endings, and script-specific name material; exclude surrounding punctuation, determiners, external prepositions, modifiers, appositives, explanations, titles, and role words. Keep conventional multiword names together, do not mark substrings inside longer eligible names, split coordinated or listed names into separate spans, and never translate, normalize, romanize, correct, expand, or infer.

OpenNER final definition: Goldsmith

Multilingual typed named-entity span detection for explicit mentions of persons, organizations, and locations.

Mark only explicit named-entity mentions in the source text and assign the single applicable type. Use dataset-style minimalism: if a name-like span is ambiguous between a person, title component, venue descriptor, facility name, event/work title, or generic description, exclude it unless the context clearly establishes a target entity. Keep only spans with clear entity evidence.

Person mentions include explicit personal names, surnames, shortened personal references, multi-token personal names, and explicit named or vocative references to a deity or sacred personal figure when used as a personal addressee or name. Include transliterated, romanized, dialectal, or informal-script forms meaning God, Lord, or a named sacred figure only when they function as direct sacred personal references. For sacred references, mark only the core name or direct reference; exclude epithets, praise formulas, descriptive complements, honorific expansions, and devotional descriptions unless fixed internal parts of the name. Exclude titles, occupations, honorifics, descriptive phrases, generic human or divine descriptions, and capitalized/name-like strings that merely resemble names. Suppress person-shaped names inside creative-work titles, media listings, slogans, headings, releases, screenings, or other non-entity phrases unless the syntax clearly refers to an actual human or sacred personal participant. Full personal names in ownership, attribution, sale, purchase, transfer, or agentive clauses remain person mentions when clearly referring to people.

Organization mentions include named institutional actors and standing organizational bodies such as institutions, agencies, companies, banks, departments, committees, acronyms for such bodies, and conventional sovereign state bodies such

as armed forces, militaries, and police. Otherwise require a distinctive proper-name component, jurisdictional name, or unambiguous standing-body identity. Exclude generic institutional nouns and descriptions, including phrases meaning government office, bureau, department, education bureau, or similar institutional types without distinctive naming or clear standing-body reference. Exclude numbered legislative terms, policies, methods, courses, releases, documents, events, festivals, products, training packages, schemes, initiatives, hubs, market products, and price or index acronyms unless they clearly name an organization. Do not label a facility, association, venue, harbor installation, landmark, or institutional-looking name as an organization when the context uses it as a physical place, vicinity, embarkation point, street/harbor reference, or topographic landmark.

Location mentions include clear geographic and geopolitical names, including countries, regions, cities, states or provinces, conventional multi-word place names, named geopolitical areas, and named physical venues or harbor/landmark places when used locatively or topographically. Prefer the bare proper place name inside broader descriptive, ideological, political, cultural, adjectival, or locative phrases. Do not include following generic place nouns or common/case-marked locative words such as square, street, plaza, district, area, office, department, or similar unless the full phrase is a conventional official place name. Be conservative with short single-token place-like strings before or modifying generic venue, facility, event, program, or title nouns: mark them only when they are clearly independent geographic or topographic place names, not facility-name components, event titles, descriptive modifiers, or proper-looking descriptors. Exclude generic location nouns, dates, quantities, adjectival demonyms, descriptive place words, and generic government or institutional common nouns.

Use exact surface substrings from the source text. Preserve spelling, accents, punctuation, script, spacing, and inflection. Keep conventional contiguous multi-token names as one span, including internal particles, articles, connectors, hyphens, acronyms, and script-specific case or possessive material. Split adjacent coordinated names into separate spans. For spaced scripts or tokenized text containing multiple place names, prefer separate complete place-name spans unless an internal connector forms one conventional name.

Do not translate, normalize, romanize, correct spelling, infer absent entities, or

expand a later short mention beyond its actual surface form. If no explicit, clearly supported mention of the target entity types appears, return no spans.

OpenNER initial task prompt

Multilingual OpenNER typed named-entity span detection.

Mark explicit person, organization, and location names in the source text. Assign each span exactly one label: PER, ORG, or LOC.

Use exact contiguous surface spans only. If no target entity is explicitly mentioned, return no spans.

OpenNER deployed final task prompt

Multilingual OpenNER typed named-entity span detection.

Mark every explicit named-entity mention in the source text and assign exactly one label: PER, ORG, or LOC.

PER includes personal names, surnames, shortened person mentions, and multi-token person names. Exclude titles, occupations, honorifics, and generic human descriptions unless they are part of the name.

ORG includes named institutional actors and organizational bodies such as organizations, institutions, agencies, companies, banks, departments, committees, and their acronyms. Exclude policies, methods, courses, releases, documents, events, festivals, products, training packages, and official-sounding schemes or initiatives unless they clearly name an organization or standing organizational body.

LOC includes geographic and geopolitical names: countries, regions, cities, states or provinces, conventional multi-word place names, and named geopolitical areas. Prefer the bare geopolitical name when it appears inside a broader descriptive, ideological, political, cultural, or adjectival country phrase. Do not include such modifiers in the LOC span unless the full phrase is a conventional official place name. Exclude generic location nouns, dates, quantities, demonyms used only adjectivally, and descriptive place words unless they are inseparable parts of the proper name.

Use exact surface substrings from the source text. Preserve spelling, accents, punctuation, script, spacing, and inflection. Keep conventional contiguous multi-token names as one span, including internal particles, articles, connectors, hyphens, acronyms, and script-specific case or possessive material. Split

adjacent coordinated names into separate spans. For CJK or tokenized text with spaces between location names, prefer separate complete place-name spans unless an internal connector forms one conventional name.

Do not translate, normalize, romanize, correct spelling, infer absent entities, or expand a later short mention beyond its actual surface form. If no explicit PER, ORG, or LOC mention appears, return no spans.

CrossRE initial task prompt

Cross-domain relation classification for English CrossRE entity pairs.

Classify only the provided directed HEAD -> TAIL entity pair.

The sentence, entity spans, entity types, and candidate relation labels are given.

Choose the relation label supported by local sentence evidence, or choose no_relation if no listed relation is expressed.

Do not discover entities, scan other pairs, reverse direction, or infer from background knowledge.

CrossRE deployed final task prompt

Cross-domain relation classification for English CrossRE directed entity pairs.

Classify only the single provided directed HEAD -> TAIL pair. The sentence and the HEAD/TAIL surface spans are fixed anchors. Do not discover entities, scan other pairs, reverse direction, add inverse edges, or infer from background knowledge.

Default decision rule:

- Return a positive relation only when the sentence gives clear local evidence that the directed HEAD entity has that relation to the TAIL entity.
- If the evidence is implicit, merely topical, based on broad world knowledge, based only on co-occurrence, or could apply equally to many nearby entities, choose no_relation.
- Prefer no_relation over a weak positive label. Precision is more important than guessing a plausible relation.
- Do not use `related-to` as a fallback for vague association. Use `related-to` only when the sentence explicitly states a contextual relation and no more specific label fits.

Label boundaries:

- `role`: explicit role, office, job, function, candidacy, lineup/team service, participation role, or acted/performed-as capacity.
- `physical`: explicit physical location, venue, residence, presence, geographic containment, or geopolitical containment.
- `general-affiliation`: explicit membership, association, political/organizational

- affiliation, genre identity, or group participation when no more specific role or structural relation is expressed.
- `part-of`: explicit structural or compositional inclusion: component, member, subgroup, subgenre, or item within a larger entity.
- `artifact`: creator, producer, author, developer, publisher, performer, or organization/person behind a specific work, product, book, album, song, algorithm, award, or artifact-like entity.
- `named`: alias, acronym, alternate name, renamed form, surname/full-name identity, or appositive naming.
- `temporal`: explicit relation to a date, period, competition edition, historical event, dated meeting, conference, or time-bearing context.
- `win-defeat`: winning, defeating, receiving an award, election outcome, or one side beating another.
- `origin`: founder, originator, source, inventor, derivation, originating entity, or granting/issuing source.
- `type-of`: explicit type/category relation.
- `usage`: explicitly uses, plays, employs, chooses, configures, or performs with an instrument, tool, technology, system, parameter, or similar used entity.
- `opposite`: explicit opposition, rivalry, conflict, battle, dispute, or adversarial relation.
- `topic`: a work, statement, degree, award, system, meeting, event, or document is explicitly about, in, concerning, or specialized in the TAIL topic/entity.
- `compare`: explicit comparison or contrast.
- `social`: explicit meeting, negotiation, interpersonal interaction, or direct person-to-person contact.
- `cause-effect`: one entity/event explicitly causes, results in, leads to, or produces another.

When multiple labels seem possible, choose the most specific label supported by explicit sentence evidence. If none is clearly supported for HEAD -> TAIL, output no_relation.