

Marker-free eye-gaze estimation using a single image and depth from defocus

David Hurtubise-Martin, Ferial Fass, Djemel Ziou*, Marie-Flavie Auclair-Fortier

Département d'informatique, Faculté des sciences, Université de Sherbrooke, Québec, Canada

Abstract

This paper presents a marker-free eye-gaze estimation approach using a single 2D camera, such as an integrated laptop webcam. The gaze-related features are estimated from iris localization and head pose estimated by using depth from defocus. A variational Bayesian multinomial logistic regression (VBMLR) framework is used as mapping from the estimated features to the position of regard, based on an 8-dimensional feature vector of head-pose and iris-displacement parameters. No external marker is needed. Experiments were conducted by estimating the gaze of people watching a computer screen at different distances and compared against five existing methods. The obtained scores demonstrate the effectiveness of the proposed approach.

Keywords: Eye-gaze estimation; marker-free; blur; depth from defocus; head pose; variational Bayesian logistic regression.

1 Introduction

Eye-gaze estimation is an active area of research in computer vision, cognitive sciences, marketing, and safe driving. In cognitive sciences, it is used for the study of neurological disorders, cognitive states, attention allocation, and human behaviours [1, 2, 3, 4]. In marketing, recommendations of goods and services can be personalized to a user based on what they are watching on the computer screen [5]. For safety, it is useful for monitoring the vigilance of vehicle drivers [6, 7]. Furthermore, in the fields of cinematography, eye-gaze estimation may be utilized to automate virtual camera control, optimize real-time shot selection, and analyze viewer attention for data-driven video editing [8, 9, 10].

Both active and passive computer-vision-based approaches have been proposed for eye-gaze estimation [11, 12, 13, 14, 15, 16]. For example, there are approaches in which electronic devices such as cameras equipped with active-illumination systems are used [17], and others with infrared illumination or complex and expensive systems [18, 15, 16]. Some of these approaches deal with head-motion limitations [19], and some require calibration procedures or multiple cameras [20, 21]. Most of the proposed approaches use passive color cameras operating in the visible spectrum or 3D cameras for the relief estimation of the human face [22, 21, 23]. In the context of this work, we are interested in the case where the computer screen is the scene watched by users in front of a computer equipped with an embedded camera. In other words, given an image of the user's face taken by the embedded camera, we estimate the position on the screen that they are looking at. The main idea is to estimate suitable image features and then map these features to a position on the screen. These features include the position and orientation of the head, eye location, and a reference point detected automatically on the user's face. In the proposed marker-free model, the head-related features are estimated from depth-related cues inferred from blur in the image. The mapping is seen as a discriminative learning problem implemented using a variational Bayesian multinomial logistic regression (VBMLR) framework [24]. Note that, in the case of discriminative learning, it has been pointed out that logistic regression (LR) outperforms the support vector machine (SVM) [21]. The paper is organized as follows. Section 2

*Corresponding author

Email addresses: David.Hurtubise-Martin@USherbrooke.ca (David Hurtubise-Martin), Ferial.Fass@USherbrooke.ca (Ferial Fass), Djemel.Ziou@USherbrooke.ca (Djemel Ziou), Marie-Flavie.Auclair-Fortier@USherbrooke.ca (Marie-Flavie Auclair-Fortier)

reviews related work on single RGB camera-based gaze estimation. Section 3 presents an overview of the proposed system. Section 4 describes the VBMLR mapping estimation framework. Section 5 details the iris localization and geometric feature extraction. Section 6 presents the blur-based depth estimation pipeline. Section 7 reports the experimental protocol and results, and the conclusion is presented in Section 8.

2 Related work

In this section, we review representative works proposing eye-tracking models based on a single RGB camera embedded in handheld devices (laptops, smartphones, or tablets), without active illumination (e.g., infrared) or additional sensors. The compared works are summarized in Table 1, in which the related work is organized according to the following criteria: (i) the underlying approach type (e.g., geometry-based, appearance-based, or hybrid), (ii) the predicted target (e.g., 2D screen point of regard (PoR) or gaze direction), (iii) the model and inference strategy, (iv) the preprocessing pipeline and extracted features, (v) the dataset characteristics, including size, number of participants, and acquisition conditions, (vi) the calibration requirements, and (vii) the reported performance metrics.

A first fundamental distinction concerns the predicted target. Some methods are designed to estimate the point of regard (PoR) on a screen (desktop, tablet, or smartphone), which is directly aligned with human-computer interaction applications. This formulation is common in webcam and mobile-based systems [25, 26, 27, 28]. In contrast, other methods aim to estimate the gaze direction, typically represented as yaw and pitch angles or as a gaze vector in a normalized camera coordinate system. These methods dominate the core computer vision literature [29, 30, 31, 32]. In addition, some video-based methods incorporate temporal information to refine gaze estimates over time or to model predictive uncertainty, rather than producing a single instantaneous output [30, 33].

The earliest monocular gaze estimation methods primarily rely on geometric modeling. They estimate eye contours, iris shape, limbus geometry, or head pose, and subsequently infer gaze direction either analytically or through lightweight regression models [34, 35]. While such methods are interpretable and frugal, their underlying assumptions often break down in real-world conditions, particularly under low image quality, the presence of glasses, large head pose variations, and unconstrained user behavior. Appearance-based methods emerged as an alternative by replacing explicit geometric modeling with direct regression from image descriptors. They are generally simpler and can perform well in controlled, and device-specific settings. They rely heavily on handcrafted feature engineering and tend to generalize poorly to in-the-wild variability. A representative example is TabletGaze, which uses Histogram of Oriented Gradients (HoG) features combined with Random Forest regression to predict PoR on tablets [26]. Extending this paradigm, interaction-based methods such as WebGazer leverage user interactions (e.g., mouse clicks) as implicit supervision to learn a mapping from webcam-based eye appearance to PoR coordinates [28, 36]. Although this enables scalable and easily deployable solutions, the learned mapping becomes tightly coupled to the specific device, user, screen configuration, and interaction context. More recently, deep appearance-based methods rely on learning end-to-end representations directly from raw images. They predict either the PoR or the gaze direction, depending on the dataset and target application [27, 31]. They typically achieve state-of-the-art performance when trained on large-scale datasets and supported by robust normalization pipelines [37, 31, 38]. However, despite these advances, they remain sensitive to domain shift, exhibit person-specific biases, often require calibration, and suffer from inconsistencies in evaluation metrics across datasets [37, 39]. The iTracker system demonstrated that large-scale consumer datasets can enable accurate, real-time PoR estimation on mobile devices [27]. Building on this direction, MPIIGaze and subsequent work shifted the focus toward person-independent gaze direction estimation in unconstrained laptop environments [31]. Recent developments have further improved performance by incorporating structural and contextual information into deep learning frameworks. Some methods integrate full-face context to better capture head-eye interactions [40], while others explicitly model geometric constraints within the learning process [29]. More recently, transformer-based architectures have been introduced, primarily modifying feature fusion mechanisms rather than redefining the prediction objective. In practice, hybrid CNN-transformer models generally outperform pure transformer architectures, while neural architecture search (NAS)-based approaches aim to reduce computational cost by replacing large backbones with more efficient designs [37, 41].

Across these three categories, preprocessing is not a secondary design choice; it fundamentally affects both accuracy and comparability [37]. Common steps include face and eye detection and cropping. In deep

appearance-based methods, preprocessing typically becomes more involved, incorporating image normalization to reduce variability in head pose and camera distance, coordinate transformations between PoR labels and gaze direction representations, and the selection of input modalities (full face, both eyes, or a single eye) [37, 38].

Calibration strategies vary substantially across methods, largely depending on the prediction target and modeling assumptions. Models that estimate gaze direction, typically represented as a gaze vector or yaw–pitch angles, are more portable across users and devices because predictions are expressed in a camera or normalized coordinate system. Through normalization procedures and training on large in-the-wild datasets, these models learn to absorb variability in head pose, illumination, and appearance, enabling generalization to unseen users without explicit per-user calibration [42, 41, 43]. In contrast, methods that estimate the PoR on a screen are intrinsically dependent on user-specific factors, including screen geometry, viewing distance, and individual biases. As a result, they often require calibration to align model outputs with the physical display. Mobile PoR-based approaches may incorporate explicit multi-point calibration to improve accuracy [26, 27]. Similarly, geometric or hybrid approaches that explicitly model the mapping between gaze direction and screen coordinates generally require an initial calibration phase (e.g., a small set of screen points) [34, 35, 25]. Finally, interaction-based systems rely on continuous self-calibration from user behavior [28]. These differences in calibration requirements are closely linked to dataset design and scale. Deep appearance-based methods require large-scale annotated datasets to ensure robustness to appearance, head pose, and lighting variations. Representative examples include MPIIGaze [42] (over 200,000 images), and ETH-XGaze [25] (1 million images) and GazeCapture [27] (approximately 2.45 million images). In such cases, geometric relationships are implicitly learned from data rather than explicitly modeled. In contrast, geometric projection approaches reduce dependence on large datasets by leveraging explicit modeling and calibration. However, validation on a single participant, as reported in [25], may limit statistical generalizability.

To evaluate these methods, evaluation metrics are chosen according to the predicted target. For PoR estimation, performance is measured in screen-space units (pixels, millimeters, or centimeters), typically using metrics such as mean error (ME) or root mean square error (RMSE), which quantify the distance between predicted and ground-truth gaze points [27, 37]. However, these metrics are inherently dependent on the display and viewing setup. Pixel error varies with screen resolution, while physical units (mm or cm) depend on screen size and user–screen distance [37, 39]. Some studies convert screen-space error into visual angle to improve comparability, but this requires precise knowledge of screen geometry and viewing distance, which is not always reported [37]. In addition, some methods adopt a classification-based evaluation. For example, in [35], the screen is divided into discrete areas of regard (AoR), and performance is measured by the accuracy of assigning each frame to the correct area. Consequently, direct comparison between PoR-based methods remains challenging. For gaze direction estimation, the standard metric is the mean angular error (in degrees), defined as the average angular deviation between predicted and ground-truth gaze directions, typically ranging from approximately 3° to 14° depending on the dataset and evaluation protocol [34, 42, 41, 43]. However, these values are not directly comparable, as the same angular error can correspond to different screen-space errors, primarily depending on the user’s distance from the screen. Moreover, some deep learning methods report computational efficiency metrics, such as the number of parameters and the number of operations. For instance, [41] reports a model with 1.027 million parameters and 0.28 giga floating-point operations (GFLOPs), whereas [43] reports 28.66 million parameters and 9.79 GFLOPs.

Unlike most existing methods, which either learn gaze implicitly from image appearance using large annotated datasets or project gaze onto the screen through a separate geometric stage [27, 31, 25], the proposed method explicitly incorporates user-to-screen distance estimated using depth from defocus into the gaze-classification feature representation. The user-to-screen distance is estimated through 3D reconstruction from blur, enabling a hybrid formulation that combines appearance-based features with geometric information. The area of regard (AoR) on the screen is then predicted using Bayesian logistic regression based on a compact eight-dimensional feature vector. This approach aims to improve screen-region discrimination while maintaining low model complexity and high interpretability.

Table 1: Comparison of gaze estimation approaches

Ref	Type method	Predicted target	Model and inference	Preprocessing	Dataset	Calibration	Metrics and scores
[34]	Geometry-based	Gaze direction	Single-camera geometric model	Eye localization, head pose	One subject; controlled lab setup; fixed head pose (50 cm)	Required (9 points)	No movement: $X_{acc} = 17.7$ mm (1.83°), $Y_{acc} = 19.3$ mm (2.0°) With movement: $X_{acc} = 22.42$ mm (2.18°), $Y_{acc} = 26.17$ mm (2.53°).
[35]	Geometry-based	PoR	Geometric webcam model	Eye detection, geometric features	20 subjects performing a webpage browsing task; constrained motion	Required	Accuracy = 95% for AoR localization
[26]	Appearance-based	PoR	HoG + Random Forest	Eye-region extraction	TabletGaze: 41 participants; $\sim 100k$ images; tablet front camera; fixed distance; indoor lighting	Optional	With calibration: ME = 2.5 cm, angular error = 2.86° – 4.76° Without calibration: ME = 3.17 cm, angular error = 3.63° – 6.03°
[28]	Interaction-based	PoR (pixels); visual angle (lab)	Linear R. ¹ (120D eye feature vector); RR ² (RR); RR+C ³ ; RR+C+F ⁴	Face, eye, and pupil detection	WebGazer: 82 participants; 20,251 clicks; in-the-wild browser study; webcam RGB stream In-lab study: 4 participants; 962 clicks	Self-calibration	Mean error: 174.9 px (remote RR+C); 169 px (lab); Visual angle: 4.17°
[27]	Deep appearance-based	PoR	iTracker: end-to-end CNN for feature extraction + SVR for PoR regression	Face detection, eye cropping, face grid encoding, input normalization (224×224)	GazeCapture: 1474 participants; $\sim 2.5M$ images; mobile devices; diverse environments; varying pose and lighting	Optional (0–13 points)	Mean screen error: No calibration: 1.71 cm (mobile); 2.53 cm (tablet) With calibration (13 points): 1.34 cm (mobile); 2.12 cm (tablet)
[42]	Deep appearance-based	Gaze direction (yaw, pitch), 3D head pose	Multimodal CNN (eye images + head pose); LeNet-style; L2 loss	Face detection, facial landmarks, eye cropping, normalization into canonical space, histogram equalization	MPIIGaze: 15 participants; 213,659 eye images; laptop RGB camera; collected over ~ 3 months; large illumination variability EYEDIAP: 16 participants; controlled lab setting	None	Mean angular error: 13.9° (MPIIGaze); 10.5° (EYEDIAP)
[41]	Efficient hybrid deep	Gaze direction	NAS-based multi-resolution feature extractor + fusion transformer	Multi-resolution facial feature extraction	Benchmarks: MPIIGaze, GazeCapture, MPIIFaceGaze, Gaze360, RT-GENE, EYEDIAP; diverse conditions	None	3.96° (MPIIFaceGaze), 10.52° (Gaze360), 6.40° (RT-GENE), 5.00° (EYEDIAP); 1.027M parameters; 0.28 GFLOPs ⁵
[25]	Hybrid (appearance + geometry)	PoR via 3D user position estimation	CNN (OpenVINO / ETH-XGaze) + geometric projection + regression + SfM	Appearance features + 3D reconstruction	Single-user dataset; RGB webcam (30Hz); 2560×1440 screen; 800 mm viewing distance; validated with Tobii tracker	4-point calibration	RMSE: No head movement: 50 mm / 3.2° (ETH-XGaze), 53 mm / 3.3° (OpenVINO) Yaw rotation: 80 mm / 5.1° Lateral translation: 60 mm / 4°
[43]	Appearance-based	Gaze direction (yaw, pitch)	Residual Attention-Based CNN (RAGE-Net); L2 loss	Eye cropping, normalization	MPIIGaze: 15 participants; 213k images MPIIFaceGaze: 15 participants; $\sim 45k$ images; laptop RGB camera; indoor setup	None	Mean angular error: 3.96° (MPIIGaze); 4.08° (MPIIFaceGaze) 28.66M parameters; 9.79 GFLOPs ⁶

¹Linear regression²Ridge Regression³Ridge Regression + cursor⁴Ridge Regression + cursor + fixation buffer⁵Giga Floating Point Operations⁶5

3 Proposed approach overview

Let us consider that a user is watching a document displayed on the screen of a computer equipped with an embedded 2D camera operating in the visible spectrum. The purpose is to predict the location within the document that the user is watching. The document content referenced in the screen space can be a text, a word, a picture, a drawing, among many others. The smallest element (i.e., resolution) that can be successfully predicted depends on the features of the human visual system, the features of the camera, the user location relative to the screen, the illumination, and the gaze estimation algorithms [12, 35]. That is why the screen is logically subdivided into areas of a size making it possible to measure the change of the gaze. These areas, named areas of regard (*AoR*), are what we would like to predict. The assumptions behind the proposed approach are: 1) the user environment is illuminated, by both ambient light and the computer screen itself; 2) the area in the image occupied by the user’s head allows the detection of points of interest; 3) the orientation of the user’s head and the direction of his/her gaze are close. These assumptions are realistic because users often watch the screen in an illuminated environment. The third assumption is supported by the fact that, in intentional motion, there is usually a small latency between head movements and eye movements [44].

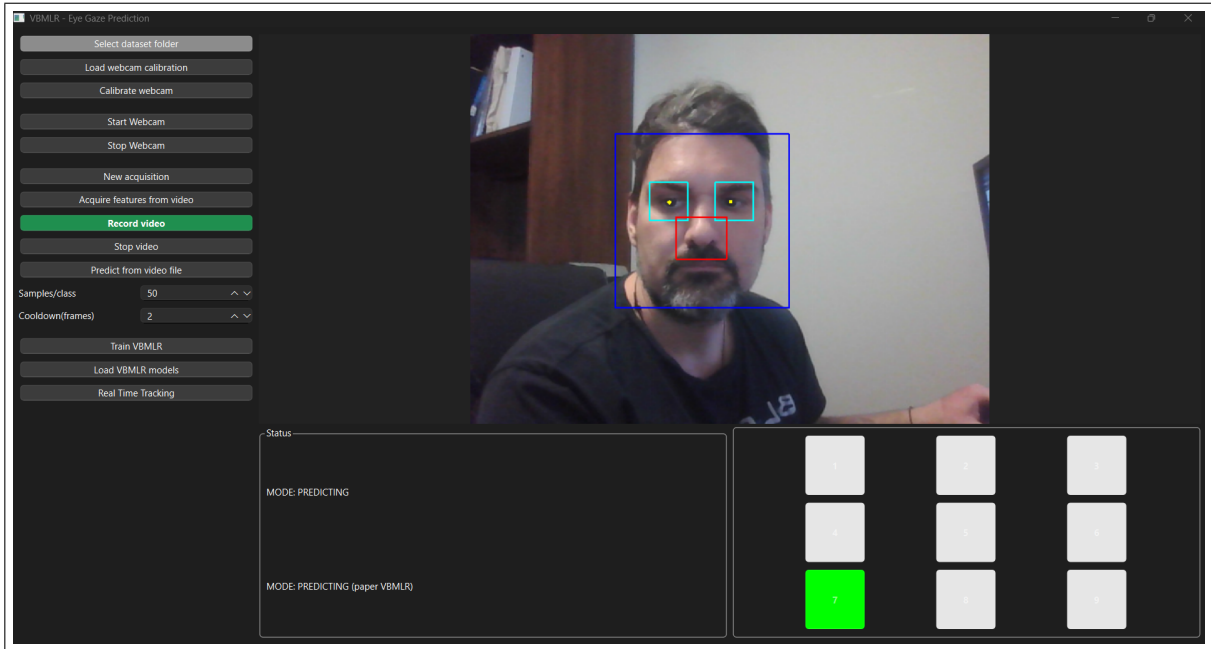


Figure 1: Overview of the proposed marker-free gaze prediction system and real-time interface.

The gaze prediction process includes image acquisition, feature extraction, and mapping. The architecture of the proposed system is illustrated through the interface shown in Fig. 1. This interface displays the live camera feed with overlaid detection markers for the face and eyes, indicated by the blue and cyan bounding boxes, respectively. As the camera feed is processed, the area of regard watched by the user is predicted and highlighted in real time. For example, in Fig. 1, the screen is divided into a discrete 3×3 grid, and the predicted *AoR* is displayed in green. The mapping function associates an *AoR* with a feature vector d characterizing the iris displacement and the head pose. Formally, this relationship is defined as $AoR = f(d \mid \theta)$, where θ denotes the parameters of the mapping model. The mapping can be viewed as a prediction problem implemented using different types of predictors. It can be formulated as a continuous prediction, or regression, problem, in which a predictor estimates continuous screen coordinates or gaze directions. CNNs, for example, can learn nonlinear mappings from eye and face images to screen positions or gaze directions [42, 27]. Some approaches explicitly combine eye appearance and head-related information to improve gaze prediction [40, 44]. Other continuous prediction models use residual neural networks [45] or Transformer-based architectures [46].

Alternatively, the mapping can be formulated as a classification problem, since each *AoR* can be considered

as a class. It therefore consists in assigning an *AoR*, i.e., a class, to an observation vector d . Several methods can be used to perform this classification, including neural networks, SVM, and LR models [47, 48, 21, 49]. In the present work, the mapping is built using a classification model in which the classes correspond to the *AoRs*. Let us consider labelled spatial data $s = (s_1, \dots, s_M)$, where s_i is a binary variable indicating whether the *AoR* _{i} is watched by the user, and M is the number of *AoRs*. The mapping model is first learned from labelled data and then used for real-time prediction at each frame. More precisely, given an image acquired at time t , a feature vector d is first extracted and assigned to one of the predefined *AoR* classes.

Let us consider two coordinate systems. In the image-plane coordinate system (u, v) , a point is represented by its horizontal and vertical pixel coordinates. The principal point (c_x, c_y) corresponds to the intersection of the camera optical axis with the image plane and is located approximately at the center of the image. In the three-dimensional camera coordinate system, the origin is located at the camera optical center. A three-dimensional point is represented by its coordinates (x, y, z) . The feature space is formed by eight gaze parameters. The iris displacement vector $\delta = (\delta_x, \delta_y)$ is expressed in the image-plane coordinate system. It is defined as the displacement from the nose center A' to the mean iris position o , where both points are detected and represented by their pixel coordinates in the image. The head-position vector $T = (T_x, T_y, T_z)$ and the head-orientation vector $R = (R_x, R_y, R_z)$ are expressed in the three-dimensional camera coordinate system. Figure 2 illustrates these coordinate systems and the gaze parameters expressed within them.

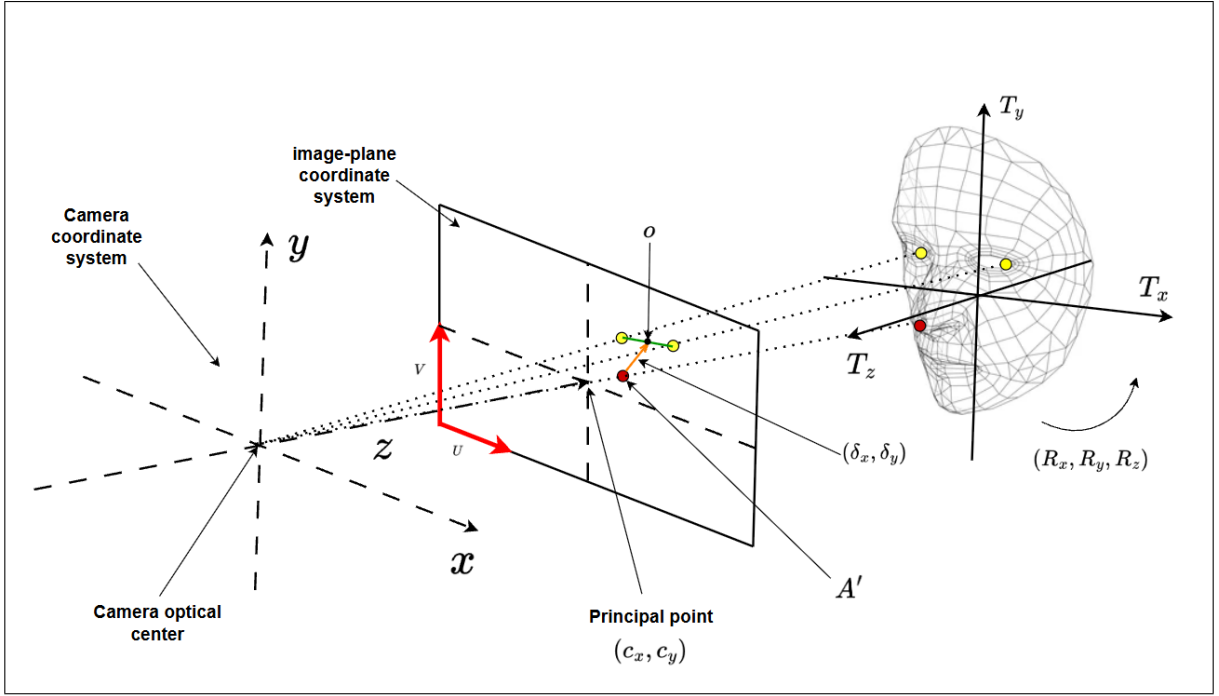


Figure 2: Representation of the coordinate systems and gaze parameters used in the proposed method. In the image-plane coordinate system, the iris displacement vector $\delta = (\delta_x, \delta_y)$ is defined from the nose center A' to the mean iris position o . In the camera coordinate system, the head-position vector $T = (T_x, T_y, T_z)$ and the head-orientation vector $R = (R_x, R_y, R_z)$ describe the position and orientation of the head relative to the camera optical center.

In the current marker-free implementation, the gaze features are estimated directly from the acquired facial image. The iris positions and the nose center are detected in the image and used to compute the iris displacement vector. Facial reference points are also detected and combined with blur-based depth information to estimate the head position and orientation without requiring physical markers attached to the face. Temporal stabilization is applied to the iris localization and depth estimation to improve reliability during real-time acquisition.

Logistic regression is a well-established method which can outperform the SVM in related discriminative settings [21, 49]. However, logistic regression may not yield finite parameter estimates when the classes are

separable. A Bayesian formulation addresses this limitation by imposing prior distributions on the model parameters. Variational Bayesian logistic regression (VBLR) [49] approximates the posterior distribution of these parameters and provides a tractable framework for Bayesian binary classification. However, the present gaze prediction problem involves several *AoR* classes. A multinomial formulation is therefore required. In this work, the variational Bayesian multinomial logistic regression (VBMLR) framework [24] is used to estimate $p(s | d, \theta)$, where θ is the parameter vector. The main idea is to compare each in-screen class i with the outside-screen baseline class ($i = 0$). This baseline-based formulation is used for training and prediction. A one-versus-one strategy is also used in the comparative mapping evaluation for multiclass benchmarking under the same eight-dimensional feature representation.

To summarize, the screen is virtually divided into areas of regard (*AoRs*). Given an image, the feature vector $d = (R_x, R_y, R_z, T_x, T_y, T_z, \delta_x, \delta_y)$ is estimated and mapped to an *AoR*. This mapping is formulated as a classification problem using VBMLR. The mapping model is learned from labelled data.

4 Mapping estimation

Let us recall that the feature vector is $d = [R_x, R_y, R_z, T_x, T_y, T_z, \delta_x, \delta_y]$. Let $i \in \{1, \dots, M\}$ be the in-screen *AoRs*, and we reserve $i = 0$ for the outside-screen baseline class. Each class i is associated with a binary variable s_i , and at a given time, the user watches exactly one class, either one *AoR* or the outside class; that is, $\sum_{i=0}^M s_i = 1$. Our objective is to design a model which enables us to predict the area watched by the user at a given time; i.e., find i such that $s_i = 1$. To estimate the value of s_i , we first need to estimate its probability and then determine s_i using a Bayesian decision rule. More formally, let us consider the set of complete data $\mathcal{D} = \{(\Omega_0, s_0), \dots, (\Omega_M, s_M)\}$, where Ω_i contains the n_i feature vectors $d_{i,1}$ to d_{i,n_i} of the i^{th} area. Set Ω_0 of vectors when the user watches outside the screen, is the baseline class. Let us recall that the mapping is considered as a classification problem and carried out by using Bayesian multinomial LR. Experiments in related works show that the performance of the VBLR outperforms many well established discrimination based algorithms such as the SVM, Relevance Vector Machine, Bayesian Logistic Regression Model, Informative Vector Machine, and LR [49]. Since the gaze-estimation problem involves multiple classes, the VBLR formulation is extended to the multinomial case, referred to as VBMLR [24]. The multinomial logistic regression consists in estimating the statistical model $\theta = (\theta_1, \dots, \theta_M)$ that discriminates each class $i \in [1, M]$ from the baseline class [50, 51]. The accuracy of VBMLR-based classification may decrease when either the relative size of the baseline class decreases or the number of classes increases, or the classes are unbalanced [24, 52]. The computational time increases with the number of classes and make it difficult to fulfil the real-time requirement. Fortunately, the number of *AoR* is not high, e.g. 2x2 inches give around 25 areas for 15 inches screen.

Let us assume that Ω_0 and Ω_i are generated from known probability density functions (pdfs) $q_0(d)$ and $q_i(d)$ respectively. Let us recall that each feature vector d of Ω_i (resp. Ω_0) is assigned with two binary variables $s_i = 1$ and $s_0 = 0$ (resp. $s_i = 0$ and $s_0 = 1$) if it is generated by the i^{th} area model (resp. outside model). We assume that the sets Ω_i are balanced. The probability of the binary variables is given by $p(s_i = 1 | d, \theta_i) = \frac{\exp(\theta_i^T d)}{\sum_{j=1}^M \exp(\theta_j^T d)}$, and $p(s_i = 0 | d, \theta_i) = 1 - p(s_i = 1 | d, \theta_i)$. The maximum likelihood is a popular estimator of the parameter vector θ_i . However, collinearity, separability, and lack of parsimony are potential drawbacks. To address these limitations, Bayesian formulations have been proposed for both binary classification [49] and multinomial classification [24]. Let $p(\theta_i)$ be a prior; we need to find the parameter vector θ_i maximizing the posterior probability $p(\theta_i | s_0 = 0, s_i = 1)$ given by:

$$\max_{\theta_i} p(\theta_i | s_0 = 0, s_i = 1) \propto p(\theta_i) \sum_{d \in \Omega_i} \prod_{k \in \{0, i\}} p(s_k = g(k) | d, \theta_i) q_k(d), \quad (1)$$

with

$$g(k) = \begin{cases} 0, & \text{if } k = 0, \\ 1, & \text{otherwise.} \end{cases} \quad (2)$$

However, in the case of multidimensional data, the estimation of θ_i fails due to the insufficiency of computer accuracy when computing the exponential function $p(s_i = 1 | d, \theta_i)$ of Eq. (1). Fortunately, variational

approximation and Jensen's inequality can be used to approximate the posterior:

$$p(\theta_i | s_0 = 0, s_i = 1) \propto p(\theta_i) \prod_{k \in \{0, i\}} F(\epsilon_k) e^{(E_{q_k}(H_k) - \epsilon_k)/2 - \varphi(\epsilon_k)(E_{q_k}(H_k^2) - \epsilon_k^2)}, \quad (3)$$

where $H_k = (2g(k) - 1)\theta_k^T d_k$, E_{q_k} is the expectation with respect to q_k , $\varphi(\epsilon_k) = \tanh(\epsilon_k/2)/4\epsilon_k$, and ϵ_k is a variational parameter. Let us consider that the prior $p(\theta_i)$ is a Gaussian with mean μ_i and covariance Σ_i , the approximation of the posterior above is a Gaussian with a posterior mean μ_i^{post} and a posterior covariance Σ_i^{post} given by

$$\begin{aligned} (\Sigma_i^{post})^{-1} &= (\Sigma_i)^{-1} + 2 \sum_{k \in \{0, i\}} \varphi(\epsilon_k) E_{q_k}(d_k d_k^T) \\ \mu_i^{post} &= \Sigma_i^{post} (\Sigma_i^{-1} \mu_i + \sum_{k \in \{0, i\}} (g(k) - 0.5) E_{q_k}(d_k)) \\ \epsilon_k^2 &= E_{q_k}(d_k^T \Sigma_i^{post} d_k) + (\mu_i^{post})^t E_{q_k}(d_k^T d_k) \mu_i^{post}, \quad k \in \{0, i\}. \end{aligned} \quad (4)$$

Mathematical derivation of the above formulae and other details can be found in [49]. These equations are not devoted to the estimation of the vector parameter θ_i . However, this vector can be set to μ_i^{post} because θ_i follows a Gaussian distribution with mean μ_i^{post} . The implementation of the mapping learning based gaze estimation is straightforward. The learning phase consists of estimating μ_i^{post} (i.e. θ_i) using Eq 5. The detailed algorithm of VBMLR is given in [49]. For the test step, given a feature vector d , the i^{th} area is the watched one if

$$i = \begin{cases} \arg \max_k p(s_k = 1 | d, \theta_k) p(\theta_k) q_k(d), & \text{if } p(s_i = 1 | d, \theta_i) p(\theta_i) q_i(d) > \eta, \\ 0, & \text{otherwise.} \end{cases} \quad (5)$$

The threshold η can be estimated through cross-validation during the learning phase by minimizing false positives, minimizing false negatives, or maximizing the trade-off between them.

5 Iris localization and geometric feature extraction

The goal is to estimate the feature vector $d = (R_x, R_y, R_z, T_x, T_y, T_z, \delta_x, \delta_y)$. The iris centers, the nose center, and the displacement $\delta = (\delta_x, \delta_y)$ are expressed in image coordinates, where a point is represented by its horizontal and vertical coordinates (u, v) . The head orientation $R = (R_x, R_y, R_z)$ and the head position $T = (T_x, T_y, T_z)$ are expressed in the three-dimensional camera frame (x, y, z) , whose origin is located at the camera center.

The iris centers are first localized in the image. However, their absolute image coordinates depend both on eye motion and on the global position of the face in the image. For example, if the user moves the head to the left while maintaining the same gaze direction, the detected iris centers also move to the left, even though their positions relative to the face remain approximately unchanged. A facial reference point is therefore used to express the iris position relative to the face. The center of the detected nose region is selected because it is located near the central facial region and moves with the head. Let $A' = (a_x, a_y)$ denote the center of the nose region in image coordinates.

After the center of each iris has been estimated and smoothed over consecutive frames, the two resulting centers are averaged to obtain the mean iris position $o = (o_x, o_y)$. The vector from the nose center to this mean iris position is defined as

$$\delta = (\delta_x, \delta_y) = o - A'. \quad (6)$$

To estimate o and A' , the face and nose regions are localized using Viola-Jones [53]. Once the face bounding box has been detected, the two eye regions are placed inside its upper part according to the expected anatomical positions of the eyes. Their size and position are defined relative to the detected face box, so that the eye regions automatically become larger or smaller when the apparent face size changes in the image. Figure 3 shows an example of the detected face, the resulting eye regions, and the detected nose region. The iris center is then estimated independently within each eye region.

Each estimated center is smoothed by combining its current position with the position retained for the same eye in the preceding frame. When both resulting iris centers are available, their horizontal and vertical coordinates are averaged. The resulting point, located midway between the two iris centers, defines the mean iris position o .

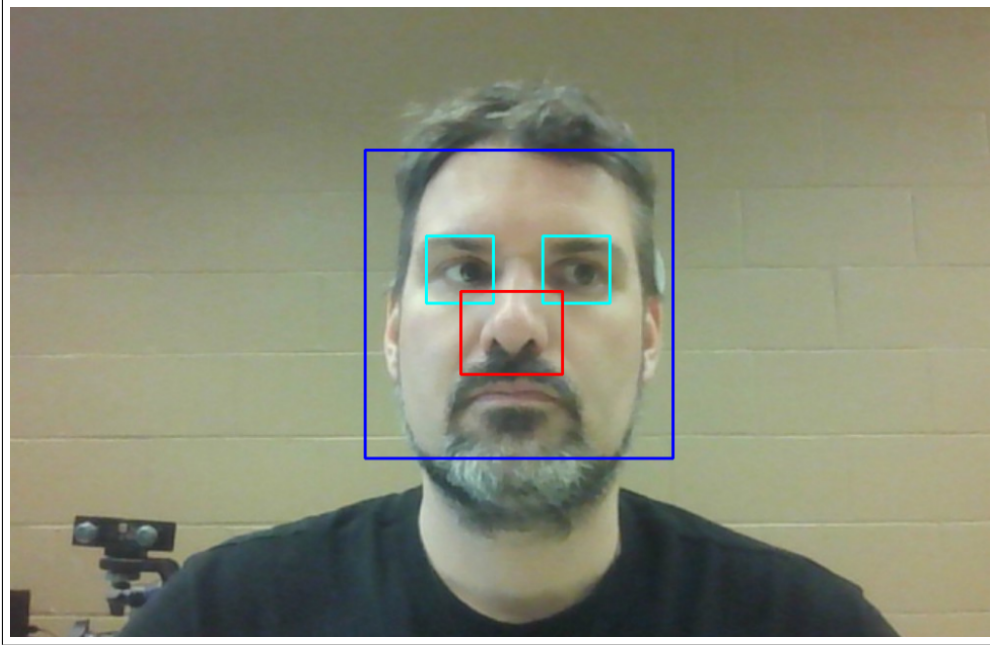


Figure 3: Example of the detected face region, the eye regions derived from the face bounding box, and the detected nose region.

More precisely, let us first assume that the eyes are open. The iris boundary can be modeled as a circular step edge. It is possible to estimate the iris center by formulating the problem as an optimization based on the radial derivative of the scale-space Radon transform [54]. However, webcam images are often noisy, the iris contour may be incomplete or partially occluded by the eyelids, and an exhaustive search over all possible center and radius values is not well suited to a real-time implementation.

Instead, we use a faster approximation in which we first detect a plausible dark iris region, then verify the presence of a visible iris contour, use the contour geometry to obtain a more precise estimate of the iris center, and finally smooth this estimated position over consecutive frames to reduce small variations caused by noise or temporary occlusion.

The first practical step is therefore to restrict the search to the darkest part of the eye ROI, because the iris and pupil usually form one of the darkest structures in that region. A binary dark mask is computed from low-intensity pixels and then morphologically cleaned. This mask is shown in Fig. 4(a).

In the second step, the dark mask is divided into separate dark regions, and the most plausible one is selected as the iris candidate. The center of this retained region provides an initial estimate of the iris center for the eye currently being processed. For the contour evaluation below, this initial candidate is denoted by $(\hat{o}_x, \hat{o}_y)$. Figure 4(b) shows the different dark regions obtained from the mask, and Fig. 4(c) shows the initial center obtained from the selected dark region.

At this stage, we have a plausible estimate of the iris center, but it is not yet certain that this is the true center of the iris because the visible iris region may be partially truncated. The next step is therefore to verify whether this candidate is surrounded by a visible contour compatible with the iris. The visible contour portions extracted around the candidate center are illustrated by the white arc in Fig. 4(d). These contour portions determine the sampled directions that are retained for the following circular-contour evaluation.

To evaluate this visible contour, N_ϕ directions are uniformly sampled on a tested circular contour of

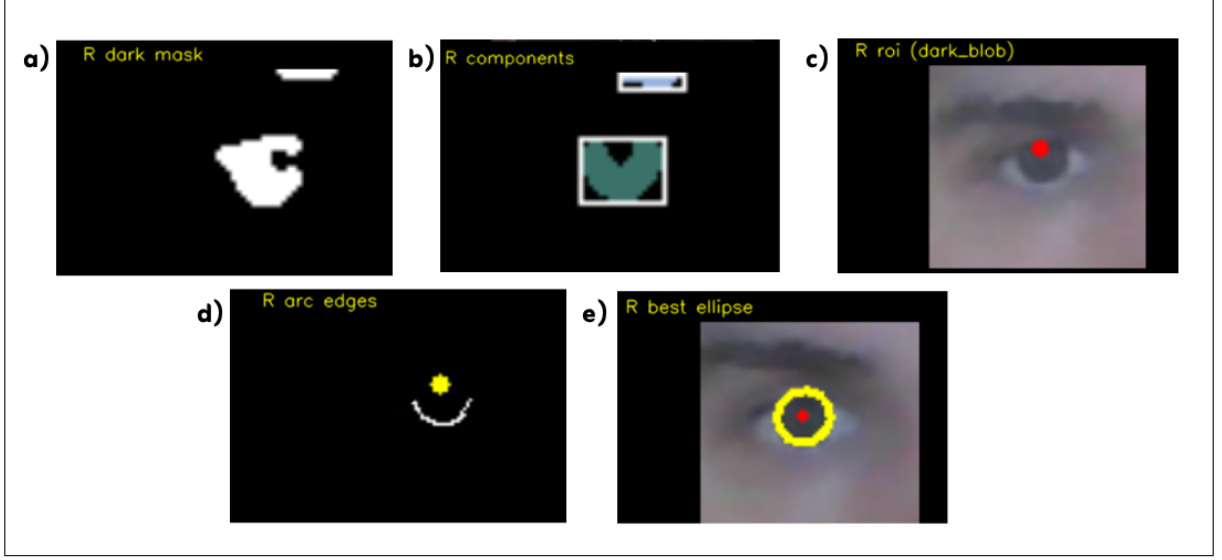


Figure 4: Main steps of iris-center estimation in the right eye. (a) Binary dark mask computed in the eye ROI. (b) Separate dark regions obtained from the mask. (c) Initial iris-center candidate obtained from the selected dark region. (d) Contour verification around the candidate center. (e) Refined iris-center measurement obtained from the fitted ellipse.

radius r centered at $(\hat{o}_x, \hat{o}_y)$. The sampled directions are defined by

$$\phi_\ell = \frac{2\pi\ell}{N_\phi}, \quad \ell = 0, \dots, N_\phi - 1. \quad (7)$$

Among these directions, only those corresponding to the visible contour portions are retained. Let Γ denote the set of retained sampled directions. Figure 5 illustrates the candidate center, a tested radius r , a sampled direction ϕ_ℓ , and the retained directions Γ .

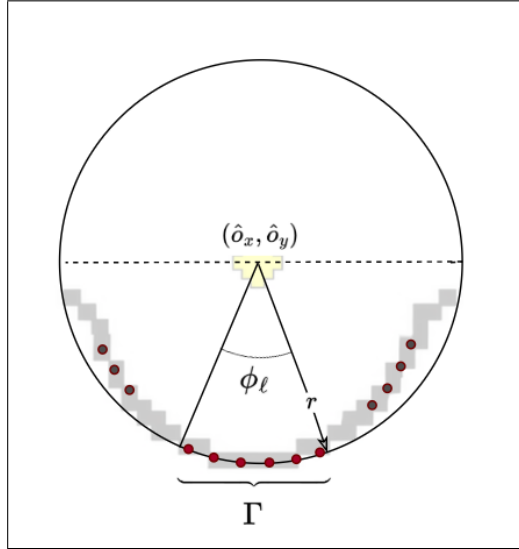


Figure 5: Circular-contour evaluation around the initial iris-center candidate $(\hat{o}_x, \hat{o}_y)$. The angle ϕ_ℓ defines a sampled direction and r denotes the tested radius. The retained directions Γ are represented by their intersections with the tested circular contour along the visible iris-contour portion.

For a tested radius r , the corresponding contour score is defined as

$$L_{\text{iris}}(\hat{o}_x, \hat{o}_y, r) = \frac{1}{|\Gamma|} \sum_{\ell \in \Gamma} I(\hat{o}_x - r \sin \phi_\ell, \hat{o}_y + r \cos \phi_\ell), \quad (8)$$

where $|\Gamma|$ denotes the number of retained sampled directions. Thus, L_{iris} represents the mean image intensity evaluated along the visible portion of the tested circular contour. The normalization by $|\Gamma|$ makes this score independent of the number of retained directions. The radial edge evidence is then measured using the same retained sampled directions Γ on two neighbouring circular contours:

$$\Delta L(\hat{o}_x, \hat{o}_y, r) = L_{\text{iris}}(\hat{o}_x, \hat{o}_y, r) - L_{\text{iris}}(\hat{o}_x, \hat{o}_y, r - 1), \quad (9)$$

which measures the change in mean image intensity between two neighbouring circular contours.

For the fixed candidate center $(\hat{o}_x, \hat{o}_y)$, this comparison is repeated for the candidate radii between $r_{\min}$ and $r_{\max}$. For each radius, the corresponding radial intensity difference is computed. The resulting sequence is locally smoothed to reduce small variations caused by image noise, and the radius associated with the largest magnitude of the radial intensity change is retained. A strong radial intensity change indicates a likely transition between the iris and its surrounding region and therefore provides evidence of an iris boundary compatible with the tested circular contour.

Once a plausible iris contour has been identified, an ellipse is fitted to the available contour points following the ellipse-based iris localization approach proposed in [55]. Let $j \in \{\text{right}, \text{left}\}$ identify the eye currently being processed. The center of the fitted ellipse provides the current iris-center measurement $\tilde{o}_t^j$. Figure 4(e) shows the retained contour, the fitted ellipse, and its center.

The measured iris center may vary slightly from one frame to the next because of image noise, illumination changes, partial eyelid occlusion, or variations in the detected contour. To reduce these variations, the current measurement is combined with the center retained for the same eye in the previous frame. The resulting iris-center position is defined as

$$o_t^j = \lambda_t^j o_{t-1}^j + (1 - \lambda_t^j) \tilde{o}_t^j, \quad (10)$$

where $\lambda_t^j \in [0, 1]$ controls the balance between the center retained in the preceding frame and the current measurement for the same eye. The confidence is derived from the iris-detection score produced by the selected dark region or by the fitted ellipse. A low-confidence measurement increases λ_t^j , so that the resulting position remains closer to the preceding center. A high-confidence measurement decreases λ_t^j , so that the resulting position follows the current measurement more closely.

This operation is performed independently for the two eyes. When both resulting iris centers are available, their mean position is

$$o = \frac{o_t^{\text{right}} + o_t^{\text{left}}}{2}. \quad (11)$$

In practice, this procedure allows the iris center to remain localized under moderately challenging conditions, including partial occlusion by the eyelids and short blinking phases. As illustrated in Fig. 6, the iris center remains localized across different eye states.

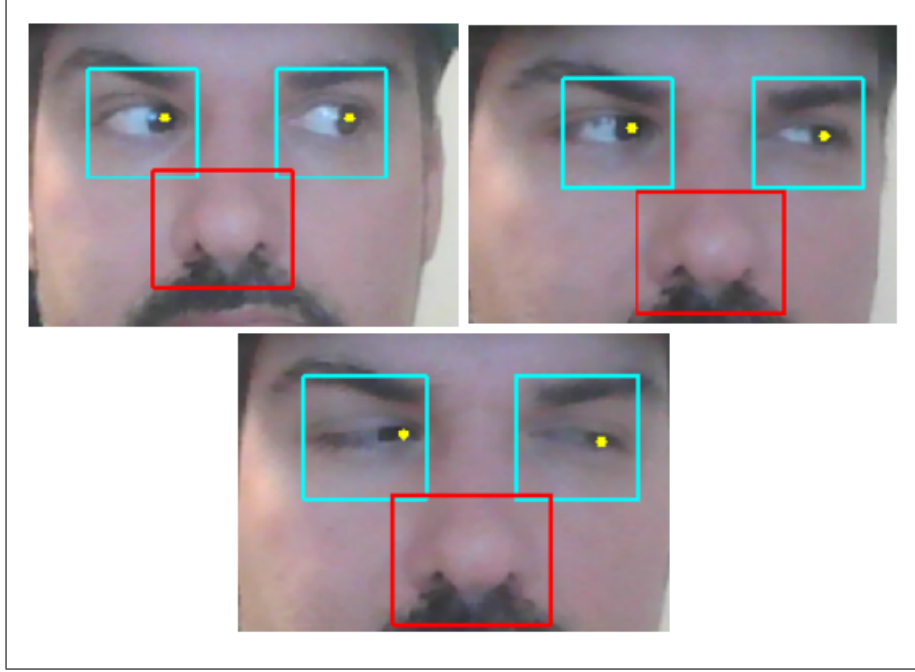


Figure 6: Examples of marker-free face, eye, and nose localization with iris-center estimation for open and partially closed eyes.

6 Blur-based depth estimation

Performing the mapping requires the estimation of the feature vector d . Both binocular and monocular vision methods can be used to estimate the geometric information required for this purpose [12, 29, 34]. In this work, we propose to exploit image blur acquired with a single 2D camera. The estimation of d involves three main steps: (i) estimation of the image blur, (ii) estimation of the depths of facial reference points, and (iii) estimation of the head-position and head-orientation components of the feature vector. We begin with the blur-estimation stage.

During image acquisition, the scene radiance falling on the image plane is corrupted mainly by blur caused by the camera. Let us consider the corruption model as a convolution of the light $I(u, v)$ falling on the lens, the Gaussian point spread function (PSF) $g(u, v; \varrho)$ of the lens, where ϱ is the blur measure. The light coming out of the lens is given by:

$$I(u, v; \varrho_b) = I(u, v) * g(u, v; \varrho), \quad (12)$$

where $*$ denotes convolution. The blur ϱ depends on the z coordinate of the 3D point (x, y, z) described in the camera coordinate system. The image point (u, v, f) is the perspective projection of (x, y, z) . Several PSFs $g(\cdot)$ have been proposed in the literature; among them, the Gaussian filter is one of the most widely used [56]. The relationship between depth and blur is given by [57, 58]:

$$z = \begin{cases} \frac{Ff}{f-F-kF_N\varrho} & \text{if } z \geq u_f \\ \frac{Ff}{f-F+kF_N\varrho} & \text{otherwise,} \end{cases} \quad (13)$$

where u_f is the distance between the lens and the position of perfect focus, F_N is the f-number, f is the distance from the lens to the image plane, and F is the focal length. According to Eq. (13), the computation of the depth z requires the estimation of the blur measure ϱ and the camera parameters F , f , k , and F_N . These camera parameters are obtained from the camera specifications or estimated through calibration. In our implementation, the camera calibration is performed using the `calibrateCamera` function available in OpenCV. The blur measure ϱ is estimated using the method described in [57].

A simple and fast strategy is used to estimate the local blur from the change in image gradients produced by an additional Gaussian smoothing. Let $I(u, v; \varrho_b)$ denote the acquired image. A second image is obtained

by applying a Gaussian filter of known scale ϱ_0 :

$$I(u, v; \varrho_1) = I(u, v; \varrho_b) * g(u, v; \varrho_0), \quad (14)$$

where ϱ_1 denotes the effective blur level of the additionally smoothed image. Because the additional Gaussian smoothing reduces local intensity variations, the gradient magnitude of $I(u, v; \varrho_1)$ is generally smaller than that of $I(u, v; \varrho_b)$. Inspired by the spatial-domain principle described in [57], the unknown blur is approximated as

$$\varrho(u, v) = \varrho_0 \sqrt{\frac{\|\nabla I(u, v; \varrho_b)\|}{\|\nabla I(u, v; \varrho_1)\|} - 1}. \quad (15)$$

where ∇ denotes the image gradient. In the implementation, the input color image is first converted to grayscale. Its local contrast is then adjusted using contrast-limited adaptive histogram equalization (CLAHE), which performs histogram equalization within small image regions while limiting excessive noise amplification. The additional Gaussian filter is subsequently applied, and the horizontal and vertical gradients of the acquired and additionally smoothed images are computed using discrete derivative filters. These derivatives measure local intensity changes in the horizontal and vertical directions. The resulting values define a local blur map $\varrho(u, v)$ over the image. For each selected facial reference point, the blur value is obtained by sampling this map within a small local neighbourhood. The sampled blur value is then used together with the camera parameters to compute the corresponding depth z using Eq. (13).

Let us now consider the estimation of the head pose in the 3D camera coordinate system. The objective of the following steps is to define three facial reference points in the image-plane coordinate system (u, v) , reconstruct their corresponding three-dimensional in the camera coordinate system (x, y, z) , and then estimate the head orientation vector $R = (R_x, R_y, R_z)$ and the head position vector $T = (T_x, T_y, T_z)$. A representation of the coordinate systems and information used for this estimation is shown in Fig. 7.

Let $A' = (u_A, v_A)$, $B' = (u_B, v_B)$, and $C' = (u_C, v_C)$ denote three facial reference points expressed in the image-plane coordinate system (u, v) . The point A' is defined as the center of the detected nose bounding box, while B' and C' are defined as the centers of the detected eye bounding boxes. The local blur values ϱ_A , ϱ_B , and ϱ_C are sampled in neighbourhoods centred at these points. Using Eq. (13), these blur values are converted into the corresponding depths z_A , z_B , and z_C . Each depth is the third component of the three-dimensional coordinates (x, y, z) of the corresponding facial point in the camera coordinate system and represents its position along the optical direction of the camera.

The depth value alone does not determine the complete three-dimensional position of a facial point. It must be combined with its image coordinates and the intrinsic parameters of the camera. More precisely, for an image point (u, v) with depth z , the corresponding coordinates (x, y, z) in the camera coordinate system are obtained by back-projection:

$$x = \frac{z(u - c_x)}{f_x}, \quad y = \frac{z(v - c_y)}{f_y}, \quad (16)$$

where (c_x, c_y) denotes the principal point of the camera, corresponding to the pixel coordinates at the center of the image, and f_x and f_y are the focal lengths expressed in pixels. Therefore, the image coordinates (u, v) determine the direction of the projection ray, while the estimated depth z determines the position of the point along this ray.

Applying this back-projection independently to A' , B' , and C' gives the three-dimensional facial points

$$\begin{aligned} A &= \left(\frac{z_A(u_A - c_x)}{f_x}, \frac{z_A(v_A - c_y)}{f_y}, z_A \right), \\ B &= \left(\frac{z_B(u_B - c_x)}{f_x}, \frac{z_B(v_B - c_y)}{f_y}, z_B \right), \\ C &= \left(\frac{z_C(u_C - c_x)}{f_x}, \frac{z_C(v_C - c_y)}{f_y}, z_C \right). \end{aligned} \quad (17)$$

The reconstructed points A , B , and C define a triangular geometric configuration in the camera coordinate system. The head orientation is estimated as the normalized normal vector of the facial plane defined by

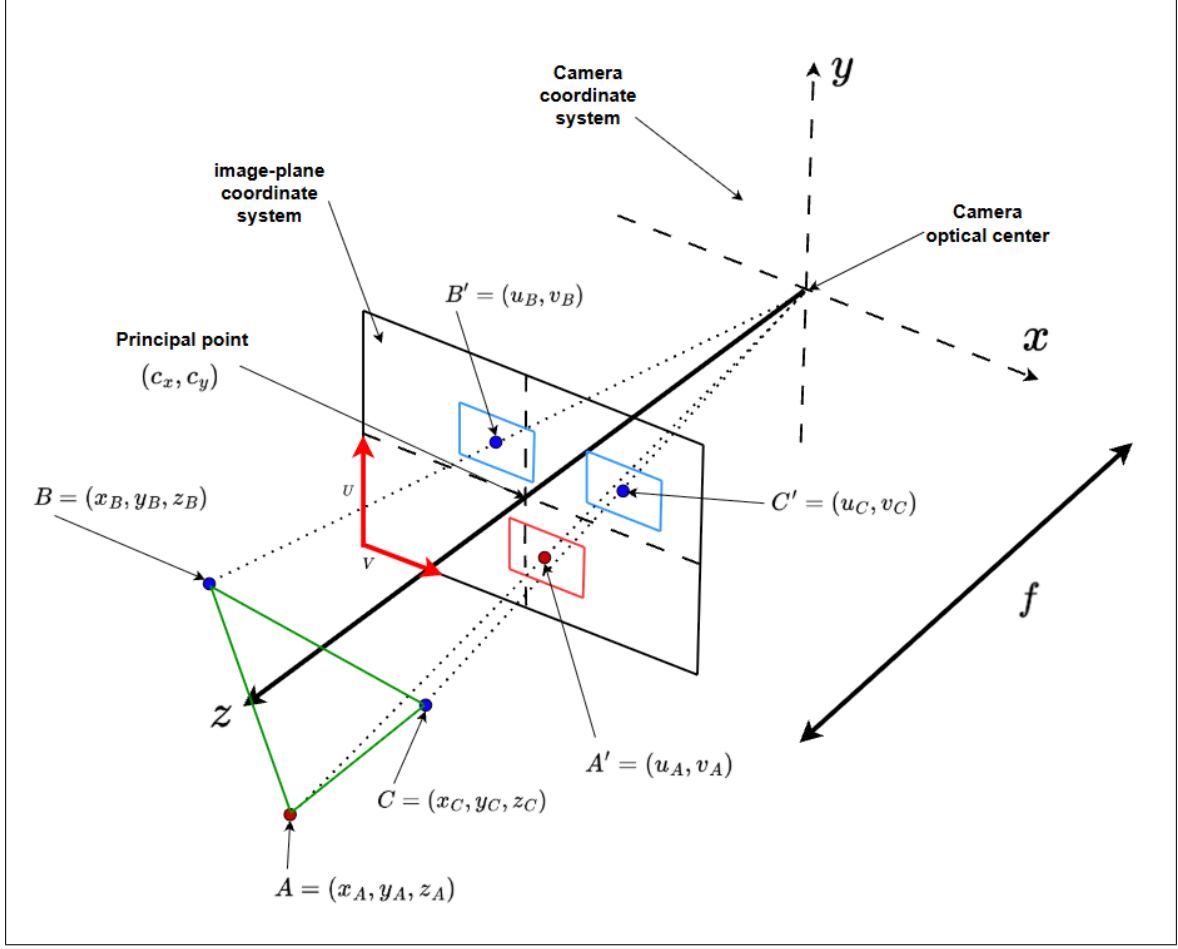


Figure 7: Geometry used for head pose estimation. The image points A' , B' , and C' are extracted from the detected facial regions and assigned depths z_A , z_B , and z_C estimated from blur. These depths are then used to calculate the 3D points A , B , and C .

these three points:

$$R = \frac{(B - A) \times (C - A)}{\|(B - A) \times (C - A)\|}. \quad (18)$$

The translational component is taken as the centroid of the three reconstructed facial points,

$$T = \frac{A + B + C}{3}. \quad (19)$$

which is then used in the feature vector together with R and δ .

To summarize, we first estimate a local blur measure at the selected facial reference points detected in the image and convert these measurements into depth values. The estimated depths are then combined with the image-plane coordinates of the detected points and the intrinsic camera parameters to reconstruct the corresponding facial points in the camera coordinate system. These reconstructed points are finally used to estimate the head-orientation vector (R_x, R_y, R_z) and the head-position vector (T_x, T_y, T_z) without requiring any physical markers. Together with the iris displacement vector (δ_x, δ_y) , the head-orientation, head-position, and iris displacement vectors form the eight-dimensional feature vector d used for gaze estimation.

7 Experimentations

Experiments were conducted using the integrated webcam of an MSI Cyborg 15 A12V laptop. The webcam stream is processed at a resolution of 640×480 RGB pixels. Camera intrinsic parameters were estimated beforehand using the OpenCV camera calibration procedure and then used in the geometric back-projection and blur-to-depth estimation stages described in Eqs. (16) and (13). A 15 inches screen was divided into nine zones as shown in Fig. 8, each of $10.77 \text{ cm} \times 6.73 \text{ cm}$. The dataset was acquired with 4 subjects. For each subject, 9 areas of regard (*AoRs*) were recorded with 100 images per *AoR*, yielding 900 images per subject. The same protocol was repeated at two user-to-camera distances: 50 cm and 70 cm. The complete dataset therefore contains $4 \times 9 \times 100 \times 2 = 7200$ images. For each distance-specific evaluation (50 cm or 70 cm), the aggregated data contain $4 \times 100 = 400$ samples per zone and 3600 samples in total per distance. Under the 5-fold stratified cross-validation protocol, this corresponds, in each fold, to 320 training samples and 80 test samples per zone. In the global pooled evaluation (50 cm and 70 cm), each zone contains 800 samples ($4 \times 100 \times 2$), for a total of 7200 samples. In that case, each fold contains 640 training samples and 160 test samples per zone.

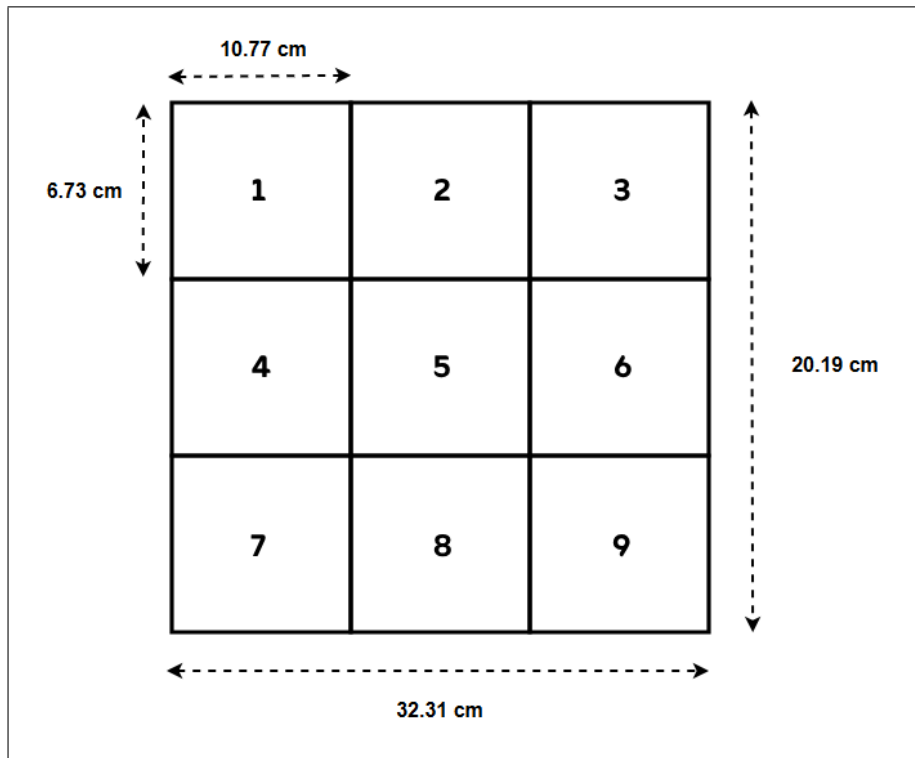


Figure 8: 15 inches screen subdivision.

We compare the proposed variational Bayesian multinomial logistic regression (VBMLR), described in Eqs. (1)–(5), with five representative baselines. The mapping is learned from the 8-dimensional feature vector $d = [R_x, R_y, R_z, T_x, T_y, T_z, \delta_x, \delta_y]$, introduced in section 3. Since one bias term is added to them, each class uses $8 + 1 = 9$ learned parameters. For the 9 screen zones, this corresponds to $9 \times (8 + 1) = 81$ learned parameters. In this formulation, the hyperparameters μ and Σ define the Gaussian prior in Eq. (1). A Ridge regression mapping is included as representative of the WebGazer mapping strategy [28]. SVM with RBF kernel and multiclass linear regression [50, 28] complete the comparison as strong classical baselines. A lightweight 1D convolutional neural network (CNN-1D) for low-dimensional structured features [19, 42], and a ResNet18 baseline initialized from ImageNet pretraining. All mappings are trained and evaluated using a strict one-versus-one strategy for the 9 *AoR* zones. In all methods, the same 8-dimensional feature vector and the same 5-fold stratified cross-validation protocol are used. In addition, we report an image-based ResNet18 fine-tuned from ImageNet as a high-capacity reference.

For all mapping methods, the hyperparameters were selected through preliminary experiments conducted under the same cross-validation protocol. Table 2 summarizes the main theoretical choices and optimization settings considered for each model, with the retained values shown in bold.

Table 2: Hyperparameters for Each Mapping Method

Model	Parameters
VBMLR	<i>prior mean μ</i> : 0 , 0.3, 1, 10, 25, 50, 100 <i>prior covariance σ</i> : 0.3, 1, 10, 25, 50, 100 <i>stopping criterion</i> : 10^{-3} , 10^{-4} , 10^{-5}
SVM (RBF)	<i>regularization parameter C</i> : 0.3 , 1, 10, 25, 50, 100 <i>kernel</i> : RBF ¹
LR Multiclass	<i>prediction rule</i> : argmax
Ridge	<i>regularization</i> : L2 <i>regularization coefficient α</i> : 0.3, 1, 10, 25, 50 , 100
CNN-1D	<i>hidden layers</i> : (8 , 16) <i>activation</i> : ReLU ² <i>optimizer</i> : Adam ³ <i>dropout</i> : 0.3 <i>learning rate</i> : 10^{-3} , 10^{-4} , 10^{-5} <i>iterations</i> : 10, 25 , 50
ResNet18	<i>input representation</i> : 2×4 pseudo-image <i>pretraining model</i> : ImageNet ⁴ <i>optimizer</i> : Adam <i>learning rate</i> : 10^{-3} , 10^{-4} , 10^{-5} <i>iterations</i> : 5, 10 , 20

For VBMLR, each mapping is trained using a variational Bayesian logistic-regression formulation with a Gaussian prior of zero mean, $\mu = \mathbf{0}$, and covariance $\Sigma = \sigma^2 I$, with $\sigma = 100$. The iterative procedure is stopped when the largest absolute change in the estimated posterior mean μ^{post} between two successive iterations becomes smaller than 10^{-4} . In SVM, we use $C = 0.3$ which denotes the SVM regularization parameter controlling the trade-off between maximizing the distance between the separating hyperplane and the nearest support vectors, and minimizing training errors. Ridge uses $\alpha = 50$, where α denotes the L_2 regularization coefficient. For CNN-1D, we adopt a compact architecture tailored to the 8-dimensional feature vector, with two convolutional layers followed by ReLU activations. The first layer produces 8 feature channels and the second produces 16, followed by a small pooled representation and a lightweight fully connected head with dropout (0.3) to limit overfitting on low-dimensional inputs. The network is trained with the Adam optimizer for 25 iterations with a learning rate of 10^{-3} . We also evaluated a pretrained ResNet18 model. The proposed 8-dimensional feature vector was reshaped into a small 2×4 pseudo-image, upsampled by bilinear interpolation to 224×224 , and then replicated across color channels to form a pseudo-image compatible with the standard ResNet18 input format. ResNet18 is fine-tuned with the Adam optimizer for 10 iterations with a learning rate of 10^{-4} , using ImageNet pretrained weights.

Tables 3–5 summarize the performance and deployment cost of the compared mappings. The reported metrics include the mean classification accuracy in percentage (%), the mean number of false positives (FP) and true negatives (TN) averaged over the 9 *AoR* zones, the mean training time per test feature vector in milliseconds (ms), and the total number of learned parameters across all *AoRs*. We also report error statistics in percentage (%), namely the minimum error, maximum error, and standard deviation of the classification error rate across the five cross-validation folds. ResNet18 is not included in the table because its use is difficult to justify other than by the obtained scores. Indeed, it learns at the pixel level and specializes based

¹Radial Basis Function (RBF) is a non-linear kernel used in SVMs to map data into higher-dimensional spaces [48].

²Rectified Linear Unit (ReLU) preserves information about relative intensities as it travels through multiple layers of feature detectors [47].

³Adaptive Moment Estimation (Adam) is an algorithm for first-order gradient-based optimization of stochastic objective functions, based on adaptive estimates of lower-order moments [59].

⁴ImageNet is a large-scale hierarchical database of images built upon the backbone of the WordNet structure [60].

on nominal characteristics. Although these characteristics are calculated from the pixel, it is not easy to provide a model explaining the basis of fine-tuning in this case.

Table 3: Distance-specific comparison at 50 cm using only non-pretrained models. Metrics are averaged over the 9 *AoR* zones (400 samples per zone).

Method	Mean Acc. (%)	Mean FP	Mean TN	Training Time (ms)	Nb Params	Min Err. (%)	Max Err. (%)	Std Err. (%)
VBMLR (proposed)	99.69	1.22	3198.78	0.0018	81	0.14	0.83	0.27
SVM (RBF)	99.03	3.89	3196.11	0.4498	35,073	0.28	1.53	0.42
LR Multiclass	66.11	135.56	3064.44	0.0003	81	33.19	35.56	0.87
Ridge	99.58	1.67	3198.33	0.0063	324	0.14	0.97	0.29
CNN-1D	98.86	4.56	3195.44	0.0071	2,809	0.83	1.39	0.18

At 50 cm, the proposed VBMLR reaches near-ceiling performance with 99.69% mean accuracy in Table 3. Its fold-wise error statistics remain tightly bounded, with a minimum error of 0.14%, a maximum error of 0.83%, and a standard deviation of 0.27%, indicating highly consistent generalization across folds. This behavior is confirmed by the confusion matrix in Table 6, which is almost perfectly diagonal. The rare errors are isolated and mainly occur between spatially adjacent *AoRs* in the upper-left region. Ridge remains competitive at 99.58%, followed by SVM at 99.03% and CNN-1D at 98.86%. Among the non-pretrained models, CNN-1D exhibits the lowest error variability, with a standard deviation of 0.18%, whereas Linear Regression remains far below at 66.11%, with large error values and high variability, confirming that a simple direct linear mapping is insufficient for a 9 zone nonlinear screen partition.

As an additional exploratory experiment, we also evaluated a pretrained ResNet18 model at 50 cm. Interestingly, it slightly exceeded VBMLR and reached 99.72% mean accuracy, together with the lowest FP count (1.11) and the highest TN count (3198.89). This result is noteworthy because the ResNet did not receive a natural gaze image as input. Instead, the same handcrafted 8-dimensional feature vector was reshaped into a small pseudo-image, upsampled to the standard input resolution, and processed by an ImageNet-pretrained backbone. This suggests that transfer learning can still exploit discriminative structure even from such an artificial image-like representation. However, this slight gain must be interpreted with caution. The ResNet relies on external pretraining and uses 8.4M parameters, which implies a substantially higher overall computational cost than the non-pretrained mappings. The score difference with ResNet is not large enough to justify the much higher complexity, both in terms of the number of parameters and the amount of training data involved. The convolutional pipeline is a black box and the observed robustness cannot be attributed to explicit geometric cues, and the decision boundaries cannot be inspected or constrained. For this reason, it is discussed separately from the main comparison table.

Table 4: Distance-specific comparison at 70 cm using only non-pretrained models. Metrics are averaged over the 9 *AoR* zones (400 samples per zone).

Method	Mean Acc. (%)	Mean FP	Mean TN	Training Time (ms)	Nb Params	Min Err. (%)	Max Err. (%)	Std Err. (%)
VBMLR (proposed)	96.81	12.78	3187.22	0.0019	81	1.94	4.44	0.92
SVM (RBF)	94.53	21.89	3178.11	0.4705	35,073	4.58	6.25	0.64
LR Multiclass	63.42	146.33	3053.67	0.0003	81	35.14	38.19	0.97
Ridge	93.50	23.89	3176.11	0.0063	324	5.42	7.64	0.92
CNN-1D	96.64	14.33	3185.67	0.0071	2,809	1.81	5.42	1.22

At 70 cm, all methods degrade due to the limitations of the camera’s optical characteristics and therefore the degradation of depth due to defocusing. This degradation is visible in the fold-wise error statistics reported in Table 4, where the non-pretrained models exhibit minimum errors ranging from 1.81% to 35.14% and maximum errors ranging from 4.44% to 38.19%, depending on the method. Among the non-pretrained approaches, VBMLR remains the strongest with 96.81% mean accuracy, followed very closely by CNN-1D at 96.64%, then SVM at 94.53% and Ridge at 93.50%. Linear Regression remains substantially lower at 63.42%, with very large error values and variability across folds. For VBMLR, the confusion matrix (Table 7) shows that most errors concentrate in the upper screen zones in the present experimental setup. A plausible explanation is that, at 70 cm, small variations in the relative position of the subject, chair, and laptop had a stronger impact on the extracted depth and pose related features, making some neighboring zones more confusable than at 50 cm. In particular, *AoR* 2 and *AoR* 4 exhibit the strongest mixing with their adjacent neighbors, while the lower *AoRs* (7–9) remain essentially perfect. This pattern supports a geometric

interpretation that at longer range, depth-related features, notably T_z and its interaction with δ_x, δ_y , become noisier with a webcam.

Table 5: Global comparison (50 cm and 70 cm pooled) using only non-pretrained models. Metrics are averaged over the 9 *AoR* zones (800 samples per zone).

Method	Mean Acc. (%)	Mean FP	Mean TN	Training Time (ms)	Equivalent Params	Min Err. (%)	Max Err. (%)	Std Err. (%)
VBMLR (proposed)	87.03	101.44	6298.56	0.0019	81	12.15	13.61	0.49
SVM (RBF)	92.79	64.89	6335.11	0.4716	35,073	6.53	8.13	0.52
LR Multiclass	54.61	363.11	6036.89	0.0003	81	44.17	47.08	1.05
Ridge	86.26	108.78	6291.22	0.0063	324	13.33	14.38	0.42
CNN-1D	93.72	49.22	6350.78	0.0071	2,809	6.04	6.67	0.23

To assess robustness when training a single shared model on pooled 50 cm and 70 cm samples, we also report a global evaluation. The aim of this experiment is to produce a model that learns from multiple people and multiple distances. This setting is substantially more challenging because each *AoR* zone must now be recognized under two distinct depth conditions using a single shared model. As shown in Table 5, VBMLR drops to 87.03%, with a minimum fold error of 12.15%, a maximum fold error of 13.61%, and a standard deviation of 0.49%, indicating a clear loss of robustness to distance variability in the pooled setting. Ridge follows a similar trend and reaches 86.26%, with even larger error values. By contrast, SVM (92.79%) and CNN-1D (93.72%) degrade more gracefully, with CNN-1D achieving the strongest overall performance among the non-pretrained models, together with the lowest FP count, the highest TN count, and the tightest error statistics. The VBMLR confusion matrix in Table 8 indicates that the dominant confusions are concentrated among the upper *AoRs* (1–6), while the lower *AoRs* (8–9) remain highly reliable, with recall values above 97%. One plausible explanation is that a single shared model trained on both 50 cm and 70 cm samples is more affected by the combined variability across distances and subjects, which makes the separation between these neighboring zones less stable. This result suggests that the current VBMLR formulation does not model multimodality strongly enough across viewing distances, since the depth-related feature T_z , in interaction with the other features, appears insufficient to separate the pooled geometric regimes. A natural extension would therefore be to incorporate an RBF kernel, as in SVM, in order to better model the nonlinear separation across viewing distances.

To resume, figure 9 reports the mean zone accuracy (%) at 50 cm and 70 cm for all compared methods.

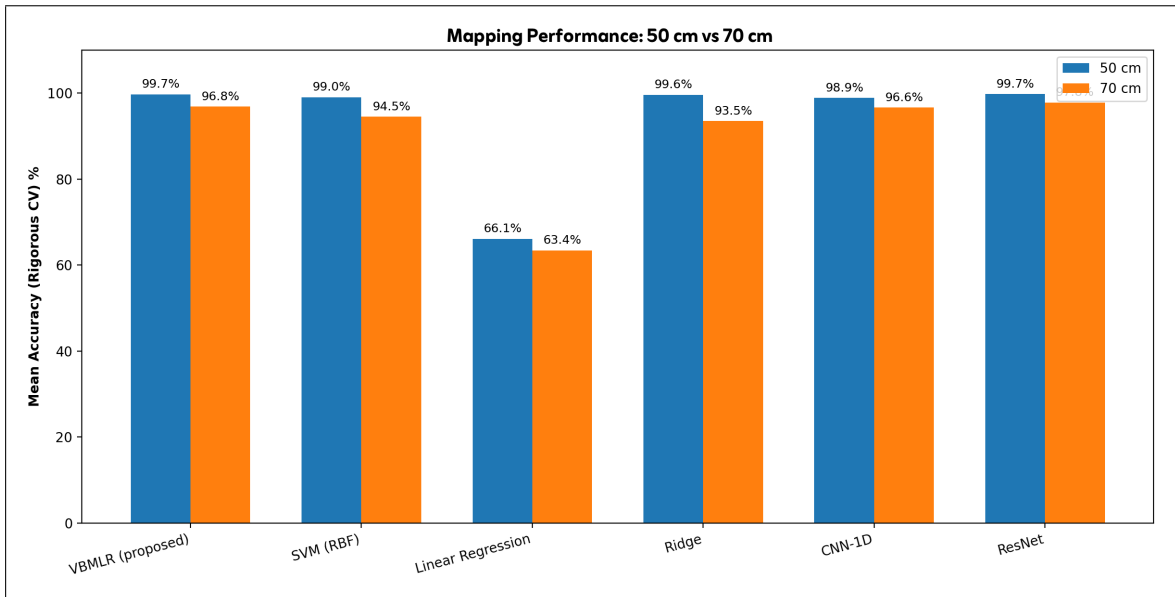


Figure 9: Mean zone accuracy (%) at 50 cm and 70 cm for all evaluated mappings under 5-fold stratified cross-validation.

In practice, these results support the design choice of VBMLR as our primary method. First, it achieves

near-perfect performance for all single-session and fixed working distance with extremely low inference time (about 0.002 ms/sample) and needs only 81 parameters. Second, it remains lightweight and interpretable as VBMLR requires no GPU and outputs calibrated posterior probabilities rather than opaque scores. This probabilistic output is particularly valuable for uncertainty-aware decision rules.

Tables 6–8 report the full zone by zone count tables for the proposed VBMLR method. Entries are sample counts; the % column is the per zone recall and the # column is the number of test samples for that zone.

VBMLR (Proposed) — 50 cm

<i>AoR</i> Classification	1	2	3	4	5	6	7	8	9	%	#
1	398			2						99.5	400
2		400								100.0	400
3			397			3				99.25	400
4	2			398						99.5	400
5					400					100.0	400
6				3		396			1	99.0	400
7							400			100.0	400
8								400		100.0	400
9									400	100.0	400
Total										99.69	3600

Table 6: VBMLR confusion matrix at 50 cm (4 subjects; 400 samples per zone).

VBMLR (Proposed) — 70 cm

<i>AoR</i> Classification	1	2	3	4	5	6	7	8	9	%	#
1	387	1		12						96.75	400
2	23	361	7	4	5					90.25	400
3		1	399							99.75	400
4	25	4		366	2		3			91.50	400
5		5		12	383					95.75	400
6			8		3	389				97.25	400
7							400			100.0	400
8								400		100.0	400
9									400	100.0	400
Total										96.81	3600

Table 7: VBMLR confusion matrix at 70 cm (4 subjects; 400 samples per zone). Confusion concentrates on spatially adjacent *AoRs* in the upper screen region.

VBMLR (Proposed) — Global (50 cm + 70 cm)

<i>AoR</i> Classification	1	2	3	4	5	6	7	8	9	%	#
1	597	24		166	13					74.63	800
2	43	628	13	75	41					78.50	800
3		2	762		7	29				95.25	800
4	106	18		612	44		20			76.50	800
5	12	43	25	22	686	5		7		85.75	800
6			78		14	687			21	85.88	800
7	7			27	14		731	21		91.38	800
8					1	1	10	787	2	98.38	800
9						6		18	776	97.00	800
Total										87.03	7200

Table 8: VBMLR confusion matrix in the global pooled setting (50 cm + 70 cm; 800 samples per zone). Cross-distance confusion concentrates in depth-sensitive upper *AoRs* (1–6); lower *AoRs* (8–9) remain above 97%.

8 Conclusion

In this paper, we presented an eye-gaze estimation system that requires only a 2D camera such as an integrated webcam, in contrast with many existing gaze-tracking systems that rely on infrared illumination, multiple cameras, or dedicated hardware. By estimating facial relief from blur, the proposed pipeline also reduces the need for external markers or additional tracking components. The experimental results show that the proposed VBMLR-based approach achieves near-perfect accuracy under the evaluated acquisition conditions, with the user positioned 50 cm or 70 cm from the screen, while remaining computationally lightweight, probabilistic, and analytically tractable. The comparison across mappings further clarifies the contribution of the proposed method. In fixed-distance conditions, VBMLR remains competitive compared to five other methods while offering a simpler training and deployment profile than CNN-based alternatives. Overall, the scores support the use of VBMLR for low-cost webcam-based screen interaction scenarios where the embedded camera is fixed or known during a session. They also motivate several targeted extensions for broader deployment, including evaluations under real-world conditions, reducing the error when training on multiple users placed at different distances, and reducing the size of the areas of regard. Future experiments will expand the subject pool and acquisition conditions to better assess inter-subject generalization. A key direction will be cross-distance adaptation. Investigating distance-aware normalization and domain adaptation strategies could preserve the efficiency of VBMLR while extending its robustness to varying user-to-screen geometries.

Data availability

Data will be made available on request.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- [1] C.-M. Gheorghe, V. L. Purcărea, and I.-R. Gheorghe, “Using eye-tracking technology in neuromarketing,” *Romanian Journal of Ophthalmology*, vol. 67, no. 1, 2023.

- [2] G. Underwood, “Cognitive processes in eye guidance: Algorithms for attention in image processing,” *Cognitive Computation*, vol. 1, no. 1, pp. 64–76, 2009.
- [3] G. Underwood, *Eye Guidance in Reading and Scene Perception*. Elsevier Science Ltd, 1998.
- [4] A. T. Duchowski, *Eye Tracking Methodology: Theory and Practice*. New York: Springer-Verlag, 2007.
- [5] D. Deshpande, B. P. Vasgi, P. Chavan, and P. Deshpande, “From gaze to purchase: A comprehensive survey on eye-tracking and pupil variation in recommendation systems and e-commerce,” in *Proceeding of the 1st International Conference on Lifespan Innovation (ICLI 2025)*, pp. 32–39, Atlantis Press, 2025.
- [6] D. B. Carr and P. Grover, “The role of eye tracking technology in assessing older driver safety,” *Geriatrics*, vol. 5, no. 2, 2020.
- [7] B. Kapitaniak, M. Walczak, M. Kosobudzki, Z. Jóźwiak, and A. Bortkiewicz, “Application of eye-tracking in drivers testing: A review of research,” *International journal of occupational medicine and environmental health*, vol. 28, no. 6, 2015.
- [8] S. Achary, R. Girmaji, A. A. Deshmukh, and V. Gandhi, “Real time gazed: Online shot selection and editing of virtual cameras from wide-angle monocular video recordings,” in *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pp. 4108–4116, 2024.
- [9] J. Treuting, “Eye tracking and the cinema: A study of film theory and visual perception,” *SMPTE Motion Imaging Journal*, vol. 115, no. 1, pp. 31–40, 2006.
- [10] K. K. Rachavarapu, *Towards Data-Driven Cinematography and Video Retargeting using Gaze*. Ph.d. thesis, International Institute of Information Technology, Hyderabad, India, 2019.
- [11] A. Kar and P. Corcoran, “A review and analysis of eye-gaze estimation systems, algorithms and performance evaluation methods in consumer platforms,” *IEEE Access*, pp. 16495–16519, 2017.
- [12] D. W. Hansen and Q. Ji, “In the eye of the beholder: A survey of models for eyes and gaze,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 32, no. 3, pp. 478–500, 2010.
- [13] X. L. C. Brolly and J. B. Mulligan, “Implicit calibration of a remote gaze tracker,” in *Computer Vision and Pattern Recognition Workshop (CVPRW)*, pp. 134–134, 2004.
- [14] J. Mansanet, A. Albiol, R. Paredes, J. M. Mossi, and A. Albiol, “Estimating point of regard with a consumer camera at a distance,” in *Pattern Recognition and Image Analysis (IbPRIA 2013)*, pp. 881–888, Springer, 2013.
- [15] F. Pirri, M. Pizzoli, and A. Rudi, “A general method for the point of regard estimation in 3d space,” in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2011.
- [16] K. Takemura, Y. Kohashi, T. Suenaga, J. Takamatsu, and T. Ogasawara, “Estimating 3d point-of-regard and visualizing gaze trajectories under natural head movements,” in *Symposium on Eye-Tracking Research and Applications*, 2010.
- [17] X. Zhang, L. Wang, Y. He, Z. Mou, and Y. Cao, “High-speed eye tracking based on a synchronized imaging mechanism by a dual-ring infrared lighting source,” *Applied Optics*, vol. 63, no. 16, pp. 4293–4302, 2024.
- [18] I. S. Shehu, Y. Wang, A. M. Athuman, and X. Fu, “Remote eye gaze tracking research: A comparative evaluation on past and recent progress,” *Electronics*, vol. 10, no. 24, 2021.
- [19] V. Vidhya and D. Resende Faria, “Real-time gaze estimation using webcam-based cnn models for human–computer interactions,” *Computers*, vol. 14, no. 2, p. 57, 2025.
- [20] J. Wang, T. Wang, B. Xu, O. Cossairt, and F. Willomitzer, “Accurate eye tracking from dense 3d surface reconstructions using single-shot deflectometry,” *Nature Communications*, vol. 16, no. 1, p. 2902, 2025.

- [21] R. Jafari and D. Ziou, “Gaze estimation using kinect/ptz camera,” in *ROSE 2012*, (Magdeburg, Germany), pp. 13–18, 2012.
- [22] R. Jafari and D. Ziou, “Eye-gaze estimation under various head positions and iris states,” *Expert Systems with Applications*, vol. 42, no. 1, pp. 510–518, 2015.
- [23] R. Jafari and D. Ziou, “Eye-gaze estimation using kinect,” in *11th Asian conference on computer vision, In DEMO section*, 2012.
- [24] D. Ziou and R. Jafari, “Efficient steganalysis of images: learning is good for anticipation,” *Pattern Analysis and Applications*, vol. 17, no. 2, pp. 279–289, 2014.
- [25] L. Falch and K. S. Lohan, “Webcam-based gaze estimation for computer screen interaction,” *Frontiers in Robotics and AI*, vol. 11, p. 1369566, 2024.
- [26] Q. Huang, A. Veeraraghavan, and A. Sabharwal, “Tabletgaze: Unconstrained appearance-based gaze estimation in mobile tablets,” *arXiv preprint arXiv:1508.01244*, 2015.
- [27] K. Krafka, A. Khosla, P. Kellnhofer, H. Kannan, S. Bhandarkar, W. Matusik, and A. Torralba, “Eye tracking for everyone,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [28] A. Papoutsaki, P. Sangkloy, J. Laskey, N. Daskalova, J. Huang, and J. Hays, “Webgazer: Scalable webcam eye tracking using user interactions,” in *Proceedings of the 25th International Joint Conference on Artificial Intelligence (IJCAI)*, 2016.
- [29] H. Deng and W. Zhu, “Monocular free-head 3d gaze tracking with deep learning and geometry constraints,” in *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [30] P. Kellnhofer, A. Recasens, S. Stent, W. Matusik, and A. Torralba, “Gaze360: Physically unconstrained gaze estimation in the wild,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2019.
- [31] X. Zhang, Y. Sugano, M. Fritz, and A. Bulling, “Mpiigaze: Real-world dataset and deep appearance-based gaze estimation,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2019.
- [32] X. Zhang *et al.*, “Eth-xgaze: A large scale dataset for gaze estimation,” in *ECCV*, 2020.
- [33] S. Park, E. Aksan, X. Zhang, and O. Hilliges, “Towards end-to-end video-based eye tracking,” in *Proceedings of the European Conference on Computer Vision (ECCV)*, 2020.
- [34] J. Chen and Q. Ji, “3d gaze estimation with a single camera without ir illumination,” in *Proceedings of the 19th International Conference on Pattern Recognition (ICPR)*, 2008.
- [35] R. Valenti, N. Sebe, and T. Gevers, “Webcam-based visual gaze estimation,” in *International Conference on Image Analysis and Processing*, 2009.
- [36] A. Papoutsaki, J. Laskey, and J. Huang, “Searchgazer: Webcam eye tracking for remote studies of web search,” in *Proceedings of the ACM Conference on Human Information Interaction and Retrieval (CHIIR)*, 2017.
- [37] Y. Cheng, S. Huang, F. Wang, C. Qian, and F. Lu, “Appearance-based gaze estimation with deep learning: A review and benchmark,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- [38] X. Zhang, Y. Sugano, and A. Bulling, “Revisiting data normalization for appearance-based gaze estimation,” in *Proceedings of the ACM Symposium on Eye Tracking Research and Applications*, 2018.
- [39] X. Zhang, Y. Sugano, and A. Bulling, “Evaluation of appearance-based methods and implications for gaze-based applications,” in *Proceedings of the CHI Conference on Human Factors in Computing Systems*, 2019.

- [40] J. Yue, P. Lan, Y. Zhou, and Z. Dong, “Gaze estimation by integrating eye and head representation,” in *Proceedings of the 2024 12th International Conference on Communications and Broadband Networking, ICCBN ’24*, (New York, NY, USA), p. 136–141, Association for Computing Machinery, 2024.
- [41] V. Nagpure and K. Okuma, “Searching efficient neural architecture with multi-resolution fusion transformer for appearance-based gaze estimation,” in *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, 2023.
- [42] X. Zhang, Y. Sugano, M. Fritz, and A. Bulling, “Appearance-based gaze estimation in the wild,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 4511–4520, 2015.
- [43] E. Kuric *et al.*, “Democratizing eye-tracking? appearance-based gaze estimation with improved attention branch,” *Engineering Applications of Artificial Intelligence*, 2025.
- [44] Z. Hu, C. Zhang, S. Li, G. Wang, and D. Manocha, “Sgaze: A data-driven eye-head coordination model for realtime gaze prediction,” *IEEE Transactions on Visualization and Computer Graphics*, vol. 25, no. 5, pp. 2002–2010, 2019.
- [45] Y. Li, S. Ding, X. Li, B. Tan, and A. Kanemura, “Residual-network-based supervised gaze prediction for first-person videos,” *IEEE Access*, vol. 7, pp. 56208–56216, 2019.
- [46] Y. Cheng and F. Lu, “Gaze estimation using transformer,” in *Proceedings of the International Conference on Pattern Recognition (ICPR)*, 2022.
- [47] V. Nair and G. E. Hinton, “Rectified linear units improve restricted boltzmann machines,” in *Proceedings of the 27th international conference on machine learning (ICML-10)*, pp. 807–814, 2010.
- [48] C. Cortes and V. Vapnik, “Support-vector networks,” *Machine learning*, vol. 20, no. 3, pp. 273–297, 1995.
- [49] R. Ksantini, D. Ziou, B. Colin, and F. Dubeau, “A weighted pseudo-metric discriminatory power improvement using a variational method based bayesian logistic regression model,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 30, no. 2, pp. 256–266, 2008.
- [50] C. B. Begg and R. Gray, “Calculation of polychotomous logistic regression parameters using individualized regressions,” *Biometrika*, vol. 71, no. 1, pp. 11–18, 1984.
- [51] B. Krishnapuram, L. Carin, M. A. T. Figueiredo, and A. J. Hartemink, “Sparse multinomial logistic regression: Fast algorithms and generalization bounds,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 27, pp. 957–968, 2005.
- [52] H. Mecheri, I. Benamirouche, F. Fass, D. Ziou, and N. Kadri, “Prediction of rare events in the operation of household equipment using co-evolving time series,” *Pattern Analysis and Applications*, vol. 27, no. 3, p. 101, 2024.
- [53] P. Viola and M. Jones, “Rapid object detection using a boosted cascade of simple features,” in *Proceedings of the 2001 IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR)*, vol. 1, pp. I–I, IEEE, 2001.
- [54] J. G. Daugman, “High confidence visual recognition of persons by a test of statistical independence,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 15, no. 11, pp. 1148–1161, 1993.
- [55] A. Plopski, J. Orlosky, Y. Itoh, C. Nitschke, K. Kiyokawa, and G. Klinker, “Automated spatial calibration of HMD systems with unconstrained eye-cameras,” in *2016 IEEE International Symposium on Mixed and Augmented Reality (ISMAR)*, pp. 94–99, IEEE, 2016.
- [56] A. P. Pentland, “A new sense for depth of field,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. PAMI-9, no. 4, pp. 523–531, 1987.

- [57] D. Ziou and F. Deschênes, “Depth from defocus estimation in spatial domain,” *Computer vision and image understanding*, vol. 81, no. 2, pp. 143–165, 2001.
- [58] S. Zhuo and T. Sim, “On the recovery of depth from a single defocused image,” in *International Conference on Computer Analysis of Images and Patterns*, (Berlin, Heidelberg), pp. 889–897, Springer Berlin Heidelberg, September 2009.
- [59] D. P. Kingma and J. Ba, “Adam: A method for stochastic optimization,” *arXiv preprint arXiv:1412.6980*, 2014.
- [60] J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei, “Imagenet: A large-scale hierarchical image database,” in *2009 IEEE conference on computer vision and pattern recognition*, pp. 248–255, Ieee, 2009.