
ACPruner: Visual Token Pruning as Biased Attention Coverage Maximization in LVLMs

Xu Li Yuxuan Liang Yi Zheng Zhe Liu Xiaolei Chen
Haotian Chen Rui Zhu Fan Shi Xiangyang Xue

College of Computer Science and Artificial Intelligence
Fudan University, Shanghai, China

Abstract

Large Vision-Language Models (LVLMs) face significant computational inefficiencies caused by the large number of visual tokens. Existing visual token pruning methods mainly focus on either retaining individually important tokens or selecting mutually diverse ones. In this work, we revisit visual token pruning from a coverage perspective and formulate it as a biased attention coverage maximization problem. The key idea is to select a compact token subset whose encoder-side outgoing attention can jointly cover the image while assigning higher coverage priority to more informative regions. From this perspective, we propose **ACPruner**, a training-free visual token pruning framework for efficient LVLM inference. ACPruner first estimates token importance by combining intra-modal saliency and inter-modal relevance, then derives token-wise coverage from attention patterns within the vision encoder, and finally performs greedy selection to maximize the proposed coverage objective. Extensive experiments across multiple LVLM backbones, including LLaVA-1.5-7B/13B, LLaVA-NeXT-7B/13B, Qwen2.5-VL-7B, and LLaVA-OneVision-7B, show that ACPruner consistently achieves strong performance retention while delivering substantial end-to-end inference speedups.

1 Introduction

By integrating vision encoders with Large Language Models (LLMs), Large Vision-Language Models (LVLMs) have achieved impressive performance across a wide range of multimodal tasks, such as visual question answering, document understanding, and general multimodal reasoning [25, 26, 6]. However, this strong performance often comes at the cost of processing a large number of visual tokens [27, 39, 38, 28], especially in scenarios involving high-resolution images, multi-image inputs or long videos. This token explosion substantially increases computational overhead, limiting the practicality of LVLMs in resource-constrained or latency-sensitive applications [35, 24, 40]. Therefore, reducing the number of visual tokens while preserving model performance has become an increasingly important problem for efficient LVLM inference [7, 48, 45, 2, 23].

Existing visual token pruning methods for LVLMs can be broadly categorized into two paradigms. **Importance-based methods** prune tokens according to token-level importance scores. Depending on how importance is defined, they can be further divided into visual saliency based [3, 49, 45] and textual relevance based approaches [7, 50, 43]. The former typically rely on attention signals within the vision encoder to identify visually salient tokens, while the latter use crossmodal attention inside the LLM to preserve tokens most relevant to the input text. Despite using different metrics, these methods all follow a token-wise ranking paradigm that retains the highest-scoring tokens. In contrast, **diversity-based methods** [37, 2] focus on reducing redundancy among retained tokens. They usually compute pairwise feature similarities and retain a subset of most mutually dissimilar tokens, thereby preserving more semantically complementary visual information.

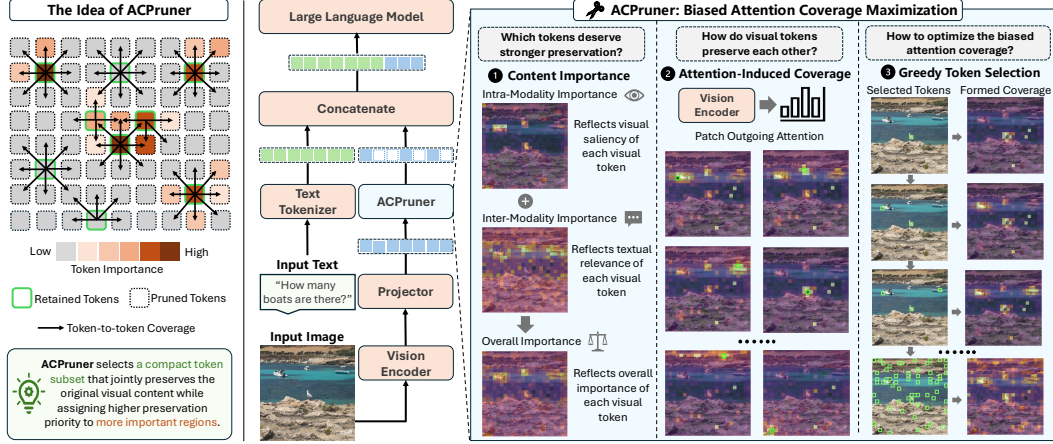


Figure 1: The left part illustrates the core idea of ACPruner. The right part shows how ACPruner is integrated with LVLm inference pipelines and provides a workflow visualization of the method.

While these methods have shown empirical effectiveness, they still suffer from inherent limitations. Importance-based methods treat token selection as an individual ranking problem. As a result, the retained tokens may concentrate excessively on a few salient regions, causing redundant preservation of similar content while overlooking the surrounding context [37, 2]. Diversity-based methods mitigate this issue by encouraging less redundancy among selected tokens, but they do not distinguish which content is more important to preserve. Consequently, they may retain tokens that are semantically distinct yet uninformative for the downstream task [47, 9].

We argue that the goal of visual token pruning is neither to retain the individually most important tokens nor the most mutually dissimilar ones, but to select a compact token subset that can jointly preserve the original visual content while placing stronger emphasis on content that is more critical for downstream reasoning. This intuition can be understood through a real-world security deployment analogy. Given a limited number of guards, an effective strategy should neither concentrate all guards in a few high-risk regions without considering overall coverage, nor distribute them uniformly without considering regional importance. Instead, each guard should be placed by jointly considering both the importance of the region and the area it can cover.

Motivated by this view, we formulate visual token pruning as a biased coverage maximization problem. The goal is to select a compact token subset that can collectively preserve the original visual information while assigning higher preservation priority to the most important content. Based on this formulation, we propose **ACPruner**, a training-free visual token pruning framework for LVLms. As shown in Fig. 1, ACPruner first estimates the preservation priority of each visual token by jointly modeling visual saliency and textual relevance. It then derives token-to-token coverage relationships from patch-to-patch attention within the vision encoder, capturing how one token can preserve the information of another. With these two components, ACPruner greedily selects tokens that provide the largest marginal gain in an importance-biased coverage objective. In this way, ACPruner explicitly accounts for both which visual tokens should be prioritized and how the retained tokens collectively preserve the original visual information. Moreover, since ACPruner operates before the LLM and does not rely on LLM-side attention signals, it effectively reduces the expensive LLM inference overhead while remaining compatible with FlashAttention. Extensive experiments across diverse LVLm families and task categories demonstrate that ACPruner achieves strong performance retention while delivering substantial end-to-end efficiency gains in practice.

Overall, our contributions are threefold: (1) We reformulate visual token pruning as a biased attention coverage maximization problem, offering a new perspective beyond conventional importance-based and diversity-based formulations; (2) We propose ACPruner, a training-free and pre-LLM visual token pruning framework for LVLms that instantiates this formulation by jointly modeling content importance and attention-induced token coverage; (3) We validate the effectiveness of ACPruner across diverse LVLm backbones, including LLaVA-1.5-7B/13B, LLaVA-NeXT-7B/13B, LLaVA-OneVision-7B and Qwen2.5-VL-7B, on both image and video understanding tasks.

2 Method

2.1 Problem Definition

A typical LVLM consists of three components: a vision encoder, a projector, and an LLM. Given an input image, the vision encoder first extracts visual features, which are subsequently mapped by the projector into the input embedding space of the LLM. We denote the resulting visual tokens as $\mathbf{V} = \{\mathbf{v}_1, \dots, \mathbf{v}_T\} \subseteq \mathbb{R}^d$, where T is the number of visual tokens and d is the embedding dimension. Given an input textual query, we denote the embedded textual tokens as $\mathbf{U} = \{\mathbf{u}_1, \dots, \mathbf{u}_N\} \subseteq \mathbb{R}^d$, where N is the number of textual tokens. The visual and textual tokens are concatenated in sequence and jointly processed by the LLM to produce a textual response, denoted by $\mathcal{M}_\theta(\mathbf{V}, \mathbf{U})$. The goal of visual token pruning is to select a visual token subset $\mathbf{S} \subset \mathbf{V}$, with $|\mathbf{S}| = k$ and $k \ll T$, that can replace the full visual token set while preserving the original model behavior as much as possible. This objective can be formally written as a constrained optimization problem:

$$\min_{\mathbf{S} \subset \mathbf{V}} \mathcal{L}(\mathcal{M}_\theta(\mathbf{S}, \mathbf{U}), \mathcal{M}_\theta(\mathbf{V}, \mathbf{U})) \quad \text{s.t.} \quad |\mathbf{S}| = k, \quad (1)$$

where $\mathcal{L}$ measures the discrepancy between the model outputs before and after visual token pruning.

2.2 Reformulating Visual Token Pruning as Biased Coverage Maximization

Directly optimizing Eq. (1) in a training-free setting is intractable, as it requires evaluating the effect of every candidate subset on the final model output. Therefore, a surrogate objective is needed to assess the quality of $\mathbf{S}$ at an early stage of the inference pipeline. Existing methods usually rely on importance-based or diversity-based objectives. Importance-based methods aim to maximize the sum of individual token importance scores within $\mathbf{S}$, while diversity-based methods seek to minimize the mutual feature similarity within $\mathbf{S}$. However, both paradigms focus on the selected subset $\mathbf{S}$ itself, without explicitly modeling how well it preserves the original token set $\mathbf{V}$.

In this work, we treat each original visual token $\mathbf{v}_j \in \mathbf{V}$ as an information unit to be preserved, and ask whether the selected subset $\mathbf{S}$ can jointly preserve the overall information carried by the tokens in $\mathbf{V}$. Moreover, since different visual tokens contribute unequally to downstream reasoning, more informative content should receive higher preservation priority. Based on this view, we reformulate visual token pruning as a biased coverage maximization problem:

$$\max_{\mathbf{S} \subset \mathbf{V}} \sum_{j=1}^T w_j \text{Cov}(\mathbf{S}, \mathbf{v}_j) \quad \text{s.t.} \quad |\mathbf{S}| = k, \quad (2)$$

where $w_j \geq 0$ denotes the content importance of $\mathbf{v}_j$, and $\text{Cov}(\mathbf{S}, \mathbf{v}_j)$ measures how well the selected subset $\mathbf{S}$ preserves the content of $\mathbf{v}_j$. Under this formulation, an effective token subset should not only preserve the original visual content collectively, but also allocate stronger preservation capacity to the most important tokens. In the following, we instantiate this objective by defining the importance weight w_j and the coverage term $\text{Cov}(\mathbf{S}, \mathbf{v}_j)$.

2.3 Content Importance: Which Tokens Deserve Stronger Preservation?

In Eq. (2), the importance weight w_j determines the preservation priority of each original visual token $\mathbf{v}_j \in \mathbf{V}$. We estimate this priority from two complementary perspectives: intra-modality importance, which captures how much a token contributes to the global visual semantics, and inter-modality importance, which measures how relevant the token is to the input textual query.

Intra-modality importance. To estimate the visual saliency of each token, we leverage the CLS-to-patch attention in the penultimate layer of the vision encoder, and define the intra-modality importance of token $\mathbf{v}_j$ as:

$$s_j^{\text{intra}} = \frac{1}{H} \sum_{h=1}^H A_{\text{cls} \rightarrow j}^{(h)}, \quad (3)$$

where $A_{\text{cls} \rightarrow j}^{(h)}$ denotes the attention weight assigned by the CLS token to the j -th patch token at head h , and H is the number of attention heads. For LVLMs whose vision encoders do not contain a CLS token, we use the average incoming attention of each patch token as a surrogate saliency measure.

Inter-modality importance. To measure the textual relevance of each visual token, we first use a lightweight NLP model [1] to extract nouns from the input text and treat them as the key semantic units of the query. For each noun, we obtain a word-level embedding by average pooling its token embeddings. Let $\mathcal{N}(\mathbf{U}) \subseteq \mathbb{R}^d$ denote the set of extracted word-level embeddings. The inter-modality importance of $\mathbf{v}_j$ is defined as:

$$s_j^{\text{inter}} = \max_{\mathbf{u}_k \in \mathcal{N}(\mathbf{U})} r_{jk}, \quad (4)$$

where r_{jk} denotes the cosine similarity between visual token $\mathbf{v}_j$ and word embedding $\mathbf{u}_k$. Since this computation does not rely on LLM-side attention weights, it remains compatible with FlashAttention.

Fused importance. We combine the two importance signals to obtain the final importance weight:

$$w_j = \alpha \tilde{s}_j^{\text{intra}} + (1 - \alpha) \tilde{s}_j^{\text{inter}}, \quad (5)$$

where $\tilde{s}_j^{\text{intra}}$ and $\tilde{s}_j^{\text{inter}}$ denote the softmax-normalized intra-modality and inter-modality importance scores, and $\alpha \in [0, 1]$ controls the trade-off between them. When noun extraction returns an empty set, we fall back to pure intra-modality importance by setting $\alpha = 1$.

2.4 Attention-Induced Coverage: How Do Visual Tokens Preserve Each Other?

LVLMS typically use ViT-based vision encoders [12], where visual tokens interact with each other through self-attention. Therefore, each visual token does not only encode its local patch content, but also aggregates information from other tokens [44]. This motivates us to use patch-to-patch attention inside the vision encoder to characterize how one visual token can help preserve another.

Let $A_{i \rightarrow j}^{(l,h)}$ denote the attention weight from token $\mathbf{v}_i$ to token $\mathbf{v}_j$ at layer l and head h in the vision encoder. We define the token-level coverage of $\mathbf{v}_i$ over $\mathbf{v}_j$ as:

$$c_{ij} = \frac{1}{LH} \sum_{l=1}^L \sum_{h=1}^H A_{i \rightarrow j}^{(l,h)}, \quad (6)$$

where L and H denote the numbers of layers and attention heads. It measures how much token $\mathbf{v}_i$ attends to token $\mathbf{v}_j$ on average, and thus how much $\mathbf{v}_i$ preserves the information associated with $\mathbf{v}_j$. Based on this token-level coverage relationship, we define the coverage of a selected subset $\mathbf{S}$ over an original token $\mathbf{v}_j$ as:

$$\text{Cov}(\mathbf{S}, \mathbf{v}_j) = \begin{cases} \max_{\mathbf{v}_i \in \mathbf{S}} c_{ij}, & \text{if } \mathbf{S} \neq \emptyset, \\ 0, & \text{if } \mathbf{S} = \emptyset. \end{cases} \quad (7)$$

This attention-induced coverage differs fundamentally from relations defined by pairwise feature similarity. Feature similarity measures static proximity in the embedding space, whereas our coverage is derived from the internal information flow of the vision encoder. Consequently, the proposed coverage is generally directional, i.e., $c_{ij} \neq c_{ji}$ in general. Such asymmetry is desirable because preservation is inherently directional: one retained token may strongly preserve another, while the reverse relation can be much weaker.

2.5 Optimizing the Biased Attention Coverage Objective

With the importance weight and coverage relation defined above, we instantiate the final pruning objective as:

$$\max_{\mathbf{S} \subset \mathbf{V}} \sum_{j=1}^T w_j^\beta \text{Cov}(\mathbf{S}, \mathbf{v}_j) \quad \text{s.t.} \quad |\mathbf{S}| = k, \quad (8)$$

where $\beta > 0$ controls the strength of the importance bias. This objective encourages the selected subset to collectively preserve the original token set through attention-induced coverage, while allocating greater preservation priority to more important visual content.

Directly solving Eq. (8) is NP-hard (proof provided in Appendix C), we therefore adopt a greedy selection strategy. Given a current selected subset $\mathbf{S}$, we define the marginal coverage gain of a candidate token $\mathbf{v}_i \in \mathbf{V} \setminus \mathbf{S}$ as:

$$\Delta(\mathbf{v}_i | \mathbf{S}) = \sum_{j=1}^T w_j^\beta \max(c_{ij} - m_j, 0), \quad (9)$$

where $m_j = \text{Cov}(\mathbf{S}, \mathbf{v}_j)$ denotes the current coverage of subset $\mathbf{S}$ over token $\mathbf{v}_j$. This marginal gain measures how much additional importance-biased coverage the candidate token $\mathbf{v}_i$ can provide for content that is not yet well preserved. At each step, we select the token with the largest marginal gain and add it to $\mathbf{S}$ until the token budget k is reached. The pseudocode is provided in Appendix D.

In Appendix B, we further show that Eq. (8) is equivalent to minimizing an importance-weighted representative distortion over the original visual token set, and that the objective is monotone submodular. Therefore, the greedy algorithm admits a standard approximation guarantee, indicating that ACPruner is grounded in a principled optimization formulation rather than a heuristic design.

3 Experiments

Table 1: Performance comparison on LLaVA-1.5-7B under different pruning ratios. ‘‘Perf. Ret.’’ denotes the average performance retention rate relative to the full-token baseline.

Method	Venue	MME	GQA	SQA	POPE	TextVQA	VizWiz	VQA-v2	MMB	MM-Vet	Perf. Ret.
Upper Bound, 576 visual tokens (pruning ratio = 0%)											
LLaVA-1.5-7B	CVPR’24	1862	61.9	69.5	85.9	58.2	50.0	78.4	64.7	31.3	100.0%
Retain 192 visual tokens (pruning ratio = 66.7%)											
FastV	ECCV’24	1612	52.7	67.3	64.8	52.5	50.8	67.1	61.2	27.7	89.4%
PruMerge	ICCV’25	1632	54.3	67.9	71.3	54.3	50.1	70.6	59.6	-	91.5%
FasterVLM	arXiv’24	1780	59.3	70.0	85.3	57.3	50.1	75.2	63.5	31.8	98.4%
VisPruner	ICCV’25	1817	59.4	70.1	85.8	57.2	51.7	75.2	63.3	32.7	99.4%
SparseVLM	ICML’25	1721	57.6	69.1	83.6	56.1	50.5	75.6	62.5	31.5	97.0%
HiRED	AAAI’25	1737	58.7	68.4	82.8	47.4	50.1	74.9	62.8	-	94.7%
DART	EMNLP’25	1856	60.0	69.8	82.8	57.4	51.1	76.7	63.6	31.5	99.0%
VisionZIP	CVPR’25	1783	59.3	68.9	85.3	57.3	50.9	76.8	63.0	31.7	98.5%
DivPrune	CVPR’25	1751	60.0	68.7	87.0	56.4	51.2	75.5	62.3	32.0	98.4%
PDrop	CVPR’25	1766	57.1	68.8	82.3	56.1	51.1	75.1	63.2	30.5	96.8%
SCOPE	NeurIPS’25	1804	60.1	68.8	86.4	57.7	-	-	63.6	32.5	99.3%
PruneSID	ICLR’26	1791	60.1	68.5	86.9	56.7	-	76.8	63.7	-	98.1%
LearnPruner	ICLR’26	1820	60.3	68.5	86.7	57.3	-	77.3	63.8	-	98.6%
ACPruner	Ours	1800	60.5	68.9	87.5	57.9	51.5	77.6	64.5	33.0	100.2%
Retain 128 visual tokens (pruning ratio = 77.8%)											
FastV	ECCV’24	1490	49.6	60.2	59.6	50.6	51.3	61.8	56.1	28.1	84.6%
PruMerge	ICCV’25	1554	53.3	67.1	67.2	54.3	50.3	68.8	58.1	-	89.5%
FasterVLM	arXiv’24	1762	57.8	70.0	82.8	56.3	51.1	73.9	62.5	32.5	97.6%
TRIM	COLING’25	1743	58.4	68.6	85.3	52.2	51.6	75.4	63.0	29.9	96.4%
VisPruner	ICCV’25	1771	58.0	69.1	84.6	57.0	52.7	73.9	61.9	33.7	98.6%
SparseVLM	ICML’25	1696	56.0	67.1	80.5	54.9	51.4	73.8	60.0	29.0	94.3%
HiRED	AAAI’25	1710	57.2	68.1	79.8	46.1	51.3	73.4	61.5	-	93.2%
DART	EMNLP’25	1840	58.7	69.1	80.1	56.4	51.7	75.9	63.2	30.9	97.8%
VisionZIP	CVPR’25	1762	57.6	68.9	83.2	56.8	51.6	75.6	62.0	32.6	97.9%
DivPrune	CVPR’25	1752	59.2	69.0	86.9	56.0	52.7	74.7	62.3	30.7	97.9%
PDrop	CVPR’25	1644	56.0	68.3	82.3	55.1	51.0	72.9	61.1	30.8	95.0%
SCOPE	NeurIPS’25	1776	59.7	68.4	86.1	57.2	-	-	62.5	31.4	98.0%
AdaptPrune	NeurIPS’25	1755	59.3	68.5	86.5	57.0	52.6	76.4	62.3	-	98.3%
PruneSID	ICLR’26	1749	58.8	68.3	86.5	54.7	-	75.3	62.1	-	96.3%
LearnPruner	ICLR’26	1750	58.9	68.3	86.8	56.6	-	76.0	62.6	-	97.1%
ACPruner	Ours	1812	59.8	69.4	87.2	57.6	52.0	76.8	63.2	32.8	99.8%
Retain 64 visual tokens (pruning ratio = 88.9%)											
FastV	ECCV’24	1256	46.1	51.1	48.0	47.8	50.8	55.0	48.0	26.7	76.1%
PruMerge	ICCV’25	1549	51.9	68.1	65.3	54.0	50.1	67.4	55.3	-	88.2%
FasterVLM	arXiv’24	1667	55.0	70.2	76.6	55.3	51.7	70.6	60.6	31.5	94.6%
TRIM	COLING’25	1680	56.6	69.0	85.9	49.7	51.1	72.4	60.9	24.8	92.7%
VisPruner	ICCV’25	1691	55.4	69.1	80.4	55.8	53.3	70.9	60.1	31.7	95.6%
SparseVLM	ICML’25	1505	52.7	62.2	75.1	51.8	50.1	68.2	56.2	24.9	87.3%
HiRED	AAAI’25	1599	54.6	68.2	73.6	44.2	50.2	69.7	60.2	-	89.5%
DART	EMNLP’25	1765	55.9	69.8	73.9	54.4	51.6	72.4	60.6	26.5	93.2%
VisionZIP	CVPR’25	1690	55.1	69.0	77.0	55.5	52.9	72.4	60.1	31.7	95.2%
DivPrune	CVPR’25	1638	57.6	68.3	85.6	55.5	53.6	72.9	59.3	29.4	95.6%
PDrop	CVPR’25	1092	41.9	68.6	55.9	45.9	50.7	69.2	33.3	30.7	78.7%
SCOPE	NeurIPS’25	1698	58.3	68.6	83.9	56.6	-	-	61.7	30.4	95.9%
AdaptPrune	NeurIPS’25	1715	57.4	68.8	84.8	54.3	53.9	74.7	61.4	-	96.7%
PruneSID	ICLR’26	1733	57.1	67.8	83.8	54.2	-	73.7	58.8	-	94.1%
LearnPruner	ICLR’26	1672	57.2	68.2	84.5	56.1	-	74.0	60.8	-	94.8%
ACPruner	Ours	1728	58.3	69.0	86.3	56.7	53.1	75.1	61.8	32.0	98.2%

3.1 Experimental Setup

Implementation details. We validate ACPruner on LVLMS from different model families and scales, including LLaVA-1.5-7B/13B [25], LLaVA-NeXT-7B/13B [26], LLaVA-OneVision-7B [19],

Table 2: Performance comparison on LLaVA-NeXT-7B under different pruning ratios. “Perf. Ret.” denotes the average performance retention rate relative to the full-token baseline.

Method	Venue	MME	GQA	SQA	POPE	TextVQA	VizWiz	VQA-v2	MMB	Perf. Ret.
Upper Bound, up to 2880 visual tokens (pruning ratio = 0%)										
LLaVA-NeXT-7B	CVPR’24	1842	64.3	70.2	86.5	61.3	55.2	81.3	67.9	100.0%
Retain up to 640 visual tokens (pruning ratio = 77.8%)										
FastV	ECCV’24	1807	58.9	67.4	79.5	58.1	53.9	77.0	63.1	94.7%
PruMerge	ICCV’25	1790	60.8	67.8	85.3	54.9	57.9	78.2	64.6	96.6%
DART	EMNLP’25	1793	61.3	68.2	85.0	59.5	57.0	78.3	64.9	97.5%
SparseVLM	ICML’25	1772	61.2	67.6	85.3	59.7	53.6	79.2	65.9	96.9%
PDrop	CVPR’25	1782	60.0	66.7	83.8	57.8	53.8	79.1	64.1	95.7%
DivPrune	CVPR’25	1773	61.9	67.8	86.9	57.0	55.7	79.3	65.8	97.2%
VisionZIP	CVPR’25	1782	61.3	68.1	86.2	59.9	57.1	79.1	66.3	98.1%
SCOPE	NeurIPS’25	1842	61.9	67.8	-	60.1	-	-	66.2	97.7%
PruneSID	ICLR’26	1795	61.6	68.3	86.3	-	-	-	64.2	97.0%
AgilePruner	ICLR’26	1802	62.0	67.8	86.1	59.0	56.0	79.3	65.9	97.8%
ACPruner	Ours	1821	63.2	69.0	87.4	60.2	57.2	79.6	67.1	99.4%
Retain up to 320 visual tokens (pruning ratio = 88.9%)										
FastV	ECCV’24	1539	49.8	66.6	49.5	52.2	51.3	61.5	53.4	80.7%
PruMerge	ICCV’25	1744	58.8	68.1	79.5	54.0	57.7	75.3	63.0	94.1%
DART	EMNLP’25	1710	59.5	67.5	81.0	57.6	56.1	75.7	64.2	94.8%
SparseVLM	ICML’25	1747	57.9	67.2	76.9	56.5	54.2	74.6	63.1	93.1%
PDrop	CVPR’25	1672	50.4	66.7	60.8	49.0	49.7	66.8	55.5	83.5%
DivPrune	CVPR’25	1731	61.1	67.7	84.7	56.2	55.6	77.2	63.9	95.6%
VisionZIP	CVPR’25	1698	59.3	67.3	82.1	58.9	56.2	76.2	63.1	95.0%
SCOPE	NeurIPS’25	1789	61.0	67.7	-	58.4	-	-	65.9	96.2%
PruneSID	ICLR’26	1754	60.5	67.3	83.1	-	-	-	63.0	94.8%
AgilePruner	ICLR’26	1760	60.1	67.3	84.0	58.4	55.8	77.8	64.5	96.2%
ACPruner	Ours	1774	62.4	68.8	87.1	59.1	56.5	78.2	65.0	97.8%

and Qwen2.5-VL-7B [6]. For LLaVA family, we set $\alpha = 0.6$ and $\beta = 1.0$. For Qwen2.5-VL, we set $\alpha = 0.2$ and $\beta = 1.0$. For noun extraction, we use the lightweight `en_core_web_sm` [1] model.

Evaluation protocols. We compare ACPruner with pruning methods published at recent AI conferences across both image and video understanding tasks. For image understanding, we benchmark on GQA [18], VizWiz [17], VQA-v2 [16], SQA [30], TextVQA [32], POPE [22], MME [14], MMB [29], and MM-Vet [46]. For video understanding, we evaluate on MVBench [20], LongVideoBench [41], NextQA [42], and VideoMME [15]. Details of the comparison methods and evaluation benchmarks are provided in Appendices I and H. Evaluations are conducted on a cluster of 8 NVIDIA L20 GPUs.

3.2 Main Results

Results on LLaVA-1.5-7B. LLaVA-1.5 adopts a fixed-resolution visual encoding strategy, where each input image is resized to 336^2 and encoded into 576 visual tokens. Table 1 demonstrates the performance comparison on LLaVA-1.5-7B under three pruning ratios. At the moderate pruning ratio of 66.7%, ACPruner achieves the best overall performance retention of 100.2%, even slightly surpassing the full-token baseline. This suggests that removing redundant visual tokens can help reduce input noise. At the more aggressive pruning ratio of 77.8%, ACPruner remains the best-performing method overall, achieving 99.8% performance retention. Even under the extremely high pruning ratio of 88.9%, ACPruner still attains the highest average performance retention of 98.2%.

Results on LLaVA-NeXT-7B. LLaVA-NeXT adopts an image tiling strategy for high-resolution visual encoding. Each input image is first resized to the closest aspect ratio in $\{(336, 672), (672, 336), (672, 672), (1008, 336), (336, 1008)\}$ and then partitioned into non-overlapping tiles, each of size 336^2 . Meanwhile, the original image is resized to 336^2 as a global thumbnail. The local tiles and the global thumbnail are independently encoded by the vision encoder, yielding up to 2880 visual tokens in total. Table 2 demonstrates the performance comparison on LLaVA-NeXT-7B under two pruning ratios. At the pruning ratio of 77.8%, ACPruner achieves the best overall performance retention of 99.4%, outperforming all comparison methods. At the more aggressive pruning ratio of 88.9%, ACPruner still delivers the best average performance retention of 97.8%. These results further demonstrate the robustness of ACPruner on high-resolution LVLs.

Table 3: Performance comparison on LLaVA-OneVision-7B for video understanding tasks. “Perf. Ret.” denotes the average performance retention rate relative to the full-token baseline.

Method	Venue	MVBench	LongVideo	NextQA	Overall	VideoMME			AVG.	Perf. Ret.
Pruning Ratio = 0%										
LLaVA-OV-7B	TMLR'25	56.9	56.4	79.0	58.6	70.3	56.6	48.8	62.7	100.0%
Pruning Ratio = 75%										
FastV	ECCV'24	54.7	55.5	77.5	56.2	68.0	54.6	46.0	61.0	97.1%
DivPrune	CVPR'25	54.6	55.7	77.7	57.1	69.0	54.6	47.9	61.3	97.6%
VisionZIP	CVPR'25	53.7	51.2	77.6	54.1	61.6	53.4	47.2	59.2	93.9%
PDrop	CVPR'25	55.3	54.1	74.2	55.5	64.7	53.1	48.7	59.8	95.5%
SparseVLM	ICML'25	56.4	53.9	76.2	57.3	68.4	55.2	48.1	61.0	97.2%
ACPruner	Ours	57.0	55.9	77.7	57.6	68.6	55.8	48.3	62.1	99.0%
Pruning Ratio = 85%										
FastV	ECCV'24	53.2	54.9	77.1	54.7	65.1	53.4	45.0	60.0	95.4%
DivPrune	CVPR'25	55.9	55.1	76.8	56.3	66.7	54.2	48.2	61.0	97.4%
VisionZIP	CVPR'25	44.4	43.5	77.2	46.0	50.4	45.8	41.8	52.8	82.8%
PDrop	CVPR'25	53.2	47.6	74.5	50.1	58.7	48.7	45.0	56.4	89.4%
SparseVLM	ICML'25	52.9	54.2	76.6	52.9	62.6	51.1	44.6	59.2	94.1%
ACPruner	Ours	55.8	56.2	78.2	56.5	66.7	54.9	47.9	61.7	98.3%

Results on Qwen2.5-VL-7B. As a more advanced LVLM family, Qwen2.5-VL directly trains its vision encoder from scratch within the LVLM framework. This design enables the encoder to natively process images at varying resolutions, producing a dynamic number of visual tokens that adapt to the input image size. Table 4 demonstrates the performance comparison on Qwen2.5-VL-7B under three pruning ratios. At the pruning ratio of 66.7%, ACPruner achieves the best overall performance retention of 98.5%, outperforming all comparison methods. At the more aggressive pruning ratio of 77.8%, ACPruner still delivers the highest average performance retention of 96.8%. Even under the extremely high pruning ratio of 88.9%, ACPruner continues to achieve the best overall performance retention of 91.4%. These results show that ACPruner generalizes well to more advanced LVLMs and remains effective under larger and highly variable visual token counts.

Table 4: Performance comparison on Qwen2.5-VL-7B under different pruning ratios. “Perf. Ret.” denotes the average performance retention rate relative to the full-token baseline.

Method	MME	POPE	TextVQA	MMB	GQA	SQA	VQA-v2	Perf. Ret.
Pruning ratio = 0%								
Qwen2.5-VL-7B	2310	86.3	84.8	83.9	60.9	88.9	82.9	100.0%
Pruning ratio = 66.7%								
FastV	2072	82.2	77.9	75.7	58.0	78.5	80.4	92.5%
DivPrune	2198	85.6	80.1	81.6	59.0	86.6	80.9	96.8%
VisionZIP	2317	85.8	80.4	78.9	56.6	80.5	80.7	95.6%
PruneSID	2218	85.9	80.8	80.9	59.8	87.6	80.4	97.3%
ACPruner	2319	87.4	81.0	81.9	60.0	87.3	81.2	98.5%
Pruning ratio = 77.8%								
FastV	2036	80.7	69.0	74.9	56.7	78.0	78.1	89.6%
DivPrune	2153	85.5	76.6	78.6	58.6	86.2	78.8	94.9%
VisionZIP	2224	83.4	74.5	76.8	54.6	80.4	78.5	92.4%
PruneSID	2169	85.6	77.0	78.0	59.0	86.9	78.7	95.2%
ACPruner	2302	86.9	77.9	79.4	59.2	87.3	79.2	96.8%
Pruning ratio = 88.9%								
FastV	1940	78.6	60.3	69.2	51.9	77.4	55.2	81.1%
DivPrune	2051	83.7	66.2	76.4	56.9	82.1	74.5	90.1%
VisionZIP	2025	78.9	63.3	75.8	53.2	80.1	73.8	87.2%
PruneSID	2076	80.2	66.5	73.9	55.8	86.5	74.6	89.7%
ACPruner	2189	85.5	69.0	76.9	56.8	82.6	75.1	91.4%

Results on Video Understanding. Following prior work, we adopt LLaVA-OneVision-7B as the backbone for video understanding, where each video is uniformly sampled into 32 frames and each frame is encoded into 196 visual tokens. Table 3 shows the performance comparison on four widely used video understanding benchmarks under two pruning ratios. At the pruning ratio of 75%, ACPruner achieves the best overall performance retention of 99.0%, outperforming all comparison methods. At the more aggressive pruning ratio of 85%, ACPruner still delivers the best average performance retention of 98.3%. These results show that ACPruner remains effective not only for image understanding, but also for temporally extended video understanding tasks.

Results on Larger-Scale LVLMs. We further evaluate ACPruner on larger-scale LVLMs, including LLaVA-1.5-13B and LLaVA-NeXT-13B. As shown in Appendix E, ACPruner consistently remains the best-performing method across different pruning ratios, showing that the proposed formulation generalizes well not only across LVLM families, but also across model scales.

Table 5: Practical efficiency analysis of ACPruner on MME. The left section shows benchmark-level efficiency statistics while the right section shows sample-level runtime breakdowns.

Method	# Tokens	FLOPs (Tera)	KV-cache (MB)	Eval. Time (Seconds)	Score	Sample-level Inference Time Breakdown (MilliSeconds)			
						Visual Encoding	Token Pruning	LLM Inference	Total
LLaVA-1.5-7B	576	8.5	318.6	511.8	1862	14.6	-	201.4	215.7
+ Ours	64 ($\downarrow$ 88.9%)	1.6 ($\downarrow$ 81.2%)	62.6 ($\downarrow$ 80.4%)	299.1 ($\downarrow$ 41.6%)	1728	14.6	10.2	101.3	126.1
LLaVA-1.5-13B	576	16.5	497.9	742.9	1818	14.6	-	298.5	313.1
+ Ours	64 ($\downarrow$ 88.9%)	3.2 ($\downarrow$ 80.6%)	97.9 ($\downarrow$ 80.4%)	380.3 ($\downarrow$ 48.8%)	1820	14.6	10.5	135.2	160.3
LLaVA-NeXT-7B	2880	30.6	1084.7	1184.4	1842	35.9	-	463.2	499.1
+ Ours	320 ($\downarrow$ 88.9%)	4.5 ($\downarrow$ 85.3%)	170.6 ($\downarrow$ 84.3%)	683.3 ($\downarrow$ 42.3%)	1774	35.9	19.8	232.3	287.9
LLaVA-NeXT-13B	2880	58.9	1694.9	1853.8	1901	35.9	-	745.3	781.2
+ Ours	320 ($\downarrow$ 88.9%)	8.8 ($\downarrow$ 85.1%)	266.6 ($\downarrow$ 84.3%)	868.2 ($\downarrow$ 53.2%)	1848	35.9	20.3	309.7	365.9

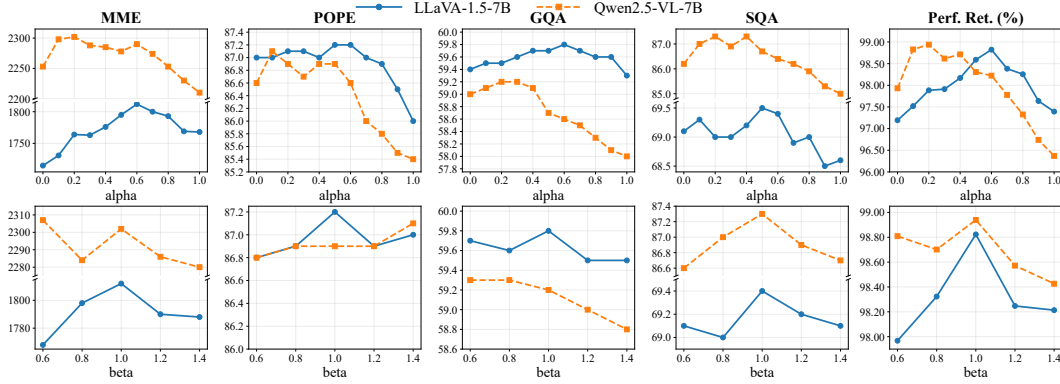


Figure 2: Ablation of α and β on LLaVA-1.5-7B and Qwen2.5-VL-7B under a 77.8% pruning ratio.

3.3 Practical Efficiency Analysis

We report both benchmark-level efficiency statistics and sample-level runtime breakdowns in Table 5. All efficiency experiments are conducted on a single NVIDIA L20 GPU. At the benchmark level, ACPruner consistently yields substantial efficiency gains across the evaluated LVLM backbones. Two trends are particularly evident. First, under the same model scale, high-resolution LVLMs benefit more from visual token pruning because they start with much longer visual token sequences. Second, under the same family, larger models achieve greater practical speedups because shortening the visual sequence leads to larger savings in the more expensive LLM inference stage. The sample-level runtime breakdown further shows that the pruning overhead remains modest and does not become an efficiency bottleneck. Across all backbones, the additional cost introduced by ACPruner is much smaller than the runtime reduction in downstream LLM inference, indicating that the speedup mainly comes from reducing the computation within the LLM, rather than being offset by the pruning procedure itself. The runtime breakdown of ACPruner’s internal steps is provided in Appendix G.

3.4 Ablation Study

Main Component Ablation. Table 6 presents the ablation results of the main components in ACPruner. In each setting, we remove a single component while keeping the remaining design unchanged. Removing inter-modality importance (setting-1) or intra-modality importance (setting-2) leads to clear performance drops, indicating that the two importance signals provide complementary cues. Removing the importance bias entirely (setting-3) causes further performance degradation, highlighting the necessity of prioritizing critical content during coverage maximization. When coverage modeling is discarded and token selection reduces to pure importance-based TopK selection (setting-4), the performance

Table 6: Ablation of ACPruner’s main components on LLaVA-1.5-7B under a 77.8% pruning ratio.

	MME	GQA	SQA	POPE	TextVQA	Perf. Ret.
Full method	1812	59.8	69.4	87.2	57.6	98.9%
Setting-1	1768	59.3	68.6	86.0	57.4	97.6%
Setting-2	1715	59.4	69.1	87.0	54.6	96.5%
Setting-3	1700	59.3	68.7	86.3	50.9	94.8%
Setting-4	1780	57.9	68.3	84.8	53.3	95.5%
Setting-5	1749	59.0	68.6	86.8	53.1	96.0%
Random	1701	57.7	68.7	81.6	33.0	87.0%

also drops noticeably, confirming the benefit of preserving the original token set collectively rather than selecting tokens solely by individual importance. Replacing attention-induced coverage with feature similarity (setting-5) further degrades performance, supporting our claim that patch-to-patch attention provides a more suitable relation for modeling token preservation. Additional ablation results on detailed design choices are provided in Appendix F.

Hyperparameter Ablation. Fig. 2 presents the ablation results of α and β on both LLaVA-1.5-7B and Qwen2.5-VL-7B. For α , LLaVA-1.5-7B achieves the best overall performance around $\alpha = 0.6$, while Qwen2.5-VL-7B performs best around $\alpha = 0.2$. This difference may be attributed to the different intra-modality importance signals used by the two backbones: CLS-to-patch attention is used for LLaVA-1.5 and patch incoming attention is used for Qwen2.5-VL. For β , both backbones obtain the strongest overall performance around $\beta = 1.0$, indicating that ACPruner benefits from a balanced weighting between content importance and attention-based coverage. Overall, these results support the hyperparameter settings adopted in our experiments.

4 Related Work: Visual Token Pruning in LVLMs

While LVLMs have achieved strong multimodal understanding capabilities [25, 26, 6, 19], the large number of visual tokens introduces substantial inference overhead. Since recent studies have revealed that visual tokens in LVLMs are highly redundant [7, 48, 37, 31], developing training-free visual token pruning strategies has become an important direction for efficient LVLM inference.

One representative line of work uses crossmodal attention in the LLM to retain the most textually relevant visual tokens [7, 50, 43]. While these methods are text-aware and empirically effective, they require forwarding all visual tokens through early LLM layers before pruning, and their reliance on LLM attention signals usually makes them incompatible with FlashAttention [8]. Moreover, recent studies have shown that crossmodal attention in early LLM layers exhibits significant positional bias, which can harm pruning performance [37, 36]. Another line uses CLS attention in the vision encoder to retain the most visually salient tokens before entering the LLM [48, 3, 49, 31, 45]. These methods are efficient because pruning is performed in a pre-LLM manner, but they are usually text-agnostic and may repeatedly preserve redundant tokens around salient regions. A third line focuses on reducing redundancy by selecting diverse tokens according to feature similarity in the embedding space [2, 37]. Although such methods can preserve broader image semantics, they may allocate token budgets to uninformative regions and are also typically agnostic to the input text.

Compared with prior work, ACPruner simultaneously achieves three desirable properties. First, it operates in a pre-LLM manner, effectively reducing the computation of LLM inference. Second, it is redundancy-aware: during greedy selection, tokens whose content has already been well preserved by the current subset provide smaller marginal gains and are therefore less likely to be selected. Third, it is importance-aware, since the coverage objective gives higher priority to preserving important visual content. Moreover, the importance estimation is text-aware, as it incorporates textual relevance, allowing ACPruner to produce query-adaptive pruning results (as shown in Appendix J).

5 Conclusion and Limitations

In this work, we formulate visual token pruning as a biased attention coverage maximization problem and propose **ACPruner**, a training-free and pre-LLM visual token pruning framework for efficient LVLM inference. Unlike prior methods, ACPruner selects a compact token subset that collectively preserves the original visual information while assigning higher priority to more informative content. Experiments across diverse model families demonstrate that ACPruner achieves strong performance retention with substantial efficiency gains. Despite its effectiveness, ACPruner has two potential limitations. First, it relies on two manually selected hyperparameters, α and β , whose optimal values may vary across tasks and backbones. While the default settings work well on public benchmarks, applying ACPruner to new scenarios may require hyperparameter re-tuning. Second, ACPruner assumes that the backbone model adopts a ViT-based vision encoder, whose attention signals are used to define both intra-modality token importance and token-to-token coverage. Although most LVLMs rely on ViT-based vision encoders, this architectural dependence may limit the applicability of ACPruner to LVLMs that do not employ an explicit vision encoder [10, 11]. Extending the biased coverage formulation to such architectures is an important direction for future work.

References

- [1] Explosion AI. en_core_web_sm: spacy english small model. <https://spacy.io/models/en>, 2023. spaCy English pipeline “en_core_web_sm”, accessed 2025-12-04.
- [2] Saeed Ranjbar Alvar, Gursimran Singh, Mohammad Akbari, and Yong Zhang. Divprune: Diversity-based visual token pruning for large multimodal models. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 9392–9401, 2025.
- [3] Kazi Hasan Ibn Arif, JinYi Yoon, Dimitrios S Nikolopoulos, Hans Vandierendonck, Deepu John, and Bo Ji. Hired: Attention-guided token dropping for efficient inference of high-resolution vision-language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 1773–1781, 2025.
- [4] Changwoo Baek, Jouwon Song, Sohyeon Kim, and Kyeongbo Kong. An empirical study of attention and diversity for adaptive visual token pruning in multimodal reasoning models. In *NeurIPS 2025 Workshop on Efficient Reasoning*.
- [5] Changwoo Baek, Jouwon Song, Sohyeon Kim, and Kyeongbo Kong. Agilepruner: An empirical study of attention and diversity for adaptive visual token pruning in large vision-language models. In *The Fourteenth International Conference on Learning Representations*, 2026.
- [6] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibong Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, et al. Qwen2. 5-vl technical report. *arXiv preprint arXiv:2502.13923*, 2025.
- [7] Liang Chen, Haozhe Zhao, Tianyu Liu, Shuai Bai, Junyang Lin, Chang Zhou, and Baobao Chang. An image is worth 1/2 tokens after layer 2: Plug-and-play inference acceleration for large vision-language models. In *European Conference on Computer Vision*, pages 19–35. Springer, 2024.
- [8] Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning. *arXiv preprint arXiv:2307.08691*, 2023.
- [9] Jinhong Deng, Wen Li, Joey Tianyi Zhou, and Yang He. Scope: Saliency-coverage oriented token pruning for efficient multimodal llms. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*.
- [10] Haiwen Diao, Yufeng Cui, Xiaotong Li, Yueze Wang, Huchuan Lu, and Xinlong Wang. Unveiling encoder-free vision-language models. *Advances in Neural Information Processing Systems*, 37:52545–52567, 2024.
- [11] Haiwen Diao, Xiaotong Li, Yufeng Cui, Yueze Wang, Haoze Deng, Ting Pan, Wenxuan Wang, Huchuan Lu, and Xinlong Wang. Evev2: Improved baselines for encoder-free vision-language models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 21014–21025, 2025.
- [12] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. In *International Conference on Learning Representations*.
- [13] Zhengyao Fang, Pengyuan Lyu, Chengquan Zhang, Guangming Lu, Jun Yu, and Wenjie Pei. Prune redundancy, preserve essence: Vision token compression in vlms via synergistic importance-diversity. In *The Fourteenth International Conference on Learning Representations*, 2026.
- [14] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, et al. Mme: A comprehensive evaluation benchmark for multimodal large language models. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2025.
- [15] Chaoyou Fu, Yuhang Dai, Yongdong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 24108–24118, 2025.
- [16] Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6904–6913, 2017.
- [17] Danna Gurari, Qing Li, Abigale J Stangl, Anhong Guo, Chi Lin, Kristen Grauman, Jiebo Luo, and Jeffrey P Bigham. Vizwiz grand challenge: Answering visual questions from blind people. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3608–3617, 2018.

- [18] Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6700–6709, 2019.
- [19] Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Peiyuan Zhang, Yanwei Li, Ziwei Liu, et al. Llava-onevision: Easy visual task transfer. *Transactions on Machine Learning Research*.
- [20] Kunchang Li, Yali Wang, Yanan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, et al. Mvbench: A comprehensive multi-modal video understanding benchmark. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22195–22206, 2024.
- [21] Xu Li, Yuxuan Liang, Xiaolei Chen, Yi Zheng, Haotian Chen, Bin Li, and Xiangyang Xue. Hero: Rethinking visual token early dropping in high-resolution large vision-language models. *arXiv preprint arXiv:2509.13067*, 2025.
- [22] Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Wayne Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 292–305, 2023.
- [23] Zongxia Li, Xiyang Wu, Hongyang Du, Fuxiao Liu, Huy Nghiem, and Guangyao Shi. A survey of state of the art large vision language models: Benchmark evaluations and challenges. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 1587–1606, 2025.
- [24] Junyan Lin, Junlong Tong, Hao Wu, Jialiang Zhang, Jinming Liu, Xin Jin, and Xiaoyu Shen. Speak while watching: Unleashing true real-time video understanding capability of multimodal large language models. *arXiv preprint arXiv:2601.06843*, 2026.
- [25] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26296–26306, 2024.
- [26] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024. URL <https://llava-vl.github.io/blog/2024-01-30-llava-next/>.
- [27] Ting Liu, Liangtao Shi, Richang Hong, Yue Hu, Quanjun Yin, and Linfeng Zhang. Multi-stage vision token dropping: Towards efficient multimodal large language model. *arXiv preprint arXiv:2411.10803*, 2024.
- [28] Wenjie Liu, Hao Wu, Xin Qiu, Yingqi Fan, Yihan Zhang, Anhao Zhao, Yunpu Ma, and Xiaoyu Shen. Vica: Efficient multimodal llms with vision-only cross-attention. *arXiv preprint arXiv:2602.07574*, 2026.
- [29] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? In *European Conference on Computer Vision*, pages 216–233. Springer, 2025.
- [30] Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. *Advances in Neural Information Processing Systems*, 35:2507–2521, 2022.
- [31] Yuzhang Shang, Mu Cai, Bingxin Xu, Yong Jae Lee, and Yan Yan. Llava-prumerge: Adaptive token reduction for efficient large multimodal models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22857–22867, 2025.
- [32] Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh, and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8317–8326, 2019.
- [33] Dingjie Song, Wenjun Wang, Shunian Chen, Xidong Wang, Michael X Guan, and Benyou Wang. Less is more: A simple yet effective token reduction method for efficient multi-modal llms. In *Proceedings of the 31st International Conference on Computational Linguistics*, pages 7614–7623, 2025.
- [34] Rinyoichi Takezoe, Yaqian Li, Zi-Hao Bo, Anzhou Hou, Mo Guang, and Kaiwen Long. Learnpruner: Rethinking attention-based token pruning in vision language models. In *The Fourteenth International Conference on Learning Representations*, 2026.

- [35] Junlong Tong, Zilong Wang, YuJie Ren, Peiran Yin, Hao Wu, Wei Zhang, and Xiaoyu Shen. From static inference to dynamic interaction: A survey of streaming large language models. *arXiv e-prints*, pages arXiv-2603, 2026.
- [36] Zichen Wen, Yifeng Gao, Weijia Li, Conghui He, and Linfeng Zhang. Token pruning in multimodal large language models: Are we solving the right problem? In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 15537–15549, 2025.
- [37] Zichen Wen, Yifeng Gao, Shaobo Wang, Junyuan Zhang, Qintong Zhang, Weijia Li, Conghui He, and Linfeng Zhang. Stop looking for important tokens in multimodal language models: Duplication matters more. *arXiv preprint arXiv:2502.11494*, 2025.
- [38] Hao Wu, Yingqi Fan, Jinyang Dai, Junlong Tong, Yunpu Ma, and Xiaoyu Shen. Hidrop: Hierarchical vision token reduction in mllms via late injection, concave pyramid pruning, and early exit. *arXiv preprint arXiv:2602.23699*, 2026.
- [39] Hao Wu, Junlong Tong, Xudong Wang, Yang Tan, Changyu Zeng, Anastasia Antsiferova, and Xiaoyu Shen. From data to model: A survey of the compression lifecycle in mllms. 2026.
- [40] Hao Wu, Xudong Wang, Jialiang Zhang, Junlong Tong, Xinghao Chen, Junyan Lin, Yunpu Ma, and Xiaoyu Shen. Uttrack: Towards simple and unified token pruning for visual tracking. *arXiv preprint arXiv:2602.23734*, 2026.
- [41] Haoning Wu, Dongxu Li, Bei Chen, and Junnan Li. Longvideobench: A benchmark for long-context interleaved video-language understanding. *Advances in Neural Information Processing Systems*, 37: 28828–28857, 2024.
- [42] Junbin Xiao, Xindi Shang, Angela Yao, and Tat-Seng Chua. Next-qa: Next phase of question-answering to explaining temporal actions. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9777–9786, 2021.
- [43] Long Xing, Qidong Huang, Xiaoyi Dong, Jiajie Lu, Pan Zhang, Yuhang Zang, Yuhang Cao, Conghui He, Jiaqi Wang, Feng Wu, et al. Conical visual concentration for efficient large vision-language models. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 14593–14603, 2025.
- [44] Chenglin Yang, Yilin Wang, Jianming Zhang, He Zhang, Zijun Wei, Zhe Lin, and Alan Yuille. Lite vision transformer with enhanced self-attention. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11998–12008, 2022.
- [45] Senqiao Yang, Yukang Chen, Zhuotao Tian, Chengyao Wang, Jingyao Li, Bei Yu, and Jiaya Jia. Visionzip: Longer is better but not necessary in vision language models. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 19792–19802, 2025.
- [46] Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: evaluating large multimodal models for integrated capabilities. In *Proceedings of the 41st International Conference on Machine Learning*, pages 57730–57754, 2024.
- [47] Evelyn Zhang, Fufu Yu, Aoqi Wu, Zichen Wen, Ke Yan, Shouhong Ding, Biqing Qi, and Linfeng Zhang. D²pruner: Debaised importance and structural diversity for mllm token pruning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 12412–12420, 2026.
- [48] Qizhe Zhang, Aosong Cheng, Ming Lu, Zhiyong Zhuo, Minqi Wang, Jiajun Cao, Shaobo Guo, Qi She, and Shanghang Zhang. [cls] attention is all you need for training-free visual token pruning: Make vlm inference faster. *arXiv e-prints*, pages arXiv-2412, 2024.
- [49] Qizhe Zhang, Aosong Cheng, Ming Lu, Renrui Zhang, Zhiyong Zhuo, Jiajun Cao, Shaobo Guo, Qi She, and Shanghang Zhang. Beyond text-visual attention: Exploiting visual cues for effective token pruning in vlms. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 20857–20867, 2025.
- [50] Yuan Zhang, Chun-Kai Fan, Junpeng Ma, Wenzhao Zheng, Tao Huang, Kuan Cheng, Denis A Gudovskiy, Tomoyuki Okuno, Yohei Nakata, Kurt Keutzer, et al. Sparsevlm: Visual token sparsification for efficient vision-language model inference. In *Forty-second International Conference on Machine Learning*, 2025.

A Appendix Overview

This appendix provides additional theoretical analysis and experimental results of ACPruner. Appendix B presents the theoretical analysis of the proposed biased attention coverage objective. Appendix C proves the NP-hardness of the proposed objective. Appendix D provides the complete pseudocode of ACPruner. Appendix E reports additional experiments on larger-scale LVLMs, including LLaVA-1.5-13B and LLaVA-NeXT-13B. Appendix F provides additional ablation studies on design choices. Appendix G analyzes the step-wise runtime distribution. Appendix H introduces the image and video benchmarks used in our experiments. Appendix I summarizes the comparison methods included in the main experiments. Appendix J presents qualitative pruning visualizations.

B Theoretical Analysis of ACPruner

In this section, we show that the proposed objective admits a well-structured monotone submodular form, which justifies the use of greedy optimization and clarifies the role of jointly modeling importance and coverage.

B.1 Preliminaries and Notation

To simplify notation, we absorb the importance bias exponent into the content weight and define

$$a_j := w_j^\beta, \quad a_j \geq 0, \quad j = 1, \dots, T. \quad (10)$$

Then the ACPruner objective in Eq. (8) can be written as

$$F(\mathbf{S}) := \sum_{j=1}^T a_j \text{Cov}(\mathbf{S}, \mathbf{v}_j) = \sum_{j=1}^T a_j \max_{\mathbf{v}_i \in \mathbf{S}} c_{ij}, \quad |\mathbf{S}| \leq k, \quad (11)$$

where, by definition,

$$\text{Cov}(\mathbf{S}, \mathbf{v}_j) = \begin{cases} \max_{\mathbf{v}_i \in \mathbf{S}} c_{ij}, & \text{if } \mathbf{S} \neq \emptyset, \\ 0, & \text{if } \mathbf{S} = \emptyset. \end{cases} \quad (12)$$

Although the main text writes the constraint as $|\mathbf{S}| = k$, we use $|\mathbf{S}| \leq k$ here for convenience. As will be shown below, $F(\mathbf{S})$ is monotone non-decreasing, and therefore the optimal values under $|\mathbf{S}| = k$ and $|\mathbf{S}| \leq k$ are identical.

For notational convenience, we define the current coverage state of token $\mathbf{v}_j$ under subset $\mathbf{S}$ as

$$m_j(\mathbf{S}) := \text{Cov}(\mathbf{S}, \mathbf{v}_j). \quad (13)$$

Then Eq. (11) becomes

$$F(\mathbf{S}) = \sum_{j=1}^T a_j m_j(\mathbf{S}). \quad (14)$$

Since each attention weight satisfies $A_{i \rightarrow j}^{(l,h)} \in [0, 1]$, their average also satisfies

$$0 \leq c_{ij} \leq 1, \quad \forall i, j. \quad (15)$$

Consequently,

$$0 \leq m_j(\mathbf{S}) \leq 1, \quad \forall j, \forall \mathbf{S} \subseteq \mathbf{V}. \quad (16)$$

For a candidate token $\mathbf{v}_u \in \mathbf{V} \setminus \mathbf{S}$, we denote its marginal gain with respect to $\mathbf{S}$ as

$$\Delta(\mathbf{v}_u | \mathbf{S}) := F(\mathbf{S} \cup \{\mathbf{v}_u\}) - F(\mathbf{S}). \quad (17)$$

B.2 ACPruner as Weighted Distortion Minimization

We first show that maximizing the ACPruner objective is equivalent to minimizing an importance-weighted representative distortion. This provides a principled interpretation of ACPruner as selecting a compact representative subset for the original visual token set.

Proposition 1. Define the distortion of token $\mathbf{v}_j$ under subset $\mathbf{S}$ as

$$d(\mathbf{v}_j, \mathbf{S}) := 1 - \text{Cov}(\mathbf{S}, \mathbf{v}_j) = 1 - m_j(\mathbf{S}). \quad (18)$$

Then maximizing the ACPruner objective in Eq. (11) is equivalent to minimizing the weighted total distortion

$$D(\mathbf{S}) := \sum_{j=1}^T a_j d(\mathbf{v}_j, \mathbf{S}). \quad (19)$$

More precisely,

$$D(\mathbf{S}) = \sum_{j=1}^T a_j - F(\mathbf{S}). \quad (20)$$

Proof. Substituting Eq. (18) into Eq. (19), we obtain

$$\begin{aligned} D(\mathbf{S}) &= \sum_{j=1}^T a_j (1 - m_j(\mathbf{S})) \\ &= \sum_{j=1}^T a_j - \sum_{j=1}^T a_j m_j(\mathbf{S}) \\ &= \sum_{j=1}^T a_j - F(\mathbf{S}), \end{aligned} \quad (21)$$

where the last equality follows from Eq. (14). Since $\sum_{j=1}^T a_j$ is independent of $\mathbf{S}$, maximizing $F(\mathbf{S})$ is equivalent to minimizing $D(\mathbf{S})$. This proves the proposition. $\square$

Proposition 1 shows that ACPruner is not merely selecting tokens with high individual scores. Instead, it seeks a compact subset that minimizes the importance-weighted representation error over the full token set, where the representative relation is induced by encoder attention.

B.3 Normalization, Monotonicity, and Submodularity

We next prove that the ACPruner objective is a normalized monotone submodular set function. This result explains why the greedy optimization used by ACPruner is mathematically well-founded.

Theorem 1. The set function

$$F(\mathbf{S}) = \sum_{j=1}^T a_j m_j(\mathbf{S}) \quad (22)$$

is normalized, monotone, and submodular.

Proof. We prove the three properties one by one.

(i) Normalization. By Eq. (12), for the empty set $\emptyset$ we have

$$m_j(\emptyset) = \text{Cov}(\emptyset, \mathbf{v}_j) = 0, \quad \forall j.$$

Therefore,

$$F(\emptyset) = \sum_{j=1}^T a_j m_j(\emptyset) = 0. \quad (23)$$

Hence F is normalized.

(ii) Monotonicity. Let $\mathbf{S} \subseteq \mathbf{T} \subseteq \mathbf{V}$. Then for every j ,

$$m_j(\mathbf{S}) = \max_{\mathbf{v}_i \in \mathbf{S}} c_{ij} \leq \max_{\mathbf{v}_i \in \mathbf{T}} c_{ij} = m_j(\mathbf{T}), \quad (24)$$

because $\mathbf{S} \subseteq \mathbf{T}$. Since $a_j \geq 0$, summing over j gives

$$F(\mathbf{S}) = \sum_{j=1}^T a_j m_j(\mathbf{S}) \leq \sum_{j=1}^T a_j m_j(\mathbf{T}) = F(\mathbf{T}). \quad (25)$$

Hence F is monotone non-decreasing.

(iii) Submodularity. Consider two subsets $\mathbf{S} \subseteq \mathbf{T} \subseteq \mathbf{V}$ and a candidate token $\mathbf{v}_u \in \mathbf{V} \setminus \mathbf{T}$. We first write the marginal gain of adding $\mathbf{v}_u$ to $\mathbf{S}$:

$$\begin{aligned} \Delta(\mathbf{v}_u \mid \mathbf{S}) &= F(\mathbf{S} \cup \{\mathbf{v}_u\}) - F(\mathbf{S}) \\ &= \sum_{j=1}^T a_j (m_j(\mathbf{S} \cup \{\mathbf{v}_u\}) - m_j(\mathbf{S})). \end{aligned} \quad (26)$$

By the definition of $m_j(\cdot)$,

$$m_j(\mathbf{S} \cup \{\mathbf{v}_u\}) = \max(m_j(\mathbf{S}), c_{uj}).$$

Therefore,

$$\begin{aligned} \Delta(\mathbf{v}_u \mid \mathbf{S}) &= \sum_{j=1}^T a_j (\max(m_j(\mathbf{S}), c_{uj}) - m_j(\mathbf{S})) \\ &= \sum_{j=1}^T a_j \max(c_{uj} - m_j(\mathbf{S}), 0). \end{aligned} \quad (27)$$

Now, since $\mathbf{S} \subseteq \mathbf{T}$, Eq. (24) implies

$$m_j(\mathbf{S}) \leq m_j(\mathbf{T}), \quad \forall j. \quad (28)$$

Fix any j . Because the function $x \mapsto \max(c_{uj} - x, 0)$ is non-increasing in x , Eq. (28) yields

$$\max(c_{uj} - m_j(\mathbf{S}), 0) \geq \max(c_{uj} - m_j(\mathbf{T}), 0). \quad (29)$$

Multiplying both sides by $a_j \geq 0$ and summing over j , we obtain

$$\Delta(\mathbf{v}_u \mid \mathbf{S}) \geq \Delta(\mathbf{v}_u \mid \mathbf{T}). \quad (30)$$

This is exactly the diminishing-returns property. Hence F is submodular.

Combining (i), (ii), and (iii), we conclude that F is normalized, monotone, and submodular. $\square$

B.4 Approximation Guarantee of Greedy Optimization

Since the ACPruner objective is NP-hard to optimize exactly, the natural question is whether the greedy algorithm used by ACPruner has a provable approximation guarantee. The answer is yes.

Corollary 1. Let $\mathbf{S}^*$ be an optimal solution to

$$\max_{\mathbf{S} \subseteq \mathbf{V}, |\mathbf{S}| \leq k} F(\mathbf{S}), \quad (31)$$

and let $\mathbf{S}_{\text{greedy}}$ be the subset returned by the greedy algorithm that iteratively selects the token with the largest marginal gain. Then

$$F(\mathbf{S}_{\text{greedy}}) \geq \left(1 - \frac{1}{e}\right) F(\mathbf{S}^*). \quad (32)$$

Proof. Let $\mathbf{S}_t$ denote the greedy solution after t selections, with $\mathbf{S}_0 = \emptyset$, and let $\mathbf{v}_{g_t}$ be the token selected at step t . Then

$$\mathbf{S}_t = \mathbf{S}_{t-1} \cup \{\mathbf{v}_{g_t}\}, \quad \mathbf{v}_{g_t} = \arg \max_{\mathbf{v} \in \mathbf{V} \setminus \mathbf{S}_{t-1}} \Delta(\mathbf{v} \mid \mathbf{S}_{t-1}). \quad (33)$$

Fix any step $t \in \{1, \dots, k\}$. Since F is monotone,

$$F(\mathbf{S}^*) \leq F(\mathbf{S}_{t-1} \cup \mathbf{S}^*). \quad (34)$$

Let $\mathbf{S}^* \setminus \mathbf{S}_{t-1} = \{\mathbf{v}_{u_1}, \dots, \mathbf{v}_{u_r}\}$, where $r \leq k$. Then

$$\begin{aligned} F(\mathbf{S}_{t-1} \cup \mathbf{S}^*) - F(\mathbf{S}_{t-1}) &= \sum_{s=1}^r \Delta(\mathbf{v}_{u_s} \mid \mathbf{S}_{t-1} \cup \{\mathbf{v}_{u_1}, \dots, \mathbf{v}_{u_{s-1}}\}) \\ &\leq \sum_{s=1}^r \Delta(\mathbf{v}_{u_s} \mid \mathbf{S}_{t-1}) \end{aligned} \quad (35)$$

by submodularity. Since the greedy algorithm selects the largest marginal gain token,

$$\Delta(\mathbf{v}_{u_s} \mid \mathbf{S}_{t-1}) \leq \Delta(\mathbf{v}_{g_t} \mid \mathbf{S}_{t-1}), \quad \forall s. \quad (36)$$

Therefore,

$$F(\mathbf{S}_{t-1} \cup \mathbf{S}^*) - F(\mathbf{S}_{t-1}) \leq r \Delta(\mathbf{v}_{g_t} \mid \mathbf{S}_{t-1}) \leq k \Delta(\mathbf{v}_{g_t} \mid \mathbf{S}_{t-1}). \quad (37)$$

Combining Eqs. (34) and (37), we get

$$F(\mathbf{S}^*) - F(\mathbf{S}_{t-1}) \leq k \Delta(\mathbf{v}_{g_t} \mid \mathbf{S}_{t-1}). \quad (38)$$

Since

$$\Delta(\mathbf{v}_{g_t} \mid \mathbf{S}_{t-1}) = F(\mathbf{S}_t) - F(\mathbf{S}_{t-1}),$$

Eq. (38) becomes

$$F(\mathbf{S}_t) - F(\mathbf{S}_{t-1}) \geq \frac{1}{k} (F(\mathbf{S}^*) - F(\mathbf{S}_{t-1})). \quad (39)$$

Rearranging gives

$$F(\mathbf{S}^*) - F(\mathbf{S}_t) \leq \left(1 - \frac{1}{k}\right) (F(\mathbf{S}^*) - F(\mathbf{S}_{t-1})). \quad (40)$$

Applying Eq. (40) recursively from $t = 1$ to $t = k$, and using $F(\mathbf{S}_0) = F(\emptyset) = 0$, we obtain

$$F(\mathbf{S}^*) - F(\mathbf{S}_k) \leq \left(1 - \frac{1}{k}\right)^k F(\mathbf{S}^*). \quad (41)$$

Hence

$$F(\mathbf{S}_k) \geq \left(1 - \left(1 - \frac{1}{k}\right)^k\right) F(\mathbf{S}^*) \geq \left(1 - \frac{1}{e}\right) F(\mathbf{S}^*), \quad (42)$$

where the last inequality uses $\left(1 - \frac{1}{k}\right)^k \leq e^{-1}$. Since $\mathbf{S}_k = \mathbf{S}_{\text{greedy}}$, the proof is complete. $\square$

Corollary 1 shows that the greedy algorithm used by ACPruner is not merely a heuristic. Instead, it is a principled approximation algorithm for maximizing the proposed importance-weighted attention-induced coverage objective under a token budget.

B.5 Generalized Coverage Transforms

The ACPruner objective uses a linear utility on the coverage level of each token. We now show that the same theoretical structure still holds for a broader family of non-linear coverage utilities.

Theorem 2. For each token $\mathbf{v}_j$, let $\rho_j : [0, 1] \rightarrow \mathbb{R}_+$ be a non-decreasing function satisfying $\rho_j(0) = 0$. Define the generalized objective

$$F_\rho(\mathbf{S}) := \sum_{j=1}^T a_j \rho_j(\text{Cov}(\mathbf{S}, \mathbf{v}_j)) = \sum_{j=1}^T a_j \rho_j(m_j(\mathbf{S})). \quad (43)$$

Then F_ρ is normalized, monotone, and submodular.

Proof. We again verify the three properties.

(i) Normalization. Since $\text{Cov}(\emptyset, \mathbf{v}_j) = 0$ and $\rho_j(0) = 0$,

$$F_\rho(\emptyset) = \sum_{j=1}^T a_j \rho_j(0) = 0. \quad (44)$$

(ii) Monotonicity. If $\mathbf{S} \subseteq \mathbf{T}$, then $m_j(\mathbf{S}) \leq m_j(\mathbf{T})$ for every j . Since each ρ_j is non-decreasing,

$$\rho_j(m_j(\mathbf{S})) \leq \rho_j(m_j(\mathbf{T})).$$

Multiplying by $a_j \geq 0$ and summing over j yields

$$F_\rho(\mathbf{S}) \leq F_\rho(\mathbf{T}). \quad (45)$$

(iii) Submodularity. Fix $\mathbf{S} \subseteq \mathbf{T} \subseteq \mathbf{V}$ and $\mathbf{v}_u \in \mathbf{V} \setminus \mathbf{T}$. For each token j , define the per-token marginal utility

$$\delta_j(\mathbf{v}_u \mid \mathbf{S}) := \rho_j(\max\{m_j(\mathbf{S}), c_{uj}\}) - \rho_j(m_j(\mathbf{S})). \quad (46)$$

We will show

$$\delta_j(\mathbf{v}_u \mid \mathbf{S}) \geq \delta_j(\mathbf{v}_u \mid \mathbf{T}), \quad \forall j. \quad (47)$$

Fix any j . Since $m_j(\mathbf{S}) \leq m_j(\mathbf{T})$, there are two cases.

Case 1: $c_{uj} \leq m_j(\mathbf{T})$. Then

$$\max\{m_j(\mathbf{T}), c_{uj}\} = m_j(\mathbf{T}),$$

so

$$\delta_j(\mathbf{v}_u \mid \mathbf{T}) = 0.$$

On the other hand, because ρ_j is non-decreasing,

$$\delta_j(\mathbf{v}_u \mid \mathbf{S}) \geq 0.$$

Hence Eq. (47) holds.

Case 2: $c_{uj} > m_j(\mathbf{T})$. Then necessarily $c_{uj} > m_j(\mathbf{S})$ as well, and thus

$$\delta_j(\mathbf{v}_u \mid \mathbf{S}) = \rho_j(c_{uj}) - \rho_j(m_j(\mathbf{S})), \quad (48)$$

$$\delta_j(\mathbf{v}_u \mid \mathbf{T}) = \rho_j(c_{uj}) - \rho_j(m_j(\mathbf{T})). \quad (49)$$

Since $m_j(\mathbf{S}) \leq m_j(\mathbf{T})$ and ρ_j is non-decreasing, we have

$$\rho_j(m_j(\mathbf{S})) \leq \rho_j(m_j(\mathbf{T})),$$

which implies

$$\delta_j(\mathbf{v}_u \mid \mathbf{S}) \geq \delta_j(\mathbf{v}_u \mid \mathbf{T}).$$

Therefore Eq. (47) holds in both cases. Multiplying by $a_j \geq 0$ and summing over j , we obtain

$$F_\rho(\mathbf{S} \cup \{\mathbf{v}_u\}) - F_\rho(\mathbf{S}) \geq F_\rho(\mathbf{T} \cup \{\mathbf{v}_u\}) - F_\rho(\mathbf{T}), \quad (50)$$

which proves submodularity.

Combining (i), (ii), and (iii), F_ρ is normalized, monotone, and submodular. $\square$

Note that Theorem 2 does not follow from a generic composition rule for submodular functions. Instead, it relies on the specific max-coverage structure of $m_j(\mathbf{S})$ in ACPruner.

Theorem 2 shows that the theoretical framework of ACPruner is not limited to the linear utility used in the main paper. More general monotone transforms of the coverage level preserve the same structural properties and thus remain amenable to greedy optimization.

B.6 Lack of Uniform Guarantee for Importance-Only Selection

We next show that token-wise importance alone is insufficient to guarantee a constant-factor approximation to the ACPruner objective.

Proposition 2. Let $\mathcal{A}$ be any deterministic selection rule that, given a token-wise score vector

$$\mathbf{q} = (q_1, \dots, q_T)$$

and a budget k , outputs a subset $\mathcal{A}(\mathbf{q}, k) \subseteq \mathbf{V}$ of size k . Suppose that $\mathcal{A}$ depends only on $\mathbf{q}$ and k , and is independent of the coverage matrix (c_{ij}) . Then there does not exist any constant $\gamma > 0$ such that

$$F(\mathcal{A}(\mathbf{q}, k)) \geq \gamma \cdot \max_{|\mathbf{S}|=k} F(\mathbf{S}) \quad (51)$$

holds for all ACPruner instances.

Proof. We prove this by an explicit counterexample. Fix any deterministic rule $\mathcal{A}$ and any budget $k \geq 1$. Set the total number of tokens to

$$T = k + 1.$$

Choose any score vector $\mathbf{q}$. Since $\mathcal{A}$ is deterministic, it outputs some subset

$$\mathbf{S}_{\mathcal{A}} := \mathcal{A}(\mathbf{q}, k), \quad |\mathbf{S}_{\mathcal{A}}| = k.$$

Because $T = k + 1$, there exists at least one omitted token; let it be $\mathbf{v}_u \in \mathbf{V} \setminus \mathbf{S}_{\mathcal{A}}$.

Now construct an ACPruner instance as follows. First, define the importance weights by

$$a_u = 1, \quad a_j = 0, \quad \forall j \neq u. \quad (52)$$

Next, define the coverage matrix as the identity matrix:

$$c_{ij} = \begin{cases} 1, & \text{if } i = j, \\ 0, & \text{if } i \neq j. \end{cases} \quad (53)$$

This is a valid ACPruner instance, since

$$0 \leq c_{ij} \leq 1, \quad \sum_{j=1}^T c_{ij} = 1, \quad \forall i,$$

so the matrix satisfies the basic row-stochastic property inherited from attention weights.

Because $\mathbf{v}_u \notin \mathbf{S}_{\mathcal{A}}$, we have

$$\max_{\mathbf{v}_i \in \mathbf{S}_{\mathcal{A}}} c_{iu} = 0.$$

Moreover, since $a_j = 0$ for all $j \neq u$, the objective depends only on the coverage of token $\mathbf{v}_u$. Therefore,

$$F(\mathbf{S}_{\mathcal{A}}) = \sum_{j=1}^T a_j \max_{\mathbf{v}_i \in \mathbf{S}_{\mathcal{A}}} c_{ij} = a_u \max_{\mathbf{v}_i \in \mathbf{S}_{\mathcal{A}}} c_{iu} = 0. \quad (54)$$

On the other hand, any subset $\mathbf{S}^*$ of size k that contains $\mathbf{v}_u$ satisfies

$$\max_{\mathbf{v}_i \in \mathbf{S}^*} c_{iu} = 1,$$

and hence

$$F(\mathbf{S}^*) = a_u \max_{\mathbf{v}_i \in \mathbf{S}^*} c_{iu} = 1. \quad (55)$$

Therefore,

$$\frac{F(\mathbf{S}_{\mathcal{A}})}{\max_{|\mathbf{S}|=k} F(\mathbf{S})} = 0.$$

Since the approximation ratio can be zero, no positive constant γ can satisfy Eq. (51) uniformly over all instances. This proves the proposition. $\square$

Proposition 2 formalizes the limitation of importance-only selection: a token may not stand out under a given token-wise ranking rule, yet still be indispensable because it is the unique representative of the only content that carries nonzero value under the ACPruner objective. This result is stated for deterministic selection rules, which already cover the standard score-ranking procedures used in practice.

B.7 Lack of Uniform Guarantee for Diversity-Only Selection

We finally show that internal diversity alone is also insufficient to guarantee a constant-factor approximation to the ACPruner objective.

Proposition 3. Let $\mathcal{B}$ be any deterministic selection rule that, given a pairwise dissimilarity matrix

$$\mathbf{D} = (d_{ij})_{i,j=1}^T$$

and a budget k , outputs a subset $\mathcal{B}(\mathbf{D}, k) \subseteq \mathbf{V}$ of size k . Suppose that $\mathcal{B}$ depends only on $\mathbf{D}$ and k , and is independent of the importance weights (a_j) and the coverage matrix (c_{ij}) . Then there does not exist any constant $\gamma > 0$ such that

$$F(\mathcal{B}(\mathbf{D}, k)) \geq \gamma \cdot \max_{|\mathbf{S}|=k} F(\mathbf{S}) \quad (56)$$

holds for all ACPruner instances.

Proof. Fix any deterministic rule $\mathcal{B}$ and any budget $k \geq 1$. Again set

$$T = k + 1.$$

Choose any dissimilarity matrix $\mathbf{D}$. Since $\mathcal{B}$ is deterministic, it outputs some subset

$$\mathbf{S}_{\mathcal{B}} := \mathcal{B}(\mathbf{D}, k), \quad |\mathbf{S}_{\mathcal{B}}| = k.$$

Let $\mathbf{v}_u \in \mathbf{V} \setminus \mathbf{S}_{\mathcal{B}}$ be any omitted token.

Construct an ACPruner instance by defining

$$a_u = 1, \quad a_j = 0, \quad \forall j \neq u, \quad (57)$$

and again using the identity coverage matrix

$$c_{ij} = \begin{cases} 1, & \text{if } i = j, \\ 0, & \text{if } i \neq j. \end{cases} \quad (58)$$

As above, this coverage matrix is a valid row-stochastic attention-induced instance.

Since $\mathbf{v}_u \notin \mathbf{S}_{\mathcal{B}}$, we have

$$\max_{\mathbf{v}_i \in \mathbf{S}_{\mathcal{B}}} c_{iu} = 0.$$

Because all weights except a_u are zero, it follows that

$$F(\mathbf{S}_{\mathcal{B}}) = a_u \max_{\mathbf{v}_i \in \mathbf{S}_{\mathcal{B}}} c_{iu} = 0. \quad (59)$$

However, any subset $\mathbf{S}^*$ of size k containing $\mathbf{v}_u$ satisfies

$$\max_{\mathbf{v}_i \in \mathbf{S}^*} c_{iu} = 1,$$

which gives

$$F(\mathbf{S}^*) = a_u \max_{\mathbf{v}_i \in \mathbf{S}^*} c_{iu} = 1. \quad (60)$$

Therefore,

$$\frac{F(\mathbf{S}_{\mathcal{B}})}{\max_{|\mathbf{S}|=k} F(\mathbf{S})} = 0.$$

Hence no positive constant γ can satisfy Eq. (56) uniformly over all instances. This proves the proposition. $\square$

Proposition 3 formalizes the limitation of diversity-only selection: even if a subset is highly dispersed internally, such dispersion alone does not guarantee that it covers the only content that matters under the ACPruner objective. Taken together with Proposition 2, these results theoretically justify why ACPruner must jointly model both content importance and attention-induced coverage.

C NP-hardness of the Optimization Problem

In this section, we show that the optimization problem in Eq. (8) is NP-hard in general. To establish this result, we consider its associated decision version.

Decision version. For a fixed $\beta > 0$, given nonnegative importance weights $\{w_j\}_{j=1}^T$, nonnegative coverage coefficients $\{c_{ij}\}_{i,j=1}^T$, a budget k , and a threshold B , the decision problem asks whether there exists a subset $\mathbf{S} \subseteq \mathbf{V}$ with $|\mathbf{S}| = k$ such that

$$\sum_{j=1}^T w_j^\beta \text{Cov}(\mathbf{S}, \mathbf{v}_j) = \sum_{j=1}^T w_j^\beta \max_{\mathbf{v}_i \in \mathbf{S}} c_{ij} \geq B. \quad (61)$$

The threshold B is introduced only for the decision version used in the complexity proof; it is not a variable in the main method.

Reduction from Maximum Coverage. We prove NP-hardness by a polynomial-time reduction from the classical MAXIMUM COVERAGE problem. An instance of MAXIMUM COVERAGE consists of

- a universe $\mathcal{U} = \{e_1, \dots, e_n\}$,
- a collection of subsets $\mathcal{A} = \{A_1, \dots, A_m\}$ with $A_i \subseteq \mathcal{U}$,
- a budget k , and
- a threshold B .

The decision problem asks whether there exists an index set $I \subseteq \{1, \dots, m\}$ with $|I| \leq k$ such that

$$\left| \bigcup_{i \in I} A_i \right| \geq B. \quad (62)$$

We now construct an instance of Eq. (61) from an arbitrary instance of Eq. (62).

Construction. We create a token set

$$\mathbf{V} = \{\mathbf{s}_1, \dots, \mathbf{s}_m, \mathbf{t}_1, \dots, \mathbf{t}_n\}, \quad (63)$$

where each **selector token** $\mathbf{s}_i$ corresponds to subset A_i , and each **element token** $\mathbf{t}_j$ corresponds to universe element e_j . Hence the total number of tokens is $T = m + n$.

We define the importance weights as

$$w(\mathbf{s}_i) = 0, \quad w(\mathbf{t}_j) = 1, \quad (64)$$

for all $i \in \{1, \dots, m\}$ and $j \in \{1, \dots, n\}$. Since $\beta > 0$ is fixed, we have $1^\beta = 1$ and $0^\beta = 0$, so the exponent β does not affect the reduction.

Next, we define the token-level coverage coefficients. For each selector token $\mathbf{s}_i$ and element token $\mathbf{t}_j$, let

$$c_{\mathbf{s}_i, \mathbf{t}_j} = \begin{cases} 1, & \text{if } e_j \in A_i, \\ 0, & \text{otherwise.} \end{cases} \quad (65)$$

For all other pairs, we set

$$c_{ab} = 0. \quad (66)$$

Thus, only selector tokens can cover element tokens, and no other pair contributes to the objective.

Objective under the construction. For any subset $\mathbf{S} \subseteq \mathbf{V}$, the objective in Eq. (61) becomes

$$\sum_{j=1}^n \max_{\mathbf{v} \in \mathbf{S}} c_{\mathbf{v}, \mathbf{t}_j}, \quad (67)$$

because selector tokens have zero importance and all non-selector-to-element coverage terms are zero. Therefore, Eq. (67) simply counts how many element tokens are covered by the selected selector tokens.

Correctness of the reduction. We now show that the MAXIMUM COVERAGE instance is a YES-instance if and only if the constructed instance of Eq. (61) is a YES-instance.

($\Rightarrow$) Suppose Eq. (62) is a YES-instance. Then there exists $I \subseteq \{1, \dots, m\}$ with $|I| \leq k$ such that

$$\left| \bigcup_{i \in I} A_i \right| \geq B.$$

Construct $\mathbf{S}$ by selecting the corresponding selector tokens $\{\mathbf{s}_i : i \in I\}$. If $|I| < k$, pad $\mathbf{S}$ with arbitrary additional tokens until $|\mathbf{S}| = k$. Such padding cannot decrease the objective value, since all coverage coefficients are nonnegative. By construction, for each element token $\mathbf{t}_j$,

$$\max_{\mathbf{v} \in \mathbf{S}} c_{\mathbf{v}, \mathbf{t}_j} = 1 \iff e_j \in \bigcup_{i \in I} A_i.$$

Hence the objective value equals

$$\left| \bigcup_{i \in I} A_i \right| \geq B.$$

Therefore, the constructed instance of Eq. (61) is also a YES-instance.

($\Leftarrow$) Conversely, suppose the constructed instance of Eq. (61) is a YES-instance. Then there exists a subset $\mathbf{S} \subseteq \mathbf{V}$ with $|\mathbf{S}| = k$ such that

$$\sum_{j=1}^n \max_{\mathbf{v} \in \mathbf{S}} c_{\mathbf{v}, \mathbf{t}_j} \geq B.$$

Let

$$I = \{i \in \{1, \dots, m\} \mid \mathbf{s}_i \in \mathbf{S}\}$$

be the indices of selector tokens chosen in $\mathbf{S}$. Since only selector tokens can cover element tokens, the objective value is exactly

$$\left| \bigcup_{i \in I} A_i \right|.$$

Moreover, $|I| \leq |\mathbf{S}| = k$. Therefore,

$$\left| \bigcup_{i \in I} A_i \right| \geq B,$$

which means that the original MAXIMUM COVERAGE instance is also a YES-instance.

Conclusion. The above reduction is polynomial-time, so the decision version of Eq. (8) is NP-hard. Consequently, the optimization problem in Eq. (8) is also NP-hard, since an exact polynomial-time algorithm for the optimization problem would immediately solve its decision version.

D Pseudocode of ACPuner

Algorithm 1 summarizes the complete pipeline of ACPuner. Given the visual token set, the textual query, and the vision encoder attention maps, ACPuner first computes the fused importance weights for all original visual tokens, then derives the attention-induced token-to-token coverage matrix, and finally performs greedy subset selection under a fixed token budget.

Algorithm 1: ACPruner

Input: visual tokens $\mathbf{V} = [\mathbf{v}_1, \dots, \mathbf{v}_T]$;

text tokens $\mathbf{U} = [\mathbf{u}_1, \dots, \mathbf{u}_N]$;

vision encoder attentions $\{A^{(l,h)}\}$;

budget k ; trade-off coefficient α ; bias exponent β

Output: selected token subset $\mathbf{S}$

// Step 1: Compute intra-modality importance

if the vision encoder contains a CLS token **then**

 Compute s_j^{intra} using penultimate-layer CLS-to-patch attention by Eq. (3) ;

else

 Compute s_j^{intra} using average incoming patch attention ;

// Step 2: Compute inter-modality importance

Extract noun tokens $\mathcal{N}(\mathbf{U})$ from the input text ;

if $\mathcal{N}(\mathbf{U}) = \emptyset$ **then**

 Set $\alpha \leftarrow 1$;

for $j = 1$ **to** T **do**

 Set $s_j^{\text{inter}} \leftarrow 0$;

else

for $j = 1$ **to** T **do**

 Compute $s_j^{\text{inter}} = \max_{\mathbf{u}_k \in \mathcal{N}(\mathbf{U})} r_{jk}$ by Eq. (4) ;

// Step 3: Fuse token importance

Normalize $\{s_j^{\text{intra}}\}_{j=1}^T$ and $\{s_j^{\text{inter}}\}_{j=1}^T$ by softmax to obtain $\{\tilde{s}_j^{\text{intra}}\}_{j=1}^T$ and $\{\tilde{s}_j^{\text{inter}}\}_{j=1}^T$;

for $j = 1$ **to** T **do**

 Compute fused importance weight $w_j = \alpha \tilde{s}_j^{\text{intra}} + (1 - \alpha) \tilde{s}_j^{\text{inter}}$ by Eq. (5) ;

 Compute biased weight $\bar{w}_j = w_j^\beta$;

// Step 4: Compute attention-induced token coverage

for $i = 1$ **to** T **do**

for $j = 1$ **to** T **do**

 Compute token-level coverage $c_{ij} = \frac{1}{LH} \sum_{l=1}^L \sum_{h=1}^H A_{i \rightarrow j}^{(l,h)}$ by Eq. (6) ;

// Step 5: Greedy subset selection

Initialize $\mathbf{S} \leftarrow \emptyset$;

Initialize $m_j \leftarrow 0$ for all $j \in \{1, \dots, T\}$;

while $|\mathbf{S}| < k$ **do**

foreach $\mathbf{v}_i \in \mathbf{V} \setminus \mathbf{S}$ **do**

 Compute marginal gain

$$\Delta(\mathbf{v}_i \mid \mathbf{S}) = \sum_{j=1}^T \bar{w}_j \max(c_{ij} - m_j, 0)$$

 according to Eq. (9) ;

 Select

$$\mathbf{v}_{i^*} = \arg \max_{\mathbf{v}_i \in \mathbf{V} \setminus \mathbf{S}} \Delta(\mathbf{v}_i \mid \mathbf{S})$$

 ;

 Update $\mathbf{S} \leftarrow \mathbf{S} \cup \{\mathbf{v}_{i^*}\}$;

for $j = 1$ **to** T **do**

 Update current coverage $m_j \leftarrow \max(m_j, c_{i^*j})$;

return $\mathbf{S}$

E Results on Larger Model Scales

Table 7: Performance comparison on LLaVA-1.5-13B under different pruning ratios. “Perf. Ret.” denotes the average performance retention rate relative to the full-token baseline.

Method	Venue	MME	GQA	SQA	POPE	TextVQA	VizWiz	VQA-v2	MMB	MM-Vet	Perf. Ret.
Upper Bound, 576 visual tokens (pruning ratio = 0%)											
LLaVA-1.5-13B	CVPR’24	1818	63.2	72.8	85.9	61.3	56.6	80.0	67.7	35.3	100.0%
Retain 192 visual tokens (pruning ratio = 66.7%)											
VisionZIP	CVPR’25	1754	59.1	73.5	85.1	59.5	54.9	78.0	66.9	37.5	98.5%
SCOPE	NeurIPS’25	1775	59.7	73.8	86.7	60.0	55.0	78.1	67.6	39.4	99.8%
PruneSID	ICLR’26	1770	59.6	72.8	86.4	58.6	56.0	78.0	65.9	38.0	98.8%
ACPruner	Ours	1878	60.3	73.6	86.9	60.4	56.2	78.8	67.2	38.4	100.6%
Retain 128 visual tokens (pruning ratio = 77.8%)											
VisionZIP	CVPR’25	1743	57.9	74.0	85.2	58.7	55.0	76.8	66.7	37.5	98.0%
SCOPE	NeurIPS’25	1735	59.3	73.9	85.9	58.7	56.0	77.0	67.2	37.7	98.6%
PruneSID	ICLR’26	1811	58.9	73.1	85.9	57.5	56.8	76.7	65.5	37.3	98.4%
ACPruner	Ours	1829	59.6	74.5	86.1	59.1	56.2	77.4	67.2	37.5	99.4%
Retain 64 visual tokens (pruning ratio = 88.9%)											
VisionZIP	CVPR’25	1676	56.2	74.4	76.0	57.4	55.9	73.7	64.9	33.9	94.2%
SCOPE	NeurIPS’25	1762	58.7	73.2	83.0	58.3	56.8	75.0	65.5	35.7	97.3%
PruneSID	ICLR’26	1711	57.8	71.8	82.0	56.3	57.3	75.2	63.8	35.2	95.6%
ACPruner	Ours	1820	58.7	72.7	85.4	58.5	57.5	75.8	66.2	35.8	98.1%

Table 8: Performance comparison on LLaVA-NeXT-13B under different pruning ratios. “Perf. Ret.” denotes the average performance retention rate relative to the full-token baseline.

Method	Venue	MME	GQA	SQA	POPE	TextVQA	VizWiz	VQA-v2	MMB	Perf. Ret.
Upper Bound, 2880 visual tokens (pruning ratio = 0%)										
LLaVA-NeXT-13B	CVPR’24	1901	65.4	73.5	86.2	64.3	64.0	81.8	70.0	100.0%
Retain up to 640 visual tokens (pruning ratio = 77.8%)										
VisionZIP	CVPR’25	1871	63.0	71.2	85.7	62.2	56.0	79.7	68.6	96.3%
SCOPE	NeurIPS’25	1897	63.6	72.5	86.4	62.4	60.0	79.5	69.3	97.9%
PruneSID	ICLR’26	1817	62.4	70.1	85.6	60.2	60.2	79.1	67.0	96.1%
ACPruner	Ours	1894	64.3	73.7	86.5	63.0	60.8	80.1	70.2	98.7%
Retain up to 320 visual tokens (pruning ratio = 88.9%)										
VisionZIP	CVPR’25	1805	60.7	70.3	82.0	60.9	56.7	76.8	67.2	93.9%
SCOPE	NeurIPS’25	1830	63.0	71.7	85.1	60.8	57.7	77.3	67.7	95.6%
PruneSID	ICLR’26	1810	61.5	70.3	82.7	58.5	58.5	76.9	65.4	93.8%
ACPruner	Ours	1848	63.5	73.4	85.7	61.6	58.4	77.8	68.2	96.6%
Retain up to 160 visual tokens (pruning ratio = 94.4%)										
VisionZIP	CVPR’25	1739	57.8	69.3	76.6	58.4	55.3	72.4	64.9	90.2%
SCOPE	NeurIPS’25	1777	61.4	72.0	82.8	59.3	56.3	74.0	66.9	93.5%
PruneSID	ICLR’26	1715	59.5	69.1	77.8	56.7	56.7	73.6	65.5	90.7%
ACPruner	Ours	1797	62.2	72.9	84.9	60.1	57.0	74.9	66.0	94.5%

To further evaluate the scalability of ACPruner, we extend our experiments to larger 13B-scale LVLMS, including LLaVA-1.5-13B and LLaVA-NeXT-13B. The results are respectively reported in Tables 7 and 8.

Results on LLaVA-1.5-13B. Table 7 shows that ACPruner consistently achieves the best overall performance retention across all three pruning ratios. At the pruning ratio of 66.7%, ACPruner reaches 100.6% performance retention, slightly surpassing the full-token baseline. At the more aggressive pruning ratio of 77.8%, it still delivers the best average performance retention of 99.4%. Even under

the extremely high pruning ratio of 88.9%, ACPruner remains the strongest method overall, achieving 98.1% performance retention. These results are consistent with those on LLaVA-1.5-7B, showing that the advantages of ACPruner transfer well to larger model scales.

Results on LLaVA-NeXT-13B. Table 8 reports the results on LLaVA-NeXT-13B. ACPruner again achieves the best overall performance retention under all pruning ratios. At the pruning ratio of 77.8%, it obtains 98.7% performance retention, outperforming all comparison methods. At 88.9% pruning, ACPruner still delivers the best overall performance retention of 96.6%. Even under the extremely high pruning ratio of 94.4%, where only up to 160 visual tokens are retained, ACPruner remains the best-performing method with 94.5% performance retention. These results further verify the robustness of ACPruner on larger high-resolution LVLs.

F Additional Ablation Study

In this section, we present additional ablation results to further analyze the impact of various design choices in ACPruner.

F.1 Ablation of Intra-modality Importance Variants

In ACPruner, the intra-modality importance of a visual token is computed to capture its contribution to the global image semantics, typically using CLS-to-patch attention in the penultimate layer of the vision encoder (or the average incoming attention if no CLS token exists). To further evaluate the design choices for this component, we compare four variants on LLaVA-1.5-7B under a 77.8% pruning ratio: CLS attention, patch incoming attention, L2 norm, and similarity with the global mean. CLS attention uses the attention from the CLS token to each patch token in the penultimate encoder layer; patch incoming attention uses the average incoming attention received by each patch token across all encoder layers; L2 norm uses the feature magnitude of each token; and similarity with the global mean measures the alignment between each token and the global mean visual feature.

Table 9 shows that CLS attention achieves the best overall performance, with the highest performance retention of 98.9%. Replacing it with patch incoming attention causes a small but consistent drop, indicating that it is a reasonable surrogate but weaker than CLS attention as a global saliency cue. The two feature-based variants perform noticeably worse: L2 norm leads to a clear degradation, while similarity with global mean performs worst overall, especially on TextVQA. These results show that attention-based global importance is more effective than simple feature magnitude or feature similarity for identifying visually important tokens, justifying our choice of CLS attention as the default intra-modality importance when a CLS token is available.

Table 9: Ablation of different intra-modality importance variants on LLaVA-1.5-7B under a 77.8% pruning ratio. The blue row corresponds to ACPruner’s design choice.

	MME	GQA	SQA	POPE	TextVQA	Perf. Ret.
CLS attention	1812	59.8	69.4	87.2	57.6	98.9%
Patch incoming attention	1780	59.2	68.9	87.1	57.1	98.0%
L2 norm	1707	59.7	68.5	87.0	53.9	96.1%
Similarity with global mean	1665	59.1	68.6	87.2	48.8	93.8%

F.2 Ablation of Noun Extraction

In ACPruner, noun extraction is used to identify the key semantic units of the input query, providing the textual cues that guide which visual tokens should be prioritized. To evaluate the impact of this design choice, we ablate different noun extraction strategies on LLaVA-1.5-7B under a 77.8% pruning ratio. We compare four settings: using only nouns, using nouns with adjectives, using nouns with adjectives and verbs, and using the full text. Table 10 shows that using only nouns achieves the best overall performance. As more linguistic categories are included, the performance gradually declines, and using the full text performs worst. These results suggest that nouns provide the cleanest semantic cues for identifying query-relevant visual content, while introducing additional modifiers or

the full text tends to bring more irrelevant linguistic noise. This justifies our choice of using noun extraction as the default text processing strategy.

Table 10: Ablation of noun extraction on LLaVA-1.5-7B under a 77.8% pruning ratio. The blue row corresponds to ACPruner’s design choice.

	MME	GQA	SQA	POPE	Perf. Ret.
Noun	1812	59.8	69.4	87.2	98.8%
Noun + Adj	1804	59.8	69.2	87.2	98.6%
Noun + Adj + Verb	1800	59.7	69.1	87.2	98.5%
Full text	1782	59.5	68.9	86.9	98.0%

F.3 Ablation of Inter-modality Importance Variants

In ACPruner, inter-modality importance is used to measure how relevant each visual token is to the input textual query. To further evaluate the design choices for this component, we ablate different variants on LLaVA-1.5-7B under a 77.8% pruning ratio. We compare two design choices: the matching granularity, including token-level and word-level matching, and the aggregation strategy, including max and mean pooling. Table 11 shows that Word-level Max achieves the best overall performance. Compared with token-level matching, word-level matching consistently performs better, indicating that aggregating subword tokens into word-level semantic units provides a cleaner relevance signal. Moreover, max pooling consistently outperforms mean pooling under both token-level and word-level settings, suggesting that visual relevance is better characterized by the strongest alignment to a key textual unit rather than by average similarity over all textual units. These results justify our choice of word-level max similarity as the default definition of inter-modality importance.

Table 11: Ablation of different inter-modality importance variants on LLaVA-1.5-7B under a 77.8% pruning ratio. The blue row corresponds to ACPruner’s design choice.

	MME	GQA	SQA	POPE	TextVQA	Perf. Ret.
Token-level Max	1813	59.7	69.2	86.9	57.5	98.7%
Token-level Mean	1806	59.6	68.7	86.8	56.9	98.2%
Word-level Max	1812	59.8	69.4	87.2	57.6	98.9%
Word-level Mean	1768	59.3	69.2	86.0	57.4	97.8%

F.4 Ablation of Encoder Attention Layer Choices

ACPruner uses encoder attention in two places. First, for intra-modality importance, it uses the CLS-to-patch attention from the penultimate layer. Second, for token coverage, it uses the patch-to-patch attention averaged across all layers. Since prior studies have shown that attention patterns in ViT-based vision encoders vary substantially across different depths [21, 3], we further ablate the choice of attention layers for these two components.

Table 12 reports the ablation results of the CLS attention layer used for intra-modality importance. The best performance is achieved by using the penultimate layer (layer 22), which matches our default design. Earlier layers and middle layers perform consistently worse, and averaging CLS attention across all layers also leads to a clear drop. This suggests that the final-stage CLS attention provides the strongest global saliency signal for identifying visually important tokens.

Table 13 reports the ablation results of the patch attention layer used for token coverage. In contrast to CLS attention, the best performance is obtained by averaging patch-to-patch attention across all layers, which again matches our default design. Using only a single layer, whether early, middle, or late, consistently underperforms the all-layer setting. This indicates that token-to-token coverage is better characterized by aggregating attention information across the full encoding process, rather than relying on any individual layer alone.

Table 12: Ablation of CLS attention layer on LLaVA-1.5-7B under a 77.8% pruning ratio. The blue row corresponds to ACPruner’s design choice.

Layer Index	MME	GQA	SQA	POPE	TextVQA	Perf. Ret.
Initial Layers						
0	1797	59.5	68.8	87.1	55.1	97.5%
1	1746	59.7	69.2	87.2	53.6	96.7%
Middle Layers						
9	1753	59.4	68.3	87.0	55.6	97.0%
10	1756	59.5	68.1	86.8	55.7	97.0%
Final Layers						
22	1812	59.8	69.4	87.2	57.6	98.9%
23	1788	59.4	69.4	86.9	57.6	98.4%
All Layers						
0-23	1751	59.4	68.7	86.8	57.0	97.6%

Table 13: Ablation of patch attention layer on LLaVA-1.5-7B under a 77.8% pruning ratio. The blue row corresponds to ACPruner’s design choice.

Layer Index	MME	GQA	SQA	POPE	TextVQA	Perf. Ret.
Initial Layers						
0	1738	58.8	68.5	85.2	52.2	89.7%
1	1745	59.4	68.4	86.3	53.7	92.3%
Middle Layers						
9	1721	60.0	68.4	86.5	53.3	91.6%
10	1784	59.5	68.1	86.6	56.3	96.7%
Final Layers						
22	1746	59.6	68.5	87.0	55.0	94.5%
23	1771	59.4	68.9	87.2	54.2	93.1%
All Layers						
0-23	1812	59.8	69.4	87.2	57.6	98.9%

G Step-wise Runtime Breakdown of ACPruner

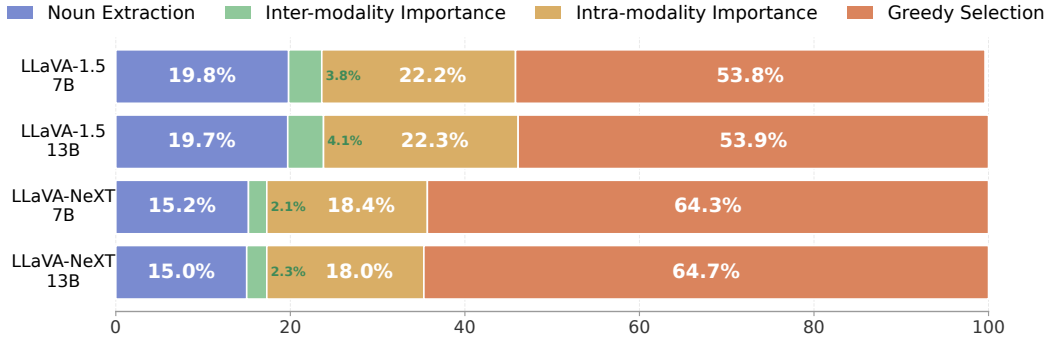


Figure 3: Step-wise runtime distribution of ACPruner on different LVLM backbones.

To further understand the practical overhead of ACPruner, we visualize the runtime distribution of its internal steps on different LVLm backbones in Fig. 3. We decompose the pruning pipeline into four parts: noun extraction, inter-modality importance computation, intra-modality importance computation, and greedy selection. As shown in Fig. 3, greedy selection is the dominant cost within ACPruner across all backbones, accounting for more than half of the total pruning time in all cases. This proportion is larger on the LLaVA-NeXT family, where the initial number of visual tokens is higher. In contrast, inter-modality importance contributes the smallest runtime share, indicating that the text-guided relevance estimation introduces only a minor overhead. Noun extraction and intra-modality importance take a moderate portion of the total time, and their proportions remain relatively stable within each model family.

H Details of Evaluation Benchmarks

We evaluate ACPruner on a diverse set of image and video benchmarks covering different multimodal tasks. Below, we briefly introduce the benchmarks used in our experiments.

H.1 Image Benchmarks

MME [14]. MME is a comprehensive evaluation benchmark for multimodal large language models. It measures both perception and cognition abilities through 14 subtasks, and its instruction-answer pairs are manually designed to reduce data leakage and minimize the influence of prompt engineering. It is widely used to assess the general multimodal understanding capabilities of MLLMs in a controlled and holistic manner.

GQA [18]. GQA is a benchmark for real-world visual reasoning and compositional question answering. It leverages scene graph structures to generate 22M diverse reasoning questions, each paired with a functional program representing its semantics. In addition to standard accuracy, GQA emphasizes deeper evaluation dimensions such as consistency, grounding, and plausibility, making it well suited for assessing fine-grained reasoning over complex scenes.

SQA / ScienceQA [30]. ScienceQA is a multimodal science question answering benchmark consisting of approximately 21K multiple-choice questions covering a broad range of science topics. Beyond answer labels, it also provides corresponding lectures and explanations, enabling the evaluation of multimodal reasoning and knowledge-intensive problem solving. It is particularly useful for measuring a model’s ability to integrate visual evidence with scientific commonsense and structured reasoning.

POPE [22]. POPE is a benchmark designed to evaluate object hallucination in large vision-language models. It was introduced as part of the first systematic study of hallucination in LVLms and uses a polling-based query method to provide a more stable and flexible evaluation protocol. POPE specifically tests whether a model tends to mention objects that are inconsistent with the visual content, making it a standard benchmark for hallucination analysis.

TextVQA [32]. TextVQA focuses on question answering that requires models to read and reason about scene text in images. The dataset contains 45,336 questions on 28,408 images, where accurate answering depends not only on visual understanding but also on recognizing and interpreting embedded textual information. It is a representative benchmark for evaluating OCR-aware multimodal reasoning.

VizWiz [17]. VizWiz is a goal-oriented VQA benchmark built from real visual questions asked by blind people. It contains over 31,000 visual questions, where each image is captured by a blind photographer using a mobile phone and each question is recorded in spoken form. Compared with conventional VQA benchmarks, VizWiz is more challenging because the images are often of poor quality, the questions are more conversational, and many questions are unanswerable from the image alone.

VQA-v2 [16]. VQA-v2 is a balanced visual question answering benchmark designed to make the visual content matter more. It extends the original VQA dataset by collecting complementary image pairs such that the same question can correspond to different answers on similar images, thereby reducing the effect of language priors. This benchmark is widely used to evaluate open-ended visual understanding and question answering on real-world images.

MMB-en [29]. MMBench is a systematically designed objective benchmark for the holistic evaluation of vision-language models, and it provides both English and Chinese multiple-choice questions; in our experiments, we use its English subset, MMBench-EN. MMBench includes a carefully curated evaluation pipeline with strong quality control and adopts strategies such as CircularEval and LLM-assisted answer matching, making it suitable for robust and fine-grained comparison across multimodal models.

MM-Vet [46]. MM-Vet is an open-ended benchmark for evaluating large multimodal models on complicated multimodal tasks that require the integration of multiple abilities. It defines six core vision-language capabilities, including recognition, OCR, knowledge, language generation, spatial awareness, and math, and evaluates 16 capability combinations derived from them. MM-Vet also employs an LLM-based evaluator to score open-ended outputs under a unified metric, making it especially suitable for assessing integrated multimodal competence.

H.2 Video Benchmarks

MVBench [20]. MVBench is a comprehensive benchmark for evaluating multi-modal video understanding. It contains 2,636 carefully curated multiple-choice question-answer pairs spanning 20 challenging video tasks, and covers four major ability dimensions: temporal understanding, spatial understanding, object-centric understanding, and action-centric understanding. It is designed to assess whether models can effectively comprehend dynamic visual content beyond static image perception.

LongVideo / LongVideoBench [41]. LongVideoBench is a benchmark designed for long-context video understanding. It contains 1,182 long videos with an average duration of approximately 39 minutes and 3,763 manually annotated multiple-choice question-answer pairs. The benchmark evaluates a model’s ability to process and reason over long videos, often together with subtitles, making it particularly suitable for testing long-range temporal modeling and long-context multimodal comprehension.

NextQA [42]. NextQA is a benchmark for causal and temporal video question answering. Built upon 8,134 videos and more than 52,000 question-answer pairs, it emphasizes higher-order reasoning over videos, including questions about causality, temporal relations, and descriptive understanding. Unlike conventional video QA datasets that focus mainly on short-term recognition, NextQA is designed to evaluate whether models can perform deeper reasoning about events and their dynamics.

VideoMME [15]. VideoMME is a large-scale benchmark for comprehensive evaluation of video understanding in multimodal large language models. It includes 900 videos and 2,700 multiple-choice questions, with video durations ranging from short to very long clips. The benchmark covers a wide variety of video content and task settings, and is specifically designed to measure a model’s ability to understand, reason about, and answer questions over videos of diverse temporal lengths.

I Details of Comparison Methods

FastV [7]. FastV prunes visual tokens from a selected LLM layer onward by ranking them according to the average attention they receive from textual tokens and discarding the low-ranked ones, thereby reducing the computation of subsequent LLM layers.

LLaVA-PruMerge [31]. LLaVA-PruMerge first selects important visual tokens according to the sparsity of the attention between the [CLS] token and patch tokens in the visual encoder, and then merges pruned tokens into the retained ones based on key similarity to preserve visual information.

FasterVLM [48]. FasterVLM ranks visual tokens using the attention from the [CLS] token in the visual encoder, instead of using text-visual attention inside the LLM. It then prunes low-ranked visual tokens before they are fed into the LLM, thereby reducing the computation of the subsequent language model more efficiently.

TRIM [33]. TRIM measures the importance of each image token using the similarity between the text representation and image patch representations in CLIP, adaptively retains high-similarity tokens via an IQR-based selection rule, and appends an aggregated token summarizing the discarded tokens to alleviate information loss.

VisPruner [49]. VisPruner first selects important tokens according to visual attention from the visual encoder, and then retains an additional set of diverse tokens by removing redundant ones based on token similarity, so as to better preserve both salient and complementary visual information before feeding the tokens into the LLM.

SparseVLM [50]. SparseVLM uses selected text tokens as raters to assess the significance of visual tokens via decoder self-attention, adaptively prunes low-significance tokens based on a rank-based sparsification strategy, and further recycles pruned tokens into compact representations to reduce information loss.

HiRED [3]. HiRED first allocates different token budgets among the image sub-regions according to early-layer CLS attention in the vision encoder, and then retains the most informative tokens within each region based on final-layer CLS attention before feeding them into the LLM.

DART [37]. DART prunes tokens based on duplication rather than attention-based importance. It first selects a small set of pivot tokens, then measures the cosine similarity between pivot tokens and the remaining visual tokens, and finally retains the tokens with the lowest duplication to the pivots so as to reduce redundancy while preserving visual information.

VisionZIP [45]. VisionZIP first selects dominant visual tokens according to attention scores within the vision encoder, and then merges the remaining tokens based on similarity to form contextual tokens, thereby reducing visual redundancy before feeding the tokens into the LLM.

DivPrune [2]. DivPrune formulates token selection as a max-min diversity problem, aiming to retain a subset of visual tokens with the largest diversity. It selects tokens by maximizing the minimum pairwise distance among them, thereby reducing redundancy and preserving a more representative subset of the original visual tokens.

PDrop [43]. PDrop is a progressive visual token reduction method that divides the LLM into multiple stages and drops a portion of image tokens at the end of each stage according to a predefined ratio, where token selection is based on a lightweight attention-based ranking so that visual redundancy is reduced gradually as the layers deepen.

SCOPE [9]. SCOPE aims to preserve both salient and semantically complementary visual information. It first models the representational contribution of a selected token set based on feature similarities, then estimates the marginal gain brought by each unselected token. By combining this gain with a saliency score, SCOPE iteratively selects tokens that are both informative and complementary to the current subset, thereby alleviating the semantic incompleteness caused by purely saliency-based pruning.

AdaptPrune [4]. AdaptPrune combines attention-based ranking with similarity-based redundancy removal. It analyzes image complexity using effective rank and attention entropy, then adjusts the similarity threshold accordingly so that simple images favor more concentrated high-attention tokens, while complex images retain more diverse tokens.

PruneSID [13]. PruneSID jointly considers token importance and diversity through a two-stage pipeline. It first groups tokens into semantically coherent clusters via principal semantic component analysis, and then removes redundant tokens within each group using non-maximum suppression, with an additional dynamic compression mechanism that adjusts the token budget according to image complexity.

LearnPruner [34]. LearnPruner first removes visually redundant tokens after the vision encoder using a learnable pruning module, supplemented with a small set of diversity tokens, and then performs query-aware pruning in the middle layer of the LLM based on text-to-vision attention to further discard text-irrelevant tokens.

AgilePruner [5]. AgilePruner combines attention-based ranking with similarity-based redundancy removal. It analyzes image complexity using effective rank and attention entropy, and then adjusts the pruning threshold accordingly so that simple images retain more concentrated high-attention tokens, while complex images preserve a more diverse token set.

J Case Study

Fig. 4 visualizes the token pruning results of ACPruner on LLaVA-1.5-7B under different token budgets. For each example, we show the input question, the original image, and the token pruning masks when the budget is set to 128, 64, 32, and 16 tokens. The masked patches indicate the pruned visual tokens.

Several observations can be made from these examples. First, the pruning behavior of ACPruner is clearly query-relevant: for the same image, different questions lead to different retention patterns, even though ACPruner operates entirely in a pre-LLM manner without relying on LLM-side attention. Second, when the token budget is relatively sufficient, ACPruner does not simply preserve a dense cluster of highly similar tokens around a few salient regions. Instead, while retaining the most question-relevant and visually-salient content, it also maintains broader coverage over other informative regions, yielding a compact yet still well-distributed representation of the image. Third, when the token budget becomes extremely limited, ACPruner further concentrates the retained tokens on the most critical visual evidence for the current query, demonstrating a smooth transition from broader semantic coverage to highly selective preservation under aggressive pruning.

Overall, these visualizations provide intuitive support for the design of ACPruner. Rather than merely retaining the individually most salient tokens or uniformly distributing the budget across the image, ACPruner preserves a compact subset of tokens that is both important and collectively informative.

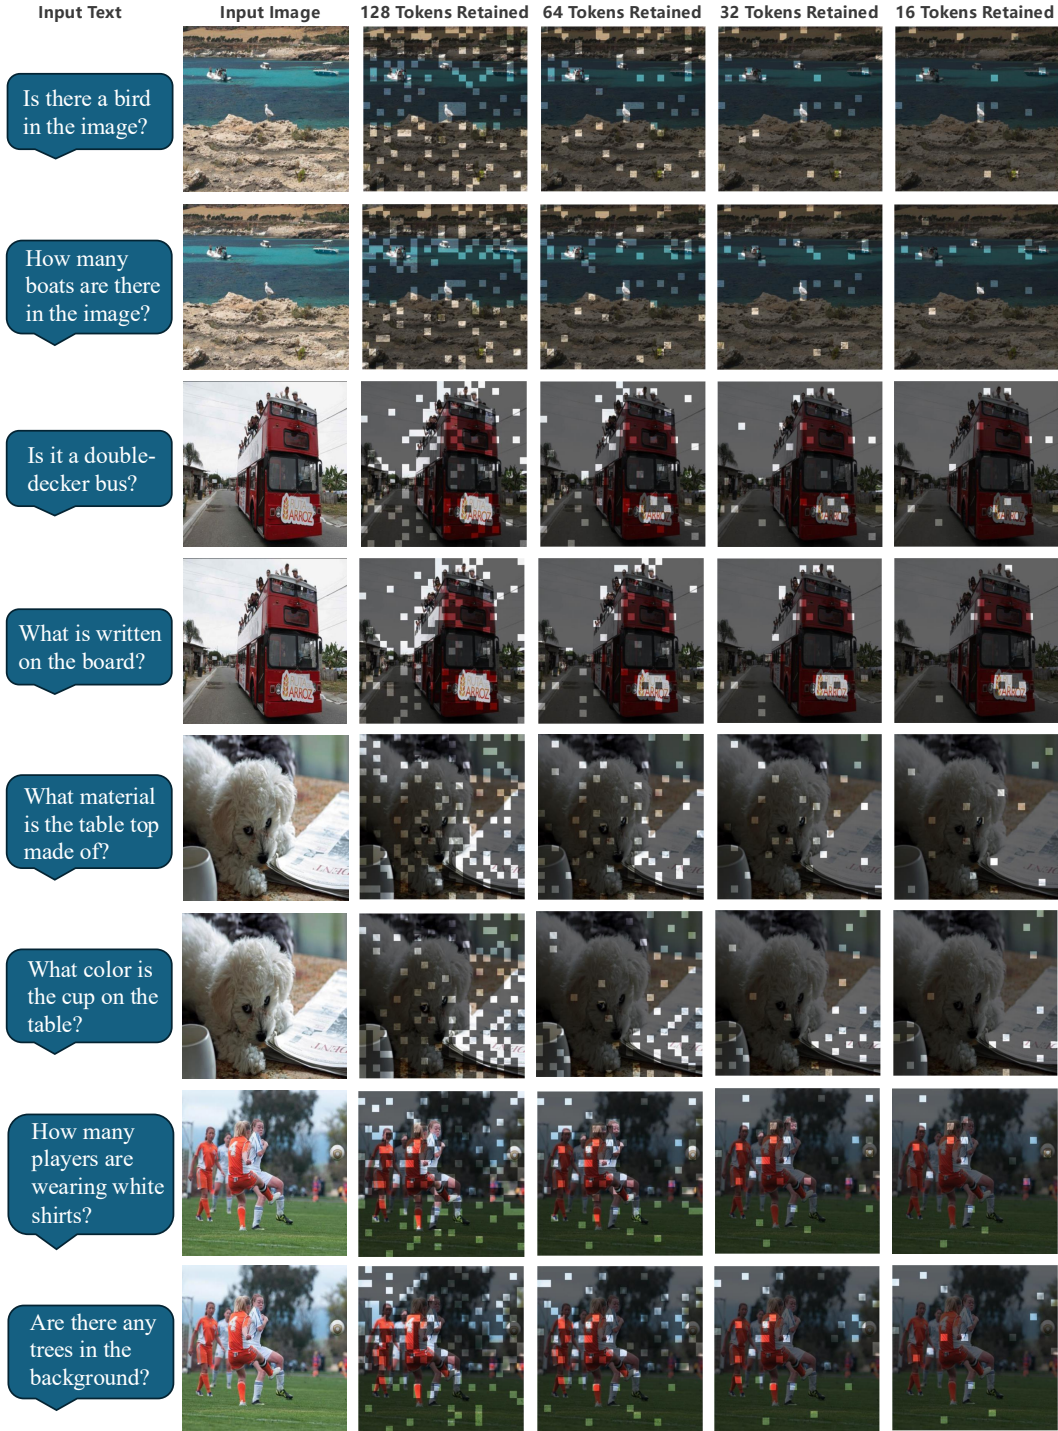


Figure 4: Visualization of ACPruner’s pruning results on LLaVA-1.5-7B under different token budgets. The masked patches correspond to visual tokens pruned by ACPruner. For each image, we provide two different text queries to demonstrate the query-relevant nature of ACPruner.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope?

Answer: [\[Yes\]](#)

Justification: The abstract and introduction clearly summarize the paper’s contributions, including the formulation of visual token pruning as biased coverage maximization, the design of ACPruner, and its empirical validation across multiple LVLM backbones and task categories, accurately reflecting the scope and claims of the work.

Guidelines:

- The answer [\[N/A\]](#) means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [\[No\]](#) or [\[N/A\]](#) answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: We explicitly discuss the limitation in Sec. 5.

Guidelines:

- The answer [\[N/A\]](#) means that the paper has no limitation while the answer [\[No\]](#) means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate “Limitations” section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren’t acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [\[Yes\]](#)

Justification: All theoretical results are formally stated with clear assumptions and complete proofs in Appendix B and Appendix C.

Guidelines:

- The answer [\[N/A\]](#) means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [\[Yes\]](#)

Justification: We provide a detailed pseudocode of the proposed method in Appendix D. We also provide the detailed hyperparameter settings for reproducing the results in Sec. 3.1.

Guidelines:

- The answer [\[N/A\]](#) means that the paper does not include experiments.
- If the paper includes experiments, a [\[No\]](#) answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [No]

Justification: We will release the code once the paper is accepted.

Guidelines:

- The answer [N/A] means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: We specify all relevant experimental details, including datasets, backbone models, and hyperparameter choices in Sec. 3.1.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: Following prior studies, all experiments use deterministic decoding with temperature set to 0. As a result, there is no source of randomness in the evaluation, and error bars or statistical significance measures are not applicable.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).

- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: We indicate the computation resources in Sec. 3.1 and provide practical runtime analysis in Sec. 3.3.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: This work fully complies with the NeurIPS Code of Ethics.

Guidelines:

- The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [N/A]

Justification: This work focuses on algorithmic improvements for efficient visual token pruning in LVLMS and does not involve deployment in sensitive contexts or affect human subjects directly. Consequently, discussion of broader positive or negative societal impacts is not applicable.

Guidelines:

- The answer [N/A] means that there is no societal impact of the work performed.

- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

Answer: [N/A]

Justification: This work does not release any models or datasets that pose a high risk of misuse. The paper focuses solely on algorithmic improvements for visual token pruning in LVLMS, and therefore no specific safeguards are required.

Guidelines:

- The answer [N/A] means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: All datasets and models used in this work are publicly available and properly cited.

Guidelines:

- The answer [N/A] means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.

- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [N/A]

Justification: We do not release new assets at this stage.

Guidelines:

- The answer [N/A] means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [N/A]

Justification: This work does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [N/A]

Justification: This work does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.

- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. **Declaration of LLM usage**

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does *not* impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [N/A]

Justification: The core method development in this research does not involve LLMs as any important, original, or non-standard components.

Guidelines:

- The answer [N/A] means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy in the NeurIPS handbook for what should or should not be described.