



CheXGround: Anatomical Region Tokens for Grounded Longitudinal Chest X-ray Interpretation

Adonay Demewez Gebremedhin¹

202311465@ajmanuni.ac.ae

Wessam Shehieb¹

w.shehieb@ajman.ac.ae

Sara Alansari²

saraansari@live.com

Mohamad Alansari³

100061914@ku.ac.ae

Muzammal Naseer^{3,4}

muhammadmuzammal.naseer@ku.ac.ae

Sajid Javed³

sajid.javed@ku.ac.ae

Naoufel Werghi³

Naoufel.Werghi@ku.ac.ae

¹ Ajman University

Ajman, United Arab Emirates

² University of Birmingham

Birmingham, United Kingdom

³ Khalifa University

Abu Dhabi, United Arab Emirates

⁴ University of Western Australia

Australia

Abstract

Recent radiology multi-modal language models have made substantial progress in chest X-ray report generation, visual question answering, and temporal reasoning. While longitudinal chest X-ray interpretation compares sequential examinations to describe change, visual grounding aims to connect clinical language with localized image evidence. Although longitudinal modeling and visual grounding have each advanced radiology language models, how localized visual evidence can support longitudinal interpretation remains under-explored. We introduce CheXGround, a region-grounded longitudinal chest X-ray language model that represents paired studies through corresponding anatomical regions. CheXGround extracts anatomical regions from current and prior radiographs, encodes them as temporally enhanced Region-of-Interest (ROI) tokens, and combines them with global temporal image context during generation. To connect these region tokens with clinical text, we propose Temporal Region–Phrase Alignment, a pre-training objective that aligns temporal anatomical representations with localized report phrases. We evaluate CheXGround on single-study and longitudinal Visual Question Answering (VQA), longitudinal findings generation, temporal grounded VQA, and anatomical grounding. Across these tasks, CheXGround improves clinical language quality, temporal reasoning, and localization accuracy over recent baselines. Our results suggest that organizing longitudinal evidence at the anatomical level is a strong representation for grounded radiology language modeling.

Project Page: <https://adonaydem.github.io/chexground-website>

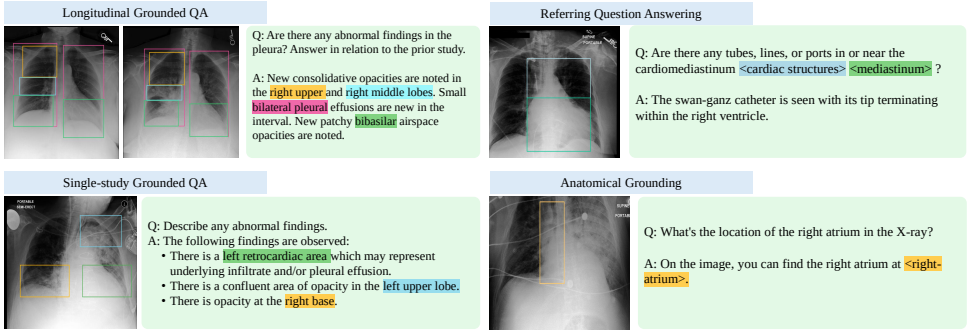


Figure 1: **Overview of the grounded radiology tasks studied in this work.** CheXGround supports grounded interaction for chest X-ray interpretation, spanning spatio-temporal comparison, finding-level reasoning, referring conversations, and anatomical localization. These tasks move beyond answer generation alone by requiring radiology reasoning to be grounded across multiple granularities.

1 Introduction

Radiologists often rely on structured diagnostic evaluation, relating fine-grained spatial cues to abnormalities, comparing findings across anatomical regions to test clinical hypotheses, and incorporating patient history to assess disease progression [10, 65]. These single and longitudinal workflows require models to represent both localized anatomy and temporal change. In longitudinal scenarios, the clinically important signal is often not a global difference between two images, but a subtle change in a specific region, such as a worsening *basilar* opacity, a resolving *right lower-lobe* consolidation, or location of a newly visible support device. A model for longitudinal chest X-ray interpretation should therefore connect *what* finding is present, *where* it is located, and *how* it has changed over time.

General-domain grounding Multi-modal Large Language Models (MLLMs) have shown that generated language can be effectively tied to visual evidence through bounding boxes, segmentation masks, and spatio-temporal grounding [6, 37, 48, 51, 56, 57, 63]. In medicine, recent developments improve local image–text alignment through localized contrastive learning, phrase grounding, region-level representation learning, multi-granularity supervision, and anatomy-aware pretraining [28, 42, 49, 52, 58, 63, 70]. Recent grounded medical MLLMs further move this direction toward localized generation by linking generated answer text to visual evidence such as boxes or masks [8, 17, 19, 23, 47, 73]. Longitudinal and difference-aware chest X-ray models make complementary progress by incorporating prior examinations for temporal report generation, progression modeling, difference visual question answering, and temporal vision–language pretraining [18, 27, 54, 46, 51, 54, 58, 71, 74]. However, tightly coupling spatial grounding with longitudinal comparison in radiology remains open, as clinically meaningful change may depend on how localized evidence evolves across prior and current studies.

Turning this motivation into a grounded longitudinal radiology model is non-trivial for four reasons. (i) Grounded radiology MLLMs often separate question answering from box or coordinate prediction rather than composing both simultaneously [17, 23, 73]. We instead use dual vision–language interleaving, composing clinical text with localized visual evidence within the same reasoning and generation process. (ii) Clinical interaction is multi-

granular, requiring responses that connect findings, anatomical references, and supporting regions [50]. We therefore use dense grounded supervision interleaving phrase-level visual annotations with clinical answers. (iii) Some methods localize through coordinate regression in the language output [12, 23], while others ground after generation [23], leaving visual evidence weakly integrated into reasoning [48]. We instead expose anatomical regions as visual tokens, enabling language generation over region-level evidence compared across current and prior studies. (iv) Grounded longitudinal modeling requires large-scale supervision of dense spatio-temporal relations. We therefore train on 2.2M samples spanning language generation, visual grounding, and temporal interpretation [9, 23, 27, 50]. Together, these challenges motivate reasoning over anatomical evidence across current and prior studies.

We introduce **CheXGround**, a **Chest X-ray Grounded** longitudinal MLLM for region-referential chest X-ray interpretation. CheXGround represents each study using a fixed set of anatomical regions, compares each region in the current radiograph with the same region in the prior radiograph, and passes the resulting ROI tokens to the language model. Because these tokens correspond to fixed chest anatomy, the model can reason over clinically meaningful regions rather than only global image tokens. This follows the broader idea of localized visual tokenization [48], but adapts it to radiology, where the relevant regions are anatomical structures shared across exams. To connect these regions with clinical language, we pretrain them with Temporal Region–Phrase Alignment (TRPA), which combines an ROI-level contrastive objective inspired by GLoRIA [28] with phrase-composition targets that allow related clinical phrases to share localized evidence. CheXGround then uses both global temporal image tokens and phrase-aligned anatomical ROI tokens for grounded visual question answering, disease-progression reasoning, and longitudinal report generation (See Fig. 1). Our contributions are:

- We introduce *CheXGround*, a two-stream longitudinal MLLM using global-temporal image tokens and temporal anatomical ROI tokens.
- We propose Temporal Region–Phrase Alignment pretraining (TRPA), with *GLoRIA-ROI* and phrase-composition alignment for temporally grounded ROI representations.
- We evaluate CheXGround on diverse visual grounding tasks demonstrating consistent gains over baselines in both clinical language quality and grounding accuracy.

2 Related Work

Radiology vision-language models. Report generation has progressed from CNN, recurrent, transformer, hierarchical, co-attention, and memory-based models to methods using medical knowledge, abnormality graphs, and retrieval priors [15, 16, 31, 39, 45, 56]. Medical and difference-aware VQA extend this to question-conditioned reasoning over abnormalities, locations, evidence, and temporal change [3, 9, 18, 24, 26, 27, 36, 38, 41, 44, 46, 53, 59]. Contrastive pretraining improves image–text representations through large-scale image–report alignment [7, 10, 22], while MLLMs support conversational reasoning, reporting, and VQA [8, 11, 23, 29, 40, 54, 59, 71, 73]. These advances provide strong vision-language backbones, while our work explicitly grounds reasoning in anatomical evidence for single-study and longitudinal interpretation.

Grounded medical and chest X-ray understanding. Grounded medical vision-language learning links clinical text to visual evidence through localized contrastive learning, sentence–region alignment, multi-granularity supervision, anatomy-aware representations, and inter-

active localization [28, 42, 49, 52, 58, 63, 70]. General grounding MLLMs extend this to segmentation, region references, pixel-level and spatial reasoning, and spatio-temporal grounding [0, 5, 47, 48, 51, 56, 57, 65]. Radiology-specific methods support grounded reporting and localization with boxes, masks, and multi-modal inputs [8, 23, 47, 73], while datasets provide anatomy-centered scene graphs, abnormality boxes, and grounded VQA [21, 60, 63, 67]. These works connect clinical text with localized evidence, but remain largely non-temporal. Our work instead models anatomical evidence across current and prior studies for fine-grained spatio-temporal grounding.

Longitudinal chest X-ray modeling. Longitudinal chest X-ray interpretation uses prior studies to assess whether findings are new, improving, worsening, stable, or resolved. Task-specific models incorporate priors through image/report conditioning, cross-attention, history-aware or region-specific generation, difference modeling, residual alignment, and temporal pretraining [0, 18, 20, 27, 34, 46, 51, 52, 58, 74]. Recent radiology MLLMs extend this to instruction following, multi-task temporal understanding, and generalist interpretation [8, 17, 59, 71, 73]. These works show the value of priors for temporal understanding. CheXGround extends this toward anatomy-aware temporal modeling, representing current–prior changes through localized anatomical evidence for fine-grained grounded reasoning.

3 Methodology

3.1 Overview and Problem Formulation

Problem formulation and architecture. Given radiographs $\{I_t\}_{t=1}^T$ and an instruction x , CheXGround generates a response for spatial or spatio-temporal VQA tasks. Even though our method can be applied to arbitrary T , we focus on the common paired setting $(I_{\text{curr}}, I_{\text{prior}})$ with $T = 2$ following recent literature. The model combines two visual streams: global temporal image tokens for holistic context, and anatomical region tokens for localized evidence from fixed chest regions. Building on region-referential grounded MLLMs [6, 37, 48, 64, 72, 65], CheXGround instantiates K anatomical slots from Chest ImaGenome [62], localizes each slot in both studies, and encodes it as an ROI embedding $\mathbf{v}_k^{\text{roi}}$ that carries anatomical identity and localized temporal context. These embeddings are inserted into the language model through a compact region block:

$$[\langle r_1 \rangle \langle \text{region} \rangle_1, \dots, \langle r_K \rangle \langle \text{region} \rangle_K], \quad (1)$$

where $\langle r_k \rangle$ denotes the k -th anatomical slot and the embedding of $\langle \text{region} \rangle_k$ is replaced by $\mathbf{v}_k^{\text{roi}}$. These region token handles allow both model outputs and user instructions to refer to explicit anatomical evidence [49].

3.2 Temporal Anatomical Region-of-Interest Tokens

We represent localized longitudinal evidence with fixed anatomical slots corresponding to clinically meaningful chest regions. For each slot k , CheXGround preserves anatomical identity while encoding its current appearance and change relative to the prior study.

Anatomical ROI extraction. For each radiograph I_t , we extract multiscale pyramid features $\{\mathbf{F}_t^\ell\}_{\ell=1}^L = \text{Pyr}(\phi(I_t))$ using the RAD-DINO image backbone ϕ [65]. An anatomy-aware detector $\mathcal{D}$, based on Deformable DETR [75], predicts one box per anatomical slot:

$$\{\mathbf{b}_{t,k}\}_{k=1}^K = \mathcal{D}(\{\mathbf{F}_t^\ell\}_{\ell=1}^L), \quad \mathbf{b}_{t,k} \in [0, 1]^4. \quad (2)$$

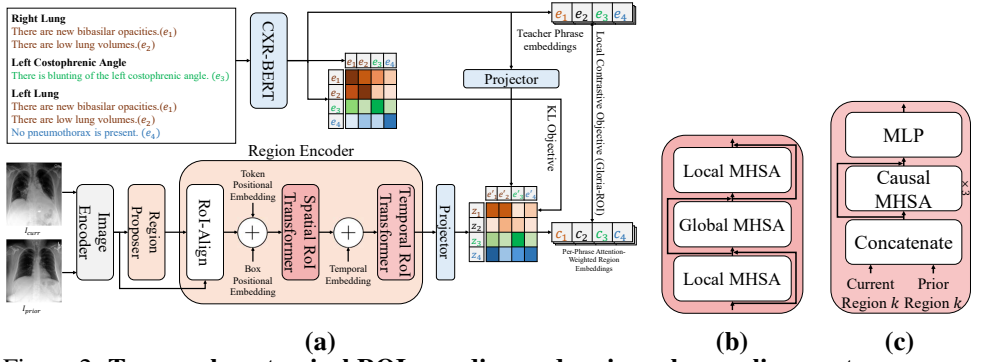


Figure 2: **Temporal anatomical ROI encoding and region–phrase alignment.**

(a) TRPA encodes current and prior chest X-rays, extracts anatomical regions with ROIALign [25], and aligns them with localized report phrases. The spatial ROI transformer in (b) refines each region using local and global context, while the temporal ROI transformer in (c) models current and prior causal relationships. *MHSA* denotes *multi-head self-attention*.

The detector is pretrained from scratch on Chest ImaGenome [57] box annotations and used in subsequent tasks. Given $\mathbf{b}_{t,k}$, ROIALign [25] extracts an $A \times A$ local feature grid:

$$\mathbf{U}_{t,k} = \text{ROIALign}(\{\mathbf{F}_t^\ell\}_{\ell=1}^L, \mathbf{b}_{t,k}) \in \mathbb{R}^{A^2 \times d}. \quad (3)$$

ROI transformer block. We use the following transformer block for spatial and temporal ROI encoding:

$$\begin{aligned} \mathbf{Y} &= \mathbf{X} + \text{MHSA}(\text{LN}(\mathbf{X})), \\ \mathcal{B}(\mathbf{X}) &= \mathbf{Y} + \text{MLP}(\text{LN}(\mathbf{Y})), \end{aligned} \quad (4)$$

for input tokens $\mathbf{X} \in \mathbb{R}^{n \times d}$, where LN, MHSA, and MLP denote layer normalization, multi-head self-attention [62], and a multi-layer perceptron.

Spatial ROI encoding. Because cropped ROIs can lose surrounding anatomical context [14], each grid $\mathbf{U}_{t,k}$ is augmented with a learnable box-coordinate embedding and two-dimensional sinusoidal grid embeddings, yielding $\tilde{\mathbf{U}}_{t,k} \in \mathbb{R}^{N \times d}$, where $N = A^2$. As shown in Fig. 2(b), the spatial ROI transformer is

$$\begin{aligned} \mathbf{L}_{t,k} &= \mathcal{B}_{\ell 1}(\tilde{\mathbf{U}}_{t,k}), \\ [\mathbf{G}_{t,1}; \dots; \mathbf{G}_{t,K}] &= \mathcal{B}_g([\mathbf{L}_{t,1}; \dots; \mathbf{L}_{t,K}]), \\ \mathbf{H}_{t,k} &= \mathcal{B}_{\ell 2}(\mathbf{G}_{t,k}), \end{aligned} \quad (5)$$

where $[\cdot; \cdot]$ denotes token concatenation and the global output is split back into anatomical slots. The first local block $\mathcal{B}_{\ell 1}$ models the N tokens within each ROI, $\mathcal{B}_g$ attends over all KN image tokens to recover cross-anatomical context, and $\mathcal{B}_{\ell 2}$ re-integrates this context within each ROI.

Causal temporal encoding. To model interval change without mixing unrelated anatomy, temporal attention is applied independently within each slot. The ordered spatial grids are augmented with 1-D sinusoidal temporal embeddings, yielding $\tilde{\mathbf{H}}_k$. As shown in Fig. 2(c), the causal temporal ROI transformer applies the same block $\mathcal{B}$ with a causal mask $\mathbf{M}_c$ along the study axis at each ROI-grid location:

$$\{\mathbf{Z}_{t,k}\}_{t=1}^T = \mathcal{E}_t^{\text{causal}}(\tilde{\mathbf{H}}_k; \mathbf{M}_c), \quad \mathbf{Z}_{t,k} \in \mathbb{R}^{N \times d}, \quad (6)$$

where $\mathcal{E}_t^{\text{causal}}$ denotes a stack of blocks $\mathcal{B}$ followed by a multi-layer perceptron. In the paired setting, current ROI tokens condition on their prior counterparts, whereas prior tokens cannot access current evidence [64], enabling anatomically matched temporal comparison.

3.2.1 Temporal Region–Phrase Alignment Pretraining

The temporal region encoder produces anatomically structured ROI tokens, but anatomical structure alone does not ensure that these tokens form clinically meaningful representations. We therefore introduce Temporal Region–Phrase Alignment pretraining (TRPA), which aligns temporally contextualized anatomical ROIs with localized report phrases before they are passed to the language model in Section 3.3. For each slot, we average-pool the current ROI grid as $\mathbf{z}_k = \text{AvgPool}(\mathbf{Z}_{T,k}) \in \mathbb{R}^d$, where T denotes the current (most recent) study. From the associated report, we extract clinically relevant phrase spans $\mathcal{P}_i$, including findings and devices with potential temporal-change expressions. Each phrase $p \in \mathcal{P}_i$ is encoded by a text encoder $\psi(\cdot)$ and projected non-linearly into the ROI feature space as:

$$\mathbf{e}'_p = g_{\text{text}}(\psi(p)) \in \mathbb{R}^d. \quad (7)$$

ROI-level spatio-temporal alignment. Radiology reports describe findings through phrases or statements that often point to specific anatomical regions. TRPA therefore aligns each phrase with its supporting anatomical ROI. For a candidate image–report pair (I, R) and phrase $p \in \mathcal{P}$, we compute its similarity to each anatomical slot k :

$$s_{p,k} = (\mathbf{e}'_p)^\top \mathbf{z}_k. \quad (8)$$

The phrase then induces a soft attention distribution over anatomical ROIs:

$$a_{p,k} = \frac{\exp(s_{p,k}/\tau_a)}{\sum_{k'=1}^K \exp(s_{p,k'}/\tau_a)}, \quad (9)$$

where τ_a controls the sharpness of phrase-to-region attention. Using these attention weights, we form a phrase-conditioned visual representation:

$$\mathbf{c}_p = \sum_{k=1}^K a_{p,k} \mathbf{z}_k. \quad (10)$$

The compatibility between phrase p and the image is measured by comparing the phrase representation with its attended visual context. We aggregate phrase-level compatibilities into an image–report similarity score:

$$S(I, R) = \tau_p \log \left(\frac{1}{|\mathcal{P}|} \sum_{p \in \mathcal{P}} \exp \left(\frac{\mathbf{c}_p^\top \mathbf{e}'_p}{\tau_p} \right) \right), \quad (11)$$

where τ_p controls the smoothness of phrase aggregation. For a minibatch of B matched image–report pairs, we apply this scoring function to all candidate pairs and denote the score between image i and report j as $S_{ij} = S(I_i, R_j)$. The ROI-level local contrastive objective is:

$$\mathcal{L}_{\text{roi}}^{\text{img} \rightarrow \text{text}} = -\frac{1}{B} \sum_{i=1}^B \log \frac{\exp(S_{ii}/\tau_{\text{loc}})}{\sum_{j=1}^B \exp(S_{ij}/\tau_{\text{loc}})}, \quad (12)$$

$$\mathcal{L}_{\text{roi}}^{\text{text} \rightarrow \text{img}} = -\frac{1}{B} \sum_{j=1}^B \log \frac{\exp(S_{jj}/\tau_{\text{loc}})}{\sum_{i=1}^B \exp(S_{ij}/\tau_{\text{loc}})}, \quad (13)$$

where τ_{loc} is the contrastive temperature. We define the symmetric GLoRIA-ROI objective as:

$$\mathcal{L}_{\text{GLoRIA-ROI}} = \frac{1}{2} \mathcal{L}_{\text{roi}}^{\text{img} \rightarrow \text{text}} + \frac{1}{2} \mathcal{L}_{\text{roi}}^{\text{text} \rightarrow \text{img}}. \quad (14)$$

Li et al. [42] construct anatomy-aware region–sentence positives from single-study boxes and parsed reports. In contrast to this single-study sentence-level supervision, and to patch-based global-local objectives such as GLoRIA [28] and BioViL-T [4], our alignment lets phrase evidence match temporally contextualized region semantics rather than single-study anatomical assignments or noisy dense patches, as supported by Table 7.

Phrase-composition targets. ROI-level contrastive alignment encourages phrase tokens to strictly attend to supporting regions, but radiology language is sparse and compositional, so related phrases can share overlapping anatomical evidence. Moreover, because $\mathcal{L}_{\text{GLoRIA-ROI}}$ is ultimately aggregated at the image–report level, it provides limited fine-grained region semantics. We therefore use phrase-composition targets that allow related clinical phrases to share evidence, rather than forcing each phrase to match a single region exclusively.

For each annotated image and anatomical slot k , we define a hard target distribution $q_k^{\text{hard}} \in \Delta^{|\mathcal{P}|}$ over the phrase set $\mathcal{P}$ using Chest Im-aGenome [6]. This distribution assigns probability mass to the phrases linked to slot k , while neglecting the rest.

However, this hard assignment treats all unannotated phrases as equally incorrect, even when some phrases are semantically close to the annotated ones and may describe similar visual evidence. We therefore relax the hard target by spreading a portion of its mass to related phrases, while keeping the original localized annotation as the primary supervision signal. To account for semantic similarity among phrases, we construct a phrase-level affinity matrix using the original frozen text embeddings:

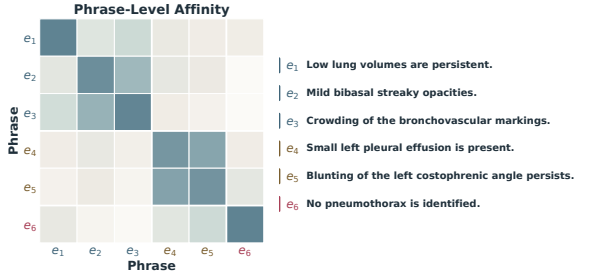


Figure 3: Phrase-level affinity computed via CXR-BERT [4] captures spatio-temporal semantic relationships between diverse region findings. Darker cells indicate higher pair similarity.

$$A_{p,p'} = \frac{\exp(\mathbf{e}_p^\top \mathbf{e}_{p'} / \tau_a)}{\sum_{\bar{p} \in \mathcal{P}} \exp(\mathbf{e}_p^\top \mathbf{e}_{\bar{p}} / \tau_a)}, \quad (15)$$

where $\mathbf{e}_p$ denotes the original frozen text embedding of phrase p , and τ_a controls the sharpness. Figure 3 demonstrates the potential of our phrase-level affinity setup.

The final softened target for slot k in image i is then defined as:

$$q_{i,k,p} = (1 - \alpha) q_{i,k,p}^{\text{hard}} + \alpha \sum_{a \in \mathcal{P}} q_{i,k,a}^{\text{hard}} A_{a,p}, \quad (16)$$

where $\alpha \in [0, 1]$ controls soft targets' importance. The first term retains the original hard target for phrase p , scaled by $(1 - \alpha)$. The second term accumulates mass from all phrases $a \in \mathcal{P}$, weighted by their semantic affinity $A_{a,p}$ to phrase p .

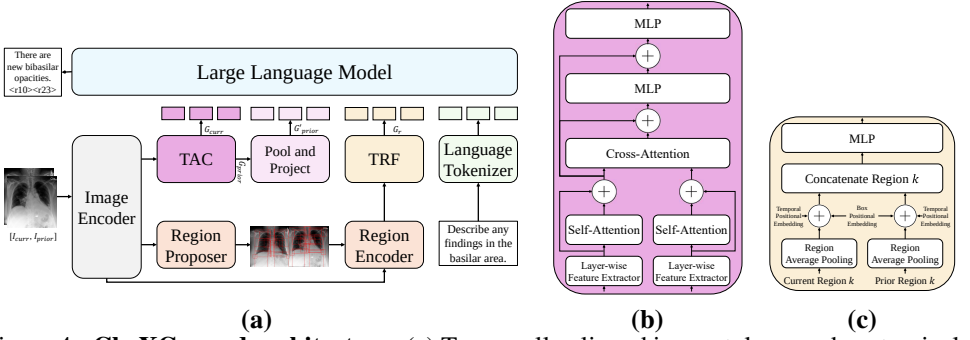


Figure 4: **CheXGround architecture.** (a) Temporally aligned image tokens and anatomical ROI tokens are injected into the language model. (b) The Temporal Alignment Connector (TAC), following Libra [14], aligns current–prior image features. (c) Temporal Region Fusion (TRF) fuses current–prior anatomical ROI representations.

The model predicts an ROI-to-phrase distribution by comparing the pooled anatomical representation for slot k in image i with each projected phrase embedding:

$$\hat{q}_{i,k,p} = \frac{\exp(\mathbf{z}_{i,k}^\top \mathbf{e}'_p / \tau_{\text{ph}})}{\sum_{p' \in \mathcal{P}} \exp(\mathbf{z}_{i,k}^\top \mathbf{e}'_{p'} / \tau_{\text{ph}})}. \quad (17)$$

For supervised phrase-composition alignment, we match the predicted ROI-to-phrase distribution $\hat{q}_{i,k}$ to the softened target $q_{i,k}$, where both denote distributions over $p \in \mathcal{P}$:

$$\mathcal{L}_{\text{comp}} = \frac{1}{|\Omega|} \sum_{(i,k) \in \Omega} D_{\text{KL}}(q_{i,k} \parallel \hat{q}_{i,k}), \quad (18)$$

where Ω is the set of all image–region pairs. This loss serves as a regularizer, encouraging ROI representations to remain consistent with both the localized annotations and their semantically related phrase variants. The overall TRPA objective is defined in Section 3.4.

3.3 CheXGround: Region-Grounded Longitudinal Language Modeling

After TRPA pretraining, the language model receives two visual streams. The global stream carries temporally aligned image tokens from the current and prior radiographs, while the ROI stream carries fixed anatomical tokens from the detector and TRPA region encoder. Together, these streams provide both holistic temporal context and localized region-level evidence (see Figure 4).

Global image-token stream. Let $\mathbf{F}_{\text{curr}}$ and $\mathbf{F}_{\text{prior}}$ denote the RAD-DINO hidden features extracted from all layers for I_{curr} and I_{prior} . We use a Temporal Alignment Connector (TAC), following Libra [14], to align paired studies. TAC provides an effective mechanism for temporally aligning paired visual features by conditioning one study on prior (see Figure 4(b)). However, in our longitudinal analysis setting, we found that a simple current-to-prior fusion operation is insufficient for modeling radiographic change (see ablations Table 8). A one-way current-to-prior cross-attention can underrepresent the prior because current features remain dominant through self-attention and residual paths. We therefore construct a dual-TAC

where current stream is conditioned on the prior, while the prior stream is self-conditioned through the same feature space.

$$\begin{aligned}\mathcal{G}_{\text{curr}} &= \text{TAC}(\mathbf{F}_{\text{curr}}, \mathbf{F}_{\text{prior}}), \\ \mathcal{G}_{\text{prior}} &= \text{TAC}(\mathbf{F}_{\text{prior}}, \mathbf{F}_{\text{prior}}).\end{aligned}\quad (19)$$

For single-study inputs, the temporal path resolves to $\text{TAC}(\mathbf{F}_{\text{curr}}, \mathbf{F}_{\text{curr}})$. We retain the full current token sequence, but compress the prior sequence $\mathcal{G}_{\text{prior}}$ to $\mathcal{G}'_{\text{prior}}$ by concatenating neighboring tokens and applying channel-wise downsampling to reduce compute overhead, following [11, 18].

Temporal Region Fusion (TRF). As illustrated in Figure 4(c), the ROI stream supplies localized evidence from the pretrained TRPA region encoder. For each study t , we average-pool the extracted and enhanced regional features as $r'_k = \text{AvgPool}(Z'_k)$. We again add learnable box-position embeddings and sinusoidal time embeddings to obtain $\mathbf{r}_k^{\text{curr}}$ and $\mathbf{r}_k^{\text{prior}}$ for the current and prior studies, respectively. The paired ROI token is

$$\mathbf{v}_k^{\text{roi}} = \mathbf{g}_{\text{roi}}(\mathbf{r}_k^{\text{curr}} \oplus \mathbf{r}_k^{\text{prior}}), \quad (20)$$

where $\oplus$ denotes channel-wise concatenation and $\mathbf{g}_{\text{roi}}$ is an MLP that maps the paired local evidence into the language-model embedding space. Missing current or prior regions use a learned missing-region embedding before concatenation, preserving a fixed slot layout.

Region-token interface. Each ROI embedding is paired with a discrete textual region identifier. For K anatomical slots, the region block is

$$\mathcal{G}_r = [\langle r_1 \rangle \langle \text{region} \rangle_1, \dots, \langle r_K \rangle \langle \text{region} \rangle_K], \quad (21)$$

where the embedding of $\langle \text{region} \rangle_k$ is replaced by $\mathbf{v}_k^{\text{roi}}$. Thus, generated identifiers such as $\langle r_7 \rangle$ refer to the corresponding anatomical evidence token. During training, we randomly shuffle anatomical slots in $\mathcal{G}_r$, which discourages reliance on a fixed order and encourages grounding through real semantic encoding.

Multi-modal input sequence. Given an instruction x , CheXGround forms

$$\mathbf{M} = [\text{Emb}(x), \langle \text{curr} \rangle, \mathcal{G}_{\text{curr}}, \mathcal{G}_r, \langle \text{previm} \rangle, \mathcal{G}'_{\text{prior}}]. \quad (22)$$

The timestep markers $\langle \text{curr} \rangle$ and $\langle \text{previm} \rangle$, help identify the two studies. We also aggregate the elapsed time between studies as natural-language context, such as “prior image taken 150 days and 9 hours ago.” The language model then generates the response autoregressively.

$$p_{\theta}(y \mid x, I_{\text{curr}}, I_{\text{prior}}) = \prod_{n=1}^N p_{\theta}(y_n \mid y_{<n}, \mathbf{M}). \quad (23)$$

3.4 Training

We follow a staged curriculum comprising anatomical detector pretraining, temporal region–phrase alignment, vision–language interface alignment, and instruction tuning.

Stage 0: anatomical detector pretraining. We first train an anatomy-aware detector from anatomical bounding box annotations. The detector follows a Deformable-DETR-style design [18], but replaces object queries with fixed anatomical queries assigned to predefined K anatomical regions. Since query identity specifies the target anatomy, no classification

Task	Source	Train	Val
Report generation	MIMIC-CXR [13, 14]	162,939	1,286
CXR VQA	MIMIC-CXR-VQA [8]	284,077	61,974
Difference VQA	Medical-Diff-VQA [15]	450,946	70,070
Grounded / Referring VQA	MIMIC-Ext-CXR-QBA [16],	1,172,925	69,594
	MIMIC-CXR-VQA [8]		
Grounded Temporal VQA	MIMIC-Ext-CXR-QBA [16]	129,280	1,034
Anatomical Grounding	RadVLM [17]	72,196	–
Total	–	2,272,363	203,958

Table 1: Composition of the CheXGround vision–language training data across diverse radiology vision–language tasks.

head is required. For each annotated image, anatomical query k is directly supervised by the corresponding ground-truth box $\mathbf{b}_{t,k}^*$:

$$\mathcal{L}_{\text{det}} = \lambda_1 \|\mathbf{b}_{t,k} - \mathbf{b}_{t,k}^*\|_1 + \lambda_{\text{giou}} \mathcal{L}_{\text{GIoU}}(\mathbf{b}_{t,k}, \mathbf{b}_{t,k}^*), \quad (24)$$

where GIoU denotes generalized intersection over union, $\|\cdot\|_1$ is L1 loss and λ_1 and λ_{giou} are weights. During this stage, the image backbone is frozen and only detector-specific modules are optimized.

Stage 1: temporal region–phrase alignment. With the anatomical detector and text encoder $\psi(\cdot)$ frozen, we train the spatial–temporal region encoder using the objectives in Section 3.2.1:

$$\mathcal{L}_{\text{TRPA}} = \lambda_{\text{roi}} \mathcal{L}_{\text{GLoRIA-ROI}} + \lambda_{\text{comp}} \mathcal{L}_{\text{comp}}, \quad (25)$$

where λ_{roi} and λ_{comp} are weighting coefficients.

Stage 2: vision–language interface alignment. We then attach the pretrained region encoder to the language model and train only the vision–language interface, including temporal image connectors, token projectors, and region embeddings, using masked autoregressive language modeling:

$$\mathcal{L}_{\text{LM}} = - \sum_{n=1}^N \log p_{\theta}(y_n | y_{<n}, \mathbf{M}). \quad (26)$$

Stage 3: instruction tuning. Finally, we adapt the language model itself for grounded VQA, localized progression reasoning, and longitudinal report generation using $\mathcal{L}_{\text{LM}}$.

4 Experiments

Overview. We evaluate CheXGround on four primary task families. Visual question answering (VQA), Grounded VQA, Longitudinal findings generation and Anatomy grounding. We also provide additional adaptations including abnormality grounding and temporal progression classification.

Implementation details. CheXGround uses RAD-DINO [18] as the radiology-tuned image encoder and a Meditron-7B language model initialized from the Libra multi-modal checkpoint [13, 17]. For TRPA, the CXR-BERT text encoder is initialized from BioViL-T [9] and kept frozen to leverage its longitudinal radiology pretraining. We use $K = 29$ anatomical regions following Chest ImaGenome [67]. Training is organized into four stages: anatomical detector pretraining, TRPA alignment, visual-language interface pretraining, and LoRA instruction tuning. These stages use learning rates of 2×10^{-4} , 2×10^{-4} , 3×10^{-5} , and 2×10^{-5} and effective batch sizes 48, 64, 24 and 32, respectively. All stages are trained on two

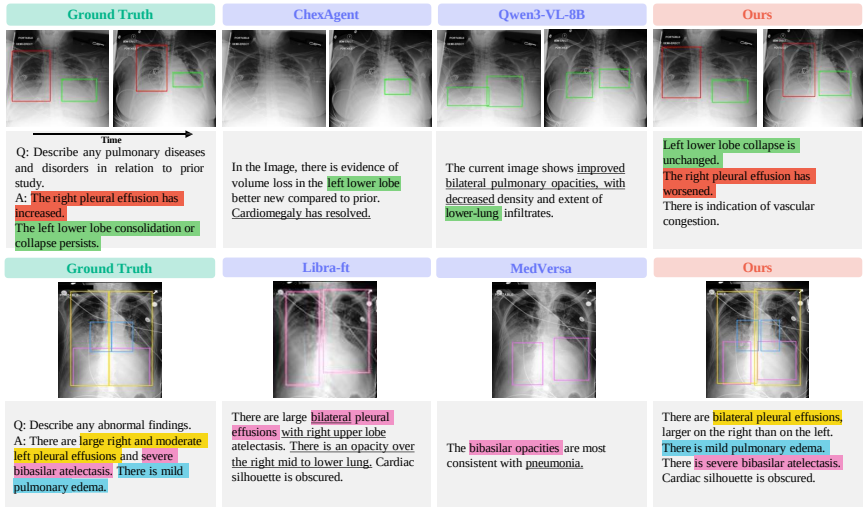


Figure 5: Qualitative comparison of single-image and temporal grounding. CheXGround shows more accurate anatomical localization and more faithful language than baselines, grounding findings in the correct regions while capturing longitudinal changes. Underlined text denotes inaccuracies.

Model	Params	Single-Study VQA					Longitudinal VQA				
		BLEU-4	ROUGE-L	METEOR	CheXbert-F1 _{micro/macro}		BLEU-4	ROUGE-L	METEOR	CheXbert-F1 _{micro/macro}	F1 _{temp}
MedGemma-1.5-4B	4B	0.1	1.7	4.8	25.5 / 13.5		8.4	3.8	8.5	23.1 / 15.5	43.7
Libra	7B	6.4	24.4	18.7	60.3 / 24.4		6.4	40.4	26.4	54.5 / 24.1	70.7
MedVersa	7B+	8.8	25.5	12.3	77.0 / 18.8		48.8	39.0	28.5	66.1 / 34.2	87.1
CheXagent	8B	34.1	61.3	38.6	83.1 / 54.8		5.6	48.2	27.5	53.6 / 20.3	74.0
CheXGround	7.4B	56.8	78.6	52.8	90.8 / 60.2		50.6	75.9	52.8	71.7 / 34.0	97.7

Table 2: Single-study and longitudinal visual question answering results.

NVIDIA A100 80GB GPUs using AdamW and cosine learning-rate scheduling. The image encoder remains frozen throughout training. During both the visual-language stages, the base language model is also frozen, and only the multi-modal projectors, temporal modules, added tokens, and LoRA adapters are optimized. All newly introduced modules and TAC are trained from scratch. The final instruction-tuning stage uses LoRA with rank $r = 64$, scaling factor $\alpha = 128$, and dropout 0.05.

Datasets and grounded data construction. Stage 0 trains the anatomical detector with Chest ImaGenome region annotations from MIMIC-CXR frontal radiographs [52, 53, 54]. Stage 1 keeps the same dataset and uses MIMIC-CXR metadata to form temporal pair augmentations [53]. Stages 2 and 3 use the diverse visual-language mixture in Table 1.

For grounded supervision, we extend MIMIC-CXR-VQA by interleaving answers with supporting anatomical annotations from the scene graph provided by the same dataset [9]. From CXR-QBA [50], we leverage the large-scale QA supervision with densely annotated answers making it especially useful for grounded and referring reasoning. Since CXR-QBA annotations follow a region schema that differs from Chest ImaGenome, we use only the samples that can be mapped to our 29-region scheme, which provides comprehensive anatomical coverage. Temporal grounded samples use CXR-QBA’s *change* findings when available from its scene graph, giving CheXGround access to large-scale longitudinal supervision with multi-granular and dense annotations. All train/validation/test splits are patient-

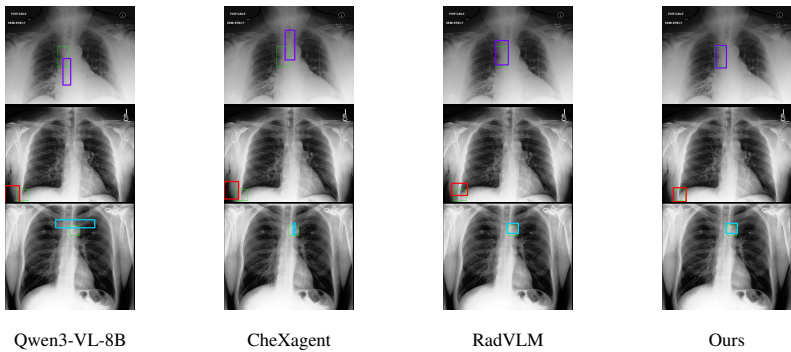


Figure 6: **Qualitative comparison on anatomy grounding.** Rows show anatomical regions: SVC, right costophrenic angle, and aortic arch, respectively. Dashed green boxes represent ground truth; zoom in for clarity.

disjoint, source splits are assigned before task construction and inherited across all training stages.

Evaluation protocol. Across generation tasks, we report BLEU, ROUGE-L [43], METEOR [6], RadGraph-F1 [22, 50], and CheXbert-F1_{micro/macro} over all 14 CheXpert labels [50]. Grounded VQA additionally reports mIoU and Recall@0.5, while anatomical grounding reports mIoU, Acc₅₀, and Acc₇₅, where Acc_τ is the percentage of predicted boxes with IoU at least τ. For longitudinal VQA, temporal grounded VQA, and longitudinal findings generation, we also report temporal F1 following Libra [21], evaluating lexical progression terminologies. All baselines are evaluated using the same test splits, preprocessing pipeline, and task-compatible prompts to ensure fair adaptation. For fair grounding evaluation, we further fine-tune MedGemma-1.5-4B [59] and Libra on the same grounded instruction data for two epochs, denoted MedGemma-1.5-4B-ft and Libra-ft, and evaluate them under the same setting as CheXGround.

Visual and grounded question answering. Tables 2, 3, and 4 evaluate single-study, longitudinal, and grounded VQA on MIMIC-CXR-VQA, Medical-Diff-VQA, and our held-out grounded splits [9, 27, 50]. CheXGround achieves the strongest overall VQA performance. High imbalance in lexical scores partly reflects the short-answer format: single/longitudinal answers average 1.80/5.86 tokens with medians 1/1, while canonical clinical strings can further increase overlap. Conversely, low BLEU can arise when answers use valid lexical variants that reduce exact n-gram overlap. We therefore complement lexi-

Model	BLEU-4	ROUGE-L	METEOR	CheXbert-F1 _{micro/macro}	RadGraph-F1	mIoU	Recall@0.5
Qwen3-VL-8B [9] [†]	2.1	15.1	21.5	42.9 / 28.3	20.7	11.2	20.6
MedGemma-1.5-4B	3.7	16.5	21.2	39.9 / 27.2	11.6	–	–
VividMed	3.5	21.1	19.1	21.0 / 26.8	7.4	–	–
MedVersa [†]	9.8	24.1	19.6	33.0 / 16.8	12.6	17.8	24.3
MAIRA-2	2.1	12.7	10.9	41.3 / 19.1	22.9	12.0	19.4
CheXagent	3.9	23.5	19.7	62.0 / 29.9	24.8	13.6	13.5
MedGemma-1.5-4B-ft	7.9	18.5	24.2	47.9 / 34.2	31.7	20.3	29.6
Libra-ft	10.2	25.1	20.1	55.0 / 35.8	33.2	29.8	32.3
CheXGround	13.2	30.1	25.8	64.6 / 44.3	50.9	36.6	41.8

Table 3: Grounded visual question answering on single-study images. [†] denotes models evaluated with few-shot prompting.

Model	ROUGE-L	METEOR	CheXbert-F1 _{micro/macro}	RadGraph-F1	F1 _{temp}	mIoU	Recall@0.5
Qwen3-VL-8B [†]	15.9	12.7	43.5/26.5	17.6	19.9	5.4	15.8
MedVista [†]	9.7	11.1	32.2/18.3	15.9	24.2	–	–
MedGemma-1.5-4B	10.8	20.3	44.5/32.2	19.4	20.1	–	–
MAIRA-2	11.3	12.1	48.2/34.3	16.8	36.2	–	–
CheXagent	17.6	16.7	48.1/36.3	21.3	32.1	–	–
MedGemma-1.5-4B-ft	21.4	13.4	42.5/25.2	22.7	33.1	35.6	39.2
Libra-ft	25.8	18.3	44.2/27.2	21.9	20.1	39.2	41.2
CheXGround	31.8	20.3	51.5/38.2	24.2	40.1	49.1	56.3

Table 4: Temporal grounded visual question answering results. [†] denotes models evaluated with few-shot prompting.

Model	BLEU-4	ROUGE-L	METEOR	CheXbert-F1 _{micro/macro}	RadGraph-F1	F1 _{temp}
HiRGem	7.8	19.8	9.0	41.2/27.2	19.7	14.2
CheXagent	12.8	23.6	29.0	51.2/31.4	27.8	23.3
MedGemma-1.5-4B	6.0	22.4	28.6	54.0/35.4	28.5	15.5
MAIRA-2	22.1	38.3	36.4	57.0/43.4	30.9	40.1
Libra	23.0	39.2	41.0	58.8/42.7	36.1	37.4
CheXGround	24.4	41.6	41.4	59.4/43.4	36.7	40.2
CheXGround-ft	27.4	43.6	42.4	61.4/46.4	37.7	40.9

Table 5: Longitudinal findings generation results.

cal scores with clinical/semantic metrics which demonstrate a much fairer comparison. For grounded VQA, CheXGround improves both answer quality and localization across single-study and temporal settings, including +9.9 mIoU and +15.1 Recall@0.5 over Libra-ft temporally. Because $F1_{temp}$ does not verify whether predicted changes are grounded in the correct anatomy, we additionally report region-tag $F1_{reg}$ and coupled $F1_{temp \times reg}$: CheXGround achieves 62.4/48.8 versus 43.7/37.7 for MedGemma-1.5-4B-ft and 46.8/28.1 for Libra-ft.

Longitudinal findings generation. Table 5

evaluates free-form longitudinal findings generation solely on paired studies curated from the MIMIC-CXR test set [62, 63]. Although report generation is not the primary focus of CheXGround, the general model remains competitive with dedicated findings-generation baselines and improves over Libra by +1.4 BLEU-4, +2.4 ROUGE-L, and +2.8 $F1_{temp}$. When tuned only for this task, CheXGround-ft further improves all metrics, reaching 43.57 ROUGE-L, 45.37 METEOR, 61.38/46.41 CheXbert-F1_{micro/macro}, 37.7 RadGraph-F1, and 40.85 $F1_{temp}$. Taken together, these results indicate that CheXGround’s temporal-grounded representation transfers to longitudinal findings generation. Unlike baselines optimized primarily for findings generation, our general model is trained across diverse tasks, which may introduce task-specific decoding noise in free-form reports.

Anatomical grounding. Table 6 evaluates anatomical localization using coordinate-style queries curated from Chest ImaGenome [64]. CheXGround achieves the best performance across all metrics, with 55.4 mIoU, 64.5 Acc₅₀, and 22.2 Acc₇₅.

Qualitative analysis. Figures 6 and 5 show that CheXGround better links localized evidence to clinically faithful language. It grounds single-image findings and queried anatomical structures more tightly, while temporal examples show evidence localized across current and prior studies with correct progression direction. Baselines often miss temporal changes or produce absent-response and overextended grounding errors, whereas CheXGround can annotate regions across time through its temporally grounded architecture.

Temporal Progression Classification and Abnormality grounding. We further evaluate transfer on MS-CXR-T [4] and abnormality-level grounding on VinDr-CXR-VQA and PadChest-GR [21, 65]. For MS-CXR-T, a disease query attends over the enhanced anatomical tokens for progression classification; fine-tuned TRPA improves macro-accuracy from 46.1 to 70.8, outperforming CoCa-CXR [42]. For abnormality grounding, a lightweight LoRA adapter is trained over the frozen CheXGround components with coordinate-token box prediction as in MAIRA-2 [8], improving mIoU from 25.5 to 35.5 and outperforming

Model	mIoU	Acc ₅₀	Acc ₇₅
MedGemma-1.5-4B	1.5	2.0	0.1
Qwen3-VL	6.5	4.0	0.6
CheXagent	18.9	17.0	9.3
RadVLM	49.7	53.1	10.5
CheXGround	55.4	64.5	22.2

Table 6: Performance on the anatomical grounding task

Variant	I→R	R→I	ROI→Phr.	Phr.→ROI
ROI + projector (Groma)	31.4	29.8	18.6	17.9
global InfoNCE	39.7	37.9	24.1	22.8
GLoRIA	41.2	39.4	31.5	30.2
TRPA w/o $\mathcal{E}^{\text{causal}}$	29.3	21.5	12.2	10.3
TRPA w/o $\mathcal{L}_{\text{comp}}$	45.9	44.1	39.6	38.2
TRPA w/o $\mathcal{L}_{\text{GLoRIA-ROI}}$	43.8	42.0	35.1	34.4
TRPA	49.6	47.8	46.3	44.9

Table 7: TRPA retrieval (R@1) ablation.

Setup	ROUGE-L	METEOR	CheXbert-F1	RadGraph-F1	Acc ₅₀	F1 _r
R	45.8	29.9	42.7	19.2	43.2	24.7
P+R (P-only)	49.0 ^[15.2]	30.0 ^[10.1]	44.2 ^[11.5]	23.9 ^[14.7]	45.1 ^[11.9]	27.8 ^[13.1]
N	53.2	35.8	58.7	25.8	56.2	41.5
S	56.5	40.2	59.9	30.0	56.1	49.3
D	58.3	42.6	61.8	30.5	57.5	53.2
R+N	64.4	42.2	65.3	31.4	59.9	45.0
P+R+N	70.2 ^[15.8]	46.7 ^[14.5]	68.9 ^[17.6]	36.2 ^[14.8]	60.3 ^[10.4]	51.1 ^[16.1]
R+A	64.5	43.5	66.0	32.8	61.0	53.9
R+S	61.8	40.5	63.1	30.1	59.6	41.9
P+R+S	67.8 ^[16.0]	46.9 ^[16.4]	67.4 ^[14.3]	35.6 ^[15.5]	64.1 ^[14.5]	42.9 ^[13.0]
R+D	69.1	48.2	68.1	37.5	61.0	63.0
P+R+D	75.9^[16.8]	52.6^[14.4]	71.7^[17.6]	41.2^[13.7]	64.5^[13.5]	69.4^[16.4]

Table 8: Ablations on the effect of TAC and TRPA, on CheXGround. ^[†] denotes gain of P (TRPA) over the respective baseline.

RadVLM and MedVersa [13, 14]. These experiments show that CheXGround’s anatomy-centered temporal representations transfer to progression classification and abnormality localization.

Ablation studies. Table 7 evaluates Recall@1 (R@1) TRPA using global image–report and ROI–phrase retrieval, with global scores computed from attention-pooled ROI representations. Direct ROI projection [48], global InfoNCE, and GLoRIA-style alignment improve retrieval to varying degrees, but lack explicit alignment to local anatomy. TRPA achieves the strongest local retrieval and downstream grounding by aligning fine-grained ROI tokens with clinical text, while removing temporal fusion $\mathcal{E}^{\text{causal}}$ tests the importance of modeling temporal relationships. Table 8 ablates temporal alignment and anatomical evidence. We denote direct global token passing as N [8], simple ROI projection as R [48], single-direction TAC as S [17], spatio-temporal average pooling as A [56], and our dual-TAC and TRPA pretraining as D and P. Matched TRPA contrasts (P+R+N/R+N, P+R+S/R+S, P+R+D/R+D) improve language, clinical, grounding, and temporal metrics. The grounding effect is clearest in Acc₅₀, where TRPA adds +4.5/+3.5 over R+S/R+D, while P+R+D adds only +0.4 over P+R+S once TRPA is fixed. Thus, dual-TAC remains the larger temporal driver, while TRPA explains most localization gain and their combination gives the strongest overall performance.

5 Conclusion

We introduced CheXGround, a region-grounded longitudinal chest X-ray language model that represents current and prior studies through corresponding anatomical regions. CheXGround combines global temporal image context with phrase-aligned temporal ROI tokens, enabling localized anatomical evidence to support language generation over paired studies. Through Temporal Region–Phrase Alignment pretraining, these region representations are aligned with localized clinical phrases across time. Across single-study VQA, longitudinal VQA, longitudinal findings generation, grounded VQA, temporal grounded VQA, and anatomical grounding, CheXGround consistently improves clinical language quality, temporal reasoning, and localization accuracy over recent baselines. These findings highlight anatomy-level temporal grounding as an effective framework for longitudinal radiology language modeling.

Acknowledgments

This research was funded by Khalifa University of Science and Technology through the Faculty Start-Ups under Project ID: KU-INT-FSU-2005-8474000775.

References

- [1] Gerald F. Abbott. The radiology report. In Melissa Rosado de Christensen, Sanjeev Bhalla, Gerald F. Abbott, and Santiago Martinez-Jimenez, editors, *Chest Imaging*, pages 20–22. Oxford University Press, July 2019. ISBN 9780199858064. doi: 10.1093/med/9780199858064.003.0004. URL <https://doi.org/10.1093/med/9780199858064.003.0004>.
- [2] Mohamad Alansari, Naufal Suryanto, Divya Velayudhan, Sajid Javed, Naoufel Werghi, and Muzammal Naseer. Sparrow: Learning spatial precision and temporal referential consistency in pixel-grounded video mllms, 2026. URL <https://arxiv.org/abs/2603.12382>.
- [3] Seongsu Bae, Daeun Kyung, Jaehee Ryu, Eunbyeol Cho, Gyubok Lee, Sunjun Kweon, Jungwoo Oh, Lei Ji, Eric Chang, Tackeun Kim, et al. Ehrxqa: A multi-modal question answering dataset for electronic health records with chest x-ray images. *Advances in Neural Information Processing Systems*, 36:3867–3880, 2023.
- [4] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025.
- [5] Zechen Bai, Tong He, Haiyang Mei, Pichao Wang, Ziteng Gao, Joya Chen, Lei Liu, Zheng Zhang, and Mike Z Shou. One token to seg them all: Language instructed reasoning segmentation in videos. *Advances in Neural Information Processing Systems*, 37:6833–6859, 2024.
- [6] Satanjeev Banerjee and Alon Lavie. METEOR: An automatic metric for MT evaluation with improved correlation with human judgments. In Jade Goldstein, Alon Lavie, Chin-Yew Lin, and Clare Voss, editors, *Proceedings of the ACL Workshop on Intrinsic and Extrinsic Evaluation Measures for Machine Translation and/or Summarization*, pages 65–72, Ann Arbor, Michigan, June 2005. Association for Computational Linguistics. URL <https://aclanthology.org/W05-0909/>.
- [7] Shruthi Bannur, Stephanie Hyland, Qianchu Liu, Fernando Perez-Garcia, Maximilian Ilse, Daniel C Castro, Benedikt Boecking, Harshita Sharma, Kenza Bouzid, Anja Thieme, et al. Learning to exploit temporal structure for biomedical vision-language processing. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 15016–15027, 2023.
- [8] Shruthi Bannur, Kenza Bouzid, Daniel C Castro, Anton Schwaighofer, Anja Thieme, Sam Bond-Taylor, Maximilian Ilse, Fernando Pérez-García, Valentina Salvatelli, Harshita Sharma, et al. Maira-2: Grounded radiology report generation. *arXiv preprint arXiv:2406.04449*, 2024.

- [9] Asma Ben Abacha, Sadid A Hasan, Vivek V Datla, Dina Demner-Fushman, and Henning Müller. Vqa-med: Overview of the medical visual question answering task at imageclef 2019. In *Proceedings of CLEF (Conference and Labs of the Evaluation Forum) 2019 Working Notes*. 9-12 September 2019, 2019.
- [10] Benedikt Boecking, Naoto Usuyama, Shruthi Bannur, Daniel C Castro, Anton Schwaighofer, Stephanie Hyland, Maria Wetscherek, Tristan Naumann, Aditya Nori, Javier Alvarez-Valle, et al. Making the most of text semantics to improve biomedical vision–language processing. In *European conference on computer vision*, pages 1–21. Springer, 2022.
- [11] Jun Chen, Deyao Zhu, Xiaoqian Shen, Xiang Li, Zechun Liu, Pengchuan Zhang, Raghuraman Krishnamoorthi, Vikas Chandra, Yunyang Xiong, and Mohamed Elhoseiny. Minigt-v2: large language model as a unified interface for vision-language multi-task learning. 2023. URL <https://arxiv.org/abs/2310.09478>.
- [12] Yixiong Chen, Shawn Xu, Andrew Sellergren, Yossi Matias, Avinatan Hassidim, Shravya Shetty, Daniel Golden, Alan Yuille, and Lin Yang. Coca-cxr: Contrastive captioners learn strong temporal structures for chest x-ray vision-language understanding, 2025. URL <https://arxiv.org/abs/2502.20509>.
- [13] Zeming Chen, Alejandro Hernández Cano, Angelika Romanou, Antoine Bonnet, Kyle Matoba, Francesco Salvi, Matteo Pagliardini, Simin Fan, Andreas Köpf, Amirkeivan Mohtashami, et al. Meditron-70b: Scaling medical pretraining for large language models. *arXiv preprint arXiv:2311.16079*, 2023.
- [14] Zhao-Min Chen, Xin Jin, Borui Zhao, Xiu-Shen Wei, and Yanwen Guo. Hierarchical context embedding for region-based object detection. In *European Conference on Computer Vision*, pages 633–648. Springer, 2020.
- [15] Zhihong Chen, Yan Song, Tsung-Hui Chang, and Xiang Wan. Generating radiology reports via memory-driven transformer. In *Proceedings of the 2020 conference on empirical methods in natural language processing (EMNLP)*, pages 1439–1449, 2020.
- [16] Zhihong Chen, Yaling Shen, Yan Song, and Xiang Wan. Cross-modal memory networks for radiology report generation. In *Proceedings of the 59th annual meeting of the association for computational linguistics and the 11th international joint conference on natural language processing (volume 1: long papers)*, pages 5904–5914, 2021.
- [17] Zhihong Chen, Maya Varma, Jean-Benoit Delbrouck, Magdalini Paschali, Louis Blankemeier, Dave Van Veen, Jeya Maria Jose Valanarasu, Alaa Youssef, Joseph Paul Cohen, Eduardo Pontes Reis, et al. Chexagent: Towards a foundation model for chest x-ray interpretation. In *AAAI 2024 Spring Symposium on Clinical Foundation Models*, 2024.
- [18] Yeongjae Cho, Taehee Kim, Heejun Shin, Sungzoon Cho, and Dongmyung Shin. Pre-training vision-language model for difference visual question answering in longitudinal chest x-rays. *arXiv preprint arXiv:2402.08966*, 2024.

- [19] Geon Choi, Hangyul Yoon, Hyunju Shin, Hyunki Park, Sang Hoon Seo, Eunho Yang, and Edward Choi. Instruction-guided lesion segmentation for chest x-rays with automatically generated large-scale dataset, 2026. URL <https://arxiv.org/abs/2511.15186>.
- [20] Francesco Dalla Serra, Chaoyang Wang, Fani Deligianni, Jeff Dalton, and Alison O’Neil. Controllable chest X-ray report generation from longitudinal representations. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 4891–4904, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.findings-emnlp.325. URL <https://aclanthology.org/2023.findings-emnlp.325/>.
- [21] Daniel Coelho de Castro, Aurelia Bustos, Shruthi Bannur, Stephanie L. Hyland, Kenza Bouzid, Maria Teodora Wetscherek, Maria Dolores Sánchez-Valverde, Lara Jaques-Pérez, Lourdes Pérez-Rodríguez, Kenji Takeda, José María Salinas-Serrano, Javier Alvarez-Valle, Joaquín Galant-Herrero, and Antonio Pertusa. Padchest-gr: A bilingual chest x-ray dataset for grounded radiology report generation. *NEJM AI*, 2(7), June 2025. ISSN 2836-9386. doi: 10.1056/aidbp2401120. URL <http://dx.doi.org/10.1056/AIdbp2401120>.
- [22] Jean-Benoit Delbrouck, Pierre Chambon, Zhihong Chen, Maya Varma, Andrew Johnston, Louis Blankemeier, Dave Van Veen, Tan Bui, Steven Truong, and Curtis Langlotz. RadGraph-XL: A large-scale expert-annotated dataset for entity and relation extraction from radiology reports. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Findings of the Association for Computational Linguistics ACL 2024*, pages 12902–12915, Bangkok, Thailand and virtual meeting, August 2024. Association for Computational Linguistics. URL <https://aclanthology.org/2024.findings-acl.765>.
- [23] Nicolas Deperrois, Hidetoshi Matsuo, Samuel Ruipérez-Campillo, Moritz Vandenhirtz, Sonia Laguna, Alain Ryser, Koji Fujimoto, Mizuho Nishio, Thomas M Sutter, Julia E Vogt, et al. Radvlm: a multitask conversational vision-language model for radiology. *arXiv preprint arXiv:2502.03333*, 2025.
- [24] Xiaotang Gai, Chenyi Zhou, Jiaxiang Liu, Yang Feng, Jian Wu, and Zuozhu Liu. Med-think: Explaining medical visual question answering via multimodal decision-making rationale. *arXiv preprint arXiv:2404.12372*, 2024.
- [25] Kaiming He, Georgia Gkioxari, Piotr Dollar, and Ross Girshick. Mask r-cnn. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, Oct 2017.
- [26] Xuehai He, Yichen Zhang, Luntian Mou, Eric Xing, and Pengtao Xie. Pathvqa: 30000+ questions for medical visual question answering. *arXiv preprint arXiv:2003.10286*, 2020.
- [27] Xinyue Hu, Lin Gu, Qiyuan An, Mengliang Zhang, Liangchen Liu, Kazuma Kobayashi, Tatsuya Harada, R Summers, and Yingying Zhu. Medicaldiff-vqa: a large-scale medical dataset for difference visual question answering on chest x-ray images. *PhysioNet*, 12:13, 2023.

- [28] Shih-Cheng Huang, Liyue Shen, Matthew P Lungren, and Serena Yeung. Gloria: A multimodal global-local representation learning framework for label-efficient medical image recognition. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 3942–3951, 2021.
- [29] Stephanie L Hyland, Shruthi Bannur, Kenza Bouzid, Daniel C Castro, Mercy Ranjit, Anton Schwaighofer, Fernando Pérez-García, Valentina Salvatelli, Shaury Srivastav, Anja Thieme, et al. Maira-1: A specialised large multimodal model for radiology report generation. *arXiv preprint arXiv:2311.13668*, 2023.
- [30] Saahil Jain, Ashwin Agrawal, Adriel Saporta, Steven QH Truong, Du Nguyen Duong, Tan Bui, Pierre Chambon, Yuhao Zhang, Matthew P Lungren, Andrew Y Ng, et al. Radgraph: Extracting clinical entities and relations from radiology reports. *arXiv preprint arXiv:2106.14463*, 2021.
- [31] Baoyu Jing, Pengtao Xie, and Eric Xing. On the automatic generation of medical imaging reports. In *Proceedings of the 56th annual meeting of the association for computational linguistics (volume 1: long papers)*, pages 2577–2586, 2018.
- [32] Alistair EW Johnson, Tom J Pollard, Seth J Berkowitz, Nathaniel R Greenbaum, Matthew P Lungren, Chih-ying Deng, Roger G Mark, and Steven Horng. Mimic-cxr, a de-identified publicly available database of chest radiographs with free-text reports. *Scientific data*, 6(1):317, 2019.
- [33] Alistair EW Johnson, Tom J Pollard, Nathaniel R Greenbaum, Matthew P Lungren, Chih-ying Deng, Yifan Peng, Zhiyong Lu, Roger G Mark, Seth J Berkowitz, and Steven Horng. Mimic-cxr-jpg, a large publicly available database of labeled chest radiographs. *arXiv preprint arXiv:1901.07042*, 2019.
- [34] Gaurang Karwande, Amarachi B Mbakwe, Joy T Wu, Leo A Celi, Mehdi Moradi, and Ismini Lourentzou. Chexrelnet: An anatomy-aware model for tracking longitudinal relationships between chest x-rays. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 581–591. Springer, 2022.
- [35] Jeffrey S. Klein and Melissa L. Rosado-de Christenson. *A Systematic Approach to Chest Radiographic Analysis*, pages 1–16. Springer International Publishing, Cham, 2019. ISBN 978-3-030-11149-6. doi: 10.1007/978-3-030-11149-6_1. URL https://doi.org/10.1007/978-3-030-11149-6_1.
- [36] Tomasz Kornuta, Deepta Rajan, Chaitanya Shivade, Alexis Asseman, and Ahmet S Ozcan. Leveraging medical visual question answering with supporting facts. *arXiv preprint arXiv:1905.12008*, 2019.
- [37] Xin Lai, Zhuotao Tian, Yukang Chen, Yanwei Li, Yuhui Yuan, Shu Liu, and Jiaya Jia. Lisa: Reasoning segmentation via large language model. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9579–9589, 2024.
- [38] Jason J Lau, Soumya Gayen, Asma Ben Abacha, and Dina Demner-Fushman. A dataset of clinically generated visual questions and answers about radiology images. *Scientific data*, 5(1):180251, 2018.

- [39] Christy Y. Li, Xiaodan Liang, Zhiting Hu, and Eric P. Xing. Knowledge-driven encode, retrieve, paraphrase for medical image report generation. volume 33, page 6666–6673, Jul. 2019. doi: 10.1609/aaai.v33i01.33016666. URL <https://ojs.aaai.org/index.php/AAAI/article/view/4637>.
- [40] Chunyuan Li, Cliff Wong, Sheng Zhang, Naoto Usuyama, Haotian Liu, Jianwei Yang, Tristan Naumann, Hoifung Poon, and Jianfeng Gao. Llava-med: Training a large language-and-vision assistant for biomedicine in one day. *Advances in Neural Information Processing Systems*, 36:28541–28564, 2023.
- [41] Pengfei Li, Gang Liu, Lin Tan, Jinying Liao, and Shenjun Zhong. Self-supervised vision-language pretraining for medial visual question answering. In *2023 IEEE 20th International Symposium on Biomedical Imaging (ISBI)*, pages 1–5. IEEE, 2023.
- [42] Qingqiu Li, Xiaohan Yan, Jilan Xu, Runtian Yuan, Yuejie Zhang, Rui Feng, Quanli Shen, Xiaobo Zhang, and Shujun Wang. Anatomical structure-guided medical vision-language pre-training. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 80–90. Springer, 2024.
- [43] Chin-Yew Lin. ROUGE: A package for automatic evaluation of summaries. In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain, July 2004. Association for Computational Linguistics. URL <https://aclanthology.org/W04-1013/>.
- [44] Bo Liu, Li-Ming Zhan, Li Xu, Lin Ma, Yan Yang, and Xiao-Ming Wu. Slake: A semantically-labeled knowledge-enhanced dataset for medical visual question answering. In *2021 IEEE 18th international symposium on biomedical imaging (ISBI)*, pages 1650–1654. IEEE, 2021.
- [45] Fenglin Liu, Xian Wu, Shen Ge, Wei Fan, and Yuexian Zou. Exploring and distilling posterior and prior knowledge for radiology report generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 13753–13762, 2021.
- [46] Zilin Lu, Yutong Xie, Qingjie Zeng, Mengkang Lu, Qi Wu, and Yong Xia. Spot the difference: Difference visual question answering with residual alignment. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 649–658. Springer, 2024.
- [47] Lingxiao Luo, Bingda Tang, Xuanzhong Chen, Rong Han, and Ting Chen. Vividmed: Vision language model with versatile visual grounding for medicine. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 1800–1821, 2025.
- [48] Chuofan Ma, Yi Jiang, Jiannan Wu, Zehuan Yuan, and Xiaojuan Qi. Groma: Localized visual tokenization for grounding multimodal large language models. In *European Conference on Computer Vision*, pages 417–435. Springer, 2024.
- [49] Philip Müller, Georgios Kaissis, Congyu Zou, and Daniel Rueckert. Joint learning of localized representations from medical images and reports. In *European conference on computer vision*, pages 685–701. Springer, 2022.

- [50] Philip Müller, Friederike Jungmann, Georgios Kaissis, and Daniel Rueckert. A structured, tagged, and localized visual question answering dataset with full sentence answers and scene graphs for chest x-ray images. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=LrmyW9JLYq>.
- [51] Shehan Munasinghe, Hanan Gani, Wenqi Zhu, Jiale Cao, Eric Xing, Fahad Shahbaz Khan, and Salman Khan. Videoglamm: A large multimodal model for pixel-level visual grounding in videos. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 19036–19046, 2025.
- [52] Philip Müller, Georgios Kaissis, and Daniel Rueckert. Chex: Interactive localization and region description in chest x-rays, 2024. URL <https://arxiv.org/abs/2404.15770>.
- [53] Dang H Nguyen, Hieu H Pham, and Hao T Nguyen. Vindr-cxr-vqa: A visual question answering dataset for explainable chest x-ray analysis with multi-task learning. *arXiv preprint arXiv:2511.00504*, 2025.
- [54] Jonggwon Park, Soobum Kim, Byungmu Yoon, Jihun Hyun, and Kyoyun Choi. M4cxr: exploring multitask potentials of multimodal large language models for chest x-ray interpretation. *IEEE Transactions on Neural Networks and Learning Systems*, 2025.
- [55] Fernando Pérez-García, Harshita Sharma, Sam Bond-Taylor, Kenza Bouzid, Valentina Salvatelli, Maximilian Ilse, Shruthi Bannur, Daniel C. Castro, Anton Schwaighofer, Matthew P. Lungren, Maria Teodora Wetscherek, Noel Codella, Stephanie L. Hyland, Javier Alvarez-Valle, and Ozan Oktay. Exploring scalable medical image encoders beyond text supervision. *Nature Machine Intelligence*, 7(1):119–130, 2025. ISSN 2522-5839. doi: 10.1038/s42256-024-00965-w. URL <https://doi.org/10.1038/s42256-024-00965-w>.
- [56] Jihao Qiu, Yuan Zhang, Xi Tang, Lingxi Xie, Tianren Ma, Pengyu Yan, David Doremann, Qixiang Ye, and Yunjie Tian. Artemis: Towards referential understanding in complex videos. *Advances in Neural Information Processing Systems*, 37:114321–114347, 2024.
- [57] Hanoona Rasheed, Muhammad Maaz, Sahal Shaji, Abdelrahman Shaker, Salman Khan, Hisham Cholakkal, Rao M Anwer, Eric Xing, Ming-Hsuan Yang, and Fahad S Khan. Glamm: Pixel grounding large multimodal model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13009–13018, 2024.
- [58] Syed A Rizvi, Ruixiang Tang, Xiaoqian Jiang, Xiaotian Ma, and Xia Hu. Local contrastive learning for medical image recognition. In *AMIA annual symposium proceedings*, volume 2023, page 1236, 2024.
- [59] Andrew Sellergren, Chufan Gao, Fereshteh Mahvar, Timo Kohlberger, Fayaz Jamil, Madeleine Traverse, Alberto Tono, Bashir Sadjad, Lin Yang, Charles Lau, et al. Medgemma 1.5 technical report. *arXiv preprint arXiv:2604.05081*, 2026.

- [60] Akshay Smit, Saahil Jain, Pranav Rajpurkar, Anuj Pareek, Andrew Y. Ng, and Matthew P. Lungren. Chexbert: Combining automatic labelers and expert annotations for accurate radiology report labeling using bert, 2020.
- [61] Shanshan Song, Hui Tang, Honglong Yang, and Xiaomeng Li. Ddatr: Dynamic difference-aware temporal residual network for longitudinal radiology report generation. *IEEE Transactions on Medical Imaging*, 2025.
- [62] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems*, volume 30, 2017.
- [63] Fuying Wang, Yuyin Zhou, Shujun Wang, Varut Vardhanabhuti, and Lequan Yu. Multi-granularity cross-modal alignment for generalized medical visual representation learning. *Advances in neural information processing systems*, 35:33536–33549, 2022.
- [64] Fuying Wang, Shenghui Du, and Lequan Yu. Hergen: Elevating radiology report generation with longitudinal data. In *European Conference on Computer Vision*, pages 183–200. Springer, 2024.
- [65] Jiankang Wang, Zhihan Zhang, Zhihang Liu, Yang Li, Jiannan Ge, Hongtao Xie, and Yongdong Zhang. Spacevlm: Endowing multimodal large language model with spatio-temporal video grounding capability. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 9912–9920, 2026.
- [66] Xiaosong Wang, Yifan Peng, Le Lu, Zhiyong Lu, and Ronald M Summers. Tienet: Text-image embedding network for common thorax disease classification and reporting in chest x-rays. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 9049–9058, 2018.
- [67] Joy T Wu, Nkechinyere N Agu, Ismini Lourentzou, Arjun Sharma, Joseph A Paguio, Jasper S Yao, Edward C Dee, William Mitchell, Satyananda Kashyap, Andrea Giovannini, et al. Chest imagenome dataset for clinical reasoning. *arXiv preprint arXiv:2108.00316*, 2021.
- [68] Zhuoyi Yang and Liyue Shen. Tempa-vlp: Temporal-aware vision-language pretraining for longitudinal exploration in chest x-ray image. In *2025 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 4625–4634. IEEE, 2025.
- [69] Chenlu Zhan, Peng Peng, Hongwei Wang, Gaoang Wang, Yu Lin, Tao Chen, and Hongsen Wang. Uniclaml: Contrastive representation learning with adversarial masking for unified and interpretable medical vision question answering. *Medical Image Analysis*, 101:103464, 2025.
- [70] Wenjun Zhang, Shekhar S Chandra, and Aaron Nicolson. Anatomical grounding pre-training for medical phrase grounding. In *2025 IEEE 22nd International Symposium on Biomedical Imaging (ISBI)*, pages 1–5. IEEE, 2025.
- [71] Xi Zhang, Zaiqiao Meng, Jake Lever, and Edmond SL Ho. Libra: Leveraging temporal images for biomedical radiology analysis. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 17275–17303, 2025.

-
- [72] Yuhao Zhang, Hang Jiang, Yasuhide Miura, Christopher D. Manning, and Curtis P. Langlotz. Contrastive learning of medical visual representations from paired images and text, 2022. URL <https://arxiv.org/abs/2010.00747>.
 - [73] Hong-Yu Zhou, Julián Nicolás Acosta, Subathra Adithan, Suvrankar Datta, Eric J Topol, and Pranav Rajpurkar. Medversa: a generalist foundation model for medical image interpretation. *arXiv preprint arXiv:2405.07988*, 2024.
 - [74] Qingqing Zhu, Tejas Sudharshan Mathai, Pritam Mukherjee, Yifan Peng, Ronald M Summers, and Zhiyong Lu. Utilizing longitudinal chest x-rays and reports to pre-fill radiology reports. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 189–198. Springer, 2023.
 - [75] Xizhou Zhu, Weijie Su, Lewei Lu, Bin Li, Xiaogang Wang, and Jifeng Dai. Deformable detr: Deformable transformers for end-to-end object detection. *arXiv preprint arXiv:2010.04159*, 2020.