

GeoComposer: Geometry-Grounded Photographic Composition Instruction

Shuangzhi Li^{1,2,†,*} Qiaoqiao Jia^{1,3,†,*} Xingxin Chen¹ Guile Wu¹ Dongfeng Bai¹

¹Huawei Noah's Ark Lab ²University of Alberta ³University of Waterloo

shuangzh@ualberta.ca christinajia0803@gmail.com xingxin.chen@huawei.com

guile.wu@outlook.com baidongfeng@huawei.com

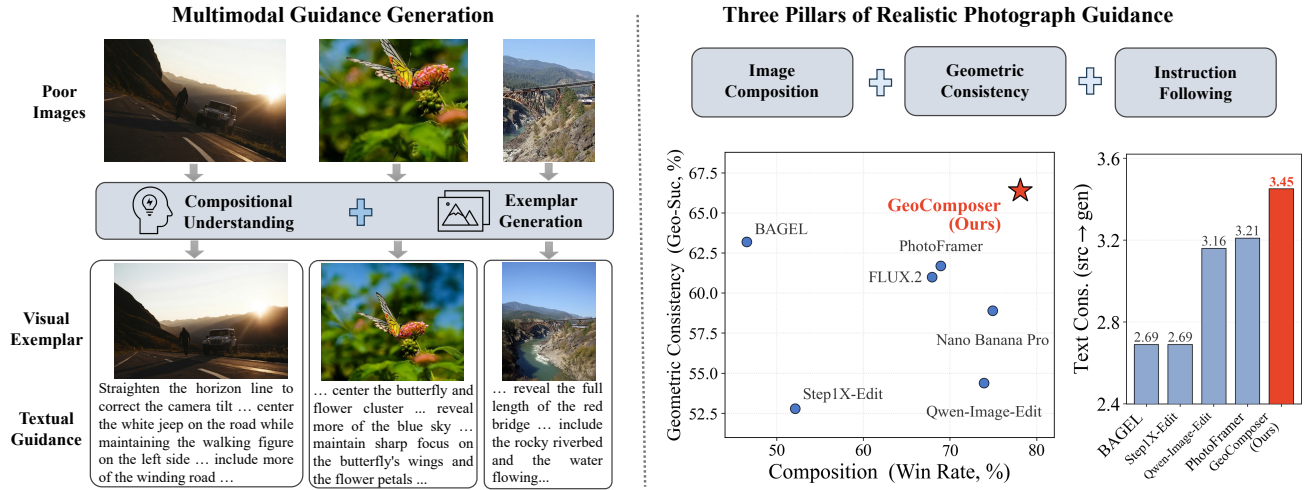


Figure 1. Given a poorly composed photograph, GeoComposer generates textual guidance together with a geometry-consistent visual exemplar as the composition improvement guidance. Consistent with textual guidance, the visual exemplar generated by GeoComposer achieves the best balance between composition quality and geometric consistency among existing methods.

Abstract

Photographic composition aims to provide visual guidance for improving the framing, viewpoint, and spatial arrangement of an image. Early methods primarily rely on image cropping to enhance composition, which is restricted to the viewpoint and spatial arrangement of the input image. Recent methods have explored image understanding and editing to improve composition, but they mainly focus on instruction following and aesthetic quality, overlooking the importance of 3D scene geometry consistency for photographic composition. In this work, we propose *GeoComposer*, a novel geometry-grounded photographic composition framework that analyzes the composition of a given image to generate textual guidance and synthesizes a visual exemplar that enhances the composition of the given image. To promote geometry-grounded composition, we

propose a geometry-aware representation learning mechanism that leverages geometric priors from a visual geometry foundation model to shape the intermediate representations of the composition editing model. This mechanism preserves both global structural relationships and local fine-grained correspondences for geometry-grounded composition. Furthermore, we propose a reinforcement learning strategy guided by a hybrid reward that jointly optimizes instruction following, aesthetic quality, and geometric consistency. This enables the model to generate visual exemplars that faithfully follow the composition instructions while remaining visually appealing and geometrically consistent. Extensive experiments show the superiority of our approach over state-of-the-art methods, highlighting its effectiveness in generating visually appealing and geometrically consistent composition. Project page: <https://geocomposer.github.io/>.

[†]Equal contribution.

^{*}This work was done during internships at Huawei Canada.

1. Introduction

Photographic composition plays a fundamental role in visual storytelling. It involves the careful arrangement of framing, viewpoint, and spatial relationships to enhance the aesthetic quality and narrative impact of an image. This has motivated the development of intelligent composition assistance methods [7, 12, 38, 41] that provide visual guidance, optionally accompanied by textual instructions, to improve photographic composition more intuitively and effectively. Such guidance is particularly valuable for casual photographers, who may lack expertise in framing and composition.

Early approaches to photographic composition primarily focus on image cropping [6, 10, 24], which select aesthetically pleasing regions from an input image to refine framing and subject placement. However, these methods are inherently restricted to the viewpoint and spatial arrangement of the input image, allowing only limited post-processing of its framing and spatial layout. Recent advances in image generation and editing [3, 11, 30, 33] have enabled more flexible instruction-following image manipulation. However, most of these methods primarily focus on semantic consistency and instruction fidelity, but remain less effective at following composition-specific instructions and often produce suboptimal compositional results. In addition, there have been some efforts to develop photographic composition guidance methods that analyze compositional deficiencies of input images and generate aesthetically-enhanced visual exemplars for better composition [5, 12, 38]. Although these methods have shown promising performance in generating visually appealing composition, they mostly overlook 3D scene geometry consistency in photographic composition, which is crucial for generating viewpoint variations and ensuring spatial coherence.

In this work, we propose GeoComposer, a novel geometry-grounded photographic composition framework that provides both textual guidance and visual exemplars to enhance the composition of input images. Specifically, GeoComposer employs a composition understanding model to analyze the compositional deficiencies of an input image and generate textual guidance that describes how to improve its composition. This textual guidance provides users with an interpretable explanation, while also serving as a prompt for a composition editing model to generate a visual exemplar of the suggested adjustment. However, guided solely by textual instructions, the composition editing model struggles to generate visually appealing and geometrically consistent compositions, as the instructions may not fully capture the underlying 3D scene geometry. To address this challenge, we propose a geometry-aware representation learning mechanism that shapes the intermediate representation of the composition editing model with geometry-aware tokens from a visual geometry foundation model [26, 28] via a global structural supervision and a lo-

cal correspondence supervision. This incorporates 3D geometric priors from a visual geometry foundation model into the composition editing model, enhancing its understanding of spatial relationships and viewpoint variations. Moreover, we introduce a reinforcement learning (RL) strategy that optimizes the composition editing model with a hybrid reward. In contrast to existing reward formulations that focus primarily on instruction-following and perceptual quality, our hybrid reward explicitly enforces geometric consistency during optimization while also considering instruction fidelity and aesthetic quality. As a result, our approach generates visual exemplars that are not only faithfully following the composition instructions but also visually appealing and geometrically consistent. We conduct extensive experiments to evaluate the effectiveness of the proposed GeoComposer framework, demonstrating its superiority over state-of-the-art methods in generating visually appealing and geometrically consistent composition. Our main **contributions** are:

- We propose a geometry-grounded photographic composition framework that comprehensively resolves the challenges of instruction-following, compositional quality, and geometric consistency in photographic composition.
- We introduce a geometry-aware representation learning mechanism that incorporates 3D geometric priors from a visual geometry foundation model into the composition editing model, enhancing its understanding of spatial relationships and viewpoint variations.
- We design a reinforcement learning strategy guided by a hybrid reward for optimizing the composition editing model, explicitly enforcing geometric consistency while also considering instruction fidelity and aesthetic quality.

2. Related Work

Photographic Composition. Photographic composition has progressed substantially over the years, evolving from conventional cropping-based methods to generative editing and multimodal composition methods. Specifically, conventional methods, such as [6, 10, 24, 40], approach photographic composition as an image cropping problem. This paradigm primarily improves composition by selecting aesthetically favorable subregions of the input image through content-aware, subject-aware, or aspect-ratio-aware cropping. Since these methods do not alter the underlying scene content or viewpoint, they are inherently restricted to the viewpoint and spatial arrangement of the input image, allowing only limited post-processing of its framing and spatial layout. With rapid advances in generative models, recent methods have moved beyond conventional cropping toward generative image editing and unified multimodal frameworks that jointly support composition understanding and generation [5, 36, 38]. Despite these advances, existing methods primarily focus on instruction following and

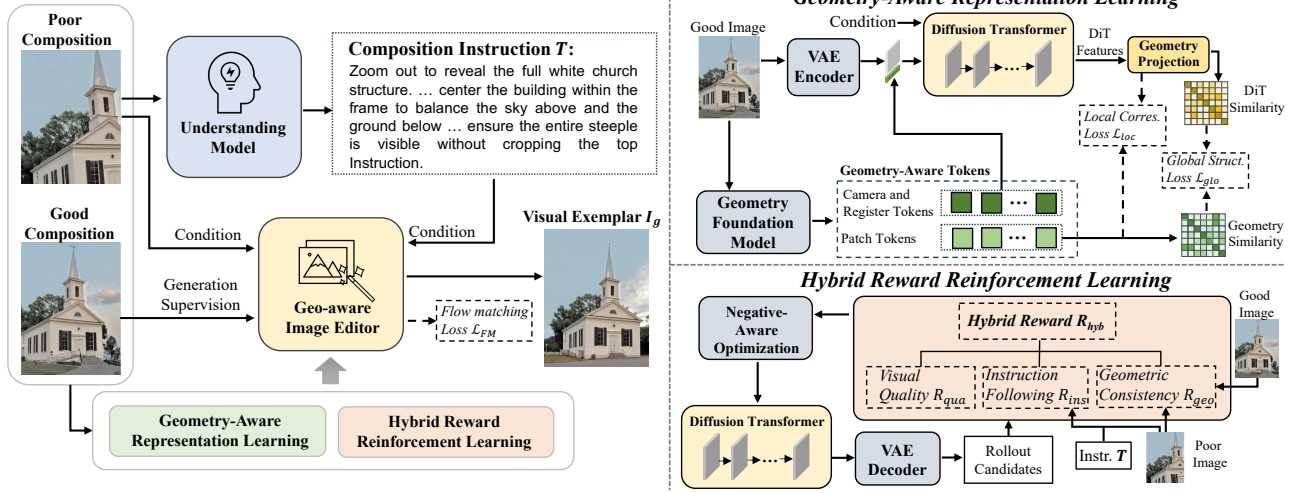


Figure 2. The overall framework of the proposed GeoComposer.

aesthetic quality, while paying limited attention to the geometric consistency of the edited scene. Consequently, they often struggle to preserve spatial consistency under substantial viewpoint or layout modifications. Our work addresses the limitations of existing methods by introducing a novel multimodal geometry-grounded photographic composition framework with comprehensive compositional understanding and generation capabilities. Our framework incorporates geometry-aware representation learning and reinforcement learning guided by a hybrid reward to ensure that the generated visual exemplars are not only aesthetically pleasing and instruction-following but also geometrically consistent with the underlying 3D scene structure.

Image Editing. The rapid development of diffusion models has significantly advanced image editing, enabling flexible and high-quality image manipulation. A typical image-editing paradigm employs a generative model, such as a diffusion model, to transform an input image into a desired output image conditioned on textual prompts or other control conditions [3, 11, 22, 30]. Existing methods have demonstrated strong instruction-following capabilities while maintaining semantic consistency with the input image. However, these methods are designed for general-purpose image editing and less effective for photographic composition, as they mainly optimize instruction-following and visual quality rather than compositional quality and geometric consistency. In contrast, our framework is specifically designed for photographic composition, integrating a composition understanding model to analyze compositional deficiencies and generate composition-aware guidance and a composition editing model to generate visual exemplars that are aesthetically pleasing, instruction-following, and geometrically consistent with the underlying

3D scene structure.

3. Methodology

3.1. The Overall Framework

Our work focuses on the task of multimodal photographic composition instruction that generates both textual guidance T and visual exemplars I^g to guide users in improving the composition of a given photograph. An overview of the proposed GeoComposer is depicted in Figure 2. The GeoComposer framework consists of two main components: *Composition Understanding* and *Visual Exemplar Generation*.

Composition Understanding. Given a poorly-composed image I^p , we employ a composition understanding model to analyze its compositional deficiencies and generate textual guidance T that describes how the composition can be improved. Rather than producing a vague verdict of image quality, T is required to be *actionable*: it specifies concrete framing adjustments together with brief justifications, so that T can directly condition the downstream editing model. Since generic Vision-Language Models (VLMs) are not tailored to photographic composition and tend to yield generic or non-executable descriptions, we fine-tune a VLM (e.g., Qwen3-VL [19]) on paired data of poorly-composed images and their corresponding improvement instructions. To make the guidance operation-aware, the model is conditioned on a task prompt T_{task} that indicates the intended type of adjustment (e.g., shifting, zooming, or viewpoint change), and is trained under a mixture of general task prompts so that it can handle both operator-specified intent and fully automatic composition improvement. Formally, the composi-

tion understanding is formulated as

$$T = f_{und}(I^p, T_{task}), \quad (1)$$

where f_{und} denotes the understanding model. The ground-truth guidance in our training data (please refer to the supplementary material for details) is grounded in real well- and poorly-composed image pairs, and describes the framing transformation that turns the poor composition I^p into its well-composed counterpart. Training on such grounded supervision drives the model to produce concrete, geometry-aware framing-operation guidance that corresponds to a realizable recomposition. The generated textual guidance serves a dual purpose: providing users with interpretable composition suggestions and prompting the composition editing model to generate a visual exemplar.

Visual Exemplar Generation. Next, we employ a diffusion-based composition editing model to generate a visual exemplar I^g that is compositionally improved according to the textual guidance. *During training*, the composition editing model takes T , I^p , and I^t as input to learn the compositional transformation from I^p to its corresponding well-composed I^t . Specifically, we first generate multimodal conditions by encoding T and I^p into semantic embeddings using a vision-language encoder [30] and also encoding I^p into a latent condition using a variational autoencoder (VAE). In addition, we encode I^t into a latent representation z_0 using the same VAE and add Gaussian noise $\epsilon \sim \mathcal{N}(0, I)$ to z_0 to obtain the noisy latent z_t at timestep t . Then, we train a Diffusion Transformer (DiT) to denoise z_t under the multimodal conditions, thereby learning the target compositional transformation. To capture the underlying 3D scene structure, we introduce *Geometry-Aware Representation Learning* to distill geometry-aware knowledge from a pretrained visual geometry foundation model [26] into the intermediate representations of the DiT through global structural supervision and local correspondence supervision. Moreover, we introduce *Hybrid Reward-Guided Reinforcement Learning* (RL) to further optimize the DiT with a hybrid reward that jointly evaluates instruction following, visual quality, and geometric consistency. *During inference*, the model only takes T and I^p as input to generate the composition-enhanced exemplar I^g . *The additional geometry foundation model, reinforcement learning, and the associated computational overhead are only required during training*, while the inference process follows the original diffusion pipeline.

3.2. Geometry-Aware Representation Learning

Motivation. Since the textual guidance generated by the composition understanding model may not fully capture the underlying 3D scene geometry, the composition editing model struggles to generate geometrically consistent compositions when guided solely by textual instructions.

We therefore propose to distill geometry-aware knowledge from a visual geometry foundation model [26, 28] into the intermediate representations of the DiT. Unlike existing representation alignment methods [23, 34, 39] that primarily focus on transferring semantic knowledge from vision foundation models, our approach aims to distill geometric knowledge from geometry foundation models to enhance geometry awareness for photographic composition through two complementary supervisions: 1) a *global structural supervision* that enforces the DiT to maintain the same global structural information as the geometry-aware representations; 2) a *local correspondence supervision* that encourages the DiT features to align with the geometry-aware representations at a local level.

Global Structural Supervision. Given a pair of images (I^p, I^t) , we employ a pre-trained visual geometry foundation model to extract geometry-aware representations F_{geo} for the target image I^t . F_{geo} consists of geometry-aware patch tokens F^{patch} , a camera token F^{cam} , and register tokens F^{reg} . Meanwhile, we feed the noisy latent z_t of I^t into the DiT to obtain intermediate features F^{DiT} . Then, we employ a projection head $P(\cdot)$ to project F^{DiT} into the latent space of the geometry foundation model, resulting in the projected DiT features $\hat{F}^{DiT}$. Instead of directly aligning the features using L2 loss like [39], we calculate the relational similarity among F^{patch} to capture the global structural information of the scene and enforce $\hat{F}^{DiT}$ to maintain the same global structural information. Specifically, we compute pairwise cosine similarity matrices S_{geo} and S_{DiT} over the normalized features as follows:

$$S_{geo} = F^{patch}(F^{patch})^\top, \quad S_{DiT} = \hat{F}^{DiT}(\hat{F}^{DiT})^\top, \quad (2)$$

where F^{patch} and $\hat{F}^{DiT}$ are normalized before computing S_{geo} and S_{DiT} . We minimize the mean squared error between S_{geo} and S_{DiT} to enforce global structural consistency as:

$$\mathcal{L}_{glo} = \frac{1}{N^2} \|S_{DiT} - S_{geo}\|^2, \quad (3)$$

where N is the number of patch tokens. In addition, since F^{cam} and F^{reg} provided by the geometry foundation model also encode global scene-level geometric priors, we can further incorporate them into the DiT features to enhance the global structural supervision. To achieve this, we concatenate F^{cam} and F^{reg} with z_0 before adding noise, and feed the concatenated features into the DiT. These special tokens provide additional global geometric context to the DiT, enabling it to better capture the underlying 3D scene structure and improve its geometry awareness. During inference, we use Gaussian noise to replace these special tokens, allowing the DiT to generate compositionally improved images without requiring a geometry foundation model.

Local Correspondence Supervision. Although the global structural supervision facilitates global geometric consistency,

tency, it does not explicitly enforce local feature correspondence between the DiT features and the geometry-aware representations. We thus introduce local correspondence supervision to encourage the DiT features to align with the geometry-aware representations at a local level. Specifically, we measure the cosine similarity $S_{\cos}$ between $\hat{F}^{\text{DiT}}$ and F^{patch} , and calculate the local correspondence loss $\mathcal{L}_{\text{loc}}$ as:

$$\mathcal{L}_{\text{loc}} = 1 - S_{\cos}(\hat{F}^{\text{DiT}}, F^{\text{patch}}). \quad (4)$$

Overall Training Objective. For the DiT-based composition editing model, we employ the flow matching objective $\mathcal{L}_{\text{FM}}$ [14] and further augment it with the proposed geometry-aware supervision $\mathcal{L}_{\text{glo}}$ and $\mathcal{L}_{\text{loc}}$. The overall training objective is defined as:

$$\mathcal{L}_{\text{geo}} = \mathcal{L}_{\text{FM}} + \lambda_{\text{glo}}\mathcal{L}_{\text{glo}} + \lambda_{\text{loc}}\mathcal{L}_{\text{loc}}, \quad (5)$$

where the weighting coefficients λ_{glo} and λ_{loc} balance the contributions of the global and local geometry supervision relative to the flow matching objective.

3.3. Hybrid Reward-Guided Reinforcement Learning

Motivation. Although *Geometry-Aware Representation Learning* distills 3D geometric priors into the DiT, its diffusion objective remains a denoising trajectory that regresses toward the ground-truth reference. However, photographic composition is inherently multi-solution. That is, for a poorly-composed image, there may exist many potential reframings. Thus, supervising the model to reproduce one particular target both suppresses this diversity and caps the attainable quality at that of the reference. Moreover, the training objective $\mathcal{L}_{\text{geo}}$ cannot jointly enforce instruction-following, aesthetic quality, and geometric consistency, as it only provides a reconstruction-based supervision that encourages the model to reproduce the reference image. We therefore further optimize the composition editing model through *Hybrid Reward-Guided Reinforcement Learning*, which replaces single-target regression with reward objectives evaluated directly on generated images. This lets the RL policy explore the space of valid compositions *beyond ground truth*, producing edits that are simultaneously instruction-aligned, visually realistic, and geometrically coherent.

Rollout Generation. Given a poorly-composed image and the corresponding editing instruction, we first generate K composition candidates $\mathcal{V} = \{I_1^c, I_2^c, \dots, I_K^c\}$ for each input by performing rollout sampling from the current diffusion policy [42]. Compared to using a single generated sample, the rollout strategy enables the model to explore diverse composition solutions and provides richer supervision for policy optimization.

Hybrid Reward. Existing RL approaches for image editing typically rely on an editing reward that evaluates instruction

following and semantic quality. However, for photographic composition, a comprehensive evaluation should consider not only instruction fidelity, but also aesthetic quality and geometric consistency. In light of this, we introduce a hybrid reward R_{hyb} that encourages the diffusion policy to generate edits that are instruction-following, visually appealing, and geometrically consistent:

$$R_{\text{hyb}} = \lambda_{\text{ins}}R_{\text{ins}} + \lambda_{\text{qua}}R_{\text{qua}} + \lambda_{\text{geo}}R_{\text{geo}}, \quad (6)$$

where R_{ins} , R_{qua} , and R_{geo} denote the instruction-following, aesthetic-quality, and geometry-consistency rewards, respectively, while λ_{ins} , λ_{qua} , and λ_{geo} are weighting coefficients that balance their respective contributions.

Specifically, for R_{ins} , we use a VLM to jointly process the input image, the generated image, and the textual instruction to estimate the degree of editing success while penalizing unnecessary modifications to the original content:

$$R_{\text{ins}} = f_{\text{vlm}}(I^p, I^c, T), \quad (7)$$

where f_{vlm} is a VLM that outputs an instruction-following score. For R_{qua} , we employ a VLM to evaluate the generated image in terms of naturalness and aesthetic quality as:

$$R_{\text{qua}} = f_{\text{vlm}}(I^c, T^p), \quad (8)$$

where f_{vlm} is a VLM that outputs a quality score, and T^p is a prompt that instructs the VLM to assess the quality of the generated image. Although these two rewards encourage semantically correct and visually appealing outputs, they do not enforce geometric plausibility. Consequently, the results may favor improvements that increase the editing score at the expense of 3D scene consistency. To resolve this problem, we introduce a geometry-aware scene-consistency reward R_{geo} derived from a visual geometry foundation model. We use a geometry foundation model to extract patch representations together with intermediate attention features. Then, we compute patch-level geometric relevance using two complementary cues [9], including (1) attention relevance derived from global attention patterns of the model and (2) geometry-aware feature similarity between patch representations. The resulting patch-level relevance values are aggregated using generalized mean (GeM) pooling [20] to obtain image-level attention and feature relevance scores. Specifically, let $S^{x \rightarrow y}$ denote the directed geometry relevance score from image I^x to image I^y . Each image I^x has its patch tokens F_x along with query features Q_x and key features K_x probed from the attention layer. The attention relevance sums, for each source patch, the softmax attention mass it assigns to patches F_y :

$$S_{\text{attn}}^{x \rightarrow y} = \text{GeM}_p \left(\sum_{i \in F_y} \text{softmax} \left(\frac{Q_x^\top K_y}{\sqrt{d}} \right) \right), \quad (9)$$

where d is the head dimension and the softmax is normalized over all tokens. The feature similarity takes, for each source patch, its maximum cosine match in F_y :

$$S_{\text{feat}}^{x \rightarrow y} = \text{GeM}_p \left(\phi \left(\frac{F_x^\top F_y}{\|F_x\| \|F_y\|} \right) \right), \quad (10)$$

where $\phi(\cdot)$ denotes the log-sum-exp for obtaining a soft maximum. The two complementary measures are combined as:

$$S^{x \rightarrow y} = \lambda_{\text{attn}} S_{\text{attn}}^{x \rightarrow y} + \lambda_{\text{feat}} S_{\text{feat}}^{x \rightarrow y}, \quad (11)$$

where λ_{attn} and λ_{feat} control relative contributions of two measures. To obtain a symmetric geometry consistency measure, we average the bidirectional relevance scores between the generated image and both the source and target images,

$$R_{\text{src}} = \frac{S^{p \rightarrow c} + S^{c \rightarrow p}}{2}, \quad R_{\text{tgt}} = \frac{S^{t \rightarrow c} + S^{c \rightarrow t}}{2}, \quad (12)$$

where $S^{p \rightarrow c}$ and $S^{c \rightarrow p}$ denote the directed relevance scores between the source and generated images, while $S^{t \rightarrow c}$ and $S^{c \rightarrow t}$ denote the directed relevance scores between the target and generated images. R_{src} encourages the generated image to preserve the geometric structure of the source image, whereas R_{tgt} encourages geometric alignment with the desired composition represented by the target image. Finally, the geometry-aware reward is computed as:

$$R_{\text{geo}} = w_s R_{\text{src}} + w_t R_{\text{tgt}}, \quad (13)$$

where w_s and w_t control the relative importance of source preservation and target alignment, respectively. The geometry reward penalizes outputs that achieve high editing scores through spatially inconsistent changes, solving reward hacking and encouraging generated images that are instruction-aligned, visually realistic, and geometrically coherent.

Negative-Aware Optimization. Following Diffusion-NFT [42], we compute a group-relative advantage for each candidate by normalizing its hybrid reward against the statistics of the K rollouts generated for the same input. The normalized advantage weights a continuous interpolation between a positive and a negative velocity target for each candidate: candidates scoring above the group average are drawn toward the positive target, while those scoring below it are pushed toward a negative target constructed by mirroring the current velocity prediction about that of the reference policy. Within the flow matching framework, these mirrored targets provide counterfactual supervision that penalizes low-reward candidates, whether geometrically inconsistent or otherwise inferior, guiding the diffusion policy toward instruction-aligned, visually realistic, and geometrically consistent image generation.

4. Experiments

4.1. Experimental Setup

Datasets. Following the data construction in PhotoFramer [38], we build the dataset on top of public datasets, i.e., CPC [29], GAIC [40], FLMS [6], CUHK-ICD [35], and Unsplash [25], from which composition pairs and their text guidance are derived. We train and validate GeoComposer on the constructed dataset of 34,129 ⟨poor, good, text-guidance⟩ triplets, with the full construction pipeline detailed in the supplementary material. The dataset is split at the source-image level into 33,229 training and 900 validation triplets. To further assess generalization beyond the constructed dataset, we additionally evaluate on a held-out benchmark, DL3DV [13], which is disjoint from the training data.

Evaluation Metrics. We evaluate along four automatic axes together with a human study.¹ For *composition*, Comp. WinRate is the pairwise win rate of the edited image against the source, and PF-ass is the single-image PhotoFramer composition score [38]. For *image quality*, QAlign [31] and DeQA [37] measure no-reference aesthetic and general image quality. For *geometric consistency*, MET3R [1] measures multi-view 3D consistency (lower is better), and Geo-Suc, an LLM-judge metric, measures whether the edit realizes the correct viewpoint change rather than merely altering the image. For *text-guidance accuracy*, Text Cons. (src→gen) and (src→GT) score how faithfully the reasoning text describes the method’s own edit and the human reframing [38]. The human study reports the fraction of edits judged both geometrically valid and better composed than the source. Unless noted, all LLM-judge metrics use GPT-5.4 as the judge.

Baselines. We compare with the general-purpose editors BAGEL [4], Step1X-Edit [15], Qwen-Image-Edit [30], and FLUX.2 [2], the proprietary Nano Banana Pro (Gemini 3 Pro Image) [8], and the composition-specific PhotoFramer [38].

4.2. Comparison with State-of-the-Art Methods

Table 1 reports the quantitative comparison on the constructed validation set. GeoComposer achieves the best performance on seven of the eight metrics and remains highly competitive on the remaining one. For composition, our method attains a win rate of 78.1%, together with the best PF-ass score. For image quality, our method achieves the best QAlign score and a DeQA score on par with the best Nano Banana Pro. For geometric consistency, our method achieves the best MET3R and the best Geo-Suc, indicating that GeoComposer performs the intended photographic changes while preserving the underlying 3D scene struc-

¹Detailed metric protocols, per-baseline descriptions, and full implementation details are provided in the supplementary material.

Method	Composition		Image Quality		Geo. Consistency		Text Guidance		Human
	WinRate (%) $\uparrow$	PF-ass $\uparrow$	QAlign $\uparrow$	DeQA $\uparrow$	Geo-Suc (%) $\uparrow$	MET3R $\downarrow$	src $\rightarrow$ gen $\uparrow$	src $\rightarrow$ GT $\uparrow$	Overall $\uparrow$
BAGEL	46.5	2.588	2.823	3.598	<u>63.2</u>	0.246	2.69	2.57	43.3
Step1X-Edit	52.1	2.704	2.870	3.496	52.8	0.231	2.69	2.30	–
Qwen-Image-Edit	73.9	2.987	3.272	3.869	54.4	0.257	3.16	2.60	59.4
FLUX.2	67.9	2.948	3.133	3.820	61.0	0.233	–	–	40.6
PhotoFramer	68.9	2.957	3.043	3.812	61.7	0.231	<u>3.21</u>	<u>2.69</u>	63.3
Nano Banana Pro	<u>74.9</u>	<u>3.081</u>	<u>3.323</u>	4.041	58.9	<u>0.191</u>	–	–	<u>63.9</u>
GeoComposer (Ours)	78.1	3.133	3.381	<u>4.012</u>	66.4	0.184	3.45	3.28	85.6

Table 1. Quantitative comparison with state-of-the-art methods on the constructed validation set. The best and second-best results are marked in **bold** and underline, respectively. “–” denotes unavailable results, i.e., pure image generators emit no reasoning text for text-guidance evaluation, and Step1X-Edit has no human-study result.

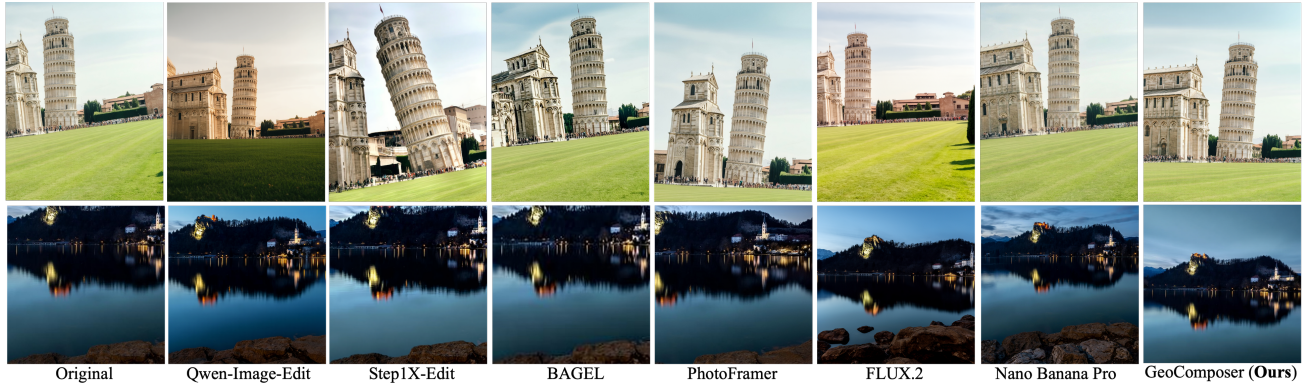


Figure 3. Qualitative comparison with state-of-the-art methods.

ture. Notably, competitive baselines exhibit a clear trade-off between the two geometry metrics: BAGEL attains a relatively high Geo-Suc but a near-50% win rate, suggesting conservative edits, whereas Nano Banana Pro edits more aggressively at the cost of geometric correctness. In contrast, GeoComposer is the only method that ranks first on both composition and geometric consistency, demonstrating that our geometry-grounded design improves composition without sacrificing spatial coherence. For text-guidance accuracy, our method produces the most faithful and correct textual guidance, outperforming PhotoFramer on both Text Cons. (src $\rightarrow$ gen) and Text Cons. (src $\rightarrow$ GT). The human study further corroborates these results, where GeoComposer is judged an overall improvement over the source in 85.6% of cases, far exceeding the strongest baseline at 63.9%. As shown in Fig. 3, GeoComposer also produces the most visually appealing and geometrically consistent composition among all methods. GeoComposer further generalizes to the held-out DL3DV benchmark, achieving the best geometric consistency, as detailed in the supplementary material.

4.3. Ablation Studies

Effectiveness of Each Component. Table 2 presents the ablation of the three key components of GeoComposer, i.e., the composition understanding model, geometry-aware representation learning (Stage I), and hybrid reward-guided reinforcement learning (Stage II), on top of the Qwen-Image-Edit backbone. Introducing the composition understanding model improves composition and image quality, as the generated guidance drives more substantial compositional edits, but this comes at the cost of degraded geometric consistency. Adding geometry-aware representation learning substantially restores geometric consistency while maintaining comparable quality, validating the effectiveness of distilling 3D geometric priors into the DiT. Hybrid reward-guided reinforcement learning further improves all four metrics simultaneously, confirming that image-level reward optimization complements representation-level geometry distillation.

Composition Understanding Model. Table 3 compares different composition understanding models for generating textual guidance, with the composition editing model kept identical. Our fine-tuned understanding model outperforms both the zero-shot Qwen3-VL and the guidance produced

Und.	Stage I	Stage II	QAlign↑	DeQA↑	MET3R↓	PF-ass↑
			3.272	3.869	0.257	2.987
✓			3.316	3.925	0.275	3.050
✓	✓		3.282	3.934	0.222	3.043
✓	✓	✓	3.381	4.012	0.184	3.133

Table 2. Ablation study of components of GeoComposer. “Und.” is the composition understanding model, “Stage I” denotes geometry-aware representation learning, and “Stage II” denotes hybrid reward-guided reinforcement learning.

Model	QAlign↑	DeQA↑	MET3R↓	PF-ass↑
Qwen3-VL	3.370	3.992	0.201	3.096
PhotoFramer	3.375	3.938	0.191	3.051
Ours	3.381	4.012	0.184	3.133

Table 3. Ablation study of composition understanding model.

by PhotoFramer, demonstrating that composition-specific fine-tuning yields more accurate and actionable guidance that translates into better editing results.

Geometry-Aware Representation Learning. Table 4 ablates the supervision design in Stage I, evaluated without Stage II to isolate its effect. Replacing the conventional point-wise L2 supervision with our cosine-based local correspondence supervision improves geometric consistency, and further adding global structural supervision yields the best MET3R (0.222). These results validate the effectiveness of both local correspondence and global structural supervision.

Hybrid Reward. Table 5 ablates each component of the hybrid reward by removing one reward at a time. Removing the geometry reward yields slightly higher aesthetic scores (QAlign) but causes a severe collapse of geometric consistency, which is a direct manifestation of reward hacking where the policy inflates the editing score through spatially inconsistent modifications. Conversely, removing the instruction reward attains a marginally lower MET3R, but this stems from under-editing rather than genuine geometric fidelity since the composition and image quality degrade. Removing the quality reward degrades both DeQA and MET3R. The full hybrid reward achieves the best overall balance.

5. Conclusion

In this work, we present a geometry-grounded framework named GeoComposer for multimodal photographic composition. GeoComposer produces textual guidance from a composition understanding model and generates visual exemplars from a composition editing model with geometry-aware representation learning and hybrid reward-guided reinforcement learning. Extensive experiments demonstrate

Supervision	QAlign↑	DeQA↑	MET3R↓	PF-ass↑
L2	<u>3.260</u>	3.890	0.249	3.011
Local	3.250	<u>3.900</u>	<u>0.240</u>	<u>3.020</u>
Loc.+Glob.	3.282	3.934	0.222	3.043

Table 4. Ablation study of the supervision design in geometry-aware representation learning, evaluated after Stage I. “Loc.+Glob.” denotes local correspondence combined with global structural supervision.

Reward	QAlign↑	DeQA↑	MET3R↓	PF-ass↑
Full (Ours)	<u>3.381</u>	4.012	<u>0.184</u>	3.133
– Instruction	3.249	3.626	0.182	3.012
– Quality	3.375	3.931	0.197	<u>3.127</u>
– Geometry	3.405	<u>3.957</u>	0.303	3.014

Table 5. Ablation study of the hybrid reward, where each row removes one reward component from the full hybrid reward.

that our approach outperforms state-of-the-art methods in generating visually appealing and geometrically consistent compositions.

6. Limitation and Future Work

Despite achieving compelling performance, our method still has some limitations. First, our approach operates on a single input image to generate textual guidance and a visual exemplar. However, a single view may provide incomplete scene context and fail to capture the full spatial structure of the environment. Extending the framework to support multiple input views is a promising direction for future work. In addition, photographic composition is a relatively subjective process, and multiple aesthetically pleasing compositions may exist for the same scene. By generating only a single visual exemplar, our framework may not fully capture the diversity of individual preferences. Future work could explore incorporating user-specific preferences to provide more diverse and personalized composition guidance.

References

- [1] Mohammad Asim, Christopher Wewer, Thomas Wimmer, Bernt Schiele, and Jan Eric Lenssen. Met3r: Measuring multi-view consistency in generated images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025. 6, 12
- [2] Black Forest Labs. Flux.2: Frontier visual intelligence. <https://bfl.ai/blog/flux-2>, 2025. 6, 12
- [3] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF conference on computer vi-*

- sion and pattern recognition, pages 18392–18402, 2023. 2, 3
- [4] Chaorui Deng, Deyao Zhu, Kunchang Li, Chenhui Gou, Feng Li, Zeyu Wang, Shu Zhong, Weihao Yu, Xiaonan Nie, Ziang Song, et al. Emerging properties in unified multimodal pretraining. *arXiv preprint arXiv:2505.14683*, 2025. 6, 12
 - [5] Tianxiang Du, Hulingxiao He, and Yuxin Peng. Aesformer: Transform everyday photos into beautiful memories. *arXiv preprint arXiv:2605.22126*, 2026. 2
 - [6] Chen Fang, Zhe Lin, Radomir Mech, and Xiaohui Shen. Automatic image cropping using visual composition, boundary simplicity and content preservation models. In *Proceedings of the 22nd ACM international conference on Multimedia*, pages 1105–1108, 2014. 2, 6, 11
 - [7] Farshid Farhat, Mohammad Mahdi Kamani, and James Z Wang. Captain: Comprehensive composition assistance for photo taking. *ACM Transactions on Multimedia Computing, Communications, and Applications (TOMM)*, 18(1):1–24, 2022. 2
 - [8] Google DeepMind. Nano banana pro (gemini 3 pro image). <https://deepmind.google/models/gemini-image/pro/>, 2025. 6, 12
 - [9] Jisang Han, Sunghwan Hong, Jaewoo Jung, Wooseok Jang, Honggyu An, Qianqian Wang, Seungryong Kim, and Chen Feng. Emergent outlier view rejection in visual geometry grounded transformers. *arXiv preprint arXiv:2512.04012*, 2025. 5
 - [10] Chaoyi Hong, Shuaiyuan Du, Ke Xian, Hao Lu, Zhiguo Cao, and Weicai Zhong. Composing photos like a photographer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7057–7066, 2021. 2
 - [11] Black Forest Labs, Stephen Batifol, Andreas Blattmann, Frederic Boesel, Saksham Consul, Cyril Diagne, Tim Dockhorn, Jack English, Zion English, Patrick Esser, et al. Flux. 1 kontext: Flow matching for in-context image generation and editing in latent space. *arXiv preprint arXiv:2506.15742*, 2025. 2, 3
 - [12] Jiawan Li, Fei Zhou, Zhipeng Zhong, Jiongzhi Lin, and Guoping Qiu. Towards smart point-and-shoot photography. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 28242–28251, 2025. 2
 - [13] Lu Ling, Yichen Sheng, Zhi Tu, Wentian Zhao, Cheng Xin, Kun Wan, Lantao Yu, Qianyu Guo, Zixun Yu, Yawen Lu, et al. D3dv-10k: A large-scale scene dataset for deep learning-based 3d vision. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22160–22169, 2024. 6, 12, 14
 - [14] Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, and Matthew Le. Flow matching for generative modeling. In *The Eleventh International Conference on Learning Representations*, 2023. 5
 - [15] Shiyu Liu, Yucheng Han, Peng Xing, Fukun Yin, Rui Wang, Wei Cheng, Jiaqi Liao, Yingming Wang, Honghao Fu, Chunrui Han, et al. Step1x-edit: A practical framework for general image editing. *arXiv preprint arXiv:2504.17761*, 2025. 6, 12
 - [16] ModelScope. Diffsynth-studio. <https://github.com/modelscope/DiffSynth-Studio>, 2024. 13
 - [17] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. Dinov2: Learning robust visual features without supervision. *Transactions on Machine Learning Research*, 2024. 11
 - [18] Xuebin Qin, Zichen Zhang, Chenyang Huang, Masood Dehghan, Osmar R Zaiane, and Martin Jagersand. U²-net: Going deeper with nested u-structure for salient object detection. *Pattern Recognition*, 106:107404, 2020. 11
 - [19] Qwen Team. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025. 3, 12, 13, 14
 - [20] Filip Radenović, Giorgos Tolias, and Ondřej Chum. Fine-tuning CNN image retrieval with no human annotation. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 41(7):1655–1668, 2019. 5
 - [21] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, pages 8748–8763, 2021. 11
 - [22] Shelly Sheynin, Adam Polyak, Uriel Singer, Yuval Kirstain, Amit Zohar, Oron Ashual, Devi Parikh, and Yaniv Taigman. Emu edit: Precise image editing via recognition and generation tasks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8871–8879, 2024. 3
 - [23] Jaskirat Singh, Xingjian Leng, Zongze Wu, Liang Zheng, Richard Zhang, Eli Shechtman, and Saining Xie. What matters for representation alignment: Global information or spatial structure? *arXiv preprint arXiv:2512.10794*, 2025. 4
 - [24] Yi Tu, Li Niu, Weijie Zhao, Dawei Cheng, and Liqing Zhang. Image cropping with composition and saliency aware aesthetic score map. In *Proceedings of the AAAI conference on artificial intelligence*, pages 12104–12111, 2020. 2
 - [25] Unsplash. Unsplash lite dataset. <https://github.com/unsplash/datasets>, 2023. 6, 11
 - [26] Jianyuan Wang, Minghao Chen, Nikita Karaev, Andrea Vedaldi, Christian Rupprecht, and David Novotny. Vggt: Visual geometry grounded transformer. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 5294–5306, 2025. 2, 4, 13
 - [27] Yibin Wang, Yuhang Zang, Hao Li, Cheng Jin, and Jiaqi Wang. Unified reward model for multimodal understanding and generation. *arXiv preprint arXiv:2503.05236*, 2025. 13
 - [28] Yifan Wang, Jianjun Zhou, Haoyi Zhu, Wenzheng Chang, Yang Zhou, Zizun Li, Junyi Chen, Jiangmiao Pang, Chunhua Shen, and Tong He. π^3 : Permutation-equivariant visual geometry learning. *arXiv preprint arXiv:2507.13347*, 2025. 2, 4, 13
 - [29] Zijun Wei, Jianming Zhang, Xiaohui Shen, Zhe Lin, Radomir Měch, Minh Hoai, and Dimitris Samaras. Good view hunting: Learning photo composition from dense view pairs. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 2496–2505, 2018. 6, 11
 - [30] Chenfei Wu, Jiahao Li, Jingren Zhou, Junyang Lin, Kaiyuan Gao, Kun Yan, Sheng-ming Yin, Shuai Bai, Xiao Xu, Yilei

- Chen, et al. Qwen-image technical report. *arXiv preprint arXiv:2508.02324*, 2025. 2, 3, 4, 6, 11, 12, 13
- [31] Haoning Wu, Zicheng Zhang, Weixia Zhang, Chaofeng Chen, Liang Liao, Chunyi Li, Yixuan Gao, Annan Wang, Erli Zhang, Wenxiu Sun, et al. Q-align: Teaching lmms for visual scoring via discrete text-defined levels. In *International Conference on Machine Learning*, 2024. 6, 11, 12
- [32] X-GenGroup. Flow-factory. <https://github.com/X-GenGroup/Flow-Factory>, 2025. 13
- [33] Shitao Xiao, Yuezhe Wang, Junjie Zhou, Huaying Yuan, Xingrun Xing, Ruiran Yan, Chaofan Li, Shuting Wang, Tiejun Huang, and Zheng Liu. Omnigen: Unified image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13294–13304, 2025. 2
- [34] Shaodong Xu, Zhendong Wang, Litong Gong, Zexian Li, Wengang Zhou, Tiezheng Ge, and Houqiang Li. Beyond point-wise matching: Structural representation alignment for accelerating diffusion transformers. *arXiv preprint arXiv:2605.16949*, 2026. 4
- [35] Jianzhou Yan, Stephen Lin, Sing Bing Kang, and Xiaoou Tang. Learning the change for automatic image cropping. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 971–978, 2013. 6, 11
- [36] Lujian Yao, Siming Zheng, Xinbin Yuan, Zhuoxuan Cai, Pu Wu, Jinwei Chen, Bo Li, and Peng-Tao Jiang. Photography perspective composition: Towards aesthetic perspective recommendation. *Advances in Neural Information Processing Systems*, 38:90306–90327, 2026. 2
- [37] Zhiyuan You, Xin Cai, Jinjin Gu, Tianfan Xue, and Chao Dong. Teaching large language models to regress accurate image quality scores using score distribution. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025. 6, 12
- [38] Zhiyuan You, Ke Wang, He Zhang, Xin Cai, Jinjin Gu, Tianfan Xue, Chao Dong, and Zhoutong Zhang. Photoframer: Multi-modal image composition instruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10197–10207, 2026. 2, 6, 11, 12, 13, 14
- [39] Sihyun Yu, Sangkyung Kwak, Huiwon Jang, Jongheon Jeong, Jonathan Huang, Jinwoo Shin, and Saining Xie. Representation alignment for generation: Training diffusion transformers is easier than you think. *arXiv preprint arXiv:2410.06940*, 2024. 4
- [40] Hui Zeng, Lida Li, Zisheng Cao, and Lei Zhang. Grid anchor based image cropping: A new benchmark and an efficient model. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(3):1304–1319, 2020. 2, 6, 11
- [41] Xiaoyan Zhang, Zhuopeng Li, Martin Constable, Kap Luk Chan, Zhenhua Tang, and Gaoyang Tang. Pose-based composition improvement for portrait photographs. *IEEE Transactions on Circuits and Systems for Video Technology*, 29(3): 653–668, 2018. 2
- [42] Kaiwen Zheng, Huayu Chen, Haotian Ye, Haoxiang Wang, Qinsheng Zhang, Kai Jiang, Hang Su, Stefano Ermon, Jun Zhu, and Ming-Yu Liu. Diffusionnft: Online diffusion reinforcement with forward process. *arXiv preprint arXiv:2509.16117*, 2025. 5, 6

Supplementary Material for

GeoComposer: Geometry-Grounded Photographic Composition Instruction

In this supplementary material, we provide additional details on (1) Dataset Construction, (2) Evaluation Metrics, (3) Baseline Methods, (4) Implementation Details, (5) Algorithmic Pseudocode, (6) Results on a Held-out Benchmark, (7) Additional Qualitative Results, (8) Analysis of the Composition Understanding Model, and (9) Additional Ablation Studies.

A. Dataset Construction

We follow the data construction protocol of PhotoFramer [38] and build the dataset on top of existing public datasets, i.e., the human-annotated crop-scoring datasets and expert photographs listed below, from which the composition pairs and their text guidance are derived. The constructed dataset consists of 34,129 $\langle \text{poor}, \text{good}, \text{text-guidance} \rangle$ triplets organized into three composition operations that mirror how casual photographs are re-composed, namely *shift* (in-plane re-framing), *zoom-in* (tightening the framing toward the subject), and *view change* (camera viewpoint variation). Each triplet pairs a poorly-composed image with a well-composed counterpart of the same scene, together with a natural-language guidance describing the poor→good compositional adjustment. Table 6 summarizes the per-task statistics. The *shift* and *zoom-in* pairs are obtained by re-cropping real photographs, whereas the *view change* pairs are synthesized from expert photographs; all accepted pairs are finally annotated with text guidance.

Shift and Zoom-in Pairs. The two subsets are built from crop-scoring datasets, i.e., CPC [29], GAIC [40], FLMS [6], and CUHK-ICD [35], whose expert crops serve as well-composed references, with the per-subset sources listed in Table 6. For *shift*, we sample two crops of the same aspect ratio from a source image, where the *good* crop is a high-scoring expert crop and the *poor* crop is a positionally offset crop, to which we further apply a small random rotation to emulate the tilted horizon typical of amateur framing. For *zoom-in*, the *good* image is a tightly composed high-scoring crop and the *poor* image is a larger crop that contains it, emulating a wider or more distant framing; we enforce that the good crop covers at most 60% of the poor crop in area to ensure a genuine change of framing rather than a near-identical re-crop. A candidate pair passes a cascade of filters that jointly enforce three properties, and is accepted only if all of them are satisfied. (i) *Same scene*: the poor and good crops must depict the same content, verified by a CLIP [21] similarity ≥ 0.8 and a subject-consistency check that matches U²-Net [18] salient regions via DINOv2 [17]

Subset	Pairs	Source
Shift	13,152	CPC, GAIC
Zoom-in	10,454	CPC, FLMS, GAIC, CUHK-ICD
View change	10,523	Unsplash
Total	34,129	–

Table 6. Per-task statistics of the constructed dataset. The view-change poor images are synthesized from Unsplash expert photographs.

cosine similarity ≥ 0.6 . (ii) *Composition gap*: the good crop must be genuinely better composed, enforced by an aesthetic gate on the good crop (Q-Align [31] ≥ 2.5) and a positive composition-score margin between the good and poor crops given by the source annotations. (iii) *Valid operation*: we pair only crops of the same aspect ratio within [0.45, 2.2], and for *shift* we additionally reject pairs in which one crop nearly contains the other, as such a containment relation corresponds to a zoom rather than an in-plane shift.

View-Change Pairs. Paired real viewpoint-change data are scarce, and their aesthetic and compositional quality is inherently limited, e.g., multi-view frames captured for 3D reconstruction, which caps the quality of the frames that can serve as well-composed *good* references. Since the *good* image defines the compositional quality the model is trained to reproduce, it must itself satisfy a high aesthetic and compositional standard. We therefore synthesize this subset from a curated dataset of real high-quality photographs, Unsplash [25]. Starting from an expert photograph as the *good* image, we apply camera-motion editing instructions (e.g., turn, move, rotate) to different directions with discrete magnitudes (slightly, moderately, and strongly) with Qwen-Image-Edit [30] to generate a viewpoint-shifted *poor* image with explicit prompts of worsening composition. We then retain only genuine and correctly degraded pairs through a three-axis filter: (1) *Same Scene*: besides a CLIP similarity ≥ 0.8 and a DINOv2 cosine similarity ≥ 0.6 between the salient regions of the poor and good images, we also leverage Qwen3.5-397B-A17B and human annotators to verify that the poor image is indeed a viewpoint-changed version of the good one; (2) *Valid Discrimination*: a viewpoint-shift test based on mutual nearest-neighbor matching of DINOv2 patch tokens, keeping only pairs whose spatial displacement exceeds 5%, and a non-mirror test that removes pairs where the poor image is a left-right flip of the good one; and (3) *Composition gap*: a non-inversion test that removes pairs whose synthesized “poor” image is in fact bet-

ter composed than the good one, according to the Q-Align and PhotoFramer composition scorers [38].

Text-Guidance Annotation. For every ⟨poor, good⟩ pair, we generate a natural-language editing instruction with a vision-language model (Qwen3.5-397B-A17B), which is shown the poor image as “Input photo” and the good image as “Desired result” and, cast as an expert composition editor, returns a self-contained instruction describing how to reframe the former into the latter. The prompt constrains the model to composition-only edits (subject placement, balance, horizon, viewpoint) and forbids introducing new content or numeric coordinates, keeping each instruction grounded in the pair and free of hallucination.

Training and Validation Split. We split the dataset into 33,229 training and 900 validation triplets (300 per task). The split is strictly disjoint at the source-image level so that no source image appears in both splits, preventing information leakage between training and evaluation.

Held-out Benchmark. To assess generalization beyond the constructed dataset, we additionally evaluate on a held-out benchmark that is disjoint from our training data and carries no text guidance, i.e., pure image-conditioned re-composition. For *view change*, we sample 300 real multi-view pairs from DL3DV [13], where the poor image is a scene’s native first frame and the good image is a better-composed frame (scored by the PhotoFramer composition scorer) within co-visibility [0.1, 0.3] with the poor image, providing a fully real out-of-distribution test of viewpoint change.

B. Evaluation Metrics

We evaluate composition editing along four orthogonal axes, i.e., composition, image quality, geometric consistency, and text-guidance accuracy, together with a human study. Unless otherwise noted, all LLM-judge metrics use the same frontier vision-language model (GPT-5.4) as the judge, with input images normalized to a long side of 640 pixels to remove resolution bias.

Composition. Comp. WinRate is the pairwise win rate of the edited image against the source, where the judge decides which image is better composed. We adopt double-order judging that averages both presentation orders to remove position bias, so that a value above 50% indicates improved composition while a near-identity edit lands around 50%. PF-ass scores single-image composition with the PhotoFramer scorer [38], with images downsampled to a 0.3M-pixel cap to remove its systematic resolution bias.

Image Quality. QAlign [31] scores no-reference aesthetic quality with the aesthetics head of Q-Align, and DeQA [37] scores general quality in terms of distortion, artifacts, and naturalness.

Geometric Consistency. MET3R [1] measures multi-view 3D consistency between the edited output and the source,

where lower values indicate greater agreement. Since MET3R inherently rewards under-editing, we complement it with Geo-Suc, a pointwise LLM-judge metric that takes the reference camera motion defined by the source-to-target pair and decides whether the source-to-output change is explainable by the same motion. It is calibrated against three control arms, i.e., the ground truth as its own candidate (ceiling), the source itself (floor), and a shuffled scene (sanity).

Text-Guidance Accuracy. Following the protocol of PhotoFramer [38], Text Cons. (src→gen) scores whether the reasoning text accurately describes the method’s own edit, and Text Cons. (src→GT) whether it matches the human reframing, both on a hedging-resistant 1–5 rubric that places unfalsifiable or generic guidance at the bottom. Pure image generators that emit no reasoning text are excluded from these two metrics.

Human Study. On a randomly sampled 10% subset of the validation set, annotators are shown the source and an edited candidate and judge whether the candidate, while satisfying geometric consistency, improves composition and image quality over the source. We report Overall, the fraction of samples for which a method’s edit is judged both geometrically valid and better than the source in composition and quality; higher is better.

C. Baseline Details

Under a unified protocol, every model, including ours, receives the general task prompts of the dataset as the textual input together with the poorly-composed image, and produces a composition-improved image with, depending on its capability, an accompanying text guidance. BAGEL [4] is an open-source unified multimodal model that couples understanding and generation within a single architecture. Qwen-Image-Edit [30] shares the same editing backbone as ours and is paired with Qwen3-VL [19] as its understanding model. Step1X-Edit [15] is a general instruction-based editing framework, which we run in its thinking mode that produces an explicit reasoning trace before editing. FLUX.2 [2] is an open-weight flow-matching model for high-quality image generation and editing. PhotoFramer [38] is a composition-specific unified understanding-generation model that jointly produces composition guidance and visual exemplars, and we adopt its released preview version. Nano Banana Pro (Gemini 3 Pro Image) [8] is a proprietary frontier image generation and editing model. Among these, all methods except FLUX.2 and Nano Banana Pro emit textual output that serves as the text guidance, whereas the two pure image generators produce only the edited image.

Algorithm 1 Composition Understanding

Require: Poorly-composed image I^p and task prompt T_{task}

Ensure: Textual composition guidance T

- 1: Load the fine-tuned composition understanding model f_{und}
 - 2: Generate the textual guidance $T \leftarrow f_{und}(I^p, T_{task})$
 - 3: **return** T
-

Algorithm 2 Training Stage I (Geometry-Aware Representation Learning)

Require: Dataset $\mathcal{D} = \{(I^p, I^t, T)\}$ and number of epochs E

Ensure: Trained DiT f_{DiT}

- 1: Initialize the DiT f_{DiT} and the projection head P
 - 2: Load the frozen geometry foundation model f_{geo}
 - 3: **for** $e = 1$ to E **do**
 - 4: **for all** $(I^p, I^t, T) \in \mathcal{D}$ **do**
 - 5: Extract $\{F^{patch}, F^{cam}, F^{reg}\} \leftarrow f_{geo}(I^t)$
 - 6: Build the multimodal condition c from T and I^p
 - 7: Encode $z_0 \leftarrow \text{VAE}(I^t)$ and concatenate the special tokens $\tilde{z}_0 \leftarrow [z_0; F^{cam}; F^{reg}]$
 - 8: Sample t and $\epsilon \sim \mathcal{N}(0, I)$, and add noise to $\tilde{z}_0$ to obtain $\tilde{z}_t$
 - 9: Predict $(\hat{v}, F^{DiT}) \leftarrow f_{DiT}(\tilde{z}_t, t, c)$ and project $\hat{F}^{DiT} \leftarrow P(F^{DiT})$
 - 10: $\mathcal{L}_{geo} \leftarrow \mathcal{L}_{FM} + \lambda_{glo}\mathcal{L}_{glo} + \lambda_{loc}\mathcal{L}_{loc}$
 - 11: Update f_{DiT} and P using $\mathcal{L}_{geo}$
 - 12: **end for**
 - 13: **end for**
 - 14: **return** Trained DiT f_{DiT}
-

D. Implementation Details

Our composition editing model builds upon Qwen-Image-Edit-2511 [30], fine-tuned with LoRA of rank 32, while our composition understanding model is obtained by LoRA fine-tuning Qwen3-VL-32B-Instruct [19] with a rank of 32 on the constructed dataset. Following PhotoFramer [38], we design ten different general task prompts T_{task} for each task, so that the understanding model is not tied to a single phrasing. The two stages are implemented with DiffSynth-Studio [16] and Flow-Factory [32], and all training is conducted on 8 GPUs with 80 GB memory each. In Stage I, we adopt the frozen VGGT-1B [26] as the geometry foundation model, whose 24-layer aggregator produces 2048-dimensional geometry-aware tokens. We tap the intermediate image-token features from the 30-th DiT transformer block and align them, through the projection head, to the VGGT patch features at layers $\{12, 18, 23\}$ for the local correspondence and global structural supervision, while the camera and register tokens are taken from layers

Algorithm 3 Training Stage II (Hybrid Reward-Guided RL)

Require: Dataset $\mathcal{D} = \{(I^p, I^t, T)\}$, rollout size K , and epochs E'

Ensure: Hybrid reward-guided RL-optimized DiT

- 1: Load the DiT trained from Stage I and initialize the policy π_θ and the frozen reference policy π_{ref} from it
 - 2: **for** $e = 1$ to E' **do**
 - 3: **for all** $(I^p, I^t, T) \in \mathcal{D}$ **do**
 - 4: Rollout K candidates $\mathcal{Y} = \{I_1^c, \dots, I_K^c\} \sim \pi_\theta(I^p, T)$
 - 5: **for** $k = 1$ to K **do**
 - 6: $R_{hyb}^k \leftarrow \lambda_{ins}R_{ins}^k + \lambda_{qua}R_{qua}^k + \lambda_{geo}R_{geo}^k$
 - 7: **end for**
 - 8: Compute group-relative advantages $\{A^k\}_{k=1}^K$ by normalizing $\{R_{hyb}^k\}_{k=1}^K$ within the group
 - 9: Update π_θ with the negative-aware flow-matching objective, weighting the π_{ref} -mirrored negative targets by $\{A^k\}_{k=1}^K$
 - 10: **end for**
 - 11: **end for**
 - 12: **return** Optimized DiT π_θ
-

Algorithm 4 Inference

Require: Poorly-composed image I^p and task prompt T_{task}

Ensure: Textual guidance T and composition-enhanced exemplar I^g

- 1: Load the understanding model f_{und} and the two-stage trained DiT f_{DiT}
 - 2: Generate the textual guidance $T \leftarrow f_{und}(I^p, T_{task})$
 - 3: Replace the special tokens F^{cam} and F^{reg} with Gaussian noise
 - 4: Generate the exemplar $I^g \leftarrow f_{DiT}(I^p, T)$
 - 5: **return** T, I^g
-

$\{18, 23\}$ and concatenated with the target latent z_0 before noise is added during training. The supervision weights are $\lambda_{loc} = 0.01$ and $\lambda_{glo} = 0.1$, and the model is optimized with AdamW at a learning rate of 1×10^{-4} for 5 epochs. In Stage II, we generate $K = 16$ candidates per input through rollout sampling and train for 240 epochs with 48 samples per epoch. The instruction-following and visual-quality rewards are provided by UnifiedReward [27] and the geometry-consistency reward by Pi3 [28] with its patch and attention features probed from layer 17. The reward weights are $\lambda_{ins} = \lambda_{qua} = \lambda_{geo} = 0.5$, the source and target weights $w_s = 0.3$ and $w_t = 0.7$, and the attention and feature relevance weights $\lambda_{attn} = 0.3$ and $\lambda_{feat} = 0.7$. The policy is optimized with AdamW at 1×10^{-4} , and inference uses 40 diffusion sampling steps.

Method	QAlign↑	DeQA↑	MET3R↓	PF-ass↑	Cons.↑
BAGEL	2.208	4.063	0.266	2.452	2.263
Qwen-Image-Edit	<u>2.323</u>	4.016	0.242	2.456	3.337
Step1X-Edit	2.087	3.777	0.231	2.327	2.407
FLUX.2	2.247	4.027	0.259	2.563	–
PhotoFramer	2.299	<u>4.182</u>	0.453	2.698	<u>3.423</u>
Nano Banana Pro	2.277	4.082	<u>0.177</u>	2.470	–
Ours	2.428	4.253	0.150	<u>2.567</u>	3.453

Table 7. Comparison on the DL3DV-300 benchmark for viewpoint change. Cons. denotes Text Cons. (src→gen); “–” denotes pure image generators excluded from text-guidance evaluation. The best and second-best results are marked in **bold** and underline, respectively.

E. Algorithms

We summarize the full GeoComposer pipeline in Algorithms 1–4, covering composition understanding, geometry-aware representation learning (Stage I), hybrid reward-guided reinforcement learning (Stage II), and inference.

F. Results on a Held-out Benchmark

To assess generalization beyond the constructed dataset, we evaluate on a held-out benchmark that is strictly disjoint from our training data, i.e., DL3DV [13] for viewpoint change, under pure image-conditioned re-composition without text guidance. Table 7 reports the results on the DL3DV-300 subset. On DL3DV, which requires genuine viewpoint change, GeoComposer attains the best MET3R (0.150) together with the best QAlign, DeQA, and text-guidance faithfulness, whereas several strong editors collapse in geometric consistency, e.g., PhotoFramer reaches a MET3R of 0.453 as it alters the scene without preserving its 3D structure. GeoComposer is therefore the only method that ranks first on geometric consistency on this benchmark, confirming that the geometric priors learned on the constructed dataset transfer to unseen real data rather than overfitting to our synthesis pipeline.

G. Additional Qualitative Results

Figure 4 presents additional qualitative comparisons that complement the qualitative results in the main paper, covering a broader range of scene types, i.e., animal subjects, natural landscapes, and architectural structures, across the three composition operations of the dataset. Consistent with the quantitative results, the baselines frequently improve the framing at the expense of the underlying scene, e.g., hallucinating or removing structures, distorting the subject, or drifting to a viewpoint that is no longer explainable by a camera motion over the source scene. GeoComposer instead re-frames the subject and rebalances the layout while

keeping the scene geometry intact, producing visual exemplars that are both better composed and faithful to the source scene.

H. Analysis of the Composition Understanding Model

The two components of GeoComposer are evaluated separately in this section, focusing on the textual guidance T rather than the generated exemplar. Table 8 compares our fine-tuned understanding model against the raw Qwen3-VL [19] used by Qwen-Image-Edit and against PhotoFramer [38], reporting both text-consistency metrics together with the average length of the produced guidance. Our model attains the best consistency in both directions (3.45 and 3.28) while producing by far the shortest guidance, i.e., 58.6 words against 100.9 for PhotoFramer and 210.6 for the raw VLM. The improvement therefore does not come from describing more, but from describing the right thing: length and faithfulness move in opposite directions here, and the longest outputs are the least consistent with the actual reframing.

Figure 5 makes the nature of this difference visible by showing the word distribution of each model over the validation set. The raw VLM is dominated by composition *theory* and subjective impression, e.g., “angle”, “third”, “diagonal”, and “golden” alongside “feel” and “compelling”, so it names the principle a photograph violates and how the result should feel, but rarely states an operation. PhotoFramer instead concentrates on generic evaluative language, e.g., “pleasing”, “aesthetically”, “enhance”, and “adjustment”, which reads fluently as composition commentary yet leaves the required change underspecified. Our guidance is dominated by explicit operations, e.g., “zoom”, “crop”, “reframe”, and “adjust”, anchored to spatial referents, e.g., “horizontally”, “horizon”, “center”, “foreground”, and “background”. Notably, preservation verbs such as “maintaining”, “keeping”, and “ensure” are also prominent, which means the guidance states not only what to change but what must stay fixed. This is precisely the property that makes T usable as a conditioning signal for geometry-preserving editing, and it explains why a much shorter instruction transfers better to the editing model.

I. Additional Ablation Studies

We provide additional ablations on the design choices of geometry-aware representation learning (Stage I) and the geometry-consistency reward (Stage II). All variants are evaluated on the constructed validation set with QAlign, DeQA, MET3R, and PF-ass.

Global Supervision Weight λ_{glo} . Table 9 varies the weight of the global structural supervision. A small weight ($\lambda_{\text{glo}} =$



Figure 4. Additional qualitative comparison with state-of-the-art methods on diverse scenes. In each row, the leftmost image is the poorly-composed input and the rightmost is the result of GeoComposer.



Figure 5. Word distribution of the textual guidance produced by each composition understanding model over the validation set. Word size is proportional to frequency.

0.05) attains the best QAlign but leaves geometric consistency weak (MET3R 0.242) and scores worst on DeQA and PF-ass, as the global geometry signal is under-weighted, whereas a large weight (0.20) over-constrains the features and improves neither quality nor geometry. Setting $\lambda_{\text{glo}} = 0.1$ attains the best MET3R (0.222) together with the best DeQA and PF-ass, striking the best balance between generation quality and geometric consistency. As our objective is geometry-grounded composition, we adopt $\lambda_{\text{glo}} = 0.1$.

Supervision Layers (Stage I). Table 10 varies which VGGT layers provide the patch features that the projected DiT representations are aligned to, i.e., the targets of the local correspondence and global structural supervision. Supervising against a single deep layer ($\{23\}$) or a single pair ($\{18, 23\}$) leaves MET3R at 0.256 and 0.241, as the geometric target is drawn from too narrow a range of depths. Spanning three depths ($\{12, 18, 23\}$) attains the best MET3R (0.222) together with the best QAlign and DeQA

Und. Model	src→gen↑	src→GT↑	Words
Raw Qwen3-VL	3.16	2.60	210.6
PhotoFramer	<u>3.21</u>	<u>2.69</u>	100.9
Ours	3.45	3.28	58.6

Table 8. Comparison of composition understanding models on text consistency and the average number of words per generated guidance. The best and second-best consistency scores are marked in **bold** and underline, respectively.

λ_{glo}	QAlign↑	DeQA↑	MET3R↓	PF-ass↑
0.05	3.310	3.908	0.242	3.022
0.10	<u>3.282</u>	3.934	0.222	3.043
0.20	3.274	<u>3.926</u>	<u>0.235</u>	<u>3.038</u>

Table 9. Ablation of the global structural supervision weight λ_{glo} .

Layers	QAlign↑	DeQA↑	MET3R↓	PF-ass↑
23	<u>3.267</u>	<u>3.933</u>	0.256	3.038
18,23	3.204	<u>3.926</u>	<u>0.241</u>	3.068
12,18,23	3.282	3.934	0.222	<u>3.043</u>

Table 10. Ablation of the VGGT layers whose patch features serve as the target of the local and global supervision in Stage I.

$\lambda_{\text{attn}}:\lambda_{\text{feat}}$	QAlign↑	DeQA↑	MET3R↓	PF-ass↑
0:1	3.294	3.990	<u>0.185</u>	3.063
3:7	3.381	4.012	0.184	<u>3.133</u>
5:5	<u>3.377</u>	<u>4.006</u>	0.206	3.143

Table 11. Ablation of the attention and feature relevance weights $\lambda_{\text{attn}}:\lambda_{\text{feat}}$ in the directed geometry relevance score.

at a small cost in PF-ass, and we adopt it as our default.

Attention-Feature Balance (Stage II). Table 11 varies the weights $\lambda_{\text{attn}}:\lambda_{\text{feat}}$ that combine the attention relevance and the feature similarity into the directed geometry relevance score. Discarding the attention cue entirely (0:1) preserves MET3R almost unchanged (0.185) but loses noticeably on composition and quality (PF-ass 3.063, QAlign 3.294), indicating that feature similarity carries most of the geometric signal while the attention cue mainly sharpens the reward. Weighting the two equally (5:5) attains the best PF-ass (3.143) but degrades MET3R to 0.206, as the attention mass is diffuse and dilutes the geometric evidence. We adopt 3:7, which attains the best MET3R, QAlign, and DeQA at a marginal cost in PF-ass.

Source-Target Reward Balance (Stage II). Table 12 varies the weights $w_s:w_t$ that balance source preservation against target alignment in the geometry reward. Removing source preservation entirely (0:1) degrades MET3R to

$w_s:w_t$	QAlign↑	DeQA↑	MET3R↓	PF-ass↑
0:1	<u>3.344</u>	<u>3.993</u>	0.209	<u>3.124</u>
3:7	3.381	4.012	0.184	3.133
5:5	3.258	3.802	<u>0.176</u>	2.999
7:3	3.239	3.757	0.174	2.988

Table 12. Ablation of the source and target weights $w_s:w_t$ in the geometry-consistency reward. The two source-heavy settings reach a lower MET3R by under-editing, at a clear cost in composition and quality.

0.209, confirming that the source term is what anchors the output to the input scene. Conversely, raising the source weight to 5:5 or 7:3 does reach a lower MET3R (0.176 and 0.174), but at a sharp cost in composition and quality, e.g., PF-ass drops from 3.133 to 2.999 and 2.988. These configurations improve MET3R by suppressing the edit rather than by better preserving geometry, which is precisely the under-editing bias of the metric noted above, and therefore do not represent a genuinely better trade-off. We adopt 3:7, which attains the best QAlign, DeQA, and PF-ass while keeping MET3R at 0.184.

In summary, both Stage I design choices converge on the same conclusion, i.e., our configuration attains the best MET3R while remaining competitive on quality and composition, which is what this stage is meant to deliver, as its sole purpose is to instill geometric consistency into the representations. In Stage II, where the hybrid reward must balance geometry against instruction following and visual quality, our configuration instead attains the best overall trade-off across the four metrics, i.e., the best MET3R for the attention-feature balance, and the best QAlign, DeQA, and PF-ass for the source-target balance, in which the two source-heavy settings reach a lower MET3R only by suppressing the compositional change that the task requires. This reflects the central design principle of GeoComposer, i.e., to prioritize geometric consistency without sacrificing the edit itself.