

Inverse Digital Marbling: Recovering Gesture Programs with a Replay Adjoint

Tianqi Liu¹ Yushan Han^{2,*} Hang Liu³

¹Zelostech, Beijing, China

²Huaxin Design Institute, Hangzhou, China

³Communication University of China, Beijing, China

*Corresponding author: hanyushan.hx@chinaccs.cn

Abstract

Pigment deposition in paper marbling displaces the pattern already present, coupling the appearance of each gesture to later actions. We recover executable programs for a deposition-based digital marbling model: given a target image, we optimise an ordered program of capsule insertions whose replay approximates it. The capsule primitive continuously joins circular drops to elongated deposits. Its transport is exactly area-preserving and has a closed-form inverse on the exterior of the deposited region. A replay adjoint reconstructs intermediate states, retaining coordinates lost inside deposits and periodic position checkpoints. At 2000 gestures and 1024^2 pixels, the PyTorch replay implementation uses $8.7\times$ less memory than the tested checkpointed-autograd configuration at comparable step time; the fused implementation fits a program in about four minutes on one workstation GPU. We evaluate image reconstruction on five marbled sheets, compare against transport-disabled fitting, one-pass geometric compensation and a published stroke-based fitter at matched stroke count, and measure sensitivity to an alternative ordered-drop transport. Recovered programs replay across a $4\times$ range of linear resolution. Edits specified in program order or in palette space — inserting a gesture, recolouring a stage, translating a stage — replay correctly under the same model; edits specified by image content, such as moving a motif, do not. On synthetic targets with known generating programs, the recovered programs match the images but not the generating gestures under a positional matching statistic. The output is an editable program in the specified digital medium.

1 Introduction

Turning an image into a program is useful when the program, rather than a raster approximation, is the desired output. It can be replayed at a new resolution, edited at the level of actions, or supplied to an authoring or fabrication system. Stroke-based rendering provides this representation for media in which a placed mark remains fixed: later marks may cover it, but do not change its geometry [1, 4, 5]. That assumption is productive for drawing and painting, but it removes a defining operation

of marbling: the displacement of existing pigment.

In paper marbling, pigment floats on a liquid surface. A new deposit creates paint and displaces the pattern already present; a drawn tool transports earlier pigment along its path. Consequently, the location of an early mark in the final image depends on every later gesture. Gesture order matters, local corrections propagate globally, and a program must be evaluated as a coupled dynamical process. The inverse problem is to recover one program whose execution is visually equivalent to a given sheet, not to identify the historical sequence that produced it.

Two related research directions address complementary aspects of this problem. Digital marbling provides interactive forward simulators and composable closed-form maps [9, 8, 10], most recently analytical fluid brushes whose reverse-drift functions compose in a shader and render at any resolution [23]. These yield ordered programs — but forwards, authored by a user, not recovered from a target; drop insertion is part of that literature, while the time brushes of Mixwell [23] move pigment without depositing it. Differentiable simulation uses adjoints to recover controls or latent fluid states [21, 22], but optimises continuous fields rather than a discrete, ordered program of typed gestures that each create material. We invert this deposition-based program family.

Fitting requires differentiation through the gesture chain. Retaining every per-pixel intermediate state at $N = 2000$ and 1024^2 requires tens of gigabytes. Checkpointing [13] trades storage for recomputation, while reversible networks [14, 20] and path replay for light transport [12] reconstruct intermediate states. In our renderer, the backward coordinate map is invertible outside each deposit, but its extension across deposited material loses coordinates. The replay adjoint records those exceptional coordinates and regenerates the exterior states.

This paper gives a model of the chain for which that record is small and the rest is cheap, and a system built on it. A gesture is a capsule whose length continuously joins a circular drop to a drawn deposit, and its transport is a translation in parallel-set area coordinates. That gives the forward map and its inverse in closed form, and makes the deposition set the single exact obstruction to coordinate regeneration, with a record count that depends on the sampled trajectories and that we measure directly. What

line of work	unknown	later marks move earlier ones?
stroke-based rendering [1, 4, 5]	ordered marks	no — placed marks are fixed
stroke fitting with smudging [15]	ordered strokes	yes, locally through colour smudging
process recovery from a finished image or time-lapse [24, 25, 26]	marks, layers or frames	no explicit marbling transport map
differentiable fluid control [21, 22]	continuous fields or controls	yes, but there is no typed gesture to recover
forward digital marbling [9, 8, 23]	nothing — the program is authored	yes
this work	ordered typed gestures	yes

Table 1: Related representations and tasks. Forward marbling provides authored programs; inverse painting includes ordered marks, layers, and smudging. Our task fits capsule-deposition programs through an explicit area-preserving exterior transport, with a replay adjoint specialised to its non-injective deposition extension.

the adjoint requires of the operator is a computable inverse; the closed form makes that inverse fast on its whole domain (Sec. 5.2). Geometry, width and palette assignment are then optimised jointly through 2000 gestures.

We evaluate the recovered programs against structural controls chosen to isolate the contribution of transport: a flat-colour floor that puts every error on a common scale, a matched ablation with transport disabled, a one-pass closed-form correction whose geometric obstruction Lemma 1 identifies, a second transport operator built from a published primitive, three seeds, and synthetic targets with known generating programs. Stroke-based renderers fit the same images but optimise a different object — marks that stay where they are placed — so they calibrate raster approximation rather than transport; we run one of them at matched stroke count and report where it wins (Sec. 6.2). The output is an executable program that replays unchanged across a $4\times$ resolution range and can be edited at the level of gestures and stages (Fig. 10): order, replayability and gesture-level structure that survive execution.

Contributions.

1. A capsule insertion primitive for digital marbling: exactly area-preserving off its footprint, with a closed-form inverse, joining drops to drawn deposits continuously; the result that the straight segment is the unique curve skeleton for which its parallel-set area law is globally exact; and a quantified relationship to line-source potential flow (Sec. 4).
2. A replay adjoint specialised to this recurrence, whose only exact obstruction is characterised and whose record is measured rather than assumed, using $8.7\times$

less memory than checkpointed automatic differentiation at comparable step time (Sec. 5.2).

3. A system that recovers executable 2000-gesture programs from single images in minutes, with demonstrated program-level edits and documented failure cases, and an evaluation whose synthetic experiment measures image reconstruction and generating-gesture correspondence separately (Secs. 6 and 7).

The output is executable with respect to the computational gesture model: “execution” below means replay by its hard renderer. The target is a visually equivalent program rather than the historical sequence that produced a sheet, and the operator is a geometric surrogate for the bath rather than a simulation of it; Sec. 4.1 quantifies the discrepancy between the surrogate and the physical flow.

2 Related work

Forward models of marbling. Computational marbling has primarily been an authoring and simulation problem. Fluid solvers [9] reproduce the response of floating pigment to user input. Mathematical marbling replaces a full fluid solve with composable maps [8]; the classical drop map is closed-form and area-preserving. Jaffer [10] derives Oseen-flow maps for short stylus motion. Most recently, James and James [23] derive sharp analytical fluid brushes from potential flow around a cylindrical tine, with reverse-drift functions that encode tine insertion, motion and removal, compose in a shader, and render progressively at any resolution. Those tools move pigment without depositing it. Inserting a tine of radius a into an incompressible sheet displaces material by $\sigma = \sqrt{\sigma'^2 - a^2}$; that is the classical drop map, and it is identically the $\ell = 0$ limit of (7), so at the drop the two constructions are the same map. The two constructions extend the drop map in different directions. Mixwell adds tine motion and removal, which transport material without net injection: the composed brush has no deposition set, is invertible everywhere, and raises no obstruction of the kind Lemma 1 identifies. We add extent instead — the capsule carries the drop continuously to an elongated deposit, keeping the closed-form inverse — and it is that continued deposition which makes the chain non-injective on its footprint and gives the adjoint of Sec. 5.2 something it must record; tine-style drag is the zero-injection class we set aside (Sec. 10). All of these works establish efficient forward construction; none fits a program to an image. Our task starts from the finished image and searches for the ordered construction program.

Inverse design through physical dynamics. Adjoint fluid control [21] and differentiable programming systems [22] show that desired outcomes can be converted into controls through multi-step simulation, and recent work derives adjoints directly on flow maps to differentiate long

simulations accurately [16]. That work also regenerates state rather than storing it, but for a flow that is reversible; the distinction here is that our map is deliberately not reversible on the deposition set, and the contribution is to characterise and measure that exception rather than to avoid it. These methods optimise continuous fields, initial conditions, or controls. Our replay strategy instead specialises state reconstruction to a gesture map that loses coordinates on its deposition set. Here the unknown is a discrete-length program of typed pigment-creating gestures, and the rendered appearance is carried by material deposited at different times.

Images as action programs. Stroke-based rendering spans hand-designed placement [1], sequential agents [2], differentiable rasterisation [3, 4], and feed-forward stroke prediction [5]; the line begins with Haeberli’s ordered marks [28] and Hertzmann’s multi-size layering [29], which uses a coarse-to-fine radius schedule similar to ours. A parallel line recovers executable *programs* from images — hand-drawn diagrams [32], procedural models fitted by search [33] — where the program’s semantics is a static composition; here it is a coupled dynamical process, so the contribution of slot i depends on every later slot. These methods composite marks [19]; their strength is direct image approximation rather than subsequent transport of the accumulated canvas. Physically based paint systems model wet media during forward interaction [7], while robotic painters incorporate medium response through calibration or feedback [6].

A separate line recovers or synthesises a plausible *process*: a drawing order for line drawings [24], ordered translucent strokes from time-lapse paintings [25], and ordered layered paths from one image [26]. These methods use different structural and learned priors; they do not fit the deposition-and-transport model studied here. We optimise gesture parameters in fixed ordered slots, so later transport affects the image contribution of earlier slots; we do not search over discrete order.

The closest recent work is Jiang et al. [15], which fits brushstrokes differentially and includes smudging, so later strokes can alter paint already placed. Its smudge renderer samples and blends existing canvas colours along brush motion. Our construction instead uses explicit material coordinate maps that preserve area outside deposits and admit exterior inversion. The contribution is the capsule-deposition primitive and an adjoint specialised to reconstructing its transport trajectories while retaining coordinates lost by the deposition extension. Both approaches produce structured painting representations; our replay and editing results are evaluated within the specified marbling model.

Memory-efficient differentiation. Long reverse-mode chains can store all states, checkpoint them [13], or regenerate them by reversing the forward step [20, 14]. Related replay strategies are central to differentiable light transport

[12], and flow-map adjoints obtain the state-reconstruction benefits for long fluid simulations by reusing flow maps [16]; solver-level adjoints run an executed block-implicit sweep backwards with a per-sweep replay buffer in place of an autograd tape [17]. Where reversal loses information, reversible learning stores exactly the discarded bits [20]; our recurrence specialises that principle to pigment transport. The material a gesture creates has no earlier state to regenerate; we construct that exceptional set explicitly, record it, and measure its size. The soft coverage used during optimisation follows differentiable rasterisation [11]; edge sampling [30] and reparameterisation [31] are the unbiased alternatives for gradients across a visibility discontinuity; the annealed relaxation suffices here because every reported number is a hard render.

3 Problem formulation

Let $\Omega = [0, 1]^2$ be the canvas and $I^* : \Omega \rightarrow [0, 1]^3$ the target image. A *program* is an ordered sequence $\Pi = (g_1, \dots, g_N)$ of gestures $g_i = (a_i, d_i, r_i, c_i)$ with anchor $a_i \in \mathbb{R}^2$, offset $d_i \in \mathbb{R}^2$, half-width $r_i > 0$ and colour $c_i \in [0, 1]^3$. Gesture i has *footprint*

$$K_i = \{x \in \mathbb{R}^2 : \text{dist}(x, [a_i, a_i + d_i]) \leq r_i\}, \quad (1)$$

the closed capsule of radius r_i about its segment; $\ell_i = \|d_i\| = 0$ is a disc, $\ell_i > 0$ a drawn line, and gesture type is the continuous parameter ℓ_i .

A forward model $\mathcal{R}$ maps a program to an image. We consider models of the following form. Each gesture i induces a map $\psi_i : \mathbb{R}^2 \rightarrow \mathbb{R}^2$ that traces pre-existing material from after gesture i to before it. Inside newly deposited material, it is a computational extension rather than a physical pre-image. For a pixel $x \in \Omega$ set $x_N = x$ and, for $i = N, \dots, 1$,

$$\alpha_i = \alpha(x_i; g_i), \quad x_{i-1} = \psi_i(x_i), \quad (2)$$

where $\alpha(\cdot; g_i)$ is the coverage of gesture i ($\mathbf{1}_{K_i}$ for a hard render). The rendered colour is back-to-front compositing [19] along this chain,

$$\mathcal{R}(\Pi)(x) = \sum_{i=1}^N c_i \alpha_i \prod_{j>i} (1 - \alpha_j) + c_0 \prod_{j=1}^N (1 - \alpha_j), \quad (3)$$

with c_0 the background. Equation (3) is ordinary stroke compositing; within this fixed gesture and coverage family, the renderers differ through ψ_i . Evaluating coverage at a back-traced position is the semi-Lagrangian view of advection: the coverage of gesture i is evaluated where the pixel’s material *was* when gesture i acted, and that position depends on every later gesture.

Definition 1. A forward model of the form (2)–(3) is inert-mark if $\psi_i = \text{id}$ for every i , and displacing otherwise. A displacing model is specified by the family of material maps $\{\psi_i\}$; its fidelity to a physical medium is a separate, measurable property of that family.

symbol	meaning (first use)
$\Pi = (g_1, \dots, g_N)$	program: N gestures in execution order
$g_i = (a_i, d_i, r_i, c_i)$	anchor, offset, half-width, colour
$\ell_i = \ d_i\ $	gesture length; 0 is a drop, > 0 a drawn line
K_i	footprint: capsule of radius r_i about the segment
$\Omega = [0, 1]^2, P$	canvas and its pixel count
ψ_i	backward material map of gesture i (Eq. 7)
Φ_i	exterior inverse of ψ_i (Eq. 8)
$\mathcal{R}_A, \mathcal{R}_U$	renderer with transport applied / omitted
$\mathcal{R}_D$	third renderer, 16 area-matched drops (Sec. 6.4)
σ	distance from a point to the gesture's segment
A_ℓ, P_ℓ	area, perimeter of the parallel set at σ (Eq. 5)
$u = A_\ell(\sigma)$	area coordinate; Φ is a translation in u
q	arclength along the iso-distance contour, normalised
v	q re-centred on the flank midpoint (Prop. 2)
α_i, τ	coverage of gesture i ; relaxation width (Eq. 10)
P	trainable palette, 8 colours (Sec. 5.1)
$s_i = (x_i, C_i, T_i)$	per-pixel state: position, colour, transmittance
$\lambda_i^C, \lambda_i^T, \lambda_i^\pi$	adjoints of $\mathcal{L}$ with respect to s_i (Eq. 15)
λ	weight on the length regulariser (Eq. 4)

Table 2: Notation. Subscript i indexes gestures throughout; the render processes them from N down to 1, so state indices *decrease* as rendering proceeds.

The definition separates the structural property needed by the inverse problem from the accuracy of a particular fluid approximation. We restrict to responses determined by the gesture alone: ψ_i does not depend on the current pigment loading. The exterior transport maps for insertions at the same segment commute because the operator below translates an area coordinate. Coloured deposition operations need not commute, since their coverage is ordered. Insertions at different segments generally do not, because the second acts on material already moved by the first.

The inverse problem is

$$\min_{\theta} \mathcal{L}(\mathcal{R}(\Pi(\theta)), I^*) + \lambda \mathcal{P}(\Pi(\theta)), \quad (4)$$

over a smooth parameterisation $\theta \mapsto \Pi(\theta)$ that enforces the feasible set by construction (Sec. 5.1), with data term $\mathcal{L}$ and regulariser $\mathcal{P}$. Our task is to obtain a program attaining low reconstruction loss under the displacing renderer. The inert-mark case and a closed-form pre-image correction are comparison methods, not alternative definitions of the target task.

Required properties. The construction relies on five properties. Four are properties of a single map: (P1) a closed-form backward map; (P2) a computable inverse (closed-form here); (P3) preservation of area outside newly deposited material; and (P4) non-injectivity confined to

the deposition set K_i . P1 evaluates the renderer, P2 regenerates states, P3 provides incompressible area bookkeeping, and P4 identifies the trajectory samples to record; their number is measured rather than bounded by deposited area, and computable iterative inverses can also support replay (Sec. 5.2). The fifth is a property of the *family*: (P5) gesture type varies continuously within it, and every member satisfies P1–P4. Without P5 the choice between a drop and a drawn deposit is combinatorial and has to be searched; with it, type is one more differentiable co-ordinate. The operator below has all five, and Sec. 4.2 explains what each one excludes.

4 The capsule insertion operator

We now specify ψ_i for an incompressible surface. Fix a gesture with segment of length ℓ and half-width r , and use coordinates adapted to it: $\sigma(x) = \text{dist}(x, \text{segment})$, and $q \in [0, 1]$ the arclength along the iso-distance contour $\{\sigma = \text{const}\}$ normalised by that contour's perimeter. By Steiner's formula the parallel set at distance σ has area and perimeter

$$A_\ell(\sigma) = 2\ell\sigma + \pi\sigma^2, \quad P_\ell(\sigma) = 2\ell + 2\pi\sigma = A'_\ell(\sigma). \quad (5)$$

Writing $x(\sigma, q)$ with unit normal n and unit tangent T of the contour, $\partial_q x = P_\ell(\sigma)T$ and $\partial_\sigma x = n + b(\sigma, q)T$ almost everywhere, for a tangential chart-drift term b . Thus $|\partial_\sigma x \times \partial_q x| = P_\ell(\sigma)$ and $dA = P_\ell(\sigma) d\sigma dq$. Introduce the *area coordinate* $u = A_\ell(\sigma)$; then $dA = du dq$. The chart is defined for $\sigma > 0$. The maps are piecewise smooth and locally Lipschitz on their open exterior domains; chart boundaries do not affect the area calculation.

Insertion. The gesture inserts material of area $A_\ell(r)$ and pushes the surrounding surface outward. Define the forward map in area–arclength coordinates by

$$\Phi : (u, v) \mapsto (u + A_\ell(r), v), \quad u > 0, \quad (6)$$

where $v = q - \ell/(2P_\ell(\sigma))$ is arclength measured from the midpoint of the capsule's flank rather than from a corner of it. Preserving the raw q instead would also be measure-preserving; Proposition 2 is the reason we do not.

Proposition 1 (Measure preservation). *Φ is measure-preserving and maps the plane minus the segment bijectively onto the plane minus the closed footprint K , that is onto $\{\sigma > r\}$. The segment is not in the domain; the limit $u \rightarrow 0$ from the exterior reaches ∂K .*

Proof. The shift from q to $v = q - \ell/(2P_\ell(\sigma))$ preserves the area element, so $dA = du dv$. In (u, v) , Φ is a translation with Jacobian determinant 1. It sends $\{u > 0\}$ onto $\{u > A_\ell(r)\} = \{\sigma > r\}$, the limit $u \rightarrow 0$ onto ∂K , and translation is a bijection. $\square$

The exterior backward map is $\psi = \Phi^{-1}$, defined on $\sigma' > r$ by $A_\ell(\sigma) = A_\ell(\sigma') - A_\ell(r)$. Both directions are

quadratic in the unknown; each is written as the root that is free of cancellation:

$$\sigma = \frac{C}{\ell + \sqrt{\ell^2 + \pi C}}, \quad C = (\sigma' - r)(2\ell + \pi(\sigma' + r)), \quad (7)$$

$$\sigma' = \frac{B}{\ell + \sqrt{\ell^2 + \pi B}}, \quad B = 2\ell(\sigma + r) + \pi(\sigma^2 + r^2). \quad (8)$$

Here $C = A_\ell(\sigma') - A_\ell(r)$ and $B = A_\ell(\sigma) + A_\ell(r)$. Equation (7) renders; (8) is its exact inverse and is what the adjoint of Sec. 5.2 iterates. The factored C and the conjugate root matter in the regime $\sigma' \rightarrow r$, where every pixel adjacent to a fresh gesture lives; the conjugate form of (8) matters when $\ell/\pi \gg \sigma, r$, the long-thin regime the continuous gesture type produces. At $\ell = 0$, (7) is the drop map $\sigma = \sqrt{\sigma'^2 - r^2}$ of [8].

The tangential coordinate. Equation (6) fixes the radial motion and preserves the arclength coordinate. Which one is preserved is a choice, and not a neutral one.

Proposition 2 (Centred arclength). *Let $\delta(u)$ be a continuously differentiable function of u alone. Every map $(u, q) \mapsto (u + A_\ell(r), q + \delta(u))$ is measure-preserving. Among those that depend continuously on the inserted area and reduce to the identity at zero area, exactly one commutes with the reflection of the capsule across its perpendicular bisector, the mirror line through the flank midpoints: the one that preserves the centred coordinate $v = q - \ell/(2P_\ell(\sigma))$, i.e. arclength measured from the flank midpoint.*

Proof. The Jacobian of $(u, q) \mapsto (u + A, q + \delta(u))$ is $\begin{pmatrix} 1 & 0 \\ \delta'(u) & 1 \end{pmatrix}$, of determinant 1. With the origin at a flank corner the flank midpoint sits at $q = \ell/(2P_\ell(\sigma))$, which varies with σ , hence with u ; so $v = q - \ell/(2P_\ell(\sigma))$ is a shift of the form $\delta(u)$ and the family is the same family written in v . Since σ is reflection-invariant, that reflection acts as $v \mapsto -v$ at fixed u ; a map $v \mapsto v + \delta(u)$ commutes with it iff $-v + \delta(u) = -(v + \delta(u))$ for all v , i.e. $2\delta \equiv 0$ modulo the period of q , so $\delta \equiv 0$ or $\delta \equiv \frac{1}{2}$. For a family that depends continuously on the inserted area and reduces to the identity at zero area, the half-turn branch is excluded. $\square$

The tangential transport is thus fixed by symmetry, not by physics: the physical injection flow moves material along the gradient of a harmonic potential, whose level sets are not the parallel sets of the segment except at $\ell = 0$. The operator reproduces inserted area exactly and streamline geometry approximately; Sec. 4.1 measures by how much.

Choice of skeleton. The capsule needs projection onto the skeleton, arclength along its parallel curves, and an invertible area law, all in closed form; for a straight segment

property (max over 200,000 exterior pts)	float32	float64
round trip $\Phi \circ \psi = \text{id}$	1.9×10^{-6}	5.7×10^{-15}
area Jacobian $ \det J - 1 $	1.1×10^{-6}	1.6×10^{-15}
drop limit, $\ell = 10^{-6}$	2.7×10^{-6}	2.9×10^{-6}
midplane reflection, centred v	2.7×10^{-6}	5.9×10^{-15}
midplane reflection, raw q	4.6×10^{-2}	4.6×10^{-2}

Table 3: Numerical verification of Propositions 1 and 2 and of Equations (7)–(8), in canvas units, on a capsule with $\ell = 0.10$, $r = 0.03$. The Jacobian is evaluated by exact differentiation of the implemented map, so $\det J = 1$ holds to machine precision, as Proposition 1 requires. The last row is the same test with the arclength origin at a flank corner rather than the flank midpoint: preserving raw q breaks the capsule’s mirror symmetry by four orders of magnitude more than the discretisation, which is what Proposition 2 rules out.

all three are elementary, and the area law is the binding constraint. Steiner’s formula $A_\ell(\sigma) = 2\ell\sigma + \pi\sigma^2$ counts the parallel set of a skeleton correctly only for σ below the skeleton’s reach; beyond it the parallel set self-overlaps and the formula over-counts, which breaks measure preservation (a circular arc of radius R has reach R and over-counts by several percent at $\sigma = 2R$). The renderer evaluates the law only on the canvas, so the construction requires a reach exceeding $\text{diam}(\Omega)$. Two consequences follow. The formula is exact at every distance only when the reach is infinite, which by Federer’s characterisation [27] means the skeleton is convex; the only compact convex curves are segments and points, so the segment is the unique skeleton for which the parallel-set area law holds everywhere. On a bounded canvas the requirement is weaker: a circular arc of radius $R > \text{diam}(\Omega)$ satisfies (5) exactly wherever the renderer looks, and also admits closed-form projection and elementary arclength, whereas a cubic Bézier fails on those two counts, its nearest-point projection being the root of a quintic and its arclength an elliptic integral. We develop the segment, which is exact without a reach constraint, and leave curved skeletons under a reach constraint to future work. Sec. 9 uses this as the condition for another medium.

Role of the arclength coordinate. Normalised arclength provides the area chart $dA = du dq$. Within that chart, any admissible tangential shift in Proposition 2 preserves area, and centred arclength selects the reflection-symmetric family connected to the identity. Computing this chart consistently in both directions is required for the stated round-trip identity. Table 3 measures the symmetry error introduced by preserving the uncentred coordinate instead.

The chain. With ψ_i given by (7) in gesture i ’s coordinates, extended to K_i by clamping C to zero — which sets $\sigma = 0$ and preserves the centred arclength, so a point at signed arclength t from the flank midpoint, at distance σ' on the flank, goes to position $\ell t/(\ell + \pi\sigma')$ on the segment; this extension is continuous across ∂K_i , where it agrees

ℓ/r	$D(\psi_A, \psi_L)$	$D(\psi_D, \psi_L)$	$D(\psi_A, \psi_D)$
0.1	1.8%	0.2%	1.8%
0.25	4.5%	0.6%	4.6%
0.5	8.8%	1.3%	8.9%
1.0	16.5%	3.5%	16.9%
1.5	22.6%	6.2%	23.5%
2.0	26.9%	9.2%	28.5%
3.0	30.7%	14.6%	34.1%
5.0	29.0%	20.6%	35.7%
10.0	30.0%	22.6%	34.0%

Table 4: Displacement discrepancy (9) between the capsule operator ψ_A , the sixteen-drop operator ψ_D of Sec. 6.4, and quasi-static injection of the same area by a uniform line source in 2-D potential flow, ψ_L , as a function of aspect ratio. Line gestures of the recovered programs have ℓ/r quartiles 1.0, 1.9, 3.6 (90th percentile 6.0). At the median aspect ratio ψ_D is closer to the potential flow than ψ_A is. All three agree as $\ell \rightarrow 0$: at $\ell = 0$ the capsule is identically the incompressible cylinder-insertion map $\sigma = \sqrt{\sigma'^2 - r^2}$, which is where every insertion operator must start.

with the exterior limit. It is not nearest-point projection, and it is what the implementation computes — (2)–(3) define the transport renderer $\mathcal{R}_A$; setting $\psi_i = \text{id}$ gives the inert-mark model $\mathcal{R}_U$. Both are evaluated by the same recurrence. The operator acts on the free plane: there is no wall, so a bounded tray with a no-flux boundary is not modelled (Sec. 10).

4.1 Fidelity of the surrogate

To quantify the discrepancy between the operator and the physical flow it approximates, and how far the evaluator of Sec. 6.4 is from both, we use one functional. For two backward maps of the same gesture, on the parallel curve $\Gamma = \{\sigma' = 2r\}$ one half-width outside the footprint after insertion,

$$D(\psi_1, \psi_2) = \frac{\max_{x \in \Gamma} \|\psi_1(x) - \psi_2(x)\|}{\max_{x \in \Gamma} \|x - \psi_1(x)\|}, \quad (9)$$

the largest disagreement between the two pre-images relative to the mean displacement ψ_1 applies there. As reference we take ψ_L : quasi-static injection of the same area $A_\ell(r)$ by a uniform line source on the segment in 2-D potential flow, whose velocity is elementary (logarithms and arctangents) and whose particle paths we integrate backward for the injection time. All three maps insert the same area, so D measures foliation and tangential transport, not mass. Table 4: at the median aspect ratio of the recovered gestures ($\ell/r \approx 2$) the capsule operator differs from ψ_L by 27% under D , saturating near 30% for long gestures and vanishing as $\ell \rightarrow 0$, where it is exact.

4.2 Design rationale

The operator is not chosen for fidelity. It is the weakest model that supports the inverse problem, and each of its properties is forced by the previous one.

Comparison with a discretised fluid solver. Marbling has been simulated directly: Acar and Boulanger integrate a multiscale fluid model and reproduce the response of floating pigment to user input [9]. Pigment injection is not the deciding factor: a source term poses no difficulty, and injection is in any case the origin of the obstruction characterised in Lemma 1, which no change of forward model removes. Three other considerations are decisive. First, a discretised solve supplies a flow map only numerically, and its inverse only by integrating backwards, which the viscous part makes ill-posed; the replay of Sec. 5.2 then has nothing to regenerate from and the trajectory must be stored, which at $N = 2000$ and 1024^2 is the 50 GB of storage that the replay scheme of Sec. 5.2 is designed to avoid (Table 6). Second, area preservation becomes approximate: numerical diffusion and mass drift accumulate over 2000 sequential gestures, and the deposited-area bookkeeping of Sec. 7 — an exact resource with the exact gradient $\partial_r A_\ell = P_\ell$ — is no longer exact. Third, cost: a fit is 240 optimisation steps, each a forward and backward pass through all N gestures, which at 0.52 s per closed-form render step already totals about four minutes. Gradients through very long advection chains are also poorly conditioned, which would arise in full for a chain of 2000 gestures with internal substeps.

A full solver also models phenomena outside the regime of interest. A marbling bath is creeping flow: viscosity-dominated and effectively inertia-free, so the governing model is Stokes rather than Navier–Stokes. This is why the reference against which we measure the operator, ψ_L of Sec. 4.1, is a line source in potential flow, and why Jaffer’s stylus maps linearise at low Reynolds number [10].

Continuous gesture type. Gesture type is a continuous parameter here, not a discrete choice. A vocabulary offering a drop and a drawn line as separate primitives would make type combinatorial: the optimiser could adjust a mark but never turn one kind of mark into the other, and the type choice would require discrete search rather than gradient-based optimisation. The capsule interpolates the two along its length $\ell = \|d\|$, with $\ell = 0$ a disc and $\ell > 0$ a drawn deposit, and the whole family — not only its endpoints — carries the closed-form inverse (8). Invertibility therefore survives every intermediate shape the optimiser passes through, which is what allows a single differentiable parameter to carry the type. The continuous parameter is used in practice: 78% of recovered gestures have $\ell_i \geq 0.004$ and 59% have $\ell_i > r_i$, and fixing $\ell_i = 0$ costs 6.2% on all five references (Sec. 8).

Summary of design constraints. The five properties of Sec. 3, and little freedom in how to meet them: exact area preservation fixes the radial motion, the reach condition restricts the skeleton to a segment, and reflection symmetry fixes the tangential gauge. The cost is a 27% discrepancy from potential flow at the median aspect ratio

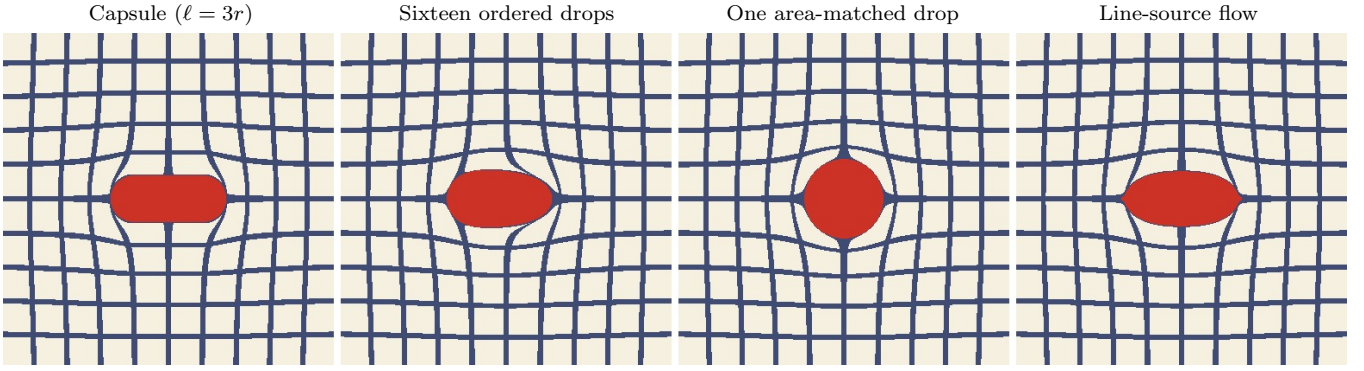


Figure 1: One gesture of the same inserted area under four operators. A grid carried by the sheet is pulled back through each backward map; the deposit is red. Left to right: the capsule (ours, $\ell = 3r$), one closed-form map that inserts an elongated deposit; sixteen ordered drops along the same segment, whose displacement is used by $\mathcal{R}_D$ in Sec. 6.4, with visible order effects; a single drop of the same area [8], which cannot produce a drawn deposit; and the line-source potential flow ψ_L , the physical reference of Eq. (9). The transfer experiment retains capsule coverage while substituting the ordered-drop displacement.

(Table 4), measured against a reference that approximates the physical flow more closely than our map does.

5 Inverse rendering

5.1 Parameterisation and relaxation

Every constraint is enforced by construction, so (4) is unconstrained in θ . Half-width is $r = r_{lo} + (r_{hi} - r_{lo}) \text{sigmoid}(\theta_r)$; offset is $d = \ell_{\max} \tanh(\theta_d)$; anchor is $a = a_{lo} + (a_{hi} - a_{lo}) \text{sigmoid}(\theta_a)$ componentwise, with a window chosen either to keep the anchor on the canvas or to contain the whole footprint; colour is $c = \text{softmax}(\theta_c / \tau_c) P$ over a trainable palette $P \in [0, 1]^{k \times 3}$, itself a sigmoid of free parameters. Table 5 gives every constant.

The hard coverage $\mathbf{1}_{K_i}$ has no useful gradient. We relax it to

$$\alpha_\tau(x; g) = \text{sigmoid}\left(\frac{r - \sigma(x)}{\max(\tau r, \tau_{\min})}\right), \quad (10)$$

and anneal τ geometrically over the optimisation, so that early iterations see a smooth objective and late ones a sharp one; because $\tau_{\min} > 0$, optimisation always uses a finite-width relaxation and never the hard coverage itself. The relaxed coverage does not integrate to $A_\ell(r)$, so during optimisation the model is only approximately area-consistent; every reported number is computed at the hard render. Optimisation is by Adam with a cosine step-size schedule; every gesture, the palette and every colour weight are optimised jointly. Gesture order and count are fixed.

The deep-feature objective. Three series — the gesture-count and gesture-type ablations of Sec. 8 and the paint-budget sweep of Sec. 7 — were trained under a deep-feature data term rather than pixel MSE, and are read within themselves. It is the unit-normalised VGG16

feature distance: the reference and the render are normalised by the ImageNet channel statistics and passed through the convolutional stack of VGG16 with ImageNet weights; at `relu1.2`, `relu2.2`, `relu3.3` and `relu4.3` the per-location feature vectors of both images are normalised to unit length across channels, their squared difference is summed over channels and averaged over locations, and the four layer terms are summed. This is LPIPS-shaped but carries no learned weights, and is treated as a perceptual proxy in its own units.

Objective and metrics. The data term is pixel mean-squared error, computed on sRGB values as stored, without a transfer-function decode: the reference is read as 8-bit sRGB and divided by 255, and the palette lives in the same space. Linear light would reweight the error towards highlights; the choice made here is shared by every arm and every comparator, so it cancels in all reported contrasts. We use LPIPS-Alex [18] only as a secondary perceptual measurement. Optimisation uses the relaxed coverage of Eq. (10); every reported image error uses an exported program with hard coverage. This separation ensures that the relaxation used to obtain gradients cannot itself improve the reported scores.

5.2 The adjoint of the chain

Optimising a program of N coupled gestures requires a gradient through all N of them, and keeping every intermediate state for the backward pass is infeasible at the chain lengths required here. Two properties of the operator replace it: it is invertible in closed form, so states can be *regenerated* instead of stored, and its non-invertibility is confined to an explicitly characterisable set, so the exceptions can be *recorded*. Figure 2 shows the construction; Table 6 gives its cost.

Write the per-pixel state after gesture i has been processed as $s_{i-1} = (x_{i-1}, C_{i-1}, T_{i-1})$ — position, accumu-

gestures N / parameters	2000 / 26,024 (13 per gesture, palette 8×3)
half-width window	$r \in [0.6r^0, 1.7r^0]$; r^0 geometric from 0.120 to 0.005 over the program, so $r \in [0.003, 0.204]$
offset	$d = \ell_{\max} \tanh \theta_d$, $\ell_{\max} = 0.30$
coverage relaxation	τ : $0.35 \rightarrow 0.02$ geometric; floor $\tau_{\min} = 0.7/\text{res}$
colour	softmax over an 8-colour palette, temperature $1.0 \rightarrow 0.05$
regulariser	$\lambda \sum_i \ell_i$, $\lambda = 3 \times 10^{-4}$
optimiser	Adam; steps 0.012 (anchor), 0.018 (width), 0.015 (offset), 0.030 (colour), 0.010 (palette), with cosine decay; 240 iterations at 1024^2
objective scale	data term scaled by $\mathcal{L}_{\text{VGG}}(0)/\mathcal{L}_{\text{MSE}}(0)$ at initialisation, per run
evaluation	hard render $\mathbf{1}_K$ at 1024^2 , reference implementation, seed 0

Table 5: Optimisation settings. Constants were selected on flower and battal, together with one further sheet that is not part of the evaluation corpus, and then held fixed for the remaining references and matched controls.

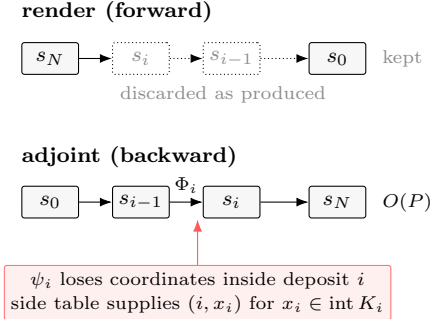


Figure 2: Regenerate, and trace the exceptions. The render produces per-pixel states $s_i = (x_i, C_i, T_i)$ in the order $N \rightarrow 0$; reverse-mode differentiation needs them in the order $0 \rightarrow N$. Exterior positions are reconstructed with Φ_i , and the remaining state with (13)–(14). Positions lost inside deposits are read from a side table (Lemma 1). The diagram shows the $O(P)$ active state; total memory also includes the side table and periodic position checkpoints.

lated colour, transmittance; indices decrease as processing proceeds, matching (2) — so that (2)–(3) read

$$\begin{aligned} C_{i-1} &= C_i + T_i \alpha_i c_i, & T_{i-1} &= T_i (1 - \alpha_i), \\ x_{i-1} &= \psi_i(x_i), \end{aligned} \quad (11)$$

with $s_N = (x, 0, 1)$ and $\mathcal{R}(\Pi)(x) = C_0 + T_0 c_0$. Reverse-mode differentiation of $\mathcal{L}$ through (11) requires the states s_i in the order $i = 0, \dots, N$; a forward pass produces them in the opposite order and retains only s_0 . Storing all of them costs $O(NP)$ for P pixels — about 50 GB for 2000 gestures at 1024^2 , an analytic estimate for a configuration that was not run — and checkpointing [13] trades it for recomputation. Instead we *regenerate* them. Because ψ_i is invertible when restricted to the exterior (Proposition 1, with inverse (8)),

$$x_i = \Phi_i(x_{i-1}), \quad (12)$$

$$\log T_i = \log T_{i-1} - \log(1 - \alpha_i), \quad (13)$$

$$C_i = C_{i-1} - T_i \alpha_i c_i, \quad (14)$$

which is (11) solved for s_i . The backward pass steps (12)–(14) alongside the vector-Jacobian products of (11), holding $O(P)$ state.

Lemma 1 (Support of the replay record). *Let K_i be the closed footprint. The exterior map Φ_i is a bijection from $\mathbb{R}^2 \setminus \{\text{segment}_i\}$ onto $\mathbb{R}^2 \setminus K_i$. Consequently, (12) reconstructs x_i uniquely whenever $x_i \notin K_i$. For $x_i \in K_i$, the extended ψ_i maps to the segment, outside the domain of Φ_i ; exterior inversion cannot reconstruct such samples. The exceptional set is the closed footprint K_i ; the implementation records its interior (below).*

Proof. For $x_i \notin K_i$, Proposition 1 gives $x_i = \Phi_i(\psi_i(x_i))$. For $x_i \in K_i$, the clamped extension sets $\sigma = 0$, so $\psi_i(x_i)$ lies on the segment and (12) is undefined. The extension collapses two-dimensional regions to that segment and is not injective. The boundary ∂K_i has zero planar area. $\square$

The boundary ∂K_i is null in the plane but not in a finite sample, because collapsed trajectories concentrate on it; the implementation therefore resolves ties by recording the open condition $\sigma' < r_i$ and treating the boundary as exterior, which errs towards regenerating rather than storing.

Relation to reversible backpropagation. Existing approaches that avoid storing a long trajectory share the assumption that the forward step is invertible. Reversible architectures are built so that it can [14]; reversible learning integrates the dynamics backwards [20]; path replay re-traces a light path from its seed [12]. A painting operator breaks that assumption differently: it *creates* material, so the map is not injective on the deposition set and no integration scheme can recover the lost state. The applicable principle is that of reversible learning [20], to store exactly what cannot be regenerated and nothing else, specialised here to a set that is identifiable during the forward pass and whose size we measure below rather than bound. We state it that way in Sec. 9 because it is the part of this paper most likely to be useful outside marbling.

The lemma gives the record this replay scheme needs: we store $(i, x_{i,p})$ for every pixel trajectory p inside footprint i and regenerate every other position with (12).

Remark (Size of the side table). Let $S = \sum_{i,p} \mathbf{1}[x_{i,p} \in \text{int } K_i]$ be the implemented record count. A unit-density estimate would be $P \sum_i |K_i|/|\Omega|$. It is not a general bound: collapsed trajectories can travel together and be counted again at subsequent insertions, and the pixel grid

introduces sampling error. At $N = 2000$ we measured 9.9–14.0 records per pixel at 128^2 , 256^2 and 1024^2 to the reported precision (0.12–0.18 GB at 1024^2). The corresponding unit-density area estimates are 4.4 for the initial program and 5.5–6.2 for recovered programs. These are measurements on the tested programs, not bounds.

Soft coverage makes transmittance reconstruction ill-conditioned when α_i approaches one, and a long float32 composition accumulates position error even though each map preserves area. Both are conditioning problems rather than approximations, and both are handled by choosing where to spend memory: transmittance is carried in logarithms, and positions are checkpointed periodically at an interval set so that measured replay drift stays below the 0.7-pixel annealing floor — the point at which a regenerated position can no longer change the relaxed coverage it is used to evaluate. With checkpoint interval k and the record count S defined above,

$$M = O(P + P\lceil N/k \rceil + S).$$

The constants depend on the implementation; S is measured rather than bounded by deposited area.


Structure of the gradient. Write λ_{i-1}^C , λ_{i-1}^T and λ_{i-1}^x for the adjoints of $\mathcal{L}$ with respect to the state s_{i-1} that step i produces. Differentiating (11) gives the adjoint step

$$\begin{aligned} \lambda_i^C &= \lambda_{i-1}^C, & \lambda_i^T &= (1 - \alpha_i) \lambda_{i-1}^T + \alpha_i \lambda_{i-1}^C \cdot c_i, \\ \lambda_i^x &= (D\psi_i)^\top \lambda_{i-1}^x + \mu_i \partial_x \alpha_i, \\ \mu_i &= T_i (\lambda_{i-1}^C \cdot c_i - \lambda_{i-1}^T), \end{aligned} \quad (15)$$

and the parameter gradients

$$\frac{\partial \mathcal{L}}{\partial c_i} = \sum_x \lambda_{i-1}^C T_i \alpha_i, \quad \frac{\partial \mathcal{L}}{\partial \theta_i} = \sum_x \left[\mu_i \frac{\partial \alpha_i}{\partial \theta_i} + \lambda_{i-1}^x \cdot \frac{\partial \psi_i}{\partial \theta_i} \right] \quad (16)$$

for the geometric parameters $\theta_i \in \{a_i, d_i, r_i\}$. Three regions of the canvas contribute differently (Fig. 3). Inside the footprint — the *hole* — $\alpha_i \rightarrow 1$: the gesture’s colour receives its gradient there, weighted by the transmittance T_i left by the gestures laid after it, so paint that is later covered receives no colour gradient. On the relaxed rim of width τ around ∂K_i , $\partial_\theta \alpha_i$ is non-zero: this is where the shape of the deposit is adjusted, through the sensitivity μ_i of the composite to coverage. Everywhere outside — the *rest* — $\alpha_i = 0$ and only the transport term acts: $\partial_\theta \psi_i$ is non-zero on the whole exterior, decaying as inserted area over perimeter, so changing the position, width or length of gesture i changes where every earlier deposit is sampled, and λ_{i-1}^x carries the sensitivity of all that earlier paint. The term $(D\psi_i)^\top \lambda_{i-1}^x$ pulls that accumulated sensitivity back through gesture i ’s map into the frame in which gestures $i + 1, \dots, N$ act, so each later gesture’s transport term receives gradient contributions from pigment deposited before gesture i . Inside the hole the extended ψ_i collapses to the segment and its derivative

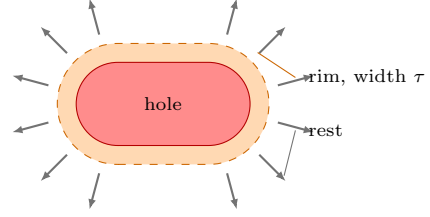

hole $\alpha_i \rightarrow 1$ colour gradient $\lambda_{i-1}^C T_i \alpha_i$, weighted by T_i
rim, width τ shape gradient $\mu_i \partial_\theta \alpha_i$
rest $\alpha_i = 0$ transport gradient $\lambda_{i-1}^x \cdot \partial_\theta \psi_i$, decaying as $A/P(\sigma)$

Figure 3: Where one gesture’s gradient comes from. Inside its footprint the gesture receives a colour gradient, weighted by the transmittance of the paint laid above it; on the relaxed rim it receives a shape gradient through the coverage; on the whole exterior it receives a transport gradient through ψ_i , because resizing or moving it changes where every earlier deposit is sampled. Paint beneath the hole is hidden ($T \rightarrow 0$) and receives neither gradient there; the spatial sensitivity of the earlier paint that remains visible is pulled back through $(D\psi_i)^\top$ to the gestures laid after it.

is rank-deficient, but there $T_{i-1} = T_i(1 - \alpha_i) \rightarrow 0$ occludes all earlier pigment, so the colour gradient of earlier paint is blocked at exactly the pixels where position no longer affects the rendered image. Replay makes every quantity in (15)–(16) available at step i from s_{i-1} and the side table; the capsule supplies ψ_i , its inverse and their derivatives in closed form, so no per-sample iterative solve is needed (an iterative alternative is compared in the supplement).

Memory and runtime. Table 6. Storing the full per-pixel trajectory at $N = 2000$, 1024^2 would need about 50 GB for the state alone, an analytic figure. Against the practical baseline — automatic differentiation with checkpoints every 20 gestures, 6.49 GB — regenerating costs 0.75 GB at a comparable step time (23.89 against 23.00 s). The baseline interval (20) was selected near its memory optimum and was not swept; across our own sweep the ratio ranges from 4.9 to $12.1\times$, and it is $8.7\times$ at the adopted interval of 256. Gradient error against the checkpointed-autograd gradient grows monotonically with the interval and is 7.4×10^{-3} relative at the adopted one, with cosine similarity 0.99997 over the full parameter vector, consistent with float32 error accumulating in the regenerated positions.

Fitting performance. The relevant outcome is the absolute memory footprint rather than the ratio: the fused implementation peaks at 1.72 GB and the PyTorch recurrence at 0.75 GB for a 2000-gesture program at 1024^2 , a fraction of one consumer GPU’s memory. A full optimisation of 240 steps takes 234 s on one RTX PRO 4000. The optimisation step — forward, backward and update — takes 0.55 s at $N = 2000$ and scales linearly in N : 0.075, 0.15, 0.30, 0.55 and 1.0 s at $N = 250, 500, 1000, 2000$ and 4000; at 512^2 it is 0.075 s and at 2048^2 2.5 s.

backward pass	peak (GB)	step (s)	vs. AD
stored trajectory	≈ 50	—	—
autograd, checkpoints every 20	6.49	23.00	1.0×
replay adjoint (PyTorch, ckpt 256)	0.75	23.89	8.7×
replay adjoint, fused (Triton)	1.72	0.52	3.8×

checkpoint	peak (GB)	vs. AD	grad. err	cosine
64	1.32	4.9×	4.2×10^{-3}	0.9999914
128	0.91	7.1×	5.5×10^{-3}	0.9999849
256	0.71	9.1×	7.4×10^{-3}	0.9999731
512	0.61	10.6×	1.1×10^{-2}	0.9999408
none	0.54	12.1×	1.7×10^{-2}	0.9998566

Table 6: The adjoint at the operating point ($N = 2000$, 1024^2 , float32, one 24 GB GPU). Top: storing the trajectory at this depth would take about 50 GB for the $N \times P$ per-pixel states, an analytic figure we did not run, so the practical baseline is automatic differentiation with checkpoints every 20 gestures. That interval is within a few per cent of the memory-minimising one for this scheme, and was not forced by the card, which had headroom. Regenerating the trajectory instead costs 0.75 GB at a comparable step time (23.89 against 23.00s); the fused kernels trade some of that back for a $44\times$ faster step than checkpointed autograd, and are used for the transport-arm fits. The side table holds 9.88 records per pixel (124 MB). Bottom: the checkpoint interval trades memory against float32 drift in the regenerated positions; we use 256. The sweep is a separate run from the top table, which is why its 256 row reads 0.71 rather than 0.75 GB. Gradient error is relative to the checkpointed-autograd gradient, exact up to float32 rounding, and the cosine similarity of the full parameter gradient never falls below 0.9998.

Implementation. The vector–Jacobian products of (11) are written analytically rather than obtained by differentiating the renderer, which is what allows the whole step to be fused into a single kernel and is the difference between the two bottom rows of Table 6. They agree with automatic differentiation to 5.4×10^{-15} in float64 and with central differences of the rendered value to 2.5×10^{-9} ; the float32 error of the full 2000-gesture replay is the 7.4×10^{-3} of Table 6.

6 Experiments

6.1 Protocol

We use five scanned *ebru* marbled sheets as target images: flower, tulip, teardrops, battal, and lale. *Ebru* is a living practice, inscribed on the UNESCO Representative List of the Intangible Cultural Heritage of Humanity in 2014, and it has its own named, ordered gesture vocabulary: *battal* is the sprinkled ground, and the floral patterns are drawn with a stylus over such a ground [34]. That vocabulary is not ours. Four of the five references were physically made largely by zero-injection stylus and comb work, which our gesture family excludes (Sec. 10), so the recovered programs are not the traditional gestures and are not claimed to be. This also bears on Sec. 6.5:

where the model’s gesture family differs from the one that made a sheet, there is no correspondence to recover. All five are photographs of marbled sheets published on Wikimedia Commons under free licences, cropped to a centre square fixed before any fitting and resampled to 512^2 ; the supplement lists each file, its author and its licence, and the three out-of-domain artworks of Sec. 6.2 are public-domain reproductions from the same source. The crops are native 512^2 and are resampled to 1024^2 by Lanczos filtering for fitting and scoring; the 512^2 column of Table 14 shows the effect of replay and scoring at that common resolution. The images are used only as optimisation targets. Flower and battal were used while selecting the constants in Table 5, together with a sixth sheet excluded from the corpus because its source could not be documented; the remaining three were held out from that process. Every main result is a hard render of an exported program. Unless noted otherwise, each program has $N = 2000$ gestures and 26,024 optimised parameters, and is fitted for 240 Adam steps from the same rule-based initial program.

We denote by Π_A the program obtained after the finite-step optimisation of Eq. (4) with the relaxed transport renderer. For the structural control, Π_U is obtained with each material map set to the identity, using the same parameter family and step budget.

Π_A is trained through the fused implementation and Π_U through the reference implementation, which alone exposes the inert-mark path. The data-term scale of Table 5 is set from each arm’s own initial loss and differs between arms by $1.36\text{--}2.22\times$, so the effective regularisation differs by that factor. That factor does not account for the difference the control reports: Π_U reaches a *lower* loss than Π_A does under each arm’s own renderer on 4/5 references in MSE and 5/5 in LPIPS-Alex (Sec. 6.2), so the gap cannot be attributed to under-optimisation of the control. Adam is also approximately invariant to a global scale on the objective, so the mismatch acts mainly on the relative weight of the length regulariser. To keep evaluation matched, both exported programs are re-rendered by the same hard reference implementation under both models, producing the four cells $\mathcal{L}(\mathcal{R}_M(\Pi_X), I^*)$, $M, X \in \{A, U\}$: two optimisation runs per reference, each scored twice. Pixel MSE is primary and LPIPS-Alex is reported as a secondary metric.

External stroke fitter. Stylized Neural Painting [4] fits parametric brush strokes to an image through a differentiable stroke renderer. Its strokes are inert marks, so it is a raster comparator: it can be compared with Π_A only as an image and with Π_U only under $\mathcal{R}_U$. We use the authors’ code and pre-trained oil-paint renderer with the released defaults: the progressive schedule of five grid levels with 36 strokes per block, giving 1980 strokes of 12 parameters (23,760 values, against our 26,024), of which 1756–1902 pass the renderer’s minimum-size test; the paper’s objective (L_1 plus optimal transport); and a

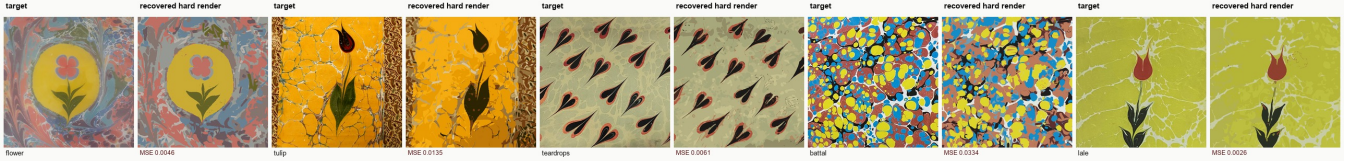


Figure 4: Target-to-program recovery. Each pair shows a reference image and the hard render obtained by replaying its recovered 2000-gesture deposit-and-transport program. The five references cover both repeated motifs and all-over patterns; no panel is selected by score.

hard render of the final strokes at 1024^2 . Each reference is fitted from a white and from a black initial canvas and the better is kept. The render is scored against the same 1024^2 target by the same code as every other row. The fit takes about 7 min per reference on the same card. A second seed moves each reference’s error by 0.7–3.7%.

Error scale and controls. Reference images differ in variance by almost an order of magnitude, so every error we report is normalised by the MSE of the best constant image, which puts the five references on one scale. With one exception the comparators are internal ablations: the inert-mark arm shares this paper’s vocabulary, initial program, seed, resolution and step budget and differs only in ψ_i , isolating the effect of transport. The exception is a published stroke fitter run at matched stroke count, which places that control against a system we did not build. Where two arms both sit above the constant-image baseline, we report their ratio only alongside it, since neither is then a reconstruction. Three series — the ablations of Sec. 8 and the paint-budget sweep of Sec. 7 — were trained under the deep-feature objective and are read against their own noise band in those units. The spreads in Table 12 measure how far a re-run moves and are used as such.

6.2 Recovered programs

Figure 4 shows the primary result: a single target image is converted into a replayable 2000-gesture program under the prescribed deposit-and-transport model. The hard-render MSE of the recovered programs is 0.0026–0.0334 across the five references. Repeated motifs and large silhouettes are retained, while the all-over battal pattern remains the hardest reference because its smallest structures approach the gesture-width floor. The identity of the hardest reference is informative: battal is the one pure-insertion pattern in the set and the model fits it worst ($2.59\times$), while the stylus-drawn florals, whose making our gesture family does not model at all, score best ($5.22\times$). The floor ratio tracks image statistics, not fidelity to the medium — a conclusion the out-of-domain targets below reinforce.

The scale for these errors is the best constant image, whose MSE is the image variance. Every pixel-MSE image error in the cross-method comparisons is reported nor-

malised by that floor. The recovered programs sit below it on all five references, by a geometric mean of $3.67\times$ (Table 7); re-fitted from three seeds the figure is $3.71\times$ on the seed geometric mean and $3.66\times$ on the worst seed, 5/5 in both cases (Sec. 6.6). The ratio calibrates rather than ranks: a 64^2 thumbnail with half the parameters reaches a lower pixel error still (Table 8), as any transport-free representation can.

An external stroke fitter. Stylized Neural Painting, run at matched stroke count (Sec. 6.1), is a raster of the same order as the recovered program: below the flat floor on 5/5 (geometric mean $3.11\times$, interval $[2.35, 4.13]$), ahead of Π_A in pixel MSE on 2/5 references and behind it on 3/5, and behind it in LPIPS-Alex on 4/5 (Table 7; the supplement gives the LPIPS cells and the renders). Its role here is to place the matched control. Under its own renderer $\mathcal{R}_U$, the inert-mark arm Π_U is a raster fitter of the same standing as the published one — ahead of it in pixel MSE on 4/5 and in LPIPS-Alex on 5/5 — so the program that lands above the floor once executed was not produced by a weak stroke fitter; it was produced by a competent one and executed under the transport its fitting ignored. That execution is the comparison a stroke-based method cannot enter, since its output has no transport arm.

The matched control isolates the role of coupled recovery. Fitting the same vocabulary with every material map set to the identity and then executing the result gives Π_U , which is $6.5\times$ worse than Π_A (95% interval 4.2–10.2). Π_U executed is *above* the flat floor on 5/5 references, a geometric mean $1.77\times$ worse than a single constant colour. When executed under transport, a program fitted without it no longer reconstructs the target. The underlying cells are in Table 7.

Under $\mathcal{R}_U$, Π_U reaches a lower loss than Π_A does under $\mathcal{R}_A$ on 4/5 references in MSE and 5/5 in LPIPS-Alex: fitting without transport is the easier problem, and if a raster approximation is all that is wanted, modelling transport is a cost. The benefit of modelling transport is a program that remains valid when executed under the transport model. The held-out references, which took no part in choosing the constants, show floor ratios of 2.91, 5.22 and $5.24\times$ against 3.25 and $2.59\times$ for the two development references.

Out of domain. The floor ratio is not evidence that anything specific to marbling has been captured. The same solver with the same settings, given three artworks instead of marbled sheets, reaches $3.8\times$ on *The Great Wave*, $2.7\times$ on *The Starry Night* and $8.5\times$ on the *Mona Lisa* (Fig. 5), the last higher than any ebru reference. The representation approximates non-marbling targets as readily; the three are shown to calibrate the ratios in Table 7. The stroke fitter, run on the same three, reaches 3.3 , 2.9 and $12.0\times$, ahead of the recovered program in pixel MSE on 2/3 and in LPIPS-Alex on 1/3 (supplement).

6.3 Closed-form compensation baseline

A natural alternative to joint optimisation is to fit an inert-mark program and then translate each gesture so that subsequent transport carries it to the position selected by the inert-mark fit. Because ψ has a closed-form inverse this can be done in one pass, with no gradients and no re-optimisation. We evaluate two variants: *anchor compensation* pre-images the segment start and carries the offset vector unchanged, and *endpoint compensation* pre-images both ends, which is stronger although it changes segment length and hence inserted area. Both run from the last gesture to the first, so each gesture is pre-imaged through the already-compensated geometry of every later one, at a cost of $N(N-1)/2$ point transforms ($1,999,000$ at $N = 2000$) and no derivatives. Radii are left unchanged: the deformation of a footprint by later gestures is exactly what a one-pass point correction cannot repair.

Table 8. Closed-form geometry alone removes a median 44.7% of the inert-replay error and closes a median 52.4% of the gap to joint recovery. But the compensated program still only reaches the flat floor: it beats a single constant colour on 2 of 5 references. One-pass correction remains less accurate than joint fitting on these examples.

Lemma 1 identifies an obstruction to this pointwise correction. Pre-imaging gesture i through a later gesture j requires a point of Φ_j^{-1} ; if the point lies inside K_j there is none, because the extended ψ_j maps all of K_j to the segment, on which Φ_j is undefined. This occurs for 1362–1466 of the 2000 gestures. Where a pre-image does exist the correction is essentially exact — round trip within 7.9×10^{-5} canvas units — and where it does not, the error is 0.02 – 0.04 , several hundred times larger. The large point round-trip residuals occur in the blocked subset; the diagnostic is geometric, so it locates the failure of the correction rather than partitioning the image-space residual. The same loss of coordinates that replay storage handles is what obstructs an exact pre-image correction.

Two checks establish that the comparison is not an artefact of its construction: skipping a blocked step instead of clamping it onto the segment moves the geometric mean from $3.71\times$ to $3.67\times$, inside the re-run band, and compensating both endpoints rather than the anchor alone is better ($3.71\times$ against $4.40\times$), so the ceiling is not an artefact of correcting too few points. Closed-form knowledge

of the transport map is therefore not sufficient; the comparison does not isolate the value of gradients alone, since joint recovery also adjusts width, colour and visibility.

6.4 Transfer across transport constructions

To test whether recovery overfits the foliation of our capsule map, we score both programs under a third renderer $\mathcal{R}_D$ that was not used for fitting. Gesture i 's displacement is replaced by a composition of $K = 16$ published drop maps [8] placed along its segment, each of radius $s = \sqrt{A_{\ell_i}(r_i)/(K\pi)}$ so that the inserted area equals the gesture's own. Coverage is unchanged; only ψ_i is replaced. Each drop map preserves area on its exterior. Because capsule coverage is retained, $\mathcal{R}_D$ is a controlled hybrid renderer, not a simulation of the complete coloured ordered-drop deposition process. Its displacement is built from a published primitive and differs from $\mathcal{R}_A$: under (9) it is 17 – 36% from ψ_A over the first-quartile to ninetyth-percentile aspect ratios of the recovered gestures (Table 4), and it is *closer* to line-source potential flow than ψ_A is (9% against 27% at the median aspect ratio). Figure 1 shows the two operators, a single drop of the same area, and the reference flow acting on a grid.

The substitution degrades Π_A , and Table 9 quantifies the effect: executed under the alternative operator, Π_A is worse by 17.8 to 51.6% than under the operator it was fitted for (median 24.8%), while Π_U , whose fit is invalidated under either transport renderer, scores within 1% of its $\mathcal{R}_A$ value; against its own fitting renderer $\mathcal{R}_U$, which applies no transport, its change is several hundred percent, and the table reports the $\mathcal{R}_A$ comparison for both programs. That degradation measures how much of the fit is specific to our foliation. What survives it is that Π_A remains a reconstruction — still below the flat floor on 5/5 — while Π_U remains above it, and the $4.9\times$ separation holds (95% interval 3.6 – 6.8 , same direction on all five references and in LPIPS-Alex).

Two qualifications. $\mathcal{R}_D$ is a finite ordered-drop alternative built from a published primitive, not an independent physical model: its K drops are laid in one sweep along the segment, so it carries an injection schedule of its own, and refining K is not a limit process towards the line source. Table 4 measures what makes it a useful arbiter: at the median aspect ratio it sits closer to ψ_L than our map does. The reference ψ_L is not itself the evaluator because it is an integration rather than a map: each point is carried by an RK4 solve of the source velocity, so it cannot be composed 2000 times at image resolution the way a closed-form displacement can. That is the constraint of Sec. 4.2 appearing again in the evaluation, and it is why the arbiter is built from a published closed-form primitive. The test varies the foliation of an insertion operator at matched inserted area; it says nothing about a different displacement class, such as the zero-injection tine and stylus operators of [8], which are area-preserving



Figure 5: Out-of-domain targets. Three artworks and the replay of the 2000-gesture program recovered from each under the headline settings, with the floor ratio. The programs approximate non-marbling targets using the same deposition vocabulary; this ratio does not measure marbling fidelity.

reference	flat floor	transport applied ($\mathcal{R}_A$)				transport omitted ($\mathcal{R}_U$)		external, raster	
		Π_A	Π_U	floor/ Π_A	Π_U /floor	Π_A	Π_U	SNP	floor/SNP
flower	0.0151	0.0046	0.0282	3.25×	1.87×	0.0179	0.0053	0.0039	3.83×
tulip [†]	0.0393	0.0135	0.0643	2.90×	1.64×	0.0399	0.0121	0.0152	2.58×
teardrops [†]	0.0317	0.0061	0.0544	5.22×	1.72×	0.0353	0.0048	0.0077	4.14×
battal	0.0865	0.0334	0.1531	2.59×	1.77×	0.1285	0.0213	0.0329	2.63×
lale [†]	0.0138	0.0026	0.0259	5.22×	1.88×	0.0154	0.0022	0.0051	2.72×
geometric mean				3.67×	1.77×				3.11×
95% CI				[2.43, 5.55]	[1.65, 1.90]				[2.35, 4.13]
three seeds, GM / worst				3.71×	3.66×				

Table 7: Recovery error against the flat floor, and the matched transport control (hard-render pixel MSE at 1024^2 ; lower is better). *Flat floor* is the MSE of the best constant image, the cheapest non-trivial reconstruction of that reference. Π_A is recovered jointly through the transport chain; Π_U is fitted with every material map set to the identity. Both exported programs are scored by the same hard reference renderer under both models. Π_A beats the floor on 5/5 references (geometric mean $3.67\times$ below it). Π_U , executed, is *above* the floor on 5/5 — fitting without transport and then executing with it is worse than painting a single colour. Intervals are paired t -intervals on log-ratios. [†]: held out during development. *SNP* is Stylized Neural Painting [4] at matched stroke count, scored on its own 1024^2 render (Sec. 6.1); it fits inert marks and has no transport arm, so it is a raster comparator only.

and invertible and would be the natural next arbiter.

6.5 Synthetic ground truth

Every result so far is measured against historical sheets, where we cannot know whether *any* 2000-gesture program reproduces the target. That confounds two very different failures: insufficient model expressivity, and failure of the optimiser to find a good fit. To separate them we build targets with known generating programs. Twelve programs are drawn from the model’s own prior — the solver’s radius schedule, the empirical offset-length distribution of the recovered programs (median $\ell = 0.018$, 78% above the export threshold, matching Sec. 8), uniform anchors and a random eight-colour palette — and rendered under $\mathcal{R}_A$. Each target is therefore the exact render of a program that lies inside the feasible set, so a zero-error solution provably exists. We then recover from the image alone, with the settings of Table 5 unchanged.

Figure 8 shows what recovery looks like here, and Table 10 reports the image error and the gesture correspondence separately.

The image. Recovery reaches a geometric mean $2.27\times$ below the flat floor, against $3.67\times$ on the historical references. Exact representability does not make a target easier to fit. One candidate mechanism is that the historical sheets carry large-scale structure the optimiser can exploit while a program drawn from an uninformative prior does not (Fig. 8); testing it is future work. A zero-error program exists here by construction, so on this family the residual is not model misfit but the optimiser’s approximation gap, arising from the relaxed objective, the regulariser and the finite step budget. This bound applies to the synthetic family; the historical sheets are addressed by the next control, which re-fits the reference renders of the recovered historical programs. These targets are also representable by construction. Recovery reaches a geometric mean $3.98\times$ below each render’s own constant-image baseline, compared with $3.67\times$ for the original scans (one run per reference, headline settings). The targets and their baseline variances differ, so these ratios do not bound model misfit on the original scans. They show that the procedure leaves residual error even when fitting images produced by its own model.

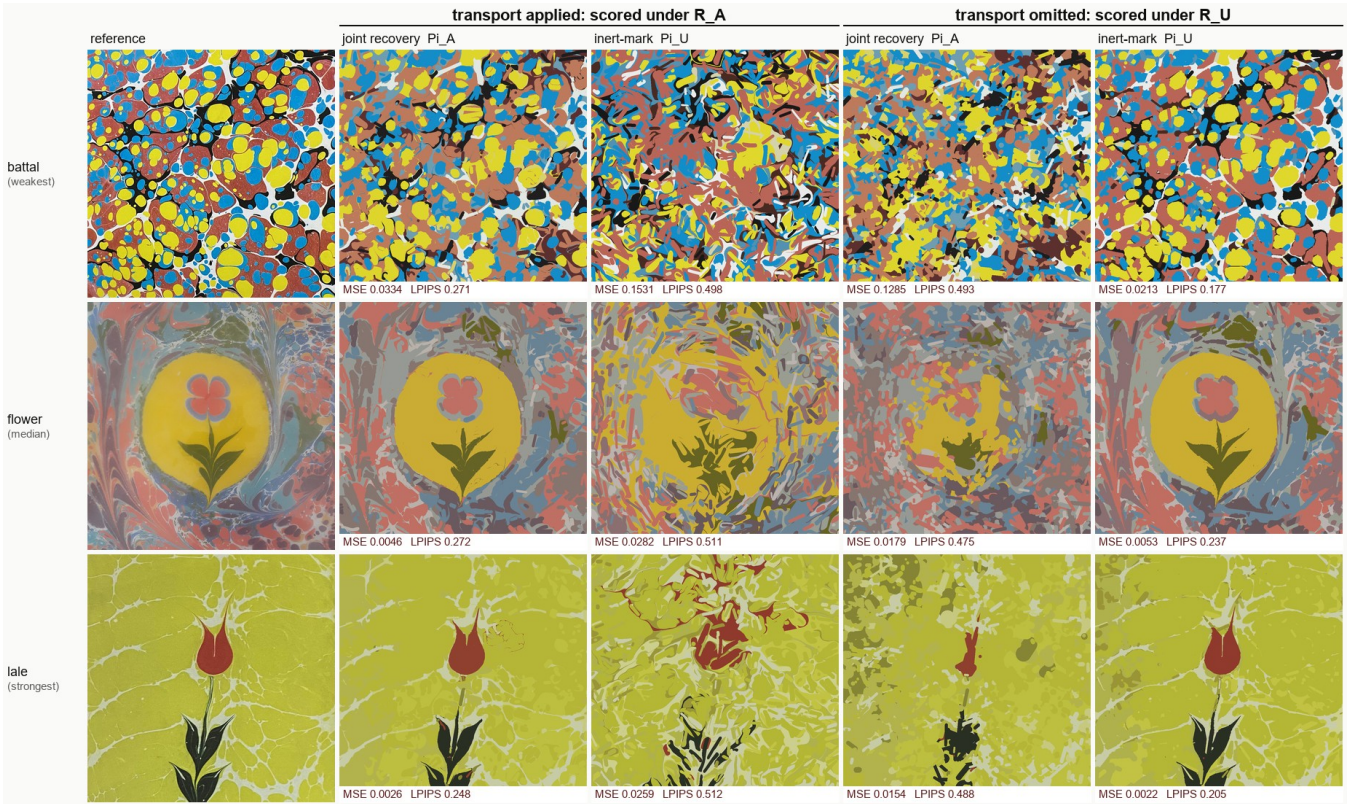


Figure 6: Why the ratios in Table 7 are reported against a floor. Three of the five references — battal, flower and lale: the weakest, the median and one of the two strongest floor ratios. Left pair: both programs executed with transport ($\mathcal{R}_A$). Right pair: both scored with transport omitted ($\mathcal{R}_U$). Each program reconstructs under the model it was fitted for and disintegrates under the other, but the failures are not degraded reconstructions: the two inner result columns (Π_U executed, Π_A imagined) are visibly further from the target than a single flat colour would be, which is what the floor column of Table 7 records. All five references in the supplement.

The program. We restrict matching to gestures owning at least 50 pixels at 1024^2 (scaled for the 512^2 matching pass), about 1030 of the 2000 true gestures. Excluded gestures may still be partially visible and localisable; the threshold only defines the evaluated subset. We use optimal assignment on segment-midpoint distance and compare with another target’s recovered program, a null that shares the fitting procedure and has a similarly sized candidate pool, unlike a null drawn from another ground-truth program, which has systematically fewer visible gestures.

The aggregate statistics are similar: median matched distance 0.0168 against 0.0170 for the null, and 32% of matches inside the true radius for both (Table 10). The test therefore gives no evidence of generating-gesture correspondence beyond the cross-target null, for this procedure and this positional statistic.

6.6 Aggregation and numerical variation

The reference image is the unit of analysis ($n = 5$). Because losses are positive and comparisons are multiplicative, we aggregate ratios on the log scale and report geometric means with paired 95% intervals; per-reference values remain visible in every table. Table 12 gives the noise

floors, and there are two, in different units. In pixel MSE on the transport arm — the units of every cross-method comparison — two runs of one configuration and seed differ by 0.6–4.6%, and three seeds on all five references spread 2.7–6.7%, median 6.1%. In the deep-feature units of the ablation series of Sec. 8, the across-seed spread is 0.5–0.6%, and that is the band those series are read against. The seed runs use the headline configuration; seed 0 differs from the headline run by up to 1.3%, which we count in the spread. All cross-method scores are produced by one reference renderer from exported programs; training-time scores, taken before palette colours are snapped at export, are 0.9–14.6% lower (Table 12) and are not used for any comparison. The small reference set permits the large, consistent within-image comparisons reported here, but not population-level claims about marbling styles.

7 Program-level output

The solver returns ordered parameters rather than a final raster image. Rendering prefixes of the sequence exposes how the design is assembled (Fig. 9); individual gestures, colours or whole stages can be edited and replayed through

reference	flat floor	inert replay	anchor	endpoint	blocked
flower	0.0151	0.0282	0.0175	0.0156	1466
tulip	0.0393	0.0643	0.0480	0.0412	1454
teardrops	0.0317	0.0544	0.0353	0.0291	1371
battal	0.0865	0.1531	0.0974	0.0833	1362
lale	0.0138	0.0259	0.0196	0.0148	1422

method (geometric mean, five references)	GM hard MSE	vs. joint
flat floor (best constant image)	0.029530	3.67×
64 ² thumbnail (12,288 values)	0.006777	0.85×
SNP [4], 1980 strokes (23,760 values)	0.009478	1.18×
inert replay (Π_U under $\mathcal{R}_A$)	0.052296	6.53×
anchor pre-image	0.035528	4.44×
endpoint pre-image	0.029687	3.71×
endpoint, blocked steps skipped	0.029374	3.67×
joint recovery (ours)	0.008006	1.00×

Table 8: One-pass closed-form compensation against joint recovery, all five references at 1024^2 , hard render, one reference renderer. Each variant pre-images an inert-mark program’s gestures through every later gesture’s inverse map, without gradients or re-optimisation. The 64² thumbnail is the reference downsampled and bilinearly upsampled; it is not a method, and it is listed because it bounds what pixel error alone can establish at this parameter count. The stroke-fitter row is the external raster comparator of Table 7, included on the same footing. *Blocked* counts gestures of the endpoint variant whose pre-image fails to exist at some step: 1362–1466 of 2000 (68–73%). By Lemma 1 no exact pre-image exists for those gestures, so no correction of this form can place them, and they carry essentially all of the point round-trip residual — where a pre-image exists the correction is exact to 7.9×10^{-5} canvas units. Skipping the blocked steps instead of clamping them changes the result by less than the re-run band ($3.67\times$ against $3.71\times$), so the baseline is not handicapped by that choice. Endpoint compensation removes a median 44.7% of the inert-replay error and closes a median 52.4% of the gap to joint recovery, yet still lands at the trivial floor: it beats a single constant colour on only 2 of 5 references. Its error is $3.71\times$ that of joint recovery (95% interval $[2.44, 5.62]$, 5/5).

the same dynamics.

Editing the program. Figure 10 shows three representative edits, each replayed by the hard renderer under the same dynamics with nothing re-optimised. Inserting one drop into the ground at gesture 1000 pushes the pigment laid before it and is itself pushed by everything after it, so the vein pattern re-flows around it as the insertion model prescribes while the motif is untouched. Recolouring the last fifth of the program is exact, because transport does not depend on pigment, and changes only the pixels those gestures own. Translating the last quarter moves the late structure and re-flows the earlier pattern around it. The edits change 7–41% of the pixels. One attempted edit fails: selecting the gestures that own a motif in the final image and translating their anchors does not translate the motif, because each gesture’s final position is the composition of every later map, and the selection also captures early gestures that contribute only marginally to the region. Moving a motif is a re-optimisation problem, not a parameter edit.

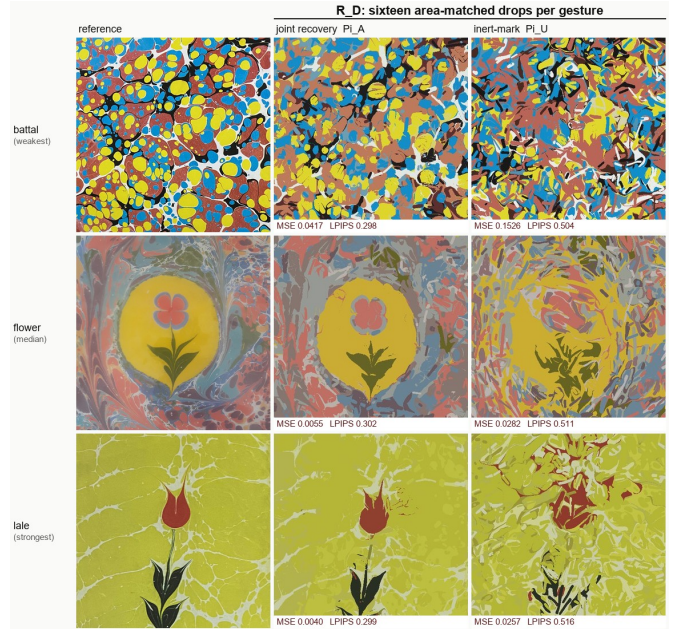


Figure 7: Under a transport neither program was fitted against. Both programs executed under $\mathcal{R}_D$, sixteen area-matched drop maps per gesture, same three references as Fig. 6. Π_A degrades — by a median +24.8% (Table 9) — but remains a reconstruction; Π_U does not become one. All five in the supplement.

Resolution. Gestures are specified in canvas coordinates, so a recovered program is a continuous-domain object and the raster resolution used for fitting should not be tied to it. Table 14 tests that directly: each program is optimised once at 1024^2 and then replayed unchanged at 512^2 and 2048^2 , scored against the reference resampled to the same grid. Replaying at 2048^2 moves the error by at most 0.23%; replaying at 512^2 changes it by at most 4%. Above the scans’ native 512^2 the target is an upsample, so those tests assess replay of the representation, not recovery of new detail.

The converse does not hold for fitting: programs fitted at 512^2 and replayed at 1024^2 reach $3.13\times$ the floor against $3.67\times$ for programs fitted at 1024^2 (per reference -3 to -31%), at about a seventh of the optimisation time, because the width floor and the relaxation are defined in pixels. A coarse-to-fine schedule recovers most of that loss: fitting at 512^2 for 200 steps with a free radius window and then continuing the same program at 1024^2 for 40 steps, with the relaxation started near its floor, reaches $3.75\times$ in geometric mean against $3.67\times$ for the headline fit, in 37 s of optimisation time against 132 s, one run per reference. The spread is wide — flower improves to $4.44\times$, lale falls from 5.22 to $3.97\times$ because the coarse stage assigns a wrong colour to the flower head of the lale motif, which forty fine steps do not undo — and relative to a 1024^2 fit with the same free radius ($3.98\times$) the schedule loses 6%. Table 13 gives the times and the per-reference errors.

reference	Π_A		Π_U		Π_U/Π_A
	MSE	vs. $\mathcal{R}_A$	MSE	vs. $\mathcal{R}_A$	
flower	0.0055	+17.8%	0.0282	-0.1%	$5.1\times$
tulip	0.0165	+22.3%	0.0647	+0.6%	$3.9\times$
teardrops	0.0088	+45.5%	0.0544	-0.0%	$6.2\times$
battal	0.0417	+24.8%	0.1526	-0.3%	$3.7\times$
lale	0.0040	+51.6%	0.0257	-1.0%	$6.4\times$
median		+24.8%		-0.1%	$5.1\times$
GM [95% CI]					$4.93\times [3.59, 6.79]$

Table 9: Transfer to $\mathcal{R}_D$, a displacement built from sixteen area-matched drop maps per gesture, which neither program was fitted against. *vs. $\mathcal{R}_A$* is the change against the same program’s score under our transport renderer (Table 7), for both programs: Π_A , fitted under $\mathcal{R}_A$, pays +17.8 to +51.6% for the foreign operator, median +24.8%; Π_U , which either transport destroys, moves -1.0 to $+0.6\%$ (against its own fitting renderer $\mathcal{R}_U$, which applies no transport, its change is several hundred percent). Π_A remains ahead on 5/5 in MSE and 5/5 in LPIPS-Alex.

Spatial distribution of the residual. Figure 11 shows target, replay and amplified absolute error for the median and the hardest reference. The residual is not spread evenly: it concentrates on the finest structures, where the recovered gesture widths approach the width floor, and along the boundaries of large colour regions. This is the same limit the gesture-count series reaches (Sec. 8) — additional gestures capture finer structure until the improvement falls below the noise floor — and it is why battal, an all-over pattern of small features, is the reference the method reconstructs least well.

Containment. Reparameterising each anchor by the current width and offset can confine every footprint to a centred window covering 64% of the canvas. The constraint holds for every gesture in all five programs and changes hard-render MSE by a median +6.5% (per reference +3.7% to +15.0%). That median is comparable to the across-seed spread of Table 12; flower has the largest increase, +15.0%. It constrains where the tool may act, not where transport later carries the pigment: the constrained programs still retain 78–79% of their painted area outside the canvas after transport, as the unconstrained ones do.

Area budget versus gesture count. Deposited area is a resource, and the area law makes it a controllable one: the solver carries a penalty $\lambda_A \sum_i A_{\ell_i}(r_i)$ with the exact gradient $\partial_r A_{\ell} = P_{\ell}$. Sweeping λ_A from 0 to 1 on all five references cuts deposited area by 83%, from 6.8 to 1.2 canvas areas, at a 5% reduction in the geometric-mean floor ratio, with per-reference changes from -13% to $+5\%$. What the penalty does *not* do is remove a gesture: at $\lambda_A = 1$ every one of the 2000 still covers more than a pixel and none sits at the radius floor. The loss is temporal instead — the fraction of gestures still visible rises from 6% in the first decile of the sequence to 99% in the last, and 83% of all deposited paint never reaches the image. Most of it is not covered but expelled: footprints are laid almost entirely on the canvas (2% outside at deposition), and it is the later insertions that carry the early paint off it.

The budget that removes gestures is the count N , and Table 16 re-scores the archived count sweep to show what it trades. As N falls from 4000 to 125 the visible fraction rises monotonically from 45% to 100%, while the floor ratio falls from $1.75\times$ to $0.91\times$: a 125-gesture program is *worse* than a flat colour on these references. At $N = 500$, 90% of gestures are visible at $1.39\times$ the floor; at $N = 2000$, 60% at $1.61\times$. Fidelity and visibility trade off along this axis, and the operating point of the paper sits on the fidelity side of it. One scope note applies to both budgets: they count *deposited* area, which is what a physical bath consumes; delivered area on the canvas is a different and smaller quantity.

Penalising non-visible pigment. The area penalty charges every gesture, but the paint that never reaches the image is a specific subset, and the compositing identity $\sum_i v_i = \sum_x (1 - T_0)$, with $v_i = \sum_x T_i \alpha_i$ the area gesture i owns in the image, shows that its complement, the visible area, can be computed with one additional render using unit colours. We therefore added $\lambda_O(\sum_i A_i^r - \text{visible area})$ and re-fit all five references with a free radius window (Table 17). In this regime the term does not behave as intended: the canvas is painted almost entirely in every program, so shrinking a gesture almost never exposes background, and the penalty acts approximately as a total-area penalty with an offset. At $\lambda_O = 1$ the deposited total falls from 5.8 to 1.3 canvas areas and the unseen share from 83% to 24%, while the visible fraction of gestures rises from 59% to 67%. The free-radius control alone improves the geometric-mean floor ratio from $3.67\times$ to $3.98\times$, so the headline radius window restricts attainable fidelity; against that control the aggregate change stays within 1%, with teardrops losing 12.9% at $\lambda_O = 1$. No setting removes a gesture, and replacing the fixed count by an error target ($1.05\times$ the headline error) with an adaptive multiplier on the data term holds the requested quality ($3.70\times$) and also removes no gestures. Only the gesture count N reduces the number of gestures.

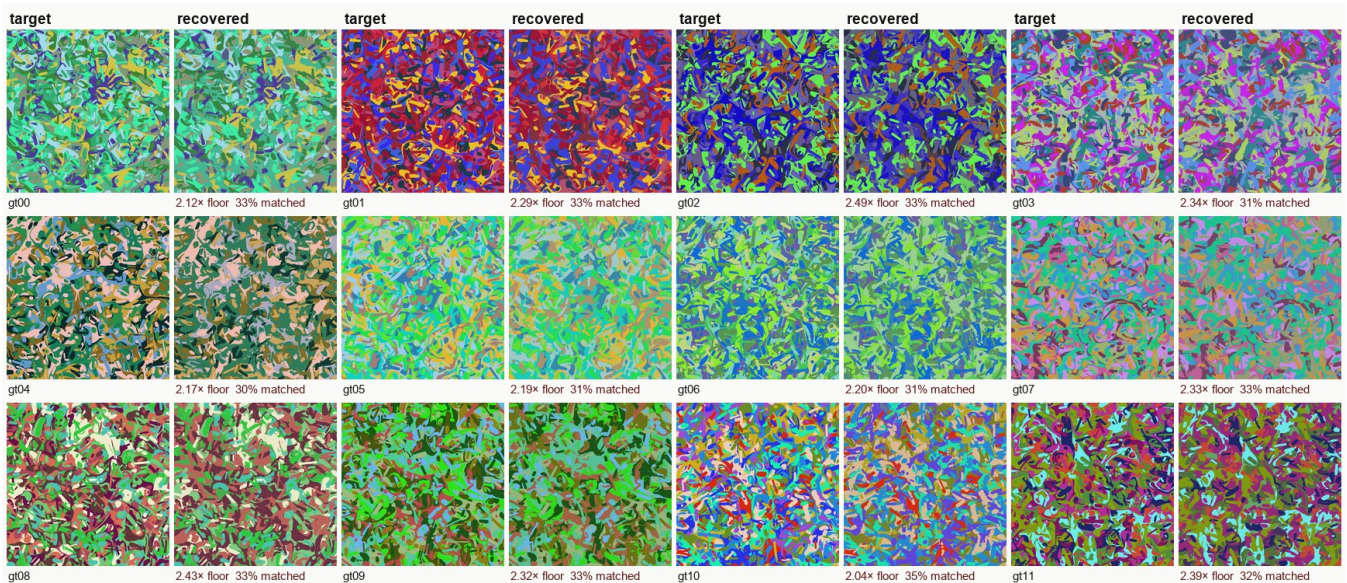


Figure 8: Synthetic ground truth. Each target is the render of a known 2000-gesture program drawn from the model’s prior; beside it is the render of the program recovered from that image alone. Annotations give the floor ratio and the fraction of visible gestures matched inside the true radius, from the matching pass that produced the figure; the final matched-null analysis of Table 10 differs from these annotations by up to one point. These targets deliberately do not look like marbling: the prior places anchors uniformly and draws colours at random, so the images carry none of the large-scale structure a real sheet has. This experiment tests the fitting procedure, not the medium.

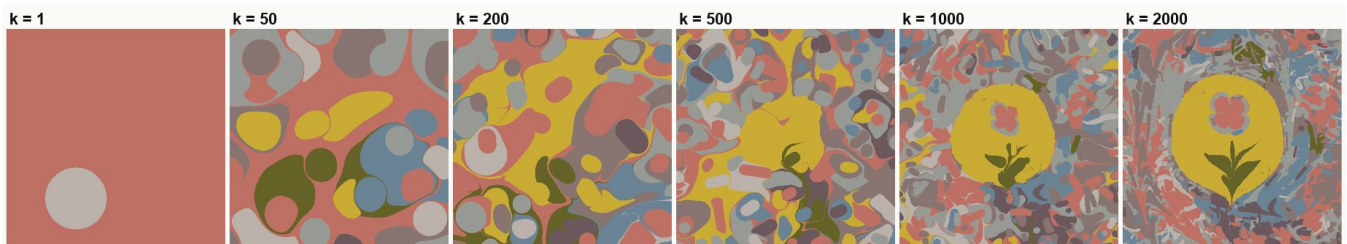


Figure 9: A recovered program can be replayed. Hard renders of the first k gestures show the recovered flower program assembling in execution order. This temporal decomposition is unavailable from a raster reconstruction alone.

8 Ablations

The gesture-count series uses two references and a fixed deep-feature data term; the gesture-type comparison uses all five. Each comparison is internal to a matched series, and all values are hard-rendered.

Gesture count. Table 18: reconstruction improves monotonically in N on both references with diminishing returns, each doubling yielding improvements of 5.9, 5.9, 5.6, 4.0 and 3.1%. This series is scored in its own deep-feature units, so the comparable noise figure is the across-seed spread measured in those units, 0.5–0.6%, not the pixel-MSE band of Table 12; every doubling listed is outside it. Returns diminish but remain resolvable at the last step, so $N = 2000$ is an operating point chosen for cost rather than a measured ceiling.

Continuous gesture type. Fixing $\ell_i = 0$ — every gesture the drop primitive introduced in closed form by Lu et al. [8] — increases loss on all five references by a median 6.2% on that series’ own deep-feature objective, against an across-seed spread of 0.5–0.6% in the same units, so both the sign and the magnitude are resolvable. In the recovered programs, 78% of gestures have $\ell_i \geq 0.004$ (four pixels at 1024^2) and 59% have $\ell_i > r_i$, so the optimiser makes substantive use of the continuous drop-to-line degree of freedom. This compares gesture *shapes* within our vocabulary; it is not a comparison against [8], whose operator set also includes zero-injection time and stylus maps that we do not implement.

9 Generality of the construction

The marbling-specific components of this construction can be separated from the generic ones.

target	image (1024 ²)			visible gestures		median match (canvas)		within true radius	
	recovered	floor	floor/rec	truth	recovered	recovered	matched null	recovered	matched null
gt00	0.0219	0.0464	2.12×	1029	1206	0.0162	0.0161	33%	33%
gt01	0.0314	0.0720	2.29×	1071	1220	0.0170	0.0165	32%	33%
gt02	0.0270	0.0672	2.49×	1040	1250	0.0163	0.0166	32%	32%
gt03	0.0249	0.0582	2.34×	1020	1215	0.0169	0.0176	30%	31%
gt04	0.0331	0.0718	2.17×	1042	1222	0.0171	0.0160	30%	33%
gt05	0.0268	0.0586	2.19×	1046	1231	0.0171	0.0174	30%	34%
gt06	0.0207	0.0455	2.20×	1032	1215	0.0169	0.0173	31%	31%
gt07	0.0239	0.0557	2.33×	1018	1201	0.0168	0.0178	33%	29%
gt08	0.0270	0.0655	2.43×	1057	1239	0.0168	0.0170	33%	32%
gt09	0.0259	0.0601	2.32×	1015	1237	0.0166	0.0156	34%	36%
gt10	0.0487	0.0991	2.04×	1037	1242	0.0161	0.0171	35%	32%
gt11	0.0286	0.0683	2.39×	1045	1227	0.0166	0.0172	31%	32%
summary			2.27×			0.0168	0.0170	32%	32%

Table 10: Synthetic ground truth. Each target is the render of a *known* 2000-gesture program drawn from the model’s prior, so a zero-error solution provably lies inside the feasible set. *Image*: recovery reaches a geometric mean 2.27× below the flat floor, against 3.67× on the historical references; on this family the residual is the fitting procedure’s gap, not model misfit. *Visible gestures* counts those owning at least 50 pixels of the final 1024² image (scaled for the 512² matching pass). Gestures below this threshold are excluded by the matching protocol, not proved unidentifiable. *Median match* is the optimal-assignment distance between visible recovered and visible true gestures; the *matched null* repeats it with another target’s recovered program, giving a similarly sized visible candidate pool produced by the same fitting procedure. The twelve targets form a paired design and we test it: the paired mean difference in median matched distance is -1.6×10^{-4} canvas units ($t(11) = -0.77$, 95% interval $[-6.1, +2.9] \times 10^{-4}$, recovery nominally better on 8 of 12), and the within-radius fractions differ on 6 targets each way. The interval excludes any systematic reduction larger than 3.8% of the 0.0168 median, which is the sensitivity of this test at $n = 12$. Recovered programs also carry 18% more visible gestures than the truth on 12 of 12 targets. This positional comparison bounds one statistic under one recovery procedure; it does not establish intrinsic non-identifiability.

contrast (ratio)	GM	95% CI	$t(5)$	d_z	sign
executed, Π_U/Π_A (MSE)	6.53×	[4.20, 10.15]	11.8	5.3	5/5
imagined, Π_A/Π_U (MSE)	5.10×	[3.13, 8.33]	9.2	4.1	5/5
interaction, ratio of ratios (MSE)	33.33×	[14.39, 77.20]	11.6	5.2	5/5
transfer $\mathcal{R}_D$, Π_U/Π_A (MSE)	4.93×	[3.59, 6.79]	13.9	6.2	5/5
executed, Π_U/Π_A (LPIPS)	1.93×	[1.80, 2.08]	25.3	11.3	5/5
imagined, Π_A/Π_U (LPIPS)	2.37×	[2.05, 2.74]	16.6	7.4	5/5

Table 11: Paired analysis on the log scale, $n = 5$ references. GM is the geometric-mean ratio, the interval a paired t -interval on the five log-ratios, d_z the standardised paired effect, and “sign” the number of references with the predicted direction (one-sided sign-test floor $2^{-5} = 0.031$). The MSE contrasts between the inert arm and joint recovery compare cells on opposite sides of the flat floor (Table 7), so their size is not a quality statement. The minimum detectable paired effect at $n = 5$, one-sided $\alpha = 0.05$, power 0.8 is $d_z \approx 1.33$. Executed MSE on the three references not used during development: GM $7.5 \times [2.8, 20.2]$ (development two: $5.3 \times$).

Marbling-specific. Only the operator itself: the choice to foliate by distance to the segment, the Steiner area law (5), and the symmetry argument that fixes the tangential coordinate. Another medium would need its own ψ , and Sec. 4.1 is the template for quantifying the discrepancy between that ψ and the physics it approximates.

Generic. The distinction in Definition 1 identifies whether later gestures alter the coordinates at which earlier coverage is evaluated. This makes image fitting transport-dependent, but does not require inversion for differentiation: ordinary automatic differentiation and checkpointing remain alternatives.

Replay applies when intermediate states can be reconstructed with computable inverses and derivatives away from explicitly detectable exceptional sets. The non-

reconstructible state must be retained, and numerical conditioning may require checkpoints. Closed-form inversion is useful but not necessary (supplement, S6); the memory benefit depends on the actual record count and checkpoint schedule. Extending this approach to another wet medium requires a suitable state representation and transport law. Diffusion, mixing and pigment-dependent dynamics introduce additional state loss and ill-conditioning, and establishing replay efficiency there is a separate problem.

10 Limitations

Scope of the evidence. The evaluation contains five references from one medium and one primary optimisation run per cell. Two of them were used during development.

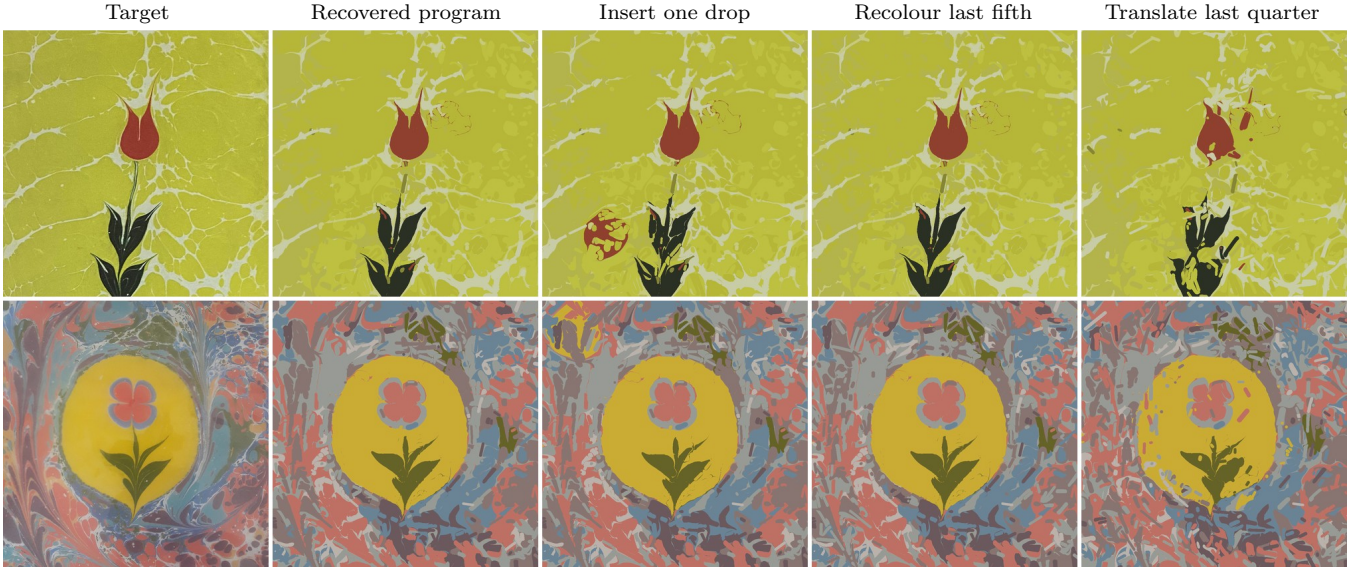


Figure 10: Program-level edits, replayed. Lale and flower: target, recovered program, and three edits of that program rendered by the same hard renderer. Column three inserts a single drop of radius 0.06 into the ground beside the motif, at canvas position (0.30, 0.72) for lale and (0.20, 0.20) for flower, in a palette colour taken from the motif, at gesture 1000 of 2000; column four swaps the two most-used palette entries among the last fifth of the gestures; column five translates the last quarter of the gestures by +0.08 canvas units in x . Nothing is re-optimised.

reference	re-run, same configuration			export comparison	
	run 1	run 2	spread	log score	export vs. log
flower	0.004649	0.004596	1.1%	0.004609	+0.9%
tulip	0.013519	0.013318	1.5%	0.013263	+1.9%
teardrops	0.006070	0.006307	3.9%	0.005296	+14.6%
battal	0.033431	0.033246	0.6%	0.032551	+2.7%
lale	0.002633	0.002755	4.6%	0.002453	+7.3%

Table 12: Numerical variation, in the two units the paper uses. Left: two optimisation runs of one configuration and seed, both scored by the hard reference renderer, differ by 0.6–4.6% in pixel MSE. Right: the training-time score of the best step, taken before palette colours are snapped at export, against the reference render of the exported program; the column is $100(\text{MSE}_{\text{export}}/\text{MSE}_{\text{log}} - 1)$. Rendering the exported program with both kernels agrees within 0.15%, so the gap is colour snapping, not renderer disagreement. Across three seeds on all five references the pixel-MSE spread is 2.7–6.7%, median 6.1%. Seed 0 differs from the headline run by up to 1.3%, which we count as part of the spread. In the deep-feature units of the ablation series the across-seed spread is 0.5–0.6% (two references, two seeds).

The large paired effects reproduce on the three held-out images and exceed measured numerical variation, but a larger, multi-seed corpus is needed to estimate performance across marbling schools and acquisition conditions. The comparison set is mostly internal: the inert-mark arm, the one-pass correction and the second transport operator each isolate one mechanism of the model; the one external system, a stroke-based fitter, optimises inert marks and is scored only as a raster; a shared task on which both kinds of system execute, and execution on a physical bath, are

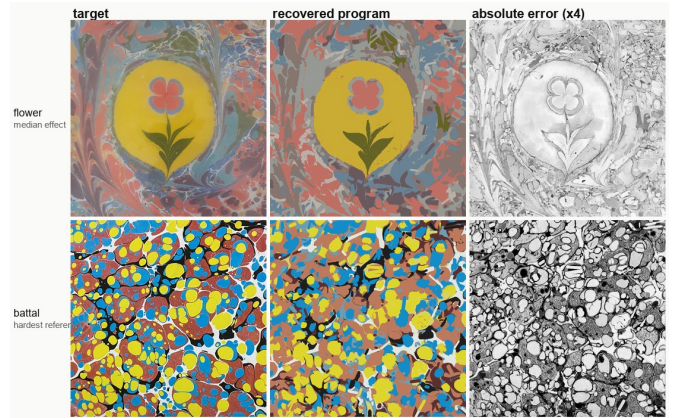


Figure 11: Where the residual is. Target, replayed program, and absolute error amplified $4\times$ (dark is larger error), at 1024^2 . Error concentrates on structures near the gesture-width floor rather than being distributed over the canvas.

future work.

Model. The operator is a geometric surrogate: exactly area-preserving off the footprint, but with the foliation and tangential transport of Sec. 4 rather than those of a harmonic potential, with a 27% discrepancy from line-source potential flow at the median aspect ratio under (9). It uses a free plane with no tray wall, passive pigment, quasi-static sequential gestures, and no viscosity contrast, fingering, interfacial tension, or diffusion. The recovered programs inject 5.5–6.2 canvas areas, much of which leaves the visible window; direct physical execution therefore requires a bounded-domain model and a calibrated paint

configuration	time per fit (s)		hard-render MSE $\times 10^3$ at 1024^2						GM	GM
	steps	wall	flower	tulip	teardrops	battal	lale	MSE $\times 10^3$	floor/MSE	
headline: 1024^2 , 240 steps, windowed radius	132	234	4.65	13.52	6.07	33.43	2.63	8.04	3.67 $\times$	
free radius: 1024^2 , 240 steps	132	234	4.69	12.81	5.31	29.95	2.34	7.41	3.98 $\times$	
512^2 only: 240 steps, windowed radius	18	—	5.74	15.19	6.55	34.32	3.82	9.44	3.13 $\times$	
stage A: 512^2 , 200 steps, free radius	15	45	5.25	14.83	5.68	32.05	3.54	8.71	3.39 $\times$	
stage B: A, then 40 steps at 1024^2	37	91	3.40	14.28	5.63	32.05	3.46	7.88	3.75 $\times$	

Table 13: Speed against error. *Steps* is the optimisation time alone, from the uncontended per-step measurements (0.55 s at 1024^2 , 0.075 s at 512^2 , $N = 2000$). *Wall* is a whole fit including start-up and the export render, which differ by row; the step column is the fair comparison. MSE is pixel mean-squared error of the exported program under the reference renderer against the target at 1024^2 ; *floor/MSE* is the error of the best single flat colour divided by the program’s error, so 3.67 $\times$ means the program’s error is 3.67 times smaller than painting one colour. One run per cell. The coarse-to-fine schedule (stage B) matches the headline’s error in 37s of optimisation against 132s, with a wide per-reference spread: flower improves and lale loses, because the coarse stage commits to a wrong colour for the tulip head.

reference	replayed at three resolutions (pixel MSE)				PSNR (dB)		SSIM		floor/MSE
	512^2	1024^2	2048^2	$1024 \rightarrow 2048$	floor	Π_A	floor	Π_A	
flower	0.004663	0.004649	0.004651	+0.03%	18.21	23.33	0.669	0.658	3.25 $\times$
tulip	0.013721	0.013519	0.013517	-0.02%	14.06	18.69	0.377	0.490	2.90 $\times$
teardrops	0.006311	0.006070	0.006068	-0.03%	14.99	22.17	0.488	0.539	5.22 $\times$
battal	0.034035	0.033431	0.033457	+0.08%	10.63	14.76	0.269	0.400	2.59 $\times$
lale	0.002634	0.002633	0.002627	-0.22%	18.62	25.80	0.714	0.751	5.22 $\times$

Table 14: The recovered program is a continuous-domain object fitted to raster samples. Each program is optimised once at 1024^2 and then replayed unchanged on a 512^2 , 1024^2 and 2048^2 grid, scored against the reference resampled to the same grid. Replaying at 2048^2 changes the error by at most 0.23% on any reference (median 0.04%); replaying at 512^2 , the scans’ native scale, by at most 4%, comparable to the seed spread of Table 12: the resolution the program was fitted at is not baked into it. PSNR and SSIM are reported alongside the same metrics for the best constant image as a reference point: battal’s 14.76 dB is +4.13 dB over its own floor. The PSNR column is a monotone re-expression of the same floor ratio (+4.13 dB is $10 \log_{10} 2.59$), not an independent metric. SSIM against a constant image is ill-conditioned, since a flat image has no local variance, so neither the 4/5 it clears nor flower’s exception should be read as corroborating or refuting the MSE result.

λ_A	deposited area		floor/MSE		visible gestures	
	GM (canvas)	vs. 0	GM	vs. 0	GM	vs. 0
0.00	6.76	+0%	1.75 $\times$	+0%	1215	+0
0.03	2.50	-63%	1.74 $\times$	-0%	1217	+2
0.30	1.51	-78%	1.69 $\times$	-3%	1267	+52
1.00	1.16	-83%	1.66 $\times$	-5%	1353	+138

Table 15: Paint budget as a penalty $\lambda_A \sum_i A_{\ell_i}(r_i)$ on deposited area, geometric means over the five references. This series was trained under the deep-feature objective with a free radius window and no length penalty, so it is read within itself, like Sec. 8; scores are pixel MSE on the reference renderer. At $\lambda_A = 1.0$ deposited area falls 83% while the floor ratio changes -5% in geometric mean, with nonuniform changes across references; per-reference changes range from -13% (teardrops) to +5%. The headline seed spread does not establish significance for this separately trained series. *Visible gestures* counts those owning at least 50 pixels of the final image: unchanged at $\lambda_A = 0.03$ and rising on every reference from $\lambda_A = 0.3$, by +83 to +184 per program at $\lambda_A = 1.0$.

N	area	floor/MSE	Δ	visible	vis./ N
125	0.76	0.91 $\times$		124	100%
250	1.13	1.12 $\times$	+23%	242	97%
500	2.12	1.39 $\times$	+24%	452	90%
1000	3.49	1.51 $\times$	+9%	779	78%
2000	5.77	1.61 $\times$	+7%	1218	61%
4000	10.44	1.75 $\times$	+8%	1788	45%

Table 16: The gesture count as a budget, from the archived count sweep, restricted to the two references of that sweep still in the corpus (flower and battal) (deep-feature objective; a separate series, read within itself), re-scored on the reference renderer at 1024^2 . Unlike the area penalty of Table 15, which shrinks every gesture and removes none, lowering N removes gestures outright. *Visible* counts gestures owning at least 50 pixels of the final image and *visible/N* is the fraction of the program that can still be matched to the image: it runs from 100% at $N = 125$ to 45% at $N = 4000$, while the visible *count* runs from 124 to 1788. At $N = 125$ the program is *worse* than a flat colour (0.91 $\times$). Fewer gestures means a larger share of the program survives to the image and a smaller absolute number does.

budget. Zero-injection stylus drag is also outside the present gesture family. The transfer experiment supports variation within the insertion class, not arbitrary fluid dynamics.

Depth. Measured step time grows approximately linearly with program length (Sec. 5.2), and replay memory includes $P[N/k]$ checkpoints and S exception records. We have not run $N = 10^4$. At fixed optimisation steps, increas-

arm	floor/MSE	vs. headline	unseen	visible	N_{eff}
control, $\lambda_O = 0$	$3.98\times$	+8.4%	83%	59%	2000
$\lambda_O = 0.1$	$4.01\times$	+9.3%	46%	60%	2000
$\lambda_O = 0.3$	$3.95\times$	+7.6%	34%	62%	2000
$\lambda_O = 1$	$3.95\times$	+7.6%	24%	67%	2000
error target, $\lambda_O = 0.3$	$3.70\times$	+0.8%	40%	62%	2000

Table 17: Penalising deposited area not visible in the final canvas. All five references, headline objective and step budget, free radius window, one run per cell, scored on the reference renderer at 1024^2 ; geometric means and plain means over the five. *Unseen* is the fraction of deposited paint that never reaches the image, whether pushed off the canvas by later insertions or covered on it (footprints are laid almost entirely on the canvas, 2% outside at deposition; the archived off-canvas measurement of Sec. 7 shows that most of the unseen paint is expelled rather than covered); *visible* the fraction of gestures owning at least 50 pixels; N_{eff} the smallest number of gestures exceeding one pixel of area in any program. The free-radius control improves on the headline in these single-run comparisons; the headline used the radius window of Table 5. With the canvas painted almost entirely (visible area 0.97–0.99 in every arm) the visible term varies little and the penalty acts approximately as a total-area penalty. Against the control, aggregate image-error changes are small, with a larger loss on teardrops at $\lambda_O = 1$. No tested setting removes a gesture; these are descriptive comparisons.

N	flower	battal	mean	per doubling
125	5.1723	5.9314	5.552	
250	4.9600	5.5528	5.256	-5.3%
500	4.7266	5.1401	4.933	-6.1%
1000	4.5795	4.7669	4.673	-5.3%
2000	4.3969	4.5163	4.457	-4.6%
4000	4.3113	4.2997	4.306	-3.4%

Table 18: Reconstruction versus gesture count under the deep-feature training objective of that series (lower is better; the two development references in the corpus). Monotone with diminishing returns; the last doubling buys 3.4%, which is still outside the 0.5–0.6% across-seed spread measured in these same deep-feature units.

ing the number of parameters can also change convergence. Table 18 shows diminishing gains through $N = 4000$; it does not identify the limiting resource at greater depth.

Zero-injection transport. Tine and stylus drag [8, 10] is a different displacement class with no deposition set. We did not obtain a calibrated comparison against it at matched reach and report none; the analytical brushes of [23] are a published candidate evaluator for that class.

Identifiability. Program parameters have ambiguities, including palette-label permutations. Gestures below the ownership threshold can still influence the final image through transport, so low visibility does not imply absence of information about them. Our synthetic matching experiment assesses one recovery procedure and positional statistic. We seek a program attaining low reconstruction

loss under the model, not the historical process that made a sheet. Gesture count and ordered slots are fixed; discrete program search and physical calibration remain separate problems.

11 Conclusion

We presented inverse digital marbling: the recovery of executable programs in a deposition-based model of the medium. A capsule primitive joins drops to elongated deposits, with exactly area-preserving exterior transport and a closed-form exterior inverse. Its replay adjoint regenerates intermediate states while retaining exceptional coordinates and position checkpoints. At the reported operating point, the PyTorch implementation uses $8.7\times$ less memory than the tested checkpointed-autograd baseline at comparable step time; the fused implementation fits 2000-gesture programs in minutes. The programs replay at multiple resolutions and support edits under the same dynamics. Transport-aware fitting outperforms the tested transport-disabled and one-pass compensation controls when replayed under the insertion model and, scored as a raster, is level with a published stroke-based fitter at matched stroke count. Alternative-transport and synthetic experiments delimit operator sensitivity and generating-gesture correspondence. The result is an editable computational process for a medium in which later actions move earlier marks.

Availability. The recovered programs, the recorded scores from which every table is generated, the generating scripts, the discrepancy computation of Sec. 4.1 and the reference implementation of the forward model are archived and available from the corresponding author on request. The source package includes the supplementary PDF and the table-generation script; regeneration of the measurements requires the separate results archive. A public code-and-data release is planned for the journal version.

References

- [1] A. Hertzmann. A Survey of Stroke-Based Rendering. *IEEE Computer Graphics and Applications*, 23(4):70–81, 2003.
- [2] Z. Huang, W. Heng, S. Zhou. Learning to Paint with Model-based Deep Reinforcement Learning. In *Proc. ICCV*, 2019.
- [3] T.-M. Li, M. Lukáč, M. Gharbi, J. Ragan-Kelley. Differentiable Vector Graphics Rasterization for Editing and Learning. *ACM Transactions on Graphics (Proc. SIGGRAPH Asia)*, 39(6), 2020.
- [4] Z. Zou, T. Shi, S. Qiu, Y. Yuan, Z. Shi. Stylized Neural Painting. In *Proc. CVPR*, 2021.

- [5] S. Liu, T. Lin, D. He, F. Li, R. Deng, X. Li, E. Ding, H. Wang. Paint Transformer: Feed Forward Neural Painting with Stroke Prediction. In *Proc. ICCV*, 2021.
- [6] P. Schaldenbrand, J. McCann, J. Oh. FRIDA: A Collaborative Robot Painter with a Differentiable, Real2Sim2Real Planning Environment. In *Proc. ICRA*, 2023.
- [7] C. J. Curtis, S. E. Anderson, J. E. Seims, K. W. Fleischer, D. H. Salesin. Computer-Generated Watercolor. In *Proc. SIGGRAPH*, 1997.
- [8] S. Lu, A. Jaffer, X. Jin, H. Zhao, X. Mao. Mathematical Marbling. *IEEE Computer Graphics and Applications*, 32(6):26–35, 2012.
- [9] R. Acar, P. Boulanger. Digital Marbling: A Multiscale Fluid Model. *IEEE Transactions on Visualization and Computer Graphics*, 12(4):600–614, 2006.
- [10] A. Jaffer. Oseen Flow in Paint Marbling. arXiv preprint 1702.02106, 2018.
- [11] S. Liu, T. Li, W. Chen, H. Li. Soft Rasterizer: A Differentiable Renderer for Image-based 3D Reasoning. In *Proc. ICCV*, 2019.
- [12] D. Vicini, S. Speierer, W. Jakob. Path Replay Backpropagation: Differentiating Light Paths using Constant Memory and Linear Time. *ACM Transactions on Graphics (Proc. SIGGRAPH)*, 40(4), 2021.
- [13] A. Griewank, A. Walther. Algorithm 799: Revolve: An Implementation of Checkpointing for the Reverse or Adjoint Mode of Computational Differentiation. *ACM Transactions on Mathematical Software*, 26(1):19–45, 2000.
- [14] A. N. Gomez, M. Ren, R. Urtasun, R. B. Grosse. The Reversible Residual Network: Backpropagation Without Storing Activations. In *Proc. NeurIPS*, 2017.
- [15] Y. Jiang, J. Lu, Y. Chen, Y. He, K. Wu, Y. Yang, C. Jiang. Birth of a Painting: Differentiable Brushstroke Reconstruction. arXiv:2511.13191, 2025.
- [16] Z. Li, J. He, B. Börcsök, T. Zhang, D. Chen, T. Du, M. C. Lin, G. Turk, B. Zhu. An Adjoint Method for Differentiable Fluid Simulation on Flow Maps. In *Proc. ACM SIGGRAPH Asia*, 2025.
- [17] L. Shu, Y. Jiang, K. Wu, Y. Yang, L. Guibas, C. Jiang. Differentiate the Solver, Not the Equation: Reverse-Sweep Adjoints for Block Implicit Simulation. arXiv:2608.08559, 2026.
- [18] R. Zhang, P. Isola, A. A. Efros, E. Shechtman, O. Wang. The Unreasonable Effectiveness of Deep Features as a Perceptual Metric. In *Proc. CVPR*, 2018.
- [19] T. Porter, T. Duff. Compositing Digital Images. In *Proc. SIGGRAPH*, 1984.
- [20] D. Maclaurin, D. Duvenaud, R. P. Adams. Gradient-based Hyperparameter Optimization through Reversible Learning. In *Proc. ICML*, 2015.
- [21] A. McNamara, A. Treuille, Z. Popović, J. Stam. Fluid Control Using the Adjoint Method. *ACM Transactions on Graphics (Proc. SIGGRAPH)*, 23(3), 2004.
- [22] Y. Hu, L. Anderson, T.-M. Li, Q. Sun, N. Carr, J. Ragan-Kelley, F. Durand. DiffTaichi: Differentiable Programming for Physical Simulation. In *Proc. ICLR*, 2020.
- [23] D. L. James, E. James. Mixwell: Sharp 2D Fluid Brushes for Progressive Physics-Based Mixing. *ACM Transactions on Graphics (Proc. SIGGRAPH)*, 45(4), 2026.
- [24] H. Fu, S. Zhou, L. Liu, N. J. Mitra. Animated Construction of Line Drawings. *ACM Transactions on Graphics (Proc. SIGGRAPH Asia)*, 30(6):133, 2011.
- [25] J. Tan, M. Dvorožňák, D. Sýkora, Y. Gingold. Decomposing Time-Lapse Paintings into Layers. *ACM Transactions on Graphics (Proc. SIGGRAPH)*, 34(4):61, 2015.
- [26] X. Ma, Y. Zhou, X. Xu, B. Sun, V. Filev, N. Orlov, Y. Fu, H. Shi. Towards Layer-wise Image Vectorization. In *Proc. CVPR*, 2022.
- [27] H. Federer. Curvature Measures. *Transactions of the American Mathematical Society*, 93(3):418–491, 1959.
- [28] P. Haeberli. Paint by Numbers: Abstract Image Representations. In *Proc. SIGGRAPH*, 1990.
- [29] A. Hertzmann. Painterly Rendering with Curved Brush Strokes of Multiple Sizes. In *Proc. SIGGRAPH*, 1998.
- [30] T.-M. Li, M. Aittala, F. Durand, J. Lehtinen. Differentiable Monte Carlo Ray Tracing through Edge Sampling. *ACM Transactions on Graphics (Proc. SIGGRAPH Asia)*, 37(6), 2018.
- [31] G. Loubet, N. Holzschuch, W. Jakob. Reparameterizing Discontinuous Integrands for Differentiable Rendering. *ACM Transactions on Graphics (Proc. SIGGRAPH Asia)*, 38(6), 2019.
- [32] K. Ellis, D. Ritchie, A. Solar-Lezama, J. B. Tenenbaum. Learning to Infer Graphics Programs from Hand-Drawn Images. In *Proc. NeurIPS*, 2018.
- [33] J. O. Talton, Y. Lou, S. Lesser, J. Duke, R. Mëch, V. Koltun. Metropolis Procedural Modeling. *ACM Transactions on Graphics*, 30(2), 2011.
- [34] R. J. Wolfe. *Marbled Paper: Its History, Techniques, and Patterns*. University of Pennsylvania Press, 1990.