

Phase-Aligned Finite-Fourier Periodic Deformation for 4D Medical Image Interpolation

Haojin Li*

Department of Computer Science and Engineering
Southern University of Science and Technology
Shenzhen, China
12232410@mail.sustech.edu.cn

Hengzhuo Wang*

Faculty of Biomedical Engineering
Shenzhen University of Advanced Technology
Shenzhen, China
School of Biomedical Engineering,
Shenzhen University Medical School
Shenzhen University
Shenzhen, China
suat25060145@stu.suat-sz.edu.cn

Zhiheng Ma

Faculty of Computility
Microelectronics
Shenzhen University of Advanced Technology
Shenzhen, China
mazhiheng@suat-sz.edu.cn

Mingyang Ou

School of Computer Science and Engineering
Beihang University
Beijing, China
ComgLqWork@outlook.com

Heng Li†

Faculty of Biomedical Engineering
Shenzhen University of Advanced Technology
Shenzhen, China
liheng@suat-sz.edu.cn

Jiang Liu†

Department of Computer Science and Engineering
Southern University of Science and Technology
Shenzhen, China
liuj@sustech.edu.cn

Abstract

4D medical image interpolation aims to recover missing volumes from sparsely observed time points and is important for dynamic anatomical analysis in applications such as cardiac MRI and thoracic CT, where motion is often repetitive or near-periodic over clinically relevant intervals. A key challenge is that this structure is not always encoded directly in deformation representations for interpolation. In addition, physiological motion is often non-uniform, so equal temporal intervals do not necessarily correspond to equal amounts of anatomical change. To address these issues, we formulate interpolation as learning a continuous deformation process with a phase-structured prior. Given two endpoint volumes, we parameterize a phase-conditioned velocity field with a finite Fourier basis, which embeds near-periodic motion patterns directly into the deformation space and supports continuous querying at arbitrary target times. We further introduce a phase-aligned temporal reparameterization that maps normalized within-interval time to a latent motion phase according to deformation variation intensity, thereby better modeling non-uniform motion progression. Intermediate volumes are then synthesized by continuously warping both endpoints, followed by bidirectional fusion and lightweight residual refinement. Experiments on ACDC and 4D-Lung show that the proposed method achieves state-of-the-art performance

over existing baselines while producing anatomically plausible and coherent intermediate volumes from sparse observations.

CCS Concepts

• **Computing methodologies** → **Computer vision**; • **Applied computing** → *Imaging*.

Keywords

4D medical imaging, Video frame interpolation, Continuous deformation modeling, Periodic motion modeling, Finite Fourier parameterization

ACM Reference Format:

Haojin Li, Hengzhuo Wang, Zhiheng Ma, Mingyang Ou, Heng Li, and Jiang Liu. 2026. Phase-Aligned Finite-Fourier Periodic Deformation for 4D Medical Image Interpolation. In *Proceedings of the 34th ACM International Conference on Multimedia (MM '26)*, November 10–14, 2026, Rio de Janeiro, Brazil. ACM, New York, NY, USA, 10 pages. <https://doi.org/10.1145/3767308.3834921>

1 Introduction

4D medical imaging is widely used in functional assessment, treatment monitoring, and dynamic anatomical analysis [40]. Representative applications include cardiac motion analysis in cine MRI and respiratory motion analysis in 4D thoracic CT, where clinically meaningful information is determined not only by spatial appearance but also by anatomical deformation over time [14, 27, 37]. In practice, however, dynamic acquisitions are often limited by low temporal resolution, sparse sampling, or irregular acquisition intervals, leaving a substantial portion of the motion process unobserved [28, 32]. As a result, 4D medical image interpolation is both practically important and technically challenging. The task must recover missing volumes from only a small number of observed time points while preserving the continuity and anatomical consistency

*Haojin Li and Hengzhuo Wang contributed equally to this work.

†Heng Li and Jiang Liu are the corresponding authors.



This work is licensed under a Creative Commons Attribution 4.0 International License. *MM '26, Rio de Janeiro, Brazil.*

© 2026 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-2213-4/2026/11

<https://doi.org/10.1145/3767308.3834921>

of the underlying motion, which in many dynamic imaging settings also exhibits partially repeatable or near-periodic patterns [5, 12].

Existing 4D interpolation methods mainly fall into two paradigms. Deformation-based methods estimate motion, flow, or deformation between observed frames and reconstruct intermediate states through inferred correspondences [14, 24, 38], while direct synthesis methods generate missing frames more directly from image features together with temporal conditions [23, 43, 45, 47]. Some methods further incorporate temporal regularity or periodic cues, for example through temporal conditioning or auxiliary guidance, to improve interpolation under structured motion [14, 27, 37, 45]. However, such temporal structure is still usually introduced to support reconstruction rather than encoded in the deformation representation itself [26]. For 4D medical imaging, where anatomical continuity and dynamic consistency are central, it is therefore more desirable to encode such clinically meaningful temporal structure directly within the underlying deformation process.

This leads to two key challenges. (1) How can we build a continuous deformation representation that explicitly captures structured motion? In many clinically important dynamic imaging applications, the underlying motion may exhibit partially repeatable or near-periodic behavior [14, 30, 41]. If such structure is used only as temporal conditioning for reconstructing a queried target volume, it does not directly constrain the deformation process, making it difficult to obtain a representation that remains continuous and can be queried reliably at arbitrary target times. (2) How can we account for uneven motion progression within a physiological cycle? Even when the overall motion is roughly repetitive, anatomical change does not evolve at a uniform pace within a cycle, so equal observation-time intervals may still correspond to different amounts of deformation. This makes linear time a suboptimal coordinate for continuous interpolation [9, 15, 30, 41].

To address these challenges, we reformulate 4D medical image interpolation as learning a structured deformation process that can be queried continuously from sparse endpoint observations, rather than predicting intermediate states independently at queried time points. Our framework is built on two key ideas. First, we represent the motion process as a phase-conditioned continuous velocity field parameterized by a finite Fourier basis, so that repetitive or near-periodic structure is encoded directly in the deformation representation. Second, we introduce a phase-aligned temporal reparameterization that maps queried time within the endpoint interval to a phase coordinate according to deformation variation intensity, thereby better reflecting physiological dynamics that do not always evolve in proportion to physical time. Based on this phase-aware deformation process, an intermediate volume at any target time is synthesized by bidirectional endpoint warping, followed by fusion and lightweight residual refinement. This motion-centric formulation enables continuous interpolation that is better aligned with the underlying anatomical dynamics.

In summary, this work makes the following contributions:

- We present a framework for 4D medical image interpolation based on phase-structured continuous motion modeling, enabling anatomically coherent intermediate synthesis from sparse endpoint observations at arbitrary query times.
- We introduce a finite-Fourier parameterization of a phase-conditioned continuous velocity field to encode repetitive or near-periodic motion structure directly in the deformation representation.
- We introduce a time-to-phase reparameterization mechanism that aligns queried time within the endpoint interval with motion phase progression, thereby better capturing non-uniform motion evolution.
- We validate the proposed method on the ACDC and 4D-Lung benchmarks, where it achieves state-of-the-art interpolation performance, and ablation studies further verify the distinct contributions of phase-structured deformation modeling and temporal reparameterization.

2 Related Works

2.1 Video Frame Interpolation

Video frame interpolation has been extensively studied in natural scenes and mainly follows two paradigms. Deformation-based methods estimate optical flow or related correspondences and synthesize intermediate frames through warping and refinement, with designs addressing large-motion matching, intermediate motion estimation, and trajectory-aware synthesis [18, 25, 29, 44]. Direct synthesis methods formulate interpolation as conditional generation to improve flexibility and visual realism in ambiguous regions [11]. Recent work further introduces temporal regularity, arbitrary-time interpolation, and continuous video modeling for non-uniform motion and flexible querying [17, 34, 46]. These developments benefit motion estimation and continuous-time prediction, but primarily target visually plausible synthesis in natural scenes. By contrast, 4D medical image interpolation must also preserve anatomy-constrained deformation consistency under structured physiological motion.

2.2 4D Medical Image Interpolation

Research on 4D medical image interpolation has increasingly focused on deformable anatomical modeling. The main route is deformation-based interpolation, which estimates volumetric motion or voxel flow between observed scans and reconstructs intermediate volumes through warping [14, 24, 38]. This direction is closely related to learning-based deformable registration, where stronger backbones improve dense correspondence estimation and continuous or diffeomorphic parameterizations encourage smoother, anatomically plausible motion fields [1, 6, 22, 36]. Some studies introduce anatomical priors by representing motion on anatomical objects or surfaces [31]. Others explore compact deformation parameterizations, such as band-limited Fourier representations, to regularize spatial motion structure [21]. Together, these studies suggest that medical interpolation depends not only on reconstructing appearance but also on learning anatomically meaningful deformation.

Beyond this deformation-centered route, 4D medical interpolation methods have also introduced temporal regularity and synthesis-oriented designs for reconstruction under complex dynamics. Earlier spatiotemporal volumetric models already considered temporal context and periodic motion cues [14], while more recent approaches combine deformation modeling with diffusion-based generation, multi-scale fusion, temporal modulation, or Fourier-guided

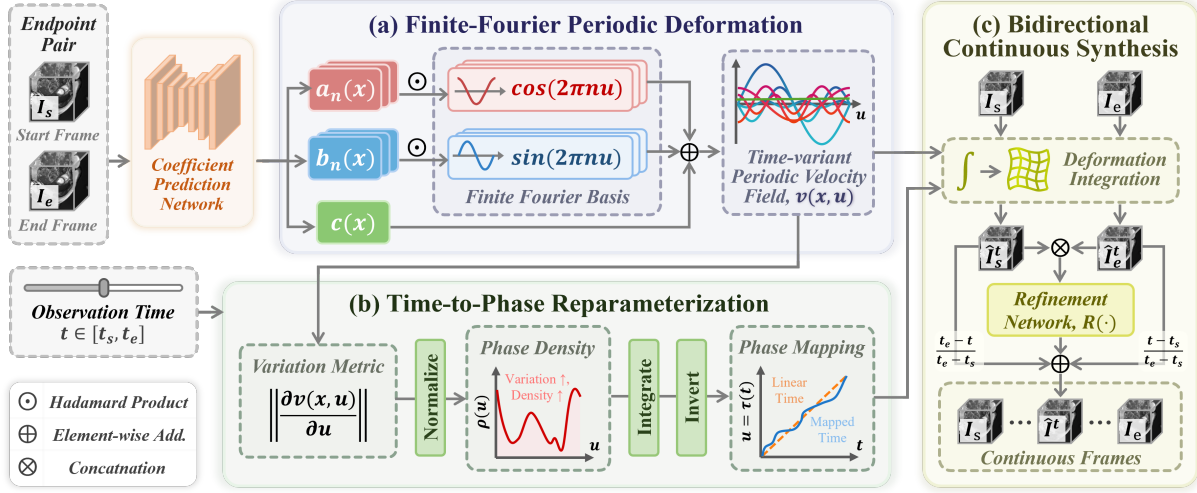


Figure 1: Overview of the proposed framework. (a) The endpoint pair (I_s, I_e) is used to predict Fourier coefficient fields that parameterize a phase-conditioned periodic velocity field $v(x, u)$. (b) The queried time t is reparameterized to phase $u = \tau(t)$ according to deformation variation. (c) The volume at time t is synthesized by bidirectional deformation integration, followed by fusion and refinement.

synthesis to handle nonlinear dynamics and large anatomical variation [23, 43, 45, 47]. Continuous motion formulations further extend the problem from prediction at isolated timestamps to recovery of a continuously queryable spatiotemporal process [27, 37]. Nevertheless, in most existing methods, temporal regularity or periodic information is still used mainly as conditioning or auxiliary guidance. It is rarely encoded more directly in the deformation representation itself, leaving open the problem of learning a continuous anatomical deformation process whose representation can better capture near-periodic structure.

2.3 Continuous Temporal Modeling

Continuous temporal modeling has emerged in medical imaging and adjacent sequence modeling as an alternative to discrete frame indexing. Continuous spatiotemporal motion models, neural implicit motion fields, and manifold-based dynamic reconstruction methods enable arbitrary-time querying by treating the underlying dynamics as a continuous process [2, 16, 27, 33, 42]. Related work also shows that temporal coordinates may require explicit alignment. Phase detection methods model latent cardiac motion progression [30, 41], while broader studies consider differentiable time warping, temporal synchronization, and global alignment across sequences with different traversal speeds [4, 9, 10, 15]. However, these methods mainly focus on query timing, phase detection, or sequence alignment. They do not explicitly reparameterize interpolation time by motion phase or unify phase-aware alignment with a near-periodic continuous deformation representation. Our method addresses this gap by mapping queried time within the observed interval to a phase coordinate that accounts for non-uniform motion progression.

3 Methodology

3.1 Task Formulation and Framework Overview

Let $\Omega \subset \mathbb{R}^3$ denote the spatial domain and $\{I_t : \Omega \rightarrow \mathbb{R}\}$ a dynamic volumetric sequence. In the endpoint-conditioned setting, each sample provides two observed volumes $I_s := I_{t_s}$ and $I_e := I_{t_e}$ at times $t_s < t_e$. Given (I_s, I_e) and any queried time $t \in [t_s, t_e]$, the goal is to recover the target volume continuously between the two observations. Formally, the task is to learn a continuous interpolation function:

$$\hat{I}^t = \mathcal{F}_\theta(I_s, I_e, t), \quad t \in [t_s, t_e], \quad (1)$$

where $\hat{I}^t$ denotes the predicted volume at time t and θ denotes the model parameters. During training, a sample may additionally provide intermediate observations at timestamps $\mathcal{T} = \{t_k\}_{k=1}^{K-1} \subset (t_s, t_e)$, such that the sample can be written as $(I_s, I_e, \{(t_k, I_{t_k})\}_{k=1}^{K-1})$. These intermediate volumes are used only as supervision and are not fed into the network.

A generic endpoint-conditioned learning objective is written as:

$$\theta^* = \arg \min_{\theta} \mathbb{E} \left[\frac{1}{|\mathcal{T}|} \sum_{t \in \mathcal{T}} \mathcal{L}_{\text{rec}}(\hat{I}^t, I_t) + \lambda \mathcal{R}(m^t) \right], \quad (2)$$

where m^t denotes the motion representation at time t , such as a deformation or velocity field, and $\mathcal{R}(\cdot)$ regularizes its smoothness or physical plausibility.

Rather than instantiating $\mathcal{F}_\theta$ as a direct image-space regressor, our method models interpolation through a continuous deformation process. The queried time determines the target position within the endpoint interval, while a latent phase coordinate $u \in [0, 1]$ serves as a representation coordinate for motion progression on a normalized phase axis. This separation decouples temporal localization from motion representation and forms the basis of the proposed method.

3.2 Finite-Fourier Periodic Deformation

We model endpoint-conditioned interpolation as a continuously queryable deformation process on a latent phase domain, rather than as a collection of independent predictions at isolated query times. This process is parameterized by a finite Fourier basis, which allows repetitive or near-periodic motion structure to be encoded directly in the representation. Specifically, let $v(x, u) \in \mathbb{R}^3$ denote a phase-conditioned velocity field, where $x \in \Omega$ and $u \in [0, 1]$ indexes motion progression on a normalized phase interval. Under this formulation, intermediate synthesis is derived from a unified anatomical evolution process rather than from disconnected image-space predictions.

To encode phase-wise regularity explicitly, we represent $v(x, u)$ by a finite Fourier expansion on the phase axis:

$$v(x, u) = c(x) + \sum_{n=1}^N [a_n(x) \cos(2\pi nu) + b_n(x) \sin(2\pi nu)], \quad (3)$$

where N denotes the truncation order, $c(x) \in \mathbb{R}^3$ is the zeroth-order component, and $a_n(x), b_n(x) \in \mathbb{R}^3$ are the cosine and sine coefficient fields at order n . This gives $v(x, u+1) = v(x, u)$ by construction, imposing periodicity at the representation level. Lower-order components capture coarse phase-scale motion, while higher-order terms model finer phase-dependent variation.

This formulation differs from both discrete interpolation and generic continuous regression. In our case, phase dependence is restricted to a finite Fourier subspace, making the periodic prior intrinsic to the admissible deformation family. The model therefore learns coefficients of a structured motion process rather than a collection of temporally indexed deformation snapshots.

In implementation, the network predicts the coefficient volumes $\{c, a_n, b_n\}_{n=1}^N$ from the endpoint pair (I_s, I_e) only once, after which the velocity field can be evaluated continuously at any phase u . To stabilize this truncated spectral representation, we impose frequency-aware regularization on the coefficient fields:

$$\mathcal{L}_{\text{reg}} = \sum_{n=1}^N n^\gamma \left(\|a_n\|_{L^2(\Omega)}^2 + \|b_n\|_{L^2(\Omega)}^2 \right), \quad (4)$$

where $\gamma > 0$ controls the penalty strength on higher-order terms. We set $\gamma = 1.5$ in practice. This regularizer controls the spectral complexity of the phase-varying deformation process and improves the stability of continuous interpolation under finite-order truncation [20].

An additional advantage of this representation is that phase variation admits a direct spectral interpretation, which motivates the temporal alignment developed next.

PROPOSITION 3.1 (SPECTRAL IDENTITY FOR PHASE VARIATION). *For the finite-Fourier representation in Eq. (3), the cycle-averaged squared phase variation satisfies:*

$$\int_0^1 \int_\Omega \|\partial_u v(x, u)\|_2^2 dx du = 2\pi^2 \sum_{n=1}^N n^2 \left(\|a_n\|_{L^2(\Omega)}^2 + \|b_n\|_{L^2(\Omega)}^2 \right). \quad (5)$$

This identity highlights an important advantage of the finite-Fourier deformation representation: phase-wise deformation variation is characterized explicitly by a frequency-squared weighted

spectral energy. The contribution of each Fourier component to motion variation is therefore transparent, with higher-order components governing more rapidly changing phase-dependent dynamics. As a result, the learned spectrum admits a clear interpretation, and the temporal complexity of the deformation process can be analyzed directly from the coefficients rather than only being reflected implicitly in network activations. Proofs of this proposition, together with the derivations of subsequent related formulas, are provided in the supplementary material.

3.3 Time-to-Phase Reparameterization

Physiological motion generally does not evolve uniformly over observation time [8]. Although the deformation process is represented continuously on the latent phase axis, equal increments in queried time do not necessarily correspond to equal progression along phase. Directly equating queried time with phase may therefore allocate temporal resolution poorly along the motion progression. We thus introduce a deterministic temporal reparameterization that maps queried time to a motion-aware phase coordinate while preserving the periodic deformation model.

We quantify phase-wise deformation variation by:

$$s(u) = \frac{1}{|\Omega|} \int_\Omega \|\partial_u v(x, u)\|_2^2 dx, \quad u \in [0, 1]. \quad (6)$$

Based on this variation profile, we define the normalized phase density as:

$$\rho(u) = \frac{\varepsilon + s(u)}{\int_0^1 (\varepsilon + s(\xi)) d\xi}, \quad \varepsilon = 10^{-6}, \quad (7)$$

where ε is introduced to ensure that $\rho(u)$ remains strictly positive. The associated cumulative phase measure is then:

$$\Psi(u) = \int_0^u \rho(\xi) d\xi. \quad (8)$$

The aligned phase coordinate is obtained by:

$$\tau(t) = \Psi^{-1}(t), \quad t \in [0, 1]. \quad (9)$$

Since $\rho(u)$ is normalized on $[0, 1]$, the cumulative map Ψ satisfies $\Psi(0) = 0$ and $\Psi(1) = 1$. Therefore, its inverse $\tau = \Psi^{-1}$ is endpoint-aligned by construction, i.e., $\tau(0) = 0$ and $\tau(1) = 1$.

LEMMA 3.2 (WELL-POSEDNESS OF THE PHASE-ALIGNED MAP). *Assume that s is continuous on $[0, 1]$. Then ρ is continuous and strictly positive on $[0, 1]$, Ψ is a strictly increasing bijection from $[0, 1]$ onto $[0, 1]$, and $\tau = \Psi^{-1}$ is a continuous strictly increasing bijection satisfying $\tau(0) = 0$ and $\tau(1) = 1$. If, in addition, there exist constants $0 < m \leq M < \infty$ such that*

$$m \leq \rho(u) \leq M, \quad \forall u \in [0, 1], \quad (10)$$

then τ is bi-Lipschitz on $[0, 1]$.

The reparameterization is induced by the learned deformation process itself rather than by an additional temporal predictor. Phases with larger deformation variation receive greater density mass and are therefore assigned finer temporal resolution after inversion by Ψ , whereas slowly varying phases are traversed more coarsely.

Let $V(u) = v(\cdot, u)$ denote the phase-indexed deformation trajectory in $L^2(\Omega; \mathbb{R}^3)$, and let $\tilde{V}(t) = V(\tau(t))$ denote its reparameterized counterpart. The following result shows that temporal

reparameterization changes traversal speed but not the underlying trajectory.

THEOREM 3.3 (UNIFORM TRAVERSAL UNDER THE PHASE METRIC). *Assume that V is absolutely continuous on $[0, 1]$, and let τ be defined by Eqs. (7)–(9). Then $\tilde{V}$ and V have the same image:*

$$\{\tilde{V}(t) : t \in [0, 1]\} = \{V(u) : u \in [0, 1]\}. \quad (11)$$

Moreover, $\tilde{V}$ traverses this trajectory at constant speed with respect to the phase density, in the sense that

$$\rho(\tau(t)) \tau'(t) = 1 \quad \text{for almost every } t \in [0, 1]. \quad (12)$$

This result shows that the proposed mapping preserves the continuous periodic deformation trajectory while redistributing queried times according to phase-wise deformation complexity. The aligned phase coordinate $\tau(t)$ is subsequently used to evaluate the target deformation state for continuous synthesis from the two endpoints.

3.4 Bidirectional Continuous Synthesis and Training Objective

With the phase-aligned mapping $\tau(t)$, the learned periodic deformation process can be queried continuously at arbitrary observation times. Accordingly, we synthesize the target volume by transporting both endpoints to the queried time rather than by direct intensity regression. Specifically, let $W(I_s; s \rightarrow t)$ denote the volume obtained by warping a source volume I_s from time s to time t along the deformation flow induced by the phase-conditioned velocity field evaluated on $\tau(\cdot)$, where the transport is computed by numerically integrating the corresponding flow with a discretized Euler scheme [35]. The two directional candidates therefore differ only in their source endpoint and transport direction:

$$\hat{I}_s^t = W(I_s; t_s \rightarrow t), \quad \hat{I}_e^t = W(I_e; t_e \rightarrow t). \quad (13)$$

To ensure that the deformation-driven synthesis remains anatomically meaningful before refinement, we first supervise the two warped candidates directly. The morphing loss is defined as:

$$\mathcal{L}_{\text{morph}} = \frac{1}{|\mathcal{T}|} \sum_{t \in \mathcal{T}} [\mathcal{L}_{\text{sim}}(\hat{I}_s^t, I_t) + \mathcal{L}_{\text{sim}}(\hat{I}_e^t, I_t)], \quad (14)$$

where $\mathcal{T}$ denotes the set of supervised timestamps, and $\mathcal{L}_{\text{sim}}(\cdot, \cdot) = \mathcal{L}_{\text{ncc}}(\cdot, \cdot) + \lambda_{\text{charb}} \mathcal{L}_{\text{charb}}(\cdot, \cdot)$ combines a local normalized cross-correlation loss with a Charbonnier term weighted by a small coefficient λ_{charb} .

In addition, the learned periodic transport should remain consistent over a full normalized phase traversal. We therefore construct a forward cycle by transporting I_s through one complete normalized phase period and a backward cycle by transporting I_e through one complete normalized phase period in the reverse direction, then compare the returned volumes with their corresponding endpoints [13]. The resulting cycle loss is:

$$\mathcal{L}_{\text{cyc}} = \mathcal{L}_{\text{ncc}}(\hat{I}_s^{\text{cyc}}, I_s) + \mathcal{L}_{\text{ncc}}(\hat{I}_e^{\text{cyc}}, I_e), \quad (15)$$

where $\hat{I}_s^{\text{cyc}}$ denotes the volume obtained by forward warping I_s through one full normalized phase period, and $\hat{I}_e^{\text{cyc}}$ denotes the volume obtained by backward warping I_e through one full normalized phase period.

After bidirectional transport, the two candidates are fused using distance-aware weighting on the observation-time axis and then

refined by a lightweight residual network to compensate for appearance errors that are not fully resolved by deformation alone. The final prediction is written as:

$$\hat{I}^t = \frac{t_e - t}{t_e - t_s} \hat{I}_s^t + \frac{t - t_s}{t_e - t_s} \hat{I}_e^t + R([\hat{I}_s^t, \hat{I}_e^t]), \quad (16)$$

where $R(\cdot)$ takes the concatenation of the two warped candidates as input and predicts a local correction term.

Since refinement operates on the fused prediction rather than on each directional warp separately, the refinement loss is imposed only at the final output stage:

$$\mathcal{L}_{\text{refine}} = \frac{1}{|\mathcal{T}|} \sum_{t \in \mathcal{T}} [\mathcal{L}_{\text{charb}}(\hat{I}^t, I_t) + \lambda_{\text{grad}} \mathcal{L}_{\text{grad}}(\hat{I}^t, I_t)], \quad (17)$$

where $\mathcal{L}_{\text{grad}}$ denotes the gradient reconstruction loss, and λ_{grad} controls its contribution relative to the Charbonnier term.

Combining the deformation-level supervision, the refinement supervision, and the spectral regularization, the overall training objective is:

$$\mathcal{L} = \lambda_{\text{morph}} \mathcal{L}_{\text{morph}} + \lambda_{\text{cyc}} \mathcal{L}_{\text{cyc}} + \lambda_{\text{refine}} \mathcal{L}_{\text{refine}} + \lambda_{\text{reg}} \mathcal{L}_{\text{reg}}. \quad (18)$$

In this way, the deformation process is first constrained directly through bidirectional warping and phase-cycle consistency, after which residual refinement further improves appearance fidelity at the image level.

4 Experiments and Results

4.1 Experimental Settings

We evaluate the proposed method on two public 4D medical imaging benchmarks, ACDC [3] and 4D-Lung [19]. ACDC contains 150 cardiac MRI cases, split into 80, 20, and 50 cases for training, validation, and testing. All volumes are resized to $160 \times 160 \times 16$, and the end-diastolic and end-systolic phases are used as endpoints. The 4D-Lung dataset contains 500 cone-beam CT volumes, split at the patient level into 306, 84, and 110 cases to avoid leakage across subsets. All volumes are resized to $128 \times 128 \times 32$, and the 0% and 50% respiratory phases are used as endpoints. For both datasets, the endpoint times are set to $t_s = 0$ and $t_e = 0.5$. All volumes are histogram-equalized and linearly normalized to $[0, 1]$.

We report Peak Signal-to-Noise Ratio (PSNR), Normalized Mutual Information (NMI), and Structural Similarity (SSIM) as the evaluation metrics. These metrics assess interpolation quality from complementary perspectives, including reconstruction fidelity, statistical dependence, and structural consistency. During both training and inference, the task is formulated in an endpoint-conditioned manner. Intermediate frames are used only as supervision and for quantitative evaluation, while the model input always consists of the two endpoint volumes together with the queried time.

For fair comparison, all methods are trained under the same optimization protocol. We use AdamW with an initial learning rate of 2×10^{-4} and a cosine annealing schedule. Training is conducted for 500 epochs on ACDC and 200 epochs on 4D-Lung with early stopping. The batch size is set to 1, and gradient accumulation over 8 iterations is adopted to stabilize 3D training. We report the mean and standard deviation computed over multiple runs with different random seeds.

Table 1: Quantitative comparison on the ACDC and 4D-Lung datasets in terms of PSNR, NMI and SSIM, with model size (#P) also reported.

Method	Venue	ACDC			4D-Lung			#P (M)
		PSNR $\uparrow$ dB	NMI $\uparrow$ $\times 10^{-2}$	SSIM $\uparrow$ $\times 10^{-2}$	PSNR $\uparrow$ dB	NMI $\uparrow$ $\times 10^{-2}$	SSIM $\uparrow$ $\times 10^{-2}$	
VM [1]	TMI'19	25.694 ± 0.074	53.543 ± 0.367	94.678 ± 0.104	26.077 ± 0.066	43.982 ± 0.355	86.055 ± 0.292	10.044
TM [6]	MedIA'22	27.125 ± 0.200	64.628 ± 0.671	96.644 ± 0.123	26.683 ± 0.051	48.945 ± 0.104	84.779 ± 0.125	10.804
MPVF [38]	JBHI'23	32.144 ± 0.011	70.658 ± 0.038	98.669 ± 0.003	29.909 ± 0.035	53.074 ± 0.389	90.180 ± 0.053	14.533
SVIN [14]	CVPR'20	28.434 ± 0.443	60.178 ± 0.335	97.352 ± 0.152	27.312 ± 0.280	43.171 ± 0.392	85.442 ± 0.286	12.393
IFRNet [25]	CVPR'22	32.447 ± 0.070	70.736 ± 0.149	98.741 ± 0.023	29.825 ± 0.058	51.567 ± 0.539	90.370 ± 0.092	24.520
AMT [29]	CVPR'23	31.009 ± 0.267	71.461 ± 0.438	98.389 ± 0.077	28.881 ± 0.773	62.101 ± 1.080	87.954 ± 1.723	23.336
VFIFME [44]	CVPR'23	29.627 ± 3.297	66.215 ± 8.075	97.250 ± 4.624	29.711 ± 1.183	50.843 ± 4.208	89.677 ± 1.887	24.089
UVI-Net [24]	CVPR'24	31.903 ± 0.118	72.252 ± 0.166	98.618 ± 0.027	28.948 ± 0.277	55.157 ± 0.841	88.750 ± 0.668	14.273
PerVFI [39]	CVPR'24	32.300 ± 0.702	68.755 ± 2.484	98.642 ± 0.599	28.523 ± 0.187	47.701 ± 0.332	87.614 ± 0.047	29.432
FB-Diff [43]	ICCV'25	29.387 ± 0.103	62.135 ± 0.274	97.483 ± 0.163	27.617 ± 0.867	49.275 ± 1.345	80.913 ± 3.712	33.527
DDM [23]	MICCAI'22	28.558 ± 1.679	64.142 ± 1.349	97.237 ± 0.872	26.896 ± 0.101	42.544 ± 0.894	85.229 ± 0.270	23.178
LDDM [7]	MICCAI'24	31.839 ± 0.033	72.333 ± 0.302	98.551 ± 0.013	27.563 ± 0.111	56.577 ± 8.077	83.499 ± 12.092	15.545
TMSDF [45]	MICCAI'25	31.974 ± 0.225	66.401 ± 0.833	98.558 ± 0.072	29.848 ± 0.023	48.360 ± 0.113	90.289 ± 1.086	42.283
Ours	-	32.503 ± 0.176	72.408 ± 0.780	98.765 ± 0.042	30.460 ± 0.038	62.659 ± 0.565	92.229 ± 0.141	20.813

For the proposed method, the Fourier truncation order is set to $N = 4$. We set $\lambda_{\text{charb}} = 10$, use an NCC window size of 7, set $\lambda_{\text{grad}} = 1.0$, and set the overall loss weights to $\lambda_{\text{morph}} = 1$, $\lambda_{\text{cyc}} = 1$, $\lambda_{\text{refine}} = 5$, and $\lambda_{\text{reg}} = 0.005$. For spectral regularization, the order exponent is set to $\gamma = 1.5$.

4.2 Comparison Study

Table 1 shows clear performance differences among the compared methods on both ACDC and 4D-Lung. Earlier baselines such as VoxelMorph (VM) [1] and TransMorph (TM) [6] remain comparatively limited, suggesting that endpoint-conditioned interpolation requires stronger dynamic modeling than direct endpoint correspondence transfer. Dedicated volumetric interpolation methods, including SVIN [14], MPVF [38], UVI-Net [24], and TMSDF [45], achieve stronger results, while natural video interpolation models such as IFRNet [25] and AMT [29] remain competitive on several metrics. Generative variants including DDM [23] and FB-Diff [43] also benefit from richer temporal priors, although their gains are less consistent across datasets and criteria. In contrast, our method achieves the most consistent overall performance on both benchmarks. This indicates that modeling near-periodic physiological motion through finite-Fourier deformation and temporal reparameterization improves 4D interpolation across datasets and metrics.

Fig. 2 further shows visually meaningful improvements in interpolation quality. On ACDC, the predicted intermediate volumes better preserve regular boundaries and thin intracavitary low-signal structures, especially when local motion is less uniform. On 4D-Lung, the recovered intermediates better preserve coherent global organization and clearer perihilar vessel-bundle-like structures across time. In contrast, deformation-transfer and feature-based baselines more often show local inconsistency or unstable structural arrangement, while generative models may trade structural

stability for visual smoothness. Together with Table 1, these observations indicate that the proposed method improves not only target-volume accuracy, but also the continuity and plausibility of the recovered motion.

4.3 Ablation on Periodic Deformation Modeling

Effect of the Fourier truncation order. Fig. 3(a) examines how the truncation order affects the proposed periodic deformation model. The overall trend shows that introducing a small number of phase-varying Fourier terms already brings clear improvement over the lowest-order setting, and that performance peaks at a moderate order before saturating or slightly declining. This suggests that the main interpolation dynamics can be represented within a compact low-order periodic subspace, whereas adding more orders mainly increases modeling flexibility in ways that are less tightly constrained by endpoint-conditioned supervision. The version with $\mathcal{L}_{\text{reg}}$ remains consistently better across different orders, indicating that the proposed formulation benefits not only from periodic parameterization itself, but also from explicitly shaping how phase-dependent motion is distributed across spectral components. **Comparison with alternative temporal basis functions.** Fig. 3(b) further compares the Fourier basis with two non-periodic alternatives, namely Chebyshev polynomials and cubic splines, on both ACDC and 4D-Lung. These alternatives also provide smooth continuous parameterization and achieve reasonably strong results, but the Fourier basis remains consistently better across the two datasets. This comparison suggests that the gain is not simply due to replacing discrete timestamps with another continuous basis. Rather, periodic parameterization offers a more suitable inductive bias by restricting the admissible deformation family to follow cycle-consistent evolution, which better matches the near-periodic nature of physiological motion.

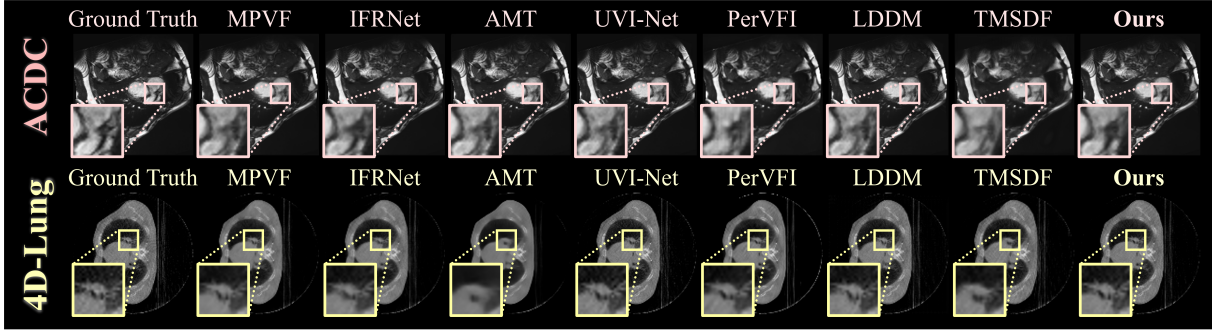


Figure 2: Qualitative comparison on the ACDC and 4D-Lung datasets, showing better preservation of thin intracavitary low-signal structures in ACDC and clearer perihilar vessel-bundle-like structures in 4D-Lung.

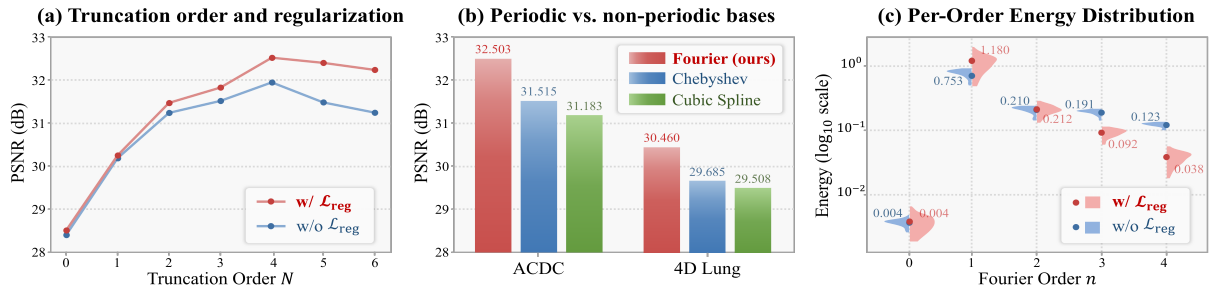


Figure 3: Ablation studies on periodic deformation field modeling. (a) Effect of the truncation order N and the regularization term $\mathcal{L}_{\text{reg}}$. (b) Replacing the Fourier basis with Chebyshev polynomials and cubic splines to assess the role of periodic parameterization. (c) Spectral energy distribution across Fourier orders, with and without $\mathcal{L}_{\text{reg}}$.

Distribution of spectral energy across Fourier orders. To further inspect the learned representation, Fig. 3(c) reports the order-wise coefficient energy, computed as $E_n = |\Omega|^{-1}(\|a_n\|_2^2 + \|b_n\|_2^2)$, with $E_0 = |\Omega|^{-1}\|c\|_2^2$. With $\mathcal{L}_{\text{reg}}$, energy is concentrated more heavily in the low orders, especially the first harmonic, while higher-order components are suppressed. Without regularization, the spectrum is flatter, with more energy remaining in the upper orders. The nearly unchanged zeroth-order term suggests that $\mathcal{L}_{\text{reg}}$ reorganizes the phase-dependent spectrum rather than merely shrinking the overall deformation field. Together with Fig. 3(a), this supports capturing the dominant motion cycle with a compact periodic representation rather than dispersed higher-order variation.

4.4 Ablation on Temporal Reparameterization

Relation to frame-wise motion intensity. Fig. 4(a) analyzes how the effect of temporal reparameterization varies with motion intensity. We score each target frame by the mean $1 - \text{NCC}$ to its two neighboring frames, sort all frames by this score, and split them at the median into low-motion and high-motion groups. The resulting PSNR distributions show that the two variants remain close on the low-motion group, whereas a clearer gap appears on the high-motion group in both datasets. This is consistent with the role of temporal reparameterization: when inter-frame motion is limited, linear time already approximates motion progression reasonably well, while stronger motion makes such approximation less

Table 2: Loss term ablation on ACDC.

$\mathcal{L}_{\text{refine}}$	$\mathcal{L}_{\text{morph}}$	$\mathcal{L}_{\text{cycle}}$	$\mathcal{L}_{\text{reg}}$	$\text{PSNR}_{\text{dB}}^{\uparrow}$	$\text{NMI}_{\times 10^{-2}}^{\uparrow}$	$\text{SSIM}_{\times 10^{-2}}^{\uparrow}$
✓				30.700	63.753	98.206
✓	✓			31.786	66.766	98.528
✓	✓	✓		31.927	67.812	98.583
✓	✓	✓	✓	32.503	72.408	98.765

adequate and leaves more room for a phase-based parameterization to improve interpolation.

Effect of temporal reparameterization. Fig. 4(b) compares the proposed model with and without temporal reparameterization on ACDC and 4D-Lung using visual examples and quantitative results. Consistent with the analysis above, the difference is clearer in large-motion cases, where removing temporal reparameterization leads to weaker interpolation quality and less accurate structural recovery. These results suggest that the gain comes from replacing linear time with a phase coordinate that better matches deformation progression.

4.5 Additional Analysis

Ablation on loss terms. Table 2 examines how different loss components contribute to the proposed framework. Starting from

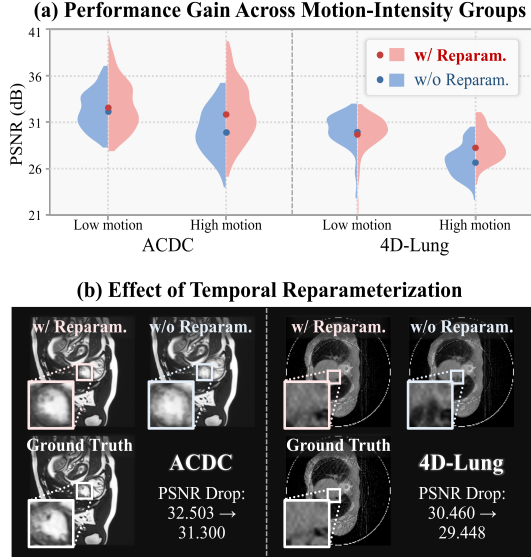


Figure 4: Ablation on temporal reparameterization. (a) Analysis of interpolation performance across frame groups with different motion intensities on ACDC and 4D-Lung. (b) Qualitative and quantitative comparison with and without temporal reparameterization, including visualization examples under large motion.

the basic reconstruction objective, each additional term brings further improvement across the reported metrics, and the full objective achieves the best overall results. This trend suggests that the gains do not come from a single constraint alone, but from the complementarity among the objectives. In particular, the cycle-related constraint helps improve temporal consistency of the bidirectional synthesis, while the regularization term further stabilizes the learned deformation representation. Rather than only improving the queried target volume itself, their combination also leads to a more coherent motion recovery process.

Zero-shot extrapolation beyond the observed interval. Fig. 5 evaluates queries beyond the observed interval $[t_s, t_e]$ defined by the endpoint frames. At short extrapolation distances, all methods produce reasonable predictions, but their differences increase farther beyond t_e . Quantitatively, our method shows slower performance decay, while VoxelMorph remains at a lower level and LDDM drops more sharply with increasing distance. The visual results are consistent with this trend: VoxelMorph tends to continue the observed motion pattern even when the target anatomy evolves differently, whereas LDDM becomes less stable and introduces implausible structures at larger offsets. In contrast, our method remains better aligned with the unseen future targets, suggesting that the learned deformation representation captures a more extensible motion pattern rather than only fitting the observed interval.

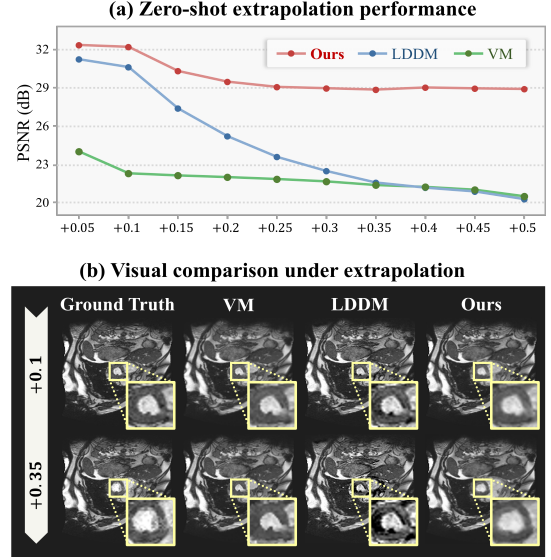


Figure 5: Zero-shot extrapolation beyond the observed interval on the ACDC dataset. Models are trained using only frames within $[t_s, t_e]$ and directly evaluated on unseen future queries beyond the observed endpoint. (a) PSNR at different extrapolation offsets for our method and baselines. (b) Visual comparison at two increasing future query offsets.

5 Conclusion

In this paper, we presented a phase-aware framework for 4D medical image interpolation that explicitly models structured and non-uniform physiological motion. Rather than treating interpolation as direct intensity prediction or relying on loosely constrained temporal conditioning, our method learns a continuous anatomical deformation process. A finite Fourier parameterization encodes periodic deformation patterns in a compact and interpretable manner, while phase-aligned temporal reparameterization bridges physical time and motion progression when the dynamics evolve unevenly. Combined with bidirectional endpoint warping and lightweight refinement, the framework enables anatomically plausible synthesis at arbitrary queried times. Experiments on ACDC and 4D-Lung demonstrate the effectiveness of the proposed design and suggest that explicitly modeling physiological motion in deformation space is a promising direction for continuous 4D medical image interpolation.

Acknowledgments

This work was supported in part by the National Natural Science Foundation of China under Grant No. 62401246 and by the Shenzhen Science and Technology Program under Grant Nos. JCYJ20250604185805008 and JCYJ20240813095112017. The authors gratefully acknowledge Beijing Tiromu Medical Technology Co., Ltd. and Shenzhen DE Sci&Tech Co., Ltd. for their support in technical validation and for providing a practical platform for this work.

References

- [1] Guha Balakrishnan, Amy Zhao, Mert R Sabuncu, John Gutttag, and Adrian V Dalca. 2019. Voxelmorph: a learning framework for deformable medical image registration. *IEEE transactions on medical imaging* 38, 8 (2019), 1788–1800.
- [2] Jaume Banus, Antoine Delaloye, Pedro M. Gordaliza, Costa Georgantas, Ruud B van Heeswijk, and Jonas Richiardi. 2025. NIMOSEF: Neural Implicit Motion and Segmentation Functions. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 444–454.
- [3] Olivier Bernard, Alain Lalande, Clement Zotti, Frederick Cervenansky, Xin Yang, Pheng-Ann Heng, Irem Cetin, Karim Lekadir, Oscar Camara, Miguel Angel Gonzalez Ballester, et al. 2018. Deep learning techniques for automatic MRI cardiac multi-structures segmentation and diagnosis: is the problem solved? *IEEE transactions on medical imaging* 37, 11 (2018), 2514–2525.
- [4] Julian Betancur, Antoine Simon, Bernard Langella, Christophe Leclercq, Alfredo Hernandez, and Mireille Garreau. 2015. Synchronization and registration of cine magnetic resonance and dynamic computed tomography images of the heart. *IEEE journal of biomedical and health informatics* 20, 5 (2015), 1369–1376.
- [5] Wei Xuan Chan, Yu Zheng, Hadi Wiputra, Hwa Liang Leo, and Choon Hwai Yap. 2021. Full cardiac cycle asynchronous temporal compounding of 3D echocardiography images. *Medical Image Analysis* 74 (2021), 102229.
- [6] Junyu Chen, Eric C Frey, Yufan He, William P Segars, Ye Li, and Yong Du. 2022. Transmorph: Transformer for unsupervised medical image registration. *Medical image analysis* 82 (2022), 102615.
- [7] Tingxiu Chen, Yilei Shi, Zixuan Zheng, Bingcong Yan, Jingliang Hu, Xiao Xiang Zhu, and Lichao Mou. 2024. Ultrasound image-to-video synthesis via latent dynamic diffusion models. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 764–774.
- [8] Deepak Roy Chittajallu, Matthew McCormick, Samuel Gerber, Tomasz J Czer-nuszewicz, Ryan Gessner, Monte S Willis, Marc Niethammer, Roland Kwitt, and Stephen R Aylward. 2018. Image-based methods for phase estimation, gating, and temporal superresolution of cardiac ultrasound. *IEEE Transactions on Biomedical Engineering* 66, 1 (2018), 72–79.
- [9] Cheol Jun Cho, Edward Chang, and Gopala Anumanchipalli. 2023. Neural latent aligner: cross-trial alignment for learning representations of complex, naturalistic neural data. In *International Conference on Machine Learning*. PMLR, 5661–5676.
- [10] Marco Cuturi and Mathieu Blondel. 2017. Soft-dtw: a differentiable loss function for time-series. In *International conference on machine learning*. PMLR, 894–903.
- [11] Duolikun Danier, Fan Zhang, and David Bull. 2024. Ldmvfi: Video frame interpolation with latent diffusion models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 38. 1472–1480.
- [12] Fansong Dong, Yiyun Wu, Chuhao Yin, Juan Tu, Dong Zhang, and Xiasheng Guo. 2025. Multicycle Temporal Compounding Sonography for Despeckling at Specified Respiratory Phases. *IEEE Transactions on Medical Imaging* (2025).
- [13] Debidatta Dwibedi, Yusuf Aytar, Jonathan Tompson, Pierre Sermanet, and Andrew Zisserman. 2019. Temporal cycle-consistency learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 1801–1810.
- [14] Yuyu Guo, Lei Bi, Euijoon Ahn, Dagan Feng, Qian Wang, and Jinman Kim. 2020. A spatiotemporal volumetric interpolation network for 4d dynamic medical image. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 4726–4735.
- [15] Isma Hadji, Konstantinos G Derpanis, and Allan D Jepson. 2021. Representation learning via global temporal alignment and cycle-consistency. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 11068–11077.
- [16] Jesse I Hamilton, Gastao Cruz, William Truesdell, Prachi Agarwal, Imran Rashid, and Nicole Seiberlich. 2025. Multifrequency Time-Dependent Deep Image Prior for Real-Time Free-Breathing Cardiac Imaging. *NMR in Biomedicine* 38, 9 (2025), e70114.
- [17] Weihua He, Kaichao You, Zhendong Qiao, Xu Jia, Ziyang Zhang, Wenhui Wang, Huchuan Lu, Yaoyuan Wang, and Jianxing Liao. 2022. Timereplayer: Unlocking the potential of event cameras for video interpolation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 17804–17813.
- [18] Mengshun Hu, Kui Jiang, Zhihang Zhong, Zheng Wang, and Yinqiang Zheng. 2024. Iq-vfi: Implicit quadratic motion estimation for video frame interpolation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 6410–6419.
- [19] Geoffrey D. Hugo, Elisabeth Weiss, William C. Sleeman, Salim Balik, Paul J. Keall, Jun Lu, and Jeffrey F. Williamson. 2016. Data from 4D Lung Imaging of NSCLC Patients (Version 2). doi:10.7937/K9/TCIA.2016.ELN8YGLE [Data set].
- [20] Haochen Ji, Zongyu Zuo, and Qing-Long Han. 2025. Pseudo-Label Guided Sparse Regression With Spectral and Spatial Regularization for Hyperspectral Band Selection. *IEEE Transactions on Instrumentation and Measurement* 74 (2025), 1–15.
- [21] Xi Jia, Joseph Bartlett, Wei Chen, Siyang Song, Tianyang Zhang, Xinxing Cheng, Wenqi Lu, Zhaowen Qiu, and Jinming Duan. 2023. Fourier-net: Fast image registration with band-limited deformation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 37. 1015–1023.
- [22] Ankita Joshi and Yi Hong. 2023. R2Net: Efficient and flexible diffeomorphic image registration using Lipschitz continuous residual networks. *Medical Image Analysis* 89 (2023), 102917.
- [23] Boah Kim and Jong Chul Ye. 2022. Diffusion deformable model for 4D temporal medical image generation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 539–548.
- [24] JungEun Kim, Hangyul Yoon, Geondo Park, Kyungsu Kim, and Eunho Yang. 2024. Data-efficient unsupervised interpolation without any intermediate frame for 4d medical images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 11353–11364.
- [25] Lingtong Kong, Boyuan Jiang, Donghao Luo, Wenqing Chu, Xiaoming Huang, Ying Tai, Chengjie Wang, and Jie Yang. 2022. Ifrnet: Intermediate feature refine network for efficient frame interpolation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 1969–1978.
- [26] Chenhao Li, Elijah Stanger-Jones, Steve Heim, and Sangbae Kim. 2024. Fld: Fourier latent dynamics for structured motion representation and learning. *arXiv preprint arXiv:2402.13820* (2024).
- [27] Xia Li, Runzhao Yang, Xiangtai Li, Antony Lomax, Ye Zhang, and Joachim Buhmann. 2024. CPT-Interp: continuous spatial and temporal motion modeling for 4D medical image interpolation. *arXiv preprint arXiv:2405.15385* (2024).
- [28] Zhongsen Li, Aiqi Sun, Haining Wei, Wenxuan Chen, Chuyu Liu, Haozhong Sun, Chenlin Du, and Rui Li. 2025. Unsupervised 4D-flow MRI reconstruction based on partially-independent generative modeling and complex-difference sparsity constraint. *Medical Image Analysis* (2025), 103769.
- [29] Zhen Li, Zuo-Liang Zhu, Ling-Hao Han, Qibin Hou, Chun-Le Guo, and Ming-Ming Cheng. 2023. Amt: All-pairs multi-field transforms for efficient frame interpolation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 9801–9810.
- [30] Yuhuan Lu, Guanghua Tan, Bin Pu, Pak-Hei Yeung, Hang Wang, Shengli Li, Jagath C Rajapakse, and Kenli Li. 2025. Optical flow-enhanced mamba u-net for cardiac phase detection in ultrasound videos. *IEEE Transactions on Medical Imaging* (2025).
- [31] Qingjie Meng, Wenjia Bai, Declan P O'Regan, and Daniel Rueckert. 2023. DeepMesh: mesh-based cardiac motion tracking using deep learning. *IEEE transactions on medical imaging* 43, 4 (2023), 1489–1500.
- [32] Simon Perrin, Sébastien Levilly, Harold Mouchère, and Jean-Michel Serfaty. 2025. Super-resolution and segmentation of 4D Flow MRI using Deep learning and Weighted Mean Frequencies. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 552–561.
- [33] Chengkang Shen, Hao Zhu, You Zhou, Yu Liu, Si Yi, Lili Dong, Weipeng Zhao, David J Brady, Xun Cao, Zhan Ma, et al. 2024. Continuous 3D myocardial motion tracking via echocardiography. *IEEE Transactions on Medical Imaging* 43, 12 (2024), 4236–4252.
- [34] Gaurav Shrivastava and Abhinav Shrivastava. 2024. Video prediction by modeling videos as continuous multi-dimensional processes. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 7236–7245.
- [35] Shanlin Sun, Kun Han, Chenyu You, Hao Tang, Deying Kong, Junayed Naushad, Xiangyi Yan, Haoyu Ma, Pooya Khosravi, James S Duncan, et al. 2024. Medical image registration via neural fields. *Medical Image Analysis* 97 (2024), 103249.
- [36] Tom Vercauteren, Xavier Pennec, Aymeric Perchant, and Nicholas Ayache. 2009. Diffeomorphic demons: Efficient non-parametric image registration. *NeuroImage* 45, 1 (2009), S61–S72.
- [37] Miaowei Wang, Changjian Li, and Amir Vaxman. 2025. CanFields: Consolidating Diffeomorphic Flows for Non-Rigid 4D Interpolation from Arbitrary-Length Sequences. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 28587–28598.
- [38] Tzu-Ti Wei, Chin Kuo, Yu-Chee Tseng, and Jen-Jee Chen. 2023. Mpvf: 4d medical image inpainting by multi-pyramid voxel flows. *IEEE Journal of Biomedical and Health Informatics* 27, 12 (2023), 5872–5882.
- [39] Guangyang Wu, Xin Tao, Changlin Li, Wenyi Wang, Xiaohong Liu, and Qingqing Zheng. 2024. Perception-oriented video frame interpolation via asymmetric blending. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 2753–2762.
- [40] Jipeng Yan, Qingyuan Tan, Shusei Kawara, Jingwen Zhu, Bingxue Wang, Matthieu Toulemonde, Honghai Liu, Ying Tan, and Meng-Xing Tang. 2025. Online 4D Ultrasound-Guided Robotic Tracking Enables 3D Ultrasound Localisation Microscopy with Large Tissue Displacements. *IEEE transactions on medical imaging* (2025).
- [41] Yingyu Yang, Qianye Yang, Kangning Cui, Can Peng, Elena D'Alberty, Netzahualcoyotl Hernandez-Cruz, Olga Patey, Aris T Papageorgiou, and J Alison Noble. 2025. Latent Motion Profiling for Annotation-Free Cardiac Phase Detection in Adult and Fetal Echocardiography Videos. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 316–325.
- [42] Jaeyun Yoo, Kyong Hwan Jin, Harshit Gupta, Jerome Yerly, Matthias Stuber, and Michael Unser. 2021. Time-dependent deep image prior for dynamic MRI. *IEEE Transactions on Medical Imaging* 40, 12 (2021), 3337–3348.
- [43] Xin You, Runze Yang, Chuyan Zhang, Zhongliang Jiang, Jie Yang, and Nassir Navab. 2025. FB-Diff: Fourier Basis-guided Diffusion for Temporal Interpolation

- of 4D Medical Imaging. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 28010–28020.
- [44] Zhiyang Yu, Yu Zhang, Dongqing Zou, Xijun Chen, Jimmy S Ren, and Shunqing Ren. 2023. Range-nullspace video frame interpolation with focalized motion estimation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 22159–22168.
- [45] Jiaju Zhang, Danni Ai, Zhikun Gan, Tianyu Fu, Jingfan Fan, Hong Song, Deqiang Xiao, and Jian Yang. 2025. Temporal Modulated Multi-scale Deformation Fusion via Knowledge Distillation for 4D Medical Image Interpolation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 551–561.
- [46] Yuantong Zhang and Zhenzhong Chen. 2025. Continuous Space-Time Video Resampling with Invertible Motion Steganography. In *Proceedings of the Computer Vision and Pattern Recognition Conference*. 2116–2126.
- [47] Xuanru Zhou, Jiarun Liu, Shoujun Yu, Hao Yang, Cheng Li, Tao Tan, and Shanshan Wang. 2025. A diffusion-driven temporal super-resolution and spatial consistency enhancement framework for 4D MRI imaging. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 3–12.