

Understanding Dynamic Scenes at Gigapixel Scale: Wide-Area Spatio-Temporal Perception from UAVs

Yuhang Zhu*, Meiyl Zhu*, Yunkai Dang, Zhangnan Li, Yuxuan Wang, Wenbin Li, Hongbing Pan

Nanjing University
mf21320239@smail.nju.edu.cn

Abstract

UAV-borne imaging has advanced from megapixel to gigapixel sensors, shifting aerial perception from recognizing individual targets to understanding entire dynamic scenes. We characterize this demand as *Wide-area Spatio-temporal Scene Understanding (WSTU)*, which requires wide-area coverage, per-target resolution, and temporal continuity at once, a combination existing datasets lack. To fill this gap, we introduce an ultra-High-resolution (12768×9564) **Airborne Remote-sensing Dataset(HARD)** annotated at three levels for object detection, multi-object tracking, and scene-level visual question answering. Ultra-high-resolution imagery raises per-frame processing time to seconds. At that scale latency can no longer be ignored in evaluation. Thus, we propose a latency-aware metric for multi-object tracking called streaming-HOTA (s-HOTA). Extensive baseline experiments show how ultra-high-resolution processing reshapes each task. For detection, the end-to-end pipeline affects accuracy and speed as much as the detector itself does. For tracking, high latency charges the association axis far more unevenly than the detection axis, and association is where pipelines diverge. As a result, the pipeline that performs best offline can lose its lead under s-HOTA. For VQA, vision-language models remain weak at cross-frame identity binding and cannot transfer their single-frame gains to it. Together these findings show that the baselines we evaluate fall short of WSTU. HARD provides the data and the systematic baselines to advance it.

1 Introduction

Remote sensing (Li et al. 2023; Ding et al. 2021; Nie et al. 2025; Ahmad et al. 2026) has long been the primary means of observing ground scenes at scale, with satellite and aerial imagery supporting applications from urban management and traffic monitoring to disaster response. Among remote-sensing platforms, UAVs stand out for flexible low-altitude on-demand observation. Recent advances (Wang et al. 2020) in imaging technology have raised sensor resolution from the megapixel to the gigapixel class, so a single aerial frame can now cover a wide region while preserving per-object detail. This shift has driven UAV vision from early object detection toward higher-level scene understanding. The demand is no longer to localize isolated targets but to describe how the whole scene evolves. We characterize this emerging

*These authors contributed equally.

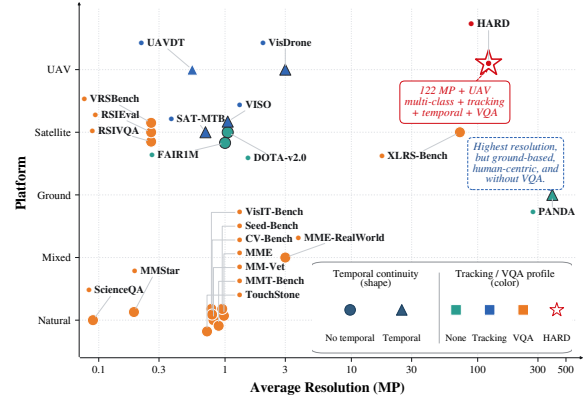


Figure 1: The dataset landscape. Average frame resolution is plotted against acquisition platform. Marker shape indicates temporal continuity and colour indicates whether tracking or VQA annotation is provided. HARD is the only benchmark that combines a UAV platform, 122 MP frames, temporal continuity, multi-class tracking and scene-level VQA.

demand as Wide-area Spatio-temporal Scene Understanding (WSTU). WSTU requires a perception system to reason over wide regions spanning hundreds of meters and to track the objects within them continuously over time. Beyond this, the system should interpret the state of the scene as a whole rather than only its individual objects. We therefore characterize WSTU by two properties that the data should provide. A single frame should be large enough to cover the entire scene. And consecutive frames should be close enough in time to reveal how those targets move.

Figure 1 compares representative existing datasets on the properties that WSTU requires. UAV benchmarks (Du et al. 2018; Zhu et al. 2021) offer wide views but too little resolution to keep targets identifiable. Gigapixel datasets (Wang et al. 2020) reach high resolution only from fixed ground vantage points and lack a UAV’s downward geometry. Satellite datasets (Yin et al. 2021; Li et al. 2023; Ding et al. 2021; Sun et al. 2022) provide spatial coverage but lack the resolution and temporal continuity that dynamic scene understanding needs. More fundamentally, these benchmarks are built around individual objects. They ask where each box is and how each trajectory continues but say almost nothing

ing about the region as a whole. Even recent remote-sensing VQA benchmarks (Li, Ding, and Elhoseiny 2024; Hu et al. 2025; Zheng et al. 2021; Wang et al. 2025) work on single still images rather than on wide areas that change over time. For ultra-high-resolution images, the tiling and fusion pipeline around a detector pushes per-frame latency from milliseconds into seconds. Standard tracking metrics score every prediction against its own frame. The staleness that latency induces is therefore never charged. They reward offline accuracy and ignore whether a tracker can keep pace with the stream.

To close these gaps, we introduce the ultra-High-resolution Airborne Remote-sensing Dataset (HARD). It is a UAV benchmark that pairs gigapixel-class frames with continuous temporal annotation for wide-area spatio-temporal scene understanding. HARD comprises 3,549 frames at a unified 122 MP resolution (12768×9564), flight altitudes from 50 to 355 m, and four flight modes. HARD provides annotations for three tasks that progress from static individual objects to the dynamic scene. Object detection (Level 1) builds on 138,830 expert-audited bounding boxes over four categories. Multi-object tracking (Level 2) extends every box with a cross-frame instance identity. Scene-level VQA (Level 3) rests on 1,565 manually verified question-answer pairs spanning eight question types. In addition to the dataset, we design a latency-aware tracking metric called s-HOTA that evaluates each tracking pipeline online. This fills a gap left by offline metrics when assessing methods on ultra-high-resolution image sequences. Based on this benchmark and metric, we conduct extensive experiments across all three levels, establishing a suite of baselines and laying a foundation for future WSTU research.

Extensive experiments across the three levels lead to four findings. (F1) Wide-area detection at full resolution is shaped as much by the tiling pipeline as by the detector. (F2) Streaming latency charges the association axis far more unevenly than the detection axis. (F3) Which tracking pipeline performs best under streaming is governed by the load ratio $\rho = \Delta t / P$. A pipeline that ranks first under offline evaluation can see its lead weaken or even disappear once it is measured by s-HOTA. (F4) Zero-shot VLM failures separate into two axes, single-frame perception and cross-frame identity binding, and progress on one does not transfer to the other. Models spread over a 37-point range on the first, while eleven of twelve stay within a 13-point band near chance on the second. Our main contributions are as follows:

- We construct a temporal UAV benchmark (HARD), which is the first to jointly provide wide-area coverage, ultra-high resolution, and temporal continuity. It contains 3,549 frames at a unified 122 MP resolution, 138,830 boxes with cross-frame identities, and 1,565 scene-level QA pairs.
- We propose streaming-HOTA, a latency-aware extension of HOTA that charges each tracking pipeline for its end-to-end latency, remedying the zero-latency assumption of offline tracking metrics.
- We evaluate twenty detectors, four trackers, and twelve vision-language models across the three levels. These experiments establish a suite of baselines on HARD and

provide reference points for future WSTU research.

- Our analysis traces how ultra-high-resolution processing shifts the bottleneck of each task. It identifies the factors that govern pipeline performance and turns them into concrete targets for future work on HARD.

2 Related Work

Object Detection and Multi-object Tracking Datasets.

Datasets for aerial object detection and tracking have grown substantially over the past decade. Figure 1 places them against HARD in resolution, platform, temporal continuity and annotation coverage. On the UAV platform, VisDrone (Zhu et al. 2021) and UAVDT (Du et al. 2018) provide rich object annotations and video streams covering diverse urban targets. Their frame resolutions of about 3 MP and 0.55 MP, however, are far too small to expose the challenges of ultra-high-resolution perception. On the satellite platform, VISO (Yin et al. 2021) and SAT-MTB (Li et al. 2023) are likewise limited by small image sizes. DOTA (Ding et al. 2021) and FAIR1M (Sun et al. 2022) contain some large images but offer no temporal data. In fact, 88% of DOTA-v2.0 images are 1024×1024 patches and 45.6% of FAIR1M images are only 800×600 . PANDA (Wang et al. 2020) does offer gigapixel resolution and temporal sequences. But its cameras sit on the ground and look outward at a slanted angle, so the same type of target appears much larger up close than far away. This differs from the near-vertical view that remote sensing works with. Unlike these datasets (Li et al. 2023; Ding et al. 2021; Wang et al. 2020), HARD unifies a UAV platform, 122 MP resolution, temporal sequences, and multi-class tracking in a single corpus, and further adds scene-level VQA annotations.

Remote Sensing Visual Question Answering. In recent years, the visual question answering task has been extended to remote sensing. RSVQA (Lobry et al. 2020) pioneered auto-generated QA from OpenStreetMap annotations, and later work scaled this approach to large satellite corpora such as RSVQAxBEN (Lobry, Demir, and Tuia 2021) and RSIVQA (Zheng et al. 2021). The same approach has also been adapted to narrower settings including bi-temporal change reasoning (CDVQA (Yuan et al. 2022)) and urban-planning relational reasoning (EarthVQA (Wang et al. 2024)). Aerial and UAV-oriented benchmarks have followed, yet none targets wide-area dynamic traffic reasoning at ultra-high resolution. HRVQA (Li, Vosselman, and Yang 2024) offers over a million QA pairs but on static 1024×1024 scene semantics. Traffic-VQA (Zhang et al. 2026) addresses traffic cognition but relies on paired optical-thermal inputs and regulation-centric knowledge. UAVReason (Sun et al. 2026) evaluates broad UAV multimodal capability rather than urban situational awareness. Existing remote-sensing VQA benchmarks ask questions about small static images and cannot support dynamic perception over wide areas. HARD covers wide areas at ultra-high resolution and provides cross-frame question-answer pairs. It moves remote-sensing VQA from single small still images to cross-frame questions asked over 122 MP wide-area frames.

VQA Generation. Beyond object detection and multi-object tracking, HARD further provides a VQA benchmark to evaluate whether vision-language models can progress from recognizing isolated targets to understanding wide-area dynamic scenes. The benchmark is organized into three capability levels of increasing spatio-temporal complexity: single-frame perception, region-level understanding, and temporal target reasoning. These levels respectively assess localized object recognition, evidence aggregation across an entire 122 MP frame, and cross-frame reasoning over object identity and motion. The benchmark construction combines annotation-derived supervision with assistance from GPT-5.5 (OpenAI 2026). Bounding boxes and instance id trajectories are used to deterministically derive or ground questions and answers whenever possible, while the model assists in formulating natural-language questions and constructing plausible distractors. All generated samples are subsequently reviewed by four experts in remote-sensing and UAV image interpretation, who verify visual answerability, option distinguishability, and annotation-answer consistency. The final benchmark contains 1,565 manually verified question-answer pairs spanning eight question types. Detailed task definitions, generation procedures, and type-wise statistics are provided in the supplementary material.

Dataset Statistics. HARD comprises 3,549 frames and 138,830 object annotations across the 21 sequences, an average of 39.1 objects per frame. Of the 21 sequences, five are held out as the test set for all benchmarks, while the remaining sequences are used for training and validation. The class distribution is car-dominant (74.4%, 103,361 instances), followed by pedestrian (20.0%, 27,711), bus (2.9%, 4,033), and truck (2.7%, 3,725). This long-tailed distribution is consistent with the composition of everyday traffic scenes and poses a realistic class-imbalance challenge for detection and tracking. A defining characteristic of HARD is its scale distribution, in which tiny and small targets together account for 98.7% of all annotations (24.6% tiny + 74.1% small), each occupying between 0.001% and 0.25% of the frame. Yet the 122 MP resolution preserves enough pixels per target to keep individual instances distinguishable, a property lower-resolution UAV datasets cannot offer.

Ethics and privacy. All flights were conducted under the applicable local UAV regulations. The acquisition geometry does not preserve resolvable facial or license-plate information, and the released annotations contain no biometric, demographic, or cross-scene identity labels. Further details are provided in the supplementary material.

4 Evaluation Metrics

Standard Metrics. We evaluate detection under the COCO protocol (Lin et al. 2014) and report AP_{50} and $AP_{50:95}$, both per-category and mean. For tracking we adopt HOTA (Luiten et al. 2021), which scores a tracker as the geometric mean of a detection-accuracy component (DetA) and an association-accuracy component (AssA), integrated over localization thresholds. We prefer HOTA to MOTA (Bernardin and Stiefelhagen 2008) and IDF1 (Ristani et al. 2016) because each of the latter is dominated by a single aspect, whereas

HOTA weighs detection and identity association evenly, and its two components can be inspected separately. Scene-level VQA is scored by multiple-choice accuracy, reported per question type and overall.

Streaming-HOTA. Offline tracking evaluation assumes zero processing latency, treating the output computed from a frame as if it were available at that same frame. This assumption fails on ultra-high-resolution streams. A ultra-high-resolution frame must pass through loading, tiling, per-tile detection, cross-tile fusion, and association, so the end-to-end latency $\Delta t_t = t_t^{\text{load}} + t_t^{\text{tile}} + t_t^{\text{det}} + t_t^{\text{nms}} + t_t^{\text{assoc}}$ reaches seconds per frame, and by the time a result is available the scene has moved on. We therefore propose streaming-HOTA (s-HOTA). Given a per-frame latency profile and an availability policy, s-HOTA pairs each ground-truth instant with the most recent output available at that instant and evaluates the pairing with HOTA. The policy is an explicit input rather than a fixed assumption.

We define P as the interval between consecutive frames, which is determined by the imaging time of the camera. For our camera $P = 2$ s. The lateness of the output computed from frame t is

$$k_t = \max(1, \lceil \Delta t_t / P \rceil), \quad (1)$$

so that this output becomes available at frame $t + k_t$. Eq. (1) states our default policy, under which every frame starts processing on arrival. It is realized by K workers, each a full replica of the benchmarked machine, with $K \geq \lceil \max_t \Delta t_t / P \rceil$ so that no frame ever queues. Each worker runs one frame in isolation, so the latencies measured on a single device transfer to this deployment without contention. s-HOTA charges a pipeline for the staleness. Evaluation instant t coincides with the capture time of frame t , so an output can never serve the frame it is computed from.

At every evaluation instant τ , let $\varphi(\tau)$ denote the most recent output whose availability index does not exceed τ . s-HOTA is standard HOTA computed over the latency-adjusted pairing

$$\mathcal{S} = \{(y_\tau, \hat{y}_{\varphi(\tau)})\}_{\tau \in \mathcal{T}_{\text{act}}}, \quad (2)$$

$$\text{s-HOTA} = \int_0^1 \sqrt{\text{DetA}_\alpha(\mathcal{S}) \cdot \text{AssA}_\alpha(\mathcal{S})} d\alpha, \quad (3)$$

where $\mathcal{T}_{\text{act}}$ excludes the warm-up instants before the first output is available. s-HOTA attains its upper limit when every output is ready within one frame interval, in which case it reduces to offline HOTA evaluated with a one-frame lag. As latency grows beyond P , the score degrades in frame-quantized steps governed by Eq. (1). The complete protocol and full deployment parameters are given in the supplementary material.

5 Experiments

We evaluate HARD across three levels of increasing cognitive complexity (Figure 2, middle). For each level, we first describe its experimental setup and then distill the results into its central findings.

Detector	Backbone	Params	Total	Infer	Pedestrian		Car		Bus		Truck		mAP	
					AP ₅₀	AP _{50:95}	AP ₅₀	AP _{50:95}	AP ₅₀	AP _{50:95}	AP ₅₀	AP _{50:95}	AP ₅₀	AP _{50:95}
Two-stage detectors														
Faster R-CNN	ResNet-50	41.8M	14.39	10.97	0.287	0.101	0.913	0.406	0.222	0.110	0.780	0.466	0.551	0.271
Cascade R-CNN	ResNet-50	69.2M	16.89	13.47	0.299	0.098	0.910	0.423	0.524	0.260	0.866	0.440	0.650	0.305
One-stage detectors														
RetinaNet	ResNet-50	37.7M	15.07	11.65	0.313	0.113	0.915	0.426	0.267	0.146	0.144	0.072	0.410	0.189
CenterNet	ResNet-18	14.2M	8.85	5.43	0.384	0.135	0.801	0.367	0.125	0.064	0.004	0.001	0.329	0.142
YOLOv5s	CSPDarknet-S	7.2M	5.41	1.99	0.211	0.061	0.809	0.378	0.376	0.186	0.417	0.139	0.453	0.191
YOLOv5m	CSPDarknet-M	21.2M	5.52	2.10	0.214	0.054	0.813	0.383	0.473	0.256	0.354	0.121	0.464	0.203
YOLOv5l	CSPDarknet-L	46.5M	6.16	2.74	0.326	0.091	0.824	0.386	0.519	0.270	0.141	0.060	0.453	0.202
YOLOv8n	CSPNet-N	3.2M	4.87	1.45	0.223	0.066	0.827	0.390	0.422	0.214	0.313	0.105	0.446	0.194
YOLOv8m	CSPNet-M	25.9M	5.94	2.52	0.202	0.059	0.816	0.380	0.462	0.223	0.207	0.058	0.422	0.180
YOLOv8l	CSPNet-L	43.7M	6.50	3.08	0.222	0.050	0.805	0.380	0.389	0.210	0.660	0.220	0.519	0.215
YOLO11n	C3k2-N	2.6M	4.96	1.53	0.133	0.027	0.826	0.386	0.356	0.187	0.313	0.105	0.407	0.176
YOLO11m	C3k2-M	20.1M	5.59	2.17	0.102	0.018	0.819	0.379	0.486	0.284	0.650	0.221	0.514	0.226
YOLO11l	C3k2-L	25.3M	5.94	2.52	0.071	0.014	0.760	0.349	0.451	0.226	0.729	0.240	0.503	0.207
YOLO26n	CSPDarknet	2.4M	4.97	1.55	0.189	0.046	0.779	0.379	0.048	0.023	0.000	0.000	0.254	0.112
YOLO26m	CSPDarknet	20.4M	5.85	2.43	0.109	0.020	0.814	0.382	0.407	0.207	0.676	0.210	0.501	0.205
YOLO26l	CSPDarknet	24.8M	5.92	2.50	0.175	0.039	0.860	0.415	0.411	0.207	0.490	0.176	0.484	0.209
Transformer-based detectors														
DINO	ResNet-50	47.0M	26.41	22.99	0.334	0.124	0.894	0.432	0.342	0.197	0.288	0.146	0.465	0.225
RT-DETR	ResNet-50	32.0M	6.83	3.40	0.263	0.074	0.836	0.364	0.614	0.267	0.568	0.195	0.570	0.225
D-FINE-N	HGNetv2	3.8M	6.39	2.97	0.247	0.094	0.835	0.406	0.056	0.021	0.154	0.080	0.323	0.150
D-FINE-L	HGNetv2	31.2M	7.22	3.80	0.365	0.145	0.836	0.408	0.308	0.162	0.425	0.293	0.484	0.252

Table 1: Detection performance of baseline detectors on HARD. Both AP₅₀ and AP_{50:95} are reported per category and as mean AP (mAP) over all four categories. Light-red, light-orange, and light-yellow cells indicate the first-, second-, and third-ranked results in each numeric column. For Params, Total, and Infer, lower is better; for all AP metrics, higher is better. “Total” and “Infer” are in seconds. “Infer” denotes net model forward-pass time; “Total” denotes end-to-end per-frame latency.

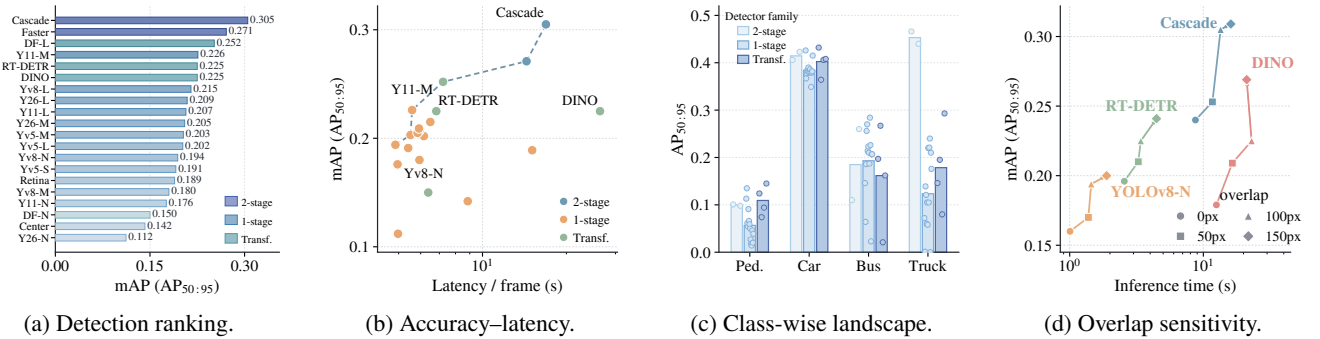


Figure 3: Level-1 detection results: (a) AP_{50:95} ranking of the twenty detectors; (b) accuracy–latency trade-off with Pareto frontier; (c) per-class AP_{50:95} by architectural family. For each object class, the three adjacent bars correspond, from left to right, to two-stage, one-stage, and transformer detectors. Bar heights give the mean AP of all detectors within each family, while the overlaid dots give the individual detector scores. The dots are slightly offset horizontally only to avoid visual overlap; (d) effect of tile overlap on accuracy and inference time.

Level 1: Object Detection

Setup. We benchmark twenty detectors spanning two-stage (Ren et al. 2015; Cai and Vasconcelos 2018), one-stage (Lin et al. 2017; Zhou, Wang, and Krähenbühl 2019; Jocher et al. 2022; Varghese and Sambath 2024; Khanam and Hussain 2024; Sapkota et al. 2025), and Transformer-

based (Zhang et al. 2022a; Zhao et al. 2024; Peng et al. 2025b) families, all trained on 640×640 tiles with COCO-pretrained weights and evaluated under the COCO protocol with 100 px inference overlap. Table 1 reports the full results, Figure 3 visualizes them.

Finding 1: wide-area detection is shaped as much by the

Overlap	Tiles	Obj./tile	Empty tiles	mAP	Infer
0 px	300	0.130	$\geq 87.0\%$	0.166	3.31 s
50 px	374	0.105	$\geq 89.5\%$	0.178	4.32 s
100 px	432	0.091	$\geq 90.9\%$	0.204	5.25 s
150 px	520	0.075	$\geq 92.5\%$	0.213	5.90 s

Table 2: Spatial sparsity of the HARD tiling pipeline under different overlaps, including tile density, empty-tile ratio, accuracy averaged over all twenty detectors, and inference time averaged over the eighteen detectors with directly measured per-overlap timings.

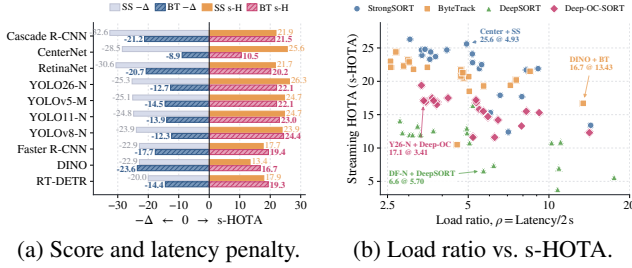


Figure 4: Level-2 streaming-tracking results: (a) s-HOTA and streaming penalty $-\Delta$ of StrongSORT vs. ByteTrack across representative detectors; (b) s-HOTA against the load ratio $\rho = \Delta t/P$ over all 80 detector-tracker pipelines.

end-to-end tiling pipeline as by the detector, a joint consequence of extreme image size and target sparsity. Table 2 quantifies a property that aggregate mAP hides. At the main configuration, a frame is split into 432 tiles yet contains only 39.1 objects on average, so most tiles are pure background. Widening the tile overlap from 0 to 150 px raises mean mAP from 0.166 to 0.213 by recovering targets fragmented at tile borders. The cost is that the tile count grows from 300 to 520 and the mean forward pass grows from 3.3 s to 5.9 s (Figure 3d). The accuracy-latency landscape in Figure 3b is thus a property of complete pipelines rather than of detectors alone. The detector fixes the accuracy attainable on each tile, while the tiling and fusion stages decide how much of it survives at frame scale and at what latency. Wide-area detection must therefore be designed as a joint system. Treating either component as fixed forfeits accuracy or latency that the other cannot recover. Per-class results also diverge far more than aggregate mAP suggests (Figure 3c). Detectors agree closely on Car but spread from 0.000 to 0.466 AP_{50:95} on Truck.

Level 2: Multi-Object Tracking

Setup. We pair every detector with four tracking methods, namely DeepSORT (Wojke, Bewley, and Paulus 2017), ByteTrack (Zhang et al. 2022b), Deep-OC-SORT (Maggiolino et al. 2023), and StrongSORT (Du et al. 2023), all under their official default hyperparameters. StrongSORT therefore keeps its default sparse-optical-flow camera-motion compensation while the other three run without external compensation. The supplementary material isolates the effect of this component. This gives 80 pipelines, which we evaluate with

s-HOTA at $P = 2$ s on the Car category (Figure 4a). We choose this category because its dense and long trajectories make it the most statistically reliable one for streaming comparison. Table 3 reports HOTA, s-HOTA, the streaming penalty Δ and end-to-end latency.

Finding 2: streaming latency charges the association axis far more unevenly than the detection axis, so identity association is where tracking pipelines diverge under latency. Decomposing every score into HOTA’s detection and association components shows that streaming charges both. The two axes differ, however, in how much they separate the trackers. Averaged over the twenty detector blocks, the fraction of offline DetA that survives streaming spans only 39–50% across the four trackers. The surviving fraction of AssA spans 53–88%. Association retention therefore varies about three times as widely as detection retention. StrongSORT and Deep-OC-SORT, which maintain appearance feature banks, retain roughly half of their offline AssA (55% and 53%). ByteTrack, which associates on motion and detection confidence alone, retains 65%. DeepSORT retains 88%, but from a much lower offline base of 24–28 AssA against 53–66 for StrongSORT. Its retention does not measure robustness of a comparable quantity. Separating the contributions of appearance embeddings, camera-motion compensation and the motion model would require varying each in isolation. On ultra-high-resolution sequences the practical lever is therefore sustaining identity across a stale gap rather than improving box quality.

Finding 3: which tracking pipeline performs best under streaming is governed by the load ratio $\rho = \Delta t/P$. The net value of appearance cues shrinks as ρ grows, so the best pipeline depends on the deployment budget rather than on the tracker alone. An inter-frame-interval sweep isolates this effect. Tightening the frame budget from $P = 2.5$ to 1 s with all predictions held fixed flips the s-HOTA winner from StrongSORT to ByteTrack on the high-latency two-stage and Transformer detectors. StrongSORT keeps its lead when ρ stays small. At $P = 2$ s, offline leads of up to 16.8 points compress to near-ties or reversals (Table 3). The best pipeline (StrongSORT on YOLO26-N) sits at low ρ rather than at the offline optimum. The association-insensitive S-MOTA cannot expose the differential at all. The choice of tracking pipeline should therefore follow the deployment load ratio. Appearance-based association pays off only when latency room remains within the frame interval.

Level 3: Scene-Level VQA

Setup. We evaluate twelve vision-language models zero-shot on the 1,565 Level-3 questions, comprising one remote-sensing-specialized model (Soni et al. 2025), six open-source general-purpose models (Chen et al. 2024; Zhu et al. 2025; Yao et al. 2024; Abidin et al. 2024; Bai et al. 2025b,a), and five closed-source API models (OpenAI 2024, 2026; Anthropic 2025; xAI 2025; Google 2026). Per-type accuracy is visualized in Figure 5.

Finding 4: VLM failures separate into two axes, resolution-limited perception and near-chance identity binding, and progress on one does not transfer to the other. Averaging the per-type accuracies into a single-frame

Detector	StrongSORT			ByteTrack			DeepSORT			Deep-OC-SORT		
	HOTA↑	s-HOTA↑	Lat.↓	HOTA↑	s-HOTA↑	Lat.↓	HOTA↑	s-HOTA↑	Lat.↓	HOTA↑	s-HOTA↑	Lat.↓
<i>Two-stage detectors</i>												
Faster R-CNN	40.6	17.7 ↓22.9	15.85	37.1	19.4 ↓17.7	14.36	11.7	7.0 ↓4.7	21.79	29.5	13.3 ↓16.2	15.80
Cascade R-CNN	54.5	21.9 ↓32.6	18.22	42.7	21.5 ↓21.2	17.01	20.3	10.9 ↓9.4	22.10	36.8	15.3 ↓21.4	18.39
<i>One-stage detectors</i>												
RetinaNet	52.3	21.7 ↓30.6	16.45	40.9	20.2 ↓20.7	15.10	18.2	10.8 ↓7.5	20.46	37.5	15.5 ↓22.0	16.46
CenterNet	54.0	25.6 ↓28.5	9.86	19.4	10.5 ↓8.9	9.09	24.9	16.4 ↓8.5	10.40	24.4	11.6 ↓12.8	10.41
YOLOv5-S	48.6	24.4 ↓24.2	7.24	37.8	23.2 ↓14.7	5.95	17.4	12.1 ↓5.4	6.62	36.1	17.5 ↓18.6	7.34
YOLOv5-M	49.8	24.7 ↓25.1	8.32	36.7	22.1 ↓14.5	7.04	18.2	12.6 ↓5.6	7.41	36.1	17.5 ↓18.5	8.41
YOLOv5-L	48.4	21.9 ↓26.4	11.00	36.6	20.5 ↓16.2	9.64	16.5	10.8 ↓5.6	10.11	35.4	15.8 ↓19.6	11.00
YOLOv8-N	47.8	23.9 ↓23.9	6.72	36.7	24.4 ↓12.3	5.37	17.0	12.0 ↓5.0	6.04	35.8	19.4 ↓16.4	6.69
YOLOv8-M	48.3	23.7 ↓24.6	7.55	36.6	21.8 ↓14.9	6.25	17.4	12.0 ↓5.4	6.64	35.4	16.9 ↓18.5	7.63
YOLOv8-L	48.8	22.5 ↓26.3	11.22	36.9	20.7 ↓16.2	10.04	17.5	11.7 ↓5.8	10.46	35.3	15.5 ↓19.8	11.39
YOLO11-N	49.5	24.7 ↓24.8	6.69	36.9	23.0 ↓13.9	5.13	17.6	12.3 ↓5.3	5.68	36.3	16.9 ↓19.4	6.94
YOLO11-M	48.4	23.3 ↓25.2	7.19	36.8	22.3 ↓14.5	5.74	17.5	12.0 ↓5.5	6.20	35.4	16.5 ↓18.9	7.63
YOLO11-L	48.2	22.8 ↓25.4	10.38	36.9	20.8 ↓16.0	9.39	18.2	12.3 ↓5.9	9.90	36.1	16.8 ↓19.3	10.72
YOLO26-N	51.6	26.3 ↓25.3	6.06	34.8	22.1 ↓12.7	5.14	20.3	14.1 ↓6.2	5.56	36.0	17.1 ↓18.8	6.82
YOLO26-M	50.9	24.8 ↓26.0	6.90	37.9	22.9 ↓15.0	6.02	19.7	13.3 ↓6.3	6.47	36.5	17.1 ↓19.4	7.43
YOLO26-L	51.7	24.1 ↓27.5	10.36	38.4	21.7 ↓16.7	9.38	19.5	13.0 ↓6.4	9.88	37.4	17.2 ↓20.1	10.69
<i>Transformer-based detectors</i>												
DINO	36.3	13.4 ↓22.9	28.62	40.3	16.7 ↓23.6	26.85	11.5	5.6 ↓5.9	35.01	34.1	12.3 ↓21.8	28.32
RT-DETR	37.9	17.9 ↓20.0	13.15	33.7	19.3 ↓14.4	11.41	10.9	7.4 ↓3.5	12.44	30.3	14.2 ↓16.1	12.92
D-FINE-N	32.6	15.3 ↓17.3	12.10	37.6	21.3 ↓16.3	9.55	9.7	6.6 ↓3.1	11.40	31.1	14.7 ↓16.5	11.84
D-FINE-L	26.7	12.4 ↓14.3	14.11	33.0	18.5 ↓14.5	10.09	6.1	3.8 ↓2.2	21.55	25.8	11.6 ↓14.1	12.55

Table 3: *Streaming-HOTA* on HARD (Car, $P = 2$ s), aggregated over all sequences using TrackEval COMBINED. For each detector-tracker pipeline, we report offline HOTA, streaming s-HOTA↑, and end-to-end latency Lat.(s)↓. The red downward value beside each s-HOTA score denotes its degradation relative to the corresponding offline HOTA. Light-red, light-orange, and light-yellow boxes respectively indicate the first-, second-, and third-ranked results in each metric column.

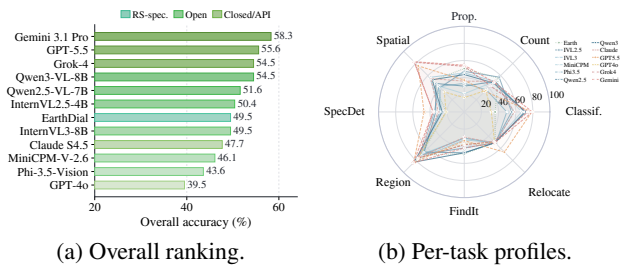


Figure 5: Level-3 scene-level VQA results: (a) overall accuracy ranking of the twelve vision-language models; (b) per-task profiles across the eight question types.

axis (classification, counting, property, spatial relation) and a temporal axis (special detection, FindIt, Relocate) reveals two very different failure modes. On the single-frame axis, models spread over a 37-point range (29.2% for GPT-4o to 66.5% for Gemini 3.1 Pro). This axis rewards general perception ability, and stronger models are clearly better despite the heavy downsampling that a 122 MP input undergoes. On the temporal axis, the same twelve models collapse into a 13-

point band (35.6–49.0%) hovering near the per-type chance levels, with eleven of twelve at 49–52% on Relocate. Only GPT-5.5 rises meaningfully above chance, reaching 66.3% on Relocate and 47.0% on special detection. We report these as observations consistent with, rather than proof of, the two mechanisms. The implication is that scaling general capability mainly moves the first axis, while closing the second likely requires explicit object memory or track-conditioned inputs, which is where Level-1 and Level-2 supervision in HARD becomes directly useful.

6 Conclusion

We introduced HARD, an ultra-high-resolution temporal UAV benchmark. Its three-level annotations span object perception to scene cognition. We also proposed s-HOTA to evaluate tracking under the second-scale latency such imagery induces. Extensive baseline experiments surface two open problems that we believe warrant deeper study. The first is how to lower the end-to-end latency of ultra-large images. The second is how to give models persistent cross-frame identity. We frame this line of work as Wide-area Spatio-temporal Scene Understanding. We hope HARD can anchor future research toward real UAV deployment.

References

- Abdin, M.; et al. 2024. Phi-3 Technical Report: A Highly Capable Language Model Locally on Your Phone. *arXiv preprint arXiv:2404.14219*.
- Ahmad, I.; Fengjun, S.; Bibi, K.; and Pathan, M. S. 2026. UAV-OB: An aerial urban vehicle dataset with oriented bounding boxes for remote sensing object detection in smart cities. *Data in Brief*, 112710.
- Anthropic. 2025. Claude Sonnet 4.5 System Card. <https://www.anthropic.com/claude-sonnet-4-5-system-card>.
- Bai, S.; Cai, Y.; Chen, R.; Chen, K.; Chen, X.; Cheng, Z.; Deng, L.; Ding, W.; Gao, C.; Ge, C.; et al. 2025a. Qwen3-vl technical report.
- Bai, S.; Chen, K.; Liu, X.; Wang, J.; Ge, W.; Song, S.; Dang, K.; Wang, P.; Wang, S.; Tang, J.; Zhong, H.; Zhu, Y.; Yang, M.; Li, Z.; Wan, J.; Wang, P.; Ding, W.; Fu, Z.; Xu, Y.; Ye, J.; Zhang, X.; Xie, T.; Cheng, Z.; Zhang, H.; Yang, Z.; Xu, H.; and Lin, J. 2025b. Qwen2.5-VL Technical Report.
- Bernardin, K.; and Stiefel, R. 2008. Evaluating multiple object tracking performance: the clear mot metrics. *EURASIP Journal on Image and Video Processing*, 2008(1): 246309.
- Cai, Z.; and Vasconcelos, N. 2018. Cascade r-cnn: Delving into high quality object detection. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 6154–6162.
- Chen, Z.; Wang, W.; Cao, Y.; Liu, Y.; Gao, Z.; Cui, E.; Zhu, J.; Ye, S.; Tian, H.; Liu, Z.; et al. 2024. Expanding performance boundaries of open-source multimodal models with model, data, and test-time scaling. *arXiv preprint arXiv:2412.05271*.
- Ding, J.; Xue, N.; Xia, G.-S.; Bai, X.; Yang, W.; Yang, M. Y.; Belongie, S.; Luo, J.; Datcu, M.; Pelillo, M.; et al. 2021. Object detection in aerial images: A large-scale benchmark and challenges. *IEEE transactions on pattern analysis and machine intelligence*, 44(11): 7778–7796.
- Du, D.; Qi, Y.; Yu, H.; Yang, Y.; Duan, K.; Li, G.; Zhang, W.; Huang, Q.; and Tian, Q. 2018. The unmanned aerial vehicle benchmark: Object detection and tracking. In *Proceedings of the European conference on computer vision (ECCV)*, 370–386.
- Du, Y.; Zhao, Z.; Song, Y.; Zhao, Y.; Su, F.; Gong, T.; and Meng, H. 2023. Strongsort: Make deepsort great again. *IEEE Transactions on Multimedia*, 25: 8725–8737.
- Google. 2026. Gemini 3.1 Pro: A Smarter Model for Your Most Complex Tasks. <https://blog.google/innovation-and-ai/models-and-research/gemini-models/gemini-3-1-pro/>.
- Hu, Y.; Yuan, J.; Wen, C.; Lu, X.; Liu, Y.; and Li, X. 2025. Rsgpt: A remote sensing vision language model and benchmark. *ISPRS Journal of Photogrammetry and Remote Sensing*, 224: 272–286.
- Jocher, G.; Chaurasia, A.; Stoken, A.; Borovec, J.; Kwon, Y.; Michael, K.; Fang, J.; Wong, C.; Yifu, Z.; Montes, D.; et al. 2022. ultralytics/yolov5: v6. 2-yolov5 classification models, apple m1, reproducibility, clearml and deci. ai integrations.
- Khanam, R.; and Hussain, M. 2024. Yolov11: An overview of the key architectural enhancements. *arXiv preprint arXiv:2410.17725*.
- Li, K.; Vosselman, G.; and Yang, M. Y. 2024. HRVQA: A Visual Question Answering benchmark for high-resolution aerial images. *ISPRS Journal of Photogrammetry and Remote Sensing*, 214: 65–81.
- Li, M.; Wang, Y.-X.; and Ramanan, D. 2020. Towards streaming perception. In *European conference on computer vision*, 473–488. Springer.
- Li, S.; Zhou, Z.; Zhao, M.; Yang, J.; Guo, W.; Lv, Y.; Kou, L.; Wang, H.; and Gu, Y. 2023. A multitask benchmark dataset for satellite video: Object detection, tracking, and segmentation. *IEEE transactions on geoscience and remote sensing*, 61: 1–21.
- Li, X.; Ding, J.; and Elhoseiny, M. 2024. Vrsbench: A versatile vision-language benchmark dataset for remote sensing image understanding. *Advances in Neural Information Processing Systems*, 37: 3229–3242.
- Lin, T.-Y.; Goyal, P.; Girshick, R.; He, K.; and Dollár, P. 2017. Focal loss for dense object detection. In *Proceedings of the IEEE international conference on computer vision*, 2980–2988.
- Lin, T.-Y.; Maire, M.; Belongie, S.; Hays, J.; Perona, P.; Ramanan, D.; Dollár, P.; and Zitnick, C. L. 2014. Microsoft coco: Common objects in context. In *European conference on computer vision*, 740–755. Springer.
- Lobry, S.; Demir, B.; and Tuia, D. 2021. RSVQA meets BigEarthNet: a new, large-scale, visual question answering dataset for remote sensing. In *2021 IEEE International Geoscience and Remote Sensing Symposium IGARSS*, 1218–1221. IEEE.
- Lobry, S.; Marcos, D.; Murray, J.; and Tuia, D. 2020. RSVQA: Visual question answering for remote sensing data. *IEEE Transactions on Geoscience and Remote Sensing*, 58(12): 8555–8566.
- Luiten, J.; Osep, A.; Dendorfer, P.; Torr, P.; Geiger, A.; Leal-Taixé, L.; and Leibe, B. 2021. Hota: A higher order metric for evaluating multi-object tracking. *International journal of computer vision*, 129(2): 548–578.
- Maggiolino, G.; Ahmad, A.; Cao, J.; and Kitani, K. 2023. Deep oc-sort: Multi-pedestrian tracking by adaptive re-identification. In *2023 IEEE International conference on image processing (ICIP)*, 3025–3029. IEEE.
- Nie, Z.; Xue, L.; Fang, Z.; Ren, J.; Wei, Y.; and Zheng, J. 2025. M3OT: A Multi-Drone Multi-Modality dataset for Multi-Object Tracking. *Scientific data*, 12(1): 1927.
- OpenAI. 2024. GPT-4o System Card. <https://openai.com/index/gpt-4o-system-card/>.
- OpenAI. 2026. GPT-5.5 System Card. <https://openai.com/index/gpt-5-5-system-card/>.
- Peng, J.; Wang, T.; Pang, J.; and Shen, Y. 2025a. Towards Latency-Aware 3D Streaming Perception for Autonomous Driving. In *2025 IEEE International Conference on Robotics and Automation (ICRA)*, 3727–3733. IEEE.

- Peng, Y.; Li, H.; Wu, P.; Zhang, Y.; Sun, X.; and Wu, F. 2025b. D-FINE: Redefine regression task of DETRs as fine-grained distribution refinement. In *International Conference on Learning Representations*, volume 2025, 44015–44031.
- Ren, S.; He, K.; Girshick, R.; and Sun, J. 2015. Faster r-cnn: Towards real-time object detection with region proposal networks. *Advances in neural information processing systems*, 28.
- Ristani, E.; Solera, F.; Zou, R.; Cucchiara, R.; and Tomasi, C. 2016. Performance measures and a data set for multi-target, multi-camera tracking. In *European conference on computer vision*, 17–35. Springer.
- Sapkota, R.; Cheppally, R. H.; Sharda, A.; and Karkee, M. 2025. YOLO26: key architectural enhancements and performance benchmarking for real-time object detection. *arXiv preprint arXiv:2509.25164*.
- Sela, G.-E.; Gog, I.; Wong, J.; Agrawal, K. K.; Mo, X.; Kalra, S.; Schaffhalter, P.; Leong, E.; Wang, X.; Balaji, B.; et al. 2022. Context-aware streaming perception in dynamic environments. In *European Conference on Computer Vision*, 621–638. Springer.
- Soni, S.; Dudhane, A.; Debary, H.; Fiaz, M.; Munir, M. A.; Danish, M. S.; Fraccaro, P.; Watson, C. D.; Klein, L. J.; Khan, F. S.; et al. 2025. Earthdial: Turning multi-sensory earth observations to interactive dialogues. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, 14303–14313.
- Sun, J.; Ding, G.; Di, D.; Zhang, H.; and Zheng, Z. 2026. Can Vision-Language Models Think from the Sky? Unifying UAV Reasoning and Generation. *arXiv preprint arXiv:2604.05377*.
- Sun, X.; Wang, P.; Yan, Z.; Xu, F.; Wang, R.; Diao, W.; Chen, J.; Li, J.; Feng, Y.; Xu, T.; et al. 2022. FAIR1M: A benchmark dataset for fine-grained object recognition in high-resolution remote sensing imagery. *ISPRS Journal of Photogrammetry and Remote Sensing*, 184: 116–130.
- Varghese, R.; and Sambath, M. 2024. Yolov8: A novel object detection algorithm with enhanced performance and robustness.
- Wang, F.; Wang, H.; Guo, Z.; Wang, D.; Wang, Y.; Chen, M.; Ma, Q.; Lan, L.; Yang, W.; Zhang, J.; et al. 2025. Xlrs-bench: Could your multimodal llms understand extremely large ultra-high-resolution remote sensing imagery? In *Proceedings of the Computer Vision and Pattern Recognition Conference*, 14325–14336.
- Wang, J.; Zheng, Z.; Chen, Z.; Ma, A.; and Zhong, Y. 2024. Earthvqa: Towards queryable earth via relational reasoning-based remote sensing visual question answering. In *Proceedings of the AAAI conference on artificial intelligence*, volume 38, 5481–5489.
- Wang, X.; Zhang, X.; Zhu, Y.; Guo, Y.; Yuan, X.; Xiang, L.; Wang, Z.; Ding, G.; Brady, D.; Dai, Q.; et al. 2020. Panda: A gigapixel-level human-centric video dataset. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 3268–3278.
- Wojke, N.; Bewley, A.; and Paulus, D. 2017. Simple online and realtime tracking with a deep association metric. In *2017 IEEE international conference on image processing (ICIP)*, 3645–3649. IEEE.
- xAI. 2025. Grok 4 Model Card. <https://data.x.ai/2025-08-20-grok-4-model-card.pdf>.
- Yao, Y.; Yu, T.; Zhang, A.; Wang, C.; Cui, J.; Zhu, H.; Cai, T.; Li, H.; Zhao, W.; He, Z.; et al. 2024. Minicpm-v: A gpt-4v level mllm on your phone. *arXiv preprint arXiv:2408.01800*.
- Yin, Q.; Hu, Q.; Liu, H.; Zhang, F.; Wang, Y.; Lin, Z.; An, W.; and Guo, Y. 2021. Detecting and tracking small and dense moving objects in satellite videos: A benchmark. *IEEE Transactions on Geoscience and Remote Sensing*, 60: 1–18.
- Yuan, Z.; Mou, L.; Xiong, Z.; and Zhu, X. X. 2022. Change detection meets visual question answering. *IEEE Transactions on Geoscience and Remote Sensing*, 60: 1–13.
- Zhang, H.; Li, F.; Liu, S.; Zhang, L.; Su, H.; Zhu, J.; Ni, L. M.; and Shum, H.-Y. 2022a. Dino: Detr with improved denoising anchor boxes for end-to-end object detection. *arXiv preprint arXiv:2203.03605*.
- Zhang, Y.; Sun, P.; Jiang, Y.; Yu, D.; Weng, F.; Yuan, Z.; Luo, P.; Liu, W.; and Wang, X. 2022b. Bytetrack: Multi-object tracking by associating every detection box. In *European conference on computer vision*, 1–21. Springer.
- Zhang, Y.; Zhao, Z.; Luo, Z.; Li, C.; and Tang, J. 2026. UAV traffic scene understanding: A regulation embedded multi-modal network and a unified benchmark. *arXiv preprint arXiv:2603.10722*.
- Zhao, Y.; Lv, W.; Xu, S.; Wei, J.; Wang, G.; Dang, Q.; Liu, Y.; and Chen, J. 2024. Detsr beat yolos on real-time object detection. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 16965–16974.
- Zheng, X.; Wang, B.; Du, X.; and Lu, X. 2021. Mutual attention inception network for remote sensing visual question answering. *IEEE Transactions on Geoscience and Remote Sensing*, 60: 1–14.
- Zhou, X.; Wang, D.; and Krähenbühl, P. 2019. Objects as points. *arXiv preprint arXiv:1904.07850*.
- Zhu, J.; Wang, W.; Chen, Z.; Liu, Z.; Ye, S.; Gu, L.; Tian, H.; Duan, Y.; Su, W.; Shao, J.; et al. 2025. Internvl3: Exploring advanced training and test-time recipes for open-source multimodal models. *arXiv preprint arXiv:2504.10479*.
- Zhu, P.; Wen, L.; Du, D.; Bian, X.; Fan, H.; Hu, Q.; and Ling, H. 2021. Detection and tracking meet drones challenge. *IEEE transactions on pattern analysis and machine intelligence*, 44(11): 7380–7399.