

LiG-DETR: LOCAL-IN-GLOBAL REASSEMBLY IN LATENT SPACE FOR AERIAL OBJECT DETECTION

Yupeng Zhang¹ Fangzhuo Gao¹ Juntao Cheng^{3,4} Ziyi Zhao² Liang Wan¹ Ruize Han²

¹Tianjin University. ²Shenzhen University of Advanced Technology. ³Shanghai Jiaotong University.

⁴Shanghai AI Laboratory.

{zhangyupeng, fangzhuo, lwan}@tju.edu.cn, suat25060113@stu.suat-sz.edu.cn
hanruize@suat-sz.edu.cn, juntao-cheng@sjtu.edu.cn

ABSTRACT

Aerial object detection faces substantial scale and density variations. Small objects are easily degraded by downsampling and feature compression, while medium and large objects require sufficient global context. Existing methods mainly follow two paradigms: image slicing provides clearer local evidence but relies on independent crop-level prediction and post-processing, whereas feature- and query-level optimization preserves unified inference but operates on already compressed full-image representations, limiting recovery of fine-grained information. This raises a key question: can aerial detection directly acquire high-fidelity local evidence before feature degradation and integrate it into a unified end-to-end framework? To this end, we propose LiG-DETR, an Efficient Global-Local Reassembly framework that reformulates image slicing as high-fidelity local feature acquisition. A shared encoder extracts global and locally magnified features, which are projected into the detector feature space. The projected local features are reassembled according to their original spatial locations to form a globally aligned local feature level, and a single DETR decoder jointly decodes global and local features. To reduce redundant computation, Context-Preserved Selective Reassembly focuses high-resolution encoding on informative regions while preserving a dense feature layout, and Density-Aware Adaptive Query Allocation adapts the decoder query budget using encoder proposal scores. Experiments show substantial gains on small and medium objects while retaining strong large-object performance, with favorable accuracy–efficiency trade-offs and improved cross-domain generalization. *The code will be released.*

1 INTRODUCTION

Aerial object detection (Du et al., 2018; 2019) is important for UAV perception and wide-area surveillance. Compared with ground-level imagery, aerial imagery typically covers larger fields of view and exhibits greater variations in object scale and density, often containing many tiny objects alongside larger ones. Effective detection therefore requires fine-grained local evidence for small objects while preserving global context across scales. However, small objects are particularly vulnerable to degradation because their limited spatial extent provides weak texture, boundary, and shape cues that can be further suppressed by background clutter and feature compression.

Existing methods mainly address aerial small-object detection in two ways. Image slicing methods, such as SAHI (Akyon et al., 2022) and ASahi (Zhang et al., 2023), improve small-object visibility by cropping and resizing local regions. Other methods better exploit full-image representations via feature or query manipulation, including multi-scale fusion with FPN (Lin et al., 2017), sparse high-resolution computation with QueryDet (Yang et al., 2022), attention enhancement with Deformable DETR (Zhu et al., 2020) and TPH-YOLOv5 (Zhu et al., 2021), and density- or query-aware refinement with DQ-DETR (Huang et al., 2024) and Dome-DETR (Hu et al., 2025). These two paradigms reveal a design trade-off. Image slicing acquires clearer local visual evidence, but requires independent crop-level detection and subsequent box fusion or NMS-like post-processing, leading to redundant computation, duplicate predictions, and fragmented inference. In contrast, feature- or query-level refinement preserves unified end-to-end inference, but operates on already

encoded full-image representations. Once fine-grained evidence is weakened by downsampling and feature compression, subsequent representation enhancement may be unable to fully recover it.

To further examine the limitations of full-image representations for small-object detection, we analyze representative DETR-based detectors (Zhu et al., 2020; Zhao et al., 2024; Robinson et al., 2026). Despite their strong global context modeling and end-to-end prediction capabilities, full-image encoding can weaken the fine-grained information of small objects. Repeated downsampling and feature compression may leave only sparse and weak responses before decoding, limiting the visual evidence available to subsequent feature- or query-level refinement. We use RF-DETR (Robinson et al., 2026) for diagnostic analysis and visualize its intermediate representations in Fig. 1. We denote the encoder-native global feature as Global G_1 , and the *higher-resolution global feature* generated through projection as Global G_0 . As shown in Fig. 1, small-object responses in Global G_1 are sparse and coarse. Although Global G_0 provides higher spatial resolution, it is still derived from the full-image representation and may not fully recover fine-grained object information already weakened during encoding. This way, we consider to construct the Local Reassembled feature L , where local image regions are magnified and encoded by the same visual encoder, then projected and reassembled according to their original spatial locations (in the global coordinate space). We can see that the locally magnified and reassembled feature L preserves clearer and more complete evidence before such degradation occurs. This observation raises a natural question: *beyond refining existing representations*, can aerial object detection directly *acquire high-fidelity local evidence before feature degradation and integrate it into a unified end-to-end detection framework* for stronger small-object representations?

Based on this observation, we propose **LiG-DETR**, an efficient **Local-in-Global** latent reassembly framework based on DETR that reformulates image slicing from an independent detection strategy into a mechanism for acquiring high-fidelity local evidence. Instead of predicting on each crop independently, LiG-DETR encodes locally magnified observations and reassembles their features into a unified global coordinate space. In this way, image slices become feature acquisition units rather than prediction units. The reassembled local evidence and global features are jointly decoded by a single DETR decoder, eliminating crop-level detection heads, box fusion, and additional NMS.

Specifically, LiG-DETR uses a shared encoder for the global branch and the local high-resolution branch. The **Global-Local Reassembly Projector** maps global and local features into the detector feature space, after which the projected local features are reassembled according to their original spatial locations to form a globally aligned local feature level. Within this framework, **Context-Preserved Selective Reassembly (CPSR)** concentrates high-resolution encoding on informative regions and fills unselected locations with corresponding global features to preserve a dense feature layout, whereas **Density-Aware Adaptive Query Allocation (DA-AQA)** adapts the decoder query budget to image content according to encoder proposal scores. Together, they reduce redundant computation along the spatial and query dimensions, respectively. Experiments on VisDrone-DET2019, AI-TOD-v2, and DGDet-VisDrone (built in this work) demonstrate that LiG-DETR obtains substantial gains on small and medium objects while retaining strong large-object performance, with favorable accuracy-efficiency trade-offs and improved cross-domain generalization.

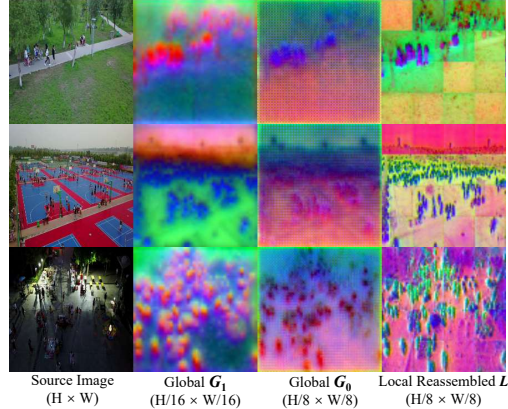


Figure 1: Comparison of small-object evidence under global and local encoding. Full-image features (Global G_1/G_0) exhibit sparse or ambiguous small-object responses. Considering locally magnified encoding preserves clearer evidence before feature degradation, we propose reassembled local feature L retaining high-resolution evidence in global coordinate space.

2 RELATED WORK

Image-level Slicing for Aerial Small Objects. Image slicing is widely used to improve small-object visibility in aerial images by cropping and resizing local regions before detection. SAHI (Akyon et al., 2022) performs detection on overlapping image slices and merges mapped predictions afterwards, while ASAHI (Zhang et al., 2023) adaptively adjusts slice sizes to reduce redundant processing. This paradigm improves local object visibility by increasing the effective image scale, but couples high-resolution observation with independent crop-level prediction and box fusion or NMS-like post-processing. In contrast, LiG-DETR decouples high-resolution evidence acquisition from crop-level prediction: local crops are used only for feature acquisition, and their features are reassembled into the global coordinate space for unified end-to-end decoding.

Multi-scale Feature and Query Modeling for Aerial Detection. Aerial object detection requires representations robust to large scale and density variations. Multi-scale methods such as FPN (Lin et al., 2017), PANet (Liu et al., 2018), and CE-FPN (Luo et al., 2022) fuse spatial details and semantic information across feature levels. For aerial and small-object detection, TPH-YOLOv5 (Zhu et al., 2021), QueryDet (Yang et al., 2022), YOLO-MS (Chen et al., 2025), FBRT-YOLO (Xiao et al., 2025), and HS-FPN (Shi et al., 2025) further improve high-resolution or multi-scale features through attention, sparse computation, and adaptive modeling. DETR-based detectors, including Deformable DETR (Zhu et al., 2020), DN-DETR (Li et al., 2022), DINO (Zhang et al., 2022), and RT-DETR (Zhao et al., 2024), improve feature interaction, training, and query initialization, while efficient variants such as D-FINE (Peng et al., 2025), DEIMv2 (Huang et al., 2025), and RF-DETR (Robinson et al., 2026) improve the accuracy–efficiency trade-off. For dense aerial scenes, DQ-DETR (Huang et al., 2024) adapts query number and locations to object density, while Dome-DETR (Hu et al., 2025) combines density-guided feature processing, sparse foreground computation, and adaptive query initialization. Overall, these methods mainly enhance full-image representations through feature or query modeling. However, once fine-grained visual information is lost during early downsampling and feature compression, later refinement can hardly recover it. In contrast, LiG-DETR directly acquires high-fidelity local visual evidence before such degradation and reintegrates it with global representations for unified end-to-end detection.

3 THE PROPOSED METHOD

3.1 OVERVIEW

Given an image $I \in \mathbb{R}^{3 \times H \times W}$, LiG-DETR follows a DETR-style pipeline and predicts objects in the original image coordinate space. As shown in Fig. 2, it consists of a global branch (black arrows), a zoomed-in local branch (red arrows), a Global-Local Reassembly Projector, and a single DETR decoder. The two branches share the same visual encoder, while decoding is performed only once for unified set prediction. The global branch encodes the resized full image to preserve scene-level context, producing the encoder-native Global G_1 , from which a higher-resolution Global G_0 is generated through projection. In parallel, the local branch acquires high-fidelity local evidence by encoding selected zoomed-in regions. The projected local features are reassembled according to their original spatial locations, while unselected regions are filled with the corresponding Global G_0 features, forming the context-preserved dense local feature L . The resulting feature set $\{G_0, G_1, L\}$ is then used for proposal generation and unified decoding by a single DETR decoder. Within this framework, **Context-Preserved Selective Reassembly (CPSR)** concentrates high-resolution encoding on informative spatial regions, while **Density-Aware Adaptive Query Allocation (DAQA)** adapts the decoder query budget based on encoder proposal scores. Together, they reduce redundant computation across spatial regions and decoder queries.

3.2 GLOBAL-LOCAL REASSEMBLY FOR HIGH-FIDELITY LOCAL EVIDENCE

Full-image encoding is essential for global context modeling, but spatial compression can weaken the fine-grained visual cues of small objects. Rather than relying solely on full-image representations or independent crop-level detection, LiG-DETR acquires **high-fidelity local evidence** from magnified observations, reassembles it into the global spatial coordinate system, and jointly decodes it with global features using a single DETR decoder.

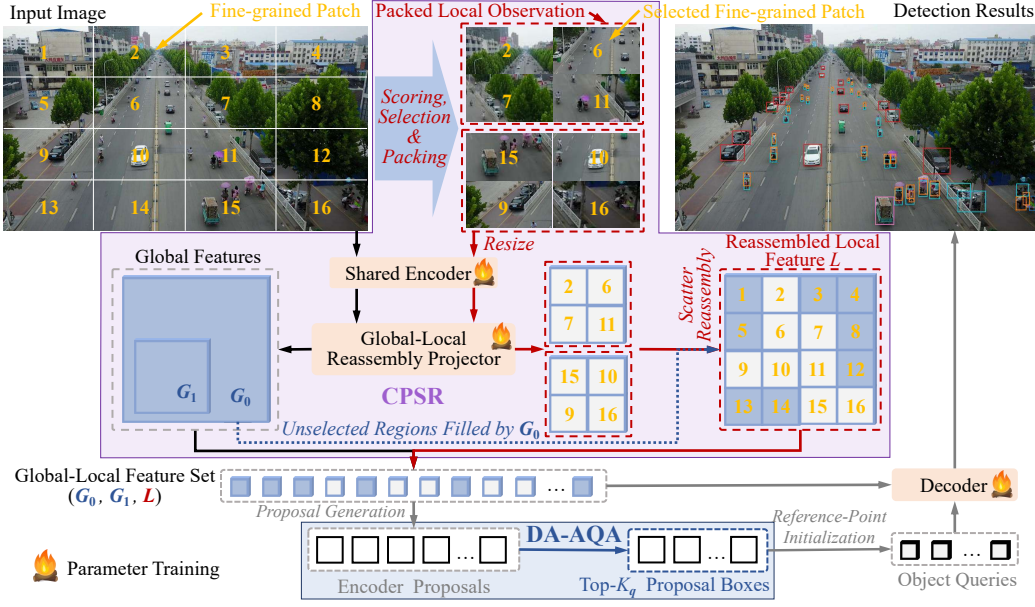


Figure 2: Overview of LiG-DETR. Black and red arrows denote the full-image global branch and the zoomed-in local branch, respectively. The full image is encoded into the encoder-native Global G_1 , from which the higher-resolution Global G_0 is generated through projection. **CPSR** selects informative fine-grained patches for high-fidelity local evidence acquisition. The projected local features are spatially reassembled, while unselected regions are filled with the corresponding Global G_0 features, forming the context-preserved dense local feature L . The resulting feature set $\{G_0, G_1, L\}$ is used for proposal generation and unified decoding by a single DETR decoder. **DA-AQA** determines an image-specific query budget K_q from encoder proposal scores and uses the top- K_q proposal boxes to initialize decoder reference points.

Let $\phi(\cdot)$ denote the shared visual encoder, and $\Pi_g(\cdot)$ and $\Pi_l(\cdot)$ the global and local projection operations in the Global-Local Reassembly Projector, respectively. For the global branch, we obtain $\{G_0, G_1\} = \Pi_g(\phi(I))$, where G_1 denotes the encoder-native global feature at stride 16, and G_0 is the higher-resolution global feature generated through projection at stride 8. For an $H \times W$ input, their spatial sizes are approximately $\frac{H}{16} \times \frac{W}{16}$ and $\frac{H}{8} \times \frac{W}{8}$, respectively. Thus, G_0 has $2 \times$ higher spatial resolution along each axis and approximately $4 \times$ more spatial tokens than G_1 . However, both derive from the same full-image encoding, where fine-grained small-object evidence may be weakened.

To acquire local evidence before such degradation, we define a full local reassembly scheme. The input image is divided into 2×2 non-overlapping **local crops** $\{I_i^l\}_{i=1}^4$. Each crop is resized to the encoder input size and encoded by the shared visual encoder as $Z_i^l = \phi(I_i^l)$, for $i = 1, \dots, 4$. This magnifies local content before encoding, allowing small objects to occupy more visual tokens without changing the encoder architecture. The resulting local features are projected and spatially reassembled as $L_{\text{full}} = \mathcal{R}(\{\Pi_l(Z_i^l)\}_{i=1}^4)$, where $\mathcal{R}(\cdot)$ denotes deterministic spatial reassembly.

The reassembled feature L_{full} has the same spatial resolution as G_0 , but contains high-fidelity evidence acquired from locally magnified observations. Together with $\{G_0, G_1\}$, it forms a globally aligned feature set for unified decoding in the original image coordinate space.

Full reassembly, however, requires high-resolution encoding for all local regions. Directly enlarging the full image suffers from a similar inefficiency: doubling both image dimensions increases the number of visual tokens by approximately $4 \times$, and the quadratic self-attention cost by approximately $16 \times$. Since informative content is spatially non-uniform in aerial images, high-resolution computation need not be allocated uniformly, motivating our selective reassembly strategy.

3.3 CONTEXT-PRESERVED SELECTIVE REASSEMBLY (CPSR)

To reduce the cost of full reassembly, **Context-Preserved Selective Reassembly (CPSR)** selectively allocates high-resolution encoding to informative regions while preserving the same dense and globally aligned feature layout required by subsequent decoding.

Specifically, the input image is divided into $N \times N$ **fine-grained patches** $\{p_j\}_{j=1}^{N^2}$. To identify informative regions with minimal additional cost, we use a Laplacian-based high-frequency score. Given the resized and ImageNet-normalized input tensor X , we first average its three channels as $g = \frac{1}{3} \sum_{c=1}^3 X_c$, and then apply a 3×3 four-neighbor Laplacian kernel. The importance score of patch p_j is defined as the mean absolute Laplacian response over valid image pixels:

$$a_j = \frac{\sum_{u \in p_j} m(u) |(\mathbf{L} * g)(u)|}{\max\left(1, \sum_{u \in p_j} m(u)\right)}, \quad (1)$$

where $m(u) \in \{0, 1\}$ masks padding and $\mathbf{L}$ denotes the four-neighbor Laplacian kernel.

Given a keep ratio γ , we retain $K_p = \text{clip}(\lceil \gamma N^2 \rceil, K_{\min}, K_{\max})$ patches and select $\mathcal{S} = \text{TopK}(\{a_j\}_{j=1}^{N^2}, K_p)$. The selected patches are sorted by importance and packed into compact $G \times G$ local observations, yielding $B = \lceil K_p / G^2 \rceil$ observations. Packing only changes their temporary arrangement for efficient encoding, while their original image coordinates are retained for reassembly.

Following the same encoding and projection pipeline as full reassembly, each packed observation $\tilde{I}_b^l$ is processed as $\tilde{T}_b^l = \Pi_l(\phi(\tilde{I}_b^l))$, for $b = 1, \dots, B$. The encoded patch features are then restored to their original spatial locations as $L_{\mathcal{S}} = \mathcal{R}_{\mathcal{S}}(\{\tilde{T}_b^l\}_{b=1}^B)$, where $\mathcal{R}_{\mathcal{S}}(\cdot)$ denotes selective reassembly.

Zero-filling unselected regions would discard useful scene context. We therefore fill them with the corresponding Global G_0 features:

$$L(u) = \begin{cases} L_{\mathcal{S}}(u), & u \in \Omega_{\mathcal{S}}, \\ G_0(u), & u \notin \Omega_{\mathcal{S}}, \end{cases} \quad (2)$$

where $\Omega_{\mathcal{S}}$ denotes the spatial region covered by the selected patches. Selected regions thus contain high-fidelity local evidence from magnified observations, while unselected regions retain global context from G_0 . CPSR therefore preserves a dense, globally aligned feature L while reducing unnecessary high-resolution encoding under selective budgets.

Notably, CPSR estimates region importance directly in the image space rather than from encoded feature maps. Fine-grained cues of small objects may already be weakened by downsampling and feature compression, making feature-based selection more likely to overlook informative regions before high-resolution encoding. Operating directly on the image retains access to these local high-frequency cues and provides a low-cost signal for region selection before representation degradation.

3.4 DENSITY-AWARE ADAPTIVE QUERY ALLOCATION (DA-AQA)

In addition to spatially varying demands for high-resolution feature acquisition, aerial scenes also exhibit substantial variations in object density, leading to different decoder query requirements across images. Sparse images may require only a limited number of object hypotheses, whereas dense scenes can contain many targets. Using a fixed query budget can therefore lead to unnecessary decoding for sparse scenes or insufficient capacity for dense ones. To complement the spatial adaptation of Context-Preserved Selective Reassembly, we introduce **Density-Aware Adaptive Query Allocation (DA-AQA)**, which adapts the decoder query budget to image content using encoder proposal scores, without requiring an additional density predictor or auxiliary supervision.

Given the global-local feature set $\mathcal{F}_{gl} = \{G_0, G_1, L\}$, the encoder proposal stage produces candidate proposals with class logits. Let $\ell_{i,c}$ denote the class logit of proposal i for category c . We compute the maximum class logit as $z_i = \max_c \ell_{i,c}$, rank proposals according to z_i , and retain the highest-scoring candidate pool of size M . For each retained proposal, we obtain a proposal score as $s_i = \sigma(z_i)$. Let $\{s_{(i)}\}_{i=1}^M$ denote the retained scores sorted in descending order. We compute the normalized cumulative proposal score mass as $C(k) = \sum_{i=1}^k s_{(i)} / \sum_{i=1}^M s_{(i)}$.

DA-AQA first determines a raw image-specific query budget as $K_q^{\text{raw}} = \min\{k \mid C(k) \geq \rho\}$, *i.e.*, the smallest number of retained proposals whose accumulated score reaches a predefined ratio ρ . When proposal confidence is concentrated in a small number of candidates, a smaller query budget is sufficient. In contrast, when high-confidence responses are distributed over more candidates, as often occurs in dense or ambiguous scenes, more proposals are required to cover the same fraction of proposal score mass. DA-AQA therefore adapts decoder computation to image content without explicit object-density prediction.

For stable and hardware-efficient computation, the final query budget is $K_q = \text{clip}(\lceil K_q^{\text{raw}}/r \rceil r, K_q^{\text{min}}, K_q^{\text{max}})$, where r denotes the prescribed rounding multiple. The top- K_q proposal boxes initialize the decoder reference points, while the decoder content queries remain learnable embeddings. When samples with different K_q are batched together, tensors are padded to the largest K_q in the batch. The padded query slots may still pass through the decoder, but a validity mask excludes them from Hungarian matching and classification loss, while box and GIoU losses are computed only over valid matches. At inference, each image uses its own query budget. DA-AQA thus adapts the valid query count while preserving the original matching and losses.

3.5 TRAINING OBJECTIVE AND IMPLEMENTATION DETAILS

Training objective. LiG-DETR retains the original RF-DETR training objective and introduces no additional loss terms. The matched detection losses consist of classification, ℓ_1 box regression, and GIoU losses. The local branch is used only for high-resolution feature acquisition: all ground-truth boxes and Hungarian matching remain in the original image coordinate system, without crop-level detection heads, matching, or additional local-branch supervision. CPSR and DA-AQA are integrated into the same end-to-end pipeline without extra supervision.

Implementation details. We use RF-DETR-L as the base detector with a trainable DINOv2 visual encoder initialized from pretrained weights. Full local reassembly uses a 2×2 partition. For CPSR, the input is divided into a 4×4 fine-grained patch grid ($N = 4$), and selected patches are packed into 2×2 local observations ($G = 2$) in descending order of their Laplacian scores. We evaluate $B = \{1, 2, 3, 4\}$ packed local-observation budgets, corresponding to $K_p = \{4, 8, 12, 16\}$ retained patches, respectively.

LiG-DETR is trained using distributed data parallelism on 8 NVIDIA RTX 3090 GPUs for 72 epochs. We use AdamW with an initial learning rate of 1×10^{-4} and a weight decay of 1×10^{-4} . The batch size is 1 per GPU with 16-step gradient accumulation, corresponding to an effective batch size of 128. Other optimization, data augmentation, and training settings follow RF-DETR.

4 EXPERIMENTAL RESULTS

4.1 SETUP

Comparison methods. We compare LiG-DETR with representative recent object detectors, including Dome-DETR (Hu et al., 2025), FBRT-YOLO (Xiao et al., 2025), SFS-DETR (Jia et al., 2026), FSDC-DETR (Liu et al., 2026), YOLO-MS (Chen et al., 2025), YOLOv13 (Lei et al., 2025), YOLO26 (Sapkota et al., 2025), LW-DETR (Song et al., 2025), D-FINE (Peng et al., 2025), DEIMv2 (Huang et al., 2025), RT-DETRv4 (Liao et al., 2026), and RF-DETR (Robinson et al., 2026). These methods cover diverse detector architectures and design paradigms, enabling a broad comparison of detection accuracy and computational efficiency. Most non-RF baselines are evaluated at 640×640 , following the default or commonly adopted resolution of their corresponding base detectors. For consistency, Dome-DETR and FSDC-DETR are also evaluated at 640×640 , although their original VisDrone experiments use 800×800 . Since Dome-DETR and FSDC-DETR are built upon D-FINE and DEIMv2, respectively, we adopt the same 640×640 setting as their corresponding base detectors. RF-DETR and LiG-DETR are evaluated at 704×704 , retaining the native RF-DETR resolution for direct comparison with our base detector while keeping the input scale close to the 640×640 setting used by the other methods.

Table 1: Image distribution in DGDet-VisDrone.

Domain	Cloudy Train/Test	Sunny	Dusk	Foggy	Night	Rainy	Total
# Images	2030 / 1016	2201	711	734	1892	45	8629

Table 2: Comparison on VisDrone-DET2019 val set (%).

Methods	Pedestrian	People	Bicycle	Car	Van	Truck	Tricycle	Awning-tricycle	Bus	Motor	AP	AP _s	AP _m	AP _l	Params. (M)	GFLOPs _↓	FPS _↑
YOLOv13-L	25.9	16.6	11.1	62.2	37.2	32.8	22.0	13.0	52.4	26.2	29.9	18.2	41.4	56.6	27.6	85.4	37.9
YOLO-MS (YOLOv13-L)	25.4	16.5	10.2	62.4	37.5	32.9	22.1	13.9	50.4	26.2	29.8	18.1	41.3	49.8	31.2	99.8	42.9
YOLO26-L	28.4	18.4	10.2	61.8	35.7	29.9	21.3	12.8	48.4	27.3	29.4	18.3	38.9	51.1	24.8	86.5	58.3
YOLO-MS (YOLO26-L)	26.7	17.8	11.2	60.2	34.9	29.4	20.7	11.4	48.2	27.1	28.8	20.3	40.1	48.6	31.1	141.6	50.1
LW-DETR-M	20.0	17.1	9.9	53.2	30.7	28.0	19.4	10.2	40.6	22.9	25.2	14.7	38.4	64.8	28.2	83.8	72.6
D-FINE-L	22.9	18.9	11.0	58.3	34.9	27.3	21.1	10.8	45.0	26.9	27.7	18.3	39.3	54.5	31.0	91.4	32.8
DEIMv2-L	20.2	16.0	7.9	57.0	32.7	25.7	17.6	11.1	39.3	23.8	25.1	15.9	36.0	54.6	32.0	145.8	35.9
RT-DETRv4-L	23.4	19.1	11.5	59.7	37.2	29.7	21.3	12.1	46.9	28.2	28.9	19.3	40.4	55.0	31.0	93.3	42.5
Dome-DETR-L	34.7	25.8	19.3	65.6	43.9	33.7	28.1	17.2	56.7	35.2	30.4	48.5	61.8	36.0	36.0	240.7	14.8
FBRT-YOLO-L	20.5	12.5	7.9	55.2	27.7	24.9	17.5	8.2	42.3	21.5	28.9	14.0	36.4	47.9	14.6	164.9	104.5
SFS-DETR-S	29.8	22.1	13.7	62.3	35.1	29.1	22.8	11.0	49.5	31.5	30.7	22.6	41.5	45.4	28.3	112.7	40.4
FSDC-DETR-M	17.6	14.2	4.8	54.9	34.3	22.6	16.1	9.0	34.9	21.2	23.0	16.8	28.6	37.2	34.1	121.5	30.0
RF-DETR-L (baseline)	25.1	20.7	13.1	57.2	34.8	31.3	22.5	14.3	47.3	27.7	29.4	18.6	43.4	65.1	33.9	125.6	51.6
LiG-DETR _{B=1}	31.8	24.3	16.8	63.2	42.3	38.1	27.2	17.3	52.8	31.8	34.6	25.3	46.4	61.5	38.7	284.0	30.4
LiG-DETR _{B=2}	33.7	25.7	18.7	63.9	43.3	39.3	28.9	17.9	54.1	33.3	35.9	26.5	48.0	60.9	38.7	403.4	24.9
LiG-DETR _{B=3}	34.8	26.6	19.8	64.2	43.8	40.9	29.0	17.5	55.0	34.6	36.6	27.4	49.0	62.5	38.7	522.9	21.6
LiG-DETR_{B=4}	34.9	27.5	20.2	64.4	43.6	40.0	30.4	18.7	56.2	35.1	37.1	27.6	49.9	62.9	38.7	642.4	18.0

Table 3: Comparison with representative detectors on AI-TOD-v2 test set (%).

Methods	Airplane	Bridge	Storage-tank	Ship	Swimming-pool	Vehicle	Person	Wind-mill	AP	AP _s	AP _m
YOLOv13-L	52.0	20.4	45.0	47.6	23.1	36.0	17.4	9.0	31.3	26.2	47.9
YOLO-MS (YOLOv13-L)	48.3	19.5	43.9	41.7	22.1	33.9	15.8	6.9	29.0	24.6	46.7
YOLO26-L	47.4	17.7	45.7	47.1	23.9	35.8	18.0	7.8	30.4	25.9	45.0
YOLO-MS (YOLO26-L)	45.1	17.4	43.7	48.4	26.1	34.0	18.2	7.5	30.1	22.8	44.1
LW-DETR-M	35.2	10.7	56.6	32.2	20.3	18.8	12.7	6.8	20.4	19.0	42.2
D-FINE-L	38.8	19.7	34.1	39.0	19.5	23.3	14.6	5.6	24.3	23.4	42.6
DEIMv2-L	9.4	0.6	24.5	22.1	3.6	15.5	6.9	1.0	10.4	10.1	18.5
RT-DETRv4-L	37.4	15.1	32.8	32.7	19.2	22.0	12.1	4.8	22.0	21.0	38.0
Dome-DETR-L	46.3	23.4	44.3	49.3	23.5	37.1	20.2	7.4	31.4	37.6	45.4
FBRT-YOLO-L	48.8	20.4	43.9	46.6	22.4	36.2	17.3	7.7	30.4	25.5	45.8
SFS-DETR-S	24.7	16.6	33.0	32.3	19.6	22.9	11.7	3.6	20.6	19.7	33.1
FSDC-DETR-M	36.2	12.0	31.6	32.6	17.4	21.7	12.4	5.0	21.1	20.1	35.2
RF-DETR-L (baseline)	38.2	13.6	33.8	38.6	22.7	26.0	16.5	9.6	24.9	23.6	45.4
LiG-DETR	46.9	21.9	43.7	49.4	25.2	34.5	22.3	10.1	31.8	30.8	49.8

Datasets. We evaluate LiG-DETR on two aerial detection benchmarks and one cross-domain protocol: **VisDrone-DET2019** (Du et al., 2019), **AI-TOD-v2** (Xu et al., 2022), and our proposed **DGDet-VisDrone**. **VisDrone-DET2019** is a UAV-view detection benchmark containing 10,209 images, including 6,471 training images, 548 validation images, and 3,190 test images. It covers 10 categories, including pedestrians, vehicles, and bicycles, with scenes ranging from sparse to highly crowded environments. Following Dome-DETR, we train on the training split and report results on the validation split. We further construct **DGDet-VisDrone**, a cross-domain protocol based on the annotated images of VisDrone-DET2019. The data are partitioned into six domains, as shown in Table 1. We use Cloudy as the source domain and split its images into source-training and source-test subsets at a ratio of 2:1. The remaining five domains are used exclusively as unseen target domains for cross-domain testing. **AI-TOD-v2** contains 28,036 images and 752,745 annotated instances, split into 11,214 training, 2,804 validation, and 14,018 test images. It contains 8 categories and is dominated by extremely small objects, with an average object size of 12.7 pixels and 86% of instances smaller than 16 pixels. Following Dome-DETR, we report test-set results.

Evaluation protocol and metrics. We use COCO-style AP as the primary metric, averaged over IoU thresholds from 0.50 to 0.95 with a step of 0.05. Compared with AP₅₀ and AP₇₅, AP evaluates performance across different localization requirements and is particularly informative for small objects, where slight box errors can cause large IoU drops. For VisDrone-DET2019, we report AP_s, AP_m, and AP_l for small, medium, and large objects, respectively. For AI-TOD-v2, we report AP_s and AP_m. For efficiency, we report parameters, GFLOPs at the corresponding input resolutions, and FPS on a single RTX 3090 GPU with batch size 1.

4.2 MAIN RESULTS

Results on VisDrone-DET2019. Table 2 compares LiG-DETR with representative detectors on VisDrone-DET2019. LiG-DETR consistently improves over the RF-DETR-L baseline under different local high-resolution encoding budgets. Here, B denotes the number of packed local observations in CPSR and reflects the local high-resolution encoding budget. With only one packed local observation ($B = 1$), LiG-DETR achieves 34.6% AP, improving RF-DETR-L by 5.2 points while running at 30.4 FPS. Increasing B further improves detection accuracy, and LiG-DETR _{$B=4$} reaches 37.1% AP, outperforming RF-DETR-L by 7.7 points and achieving the highest AP among the compared methods. The improvements are particularly pronounced for small and medium objects. Compared with RF-DETR-L, LiG-DETR _{$B=4$} improves AP_s from 18.6% to 27.6% and AP_m

Table 4: Generalization results on DGDet-VisDrone (%).

Methods	Cloudy (Source)				Sunny				Dusk				Foggy				Night				Rainy				Average			
	AP	AP _s	AP _m	AP _l	AP	AP _s	AP _m	AP _l	AP	AP _s	AP _m	AP _l	AP	AP _s	AP _m	AP _l	AP	AP _s	AP _m	AP _l	AP	AP _s	AP _m	AP _l	AP	AP _s	AP _m	AP _l
YOLOv13-L	31.9	17.5	39.3	49.3	18.4	8.3	23.9	30.8	22.9	10.9	32.0	41.2	20.0	9.0	28.6	41.4	13.5	4.6	15.0	23.0	22.4	9.1	23.8	60.1	21.5	9.9	27.1	41.0
YOLO-MS (YOLOv13-L)	30.7	16.2	39.0	49.9	18.7	8.6	24.7	33.3	22.8	10.7	32.5	40.6	20.1	8.7	29.8	45.2	12.4	4.5	15.1	20.8	22.5	8.8	22.9	69.1	21.2	9.6	27.3	43.2
YOLOv26-L	33.0	18.7	40.5	50.1	20.6	9.7	26.6	36.6	24.4	11.9	33.8	48.1	21.5	10.0	30.3	47.4	13.5	4.6	15.8	25.9	24.6	10.3	26.9	64.2	22.9	10.9	29.0	45.4
YOLO-MS (YOLO26-L)	29.4	18.2	38.0	46.9	16.8	9.2	23.2	31.3	20.6	11.0	30.6	36.3	18.3	10.1	27.7	42.7	9.1	4.1	12.6	19.1	20.0	9.8	22.5	62.0	19.0	10.4	25.8	39.7
LW-DETR-M	26.2	13.3	36.4	54.4	19.3	8.5	28.4	42.9	21.6	10.1	33.2	59.1	18.7	7.3	30.7	47.8	16.5	5.9	22.2	42.7	24.6	8.9	25.7	75.1	21.2	9.0	29.4	53.7
D-FINE-L	25.6	14.6	34.7	43.8	17.4	8.1	24.4	35.7	20.2	10.8	30.4	46.2	17.1	8.2	26.6	45.3	13.6	4.9	18.0	31.8	22.4	7.5	23.4	71.9	19.4	9.0	26.3	45.8
DEIMv2-L	23.2	12.5	31.3	41.3	17.1	8.2	23.1	33.4	18.7	10.0	27.2	31.7	15.7	7.2	22.9	37.2	13.9	5.1	18.2	32.1	26.5	30.7	17.1	20.9	19.2	12.3	23.3	32.8
RT-DETRv4-L	24.0	13.6	32.4	40.0	16.9	8.2	23.0	32.8	18.7	10.1	27.9	31.1	16.4	8.0	24.6	38.1	11.8	4.4	15.7	23.7	26.1	31.1	18.4	20.8	19.0	12.6	23.7	31.1
Dome-DETR-L	34.2	23.8	42.1	50.9	23.9	14.5	29.7	36.4	26.6	16.7	35.0	40.0	24.9	15.7	31.7	43.8	16.7	7.3	20.7	31.1	32.9	35.3	23.9	23.0	26.5	18.9	30.5	37.5
FBRT-YOLO-L	30.9	14.3	34.1	42.7	17.6	6.1	19.3	27.1	21.5	7.5	26.9	34.8	19.9	6.2	23.8	42.6	12.3	2.9	10.2	19.0	21.7	6.7	17.8	58.0	20.7	7.3	22.0	37.4
SFS-DETR-S	29.6	19.9	38.0	43.4	19.6	11.5	26.6	30.9	22.9	13.9	32.8	38.1	20.6	11.6	31.6	44.6	10.7	4.60	14.5	21.6	21.3	9.9	23.7	58.1	20.7	12.3	28.7	35.7
FSDC-DETR-M	23.9	13.9	32.2	38.5	16.7	9.0	21.6	28.7	18.8	10.4	27.2	30.4	16.5	8.6	24.3	36.3	12.2	6.2	14.9	21.9	25.8	27.7	14.3	18.8	17.6	9.6	24.0	31.2
RF-DETR-L (baseline)	29.5	16.9	39.9	57.1	22.5	11.2	32.2	46.5	25.1	13.3	37.2	60.6	21.6	9.5	34.8	56.5	19.5	7.5	26.2	43.7	26.5	9.5	29.3	76.8	24.1	11.3	33.3	56.9
LiG-DETR	34.8	23.6	45.8	59.4	28.4	16.9	39.4	49.3	30.2	18.9	43.0	60.0	26.7	15.3	41.0	52.1	22.0	9.7	29.3	45.7	32.4	14.6	36.6	75.8	29.1	16.5	39.2	57.1

from 43.4% to 49.9%, demonstrating the benefit of high-resolution local evidence for objects sensitive to spatial compression. Meanwhile, it retains strong large-object performance with 62.9% AP_l. These results show that high-resolution local evidence substantially strengthens fine-grained object representations while retaining strong performance across object scales.

LiG-DETR also provides a controllable accuracy–efficiency trade-off through B . As B increases from 1 to 4, AP improves from 34.6% to 37.1%, while FPS decreases from 30.4 to 18.0 due to additional local encoding. Even at $B = 4$, LiG-DETR remains faster than Dome-DETR-L (18.0 vs. 14.8 FPS) while achieving 6.7 points higher AP. Unless otherwise specified, LiG-DETR _{$B=4$} is used as the default configuration in subsequent experiments.

Results on AI-TOD-v2. Table 3 reports the results on AI-TOD-v2. LiG-DETR achieves the highest overall AP of 31.8%, outperforming RF-DETR-L by 6.9 points and surpassing all compared methods. This demonstrates the effectiveness of global-local reassembly for aerial imagery dominated by extremely small objects. Compared with RF-DETR-L, LiG-DETR improves AP_s from 23.6% to 30.8% and AP_m from 45.4% to 49.8%, showing clear gains on both small and medium objects. Although Dome-DETR-L achieves higher AP_s, LiG-DETR obtains higher overall AP and AP_m, indicating a more balanced improvement across object scales. At the category level, LiG-DETR outperforms RF-DETR-L across all eight categories, further demonstrating the effectiveness of high-resolution local evidence for diverse aerial objects.

Results on DGDet-VisDrone. Small-object detection is particularly vulnerable to domain shifts because small instances provide limited texture, boundary, and shape cues. Changes in weather, illumination, and image quality can further perturb these already weak visual signals. We therefore evaluate LiG-DETR on DGDet-VisDrone to examine whether high-resolution local evidence improves cross-domain generalization to unseen domains. As shown in Table 4, LiG-DETR achieves the highest all-domain average AP of 29.1%, outperforming RF-DETR-L by 5.0 points. More importantly, consistent improvements are observed across all five unseen target domains, including Sunny, Dusk, Foggy, Night, and Rainy, showing effectiveness across diverse appearance shifts. Compared with RF-DETR-L, LiG-DETR improves the all-domain average AP_s from 11.3% to 16.5% and AP_m from 33.3% to 39.2%. These results suggest that acquiring and reassembling high-resolution local evidence helps preserve more discriminative fine-grained information for small and medium objects under domain shifts. Compared with Dome-DETR-L, LiG-DETR achieves higher average AP (29.1% vs. 26.5%), AP_m (39.2% vs. 30.5%), and AP_l (57.1% vs. 37.5%), while Dome-DETR-L obtains higher AP_s (18.9% vs. 16.5%). Overall, LiG-DETR shows improved cross-domain generalization while retaining substantial gains on small and medium objects over RF-DETR-L.

4.3 ABLATION STUDY

Component ablation. Table 5 analyzes the contribution of each component in LiG-DETR. Starting from the RF-DETR-L baseline with only the encoder-native global feature G_1 , adding the reassembled local feature improves AP from 29.4% to 32.9%, with AP_s increasing from 18.6% to 23.3%. This shows that high-resolution local reassembly provides useful fine-grained evi-

Table 5: Ablation study on VisDrone-DET2019 (%).

Configuration	AP	AP _s	AP _m	AP _l
RF-DETR-L ($\{G_1\}$)	29.4	18.6	43.4	65.1
$\{G_1, L\}$	32.9	23.3	45.3	59.0
$\{G_1, G_2\}$	29.0	18.4	42.9	62.8
$\{G_0, G_2\}$	30.0	20.1	43.0	62.5
$\{G_0, G_1\}$	30.4	20.2	43.5	64.7
$\{G_0, G_1, G_2\}$	30.1	20.2	43.0	62.9
$\{G_0, G_1\} + L$, fuse G_0	35.0	25.3	48.0	63.0
$\{G_0, G_1\} + L$, fuse G_1	33.5	24.2	45.8	58.7
$\{G_0, G_1\} + L$, fuse $\{G_0, G_1\}$	35.5	26.6	46.8	61.8
$\{G_0, G_1, L\}$, no fusion	35.5	26.4	47.8	62.9
+ DA-AQA (CPSR: Spatial Packing)	37.0	27.8	49.3	63.2
+ DA-AQA (CPSR: Score-based Packing)	37.1	27.6	49.9	62.9

dence for small objects. However, AP_l decreases from 65.1% to 59.0%, suggesting that local evidence combined with G_1 alone does not provide the best balance across object scales.

We next study different combinations of global feature levels without Local Reassembly. Here, G_0 , G_1 , and G_2 denote global features with strides 8, 16, and 32, respectively. Among the evaluated combinations, $\{G_0, G_1\}$ achieves the best overall performance, reaching 30.4% AP and 20.2% AP_s . This indicates that incorporating the higher-resolution G_0 is beneficial for small-object detection, while combining it with the encoder-native G_1 provides the best overall balance. Adding the coarser G_2 does not yield further gains, indicating limited benefit from very low-resolution features.

We then examine how the reassembled local feature L should interact with the global features. Fusing L into G_1 degrades performance, particularly AP_l , while fusion with G_0 or both G_0 and G_1 does not outperform treating L as an independent feature level. Without explicit fusion, the model achieves 35.5% AP, 47.8% AP_m , and 62.9% AP_l , supporting our choice to preserve L as a separate feature level for joint decoding.

Finally, we examine the adaptive designs in LiG-DETR. With the global-local feature configuration fixed, introducing DA-AQA increases AP from 35.5% to 37.1%, demonstrating the benefit of content-adaptive query allocation. We further compare spatial-order and score-based packing in CPSR under DA-AQA. The two strategies perform nearly identically (37.0% vs. 37.1% AP), indicating that packing order has little effect once the encoded patch features are restored to their original spatial locations. We therefore adopt score-based packing by default. Table 2 evaluates the CPSR local-observation budget B and its accuracy–efficiency trade-off.

Comparison with full-image upscaling.

We further compare LiG-DETR with directly doubling both spatial dimensions of the full-image input. As shown in Table 6, RF-DETR-L ($2\times$ Input) reaches 37.4% AP, but uniformly increasing the full-image resolution raises the computation to 851.8 GFLOPs and reduces the speed to 11.8 FPS. Its parameter count also increases slightly under the higher-resolution input setting. In contrast, LiG-DETR $_{B=4}$ achieves comparable accuracy with 37.1% AP while requiring only 642.4 GFLOPs and running at 18.0 FPS. LiG-DETR $_{B=1}$ further reduces computation to 284.0 GFLOPs while still achieving 34.6% AP. These results show that local high-resolution evidence acquisition provides a more favorable accuracy–efficiency trade-off than full-image upscaling.

Table 6: High-resolution evidence acquisition (%).

Method	AP	AP_s	Params. (M)	GFLOPs $\downarrow$	FPS $\uparrow$
RF-DETR-L	29.4	18.6	33.9	125.6	51.6
RF-DETR-L ($2\times$ Input)	37.4	27.8	36.2	851.8	11.8
LiG-DETR $_{B=1}$	34.6	25.3	38.7	284.0	30.4
LiG-DETR $_{B=4}$	37.1	27.6	38.7	642.4	18.0

Effect of patch granularity.

Table 7 studies the effect of fine-grained patch granularity in CPSR. Here, # Patches denotes the total number of fine-grained patches N^2 obtained by partitioning the input image. To isolate the effect of patch granularity, we fix the packed local-observation budget to $B = 4$ and retain all patches. Accordingly, the packing grid size G is set to 1, 2, and 4 for 4, 16, and 64 patches, respectively, so that all patches are packed into the same four local observations. This keeps the amount of local high-resolution encoding nearly unchanged across different granularities, with identical reported GFLOPs. Finer partitioning, however, introduces additional patch processing and reassembly overhead, leading to lower practical FPS. Using 16 patches achieves the best overall performance with 37.1% AP. Compared with 4 patches, increasing the granularity improves AP_s and AP_m , suggesting that a moderate partition provides a better balance between localized fine-grained evidence and contextual continuity during packing and reassembly. Further increasing the number of patches to 64 reduces AP_s and AP_m , possibly because overly fine partitioning fragments local context and introduces more patch boundaries. Although 64 patches achieves the highest AP_l , the 16-patch setting provides the best overall accuracy and is adopted by default. *See Appendix A for qualitative analysis and Appendix B for limitations and future work.*

Table 7: Patch granularity ablation (%).

# Patches	AP	AP_s	AP_m	AP_l	Params. (M)	GFLOPs $\downarrow$	FPS $\uparrow$
4	36.9	27.1	49.5	62.5	38.7	642.4	19.0
16	37.1	27.6	49.9	62.9	38.7	642.4	18.0
64	36.2	26.8	48.7	63.9	38.7	642.4	12.4

5 CONCLUSION

In this paper, we propose **LiG-DETR**, an Efficient Global-Local Reassembly framework for aerial object detection. LiG-DETR reformulates image slicing as high-resolution local feature acquisition and reassembles local evidence into the global coordinate space for unified end-to-end decoding, avoiding independent slice-level detection. Context-Preserved Selective Reassembly adaptively focuses high-resolution encoding on informative regions, while Density-Aware Adaptive Query Allocation dynamically adapts the decoder query budget. Extensive experiments show substantial improvements on small and medium objects while retaining strong large-object performance, together with a favorable accuracy-efficiency trade-off and improved cross-domain generalization.

AI USE STATEMENT

In this work, we used generative AI tools to assist with translation, language editing, and improving the readability and organization of the manuscript. We did not use generative AI tools for research design, method development, data processing, or interpretation of experimental results. All AI-assisted text was reviewed and revised by the authors. We take responsibility for the final content of this work, including any text produced with the aid of generative AI.

ETHICS STATEMENT

This work does not involve the collection of new human-subject data or personally identifiable information. All experiments are conducted on publicly available aerial object detection datasets or derived evaluation splits. The proposed DGDet-VisDrone protocol is constructed from the annotated images of VisDrone-DET2019, and the processed split files will be released for research purposes.

REPRODUCIBILITY STATEMENT

We provide detailed descriptions of the model architecture, training settings, evaluation protocols, and ablation configurations in the paper. The construction and domain splits of DGDet-VisDrone are also documented. The code and processed dataset splits will be made publicly available to facilitate reproducibility.

REFERENCES

- Fatih Cagatay Akyon, Sinan Onur Altinuc, and Alptekin Temizel. Slicing aided hyper inference and fine-tuning for small object detection. In *2022 IEEE international conference on image processing (ICIP)*, pp. 966–970. IEEE, 2022.
- Yuming Chen, Xinbin Yuan, Jiabao Wang, Ruiqi Wu, Xiang Li, Qibin Hou, and Ming-Ming Cheng. Yolo-ms: Rethinking multi-scale representation learning for real-time object detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 47(6):4240–4252, 2025.
- Dawei Du, Yuankai Qi, Hongyang Yu, Yifan Yang, Kaiwen Duan, Guorong Li, Weigang Zhang, Qingming Huang, and Qi Tian. The unmanned aerial vehicle benchmark: Object detection and tracking. In *Proceedings of the European conference on computer vision (ECCV)*, pp. 370–386, 2018.
- Dawei Du, Pengfei Zhu, Longyin Wen, Xiao Bian, Haibin Lin, Qinghua Hu, Tao Peng, Jiayu Zheng, Xinyao Wang, Yue Zhang, et al. Visdrone-det2019: The vision meets drone object detection in image challenge results. In *2019 IEEE/CVF International Conference on Computer Vision Workshop (ICCVW)*, pp. 213–226. IEEE, 2019.
- Zhangchi Hu, Peixi Wu, Jie Chen, Huyue Zhu, Yijun Wang, Yansong Peng, Hebei Li, and Xiaoyan Sun. Dome-detr: Detr with density-oriented feature-query manipulation for efficient tiny object detection. In *Proceedings of the 33rd ACM International Conference on Multimedia*, pp. 101–110, 2025.
- Shihua Huang, Yongjie Hou, Longfei Liu, Xuanlong Yu, and Xi Shen. Real-time object detection meets dinov3. *arXiv preprint arXiv:2509.20787*, 2025.

- Yi-Xin Huang, Hou-I Liu, Hong-Han Shuai, and Wen-Huang Cheng. Dq-detr: Detr with dynamic query for tiny object detection. In *European Conference on Computer Vision*, pp. 290–305. Springer, 2024.
- Dingding Jia, Jiankang Wang, Longlong Zhang, Zhiheng Liu, and Xuan Wang. Sfs-detr: Spatial-frequency selection for uav object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 6582–6591, 2026.
- Mengqi Lei, Siqi Li, Yihong Wu, Han Hu, You Zhou, Xinhua Zheng, Guiguang Ding, Shaoyi Du, Zongze Wu, and Yue Gao. Yolov13: Real-time object detection with hypergraph-enhanced adaptive visual perception. *arXiv preprint arXiv:2506.17733*, 2025.
- Feng Li, Hao Zhang, Shilong Liu, Jian Guo, Lionel M Ni, and Lei Zhang. Dn-detr: Accelerate detr training by introducing query denoising. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 13619–13627, 2022.
- Zijun Liao, Yian Zhao, Xin Shan, Yu Yan, Chang Liu, Lei Lu, Xiangyang Ji, and Jie Chen. Rt-detr4: Painlessly furthering real-time object detection with vision foundation models. In *European Conference on Computer Vision*, pp. 95–113. Springer, 2026.
- Tsung-Yi Lin, Piotr Dollár, Ross Girshick, Kaiming He, Bharath Hariharan, and Serge Belongie. Feature pyramid networks for object detection. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 2117–2125, 2017.
- Aiwen Liu, Chengguang Zhu, Gang Wang, Dandan Zhu, Haodong Lin, Yan Wang, Huiyu Zhou, and Zhengyi Pan. Fsd-detr: A frequency-spatial domain collaborative detr for small object detection. In *European Conference on Computer Vision*, pp. 631–651. Springer, 2026.
- Shu Liu, Lu Qi, Haifang Qin, Jianping Shi, and Jiaya Jia. Path aggregation network for instance segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 8759–8768, 2018.
- Yihao Luo, Xiang Cao, Juntao Zhang, Jingjuan Guo, Haibo Shen, Tianjiang Wang, and Qi Feng. Ce-fpn: enhancing channel information for object detection. *Multimedia Tools and Applications*, 81(21):30685–30704, 2022.
- Yansong Peng, Hebei Li, Peixi Wu, Yueyi Zhang, Xiaoyan Sun, and Feng Wu. D-fine: Redefine regression task of detr as fine-grained distribution refinement. In *International Conference on Learning Representations*, volume 2025, pp. 44015–44031, 2025.
- Isaac Robinson, Peter Robicheckaux, Matvei Popov, Deva Ramanan, and Neehar Peri. Rf-detr: Neural architecture search for real-time detection transformers. In *International Conference on Learning Representations*, volume 2026, pp. 56087–56100, 2026.
- Ranjan Sapkota, Rahul Harsha Cheppally, Ajay Sharda, and Manoj Karkee. Yolo26: key architectural enhancements and performance benchmarking for real-time object detection. *arXiv preprint arXiv:2509.25164*, 2025.
- Zican Shi, Jing Hu, Jie Ren, Hengkang Ye, Xuyang Yuan, Yan Ouyang, Jia He, Bo Ji, and Junyu Guo. Hs-fpn: High frequency and spatial perception fpn for tiny object detection. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pp. 6896–6904, 2025.
- Baoye Song, Shihao Zhao, Zidong Wang, Jianyu Chen, Weibo Liu, and Xiaohui Liu. Lw-detr: a lightweight transformer-based object detection algorithm for efficient railway crossing surveillance. *Complex & Intelligent Systems*, 11(12):480, 2025.
- Yao Xiao, Tingfa Xu, Yu Xin, and Jianan Li. Fb-rt-yolo: Faster and better for real-time aerial image detection. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pp. 8673–8681, 2025.
- Chang Xu, Jinwang Wang, Wen Yang, Huai Yu, Lei Yu, and Gui-Song Xia. Detecting tiny objects in aerial images: A normalized wasserstein distance and a new benchmark. *ISPRS Journal of Photogrammetry and Remote Sensing*, 190:79–93, 2022.

- Chenhongyi Yang, Zehao Huang, and Naiyan Wang. Querydet: Cascaded sparse query for accelerating high-resolution small object detection. In *Proceedings of the IEEE/CVF Conference on computer vision and pattern recognition*, pp. 13668–13677, 2022.
- Hao Zhang, Feng Li, Shilong Liu, Lei Zhang, Hang Su, Jun Zhu, Lionel M Ni, and Heung-Yeung Shum. Dino: Detr with improved denoising anchor boxes for end-to-end object detection. *arXiv preprint arXiv:2203.03605*, 2022.
- Hao Zhang, Chuanyan Hao, Wanru Song, Bo Jiang, and Baozhu Li. Adaptive slicing-aided hyper inference for small object detection in high-resolution remote sensing images. *Remote Sensing*, 15(5):1249, 2023.
- Yian Zhao, Wenyu Lv, Shangliang Xu, Jinman Wei, Guanzhong Wang, Qingqing Dang, Yi Liu, and Jie Chen. Detsr beat yolos on real-time object detection. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 16965–16974, 2024.
- Xingkui Zhu, Shuchang Lyu, Xu Wang, and Qi Zhao. Tph-yolov5: Improved yolov5 based on transformer prediction head for object detection on drone-captured scenarios. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 2778–2788, 2021.
- Xizhou Zhu, Weijie Su, Lewei Lu, Bin Li, Xiaogang Wang, and Jifeng Dai. Deformable detr: Deformable transformers for end-to-end object detection. *arXiv preprint arXiv:2010.04159*, 2020.

APPENDIX

A QUALITATIVE ANALYSIS

Qualitative results on VisDrone-DET2019. As shown in Fig. 3, LiG-DETR produces more complete detections across diverse VisDrone scenes, including crowded intersections, dense pedestrian regions, and low-illumination environments. Compared with FBRT-YOLO, Dome-DETR, and RF-DETR, LiG-DETR recovers more small and distant instances that are easily missed when objects occupy only a few pixels or appear in densely clustered regions. The advantage is particularly evident in crowded traffic and nighttime scenes, where weak object responses and background interference make detection more difficult. In these cases, the predictions of LiG-DETR more closely follow the spatial distribution of the ground truth and exhibit fewer obvious missed detections. These qualitative results are consistent with the quantitative gains in AP_s and AP_m , supporting our motivation that locally magnified high-resolution evidence can complement full-image representations with stronger fine-grained cues for challenging aerial objects.

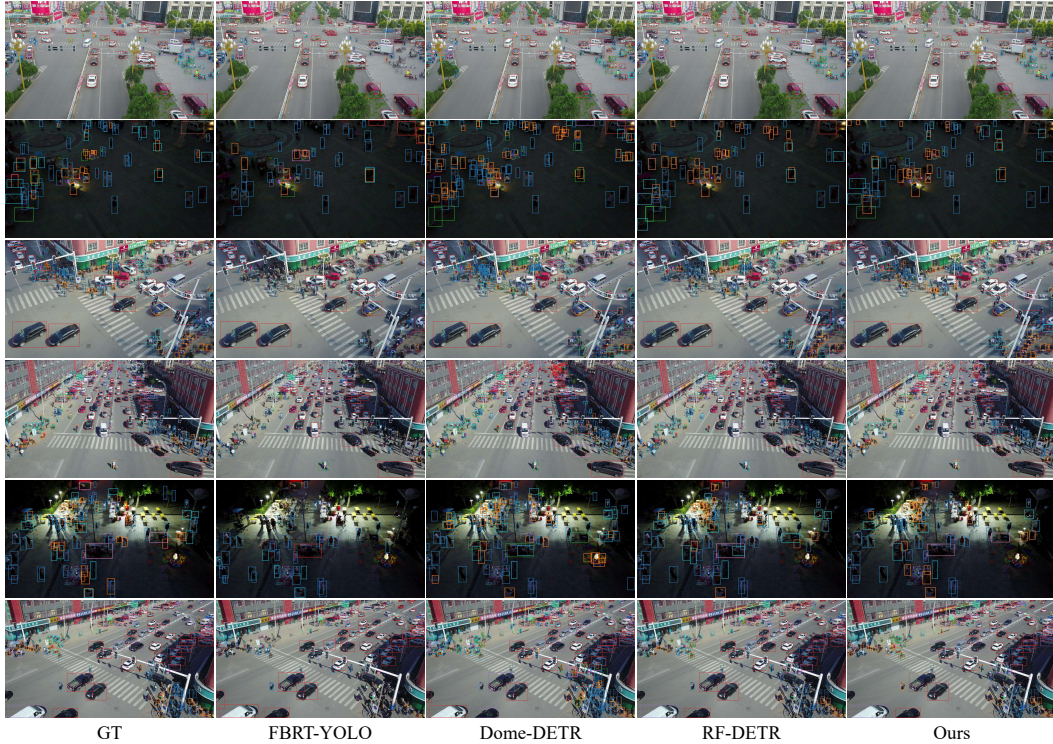


Figure 3: Qualitative comparison on VisDrone-DET2019. LiG-DETR produces more complete detections, particularly for small and densely distributed objects.

Qualitative results on AI-TOD-v2. As shown in Fig. 4, LiG-DETR also demonstrates stronger detection completeness on AI-TOD-v2, where objects are typically extremely small and sparsely or densely distributed over large aerial scenes. Compared with FBRT-YOLO, Dome-DETR, and RF-DETR, LiG-DETR recovers more weak and isolated instances as well as densely distributed tiny objects, particularly in regions where targets occupy only a very limited number of pixels. The compared detectors tend to miss more objects in such regions, whereas LiG-DETR produces predictions that better match the overall spatial distribution of the ground truth. The improvement is visible across different scene layouts, suggesting that the benefit of local high-resolution evidence is not limited to a particular background or density pattern. These observations are consistent with the improvements in AP_s and AP_m , further indicating that acquiring fine-grained evidence before feature degradation helps preserve discriminative cues for extremely small aerial objects.

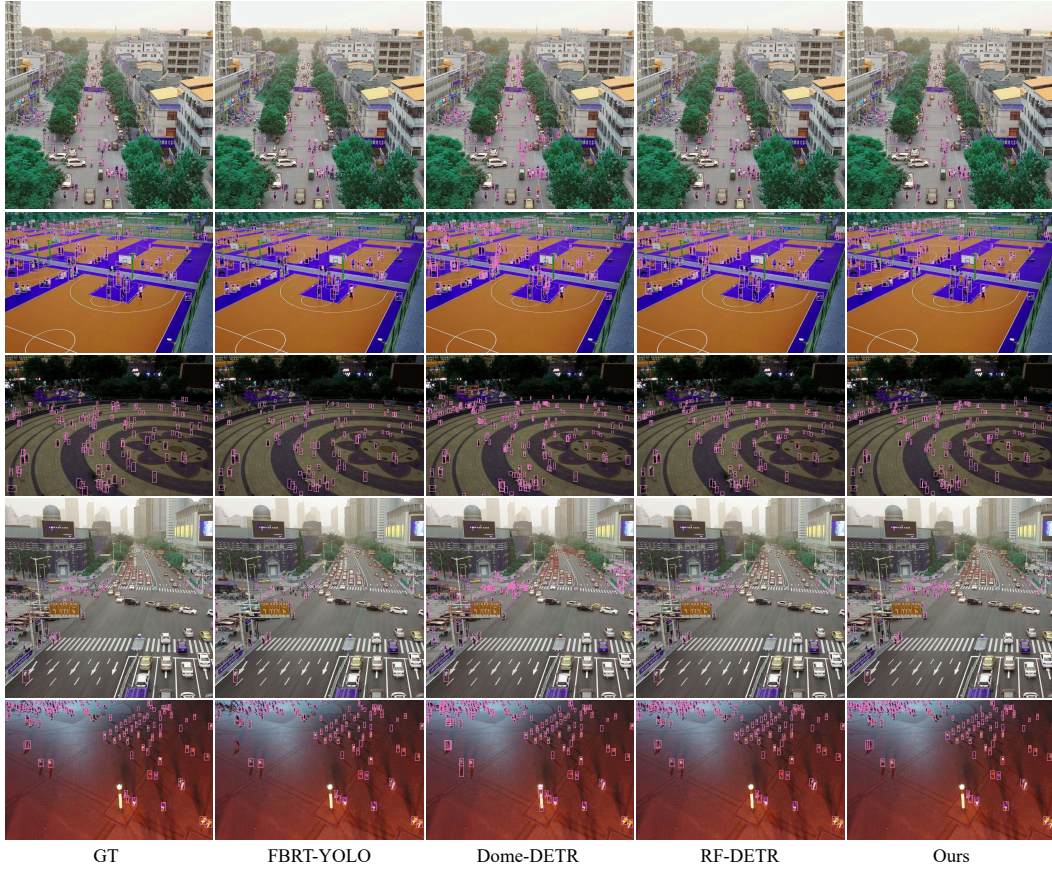


Figure 4: Qualitative comparison on AI-TOD-v2. LiG-DETR detects more extremely small objects and produces predictions closer to the ground-truth distribution.

B LIMITATIONS AND FUTURE WORK

To the best of our knowledge, LiG-DETR is the first framework to reinterpret image slicing as high-resolution local feature acquisition and integrate the reassembled local evidence into a unified end-to-end detector without independent slice-level prediction. Nevertheless, this design still introduces additional computation for local high-resolution encoding. In particular, although increasing the local-observation budget B consistently improves detection accuracy, the $B = 4$ configuration remains noticeably more computationally expensive than the RF-DETR-L baseline. Further improving the efficiency of high-resolution local evidence acquisition therefore remains an important direction for future work.

Another limitation lies in the region-selection strategy of CPSR. The current design uses a lightweight Laplacian-based high-frequency score to identify informative regions before feature degradation. While effective and inexpensive, such low-level image cues are not always perfectly aligned with semantic object importance. Exploring more effective mechanisms for allocating high-resolution computation to truly informative regions is therefore another promising direction.