

Qwen3.8-Omni: Towards Native Omni-Modal Agents

Qwen Team

Abstract

We introduce Qwen3.8-Omni-Flash, a natively multimodal agentic model designed for real-world multimodal productivity. Compared with previous omni models, which primarily emphasized perception and interaction, Qwen3.8-Omni-Flash substantially improves multimodal understanding and reasoning, as well as performance on long-horizon agentic tasks. These capabilities are supported by a native multimodal co-training strategy that preserves strong text-domain capabilities while facilitating the transfer of agentic capabilities from text to audio and video tasks. The model inherits the sparse mixture-of-experts (MoE) architecture of Qwen3.8-Next and extends the context window to one million tokens, supporting long-context multimodal reasoning and long-horizon planning. Together, these advances enable integration into production workflows as either a primary agent or a specialized sub-agent, supporting applications such as video editing, long-form audio and video translation, music-conditioned music video generation or movie generation, and video-based note or omni-skill creation. To address the lack of native audio and video support in existing agent harnesses, we release the open-source framework *Qwen-MM-Plugins*¹, a lightweight plugin framework for multimodal productivity applications. We further frame real-time multimodal interaction as a system-level challenge requiring orchestration of context and memory management, tool use, and sub-agent delegation. Accordingly, we release *Qwen-Live-Harness*², an open-source framework for building responsive, real-time multimodal agents based on Qwen3.8-Omni. Extensive evaluations demonstrate that Qwen3.8-Omni-Flash achieves strong performance across multimodal understanding, reasoning, long-horizon agentic execution, and video productivity tasks. These results, together with the accompanying open-source tools, support Qwen3.8-Omni-Flash as a practical foundation for deploying natively multimodal agents in research and production settings.

1 Introduction

Recent advances in reasoning models have made long-horizon agentic tasks increasingly feasible, with test-time computation emerging as a complementary axis of scaling (OpenAI, 2024; Anthropic, 2025; DeepSeek-AI, 2025; Qwen Team, 2026d). However, most existing agentic systems focus on software development, text-based knowledge work, graphical user interface interaction, or collaborative assistance, with multimodal capabilities used primarily for perception. This emphasis leaves a gap in support for video-centric, multimodal productivity workflows, such as agentic video editing, music video creation, and film production. These workflows require not only multimodal perception but also global planning, temporal reasoning, and the evaluation of coherence and quality in generated multimodal content. Moreover, long-form audiovisual understanding itself can benefit from agentic capabilities, including selective memory, narrative tracking, and targeted review of relevant segments. Motivated by these requirements and the limitations of existing systems, we investigate the potential of omni models to support agentic multimodal productivity.

To this end, we present Qwen3.8-Omni-Flash, Qwen’s latest native omnimodal MoE model, which supports reasoning over text, images, audio, and audiovisual content. The model follows the architecture of Qwen3.5-Omni Thinker (Qwen Team, 2026c), with a sparse MoE language backbone (Qwen Team, 2026a) and an upgraded AuT (Qwen Team, 2026c) designed to better capture spatial cues in audio. To develop the perceptual and reasoning capabilities required by multimodal productivity workflows, we first conduct native multimodal pretraining to strengthen unified perception and multimodal reasoning with long chains of thought. We then build on this foundation through post-training to enhance long-context reasoning and inference-time scaling. The post-training data and objectives emphasize long-horizon problems across text, vision, and audiovisual settings, spanning general reasoning, coding, and agentic workflows. To ground reasoning in environmental feedback, we complement static supervision with training in interactive environments, including executable code sandboxes and open harness-based

¹<https://github.com/QwenLM/Qwen-MM-Plugins>

²<https://github.com/QwenLM/Qwen-Live-Harness>

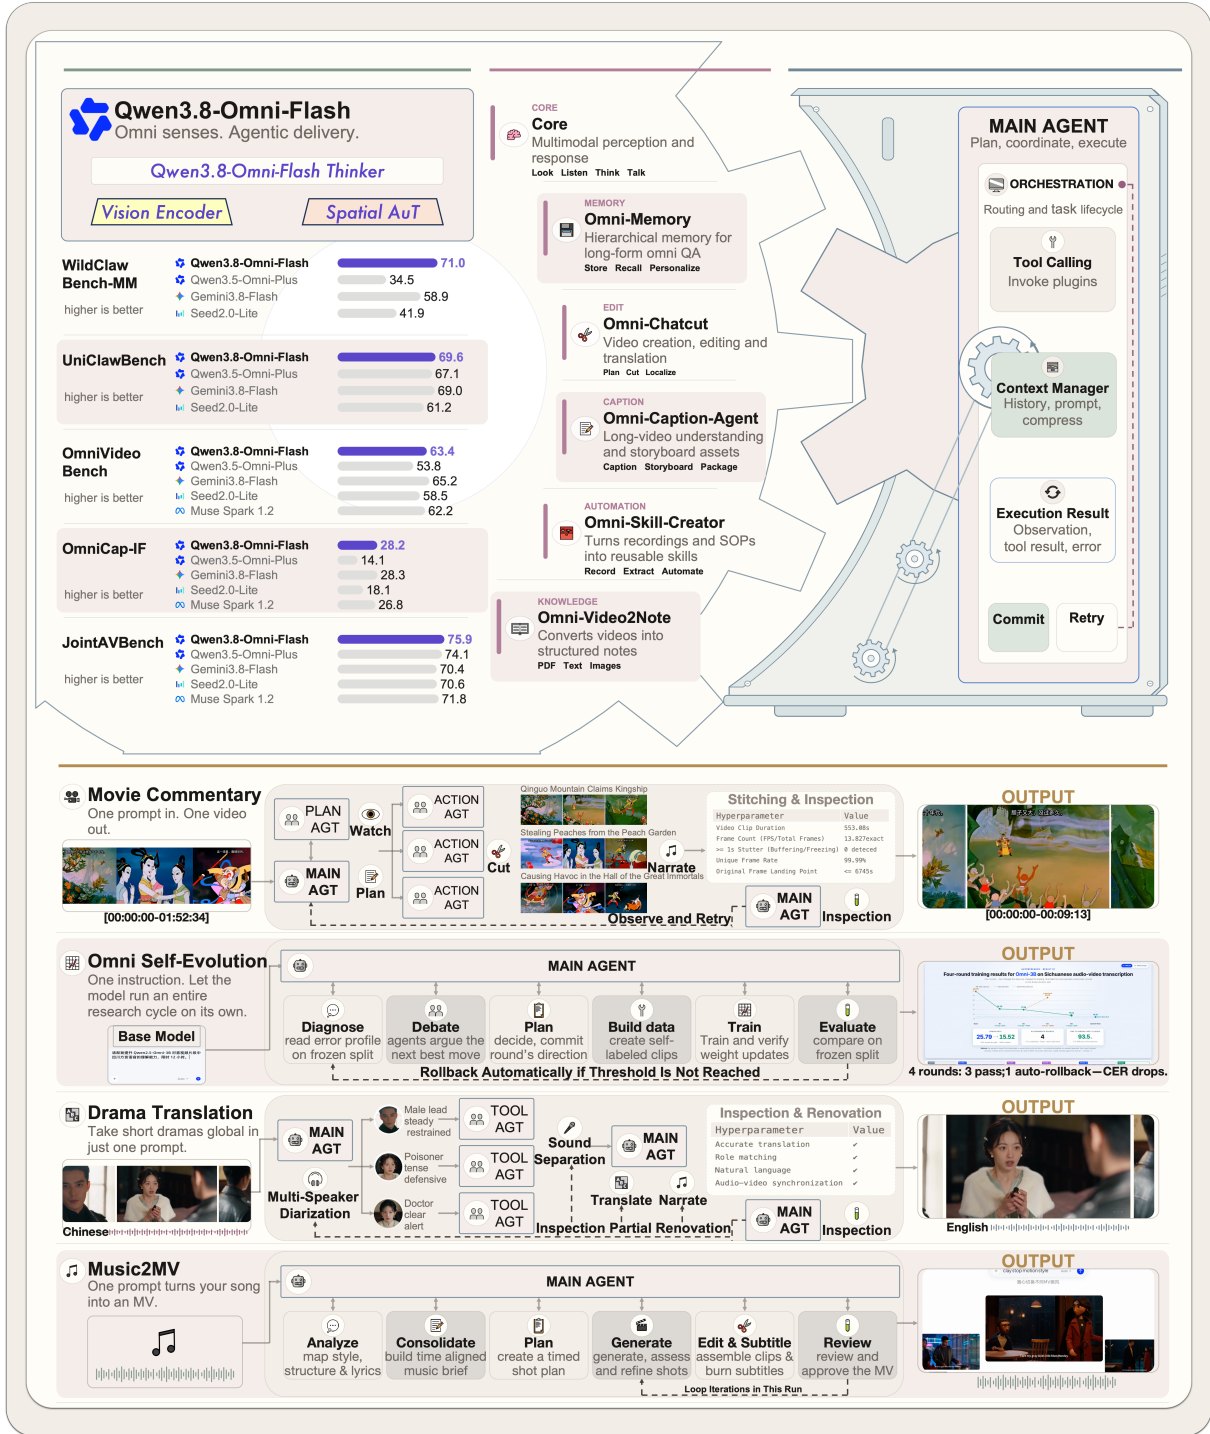


Figure 1: Qwen3.8-Omni-Flash is a unified end-to-end model capable of processing multiple modalities, such as text, audio, image and video, and generating real-time text or speech response. Based on these features, Qwen3.8-Omni-Flash supports a wide range of tasks, including but not limited to voice dialogue, video dialogue, and audio-visual tool use.

interfaces. Finally, we apply multi-teacher distillation to consolidate domain-specialized and effort-specialized policies into a unified model for agentic multimodal productivity.

Our primary objective for this generation of omni models is to improve agentic productivity. Achieving this objective requires addressing three key challenges: (i) video inputs incur substantial storage and transmission costs and require large token budgets, making long-form processing expensive in agentic workflows; (ii) most existing harnesses lack support for streaming audio and video inputs within the main model context; and (iii) productivity-oriented applications of omni models remain underexplored.

To address the first challenge, we develop modules for information abstraction and on-demand access to multimodal content. Specifically, *Omni-Caption* and *Omni-Video2Note* convert videos into detailed captions and structured textual summaries, respectively; *Omni-Memory* supports agentic lazy loading of audiovisual content; and *Omni-Skill-Creator* transforms video tutorials or SOP-style content into executable skills that can be invoked by agent harnesses. Together, these modules reduce the need for dense processing of entire audiovisual inputs when abstracted information or selective retrieval suffices. To address the second challenge, we integrate these modules into *Qwen-MM-Plugins*, which provides a lightweight interface through which existing agent harnesses can access audiovisual capabilities. To address the third challenge, the plugin includes ready-to-use productivity modules, such as *Omni-Chatcut*, supporting applications including long-form audiovisual translation, film narration, and music video generation from audio tracks. All components are released as open source in *Qwen-MM-Plugin*, and Qwen3.8-Omni-Flash can operate either as a native multimodal main agent or as a sub-agent that invokes these tools.

Critically, Qwen3.8-Omni-Flash supports sequences of up to one million tokens while maintaining text capabilities comparable to those of similarly sized text-only models and substantially improving omnimodal performance. Compared with its predecessor, Qwen3.5-Omni-Plus (Qwen Team, 2026c), it achieves an increase of more than 25% in the average score across 29 evaluations spanning audio reasoning, audiovisual reasoning, and audiovisual agent tasks. Estimated API input costs per hour of audio and audiovisual content are reduced by more than 98% and 93%, respectively.

2 Model Design

2.1 Architecture

Qwen3.8-Omni-Flash adopts the unified multimodal architecture, Thinker-Talker architecture, of the Qwen-Omni family (Xu et al., 2025a;b; Qwen Team, 2026c). Compared with Qwen3.5-Omni-Plus (Qwen Team, 2026c), Qwen3.8-Omni-Flash introduces several key improvements in scalability, alignment, and real-time interaction:

- The Thinker uses a hybrid sparse MoE language model to understand multimodal inputs and generate text for reasoning, dialogue, and tool use.
- A vision encoder, Spatial AuT encoder, and AuT encoder provide visual, spatial-audio, and general-audio representations, respectively. Their outputs are projected into the Thinker’s shared representation space.
- Audio, spatial audio, and video representations include explicit timing information, helping the Thinker connect audio and visual events and reason about them across long input sequences.

Backbone The Thinker builds on the hybrid sparse MoE language backbone of Qwen3.8-Next (Qwen Team, 2026a). Sparse expert activation increases model capacity while controlling the amount of feed-forward computation used by each token. For token mixing, the backbone combines Gated DeltaNet (GDN), which summarizes preceding context in a fixed-size recurrent state, with interleaved attention layers that retain direct access to context tokens.

The attention layers transition to Qwen Sparse Attention (QSA) through the warmup and sparse training stages. QSA uses a lightweight indexer to score compressed micro-block representations and select relevant context blocks, while core attention operates on the original tokens within the selected blocks. The resulting backbone combines recurrent processing with selective token-level retrieval over long multimodal sequences. Pretraining uses a native context window of 256K tokens throughout, followed by an extension to 1M tokens after post-training.

Multimodal Encoder The Thinker uses three perception encoders for visual, spatial-audio, and general-audio inputs. The vision encoder, adopted from Qwen3.8-Next (Qwen Team, 2026a), processes images and sampled video frames.

For audio understanding, Qwen3.8-Omni-Flash combines a general-purpose AuT encoder for acoustic and linguistic content with a dedicated Spatial AuT encoder for spatial cues. The general-purpose AuT encoder (Qwen Team, 2026c) uses a convolutional front end comprising four Conv2D blocks to downsample input acoustic features by a factor of 16, followed by temporal self-attention layers that produce contextualized audio representations. The encoder outputs tokens at 6.25 Hz, corresponding to approximately one token every 160 ms. AuT is pretrained on a sizable audio corpus, using transcriptions generated by a dedicated Qwen ASR model (Team, 2026) as supervision. The pretraining corpus covers more than 20 languages, with Chinese, English, and other languages represented in a ratio of 3.5:3.5:3.

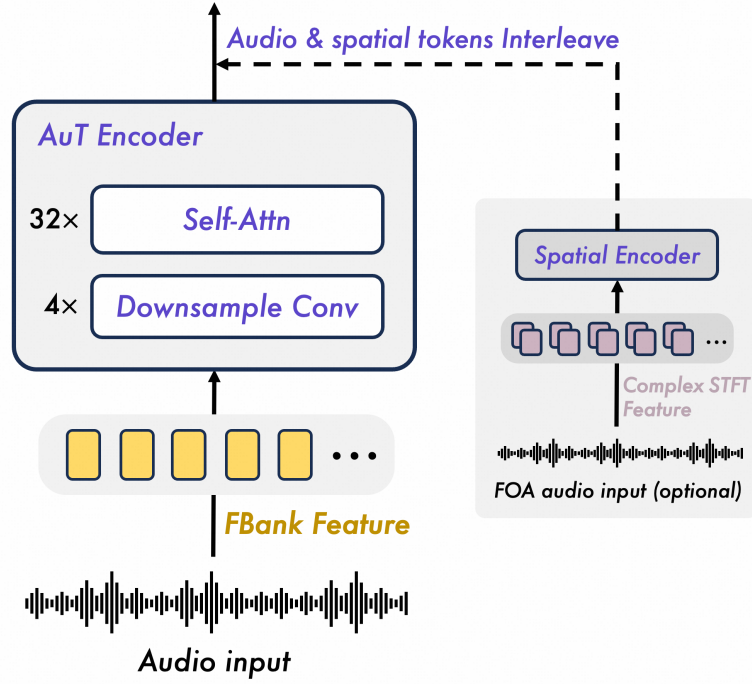


Figure 2: Overview of the audio encoders in Qwen3.8-Omni-Flash. The general AuT encoder extracts contextual audio representations at 6.25 Hz via convolutional downsampling and self-attention. A parallel Spatial AuT pathway processes multichannel spatial audio to capture directional and spatial cues.

Dynamic attention-window training supports both streaming inference with cached context and offline audio understanding.

For spatial audio inputs, Spatial AuT provides a parallel processing pathway. A spatial interface first represents multichannel audio in first-order ambisonics (FOA) format. Spatial AuT then processes the complex-valued short-time Fourier transform (STFT) of the FOA channels, retaining both real and imaginary components to preserve interchannel amplitude and phase relationships. These relationships provide spatial cues associated with source direction, distance, and motion. A convolutional front end, temporal self-attention layers, and an output projection transform the spectral features into spatial audio representations. Modality-specific adapters project the outputs of both audio encoders and the vision encoder into the language backbone’s shared representation space, and all three encoders are aligned with the backbone during stage S1.

2.2 Perception

The Thinker converts text, images, audio, spatial audio, and video into a unified token sequence. Text is tokenized with the Qwen3.8-Next byte-level byte-pair encoding tokenizer, which uses a vocabulary of approximately 250K tokens (Qwen Team, 2026a). Images and dynamically sampled video frames are processed by the vision encoder. General audio, including audio extracted from video, is resampled to 16 kHz and converted into a 128-channel mel-spectrogram using a 25 ms window and a 10 ms hop before being encoded by AuT. For multichannel audio, Spatial AuT produces a parallel spatial representation that complements the general audio representation from AuT. The resulting visual, audio, and spatial-audio representations are projected into the Thinker’s embedding space and arranged in temporal order for unified multimodal modeling. We retain explicit textual timestamps to expose the source timeline directly to the language backbone. The position IDs of spatial-audio embeddings are arranged analogously to those of visual patches at different spatial locations within a video frame: embeddings associated with the same temporal slice share a temporal index while retaining distinct spatial position indices. This layout preserves alignment with the audio stream while allowing the model to distinguish multiple spatial embeddings at each time step.

3 Pretraining

Qwen3.8-Omni-Flash is pre-trained on a diverse dataset that encompasses multiple languages and dialects as shown in Table 1 and modalities, including image–text, video–text, audio–text, video–audio, video–audio–text, and pure-text corpora. Following Qwen3.5-Omni-Plus (Qwen Team, 2026c), we employ a wider range of natural-language prompts to enhance both the generalization ability and instruction-following capabilities. To achieve robust performance across all modalities, our training strategy incorporates both unimodal and cross-modal data from the early pretraining stage.

Table 1: **Supported languages and dialects in Qwen3.8-Omni-Flash-Plus.**

Modality	# Varieties	Supported languages and dialects
Text	201	See Qwen3.5 for the complete list of supported languages.
Speech Input	113	74 languages: Afrikaans, Arabic, Asturian, Azerbaijani, Basque, Belarusian, Bengali, Bosnian, Bulgarian, Cantonese, Catalan, Cebuano, Chinese, Croatian, Czech, Danish, Dutch, English, Esperanto, Estonian, Filipino, Finnish, French, Galician, Georgian, German, Greek, Hebrew, Hindi, Hungarian, Icelandic, Indonesian, Interlingua, Italian, Japanese, Javanese, Kannada, Kazakh, Korean, Kyrgyz, Lingala, Latvian, Lithuanian, Macedonian, Malay, Malayalam, Maltese, Maori, Marathi, Mongolian, Norwegian Bokmål, Norwegian Nynorsk, Oriya, Persian, Polish, Portuguese, Punjabi, Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swahili, Swedish, Tajiki, Tamil, Telugu, Thai, Turkish, Ukrainian, Urdu, Uyghur, and Vietnamese. 39 Chinese dialects: Northeastern Mandarin, Guizhou dialect, Guangdong Cantonese, Henan dialect, Hong Kong Cantonese, Shanghaiese, Shaanxi dialect, Tianjin dialect, Taiwanese Mandarin, Yunnan dialect, Anhui dialect, Fujian dialect, Gansu dialect, Guangdong Mandarin, Hubei dialect, Hunan dialect, Jiangxi dialect, Shandong dialect, Shanxi dialect, Sichuanese, Guangxi dialect, Hainan dialect, Chongqing dialect, Changsha dialect, Hangzhou dialect, Hefei dialect, Yinchuan dialect, Zhengzhou dialect, Shenyang dialect, Wenzhou dialect, Wuhan dialect, Kunming dialect, Taiyuan dialect, Nanchang dialect, Jinan dialect, Lanzhou dialect, Nanjing dialect, Hakka, and Southern Min.
Speech Output	36	29 languages: Chinese, English, German, Italian, Portuguese, Spanish, Japanese, Korean, French, Russian, Thai, Indonesian, Arabic, Vietnamese, Turkish, Finnish, Polish, Hindi, Dutch, Czech, Urdu, Tagalog, Swedish, Danish, Hebrew, Icelandic, Malay, Norwegian, and Persian. 7 Chinese dialects: Sichuanese, Beijing dialect, Tianjin dialect, Nanjing dialect, Shaanxi dialect, Cantonese, and Southern Min.

We retain the temporal modeling strategy of Qwen3.5-Omni-Plus (Qwen Team, 2026c), including its audio-visual timestamp representation, without modification. In this generation, spatial audio is introduced as an additional input modality. Spatial AuT representations are temporally aligned with the existing audio and video representations, allowing spatial information to be incorporated into the unified multimodal sequence while preserving the established timestamp convention.

The pre-training of Qwen3.8-Omni-Flash is structured into four distinct stages, all using a native sequence length of 262,144 tokens. In the first stage, we freeze the language model parameters and focus on aligning the vision encoder, AuT, and Spatial AuT using image–text, monaural audio–text, and multichannel audio–text data. In the second stage, we unfreeze all parameters and train with a wider range of multimodal data for more comprehensive learning. In the third stage, we keep the backbone fixed and warm up the QSA indexer using supervision from dense attention. In the final stage, we enable QSA and jointly optimize the backbone and indexer to adapt the model to sparse attention patterns:

- (1) **Encoder Alignment Stage (S1):** During the initial pretraining phase, the LLM component of Qwen3.8-Omni-Flash is initialized with parameters from Qwen3.8-Next (Qwen Team, 2026a), while the vision encoder is adopted from Qwen3.5 and the audio encoders are initialized with AuT and Spatial AuT. The three encoders are trained separately on the fixed LLM, initially focusing on their respective adapters before training the encoders.
- (2) **General Stage (S2):** The second phase of pretraining utilizes a large-scale dataset containing approximately 2.5 trillion tokens, with the following distribution across modalities: text (1.1 trillion), audio (0.7 trillion), image (0.35 trillion), video (0.15 trillion), and video–audio (0.3

trillion). The audio data include both monaural and multichannel audio. All model parameters are unfrozen during this stage. The introduction of more diverse multimodal data and tasks enhances the model’s understanding and interaction capabilities in auditory, spatial-audio, visual, textual, and audio-visual information.

- (3) **QSA Warmup Stage (S3):** In the third phase, we keep the pretrained backbone fixed and train the QSA indexer using the full-attention distributions of the backbone as supervision. Dense attention remains active during this stage, allowing the indexer to learn block-level context selection before sparse attention is enabled.
- (4) **QSA Stage (S4):** In the final pretraining phase, we enable QSA in the corresponding attention layers and jointly train the backbone and indexer. This stage allows the model to adapt to sparse attention patterns while retaining its multimodal understanding and long-context capabilities.

4 Post-Training

The post-training of the Thinker follows a two-stage pipeline comprising *Multi-Teacher Distillation* and *Reinforcement Learning*. The pipeline is designed to consolidate heterogeneous capabilities into a unified model while mitigating cross-domain and cross-modal interference, and to further improve response quality and interaction robustness through reinforcement learning. The training data are serialized using the ChatML (OpenAI, 2022) format and cover text-only, visual, audio, and mixed-modality conversations.

- **Stage 1: Multi-Teacher Distillation.** We first construct a collection of domain-specialized teacher models, each initialized from the pre-trained Qwen3.8 base checkpoint and independently optimized through supervised fine-tuning (SFT) and reinforcement learning (RL). The specialists cover a broad range of capabilities, including general instruction following, foundational reasoning, coding, agentic tasks, visual understanding, and audio understanding. The specialist models are subsequently used to generate high-quality domain-specific training trajectories. These trajectories are combined into a unified multimodal training mixture and distilled into a single student model. This formulation allows each specialist to provide targeted supervision in its domain of expertise, while enabling the student to acquire these capabilities within a shared parameterization. Compared with directly fine-tuning the base model on a heterogeneous data mixture, specialist distillation provides stronger and more consistent supervision, reduces interference among modalities and task domains, and establishes a robust initial policy for the subsequent reinforcement-learning stage.
- **Stage 2: Reinforcement Learning.** Starting from the distilled checkpoint, we perform unified reinforcement learning across text, vision, audio, and mixed-modality tasks. Although multi-teacher distillation equips the model with strong individual capabilities, the resulting policy may still exhibit uneven response quality across input modalities and suboptimal behavior in real-world interactions. In particular, audio-conditioned queries remain more challenging than their text counterparts, while long conversations may expose issues such as unintended language switching, persona drift, and degradation in instruction following. To address these limitations, the RL task mixture jointly covers reasoning, coding, agentic execution, multimodal understanding, audio-conditioned dialogue, and multi-turn interaction scenarios. The reward signals evaluate both task-level correctness and interaction quality. In addition to rewarding accurate and helpful responses, the optimization encourages consistency across input modalities, natural responses to spoken queries, stable language and persona behavior, and reliable instruction following over extended conversational contexts. For long-horizon agentic tasks, rewards are determined by task outcomes and execution results rather than by the model’s self-reported completion. By jointly optimizing these objectives, the second stage transforms the collection of distilled specialist capabilities into a coherent policy. The resulting Thinker maintains strong performance across heterogeneous domains while providing more consistent audio-conditioned responses and more stable behavior in practical multi-turn interactions.

5 Omni for Agentic Applications

5.1 Long Video Understanding

Qwen3.8-Omni-Flash advances long-context audiovisual understanding across a range of capabilities, including active audiovisual perception, meeting understanding and follow-up task execution. These advances extend beyond longer temporal coverage to more precise evidence localization, deeper understanding, and more efficient execution.

Native Omni Agent for Long Video Conventional static approaches to long-video understanding feed all sampled frames and the accompanying audio in a single model invocation, even for videos lasting tens of minutes to several hours. Increasing video duration leads to approximately linear growth in token consumption and greater difficulty in reasoning over the full input. However, reasoning may require evidence from only a few minutes of the video. With native agentic capabilities, Qwen3.8-Omni-Flash plans its analysis based on the query and invokes tools to acquire relevant audio and visual evidence. Following a coarse-to-fine strategy, the model retrieves video and audio segments on demand through iterative tool calls. This enables more efficient use of the limited token budget. Qwen3.8-Omni-Flash can also parallelize audio and visual analysis by delegating tasks to multiple subagents as needed. This enables efficient analysis of videos spanning several hours within the limited context window of the main agent. By shifting long-video understanding from static processing to on-demand evidence gathering, native omni agent can improve accuracy while reducing token consumption.

Meeting Minutes for Multispeaker Multi-participant meetings are among the most complex audio-visual understanding scenarios: speakers take turns and overlap, while identities, references, and discussion topics continuously change. Traditional cascaded meeting analysis systems suffer from long and complex pipelines; even from the perspective of multi-speaker ASR alone, the sequential process of recognition, alignment, and diarization inevitably leads to severe error accumulation, further necessitating additional downstream models for content analysis. Qwen3.8-Omni-Flash jointly recognizes speakers across audio and video and natively supports up to one hour of audio-visual input. It can perform speaker segmentation, content transcription, and identity alignment end to end. Given a complete meeting video and a request, the model can map participant relationships, generate meeting minutes, identify action items, and analyze project risks, using visual information to resolve references and entity ambiguity in the audio. Combined with agents and tool use, it can also send emails, organize tasks, and even begin coding in response to meeting requirements, moving from understanding a meeting to acting on it.

5.2 Content Creation

Qwen3.8 Omni is taking audio-visual agents into a new stage: from understanding sounds and images to independently planning, calling tools, and delivering finished videos, bringing omnimodal intelligence into professional audio-visual content production workflows.

Music-to-MV We propose an agentic workflow for generating music videos from music tracks. Built on Qwen3.8-Omni-Flash and *Qwen-MM-Plugins*, it offers a scalable solution for independent musicians and creators. Creating visual content that complements a music track requires a comprehensive understanding of its lyrics, structure, and musical elements. With its strong music-understanding capabilities, Qwen3.8-Omni-Flash can analyze an input song and produce time-aligned lyric transcriptions, a global music caption, and localized descriptions of salient musical events organized along the song’s structural timeline. This musical evidence provides creative grounding for the agent to develop a narrative script and design individual shots. Qwen3.8-Omni-Flash can also review the generated shots for visual quality and correspondence with the creative plan. Together, Qwen3.8-Omni-Flash and *Qwen-MM-Plugins* form an integrated workflow for end-to-end music-to-video production.

Drama Translation Traditional video translation typically involves multiple stages, including speech transcription, text translation, dubbing, audio mixing, and post-production editing. Coordinating these stages across different tools increases system complexity and makes it difficult to maintain consistency in character voices, dialogue duration, and visual pacing. Built on Qwen3.8-Omni-Flash and *Qwen-MM-Plugins*, we develop an agentic workflow for short-drama translation, providing developers with a reference for designing automated video localization systems. Given a user request, the agent autonomously plans the localization process, selects and coordinates the required capabilities, and makes context-aware decisions throughout execution. It supports speaker-aware dialogue recognition, conversational translation, character-consistent voice cloning and dubbing, audio remixing, and quality assessment. By integrating these capabilities through autonomous planning and orchestration, the workflow enables the automated delivery of localized short dramas for international audiences.

Long-Form Movie Commentary For movies with runtimes of two to three hours, Qwen3.8-Omni-Flash combines multimodal understanding with long-horizon planning to generate commentary videos autonomously end-to-end. The model analyzes narrative structure, key plot turning points, and character arcs across the full runtime, using this global context to guide commentary generation. It further orchestrates synthesized narration, original film dialogue, on-screen visuals, and background music into a coherent audiovisual composition, interleaving commentary with selected dialogue excerpts to preserve narrative coherence and emotional immersion. By adapting narration pacing and audio levels to

the scene context, the model enables smooth transitions among commentary, original audio, and music, maintaining a balanced audio mix throughout the resulting video.

5.3 Video for Research, Learning, and Automation

Videos encode rich audiovisual information, yet relevant content is often dispersed across time, requiring repeated playback and manual navigation to locate and consolidate. Building on its omnimodal understanding capabilities, Qwen3.8-Omni-Flash transforms video content into structured knowledge artifacts, including interactive research reports, instructional notes, and reusable agent skills. These artifacts consolidate essential information while preserving visual evidence and procedural context, making the underlying knowledge more accessible to both human users and AI agents. This enables video content to support research, learning, and automated task execution.

Omni-Deep Research Qwen3.8-Omni-Flash supports video-centric omni-deep research, enabling in-depth investigation grounded in both video content and external knowledge. Given a video and a user query, the model analyzes the audiovisual content, identifies key research anchors such as claims, procedures, parameters, entities, and unresolved questions, and retrieves relevant information from web pages, documents, images, and other videos. It then integrates and cross-checks these multimodal sources with the original video, and organizes the results into an interactive HTML report that interleaves text with visual and video evidence and links research findings back to relevant moments in the source video. This capability is particularly useful for understanding complex concepts, verifying claims, reproducing procedures, diagnosing practical problems, and supporting informed decisions.

Video-to-Note Built on the powerful omni-modal understanding capabilities of Qwen3.8-Omni-Flash, we developed Omni Video2Note, an agentic tool designed to help users extract information efficiently from large collections of tutorial videos, making it well suited for a wide range of instructional scenarios, including STEM education, everyday how-to content, and medical or caregiving training. By leveraging omni-modal inputs, it can reconstruct the instructional flow of a video and surface the most important points. For steps that benefit from visual context, it automatically selects the most informative frames from the source video. It can also proactively adjust the crop region to improve visual clarity and readability.

Skill Creator Video demonstrations convey both procedural knowledge and domain-specific expertise. To translate this knowledge into executable agent capabilities, we introduce Omni Skill Creator, an open-source component of *Qwen-MM-Plugins* that constructs reusable skills from omnimodal content. The system extracts standard operating procedures (SOPs) from task demonstrations and distills tool usage, decision criteria, and key insights from expert instruction. The resulting skills undergo verification and evaluation, enabling knowledge captured in a single demonstration to be transformed into a reusable and shareable capability for automated task execution.

5.4 Omni-Autoresearch

With Qwen3.8-Omni-Flash, we explore autoresearch: using a native omni model’s multimodal understanding to drive model development autonomously. We tasked it with improving Qwen2.5-Omni-3B (Xu et al., 2025a)’s Sichuan dialect speech recognition within 12 hours and delivering a usable model—a practical test of automating the expertise-intensive work needed to adapt smaller models for cost-sensitive applications. Qwen3.8-Omni-Flash independently selected the WenetSpeech-Chuan evaluation set, fixed the evaluation criteria, and established a baseline. It then listened directly to audio samples, diagnosed recognition errors, and constructed targeted training data. Across four rounds of experiments, it created 3,413 training examples and refined its approach using evaluation feedback, retaining effective changes and rolling back unsuccessful attempts. The smaller model’s character error rate fell from 25.79% to 15.30% on the same evaluation set, a relative reduction of approximately 40.7%. This experiment demonstrates how native omni models can connect multimodal perception, experimental planning, and iterative training in an autonomous research workflow, helping smaller models acquire specialized capabilities for real-world applications.

6 Evaluation

We organize the evaluation around the capabilities needed for native omni agents. Section 6.1 establishes the model’s general and modality-specific capabilities, spanning text, vision, audio, and audio-visual tasks. These include perception and reasoning as well as coding, office work, and visual agent tasks.

Section 6.2 then examines omni agentic capabilities through multimodal task execution and agentic audio-visual evidence gathering. Together, the evaluations assess the model’s capability profile, its progress over Qwen3.5-Omni-Plus (Qwen Team, 2026c), and the effect of agentic execution on understanding accuracy and token consumption.

Evaluation setup. For text and vision tasks, we compare against Qwen3.8-Flash (Qiu et al., 2026), Qwen3.8-27B (Qwen Team, 2026d), Qwen3.7-Plus (Qwen Team, 2026b), and the additional baselines listed in the corresponding tables. For audio and audio-visual tasks, we include Qwen3.5-Omni-Plus (Qwen Team, 2026c), Gemini 3.8 Flash (Google, 2026), Seed 2.0 Lite (Seed, 2026)³, and Muse Spark 1.2 (Meta, 2026) where results are available. Benchmark-specific harnesses and scoring conventions are described in the table notes. Results involving tools reflect the model together with the stated execution setting. The capability groups below describe task domains rather than a distinction between tool-free and tool-assisted inference. We separately compare direct input interpretation with agentic evidence gathering in Section 6.2.2. Bold values indicate the best result among the listed models for each metric, including ties; – denotes an unavailable or inapplicable result.

6.1 General and Multimodal Capabilities

We first examine four complementary capability domains. Text and visual evaluations cover both general reasoning and domain-specific agent tasks, while audio and audio-visual evaluations assess recognition, understanding, reasoning, and interaction through textual responses.

6.1.1 Text Capabilities

We evaluate software engineering, repository-level code generation, and office-oriented agent tasks using DeepSWE 1.1 (Datacurve, 2026), SWE-bench Pro (Deng et al., 2025), SWE-bench Multilingual (Khandpur et al., 2025), NL2Repo-Bench (Ding et al., 2025), and CoWorkBench (Qiu et al., 2026). General text capabilities are assessed using IFBench (Pyatkin et al., 2025), GPQA Diamond (Rein et al., 2023), HLE (Phan et al., 2025), and LiveCodeBench v6 (Jain et al., 2024), covering instruction following, scientific and multidisciplinary reasoning, and competitive coding.

Table 2: Text capability evaluation of Qwen3.8-Omni-Flash and baseline models. The highest scores are shown in bold.

Benchmark	Qwen3.8-Omni-Flash	Qwen3.8-Flash	Qwen3.8-27B	Qwen3.7-Plus	DeepSeek-V4-Flash-0731	Claude-Opus-4.6 (Max)
<i>Coding and Agent</i>						
DeepSWE 1.1	57.8	58.7	42.2	16.5	54.4	–
SWE-bench Pro	63.3	62.5	61.7	55.8	56.0	53.4
SWE-bench Multilingual	80.5	81.0	73.8	75.8	–	77.5
NL2Repo-Bench	48.9	48.1	42.3	41.1	54.2	47.6
CoWorkBench	75.3	73.9	70.7	65.1	45.1	68.2
<i>General Text Capabilities</i>						
IFBench	81.5	81.3	79.5	79.1	79.2	62.5
GPQA Diamond	91.0	91.7	89.2	90.3	90.8	91.3
HLE	36.5	35.9	30.8	34.7	33.8	40.0
LiveCodeBench v6	92.6	91.9	90.3	89.6	90.6	88.8

¹ DeepSWE 1.1: evaluated with the Claude Code and mini-SWE-agent harnesses, temperature = 1.0, top_p = 0.95, and a 256K context window. We report the highest score across the two harnesses; notably, Qwen3.8-Flash performs best on mini-SWE-agent.

² SWE-bench Pro: except for Claude-Opus-4.6 (Max), for which we report the officially published score, all models are evaluated with the Claude Code harness, temperature = 1.0, top_p = 0.95, and a 256K context window. Problematic tasks were corrected, and all models evaluated with our harness were re-evaluated on the refined benchmark.

³ SWE-bench Multilingual: evaluated with the mini-SWE-agent harness, temperature = 1.0, top_p = 0.95, and a 256K context window.

⁴ NL2Repo-Bench: evaluated with the Claude Code harness. To prevent reward hacking, we disable Bash commands that attempt to access the specific repository, such as `pip download`, `pip install`, and `git clone`.

⁵ CoWorkBench: an in-house cowork benchmark for evaluating long-horizon office and productivity agent tasks across computer science, finance, law, medical, and other productivity domains.

⁶ HLE: judged by GPT-4o.

³We use the API model `doubao-seed-2-0-lite-260428`.

Table 2 shows that Qwen3.8-Omni-Flash retains competitive text performance relative to Qwen3.8-Flash. It scores 63.3 on SWE-bench Pro, 48.9 on NL2Repo-Bench, and 75.3 on CoWorkBench, compared with 62.5, 48.1, and 73.9 for Qwen3.8-Flash. On DeepSWE 1.1 and SWE-bench Multilingual, it scores 57.8 and 80.5, respectively, slightly below 58.7 and 81.0. These results indicate that the model’s multimodal capabilities coexist with strong coding and agent execution capabilities.

The same pattern extends to general text tasks: Qwen3.8-Omni-Flash achieves 81.5 on IFBench and 92.6 on LiveCodeBench v6, the highest scores among the listed models, while obtaining 91.0 on GPQA Diamond and 36.5 on HLE. Performance varies across tasks rather than improving uniformly; for example, Claude-Opus-4.6 (Max) leads on HLE with 40.0.

6.1.2 Visual Capabilities

We assess visual agent capabilities with ClawEval-MM (Ye et al., 2026), AndroidWorld (Rawles et al., 2025), and Vision2Web (He et al., 2026b). General visual evaluation covers embodied reasoning with ERQA (Team, 2025), long-video understanding with LVBench (Wang et al., 2024b), real-world perception with RealWorldQA (xAI, 2024), and mathematical and chart reasoning with MathVision (Wang et al., 2024a) and CharXiv (RQ) (Wang et al., 2024c). For the latter two benchmarks, we report both the default setting and the additional CI setting.

Table 3: Visual capability evaluation of Qwen3.8-Omni-Flash and baseline models. The highest scores are shown in bold.

Benchmark	Qwen3.8-Omni-Flash	Qwen3.8-Flash	Qwen3.8-27B	Qwen3.7-Plus	Claude-Opus-4.6 (Max)
<i>Agentic Vision Intelligence</i>					
ClawEval-MM	60.4 61.9	64.4 60.4	57.4 56.9	57.4 60.1	52.5 54.7
AndroidWorld	87.1	84.5	81.9	81.0	62.0
Vision2Web	62.9	64.0	62.9	42.1	–
<i>General Vision Capabilities</i>					
ERQA	71.0	72.3	65.5	69.8	40.8
LVBench	76.9	76.6	72.4	76.2	63.0
RealWorldQA	87.7	88.5	85.9	86.9	73.9
MathVision	91.8	90.6	90.0	90.3	65.5
w/ CI	96.2	95.7	94.6	88.4	–
CharXiv (RQ)	83.5	84.6	83.7	85.8	66.0
w/ CI	91.4	90.6	90.2	85.9	–

¹ ClawEval-MM results are reported as Pass@3 | Average. Pass@3 is the percentage of tasks passed in at least one of three trials; Average is the mean score across the three trials.

² Vision2Web: scores are averaged over the frontend, webpage, and website categories, using Claude Code and judged by gpt-5.4-2026-03-05.

³ MathVision and CharXiv (RQ): the first row reports results without CI, and the row labeled w/ CI reports results with CI. A small number of incorrect MathVision ground-truth annotations were manually corrected. Our model uses a fixed prompt requesting step-by-step reasoning and a final answer in \boxed{ }. For other models, we report the higher score from runs with and without this formatting instruction.

As shown in Table 3, Qwen3.8-Omni-Flash achieves 87.1 on AndroidWorld, exceeding Qwen3.8-Flash’s 84.5. On ClawEval-MM, it obtains a higher average score (61.9 vs. 60.4), but a lower Pass@3 (60.4 vs. 64.4), illustrating the importance of distinguishing the two metrics. Its Vision2Web score of 62.9 is close to Qwen3.8-Flash’s 64.0.

For general visual capabilities, Qwen3.8-Omni-Flash achieves 76.9 on LVBench and 91.8 on MathVision in the default setting, the best results among the listed models. With CI, MathVision improves to 96.2 and CharXiv (RQ) improves from 83.5 to 91.4. Meanwhile, ERQA and RealWorldQA remain slightly below Qwen3.8-Flash. Overall, the model combines competitive visual perception with strong performance on selected visual agent and tool-assisted reasoning tasks.

6.1.3 Audio Capabilities

Our audio evaluation covers multi-speaker automatic speech recognition (ASR), general ASR, multilingual recognition, speech-to-text translation (S2TT), and instruction following, audio grounding and understanding, long-audio reasoning, music understanding, and audio-conditioned interaction. Multi-speaker ASR is assessed on AliMeeting Test (Yu et al., 2022), AISHELL-4 (Fu et al., 2021), MagicData-RAMC (Yang

et al., 2022), and MLC-SLM (en) (Mu et al., 2025), using DER and cpWER. WenetSpeech (Zhang et al., 2022) complements these tasks with the Net and Meeting ASR subsets. The multilingual evaluation includes FLEURS-ASR and FLEURS-S2TT (Conneau et al., 2022), covering the 60 languages listed in Table 4, together with OmniLingua-LongAudioASR, OmniLingua-AudioMaxIfe, and OmniLingua-MultiSpeaker from Omnilingua-Bench (Alibaba Token Hub, Alibaba Group, 2026), and MuLA-Bench (Yang et al., 2026). These additional benchmarks assess multilingual long-form transcription, spoken instruction following, multi-speaker transcription, and long-form audio understanding, respectively. We assess grounding with SpotSoundBench (Sun et al., 2026), general audio understanding with MMAU (Sakshi et al., 2024), MMAR (Ma et al., 2025a), and MMSU (Wang et al., 2025a), and long-audio reasoning with LongAudioSpan (Huang et al., 2026), Vox-Infinity (Cheng et al., 2026) and LAMAR-Bench (Wang et al., 2026a). We further use MuchoMusic-RUL (Zang et al., 2025), HumMusQA (Weck et al., 2026), and MusTBench (Kwon et al., 2026) for music understanding, and Audio MultiChallenge (Gosai et al., 2026), WildSpeech (Zhang et al., 2025), and VoiceBench (Chen et al., 2024) for audio-conditioned interaction. All results in this subsection concern textual outputs from audio inputs.

Table 4: Audio capability evaluation of Qwen3.8-Omni-Flash and baseline models. The best scores are shown in bold.

Benchmark	Qwen3.8-Omni-Flash	Qwen3.5-Omni-Plus	Gemini 3.8 Flash	Seed 2.0 Lite	Muse Spark 1.2
<i>Multi-Speaker ASR & ASR</i>					
AliMeeting Test	3.4 17.2	88.1 89.6	72.6 53.1	75.1 76.1	93.7 92.7
AISHELL-4	2.8 11.2	100.0 100.0	66.4 56.9	64.8 64.2	91.3 86.0
MagicData-RAMC	5.7 14.1	98.4 97.1	67.9 33.8	43.4 35.1	82.1 75.3
MLC-SLM (en)	4.0 14.2	68.6 63.9	60.8 26.6	40.4 45.5	74.3 52.9
WenetSpeech (Net)	4.8	3.7	14.2	4.3	68.2
WenetSpeech (Meeting)	4.6	4.8	16.7	4.7	42.6
<i>Multilingual</i>					
FLEURS-ASR	9.3	7.2	7.9	32.1	23.6
FLEURS-S2TT	31.8	32.2	33.0	24.8	28.8
OmniLingua-LongAudioASR	95.56 9.27	94.07 6.89	85.19 12.87	97.78 34.06	97.78 84.41
MuLA-Bench	72.60	61.00	73.43	58.06	34.04
OmniLingua-AudioMaxIfe	86.50	83.10	87.90	60.70	82.20
OmniLingua-MultiSpeaker	100.00 43.25 34.97 20.15	88.33 84.46 50.73 47.61	97.00 129.03 44.58 71.02	88.67 99.28 43.44 50.42	98.67 105.83 77.19 74.05
<i>Audio Grounding</i>					
SpotSoundBench	67.2	64.2	39.7	59.6	16.9
<i>Audio Understanding</i>					
MMAU	81.8	81.9	76.9	77.2	63.5
MMAR	79.8	79.8	78.5	77.7	67.3
MMSU	82.1	83.0	83.3	80.2	59.9
<i>Long Audio Reasoning</i>					
LongAudioSpan	82.7 71.8 48.2	74.4 49.8 45.1	79.3 65.5 64.6	—	—
Vox-Infinity	74.7 68.3 60.8	56.8 64.6 58.1	69.2 58.4 64.2	69.9 69.3 59.1	69.3 63.9 48.1
LAMAR-Bench	77.8 62.2 85.3	64.1 21.6 54.3	71.1 45.5 71.2	43.4 9.3 58.2	34.1 12.1 33.4
<i>Music Understanding</i>					
MuchoMusic-RUL	72.6	71.6	53.7	61.7	40.1
HumMusQA	75.8	75.5	71.2	66.0	63.3
MusTBench	50.6	49.1	40.3	44.0	29.4
<i>Audio Interaction</i>					
Audio MultiChallenge	71.5	57.6	71.9	63.4	57.9
WildSpeech	74.3	75.7	76.4	74.5	73.4
VoiceBench	91.6	92.9	92.3	84.1	79.8

¹ AliMeeting Test, AISHELL-4, MagicData-RAMC, and MLC-SLM (en) results are reported as DER | cpWER (lower is better for both metrics). WenetSpeech and FLEURS-ASR results are reported as WER (lower is better); FLEURS-S2TT results are reported as BLEU (higher is better). For audio understanding, music, and interaction scores, higher is better.

² FLEURS: ASR and S2TT evaluation results both cover the following 60 languages: Chinese (Mandarin), English, Cantonese, Arabic, German, French, Spanish, Portuguese, Indonesian, Italian, Korean, Russian, Thai, Vietnamese, Japanese, Turkish, Hindi, Malay, Dutch, Urdu, Norwegian, Swedish, Danish, Hebrew, Finnish, Polish, Icelandic, Czech, Filipino, Persian, Greek, Afrikaans, Asturian, Belarusian, Bulgarian, Bengali, Bosnian, Catalan, Cebuano, Estonian, Galician, Gujarati, Croatian, Hungarian, Javanese, Kazakh, Kannada, Kyrgyz, Latvian, Macedonian, Malayalam, Marathi, Punjabi, Romanian, Slovak, Slovenian, Swahili, Tajik, Azerbaijani, and Ukrainian.

³ OmniLingua-LongAudioASR results are reported as success rate (↑) | WER (↓), both in percent.

⁴ MuLA-Bench and OmniLingua-AudioMaxIfe: higher scores are better.

⁵ OmniLingua-MultiSpeaker: each cell reports success rate (↑) | tcpWER (↓) on the first line and cpWER (↓) | DER (↓) on the second line. All four metrics are in percent; the best value for each metric among the listed models is shown in bold.

⁶ LongAudioSpan results are reported as Accuracy | Rubric | Chain; the highest score for each metric is shown in bold.

⁷ Vox-Infinity results are reported as Ultra Multi-Turn | Personal Monologues | Beyond-Semanti; the highest score for each metric is shown in bold.

⁸ LAMAR-bench results are reported as Track A | Track B | Track C; the highest score for each metric is shown in bold.

Multi-speaker recognition and audio understanding. The largest improvements over Qwen3.5-Omni-Plus occur in multi-speaker ASR. On AliMeeting Test, DER and cpWER decrease from 88.1 and 89.6 to 3.4 and 17.2, respectively. Qwen3.8-Omni-Flash also achieves the lowest values for both metrics on AISHELL-4, MagicData-RAMC, and MLC-SLM (en). In audio grounding, SpotSoundBench improves from 64.2 to 67.2. On LongAudioSpan, Accuracy increases from 74.4 to 82.7 and Rubric from 49.8 to 71.8, although the Chain score of 48.2 remains below Gemini 3.8 Flash’s 64.6. The model also leads the listed baselines on MuchoMusic-RUL, HumMusQA, and MusTBench, with scores of 72.6, 75.8, and 50.6, respectively.

Multilingual capabilities. The expanded multilingual evaluation reveals improvements in long-form understanding, instruction following, and multi-speaker transcription over Qwen3.5-Omni-Plus. On MuLA-Bench, Qwen3.8-Omni-Flash improves from 61.00 to 72.60, close to Gemini 3.8 Flash’s 73.43. OmniLingua-AudioMaxIfe increases from 83.10 to 86.50, compared with 87.90 for Gemini 3.8 Flash. On OmniLingua-MultiSpeaker, Qwen3.8-Omni-Flash achieves a 100.00% success rate and the lowest tcpWER, cpWER, and DER among the listed models, at 43.25%, 34.97%, and 20.15%, respectively. Recognition and translation remain more mixed. On OmniLingua-LongAudioASR, success rate improves from 94.07% to 95.56%, while WER increases from 6.89% to 9.27%. FLEURS-ASR likewise yields a higher error rate of 9.3 than Qwen3.5-Omni-Plus (7.2) and Gemini 3.8 Flash (7.9), and FLEURS-S2TT scores 31.8 compared with 32.2 and 33.0. These results distinguish gains in multilingual understanding and multi-speaker processing from the remaining gaps in general transcription and translation.

General ASR and interaction. Qwen3.8-Omni-Flash obtains the lowest WenetSpeech (Meeting) error rate of 4.6, while its WenetSpeech (Net) error rate of 4.8 remains above Qwen3.5-Omni-Plus’s 3.7. Audio MultiChallenge improves from 57.6 to 71.5 over the previous generation, whereas VoiceBench and WildSpeech remain below both Qwen3.5-Omni-Plus and Gemini 3.8 Flash.

6.1.4 Audio-Visual Capabilities

Table 5: Audio-visual capability evaluation of Qwen3.8-Omni-Flash and baseline models. The highest scores are shown in bold.

Benchmark	Qwen3.8-Omni-Flash	Qwen3.5-Omni-Plus	Gemini 3.8 Flash	Seed 2.0 Lite	Muse Spark 1.2
<i>Audio-Visual Understanding</i>					
DailyOmni	85.1	85.1	84.0	81.4	79.6
WorldSense	68.5	63.9	69.6	67.3	65.0
AVUT	86.6	85.9	88.0	81.5	82.4
JoinAVBench	75.9	74.1	70.4	70.6	71.8
AVSpeaker	77.2	71.1	83.9	75.8	69.9
<i>Audio-Visual Reasoning</i>					
OmniVideoBench	63.4	53.8	65.2	58.5	62.2
Video-MME-v2	65.0	47.9	71.0	64.9	–
MMOU	78.8	68.7	84.5	67.0	78.8
<i>Long Audio-Visual Reasoning</i>					
LVOmniBench	63.3	53.2	70.7	–	–
<i>Audio-Visual Caption</i>					
OmniCloze	63.2	64.2	60.9	56.3	65.3
OmniCap-IF	80.6 28.2	72.1 14.1	81.9 28.3	74.6 18.1	77.9 26.8
<i>Audio-Visual Interaction</i>					
QIVD	69.6	65.6	69.1	62.0	62.0
OmniVChat-Bench	89.0	52.1	65.6	45.2	69.8
Omni2Web	56.7 51.6	29.6 49.1	57.0 50.8	28.3 46.5	35.2 27.6
ODUBench	91.64 89.57	74.69 69.62	72.06 66.38	77.28 67.87	76.87 71.28
ProactiveVideoQA	61.5	35.1	58.0	68.3	63.6
StreamingBench	80.8	57.1	79.9	77.2	77.8
<i>Audio-Visual Spatial Intelligence</i>					
OmniEchoBench	43.9	23.3	32.0	28.3	31.3

¹ ODUBench results are reported as Audio | VA; the highest score for each setting is shown in bold.

² OmniCap-IF results are reported as CSR | ISR; the highest score for each metric is shown in bold.

³ Omni2Web results are reported as Track A | Track B; the highest score for each track is shown in bold.

We evaluate joint audio-visual understanding, reasoning, captioning, and interaction using the benchmarks in Table 5. The suite includes DailyOmni (Zhou et al., 2025), WorldSense (Hong et al., 2025), AVUT (Yang et al., 2025), AVSpeaker (Nguyen et al., 2025), JoinAVBench (Chao et al., 2025); OmniVideoBench (Li et al., 2025), Video-MME-v2 (Fu et al., 2026), MMOU (Goel et al., 2026), and LVOmniBench (Tao et al., 2026) for reasoning over video; OmniCloze (Ma et al., 2025b) and OmniCap-IF (Wang et al., 2026b) for captioning; and QIVD (Pourreza et al., 2025), ODUBench (Chen et al., 2026a), ProactiveVideoQA (Wang et al., 2025b), StreamingBench (Lin et al., 2024), OmniVChat-Bench (He et al., 2026a), and Omni2Web (Han et al., 2026) for interaction; OmniEchoBench (Liu et al., 2026) for audiovisual spatial intelligence. The video-reasoning results provide the reference setting for the agentic comparison in Section 6.2.2.

Compared with Qwen3.5-Omni-Plus, Qwen3.8-Omni-Flash improves on OmniVideoBench from 53.8 to 63.4, Video-MME-v2 from 47.9 to 65.0, and LVOmniBench from 53.2 to 63.3. These results show stronger joint audio-visual performance across the evaluated tasks. Gemini 3.8 Flash nevertheless retains higher scores on the three video-reasoning benchmarks above, motivating the investigation of agentic inference rather than relying solely on direct input interpretation. Captioning and interaction also show substantial, though task-dependent, gains. On OmniCap-IF, CSR and ISR increase from 72.1 and 14.1 to 80.6 and 28.2, approaching Gemini 3.8 Flash’s 81.9 and 28.3. StreamingBench improves from 57.1 to 80.8, and ProactiveVideoQA from 35.1 to 61.5. Qwen3.8-Omni-Flash achieves the highest listed QIVD score of 69.6 and ties the previous generation on OmniVChat-Bench at 89.0. On Omni2Web, it scores 56.7 on Track A and 51.6 on Track B, compared with 29.6 and 49.1 previously. It also improves on both ODUBench settings significantly. In contrast, Seed 2.0 Lite remains ahead on ProactiveVideoQA. Beyond these tasks, we extend Qwen3.8-Omni-Flash with omni-spatial intelligence, with its OmniEchoBench score increasing from 23.3 to 41.7.

6.2 Omni Agentic Capabilities

Building on these capability-specific evaluations, we focus on agent workflows that combine multimodal evidence with task-directed execution. We first evaluate multimodal tool use and web-search tasks, and then study whether an agent can improve audio-visual understanding by actively locating and verifying evidence. This section complements the text and visual agent tasks above by focusing on omni task execution and agentic perception.

6.2.1 Multimodal Agent Benchmarks

WildClawBench-MM (Ding et al., 2026), UniClawBench (Chen et al., 2026b), and AgenticVBench (Cao et al., 2026) assess multimodal tool use, while OmniGAIA (Li et al., 2026) assesses tasks involving web search. WildClawBench-MM is restricted to WildClawBench tasks that involve images, video, or audio. WildClawBench-MM and AgenticVBench use Claude Code, UniClawBench uses OpenClaw, and OmniGAIA is evaluated without an external agent harness. These are distinct execution settings rather than a single shared harness.

Table 6: **Omni agentic performance of Qwen3.8-Omni-Flash and baseline models. The highest scores are shown in bold.**

Benchmark	Qwen3.8-Omni-Flash	Qwen3.5-Omni-Plus	Gemini 3.8 Flash	Seed 2.0 Lite
WildClawBench-MM	71.0	34.5	58.9	41.9
UniClawBench	69.6	67.1	69.0	61.2
AgenticVBench	36.8	14.5	45.0	10.0
OmniGAIA	74.0	57.2	78.6	64.4

¹ WildClawBench-MM: evaluated with Claude Code on the subset of WildClawBench tasks involving images, video, or audio.

² UniClawBench: evaluated with OpenClaw.

³ AgenticVBench: evaluated with Claude Code.

⁴ OmniGAIA: evaluated without an external agent harness.

Table 6 shows improvements over Qwen3.5-Omni-Plus on all four benchmarks. WildClawBench-MM increases from 34.5 to 71.0, AgenticVBench from 14.5 to 36.8, and OmniGAIA from 57.2 to 74.0, corresponding to gains of 36.5, 22.3, and 16.8 points. UniClawBench improves from 67.1 to 69.6. Qwen3.8-Omni-Flash leads the listed models on WildClawBench-MM and UniClawBench; Gemini 3.8 Flash leads on AgenticVBench and OmniGAIA with 45.0 and 78.6. The comparison demonstrates stronger multimodal agent execution than the previous generation while identifying remaining gaps relative to other models.

6.2.2 Agentic Omni Understanding

Long audio-visual inputs often distribute relevant evidence across multiple segments. We compare two settings on OmniVideoBench, Video-MME-v2, and LVOmniBench: **Static**, in which the model directly interprets the input, and **Qwen Code**, in which an agent plans its approach, invokes tools, and iteratively locates and verifies relevant evidence. We apply both settings to Qwen3.8-Omni-Flash and Gemini 3.8 Flash to examine how agentic execution changes each model’s performance.

Table 7: Agentic omni understanding performance under Static and Qwen Code settings. The highest scores are shown in bold.

Benchmark	Qwen3.8-Omni-Flash (Static)	Qwen3.8-Omni-Flash (Qwen Code)	Gemini 3.8 Flash (Static)	Gemini 3.8 Flash (Qwen Code)
OmniVideoBench	63.4	67.8	65.2	70.1
Video-MME-v2	65.0	71.3	71.0	72.7
LVOmniBench	63.3	73.6	70.7	70.7

¹ Static denotes direct interpretation of the input. Qwen Code denotes an agentic setting in which the model uses Qwen Code to plan its approach, call tools, and progressively locate and verify evidence.

Table 7 shows that Qwen3.8-Omni-Flash benefits from agentic execution on all three benchmarks: OmniVideoBench improves from 63.4 to 67.8, Video-MME-v2 from 65.0 to 71.3, and LVOmniBench from 63.3 to 73.6. The largest gain is on LVOmniBench, where the model moves from 7.4 points below Gemini 3.8 Flash in the Static setting to 2.9 points above it in the Qwen Code setting. Gemini 3.8 Flash also benefits on OmniVideoBench and Video-MME-v2, and retains the highest agentic scores on those two tasks. Thus, the benefit of agentic evidence gathering depends on both the model and the task.

Token efficiency. On OmniVideoBench, agentic understanding improves accuracy while reducing reported token consumption per query from 145,736 to 79,117, a reduction of approximately 45.7% (Table 8). The agentic mode preserves context across turns. This result shows an improved accuracy–token trade-off in the evaluated setting; it does not establish a corresponding reduction in end-to-end latency or monetary cost.

Table 8: Accuracy and token consumption of Qwen3.8-Omni-Flash on OmniVideoBench under Static and agentic understanding settings.

Metric	Static	Qwen Code
Accuracy (↑)	63.4	67.8
Tokens per query (↓)	145,736	79,117

¹ Agentic understanding preserves context across turns.

7 Realtime Interaction

Realtime omni-modal interaction requires a careful balance between responsiveness, speech naturalness, and agentic functionality. To address these challenges, we enhance the Talker module to generate more expressive and realistic spoken responses under stringent latency constraints, design an efficient inference pipeline to support low-latency realtime generation, and develop *Qwen-Live-Harness* to extend Qwen3.8-Omni-Flash-Realtime to practical live interaction scenarios with asynchronous tool use, proactive interaction, and persistent memory. Together, as shown in Figure 3, these components form a unified framework for realtime omni-modal applications.

7.1 Talker

Inherited from Qwen3.5-Omni-Plus (Qwen Team, 2026c), Talker operates on Residual Vector Quantization (RVQ) tokens and employs a Multi-Token Prediction (MTP) module to model residual codebooks, ensuring precise control over acoustic details. In addition, we design a dedicated system prompt to specify target voice characteristics and incorporate ARIA for streaming speech generation. Furthermore, an upsampling pathway is integrated into the causal Code2Wav decoder, elevating waveform reconstruction from 24 kHz to 48 kHz and substantially improving high-frequency fidelity.

We employ a five-stage training pipeline to enable Talker to adapt to the rich contextual representations from Thinker and generate natural spoken responses. In the initial pre-training stage, a dedicated data

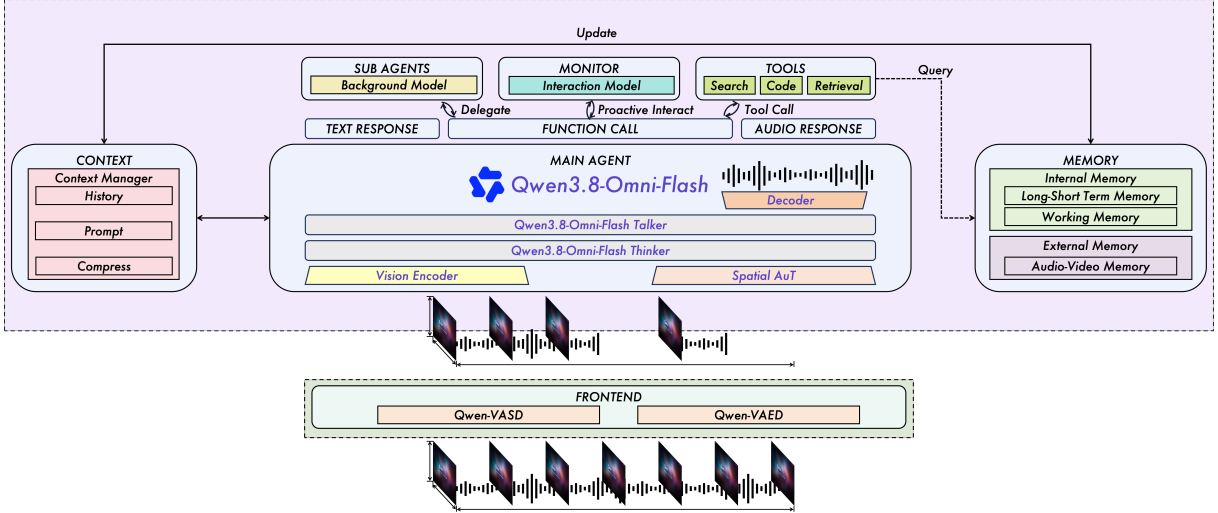


Figure 3: The overview of Qwen3.8-Omni-Flash-Realtime and Qwen-Live-Harness. Qwen3.8-Omni-Flash-Realtime adopts the Thinker-Talker architecture. Thinker is tasked with text generation while Talker focuses on generating streaming speech tokens by receives high-level representations directly from Thinker. To achieve ultra-low-latency streaming, Talker autoregressively predicts a multi-codebook sequence. At each decoding step, an MTP module outputs the residual codebooks for the current frame, after which the Code2Wav renderer incrementally synthesizes the corresponding waveform, enabling frame-by-frame streaming generation.

pipeline is established to build a comprehensive, balanced dataset. During continual pre-training (CPT), complex conversational context corpora are introduced to bolster Talker’s contextual modeling capability. Following CPT, we train individual language experts and utilize Multi-Teacher On-Policy Distillation (MOPD) (Ma et al., 2026) for multilingual speech generation, which effectively mitigates foreign accent artifacts induced by monolingual corpora. Subsequently, a lightweight speaker fine-tuning stage is conducted to capture target speaker characteristics. Finally, in the reinforcement learning stage, we fine-tune Thinker to align with human preferences and optimize Talker via GSPO (Zheng et al., 2025) using reward signals from the aligned Thinker, further elevating overall performance.

7.2 Efficiency

To support low-latency inference, Qwen3.8-Omni-Flash-Realtime combines chunk-wise streaming input processing in Thinker with incremental speech generation in Talker. Talker consumes streamed Thinker outputs and uses ARIA to adaptively align and interleave text and speech tokens, enabling speech continuation from partial text prefixes. At each acoustic frame, a multi-token prediction (MTP) module predicts the residual RVQ codebooks, followed by a causal Code2Wav decoder that incrementally reconstructs the waveform. Together, these mechanisms allow text generation, speech-token prediction, and waveform reconstruction to proceed progressively, enabling audio delivery before the complete response has been generated.

Table 9: **Realtime API efficiency of Qwen3.8-Omni-Flash-Realtime.**

Input	Duration (s)	Text TPS	TTFT (ms)	TTFC (ms)	Generation RTF
Audio	6	84.87	591.26	978.36	0.1538
Audio	12	83.18	604.80	982.74	0.1537
Audio	20	81.06	617.98	1026.39	0.1538
Audio-Video	6	84.89	837.96	1214.73	0.1524
Audio-Video	12	84.33	911.85	1268.07	0.1527
Audio-Video	20	83.00	981.01	1350.49	0.1528

We evaluate the realtime API of Qwen3.8-Omni-Flash-Realtime using 6-, 12-, and 20-second audio-only and audio-video excerpts. Audio is transmitted as 16 kHz mono PCM, with audio-video inputs additionally containing 1280×720 frames at 1 FPS. Each condition includes ten valid responses after one warm-up request, using fresh sessions and a fixed instruction requiring more than 200 output text tokens. Inputs are uploaded before explicit turn submission, with voice activity detection disabled.

Time-to-first-text (TTFT) and time-to-first-audio-chunk (TTFC) are measured from client-side input commitment to the first nonempty output text and audio chunks, respectively. They include network transit and server-side processing but exclude connection establishment, input upload, and playback. Text TPS measures streaming text throughput using server-reported token counts. Audio generation real-time factor (RTF) is the interval between the first and last audio chunks divided by the generated waveform duration. Both generation metrics exclude the initial response waiting time.

As shown in Table 9, text throughput remains within 81.06–84.89 tokens per second. Reported first-audio latencies are approximately 0.98–1.03 seconds for audio-only inputs and 1.21–1.35 seconds for audio-video inputs. Visual input increases startup latency while sustained generation efficiency remains similar. Generation RTF stays near 0.153, corresponding to approximately $6.5\times$ realtime generation speed under the evaluated setting.

7.3 Harness for Realtime Application

To connect realtime multimodal interaction with practical agentic workflows, we develop *Qwen-Live-Harness*. The framework connects Qwen3.8-Omni-Flash-Realtime to desktop audio-visual inputs and external agent backends, combining low-latency conversation with asynchronous execution, proactive interaction, and persistent memory.

Asynchronous tool use and sub-agent delegation. The foreground agent delegates tasks to external backends, including Qwen Code, Codex, and Claude Code, through a unified adapter interface. Task submission returns an immediate acknowledgment, allowing the conversation to continue while backend execution proceeds independently. Progress and results are incorporated into the conversational context asynchronously, with concise spoken notifications delivered around ongoing speech and playback. Users can interrupt the current spoken response without cancelling delegated work, and backend tasks can continue after the realtime call ends.

Proactive interaction. The harness supports user-defined conditions over audio, visual input, and time. Perceptual monitoring tasks run in independent realtime sessions and produce textual event reports, which the foreground agent converts into spoken notifications when the conversation permits. Cooldowns and suppression of consecutive positive detections limit redundant notifications. This design supports screen monitoring, environmental observation, and scheduled reminders during live sessions.

Persistent memory. The harness combines recorded dialogue, explicit working memory, and selected user facts retained across conversations. Reusable information is consolidated into persistent profiles and retrieved through lexical search with optional embedding-based matching. When enabled, visual memory stores textual observations derived from captured frames. These mechanisms preserve relevant preferences and context across realtime sessions, supporting continuity in both conversation and task delegation.

7.4 Performance

We evaluate Qwen3.8-Omni-Flash-Realtime against Qwen3.5-Omni-Plus, Gemini 3.8 Flash, Seed 2.0 Lite, and Muse Spark 1.2 on several representative omni-modal interaction benchmarks. As shown in Table 10, the model delivers strong interaction performance, despite operating in a non-thinking mode to prioritize responsiveness.

Table 10: Multimodal interaction performance comparison of Qwen3.8-Omni-Flash-Realtime and baseline models. The highest scores are shown in bold.

Benchmark	Qwen3.8-Omni-Flash-Realtime	Qwen3.5-Omni-Plus	Gemini 3.8 Flash	Seed 2.0 Lite	Muse Spark 1.2
<i>Audio-Visual Interaction</i>					
QIVD	66.8	65.6	69.1	62.0	62.0
ProactiveVideoQA	58.1	35.1	58.0	68.3	63.6
StreamingBench	78.9	57.1	79.9	77.2	77.8
OmniVChat-Bench	82.3	52.1	65.6	45.2	69.8
Omni2Web	45.1 57.0	29.6 49.1	57.0 50.8	28.3 46.5	35.2 27.6
ODUBench	90.2 86.2	74.7 69.6	72.1 66.4	77.3 67.9	76.9 71.3
<i>Audio Interaction</i>					
WildSpeech	72.5	75.7	76.4	74.5	73.4
VoiceBench	88.8	92.9	92.3	84.1	79.8

¹ ODUBench results are reported as Audio | VA; the highest score for each setting is shown in bold.

² Omni2Web results are reported as Track A | Track B; the highest score for each setting is shown in bold.

In particular, it achieves substantial gains over Gemini 3.8 Flash on OmniVChat-Bench, ODUBench, and Omni2Web (Track B). On OmniVChat-Bench, which evaluates conversational ability in everyday interaction scenarios, the model obtains 82.3, significantly outperforming 65.6 from Gemini 3.8 Flash. This result highlights its strong omni-modal dialogue capability in practical user-facing settings. On ODUBench, which evaluates the understanding of user intent across omni-modal inputs, the model obtains the best listed scores in both the audio and audio-visual settings, demonstrating that it can accurately capture user intention even under realtime constraints. Meanwhile, Omni2Web (Track B) evaluates the understanding of GUI-based interactions, and the strong result indicates that Qwen3.8-Omni-Flash-Realtime can serve as a capable agent for GUI interaction, a key requirement of Qwen-Live-Harness. Overall, these results demonstrate that the model preserves strong interaction quality while maintaining realtime responsiveness, making it well suited for practical live agentic applications.

Table 11: Voice cloning capability comparison. Benchmarks marked with * are in-house.

Benchmark	Qwen3.8-Omni-Flash-Realtime	Qwen3.5-Omni-Plus	SeedAudio	MiniMax-Speech-2.8
<i>Content Stability</i>				
SEED <i>zh en hard</i>	0.74 0.89 5.29	0.99 1.26 6.37	1.76 1.02 7.70	0.82 0.99 9.08
Multilingual Voice Cloning <i>30 lang</i>	3.17	3.48	19.77	6.05
Cross-Lingual Voice Cloning <i>12 cl-lang</i>	3.63	3.74	7.80	10.59
Accented Voice Cloning* <i>Chinese dialects</i>	5.03	5.39	7.58	7.48
SpeechSuperClue* <i>ml cl</i>	3.34 4.00	6.23 8.08	4.99 11.55	3.95 4.83
SwanBench-Speech <i>zh en</i>	1.96 2.37	1.76 2.86	1.59 3.46	1.57 3.57
LongSpeechGeneration* <i>zh en</i>	1.74 1.59	19.25 4.52	7.71 5.09	7.11 6.51
<i>Timbre Consistency</i>				
SEED <i>zh en hard</i>	0.805 0.760 0.787	0.741 0.706 0.716	0.796 0.751 0.776	0.777 0.692 0.754
Multilingual Voice Cloning <i>30 lang</i>	0.845	0.789	0.840	0.792
Cross-Lingual Voice Cloning <i>12 cl-lang</i>	0.709	0.524	0.699	0.657
Accented Voice Cloning* <i>Chinese dialects</i>	0.711	0.641	0.696	0.666
SpeechSuperClue* <i>ml cl</i>	0.763 0.674	0.670 0.570	0.747 0.647	0.714 0.571
SwanBench-Speech <i>zh en</i>	0.828 0.795	0.768 0.728	0.799 0.752	0.804 0.763
LongSpeechGeneration* <i>zh en</i>	0.820 0.768	0.597 0.470	0.811 0.739	0.811 0.764
<i>Overall Cloning Score</i>				
SpeechSuperClue* <i>ml cl</i>	3.749 3.306	3.253 2.835	3.448 2.756	3.589 3.021

¹ Content stability is measured by WER/CER (lower is better).

² timbre consistency is measured by speaker similarity (higher is better).

³ Multiple values are separated by |, in the order of the subset shown under each benchmark.

To evaluate real-time speech response capabilities, we benchmark Qwen3.8-Omni-Flash-Realtime against leading industry baselines, including SeedAudio, MiniMax-Speech-2.8, Gemini 3.1 TTS Flash, SeedTTS 2.0, and ElevenLabs V3, across both public and in-house evaluation suites. As detailed in Table 11 and Table 12, Qwen3.8-Omni-Flash-Realtime demonstrates superior content stability, timbre consistency, controllability, and naturalness. **Voice Cloning.** In zero-shot voice cloning (Table 11), Qwen3.8-Omni-Flash-Realtime consistently achieves the best content stability (lowest WER/CER) and highest timbre similarity across the SEED, multilingual, cross-lingual, and accented speech benchmarks. Notably, for long-horizon generation, it substantially mitigates degradation, maintaining robust stability on both SwanBench-Speech and LongSpeechGeneration. In challenging in-the-wild evaluations (SpeechSuperClue), Qwen3.8-

Omni-Flash-Realtime achieves overall cloning scores of 3.749 (multilingual) and 3.306 (cross-lingual), outperforming SeedAudio and MiniMax-Speech-2.8 by a clear margin. **Custom Voice.** As shown in Table 12, Qwen3.8-Omni-Flash-Realtime maintains leading content stability, excelling in phonetic precision (93.3% accuracy on PhonePronunciation) and ultra-long speech generation (1.83 WER and 0.693 similarity). For stylistic controllability, Qwen3.8-Omni-Flash-Realtime attains a 95.0% success rate, closely matching Gemini 3.1 TTS Flash (97.5%). Furthermore, in speech naturalness arena, Qwen3.8-Omni-Flash-Realtime achieves a competitive 72.7% win rate, approaching Gemini 3.1 TTS Flash (74.2%) while significantly outperforming MiniMax 2.8 HD (48.0%), SeedTTS 2.0 (66.2%), and ElevenLabs V3 (23.1%).

Table 12: Comprehensive Custom-Voice capability comparison. Benchmarks marked with * are in-house.

Benchmark	Qwen3.8-Omni-Flash-Realtime	Qwen3.5-Omni-Plus	Gemini 3.1 TTS Flash	Minimax 2.8 HD	SeedTTS 2.0	ElevenLabs V3
<i>Content Stability</i>						
SEED <i>zh en hard</i>	0.83 0.93 5.22	1.12 2.54 7.30	2.41 1.48 19.46	1.10 1.69 6.82	0.87 1.41 6.87	1.62 0.95 12.51
Multilingual test set <i>29 lang</i>	3.16	5.94	5.90	16.31	–	6.86
SpeechSuperClue* <i>zh en</i>	7.19 7.55	10.38 12.51	9.15 6.39	7.91 6.94	7.46 7.90	8.39 7.38
PhonePronunciation* <i>Phone accuracy</i>	93.3%	61.3%	86.6%	62.7%	67.2%	78.0%
LongSpeechGeneration* <i>wer sim</i>	1.83 0.693	6.30 0.597	–	–	–	–
<i>Control Effectiveness</i>						
SpeechSuperClue* <i>20-style effectiveness</i>	95.0%	61.5%	97.5%	–	–	–
<i>Subjective Score / Naturalness</i>						
SpeechSuperClue* <i>ABX win rate</i>	72.7%	28.0%	74.2%	48.0%	66.2%	23.1%

¹ Content Stability and Multilingual test set are reported as WER (lower is better).

² LongSpeechGeneration is reported as WER | speaker similarity (lower / higher is better).

³ For PhonePronunciation accuracy, control effectiveness, and the subjective ABX win rate, higher is better.

⁴ Multiple values are separated by |, in the order of the subset shown under each benchmark.

8 Conclusion

We presented Qwen3.8-Omni-Flash, a natively multimodal agentic model that advances omni models toward real-world multimodal productivity. Its native multimodal co-training strategy preserves strong text capabilities while facilitating the transfer of reasoning and agentic capabilities to audio and video tasks, complemented by a 1M context window that supports long-form understanding and long-horizon planning. Extensive evaluations demonstrate strong performance across multimodal understanding, reasoning, agentic execution, and video productivity, supporting its deployment as either a primary agent or a specialized sub-agent. To translate these capabilities into practical workflows, we introduced *Qwen-MM-Plugins*, which integrates audiovisual capabilities into existing agent harnesses through information abstraction, selective content access, and reusable productivity tools. We further introduced *Qwen-Live-Harness* to support responsive, real-time multimodal agents through coordinated context and memory management, tool use, and sub-agent delegation. Together, Qwen3.8-Omni-Flash and these open-source frameworks highlight the value of jointly advancing model capabilities and system infrastructure, providing a practical foundation for multimodal agents that perform sustained reasoning, planning, and execution across research and production workflows.

9 Ethics Statement

Users generating content with this model should ensure that all input data are lawfully obtained and used, and obtain authorization from the individuals whose voices are used. They must not infringe on individuals’ rights to their voices or other personality rights and must comply with applicable laws and regulations. Synthetic audio made available to others must be labeled as AI-generated as required by law. Model deployers and users must fulfill their respective legal responsibilities.

References

- Alibaba Token Hub, Alibaba Group. Omnilingua-Bench: Multilingual omni-modal evaluation of long audio recognition, multi-speaker understanding, and instruction following. <https://github.com/QwenLM/Omnilingua-Bench>, 2026.
- Anthropic. Claude 3.7 sonnet and claude code. <https://www.anthropic.com/news/claude-3-7-sonnet>, 2025. Accessed: 2026-09-03.
- Zongheng Cao, Yi Zheng, Rui Song, and Xinyu Hu. Agentcibench: Can ai agents complete real-world post-production tasks? *arXiv preprint arXiv:2605.27705*, 2026.
- Jianghan Chao, Jianzhang Gao, Wenhui Tan, Yuchong Sun, Ruihua Song, and Liyun Ru. Jointavbench: A benchmark for joint audio-visual reasoning evaluation. *CoRR*, abs/2512.12772, 2025. doi: 10.48550/ARXIV.2512.12772.
- Qi Chen, Yunfei Chu, Haolin He, Yifan Yang, Zihan Liu, Yuxuan Wang, Ziyang Ma, Ruiyang Xu, Meng Gao, Yinsong Yan, Ling Wang, Hui Wang, Wen Huang, Yiheng Chen, Guanrou Yang, Qiuqiang Kong, Jin Xu, and Xie Chen. Omni demand understanding: A benchmark for contextual user-intent inference in multimodal interaction, 2026a. URL <https://arxiv.org/abs/2609.21392>.
- Yiming Chen, Xianghu Yue, Chen Zhang, Xiaoxue Gao, Robby T Tan, and Haizhou Li. Voicebench: Benchmarking llm-based voice assistants. *arXiv preprint arXiv:2410.17196*, 2024.
- Zhekai Chen, Chengqi Duan, Kaiyue Sun, Bohao Li, Yuqing Wang, Manyuan Zhang, and Xihui Liu. Uniclawbench: A universal benchmark for proactive agents on real-world tasks. *arXiv preprint arXiv:2607.08768*, 2026b.
- Xize Cheng, Wenxu Jia, Chenyuhao Wen, Dongjie Fu, Zehan Wang, Xinyu Zhang, and Tao Jin. Vox-infinity: Benchmarking the limits of long- context spoken language models, September 2026. URL <https://doi.org/10.5281/zenodo.22868361>.
- Alexis Conneau, Min Ma, Simran Khanuja, Yu Zhang, Vera Axelrod, Siddharth Dalmia, Jason Riesa, Clara Rivera, and Ankur Bapna. Fleurs: Few-shot learning evaluation of universal representations of speech. *2022 IEEE Spoken Language Technology Workshop (SLT)*, pp. 798–805, 2022. URL <https://api.semanticscholar.org/CorpusID:249062909>.
- Datacurve. DeepSWE, 2026. URL <https://deepswe.datacurve.ai/>. Benchmark version 1.1. Accessed: 2026-09-18.
- DeepSeek-AI. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- Xiang Deng, Jeff Da, Edwin Pan, Yannis Yiming He, Charles Ide, Kanak Garg, Niklas Lauffer, Andrew Park, Nitin Pasari, Chetan Rane, et al. Swe-bench pro: Can ai agents solve long-horizon software engineering tasks? *arXiv preprint arXiv:2509.16941*, 2025.
- Jingzhe Ding, Shengda Long, Changxin Pu, Huan Zhou, Hongwan Gao, Xiang Gao, Chao He, Yue Hou, Fei Hu, Zhaojian Li, et al. NL2repo-bench: Towards long-horizon repository generation evaluation of coding agents. *arXiv preprint arXiv:2512.12730*, 2025.
- Shuangrui Ding, Xuanlang Dai, Long Xing, Shengyuan Ding, Ziyu Liu, Yang JingYi, Penghui Yang, Zhixiong Zhang, Xilin Wei, Xinyu Fang, et al. Wildclawbench: A benchmark for real-world, long-horizon agent evaluation. *arXiv preprint arXiv:2605.10912*, 2026.
- Chaoyou Fu, Haozhi Yuan, Yuhao Dong, Yifan Zhang, Yunhang Shen, Xiaoxing Hu, Xueying Li, Jinsen Su, Chengwu Long, Xiaoyao Xie, Yongkang Xie, Xiawu Zheng, Xue Yang, Haoyu Cao, Yunsheng Wu, Ziwei Liu, Xing Sun, Caifeng Shan, and Ran He. Video-mme-v2: Towards the next stage in benchmarks for comprehensive video understanding. *CoRR*, abs/2604.05015, 2026. doi: 10.48550/ARXIV.2604.05015.
- Yihui Fu, Luyao Cheng, Shubo Lv, Yukai Jv, Yuxiang Kong, Zhuo Chen, Yanxin Hu, Lei Xie, Jian Wu, Hui Bu, Xin Xu, Jun Du, and Jingdong Chen. Aishell-4: An open source dataset for speech enhancement, separation, recognition and speaker diarization in conference scenario. In *Interspeech*, 2021. URL <https://api.semanticscholar.org/CorpusID:233181491>.
- Arushi Goel, Sreyan Ghosh, Vatsal Agarwal, Nishit Anand, Kaousheik Jayakumar, Lasha Koroshinadze, Yao Xu, Katie Lyons, James Case, Karan Sapra, Kevin J. Shih, Siddharth Gururani, Abhinav Shrivastava, Ramani Duraiswami, Dinesh Manocha, Andrew Tao, Bryan Catanzaro, Mohammad Shoeybi, and Wei Ping. MMOU: A massive multi-task omni understanding and reasoning benchmark for long and complex real-world videos. *CoRR*, abs/2603.14145, 2026. doi: 10.48550/ARXIV.2603.14145.

-
- Google. Gemini 3.8 Flash, 2026. URL <https://ai.google.dev/gemini-api/docs/models/gemini-3.8-flash>. Gemini API documentation. Accessed: 2026-09-18.
- Advait Gosai, Tyler Vuong, Utkarsh Tyagi, Steven Li, Wenjia You, Miheer Bavare, Arda Uçar, Zhongwang Fang, Brian Jang, Bing Liu, and Yunzhong He. Audio multichallenge: A multi-turn evaluation of spoken dialogue systems on natural human interaction. In Maria Liakata, Viviane P. Moreira, Jiajun Zhang, and David Jurgens (eds.), *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2026, San Diego, California, United States, July 2-7, 2026, pp. 35740–35770. Association for Computational Linguistics, 2026. doi: 10.18653/V1/2026.ACL-LONG.1654. URL <https://doi.org/10.18653/v1/2026.acl-long.1654>.
- Minghao Han, Zhenghao Xing, Xize Cheng, Yuxuan Wang, Junming Lin, Ling Wang, Yinsong Yan, Yunfei Chu, Qize Yang, and Jin Xu. Omni2web: Benchmarking audiovisual website development, September 2026. URL <https://doi.org/10.5281/zenodo.22855767>.
- Haolin He, Yunfei Chu, Qi Chen, Wen Huang, Yuan Feng, Muzhi Zhu, Zheqi Dai, Haoning Xu, Dongchao Yang, Chunyat Wu, Zining Liang, Zhengxi Liu, Xiquan Li, Xie Chen, Xize Cheng, Qize Yang, Jin Xu, and Qiuqiang Kong. Omnivchat: Synthesizing, benchmarking, and training for native audio-visual dialogue, 2026a. URL <https://arxiv.org/abs/2609.21465>.
- Zehai He, Wenyi Hong, Zhen Yang, Ziyang Pan, Mingdao Liu, Xiaotao Gu, and Jie Tang. Vision2web: A hierarchical benchmark for visual website development with agent verification. *arXiv preprint arXiv:2603.26648*, 2026b.
- Jack Hong, Shilin Yan, Jiayin Cai, Xiaolong Jiang, Yao Hu, and Weidi Xie. Worldsense: Evaluating real-world omnimodal understanding for multimodal llms. *CoRR*, abs/2502.04326, 2025.
- Wen Huang, Yunfei Chu, Meng Gao, Haolin He, and Jin Xu. Audiospan: Spanning the duration and depth of audio comprehension. *CoRR*, abs/2608.26431, 2026. doi: 10.48550/ARXIV.2608.26431.
- Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. LiveCodeBench: Holistic and contamination free evaluation of large language models for code. *CoRR*, abs/2403.07974, 2024.
- Kabir Khandpur, Kilian Lieret, Carlos E. Jimenez, Ofir Press, and John Yang. SWE-bench Multilingual, 2025. URL <https://www.swebench.com/multilingual.html>. Accessed: 2026-09-18.
- Daeyong Kwon, Qiyu Wu, Shinobu Kuriya, Junghyun Koo, Shuyang Cui, Zhi Zhong, Wei-Hsiang Liao, Hiromi Wakaki, and Yuki Mitsufuji. Mustbench: Benchmarking and advancing temporal grounding in music llms. *CoRR*, abs/2605.29300, 2026. doi: 10.48550/ARXIV.2605.29300.
- Caorui Li, Yu Chen, Yiyang Ji, Jin Xu, Zhenyu Cui, Shihao Li, Yuanxing Zhang, Jiafu Tang, Zhenghao Song, Dingling Zhang, Ying He, Haoxiang Liu, Yuxuan Wang, Qiufeng Wang, Zhenhe Wu, Jiehui Luo, Zhiyu Pan, Weihao Xie, Chenchen Zhang, Zhaohui Wang, Jiayi Tian, Yanghai Wang, Zhe Cao, Minxin Dai, Ke Wang, Runzhe Wen, Yinghao Ma, Yaning Pan, Sungkyun Chang, Termeh Taheri, Haiwen Xia, Christos Plachouras, Emmanouil Benetos, Yizhi Li, Ge Zhang, Jian Yang, Tianhao Peng, Zili Wang, Minghao Liu, Junran Peng, Zhaoxiang Zhang, and Jiaheng Liu. Omnivideobench: Towards audio-visual understanding evaluation for omni mllms. *CoRR*, abs/2510.10689, 2025. doi: 10.48550/ARXIV.2510.10689.
- Xiaoxi Li, Wenxiang Jiao, Jiarui Jin, Shijian Wang, Guanting Dong, Jiajie Jin, Hao Wang, Yinuo Wang, Ji-Rong Wen, Yuan Lu, et al. Omnigaia: Towards native omni-modal ai agents. *arXiv preprint arXiv:2602.22897*, 2026.
- Junming Lin, Zheng Fang, Chi Chen, Zihao Wan, Fuwen Luo, Peng Li, Yang Liu, and Maosong Sun. Streamingbench: Assessing the gap for mllms to achieve streaming video understanding. *CoRR*, abs/2411.03628, 2024. doi: 10.48550/ARXIV.2411.03628. URL <https://doi.org/10.48550/arXiv.2411.03628>.
- Ruixun Liu, Yuxuan Wang, Jiacheng Xie, Yuhuan You, Donghua Cai, Junming Lin, Xiong-Hui Chen, Zhifang Guo, Yunfei Chu, Qize Yang, Xize Cheng, Jin Xu, and Yiwu Zhong. Omnicho: Spatial audio understanding for embodied agents, September 2026. URL <https://doi.org/10.5281/zenodo.22855748>.
- Wenhan Ma, Jianyu Wei, Liang Zhao, Hailin Zhang, Bangjun Xiao, Lei Li, Qibin Yang, Bofei Gao, Yudong Wang, Rang Li, Jin-Hao Dong, Zhifang Sui, and Fuli Luo. Mopd: Multi-teacher on-policy distillation for capability integration in llm post-training. *ArXiv*, abs/2606.30406, 2026. URL <https://api.semanticscholar.org/CorpusID:289684667>.

-
- Ziyang Ma, Yinghao Ma, Yanqiao Zhu, Chen Yang, Yi-Wen Chao, Ruiyang Xu, Wenxi Chen, Yuanzhe Chen, Zhuo Chen, Jian Cong, Kai Li, Keliang Li, Siyou Li, Xinfeng Li, Xiquan Li, Zheng Lian, Yuzhe Liang, Minghao Liu, Zhikang Niu, Tianrui Wang, Yuping Wang, Yuxuan Wang, Yihao Wu, Guanrou Yang, Jianwei Yu, Ruibin Yuan, Zhisheng Zheng, Ziya Zhou, Haina Zhu, Wei Xue, Emmanouil Benetos, Kai Yu, Chng Eng Siong, and Xie Chen. MMAR: A challenging benchmark for deep reasoning in speech, audio, music, and their mix. *CoRR*, abs/2505.13032, 2025a. doi: 10.48550/ARXIV.2505.13032. URL <https://doi.org/10.48550/arXiv.2505.13032>.
- Ziyang Ma, Ruiyang Xu, Zhenghao Xing, Yunfei Chu, Yuxuan Wang, Jinzheng He, Jin Xu, Pheng-Ann Heng, Kai Yu, Junyang Lin, et al. Omni-captioner: Data pipeline, models, and benchmark for omni detailed perception. *arXiv preprint arXiv:2510.12720*, 2025b.
- Meta. Introducing Muse Code and Muse Spark 1.2, August 2026. URL <https://research.meta.ai/blog/introducing-muse-code-and-muse-spark-1-2>. Published August 5, 2026. Accessed: 2026-09-18.
- Bingshen Mu, Pengcheng Guo, Zhaokai Sun, Shuai Wang, Hexin Liu, Mingchen Shao, Lei Xie, Eng Siong Chng, Longshuai Xiao, Qiangze Feng, and Daliang Wang. Summary on the multilingual conversational speech language model challenge: Datasets, tasks, baselines, and methods. *CoRR*, abs/2509.13785, 2025. doi: 10.48550/ARXIV.2509.13785.
- Le Thien Phuc Nguyen, Zhuoran Yu, Samuel Low Yu Hang, Subin An, Jeongik Lee, Yohan Ban, SeungEun Chung, Thanh-Huy Nguyen, JuWan Maeng, Soochahn Lee, et al. See, hear, and understand: Benchmarking audiovisual human speech understanding in multimodal large language models. *arXiv preprint arXiv:2512.02231*, 2025.
- OpenAI. ChatML, 2022. URL <https://github.com/openai/openai-python/blob/e389823ba013a24b4c32ce38fa0bd87e6bccae94/chatml.md>.
- OpenAI. Introducing openai o1-preview. <https://openai.com/index/introducing-openai-o1-preview/>, 2024. Accessed: 2026-09-03.
- Long Phan, Alice Gatti, Ziwen Han, Nathaniel Li, Josephina Hu, Hugh Zhang, Chen Bo Calvin Zhang, Mohamed Shaaban, John Ling, Sean Shi, et al. Humanity’s last exam. *arXiv preprint arXiv:2501.14249*, 2025.
- Reza Pourreza, Rishit Dagli, Apratim Bhattacharyya, Sunny Panchal, Guillaume Berger, and Roland Memisevic. Can vision-language models answer face to face questions in the real-world? *arXiv preprint arXiv:2503.19356*, 2025.
- Valentina Pyatkin, Saumya Malik, Victoria Graf, Hamish Ivison, Shengyi Huang, Pradeep Dasigi, Nathan Lambert, and Hannaneh Hajishirzi. Generalizing verifiable instruction following. *CoRR*, abs/2507.02833, 2025. doi: 10.48550/ARXIV.2507.02833. URL <https://doi.org/10.48550/arXiv.2507.02833>.
- Zihan Qiu, Zekun Wang, Xiao Li, Yanpeng Li, Yang Xu, Yixuan Wang, Huaqing Zhang, Rui Men, Bochao Mao, Chengruidong Zhang, et al. On the design of qwen3.8-next architecture: Evaluation, efficiency, and training stability. *arXiv preprint arXiv:2608.30320*, 2026.
- Qwen Team. On the design of Qwen3.8-Next architecture: Evaluation, efficiency, and training stability. Technical report, Alibaba Group, August 2026a.
- Qwen Team. Qwen3.7-plus: Multimodal agent intelligence, June 2026b. URL <https://qwen.ai/blog?id=qwen3.7-plus>.
- Qwen Team. Qwen3.5-omni: Technical report. *arXiv preprint arXiv:2604.15804*, 2026c. URL <https://arxiv.org/abs/2604.15804>.
- Qwen Team. Qwen3.8-max: A new bar for coding and cowork, August 2026d. URL <https://qwen.ai/blog?id=qwen3.8>.
- Chris Rawles, Sarah Clinckemaulle, Yifan Chang, Jonathan Waltz, Gabrielle Lau, Marybeth Fair, Alice Li, William Bishop, Wei Li, Folawiyi Campbell-Ajala, et al. Androidworld: A dynamic benchmarking environment for autonomous agents. In *International Conference on Learning Representations*, volume 2025, pp. 406–441, 2025.
- David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. GPQA: A graduate-level Google-proof Q&A benchmark. *CoRR*, abs/2311.12022, 2023.

-
- S Sakshi, Utkarsh Tyagi, Sonal Kumar, Ashish Seth, Ramaneswaran Selvakumar, Oriol Nieto, Ramani Duraiswami, Sreyan Ghosh, and Dinesh Manocha. Mmau: A massive multi-task audio understanding and reasoning benchmark, 2024. URL <https://arxiv.org/abs/2410.19168>.
- Bytedance Seed. Seed2. 0 model card: Towards intelligence frontier for real-world complexity. *arXiv preprint arXiv:2607.00248*, 2026.
- Luoyi Sun, Xiao Zhou, Zeqian Li, Ya Zhang, Yanking Wang, and Weidi Xie. Spotsound: Enhancing large audio-language models with fine-grained temporal grounding. *arXiv preprint arXiv:2604.13023*, 2026.
- Keda Tao, Yuhua Zheng, Xu Jia, Wenjie Du, Kele Shao, Hesong Wang, Xueyi Chen, Xin Jin, Junhan Zhu, Bohan Yu, Weiqiang Wang, Jian Liu, Can Qin, Yulun Zhang, Ming-Hsuan Yang, and Huan Wang. Lvomnibench: Pioneering long audio-video understanding evaluation for omnimodal llms. *CoRR*, abs/2603.19217, 2026. doi: 10.48550/ARXIV.2603.19217.
- Gemini Robotics Team. Gemini robotics: Bringing AI into the physical world. *CoRR*, abs/2503.20020, 2025.
- Qwen Team. Qwen3-asr technical report, 2026. URL <https://arxiv.org/abs/2601.21337>.
- Dingdong Wang, Jincenzi Wu, Junan Li, Dongchao Yang, Xueyuan Chen, Tianhua Zhang, and Helen Meng. MMSU: A massive multi-task spoken language understanding and reasoning benchmark. *CoRR*, abs/2506.04779, 2025a. doi: 10.48550/ARXIV.2506.04779. URL <https://doi.org/10.48550/arXiv.2506.04779>.
- Hui Wang, Yunfei Chu, Xize Cheng, Yu Xi, Meng Gao, Qi Chen, Yifan Yang, Wenxiang Guo, Yong Qin, and Jin Xu. Lamar-bench: Evaluating long-form and multi-audio understanding and reasoning, September 2026a. URL <https://doi.org/10.5281/zenodo.22857938>.
- Jiahao Wang, An Ping, Yanghai Wang, Yuanxing Zhang, Shihao Li, Hanyan Bian, Yichi Ren, Yize Zhang, Han Wang, Haowen Chen, Junze Li, Jiaqi Wang, Yiyang Hu, Zhuze Xu, Zijie Zhang, and Jiaheng Liu. Omnicap-if: Benchmarking and improving instruction following abilities for omni-video captioning. *CoRR*, abs/2606.08572, 2026b. doi: 10.48550/ARXIV.2606.08572.
- Ke Wang, Junting Pan, Weikang Shi, Zimu Lu, Mingjie Zhan, and Hongsheng Li. Measuring multimodal mathematical reasoning with math-vision dataset. *arXiv:2402.14804*, 2024a.
- Weihan Wang, Zehai He, Wenyi Hong, Yean Cheng, Xiaohan Zhang, Ji Qi, Shiyu Huang, Bin Xu, Yuxiao Dong, Ming Ding, and Jie Tang. Lvbench: An extreme long video understanding benchmark. *CoRR*, abs/2406.08035, 2024b.
- Yueqian Wang, Xiaojun Meng, Yifan Wang, Huishuai Zhang, and Dongyan Zhao. Proactivevideoqa: A comprehensive benchmark evaluating proactive interactions in video large language models. *CoRR*, abs/2507.09313, 2025b. doi: 10.48550/ARXIV.2507.09313. URL <https://doi.org/10.48550/arXiv.2507.09313>.
- Zirui Wang, Mengzhou Xia, Luxi He, Howard Chen, Yitao Liu, Richard Zhu, Kaiqu Liang, Xindi Wu, Haotian Liu, Sadhika Malladi, Alexis Chevalier, Sanjeev Arora, and Danqi Chen. Charxiv: Charting gaps in realistic chart understanding in multimodal llms. *arXiv preprint arXiv:2406.18521*, 2024c.
- Benno Weck, Pablo Puentes, Andrea Poltronieri, Satyajeet Prabhu, and Dmitry Bogdanov. Hummusqa: A human-written music understanding QA benchmark dataset. *CoRR*, abs/2603.27877, 2026. doi: 10.48550/ARXIV.2603.27877.
- xAI. Grok-1.5 Vision Preview, April 2024. URL <https://x.ai/news/grok-1.5v>. Introduces the RealWorldQA benchmark. Accessed: 2026-09-18.
- Jin Xu, Zhifang Guo, Jinzheng He, Hangrui Hu, Ting He, Shuai Bai, Keqin Chen, Jialin Wang, Yang Fan, Kai Dang, et al. Qwen2. 5-omni technical report. *arXiv preprint arXiv:2503.20215*, 2025a.
- Jin Xu, Zhifang Guo, Hangrui Hu, Yunfei Chu, Xiong Wang, Jinzheng He, Yuxuan Wang, Xianzhong Shi, Ting He, Xinfu Zhu, Yuanjun Lv, Yongqi Wang, Dake Guo, He Wang, Linhan Ma, Pei Zhang, Xinyu Zhang, Hongkun Hao, Zishan Guo, Baosong Yang, Bin Zhang, Ziyang Ma, Xipin Wei, Shuai Bai, Ke Chen, Xue Lian Liu, Peng Wang, Ming Yang, Dayiheng Liu, Xingzhang Ren, Bo Zheng, Rui Men, Fan Zhou, Bowen Yu, Jianxin Yang, Le Yu, Jing-Jun Zhou, and Junyang Lin. Qwen3-omni technical report. *ArXiv*, abs/2509.17765, 2025b.

-
- Yudong Yang, Jimin Zhuang, Guangzhi Sun, Changli Tang, Yixuan Li, Peihan Li, Yifan Jiang, Wei Li, Zejun Ma, and Chao Zhang. Audio-centric video understanding benchmark without text shortcut. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pp. 6580–6598, 2025.
- Zehui Yang, Yifan Chen, Lei Luo, Runyan Yang, Lingxuan Ye, Gaofeng Cheng, Ji Xu, Yaohui Jin, Qingqing Zhang, Pengyuan Zhang, Lei Xie, and Yonghong Yan. Open source magicdata-ramc: A rich annotated mandarin conversational(ramc) speech dataset. *CoRR*, abs/2203.16844, 2022. doi: 10.48550/ARXIV.2203.16844. URL <https://doi.org/10.48550/arXiv.2203.16844>.
- Zeyu Yang, Xinyu Zhang, Zibo Bi, Pei Zhang, Xize Cheng, Jin Xu, Baosong Yang, and Satoshi Nakamura. Mula-bench: A multilingual long-form audio understanding benchmark via multi-tier auditing, 2026. URL <https://arxiv.org/abs/2609.23416>.
- Bowen Ye, Rang Li, Qibin Yang, Yuanxin Liu, Linli Yao, Hanglong Lv, Zhihui Xie, Chenxin An, Lei Li, Lingpeng Kong, Qi Liu, Zhifang Sui, and Tong Yang. Claw-eval: Towards trustworthy evaluation of autonomous agents, 2026. URL <https://arxiv.org/abs/2604.06132>.
- Fan Yu, Shiliang Zhang, Yihui Fu, Lei Xie, Siqi Zheng, Zhihao Du, Weilong Huang, Pengcheng Guo, Zhijie Yan, Bin Ma, Xin Xu, and Hui Bu. M2met: The icassp 2022 multi-channel multi-party meeting transcription challenge. In *ICASSP 2022 - 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 6167–6171, 2022. doi: 10.1109/ICASSP43922.2022.9746465.
- Yongyi Zang, Sean O’Brien, Taylor Berg-Kirkpatrick, Julian McAuley, and Zachary Novack. Are you really listening? boosting perceptual awareness in music-qa benchmarks. *arXiv preprint arXiv:2504.00369*, 2025.
- Binbin Zhang, Hang Lv, Pengcheng Guo, Qijie Shao, Chao Yang, Lei Xie, Xin Xu, Hui Bu, Xiaoyu Chen, Chenchen Zeng, Di Wu, and Zhendong Peng. WENETSPEECH: A 10000+ hours multi-domain mandarin corpus for speech recognition. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2022, Virtual and Singapore, 23-27 May 2022*, pp. 6182–6186. IEEE, 2022. doi: 10.1109/ICASSP43922.2022.9746682. URL <https://doi.org/10.1109/ICASSP43922.2022.9746682>.
- Linhao Zhang, Jian Zhang, Bokai Lei, Chuhan Wu, Aiwei Liu, Wei Jia, and Xiao Zhou. Wildspeech-bench: Benchmarking end-to-end speechllms in the wild, 2025.
- Chujie Zheng, Shixuan Liu, Mingze Li, Xiong-Hui Chen, Bowen Yu, Chang Gao, Kai Dang, Yuqiong Liu, Rui Men, An Yang, et al. Group sequence policy optimization. *arXiv preprint arXiv:2507.18071*, 2025.
- Ziwei Zhou, Rui Wang, and Zuxuan Wu. Daily-omni: Towards audio-visual reasoning with temporal alignment across modalities. *CoRR*, abs/2505.17862, 2025.

10 Authors

Core Contributors⁴

Bing Han	Hao Wang	Qize Yang	Xiong Wang	Yuanjun Lv	Zhifang Guo
Baosong Yang	Hui Wang	Ruiyang Xu	Xinfa Zhu	Yongqi Wang	Zishan Guo
Dake Guo	Junming Lin	Shun Lei	Xinyu Zhang	Yue Wang	Ziyue Jiang
Dayiheng Liu*	Jin Xu*	Ting He	Xueyao Zhang	Yuxuan Wang	Zhanzhao Liu
Fei Huang	Keda Tao	Xize Cheng	Yunfei Chu	Yu Xi	Zhenxin Lei
Hangrui Hu	Linhan Ma	Xun Gong	Yuan Feng	Yifan Yang	Zhijun Wang
Hongkun Hao	Pei Zhang	Xian Shi	Yangze Li	Yang Zhang	

Contributors⁴

An Yang	Hongqing Chen	Keqin Chen	Qibing Bai	Xingzhang Ren	Yixuan Wang
Bohua Chen	Haolin He	Kexin Huang	Qi Chen	Xuancheng Ren	Yang Xu
Bingshen Mu	Hongcheng Liu	Kangdi Wang	Qidong Huang	Xipin Wei	Yifan Ye
Bochao Mao	Haoyu Wang	Lianghao Deng	Que Shen	Xuechun Wang	Yinsong Yan
Buxiao Wu	Haiyang Xu	Lei Huang	Ruixun Liu	Xiaodong Xu	Yuhuan You
Bin Zhang	Hui Xu	Lei Xie	Rui Men	Xi Zhang	Yichang Zhang
Bo Zheng	Haiquan Zhao	Lingchen Meng	Rong Zhang	Yiheng Chen	Yinger Zhang
Bohan Zhang	Huaqing Zhang	Liangzuo Sun	Shuai Bai	Yizhong Cao	Zibo Bi
Chuoqiao Kuang	Jie Huang	Ling Wang	Su Hao	Yang Fan	Zihan Liu
Chengpeng Li	Jingbin Hu	Laiwen Zheng	Sibo Song	Yuan Ge	Zijian Lin
Chenhao Li	Jiayi Leng	Leying Zhang	Songsong Shao	Yufei He	Zihan Qiu
Chenyuhao Wen	Jie Li	Meng Gao	Tao Chen	Yang Liu	Zhixiang Ruan
Chenhan Yuan	Jiongnan Liu	Mianqiu Huang	Tianyi Tang	Yanpeng Li	Zekun Wang
Donghua Cai	Jitong Liao	Minghao Han	Wenxiang Guo	Yi Lu	Zhiyong Wu
Dehui Kong	Ju Li	Mei Li	Wen Huang	Yuxin Liu	Zhenghao Xing
Dunjie Lu	Jiahao Meng	Mingfeng Xue	Xie Chen	Yuxuan Liu	Zeyu Yang
Feng Wang	Jiaxuan Peng	Man Yuan	Xionghui Chen	Yongxing Ma	Zhaoqing Zhu
Fan Zhong	Jianhong Tu	Mingkun Yang	Xudong Guo	Yunfei Mao	Zhiyuan Zhu
Fan Zhou	Jiaming Zhou	Muzhi Zhu	Xiao Li	Yang Su	
Gang Cheng	Jianwei Zhang	Na Ni	Xuejing Liu	Yuchong Sun	
Guangyu Yuan	Junhao Zheng	Pengfei Wang	Xiaokai Peng	Yueran Song	

Acknowledgements

We thank the Qwen-Audio team for their discussions and technical contributions regarding voice timbre in Qwen3.8-Omni-Flash-Realtime.

⁴Alphabetical order. * denotes the corresponding author.