

SelfLift: Accelerating Few-Step Diffusion via Self-Recovering Resolution Transition

Tingyan Wen^{1,*}, Chenqian Yan^{2,*}, Xurui Peng², Xiazhang Fang², Shuai Wang²,
Xueqian Wang^{1,†}, Songwei Liu^{2,†}

¹Tsinghua University, ²ByteDance

*Equal contribution, †Corresponding authors

Abstract

Few-step diffusion models substantially compress temporal computation, making the spatial cost of each model evaluation an increasingly dominant source of inference latency. Progressive-resolution inference reduces this cost by performing early denoising at low resolution and reserving high-resolution computation for refinement. However, existing methods typically lift intermediate latents directly and rely on subsequent steps to absorb the induced distribution mismatch. In the few-step regime, the limited recovery budget leaves these errors as visible artifacts, constraining how late the transition can occur and, consequently, how efficiently it can be performed. We introduce **SelfLift**, a self-recovering progressive-resolution framework that derives both transition-repair signals and trajectory-aligned supervision from the generative model itself. **SelfLift-zero** proposes a training-free Artifact-Aware Consistency Lift, using disagreement between direct latent lifting and pixel-VAE re-encoding as both a localized artifact-risk signal and a model-native correction direction. It enables reliable late transitions without external super-resolution, extra denoiser evaluations, or sampling-schedule modifications. Building on this robust transition, **SelfLift-rich** performs On-Policy Self Recovery on student-visited states, transferring dense high-resolution guidance from an internal self-teacher while remaining aligned with the altered progressive-resolution dynamics. Across FLUX.2-Klein and Z-Image-Turbo, SelfLift reduces end-to-end latency by **41.5%** and **44.1%**, respectively. Combined with timestep distillation, it delivers overall speedups of **29.61×** and **19.21×** over the corresponding 50-step models while preserving competitive generation quality, establishing a stronger speed-quality frontier for few-step diffusion.

Project Page: https://happygirlty.github.io/SelfLift_res/

Correspondence: Songwei Liu at liusongwei.zju@bytedance.com

Date: August 2026

1 Introduction

Modern latent diffusion architectures achieve strong visual synthesis through iterative refinement [25, 28], but repeated full-resolution evaluations remain expen-

sive. Step distillation compresses this process to one to eight evaluations using trajectory- or consistency-based objectives [21, 30, 32], distribution matching [41], or variational score distillation [24]. With temporal redundancy largely exhausted, further ac-

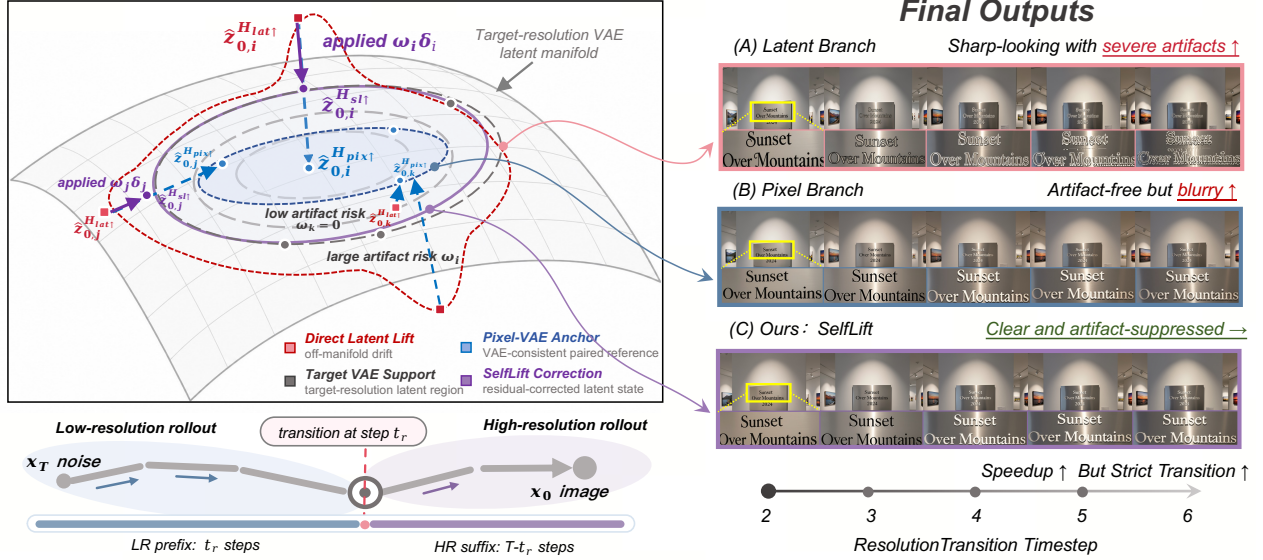


Figure 1 SelfLift unlocks fast and reliable progressive-resolution inference for few-step diffusion. Prior methods either leave latent-lifting artifacts to the few remaining denoising steps or rely on an external super-resolution model. SelfLift instead leverages two model-native branches, enabling later transitions with greater speedups.

celeration hinges on reducing per-step spatial cost without disrupting the distilled sparse trajectory. Progressive-resolution inference offers a natural solution. It performs early low-resolution evaluations to establish global structure, while reserving high-resolution computation for detail refinement, following diffusion’s coarse-to-fine evolution [4, 27]. As the simplest and lowest-overhead bridge between resolutions, direct latent lifting is widely adopted in training-free methods [9, 34, 37]. Yet this efficiency comes at a cost, as the lifted states may exhibit visible artifacts and spatial drift, leaving the remaining high-resolution steps to recover from the resulting transition errors.

Fully exploiting progressive-resolution inference in the few-step regime poses two coupled challenges. **Challenge 1: Reliable resolution transition under a limited recovery budget.** An earlier transition leaves more steps for recovery but sacrifices acceleration, whereas a later transition yields greater speedups while making these errors harder to correct. Pixel-space alternatives [43] avoid direct latent lifting through a separate super-resolution model, introducing an external generative prior and non-negligible inference overhead. Few-step acceleration therefore requires immediate, model-native transition repair without external models or extra denoiser evaluations, shifting the focus from when or where to transition to how to cross the boundary reliably. **Challenge 2: Dense high-resolution guidance on**

the progressive-resolution trajectory. A reliable training-free transition already enables stable and efficient generation. When lightweight adaptation is allowed, the model’s native high-resolution capability can be further used to recover details beyond what the low-resolution prefix can represent. Standard fine-tuning and full-resolution distillation are poorly matched to this setting: they supervise target-derived or full-resolution states rather than the student-visited states produced by the accelerated rollout, creating a train–inference mismatch and potentially disrupting the few-step dynamics [10, 23]. Effective adaptation must therefore transfer dense high-resolution knowledge directly along the actual progressive-resolution trajectory used at inference.

To address these challenges, we propose **SelfLift**, a self-recovering resolution-transition framework for accelerating few-step models, in which the model itself provides both self-derived transition-repair signals and trajectory-aligned supervision. SelfLift includes a complete training-free solution, SelfLift-zero, and an optional lightweight enhancement, SelfLift-rich. **SelfLift-zero** introduces Artifact-Aware Consistency Lift. Specifically, it constructs a self-derived consistency residual from the discrepancy between direct latent lifting and pixel VAE re-encoding. This residual both localizes regions at risk of transition artifacts and provides a principled correction direction for the directly lifted latent. It can be integrated without an external super-resolution model or additional de-

noiser evaluations. SelfLift-rich further extends this principle through On-Policy Self Recovery. It distills our Zero transition into a lightweight latent lifter and transfers dense high-resolution guidance directly along the progressive-resolution trajectory. The supervision is provided by an internal self-teacher on the same student-visited states, without a separately trained teacher or reward model.

Our contributions are summarized as follows:

- We propose **SelfLift**, a self-recovering progressive-resolution framework that reframes few-step acceleration around reliable resolution transition.
- SelfLift introduces **two core designs**: Artifact-Aware Consistency Lift for immediate and reliable transition without external super-resolution or extra denoising, and On-Policy Self Recovery for trajectory-aligned adaptation with dense high-resolution supervision.
- On FLUX.2-Klein and Z-Image-Turbo, SelfLift reduces end-to-end latency by **41.5%** and **44.1%**. With timestep distillation, it achieves **29.61×** and **19.21×** overall speedups with strong generation quality.

2 Related Work

2.1 Efficient Diffusion Inference

Temporal acceleration employs fast ODE solvers [22, 42], error-rectified [26], multi-level [36], or motion-aware caching [39], and applies feature forecasting [19]. Trajectory distillation further compresses sampling through progressive compression [30], cross-noise consistency [32], or distribution matching [13, 40]. With temporal redundancy compressed in few-step models, per-evaluation spatial cost dominates. Spatial methods reduce this cost by varying resolution along the sampling trajectory. Training-dependent designs use linked pyramids [11], noise-dependent patchification [14], or cascaded pixel-space flows [3], but require retraining. Training-free methods include high-low-high sampling [34], region-adaptive lifting [9], and spectrally scheduled resolution growth [37]. MrFlow instead uses pixel-space super-resolution, VAE re-encoding, and high-resolution refinement, avoiding direct latent lifting but requiring an external super-resolution model [43]. These approaches complement temporal acceleration, yet few-step models leave little denoising budget to absorb transition errors, making a reliable and self-contained resolution transition essential.

2.2 Post-Training of Step-distilled Models

Step-distilled models acquire specialized dynamics over sparse timesteps, which standard post-training objectives may disrupt and thereby degrade generation quality [23]. Effective adaptation must therefore improve the output distribution without deviating from the pretrained trajectory. PSO enlarges the likelihood margin between real images and distilled-model samples [23], whereas on-policy distillation supervises student-visited states to reduce the train-inference mismatch of off-policy teacher data [1]. Recent works extend this paradigm to visual generation [5, 10, 15]. These methods primarily consider post-training along native-resolution trajectories. Resolution-transition adaptation instead operates on states jointly induced by the low-resolution prefix and cross-resolution transition. It must correct the resulting distribution shift and recover high-resolution content on the actual progressive-resolution rollout, while preserving the pretrained few-step dynamics.

3 Method

3.1 Preliminaries

Latent Flow Matching. Given an image x_0 , the VAE encoder $\mathcal{E}$ maps it to the clean latent $z_0 = \mathcal{E}(x_0)$. For flow time $t \in [0, 1]$ and text condition c , rectified flow [17] connects the clean latent to Gaussian noise and learns the corresponding conditional velocity field:

$$\begin{aligned} z_t &= (1-t)z_0 + t\epsilon, & \epsilon &\sim \mathcal{N}(\mathbf{0}, \mathbf{I}), \\ v_\theta(z_t, t, c) &\approx \mathbb{E}[\epsilon - z_0 \mid z_t, c]. \end{aligned} \quad (1)$$

Sampling follows the learned flow from $t = 1$ to $t = 0$ in the VAE latent space.

Progressive-Resolution Inference. Let $\Phi_{a \rightarrow b}^R$ denote the numerical flow from time a to b at resolution R . Given a transition time t_r , progressive-resolution inference first follows the low-resolution flow, lifts the intermediate state to the high-resolution latent space, and then completes the remaining trajectory at high resolution:

$$z_0^{\text{PR}} = \Phi_{t_r \rightarrow 0}^H \left(\mathcal{T}_{L \rightarrow H} \left(\Phi_{1 \rightarrow t_r}^L (\epsilon^L; c) \right); c \right). \quad (2)$$

where $\mathcal{T}_{L \rightarrow H}$ denotes the cross-resolution transition operator to convert the low-resolution state into a high-resolution state.

3.2 Analysis of Resolution Transition

At transition time t_r , we analyze the predicted clean endpoint to expose decoder-visible differences without the noise retained in the intermediate state:

$$\hat{z}_{0,t_r}^L = z_{t_r}^L - t_r v_\theta(z_{t_r}^L, t_r, c). \quad (3)$$

Starting from the same estimate, direct latent lifting and pixel-VAE re-encoding produce

$$z^{\text{lat}} = \mathcal{U}^{\text{lat}}(\hat{z}_{0,t_r}^L), \quad (4)$$

$$Y = \mathcal{U}^{\text{pix}}(\mathcal{D}_L(\hat{z}_{0,t_r}^L)), \quad z^{\text{pix}} = \mathcal{E}_H(Y), \quad (5)$$

where $\mathcal{U}^{\text{lat}}$ and $\mathcal{U}^{\text{pix}}$ denote latent-space and pixel-space resizing. $\mathcal{E}_H$ and $\mathcal{D}_L$ represent the high-resolution encoder and the low-resolution decoder, respectively.

Observation 1. Decoder-visible inconsistencies under direct latent interpolation.

Let $\mathcal{U}^{\text{lat}} : \mathbb{R}^{d_L} \rightarrow \mathbb{R}^{d_H}$ be a fixed linear interpolation operator, where $d_L < d_H$. Its reachable subspace is $\mathcal{Z}_{\text{lat}} := \{\mathcal{U}^{\text{lat}}(z^L) \mid z^L \in \mathbb{R}^{d_L}\}$. By linearity, $\dim(\mathcal{Z}_{\text{lat}}) = \text{rank}(\mathcal{U}^{\text{lat}}) \leq d_L < d_H$. Let $P_{t_r}^{\text{lat}}$ denote the distribution of z^{lat} , and let P_{VAE}^H denote the native high-resolution VAE latent distribution. Since every directly lifted latent lies in $\mathcal{Z}_{\text{lat}}$, $P_{t_r}^{\text{lat}}(\mathcal{Z}_{\text{lat}}) = 1$. If native target-resolution VAE latents are not concentrated on this subspace, i.e., $P_{\text{VAE}}^H(\mathcal{Z}_{\text{lat}}) < 1$, then $P_{t_r}^{\text{lat}} \neq P_{\text{VAE}}^H$. This support mismatch provides a structural indication of the distributional discrepancy introduced by direct interpolation. Appendix B further shows that directly lifted and pixel latents exhibit $18.93\times$ and $1.43\times$ the native target-VAE round-trip energy, respectively. Together with Fig. 2(a), this empirically associates round-trip instability with ghosting, structural distortion, and spatial drift. Meanwhile, direct lifting preserves deterministic correspondence with the preceding low-resolution state, motivating its use as the trajectory-preserving candidate.

Observation 2. Pixel re-encoding yields an encoder-reachable representation with limited high-frequency detail.

Let $\mathcal{X}_H$ denote the high-resolution image space and define the encoder-reachable latent set as $\mathcal{Z}_{\text{pix}}^H := \{\mathcal{E}_H(x) \mid x \in \mathcal{X}_H\}$. Although $z^{\text{pix}} \in \mathcal{Z}_{\text{pix}}^H$ guarantees encoder reachability, it does not imply that Y uniquely identifies the corresponding sample-specific

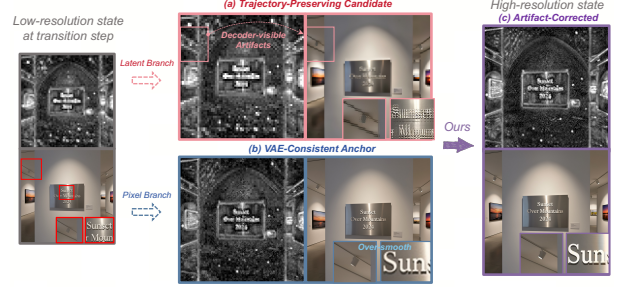


Figure 2 Direct lifting introduces decoder-visible inconsistency (a), whereas pixel-VAE re-encoding provides a stable yet smoother VAE-reachable anchor (b). Correction toward this anchor yields an artifact-reduced target-resolution state (c).

high-resolution detail. Let r_{HF} denote the sample-specific high-frequency component. The minimum MSE attainable by any deterministic predictor from Y is

$$\inf_f \mathbb{E} [\|r_{\text{HF}} - f(Y)\|_2^2] = \mathbb{E} [\text{tr Cov}(r_{\text{HF}} \mid Y)]. \quad (6)$$

When the conditional distribution $p(r_{\text{HF}} \mid Y)$ is non-degenerate, Eq. 6 implies a strictly positive irreducible error. Hence, the pixel-VAE re-encoding branch cannot uniquely recover the sample-specific high-resolution detail from Y . Figure 2(b) further shows that the reconstruction of pixel-VAE re-encoding retains coarse spatial information after resolution transitions but produces a smoother result, indicating that it is more suitable for selective correction than as a global alternative to z^{lat} .

3.3 SelfLift


To address the two transition failure modes identified above, we introduce SelfLift, which has two variants. SelfLift-zero uses Artifact-Aware Consistency Lift, which can selectively combine the dual lifting branches without training. SelfLift-rich enables On-Policy Self Recovery to learn a lightweight lifter on the student’s progressive-resolution rollout. Figure 3 illustrates an overview of our SelfLift framework.

Artifact-Aware Consistency Lift SelfLift-zero turns the complementary transition behaviors identified in Sec. 3.2 into an asymmetric, training-free correction operator. Treating the two routes symmetrically is suboptimal: replacing the direct-lift state would inherit the smoothing of the pixel route, while global mixing would modify reliable and corrupted regions indiscriminately. We therefore retain z^{lat} as

SelfLift Framework: Reliable and High-Fidelity Progressive-Resolution Inference

Low-resolution Rollout $\gg$ (a) Training-free SelfLift-zero $\xrightarrow{\text{reliable transition at timestep } t_r}$ (b) Lightweight SelfLift-rich $\gg$ High-resolution Rollout $\gg$ Clean Outputs

A. zero: Artifact-Aware Consistency Lift

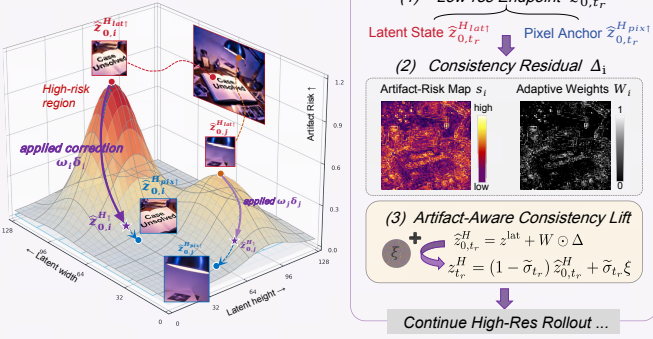

B. rich: On-Policy Self Recovery

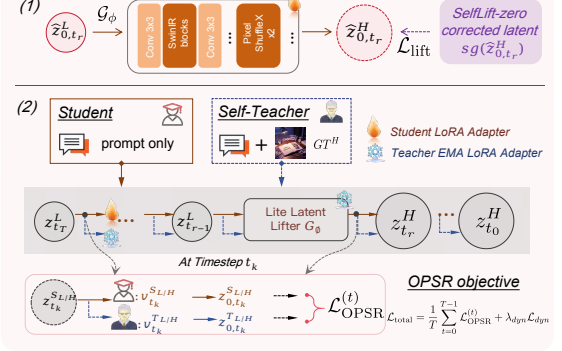


Figure 3 Overview of SelfLift. Given the predicted low-resolution clean endpoint, SelfLift-zero constructs a trajectory-preserving latent candidate and a VAE-reachable pixel anchor. Their consistency residual yields an artifact risk map and adaptive weights for selectively correcting high-risk regions before re-noising. SelfLift-rich distills this correction into a lightweight latent lifter and performs on-policy recovery on student-visited states, using an EMA self-teacher for privileged high-resolution guidance and a dynamics objective to preserve the pretrained few-step trajectory.

the trajectory state and use z^{pix} only as a paired correction anchor. Both routes originate from the same predicted clean endpoint $\hat{z}_{0,t_r}^L$, allowing their disagreement to isolate the effect of the resolution transition.

We define the consistency residual as $\Delta = z^{\text{pix}} - z^{\text{lat}}$. Δ_i points from the direct-lift state toward its paired VAE-reachable anchor, while its magnitude reflects their local discrepancy. We convert this discrepancy into a spatial artifact-risk map and select the top- ρ locations within each sample:

$$s_i = \frac{1}{C} \|\Delta_i\|_1, \quad M_i = \mathbf{1}[s_i \geq Q_{1-\rho}(\{s_j\}_j)], \quad (7)$$

where $Q_{1-\rho}$ denotes the $(1 - \rho)$ -quantile. Here, s_i serves as a local inconsistency proxy, while the sample-wise quantile adapts the selected region to different prompts and transition steps. We further convert the selected scores into spatially adaptive correction weights:

$$W_i = M_i \left[w_{\min} + (w_{\max} - w_{\min}) \frac{s_i - s_{\min}}{s_{\max} - s_{\min} + \varepsilon} \right], \quad (8)$$

where $s_{\min}$ and $s_{\max}$ are computed over the selected region. The corrected target-resolution clean latent is obtained through Artifact-Aware Consistency Lift:

$$\hat{z}_{0,t_r}^H = z^{\text{lat}} + W \odot \Delta = (1 - W) \odot z^{\text{lat}} + W \odot z^{\text{pix}}. \quad (9)$$

Reliable locations remain on the direct-lift trajectory, whereas locations with larger inconsistency receive stronger correction toward the pixel-VAE anchor. This selective correction reduces artifacts such as ghosting and spatial drift without globally inheriting the over-smoothing of pixel-VAE re-encoding. The corrected result is shown in Figure 2(c).

Finally, we re-noise the corrected clean estimate at t_r under the original flow marginal:

$$z_{t_r}^H = (1 - \tilde{\sigma}_{t_r}) \hat{z}_{0,t_r}^H + \tilde{\sigma}_{t_r} \xi, \quad \xi \sim \mathcal{N}(0, I). \quad (10)$$

Sampling then resumes at the target resolution under the unchanged few-step schedule. SelfLift-zero is training-free and plug-and-play, requiring neither external super-resolution nor additional denoiser evaluations beyond the original sampling schedule.

On-Policy Self Recovery SelfLift-zero provides stable resolution transition and substantial training-free acceleration. SelfLift-rich further advances the efficiency-quality frontier. Although one VAE round trip is inexpensive, its fixed cost becomes more noticeable when sampling requires only a few denoiser evaluations. We therefore distill the complete Artifact-Aware Consistency Lift into a compact latent lifter G_ϕ . For a randomly sampled valid transition step t_r , we parameterize the lifter as a residual update over



Figure 4 Superior visual fidelity of SelfLift under aggressive acceleration on FLUX.2-Klein-9b (4 NFEs). Vanilla, RALU, and Speed show severe artifacts, while MrFlow improves fidelity using a costlier external super-resolution model. SelfLift-zero suppresses artifacts through model-native correction, and SelfLift-rich further restores richer details.

direct latent lifting:

$$\mathcal{G}_\phi(\hat{z}_{0,t_r}^L) = z^{\text{lat}} + \mathcal{R}_\phi(\hat{z}_{0,t_r}^L), \quad (11)$$

$$\mathcal{L}_{\text{lift}} = \mathbb{E}_{c,t_r} \left[\left\| \mathcal{G}_\phi(\hat{z}_{0,t_r}^L) - \text{sg}(\hat{z}_{0,t_r}^H) \right\|_2^2 \right], \quad (12)$$

where $\text{sg}(\cdot)$ denotes stop-gradient. The residual parameterization preserves the state established by the low-resolution prefix and learns only the required transition correction. We instantiate $\mathcal{R}_\phi$ with a compact SwinIR-style network. The resulting 10.8M-parameter lifter replaces the explicit decode–resize–encode path with a single latent-space forward pass, yielding further end-to-end acceleration.

We then freeze $\mathcal{G}_\phi$ and train directly on the progressive-resolution trajectory generated by the student. At each student-visited state $z_{t_k}^S$, the student with parameters θ predicts $\hat{z}_{0,t_k}^S$ from the text condition c , while an EMA self-teacher with parameters $\bar{\theta}$ predicts $\hat{z}_{0,t_k}^T$ using additional high-resolution privileged context. Both predictions are evaluated on the same state, avoiding supervision from an independent full-resolution trajectory. Let $\Phi_{\theta,t_k}(z; c)$ denote the one-step sampling update from t_k to t_{k+1} . We optimize the student using

$$\begin{aligned} \mathcal{L}_{\text{rich}} &= \mathcal{L}_{\text{OPSR}} + \lambda_{\text{dyn}} \mathcal{L}_{\text{dyn}}, \\ \mathcal{L}_{\text{OPSR}} &= \frac{1}{K} \sum_{k=1}^K \left\| \hat{z}_{0,t_k}^S - \text{sg}(\hat{z}_{0,t_k}^T) \right\|_2^2, \\ \mathcal{L}_{\text{dyn}} &= \frac{1}{K} \sum_{k=1}^K \left\| \Phi_{\theta,t_k}(z_{t_k}^S; c) - \text{sg}(\Phi_{\bar{\theta},t_k}(z_{t_k}^S; c)) \right\|_2^2. \end{aligned} \quad (13)$$

where K is the number of supervised denoising steps and θ_0 denotes the frozen pretrained backbone. $\mathcal{L}_{\text{OPSR}}$ transfers dense high-resolution guidance on the student-visited states, while $\mathcal{L}_{\text{dyn}}$ preserves the pretrained few-step dynamics. The rollout is advanced only by the student, with gradients stopped across denoising steps.

At inference, the privileged high-resolution context and EMA self-teacher are removed. SelfLift-rich retains only the adapted prompt-conditioned model and the lightweight latent lifter. Complete inference and training procedures are provided in Appendix A.

4 Experiments

4.1 Settings

Backbones and Inference Protocol. We evaluate SelfLift on FLUX.2-Klein-9b with 4 NFEs and Z-Image-Turbo with 8 NFEs. All images are generated at 1024×1024 , with the low-resolution prefix executed at 512×512 before a single transition to the target resolution. We set $t_r = 3$ and $t_r = 6$, respectively, and use $t_r = 35$ for the complementary 50-NFE experiments unless otherwise specified.

SelfLift Configurations. For SelfLift-zero, we use $(\rho, w_{\min}, w_{\max}) = (0.4, 0.5, 1.0)$ on FLUX.2-Klein-9b and $(0.3, 0.5, 1.0)$ on Z-Image-Turbo. SelfLift-rich employs a 10.8M-parameter SwinIR-style latent lifter [16] trained for 5K iterations with a learning rate of 1×10^{-4} . For On-Policy Self Recovery, we follow D-OPSD’s training configuration [10], set $\lambda_{\text{dyn}} = 80$, and adopt Flow-GRPO’s data proto-

Table 1 End-to-end efficiency and generation quality on FLUX.2-Klein-9b and Z-Image-Turbo. Speedups ($\times$) are relative to Base (50), while parenthesized percentages denote latency reductions from Base (4)/(8). Other parenthesized values are changes from SelfLift-zero. **Green** marks SelfLift improvements, and **red** marks the two lowest latency reductions or two largest quality drops among competing methods. Bold and underline denote the best and second-best non-Base quality results. $\uparrow/\downarrow$ indicate higher/lower is better.

Method	Acceleration		Overall	Image Quality		Text Alignment	
	Latency (s) $\downarrow$	Speedup $\uparrow$	ImageReward $\uparrow$	PickScore $\uparrow$	AestheticScore $\uparrow$	CLIP $\uparrow$	GenEval $\uparrow$
(a) FLUX.2-Klein-9b [2]							
Base (50)	46.053	1.000 $\times$	1.129	22.330	5.465	32.039	0.784
Base (4)	2.665	17.280 $\times$ (+0.0%)	1.312	22.729	5.647	32.342	0.879
Vanilla Cache (2) [18]	1.520	30.310 $\times$ (+43.0%)	1.176 (-0.125)	22.254 (-0.379)	5.586 (-0.062)	32.164 (-0.153)	0.805 (-0.048)
Vanilla Dyres	1.512	30.470 $\times$ (+43.3%)	1.278 (-0.023)	22.504 (-0.129)	5.601 (-0.047)	31.799 (-0.518)	0.782 (-0.071)
LSRNA-RNA [8]	1.660	27.740 $\times$ (+37.7%)	1.254 (-0.047)	22.494 (-0.139)	5.606 (-0.042)	31.749 (-0.568)	0.868 (+0.015)
Bottleneck [34]	1.857	24.800 $\times$ (+30.3%)	1.277 (-0.024)	22.629 (-0.004)	5.655 (+0.007)	32.165 (-0.152)	0.901 (+0.048)
RaLu [9]	1.662	27.700 $\times$ (+37.6%)	1.289 (-0.012)	22.609 (-0.024)	5.621 (-0.027)	32.176 (-0.141)	0.847 (-0.006)
Speed [37]	1.601	28.770 $\times$ (+39.9%)	1.292 (-0.009)	22.583 (-0.050)	5.638 (-0.010)	32.243 (-0.074)	0.850 (-0.003)
MrFlow [43]	2.165	21.270 $\times$ (+18.8%)	1.283 (-0.018)	22.513 (-0.120)	5.601 (-0.047)	32.301 (-0.016)	0.852 (-0.001)
SelfLift-zero	1.643	28.040 $\times$ (+38.3%)	1.301	22.633	5.648	32.317	0.853
SelfLift-rich	1.556	29.610 $\times$ (+41.5%)	1.317 (+0.016)	22.704 (+0.071)	5.688 (+0.040)	32.345 (+0.029)	0.886 (+0.033)
(b) Z-Image-Turbo [33]							
Base (50)	38.562	1.000 $\times$	1.029	22.158	5.533	32.037	0.713
Base (8)	3.591	10.740 $\times$ (+0.0%)	1.090	22.510	5.536	32.091	0.754
TaylorSeer [19]	2.432	15.850 $\times$ (+32.3%)	1.081 (+0.046)	22.430 (-0.004)	5.463 (-0.012)	31.880 (-0.096)	0.728 (-0.021)
Vanilla Dyres	2.585	14.920 $\times$ (+28.0%)	1.011 (-0.024)	22.336 (-0.098)	5.373 (-0.102)	31.302 (-0.674)	0.716 (-0.033)
LSRNA-RNA [8]	2.382	16.190 $\times$ (+33.7%)	0.993 (-0.042)	22.050 (-0.384)	5.389 (-0.086)	31.015 (-0.962)	0.682 (-0.067)
Bottleneck [34]	2.485	15.520 $\times$ (+30.8%)	0.941 (-0.094)	22.196 (-0.238)	5.439 (-0.036)	31.714 (-0.263)	0.763 (+0.014)
Speed [37]	1.987	19.410 $\times$ (+44.7%)	1.004 (-0.031)	22.282 (-0.152)	5.405 (-0.070)	31.971 (-0.005)	0.743 (-0.006)
MrFlow [43]	2.315	16.660 $\times$ (+35.5%)	1.032 (-0.003)	22.380 (-0.054)	5.501 (+0.026)	31.945 (-0.032)	0.740 (-0.009)
SelfLift-zero	2.376	16.230 $\times$ (+33.8%)	1.035	22.434	5.475	31.976	0.749
SelfLift-rich	2.007	19.210 $\times$ (+44.1%)	1.093 (+0.058)	22.499 (+0.065)	5.570 (+0.095)	32.084 (+0.107)	0.770 (+0.021)

Table 2 Complementarity with temporal acceleration on 50-step backbones. S and T denote spatial and temporal acceleration, respectively. SelfLift compounds acceleration to $5.60\times/4.58\times$ while keeping every quality drop below 5% versus Base (50).

Model	Method	Accel.	Acceleration		Overall	Image Quality		Text Alignment	
			Latency (s) $\downarrow$	Speedup $\uparrow$	ImageReward $\uparrow$	PickScore $\uparrow$	AestheticScore $\uparrow$	CLIP $\uparrow$	GenEval $\uparrow$
FLUX.2 Klein-9b	SelfLift-zero	S	23.966	1.920 $\times$	1.110	22.344	5.456	32.297	0.817
	+ TeaCache	S + T	11.093	4.150 $\times$	1.119	22.356	5.474	31.994	0.774
	+ TaylorSeer ($N=3$)	S + T	11.130	4.140 $\times$	1.120	22.329	5.452	32.120	0.812
	+ TaylorSeer ($N=5$)	S + T	8.225	5.600 $\times$	1.102 (-2.39%)	22.249 (-0.36%)	5.421 (-0.81%)	31.805 (-0.73%)	0.782 (-0.26%)
Z-Image	SelfLift-zero	S	17.689	2.180 $\times$	1.013	22.044	5.540	32.083	0.717
	+ TeaCache	S + T	10.107	3.820 $\times$	1.022	22.136	5.564	31.960	0.695
	+ TaylorSeer ($N=3$)	S + T	10.752	3.590 $\times$	1.032	22.166	5.536	32.020	0.701
	+ TaylorSeer ($N=5$)	S + T	8.424	4.580 $\times$	1.018 (-1.07%)	22.078 (-0.36%)	5.493 (-0.72%)	31.810 (-0.71%)	0.682 (-4.35%)

col [20]. Specifically, we sample 40K prompts from the Pick-a-Pic training split [12], a GenEval pool deduplicated against the official test set [6], and a visual text-rendering training set, with probabilities 0.7/0.2/0.1. All training is conducted on 8 high-performance GPUs with a per-device batch size of 1. Additional details, including complete hyperparameter configurations and training costs, are provided in Appendix C.

Evaluation Metrics. End-to-end latency is measured on a single GPU under the same hardware setting, using 10 warm-up runs followed by the mean of 50 generations. Speedup is computed relative to the

corresponding 50-NFE backbone. ImageReward [38] measures overall generation quality, PickScore [12] and AestheticScore [31] assess preference and aesthetics, while CLIPScore [7] and GenEval evaluate text-image alignment and compositional instruction following. Evaluation uses the corresponding test sets. GenEval uses fixed 300 random official test prompts. All other metrics use an equally sized, predefined balanced set drawn uniformly from DrawBench [29], Pick-a-Pic, and corresponding visual text rendering test split. All scores are averaged over three shared seeds, yielding 900 paired generations per method.

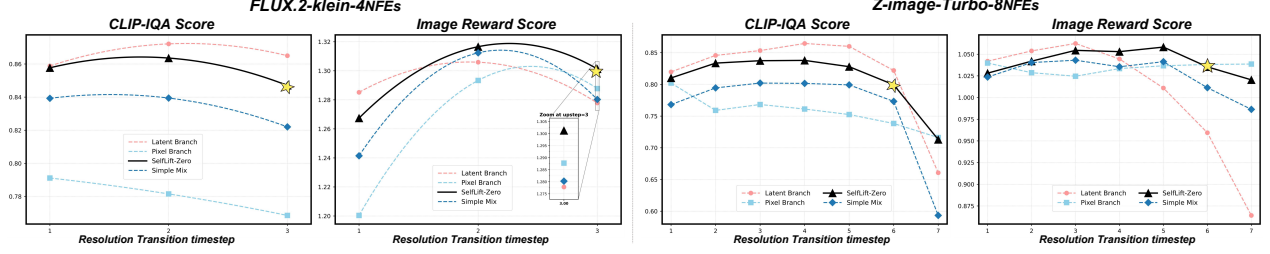


Figure 5 Transition-strategy ablation across resolution-transition steps. CLIP-IQA [35] measures visual sharpness, while ImageReward evaluates prompt-aligned quality. Stars mark the SelfLift-zero operating points with the best sharpness-alignment trade-off.

Table 3 Ablation of On-Policy Self Recovery on FLUX.2-Klein-9b. All learned variants use the same transition step $t_r = 3$.

Variant	Acceleration		Quality	
	Latency (s)↓	Speedup↑	ImageReward↑	CLIP↑
SelfLift-zero	1.642	28.04×	1.3013	32.317
- Learned Latent Lifter	1.556	29.61×	<u>1.3031</u>	<u>32.305</u>
- Off-Policy Distillation	1.556	29.61×	1.1741	31.315
- OPSR w/o $\mathcal{L}_{\text{dyn}}$	1.556	29.61×	1.1813	31.813
SelfLift-rich	1.556	29.61×	1.3171	32.345

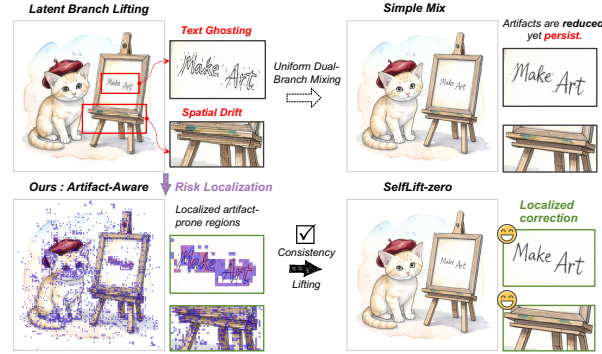


Figure 6 Artifact localization and selective correction. Uniform mixing only attenuates ghosting and drift, whereas SelfLift-zero corrects localized high-risk regions while preserving reliable details.

4.2 Main Results

Few-Step Results. We compare SelfLift with representative temporal acceleration methods, including TeaCache and TaylorSeer, and spatial acceleration methods, including Bottleneck, RaLu, Speed, and MrFlow. Table 1 and Figure 4 summarize the few-step results. Existing progressive-resolution methods often suffer from transition artifacts and spatial drift, while MrFlow improves fidelity using an external super-resolution model at lower efficiency. In contrast, training-free SelfLift-zero achieves 28.04× and 16.23× speedups on FLUX.2-Klein-9b and Z-

Image-Turbo while maintaining strong overall quality. SelfLift-rich further reduces the native few-step latency by 41.5% and 44.1%, reaching 29.61× and 19.21× overall speedups. It consistently improves all reported metrics over SelfLift-zero and achieves the best ImageReward, PickScore, AestheticScore, and CLIPScore among accelerated methods on both backbones. These results show that SelfLift provides a favorable speed-quality trade-off for aggressive few-step inference.

Generality and Orthogonality. Although our main focus is accelerating few-step models, SelfLift-zero is a plug-and-play spatial acceleration method orthogonal to temporal acceleration. As a complementary evaluation, Table 2 applies it directly to 50-step backbones and combines it with TeaCache and TaylorSeer. SelfLift-zero alone achieves 1.92×/2.18× speedups, increasing to 5.60×/4.58× with temporal acceleration, while keeping the degradation across all evaluation metrics below 5% relative to the corresponding base models. This strong multiplicative gain shows that SelfLift provides complementary spatial efficiency, enabling additional acceleration across both distilled and standard diffusion models. Further experiments are provided in the Appendix D.

4.3 Ablation Study

We conduct controlled ablations of SelfLift’s two key principles: spatially adaptive transition correction in SelfLift-zero and trajectory-aligned self-recovery in SelfLift-rich. Together, they suppress transition artifacts, recover high-resolution details, and preserve few-step dynamics.

Ablation of Artifact-Aware Consistency Lift. We examine whether reliable resolution transition can be achieved by either transition route alone or by fixed global fusion. Figure 5 compares direct latent lifting, pixel-VAE re-encoding, uniform 0.5 mixing,

and SelfLift-zero across transition steps on FLUX.2-Klein-9b and Z-Image-Turbo. Later transitions provide greater acceleration but leave less high-resolution recovery. The pixel branch remains stable but consistently over-smooths the output, resulting in low CLIP-IQA. The latent branch preserves sharpness, yet ghosting and spatial drift increasingly degrade ImageReward at late transitions, particularly on Z-Image-Turbo. Uniform mixing only interpolates between these failures because branch reliability varies spatially. In contrast, SelfLift-zero consistently maintains the strongest joint sharpness and prompt-aligned quality across both backbones. Figure 6 further shows that the consistency residual localizes artifact-prone regions, enabling selective correction while preserving reliable latent details.

Ablation of On-Policy Self Recovery. Table 3 isolates the latent lifter, trajectory-aligned supervision, and dynamics preservation. Replacing the pixel-VAE round trip with the learned lifter reduces latency from 1.642s to 1.556s while preserving quality. Off-policy distillation substantially degrades ImageReward and CLIPScore, confirming the mismatch between off-policy teacher states and student-visited states. On-policy supervision alleviates this mismatch but remains insufficient without $\mathcal{L}_{\text{dyn}}$. The full model improves ImageReward from 1.1813 to 1.3171 and CLIPScore from 31.813 to 32.345 at the same inference cost, demonstrating that trajectory-aligned supervision and dynamics preservation are jointly necessary.

5 Limitations and Discussion

While SelfLift demonstrates competitive empirical performance, its self-recovering design builds on capabilities increasingly available in modern multimodal generative models, including native multi-resolution support and image-conditioned editing. SelfLift-zero is training-free and plug-and-play across compatible model families. Its applicability and practical adaptation are discussed further in Appendix E. The effectiveness of SelfLift-rich also depends on the quality of its internal self-teacher. We mitigate this dependence through high-quality prompt-reference curation before training, enabling the internal teacher to provide reliable high-resolution guidance along student-visited trajectories. Importantly, this reliance on the model itself is also what enables SelfLift’s self-contained design, without introducing a separately trained teacher or an external reward model. Developing stronger self-teachers and more effective

trajectory-aligned supervision remains an important direction for future work.

6 Conclusion

We introduced SelfLift for reliable progressive-resolution inference in few-step diffusion models. SelfLift-zero selectively corrects transition artifacts without training or external super-resolution, while SelfLift-rich learns high-resolution recovery directly on student-visited trajectories. SelfLift reduces the native few-step latency by 41.5%/44.1% on FLUX.2-Klein-9b and Z-Image-Turbo and, together with timestep distillation, achieves overall speedups of $29.61\times/19.21\times$ over the corresponding 50-step models.

References

- [1] Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos Garea, Matthieu Geist, and Olivier Bachem. On-policy distillation of language models: Learning from self-generated mistakes. In *International Conference on Learning Representations*, 2024.
- [2] Black Forest Labs. FLUX.2 [klein]: Towards interactive visual intelligence. <https://bfl.ai/blog/flux-2-klein-towards-interactive-visual-intelligence>, 2026.
- [3] Shoufa Chen, Chongjian Ge, Shilong Zhang, Peize Sun, and Ping Luo. PixelFlow: Pixel-space generative models with flow, 2025.
- [4] Zhenbang Du, Yonggan Fu, Lifu Wang, Jiayi Qian, Xiao Luo, and Yingyan Celine Lin. Fewer denoising steps or cheaper per-step inference: Towards compute-optimal diffusion model deployment. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3001–3010, 2025.
- [5] Zhen Fang, Wenxuan Huang, Yu Zeng, Yiming Zhao, Shuang Chen, Kaituo Feng, Yunlong Lin, Lin Chen, Zehui Chen, Shaosheng Cao, and Feng Zhao. Flowopd: On-policy distillation for flow matching models, 2026. URL <https://arxiv.org/abs/2605.08063>.
- [6] Dhruva Ghosh, Hannaneh Hajishirzi, and Ludwig Schmidt. GenEval: An object-focused framework for evaluating text-to-image alignment. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- [7] Jack Hessel, Ari Holtzman, Maxwell Forbes, Ronan Le Bras, and Yejin Choi. CLIPScore: A reference-free evaluation metric for image captioning. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages

- 7514–7528. Association for Computational Linguistics, 2021. doi: 10.18653/v1/2021.emnlp-main.595.
- [8] Jinho Jeong, Sangmin Han, Jinwoo Kim, and Seon Joo Kim. Latent space super-resolution for higher-resolution image generation with diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2355–2365, 2025.
 - [9] Wongi Jeong, Kyungryeol Lee, Hoigi Seo, and Se Young Chun. Training-free mixed-resolution latent upsampling for spatially accelerated diffusion transformers, 2025.
 - [10] Dengyang Jiang, Xin Jin, Dongyang Liu, Zanyi Wang, Mingzhe Zheng, Ruoyi Du, Xiangpeng Yang, Qilong Wu, Zhen Li, Peng Gao, Harry Yang, and Steven Hoi. D-opsd: On-policy self-distillation for continuously tuning step-distilled diffusion models, 2026. URL <https://arxiv.org/abs/2605.05204>.
 - [11] Yang Jin, Zhicheng Sun, Ningyuan Li, Kun Xu, Kun Xu, Hao Jiang, Nan Zhuang, Quzhe Huang, Yang Song, Yadong Mu, and Zhouchen Lin. Pyramidal flow matching for efficient video generative modeling, 2025. URL <https://arxiv.org/abs/2410.05954>.
 - [12] Yuval Kirstain, Adam Polyak, Uriel Singer, Shahbuland Matiana, Joe Penna, and Omer Levy. Pick-a-pic: An open dataset of user preferences for text-to-image generation. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
 - [13] Haoyu Li, Tingyan Wen, Lin Qi, Zhe Wu, Yihuang Chen, Xing Zhou, Lifei Zhu, Xueqian Wang, and Kai Zhang. 1.x-distill: Breaking the diversity, quality, and efficiency barrier in distribution matching distillation, 2026. URL <https://arxiv.org/abs/2604.04018>.
 - [14] Hui Li, Baoyou Chen, Jiaye Li, Jingdong Wang, and Siyu Zhu. Pyramid patchification flow for visual generation. In *International Conference on Learning Representations*, 2026.
 - [15] Quanhao Li, Junqiu Yu, Kaixun Jiang, Yujie Wei, Zhen Xing, Pandeng Li, Ruihang Chu, Shiwei Zhang, Yu Liu, and Zuxuan Wu. Diffusionopd: A unified perspective of on-policy distillation in diffusion models, 2026. URL <https://arxiv.org/abs/2605.15055>.
 - [16] Jingyun Liang, Jiezhong Cao, Guolei Sun, Kai Zhang, Luc Van Gool, and Radu Timofte. SwinIR: Image restoration using swin transformer. In *Proceedings of the IEEE/CVF International Conference on Computer Vision Workshops*, pages 1833–1844, 2021.
 - [17] Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, and Matt Le. Flow matching for generative modeling. In *International Conference on Learning Representations*, 2023.
 - [18] Feng Liu, Shiwei Zhang, Xiaofeng Wang, Yujie Wei, Haonan Qiu, Yuzhong Zhao, Yingya Zhang, Qixiang Ye, and Fang Wan. Timestep embedding tells: It’s time to cache for video diffusion model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7353–7363, 2025.
 - [19] Jiacheng Liu, Chang Zou, Yuanhuiyi Lyu, Junjie Chen, and Linfeng Zhang. From reusing to forecasting: Accelerating diffusion models with TaylorSeers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 15853–15863, 2025.
 - [20] Jie Liu, Gongye Liu, Jiajun Liang, Yangguang Li, Jiaheng Liu, Xintao Wang, Pengfei Wan, Di Zhang, and Wanli Ouyang. Flow-GRPO: Training flow matching models via online RL. In *Advances in Neural Information Processing Systems*, volume 38, 2025.
 - [21] Xingchao Liu, Xiwen Zhang, Jianzhu Ma, Jian Peng, and Qiang Liu. InstaFlow: One step is enough for high-quality diffusion-based text-to-image generation. In *International Conference on Learning Representations*, 2024.
 - [22] Cheng Lu, Yuhao Zhou, Fan Bao, Jianfei Chen, Chongxuan Li, and Jun Zhu. DPM-Solver: A fast ODE solver for diffusion probabilistic model sampling in around 10 steps. In *Advances in Neural Information Processing Systems*, volume 35, pages 5775–5787. Curran Associates, Inc., 2022.
 - [23] Zichen Miao, Zhengyuan Yang, Kevin Lin, Ze Wang, Zicheng Liu, Lijuan Wang, and Qiang Qiu. Tuning timestep-distilled diffusion model using pairwise sample optimization. In *International Conference on Learning Representations*, 2025.
 - [24] Thuan Hoang Nguyen and Anh Tran. SwiftBrush: One-step text-to-image diffusion model with variational score distillation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7807–7816, 2024.
 - [25] William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4195–4205, 2023.
 - [26] Xurui Peng, Chenqian Yan, Hong Liu, Rui Ma, Fangmin Chen, Xing Wang, Zhihua Wu, Songwei Liu, and Mingbao Lin. Ertacache: Error rectification and timesteps adjustment for efficient diffusion, 2026. URL <https://arxiv.org/abs/2508.21091>.
 - [27] Yurui Qian, Qi Cai, Yingwei Pan, Yehao Li, Ting Yao, Qibin Sun, and Tao Mei. Boosting diffusion models with moving average sampling in frequency domain. In *Proceedings of the*

- IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 8911–8920, 2024.
- [28] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10684–10695, 2022.
 - [29] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Seyed Ghasemipour, Burcu Karagol Ayan, S. Sara Mahdavi, Rapha Gontijo Lopes, Tim Salimans, Jonathan Ho, David J Fleet, and Mohammad Norouzi. Photorealistic text-to-image diffusion models with deep language understanding, 2022. URL <https://arxiv.org/abs/2205.11487>.
 - [30] Tim Salimans and Jonathan Ho. Progressive distillation for fast sampling of diffusion models. In *International Conference on Learning Representations*, 2022.
 - [31] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, Patrick Schramowski, Srivatsa Kundurthy, Katherine Crowson, Ludwig Schmidt, Robert Kaczmarczyk, and Jenia Jitsev. LAION-5B: An open large-scale dataset for training next generation image-text models. In *Advances in Neural Information Processing Systems*, volume 35, 2022.
 - [32] Yang Song, Prafulla Dhariwal, Mark Chen, and Ilya Sutskever. Consistency models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 32211–32252. PMLR, 2023.
 - [33] Image Team, Huanqia Cai, Sihan Cao, Ruoyi Du, Peng Gao, Aiming Hao, Steven Hoi, Zhaohui Hou, Shijie Huang, Dengyang Jiang, Yuming Jiang, Xin Jin, Liangchen Li, Zhen Li, Zhong-Yu Li, David Liu, Dongyang Liu, Qilong Wu, Feng Yu, Zechao Zhan, Chi Zhang, Shifeng Zhang, Ruikai Zhou, and Shilin Zhou. Z-image: An efficient image generation foundation model with single-stream diffusion transformer, 2026. URL <https://arxiv.org/abs/2511.22699>.
 - [34] Ye Tian, Xin Xia, Yuxi Ren, Shanchuan Lin, Xing Wang, Xuefeng Xiao, Yunhai Tong, Ling Yang, and Bin Cui. Training-free diffusion acceleration with bottleneck sampling, 2025.
 - [35] Jianyi Wang, Kelvin C. K. Chan, and Chen Change Loy. Exploring clip for assessing the look and feel of images, 2022. URL <https://arxiv.org/abs/2207.12396>.
 - [36] Tingyan Wen, Haoyu Li, Yihuang Chen, Xing Zhou, Lifei Zhu, and Xueqian Wang. No cache left idle: Accelerating diffusion model via extreme-slimming caching, 2025.
 - [37] Howard Xiao, Brian Chao, Lior Yariv, and Gordon Wetzstein. Spectral progressive diffusion for efficient image and video generation, 2026.
 - [38] Jiazheng Xu, Xiao Liu, Yuchen Wu, Yuxuan Tong, Qinkai Li, Ming Ding, Jie Tang, and Yuxiao Dong. ImageReward: Learning and evaluating human preferences for text-to-image generation. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
 - [39] Jing Xu, Yuexiao Ma, Xuzhe Zheng, Xing Wang, Shiwei Liu, Chenqian Yan, Xiawu Zheng, Rongrong Ji, Fei Chao, and Songwei Liu. Motion-aware caching for efficient autoregressive video generation, 2026. URL <https://arxiv.org/abs/2605.01725>.
 - [40] Tianwei Yin, Michaël Gharbi, Taesung Park, Richard Zhang, Eli Shechtman, Frédo Durand, and William T. Freeman. Improved distribution matching distillation for fast image synthesis. In *Advances in Neural Information Processing Systems*, volume 37, pages 47455–47487. Curran Associates, Inc., 2024.
 - [41] Tianwei Yin, Michaël Gharbi, Richard Zhang, Eli Shechtman, Frédo Durand, William T. Freeman, and Taesung Park. One-step diffusion with distribution matching distillation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6613–6623, 2024.
 - [42] Wenliang Zhao, Lujia Bai, Yongming Rao, Jie Zhou, and Jiwen Lu. UniPC: A unified predictor-corrector framework for fast sampling of diffusion models. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
 - [43] Xingyu Zheng, Xianglong Liu, Yifu Ding, Weilun Feng, Junqing Lin, Jinyang Guo, and Haotong Qin. Multi-resolution flow matching: Training-free diffusion acceleration via staged sampling, 2026.

A SelfLift Algorithm

SelfLift adopts a unified progressive-resolution sampling procedure with two transition variants. SelfLift-zero performs Artifact-Aware Consistency Lift, whereas SelfLift-rich replaces the transition with the distilled latent lifter $\mathcal{G}_\phi$ and uses the LoRA-adapted student model. The detailed procedures for SelfLift inference and SelfLift-rich training are provided in Algorithm 1 and Algorithm 2, respectively.

SelfLift Inference (Algorithm 1) follows the low-resolution trajectory to the transition timestep t_r , constructs a reliable target-resolution state using either artifact-aware correction or the learned latent lifter $\mathcal{G}_\phi$, re-noises the clean estimate, and completes the remaining trajectory at high resolution.

SelfLift-rich Training (Algorithm 2) distills the complete zero transition into $\mathcal{G}_\phi$, replacing the explicit pixel-VAE path with a compact latent-space operator. It then performs On-Policy Self Recovery on student-visited states with a dynamics objective that preserves the pretrained few-step trajectory.

Algorithm 1 SelfLift Inference

Require: Prompt c , sampling schedule $\mathcal{T} = \{(t_k, \tilde{\sigma}_{t_k})\}_{k=1}^T$, transition time t_r , mode $m \in \{\text{zero}, \text{rich}\}$
Require: Pretrained model v_{θ_0} , VAE $(\mathcal{D}_L, \mathcal{E}_H, \mathcal{D}_H)$
Require: zero parameters $\eta = (\rho, w_{\min}, w_{\max})$, trained lifter $\mathcal{G}_\phi$ and LoRA-adapted model v_θ
Output: Generated image x_0

- 1: $\tilde{v} \leftarrow v_{\theta_0}$ if $m = \text{zero}$, otherwise $\tilde{v} \leftarrow v_\theta$
// Low-Resolution Rollout
- 2: Sample initial noise $z_1^L \sim \mathcal{N}(0, I)$
- 3: Roll out to t_r : $z_{t_r}^L \leftarrow \Phi_{1 \rightarrow t_r}^L(z_1^L, c, \tilde{v})$
// Resolution Transition
- 4: Predict the clean endpoint: $\hat{z}_{0,t_r}^L \leftarrow z_{t_r}^L - t_r \tilde{v}(z_{t_r}^L, t_r, c)$
- 5: **if** $m = \text{zero}$ **then**
- 6: Construct paired lifts: $(z^{\text{lat}}, z^{\text{pix}})$ $\triangleright$ Eqs. (4)–(5)
- 7: Compute consistency residual: $\Delta \leftarrow z^{\text{pix}} - z^{\text{lat}}$
- 8: Compute artifact-risk map s , top- ρ mask M , and adaptive weights W from Δ $\triangleright$ Eqs. (7)–(8)
- 9: Apply $\hat{z}_{0,t_r}^H \leftarrow z^{\text{lat}} + W \odot \Delta$ $\triangleright$ Eqs. (9)
- 10: **else**
- 11: Apply the distilled lifter: $\hat{z}_{0,t_r}^H \leftarrow \mathcal{G}_\phi(z_{0,t_r}^L)$ $\triangleright$ Eq. (11)
- 12: **end if**
- 13: Sample transition noise $\xi \sim \mathcal{N}(0, I)$
- 14: Re-noise at t_r : $z_{t_r}^H \leftarrow (1 - \tilde{\sigma}_{t_r}) \hat{z}_{0,t_r}^H + \tilde{\sigma}_{t_r} \xi$ $\triangleright$ Eq. (10)
// High-Resolution Rollout
- 15: Resume sampling: $z_0^H \leftarrow \Phi_{t_r \rightarrow 0}^H(z_{t_r}^H, c, \tilde{v})$
- 16: **return** $x_0 \leftarrow \mathcal{D}_H(z_0^H)$

Algorithm 2 SelfLift-rich Training

Require: Frozen model v_{θ_0} , VAE, prompt set $\mathcal{C}$
Require: Training set $\mathcal{D} = \{(c, \text{gt}^H)\}$
Require: Schedule $\mathcal{T}$, transition set $\mathcal{R}$, zero parameters η
Require: Dynamics weight λ_{dyn} , EMA decay β
Output: Lifter $\mathcal{G}_\phi$ and LoRA-adapted student v_θ

// Stage I, Latent Lifter Distillation

- 1: Residual lifter: $\mathcal{G}_\phi(\hat{z}_{0,t_r}^L) \leftarrow z^{\text{lat}} + \mathcal{R}_\phi(\hat{z}_{0,t_r}^L)$
- 2: **for** each lifter-training iteration **do**
- 3: Sample $c \sim \mathcal{C}$ and $t_r \sim \mathcal{R}$
- 4: Obtain $\hat{z}_{0,t_r}^L$ from the frozen low-resolution rollout
- 5: Construct target $\hat{z}_{0,t_r}^{\text{H,zero}}$ with SelfLift-zero $\triangleright$ Eqs. (4)–(9)
- 6: $\mathcal{L}_{\text{liftr}} \leftarrow \left\| \mathcal{G}_\phi(\hat{z}_{0,t_r}^L) - \text{sg}(\hat{z}_{0,t_r}^{\text{H,zero}}) \right\|_2^2$ $\triangleright$ Eq. (12)
- 7: Update ϕ using $\nabla_\phi \mathcal{L}_{\text{liftr}}$
- 8: **end for**
- 9: Freeze $\mathcal{G}_\phi$

// Stage II, On-Policy Self Recovery

- 10: Initialize $v_\theta \leftarrow v_{\theta_0}$ and $v_{\bar{\theta}} \leftarrow v_\theta$
- 11: **for** each recovery-training iteration **do**
- 12: Sample $(c, \text{gt}^H) \sim \mathcal{D}$, $t_r \sim \mathcal{R}$ and $z_{t_1}^S \sim \mathcal{N}(0, I)$
- 13: **for** $k = 1, \dots, K$ **do**
- 14: **if** $t_k = t_r$ **then**
- 15: Apply frozen $\mathcal{G}_\phi$ and re-noise the state
- 16: **end if**
- 17: Student endpoint: $\hat{z}_{0,t_k}^S \leftarrow z_{t_k}^S - t_k v_\theta(z_{t_k}^S, t_k, c)$
- 18: Teacher endpoint:
- 19: $\hat{z}_{0,t_k}^T \leftarrow z_{t_k}^S - t_k v_{\bar{\theta}}(z_{t_k}^S, t_k, c, \text{gt}^H)$
- 20: $\ell_{\text{OPSR}}^{(k)} \leftarrow \left\| \hat{z}_{0,t_k}^S - \text{sg}(\hat{z}_{0,t_k}^T) \right\|_2^2$ $\triangleright$ Eq. (13)
- 21: Student one-step transition:
- 22: $z_{t_{k+1}}^S \leftarrow \Phi_{\theta,t_k}(z_{t_k}^S, c)$
- 23: Frozen-backbone reference:
- 24: $z_{t_{k+1}}^0 \leftarrow \Phi_{\theta_0,t_k}(z_{t_k}^S, c)$
- 25: $\ell_{\text{dyn}}^{(k)} \leftarrow \left\| z_{t_{k+1}}^S - \text{sg}(z_{t_{k+1}}^0) \right\|_2^2$ $\triangleright$ Eq. (13)
- 26: Detach before the next timestep:
- 27: $z_{t_{k+1}}^S \leftarrow \text{sg}(z_{t_{k+1}}^S)$ $\triangleright$ stop gradients across steps
- 28: **end for**
- 29: $\mathcal{L}_{\text{OPSR}} \leftarrow K^{-1} \sum_{k=1}^K \ell_{\text{OPSR}}^{(k)}$
- 30: $\mathcal{L}_{\text{dyn}} \leftarrow K^{-1} \sum_{k=1}^K \ell_{\text{dyn}}^{(k)}$
- 31: $\mathcal{L}_{\text{rich}} \leftarrow \mathcal{L}_{\text{OPSR}} + \lambda_{\text{dyn}} \mathcal{L}_{\text{dyn}}$ $\triangleright$ Eq. (13)
- 32: Update the student LoRA using $\nabla_\theta \mathcal{L}_{\text{rich}}$
- 33: $\bar{\theta} \leftarrow \beta \bar{\theta} + (1 - \beta) \theta$
- 34: **end for**
- 35: Discard $v_{\bar{\theta}}$ and gt^H
- 36: **return** $\mathcal{G}_\phi$ and v_θ

B Consistency Analysis

Observation 1 in Sec. 3.2 shows that direct latent lifting preserves continuity with the preceding low-resolution trajectory, but may introduce decodable inconsistencies due to its structural mismatch with the native high-resolution VAE latent distri-

bution. The key intuition is that a latent lying in a stable, VAE-consistent region should be approximately preserved after a target-VAE decode–encode round trip, whereas an unsupported latent may undergo an abnormally large change. We examine this phenomenon through the following calibration experiment.

Calibration setup. We construct a small calibration set of $N = 1,000$ native 1024×1024 images on FLUX.2-Klein. For each image x^H , we obtain $x^L = \mathcal{S}_\downarrow(x^H)$ and $z^L = \mathcal{E}_L(x^L)$, where $\mathcal{S}_\downarrow$ down-samples the image to 512×512 . We compare the native HR latent $z^{\text{nat}} = \mathcal{E}_H(x^H)$, the directly lifted latent $z^{\text{lat}} = \mathcal{U}^{\text{lat}}(z^L)$, and the pixel-VAE latent $z^{\text{pix}} = \mathcal{E}_H(\mathcal{U}^{\text{pix}}(\mathcal{D}_L(z^L)))$. Here, z^{nat} serves as the normal round-trip reference, z^{lat} uses nearest-neighbor latent lifting, and z^{pix} is obtained through low-resolution decoding, pixel-space resizing, and target-resolution re-encoding.

Round-trip metric. For a target-resolution latent $z \in \mathbb{R}^{C \times H \times W}$, we define

$$\begin{aligned} \mathcal{P}_H(z) &= \mathcal{E}_H(\mathcal{D}_H(z)), \\ e_{\text{VAE}}(z) &= \frac{1}{CHW} \|\mathcal{P}_H(z) - z\|_2^2. \end{aligned} \quad (14)$$

Here, $\mathcal{P}_H$ performs one target-VAE decode–encode round trip, and $e_{\text{VAE}}(z)$ measures the resulting latent change. A small value indicates a stable, VAE-consistent representation, whereas an abnormally large value indicates a shift toward a VAE-inconsistent region.

Table 4 Target-VAE round-trip consistency on 1,000 calibration samples.

Representation	Mean e_{VAE}	/ Native	Behavior
Native HR latent	0.01894	1.00×	Stable
Pixel-VAE re-encoding	0.02717	1.43×	Stable
Direct latent lifting	0.35859	18.93×	Abnormal

Results. As shown in Table 4 and Fig. 7, native HR and pixel-VAE latents remain stable after the round trip, with small mean energies. In contrast, direct latent lifting yields an abnormally large energy of 0.35859, which is 18.93× the native baseline and 13.20× the pixel-VAE energy. This separation holds for all 1,000 samples, while pixel-VAE re-encoding closes 97.4% of the direct-lift–native energy gap on average.

These results verify that direct latent lifting shifts the representation toward a VAE-inconsistent and

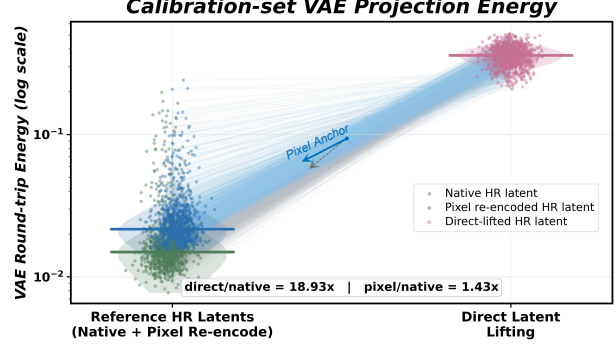


Figure 7 Target-VAE round-trip consistency. Native HR and pixel-VAE latents remain stable, whereas directly lifted latents exhibit substantially larger round-trip changes.

unstable latent region, rather than merely changing its spatial resolution. Because the shifted latent is directly processed by the target-resolution decoder, its unsupported components become decoder-visible and can manifest as the ghosting, structural distortion, and spatial drift shown in Fig. 2(a). Pixel-VAE re-encoding instead remains close to the stable native HR latent regime and provides a practical paired anchor when the corresponding native HR latent is unavailable during inference.

C Experimental Details

We report the implementation details required to reproduce the main experiments. All evaluations generate 1024×1024 images using FLUX.2-Klein-9b with 4 NFEs and Z-Image-Turbo with 8 NFEs. We first report the additional architecture and optimization settings of SelfLift-rich, followed by the exact configurations of the compared acceleration methods.

C.1 SelfLift Hyperparameters

SelfLift-zero is training-free and uses the correction parameters reported in the main paper. SelfLift-rich additionally employs a compact SwinIR-style latent lifter and lightweight LoRA adaptation through On-Policy Self Recovery. Table 6 lists the architecture and optimization details omitted from the main text.

C.2 Baseline Implementation Details

We use the official implementations or released configurations of all compared methods without altering their core acceleration mechanisms. Unless defined otherwise by the original method, spatial baselines use a 512×512 low-resolution stage and transition

Table 5 Baseline settings used in the main few-step comparison. Within the spatial-acceleration block, ✓ denotes direct latent lifting, while ✗ is followed by the alternative transition mechanism.

Method	Accel.	Core Config.	FLUX.2-Klein-9b		Z-Image-Turbo	
			NFEs	Parameters	NFEs	Parameters
<i>Reference Models</i>						
Base (full)	–	Native full-resolution inference.	50	Full 1024 ² resolution.	50	Full 1024 ² resolution.
Base (distilled)	–	Native few-step inference.	4	Original 4-NFE schedule.	8	Original 8-NFE schedule.
<i>Temporal Acceleration</i>						
Vanilla Cache	T	TeaCache-style feature reuse.	4	Cache steps 1 and 3.	–	–
TaylorSeer	T	Taylor-based feature forecasting.	–	–	8	Official main-table setting.
<i>Spatial Acceleration</i>						
Vanilla	✓	LR prefix with direct latent lifting.	4	512 ² → 1024 ² , $t_r = 3$, shift 0.97.	8	512 ² → 1024 ² , $t_r = 6$.
DyRes	✓	Canny-guided RNA after latent lifting.	4	$t_r = 3$, $e_{\min} = 0.97$, $e_{\max} = 1.30$.	8	$t_r = 6$, same Canny-RNA rule.
LSRNA-RNA	✓	High–low–high bottleneck sampling.	4	1024 ² → 512 ² → 1024 ² , transition steps (1, 3).	8	1024 ² → 512 ² → 1024 ² , transition steps (1, 6).
Bottleneck	✓	Region-adaptive lifting with timestep matching.	4	$N = (2, 1, 1)$, $e = (0.092, 0.233, 1)$, transition ratio = 0.30.	–	–
RaLu	✓	Spectral progressive-resolution sampling.	4	DCT expansion, $t_r = 3$, shift 0.97.	8	DCT expansion, $t_r = 6$.
Speed	✗ : DCT	Pixel-space SR, VAE re-encoding, and one-step HR denoising.	4	$(N_{\text{LR}}, N_{\text{ref}}) = (4, 1)$, Real-ESRGAN $\times 2$.	8	$(N_{\text{LR}}, N_{\text{ref}}) = (8, 1)$, Real-ESRGAN $\times 2$.
MrFlow	✗ : Pixel SR		4+1		8+1	

Table 6 Additional architecture, optimization, and training-cost details of SelfLift-rich.

Category	Parameter	Value
Latent Lifter	Input channels / scale	128 / ×2
	Embedding dimension	192
	Transformer depths	(6, 6, 6, 6)
	Attention heads	(8, 8, 8, 8)
	Window size / MLP ratio	8 / 2.5
	Drop-path rate	0.15
On-Policy Self Recovery	LoRA rank / alpha	64 / 128
	Student learning rate	2×10^{-5}
	EMA decay	0.9999
	Optimizer / betas	AdamW / (0.9, 0.999)
	Weight decay	0
	Gradient clipping	1.0
	Max iterations	3000
Training	Batch size	1 per device
	Gradient accumulation	1
	Mixed precision	bf16
Training Cost	Hardware	8× GPU 80GB
	Latent lifter	5.56 GPU-h
	LoRA adapter	56.8 GPU-h

to 1024×1024 at $t_r = 3$ on FLUX.2-Klein-9b and $t_r = 6$ on Z-Image-Turbo. MrFlow retains its original pixel-space super-resolution pipeline. The shared mechanism and model-specific settings of each baseline are summarized in Table 5.

C.3 Evaluation Protocol and Metrics

All methods follow a unified protocol. GenEval uses its 300 official prompts, while other metrics use a predefined balanced set of 300 prompts sampled uniformly from DrawBench, the Pick-a-Pic test set, and

the visual text-rendering test split. Using shared seeds {0, 42, 128}, each main-table score averages 900 paired generations per method and backbone.

- **Inference efficiency:** End-to-end latency is measured on a single high-performance GPU using 10 warm-up runs followed by the average of 50 generations. Speedup is computed relative to Base (50), while latency reduction is measured against Base (4)/(8).
- **Overall generation quality:** We use ImageReward to assess the overall quality of generated images while accounting for their consistency with the input prompts.
- **Image quality and human preference:** PickScore evaluates preference-aligned visual quality, while AestheticScore measures the aesthetic appeal of the generated images.
- **Text alignment and instruction following:** CLIP-Score measures global text–image semantic alignment. GenEval further evaluates compositional instruction following, including object counting, attribute binding, spatial relations, and color attribution.
- **Transition-quality ablation:** In the resolution-transition ablations, we additionally report CLIP-IQA as a sharpness-sensitive perceptual quality metric. It serves as a proxy for blur and visual-quality degradation introduced by different transition strategies.

C.4 Runtime Breakdown

We further decompose the inference latency of FLUX.2-Klein-9b to identify the sources of SelfLift’s efficiency gains. All directly profiled results follow the main evaluation protocol, using 10 warm-up generations followed by 50 timed samples on a single GPU. Calculations use the unrounded measurements, ensuring that the accumulated stage costs exactly recover the corresponding end-to-end latency.

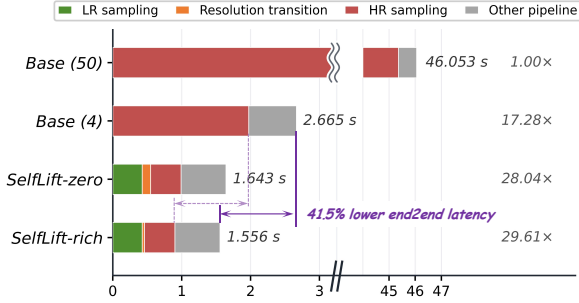


Figure 8 Stage-wise runtime breakdown on FLUX.2-Klein-9b. SelfLift-rich reduces end-to-end latency by 41.5% relative to Base (4), while its 3-LR+1-HR schedule reduces denoising latency by 56.0%.

Table 7 Stage-wise runtime breakdown on FLUX.2-Klein-9b. Times are reported in seconds per image. Totals are computed from full-precision measurements, while displayed values are rounded to three decimals.

Component	Base (50)	Base (4)	SelfLift zero	SelfLift rich
Sampling allocation	50×2 HR	4 HR	3 L+1 H	3 L+1 H
LR sampling	—	—	0.427	0.427
HR sampling	45.362	1.973	0.441	0.441
Resolution transition	—	—	0.123	0.033
Other pipeline	0.691	0.692	0.652	0.655
Total latency	46.053	2.665	1.643	1.556
Speedup	1.00×	17.28×	28.04×	29.61×

D Extended Experiments

D.1 Ablations of SelfLift-zero

We further examine the two key factors governing SelfLift-zero: the spatial extent and strength of artifact-aware correction, controlled by ρ and $[w_{\min}, w_{\max}]$, and the resolution-transition timestep t_r . The former determines how the pixel-VAE anchor corrects the directly lifted latent, while the latter controls the trade-off between low-resolution computation and the remaining high-resolution recovery budget.

D.1.1 Correction Parameters

SelfLift-zero uses ρ to select artifact-prone locations and $[w_{\min}, w_{\max}]$ to control the correction magnitude. Table 10 isolates their effects through one-factor-at-a-time ablations: three neighboring ρ values on each backbone and two alternative weight ranges on FLUX.2-Klein-9b. All settings follow the main protocol with $t_r = 3$ and $t_r = 6$, respectively. Since these parameters do not change the sampling schedule or the number of model evaluations, latency remains unchanged.

Table 10 Parameter ablation of SelfLift-zero. Main-paper settings are bold. Panel (a) reports ImageReward and CLIP-IQA on both backbones. Panel (b) reports the remaining FLUX.2-Klein-9b evaluation metrics.

(a) Correction parameters and primary metrics					
ID	ρ	$w_{\min}$	$w_{\max}$	ImageReward↑	CLIP-IQA↑
FLUX.2-Klein-9b: selected-region ratio					
F1	0.3	0.5	1.0	1.2948	0.8510
F2	0.4	0.5	1.0	1.3013	0.8470
F3	0.5	0.5	1.0	1.2967	0.8390
Z-Image-Turbo: selected-region ratio					
Z1	0.2	0.5	1.0	1.0278	0.8020
Z2	0.3	0.5	1.0	1.0354	0.7994
Z3	0.4	0.5	1.0	1.0306	0.7870
FLUX.2-Klein-9b: correction weights (default: F2)					
W1	0.4	0.5	0.5	1.2899	0.8500
W2	0.4	0.8	1.0	1.2938	0.8360
(b) Remaining FLUX.2-Klein-9b metrics					
ID	PickScore↑	Aesthetic↑	CLIP↑	GenEval↑	
F1	22.612	5.654	32.300	0.848	
F2	22.633	5.648	32.317	0.853	
F3	22.621	5.639	32.306	0.850	
W1	22.602	5.651	32.291	0.846	
W2	22.615	5.635	32.300	0.849	

Across both backbones, smaller ρ confines correction to high-risk regions, preserving sharpness but leaving more artifacts, whereas larger ρ improves stability at the cost of smoothing. We therefore use $\rho = 0.4$ for FLUX.2-Klein-9b and $\rho = 0.3$ for Z-Image-Turbo. The range $[w_{\min}, w_{\max}]$ controls correction strength: $w_{\min}$ sets the correction floor, while $w_{\max}$ caps correction in the most inconsistent regions. Increasing $w_{\min}$ suppresses transition artifacts and produces more stable outputs, but may reduce CLIP-IQA through over-smoothing. The default $[0.5, 1.0]$ balances stability and sharpness and can be adjusted with negligible overhead across model families. For aggressive transitions or transition-sensitive tasks such as text rendering, a larger $w_{\min}$ is recommended to obtain stronger pixel-VAE correction and more

Table 8 Complete transition-strategy ablation corresponding to Fig. 5 of the main paper. Bold values denote the SelfLift-zero operating points adopted in the main experiments: $t_r = 3$ for FLUX.2-Klein-9b and $t_r = 6$ for Z-Image-Turbo.

Metric	Transition strategy	FLUX.2-Klein-9b (4 NFes)			Z-Image-Turbo (8 NFes)						
		$t_r = 1$	$t_r = 2$	$t_r = 3$	$t_r = 1$	$t_r = 2$	$t_r = 3$	$t_r = 4$	$t_r = 5$	$t_r = 6$	$t_r = 7$
ImageReward $\uparrow$	Latent branch	1.2852	1.3059	1.2778	1.0419	1.0538	1.0624	1.0445	1.0110	0.9594	0.8641
	Pixel branch	1.2004	1.2934	1.2878	1.0398	1.0287	1.0246	1.0334	1.0366	1.0382	1.0386
	Simple mix	1.2414	1.3124	1.2803	1.0236	1.0404	1.0431	1.0355	1.0413	1.0114	0.9864
	SelfLift-zero	1.2674	1.3166	1.3013	1.0281	1.0420	1.0544	1.0529	1.0582	1.0354	1.0204
CLIP-IQA $\uparrow$	Latent branch	0.8588	0.8721	0.8650	0.8197	0.8458	0.8534	0.8645	0.8600	0.8220	0.6606
	Pixel branch	0.7911	0.7815	0.7686	0.8021	0.7590	0.7683	0.7612	0.7525	0.7383	0.7162
	Simple mix	0.8393	0.8394	0.8220	0.7682	0.7945	0.8021	0.8016	0.7992	0.7732	0.5933
	SelfLift-zero	0.8577	0.8636	0.8470	0.8102	0.8336	0.8374	0.8379	0.8280	0.7994	0.7130

Table 9 Complete ablation of On-Policy Self Recovery on FLUX.2-Klein-9b. All learned variants use the same transition step $t_r = 3$. Bold denotes the full SelfLift-rich model with $\lambda_{\text{dyn}} = 80$, while underline marks the strongest non-default variant for each quality metric.

Variant	λ_{dyn}	Acceleration		Overall	Image Quality		Text Alignment	
		Latency (s) $\downarrow$	Speedup $\uparrow$	ImageReward $\uparrow$	PickScore $\uparrow$	AestheticScore $\uparrow$	CLIP $\uparrow$	GenEval $\uparrow$
SelfLift-zero	–	1.643	28.04 $\times$	1.3013	22.6326	5.6481	32.317	0.8528
+ Learned latent lifter $\mathcal{G}_\phi$	–	1.556	29.61 $\times$	1.3031	22.6737	5.6447	32.305	0.8554
+ Off-policy distillation	–	1.556	29.61 $\times$	1.1741	22.4648	5.5380	31.315	0.8084
+ OPSR w/o $\mathcal{L}_{\text{dyn}}$	0	1.556	29.61 $\times$	1.1813	22.6381	5.6380	31.813	0.8292
+ OPSR	40	1.556	29.61 $\times$	<u>1.3048</u>	<u>22.6819</u>	<u>5.6706</u>	32.247	<u>0.8701</u>
SelfLift-rich	80	1.556	29.61$\times$	1.3171	22.7036	5.6875	32.345	0.8858
+ OPSR	120	1.556	29.61 $\times$	1.3038	22.6467	5.6532	<u>32.319</u>	0.8571

reliable generation.

D.1.2 Resolution-Transition Timestep

Table 8 reports the complete numerical results corresponding to Fig. 5 of the main paper. We evaluate the latent branch, pixel branch, simple mix, and SelfLift-zero at every valid resolution-transition timestep on both backbones.

D.2 Ablation of On-Policy Self Recovery

Increasing t_r preserves more computation at low resolution and therefore provides greater acceleration, but leaves fewer high-resolution steps for recovering transition errors. Direct latent lifting retains relatively high sharpness at moderate transition timesteps, yet its prompt-aligned quality degrades sharply under aggressive late transitions, particularly on Z-Image-Turbo. Pixel-VAE re-encoding remains more stable at late timesteps but consistently exhibits lower CLIP-IQA because of over-smoothing. Simple mixing merely interpolates between these two failure modes. SelfLift-zero instead maintains a favorable sharpness-alignment trade-off at the selected operat-

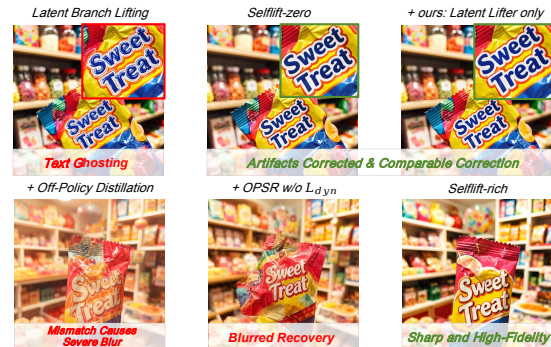


Figure 9 Qualitative ablation of On-Policy Self Recovery. Top: SelfLift-zero and the learned lifter correct direct-lifting ghosting, with the latter bypassing the pixel-VAE path. Bottom: off-policy distillation produces blur, removing $\mathcal{L}_{\text{dyn}}$ weakens recovery, and SelfLift-rich remains sharp.

ing points, $t_r = 3$ for FLUX.2-Klein-9b and $t_r = 6$ for Z-Image-Turbo.

To complement the main-paper OPSR ablation, we provide qualitative evidence and a controlled study on FLUX.2-Klein-9b. We isolate three additions to



Figure 10 Additional validation of artifact localization. Predicted high-risk regions align with visible ghosting and spatial drift. Selective correction removes these localized artifacts, whereas uniform mixing leaves residual distortions. This extends Fig. 6 of the main paper.

SelfLift-zero: a learned lifter replacing the pixel-VAE round trip, trajectory-aligned on-policy supervision, and dynamics preservation. All learned variants use $t_r = 3$.

Figure 9 links these components to their failure modes. The learned lifter removes text ghosting and matches SelfLift-zero without requiring pixel-VAE inference. Off-policy supervision causes severe blur, removing dynamics preservation yields incomplete recovery, and the full model produces sharp results.

Table 9 reports all metrics and a dynamics-weight sweep. The lifter reduces transition latency from 1.642 to 1.556 seconds without degrading quality. Off-policy distillation degrades all metrics, while on-policy supervision remains insufficient without $\mathcal{L}_{\text{dyn}}$. With other settings fixed, $\lambda_{\text{dyn}} = 80$ performs best; 40 under-regularizes dynamics, whereas 120 limits adaptation and approaches SelfLift-zero. These results confirm the complementarity of on-policy recovery and dynamics preservation.

D.3 Additional Validation of Artifact Localization

Figure 10 further validates Fig. 6 on two examples. Localized correction removes these artifacts while preserving reliable content, whereas uniform mixing leaves residual distortions, confirming that the consistency residual captures artifact-sensitive transition errors.

D.4 Additional Qualitative Results

Figures ?? and ?? extend the main-paper comparison with additional prompts on FLUX.2-Klein-9b and Z-Image-Turbo, further demonstrating that SelfLift consistently suppresses transition artifacts while

preserving text accuracy, local structure, and fine-grained visual details across model families.

E Applicability and practical adaptation.

SelfLift-zero is a training-free, plug-and-play transition operator applicable across model families without modifying the denoiser or sampling schedule. Its effectiveness depends on the predicted clean sample used to construct both the direct latent and pixel-VAE branches. At early timesteps, the clean estimate is still immature, making the pixel branch and the resulting correction signal less reliable. Transitioning too early may preserve residual noise or incomplete structure, producing an under-denoised appearance while requiring more high-resolution steps and reducing acceleration. SelfLift-zero is therefore better suited to aggressive late-transition configurations, where the clean estimate is sufficiently developed, pixel-VAE guidance becomes reliable, and the errors accumulated by direct latent lifting are more pronounced. As transition correction is decoupled from timing, SelfLift-zero complements schedulers such as Speed, especially for flexible multi-step models.

The same plug-and-play principle can extend to video generation when the backbone reliably supports the chosen resolutions. In our preliminary exploration with Wan2.1-T2V, $2\times$ spatial downsampling of 480p inputs altered the token-sequence distribution and destabilized scene structure, indicating poor generalization to unseen sequence lengths. Progressive-resolution video inference should therefore remain within the model’s native multi-resolution regime, where SelfLift can reliably bridge resolution stages without additional training or external restoration models.