

You Cannot Photograph the Same Street Twice: Reliability Limits in Vision–Language Measurement of Urban Change

Kaizhen Tan

New York University

Highlights

- Re-photographing an unchanged street moves a VLM score two-thirds as far as changing it.
- Six acquisition statistics predict almost none of that movement.
- What is systematic in it is a tenth of a point, and it grows with the interval.
- Camera geometry alone makes a VLM report change in 45% of identical-scene pairs.
- The usable unit is a few hundred paired observations, not a single sample point.

Abstract

Vision-language models are increasingly used to measure urban change from repeated street-level imagery, but their longitudinal reliability is not well understood. We test how much a perception score can change when the street itself does not undergo substantial redevelopment. Using 4,648 consecutive-epoch image pairs from 435 Google Street View standpoints across five US cities, we find that re-photographing the same street changes a perception score by 0.80 points on average, equivalent to 66.5% of the difference between two different streets in the same city. Repeated model calls contribute almost no variation, while image re-encoding and prompt-order changes each account for about one fifth of the between-street difference. Six image statistics describing scattering, contrast, colour, exposure, sharpness and specularities explain almost none of the remaining epoch-to-epoch variation. A small systematic drift of about 0.1 points remains and increases with the interval between captures, consistent with minor physical changes not recorded by redevelopment labels. Controlled experiments further show that acquisition conditions can shift scores when camera and image properties are allowed to vary, and that the direction of these shifts depends on the model. In crowdsourced imagery, camera geometry alone causes a model to report physical change in 45% of identical-scene pairs; normalising both images to a common virtual camera reduces this rate to 7.5%. Despite poor reliability at the individual-location level, aggregation recovers a coherent redevelopment signal: changed streets are judged wealthier, better maintained, more enclosed and less green. These results show that vision-language measurement of urban change is reliable at the scale of hundreds of paired observations, but not at the scale of individual sample points.

1 Introduction

Street-level imagery has become a standard instrument for measuring the built environment, and the review literature already covers several hundred applications (Biljecki and Ito, 2021; Ito et al., 2024). A growing share of that work is longitudinal. Two images of one location, captured years apart, are compared to establish what changed on the ground and what the change did to how the street is perceived (Naik et al., 2017; Stalder et al., 2024; Liu et al., 2025). Vision–language models have made the comparison

cheap: one prompt returns a change classification, a typology and a battery of perceptual scores, with no task-specific training data. The results are usually published as maps in which each sample point carries its own perception change, and spatial pattern is read off those maps.

Figure 1 is one such point. A vacant lot in Oakland was photographed by the Street View car twelve times between 2008 and 2023. Eight townhouses went up on it in 2017, and the instrument follows that without difficulty: the street is judged wealthier and better maintained from the visit at which the frame is finished, and it holds the new level for the six years that follow. The same figure shows two other pairs of visits at that standpoint in which nothing was built or removed. Between June 2021 and January 2023 the same trees lose their leaves; between July and November 2015 the same vacant lot is photographed under cloud and then in sun. Each of those moves the score by three-quarters or more of what separates two different streets in the same city. Nothing in the pipeline flags either reading as unusable. On a map, both would appear as change.

Whether that instance is representative is an empirical question, and it decides whether the reporting scale now in use is supportable. We answer it directly, by measuring what the instrument does when the place does not change. The panel for that test is the set of Google Street View standpoints that the CityPulse annotators (Huang et al., 2024) inspected epoch by epoch and marked as never undergoing substantial redevelopment. Across 4,648 consecutive-epoch frame pairs at 435 such standpoints, a second photograph moves a perception score by two-thirds of what separates two different streets in the same city. A single location's measured change is dominated by this quantity.

Two questions follow. The first is whether the movement is an acquisition bias that could be modelled and subtracted. Six image statistics covering scattering, contrast, colour, exposure, sharpness and specularity, entered as levels, as differences and in a gradient-boosted model cross-fitted by standpoint, explain almost none of the epoch-to-epoch variance, while the same six statistics separate real weather conditions by up to two and a half corpus standard deviations. The second is whether what remains is centred on zero, which decides whether averaging helps. It very nearly is. The signed drift on control standpoints reaches 0.12 points at most, a tenth of the between-street difference; it is positive on almost every dimension; and it grows with the interval between captures rather than with the calendar. That is the signature of small physical change the labelling scheme does not record, and it sets a floor on what aggregation can recover.

Acquisition conditions are not innocuous in general. A controlled experiment, in which sixteen families of degradation are applied to fixed base images so the scene is constant by construction, shows that degradation does move scores. It also shows why the observational test came out flat: Google resamples every panorama into one virtual camera before an analyst sees it, which removes the resolution, projection and field-of-view variation that the controlled experiment finds most consequential. Where the camera is free to vary, on crowdsourced imagery, geometry alone makes a model report physical change in 45% of pairs whose scene is identical by construction. The same experiment shows that the sign of the acquisition response depends on which model is asked: across three models scored on identical inputs, half the dimensions disagree on sign, and one reverses from significantly negative under one model to significantly positive under another.


Aggregation restores the measurement. Over a few hundred paired observations, standpoints that cross a labelled change point are judged wealthier, better maintained and more enclosed, and less green, and the result survives balancing the comparison across the five cities. The variance measured here converts directly into the number of paired observations an effect of a given size requires, and that number is the operational result of the paper.

We make four contributions.

a One Oakland standpoint, fifteen years



b What the model returned at each of the twelve visits

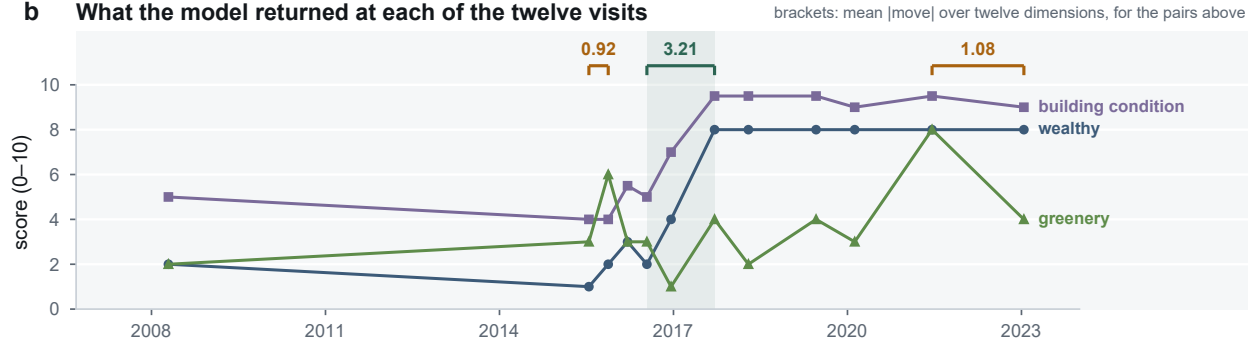

c Where the three moves sit, against every repeat visit in the panel

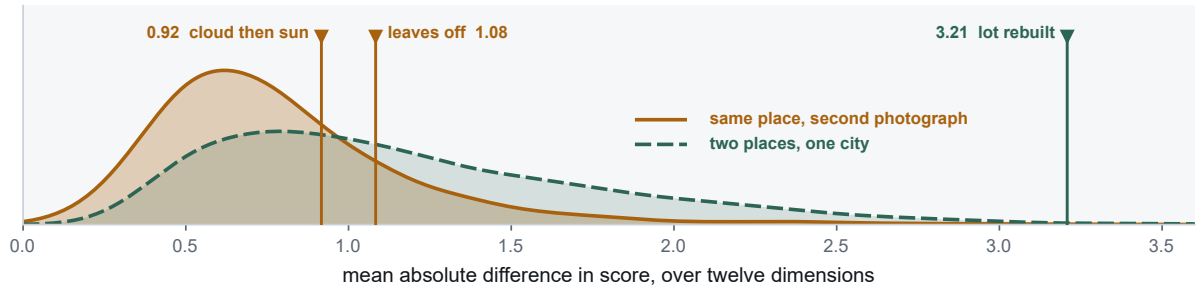


Figure 1: One Oakland standpoint, twelve visits, fifteen years. (a) Three pairs of visits: the same vacant lot under cloud and then in sun, the lot rebuilt into eight townhouses, and the same trees in leaf and then bare. The frame is teal where the street changed and amber where only the photograph did. (b) What gemini-2.5-flash returned at each of the twelve visits, on three of the twelve dimensions; each bracket gives the mean absolute move over all twelve dimensions for the pair above it, and the shaded band spans the redevelopment that CityPulse marks. (c) The same three numbers placed against the distribution of that quantity for all 4,648 control frame pairs, and for pairs of different standpoints in one city.

1. A reliability ladder for vision–language perception scoring, placing sampling noise, encoding noise, prompt-order noise, same-place photographic noise and between-place variation on one scale (Section 4). Prompt structure turns out to be an instrument property of the same magnitude as image encoding, which bears on the twenty- and thirty-dimension batteries now in applied use.
2. A decomposition of the same-place residual into the part six acquisition statistics can predict, the part that is systematic, and the part that is neither, together with a measurement of how far those statistics can see (Section 4.1).
3. A three-model test of whether the sign of the acquisition response belongs to the task or to the model, on identical images under identical conditions (Section 5), and a measurement of what camera geometry alone produces on crowdsourced imagery (Section 6).

4. The sample size at which longitudinal perception measurement becomes usable, and the aggregate signal it recovers there (Section 7).

2 Related work

Longitudinal street-level measurement. Naik et al. (2017) established the template: paired Google Street View imagery from 2007 and 2014 across five US cities, a physical-change score, and a test of urban theory against it. Stalder et al. (2024) learn embeddings insensitive to lighting and season and sensitive to structural change, and validate them on 1,449 manually labelled pairs before mapping London. Liu et al. (2025) combine a change-detection network with a perception model trained on Place Pulse 2.0 to study New York City and Memphis from 2007 to 2023, and report hot-spot and cold-spot clusters of perception change at 300 m sample points. That is the closest published antecedent, and it reports at exactly the scale examined here.

Acquisition conditions as a source of bias. That street-level imagery carries the conditions of its capture is established. Zhao et al. (2025) quantify seasonal bias across forty cities and show that it changes a downstream clustering of urban function; Ki et al. (2026) use repeat Google Street View imagery to show that weather at the moment of capture shifts perception scores, by different amounts in different cities. Both work with perception models trained on human ratings. The present paper asks the complementary question for a prompted vision-language model, and separates the part of the same-place difference that whole-frame acquisition summaries can predict from the part they cannot. Alpherts et al. (2025) and Fan et al. (2025) address a different threat: the biases in where crowdsourced imagery exists at all and how densely it samples the street.

Perception measurement and its reliability. The human ground truth most of this literature rests on comes from Place Pulse (Salesses et al., 2013) and its successor Place Pulse 2.0 (Dubey et al., 2016), and vision-language models are now used in their place. Mushkani (2026) evaluates seven such models against 100 Montreal scenes annotated on thirty dimensions by twelve participants, and argues that benchmarks should report inter-annotator reliability alongside model alignment. That axis is agreement with human raters. The axis measured here is the stability of a score under a second photograph of the same scene, which is what a longitudinal design consumes and which agreement with human raters does not bound. He et al. (2026) benchmark twenty models on temporal change questions over multi-temporal imagery from eleven cities, measuring answer accuracy.

Pairing and viewpoint. Torkko (2026) addresses the problem that metadata alone is insufficient to find visually aligned pairs, and releases a tool that filters candidates on feature matches and semantic-mask agreement. That filter operates on viewpoint. Section 6 shows that once viewpoint is controlled, camera geometry remains, and measures what it does on its own.

3 Data and design

Four experiments appear in this paper. They differ in one respect that decides how each result should be read: how much of the world is held still while the measurement is repeated. Figure 2 states that once, in order.

Units. Five terms recur and are not interchangeable. A *panorama* is one Street View capture, identified by a panorama identifier. A *frame* is one image rendered from a panorama at one heading; we request two headings per panorama. A *standpoint* is a kerbside position that CityPulse revisits across epochs,

What each experiment holds still

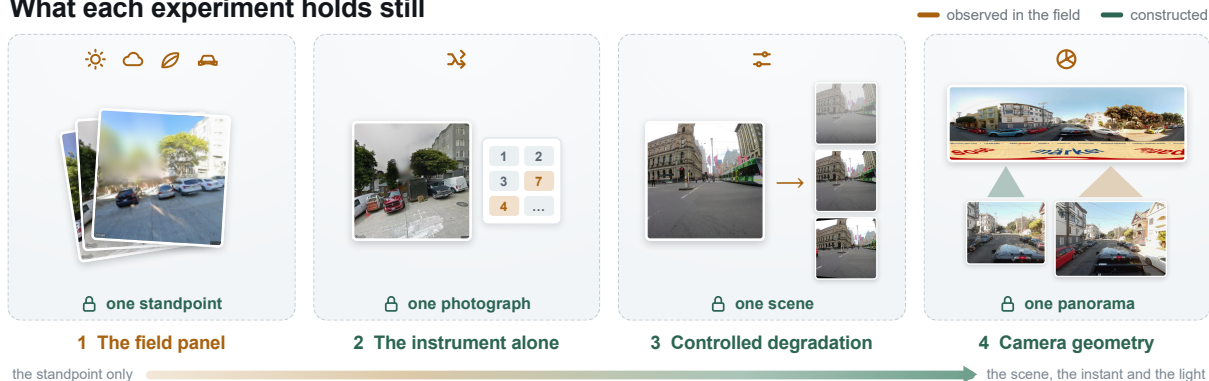


Figure 2: The four experiments, ordered by how much they pin down. The lock marks what is clamped and the amber icons mark what is left free. The field panel holds one standpoint and lets a second visit change the light, the season and the traffic. The noise floor holds one photograph and varies the random seed, the JPEG quality and the order of the twelve questions. The perturbation experiment holds one scene and applies sixteen degradation families at 57 levels. The optics experiment holds one panorama and renders it through two virtual cameras, 61° against 96° .

holding a series of panoramas. A *frame pair* joins two consecutive epochs at one standpoint and one heading, and a *transition* is the same step with the two headings averaged. The reliability ladder is reported per frame pair, because that is what an analyst who scores one image per location per epoch obtains. Everything inferential is computed per transition, with standard errors clustered by standpoint, because the two headings of one transition are repeated measurements of the same step.

The longitudinal panel. CityPulse (Huang et al., 2024) publishes 9,751 Google Street View image records, covering 8,846 distinct panorama identifiers at 757 standpoints in five US cities from 2007 to 2023, each image inspected by hand and marked as a change point or not. Requesting imagery by panorama identifier returns that specific capture, so a pair contains no positional tolerance of the kind a proximity match introduces. Re-driving is not perfectly repeatable: consecutive captures at one standpoint sit a median of 1.4 m apart, and 95% of them within 5 m, far tighter than the 10 m gate used to match crowdsourced imagery in Section 6.

We re-checked every identifier against the Street View metadata endpoint in August 2026. 51.2% still resolve, and survival is scattered within series rather than clustered, so 88.5% of standpoints retain at least two epochs. The endpoint also returns Google’s own capture date, which disagrees with the published index for 2.0% of the surviving identifiers; since the date decides which two images form a consecutive pair, we take the endpoint as authoritative throughout. Each surviving panorama was requested twice through the Street View Static API, at headings 0° and 180° , 640 by 640 pixels, at the default 90° field of view and zero pitch, so heading, field of view and output size are fixed by the request and do not vary across epochs. That returned 9,051 frames at 4,526 panoramas; 59 responses failed to parse, and 8,992 frames were scored.

Figure 3 shows where the standpoints are and when they were photographed. The control and labelled-change sets are drawn from the five cities in very different proportions, which Section 7 takes into account.

Corpus for the controlled experiments. Global Streetscapes (Hou et al., 2024) provides 10.0 million street-level images from 688 cities with per-image acquisition attributes, including a manually annotated

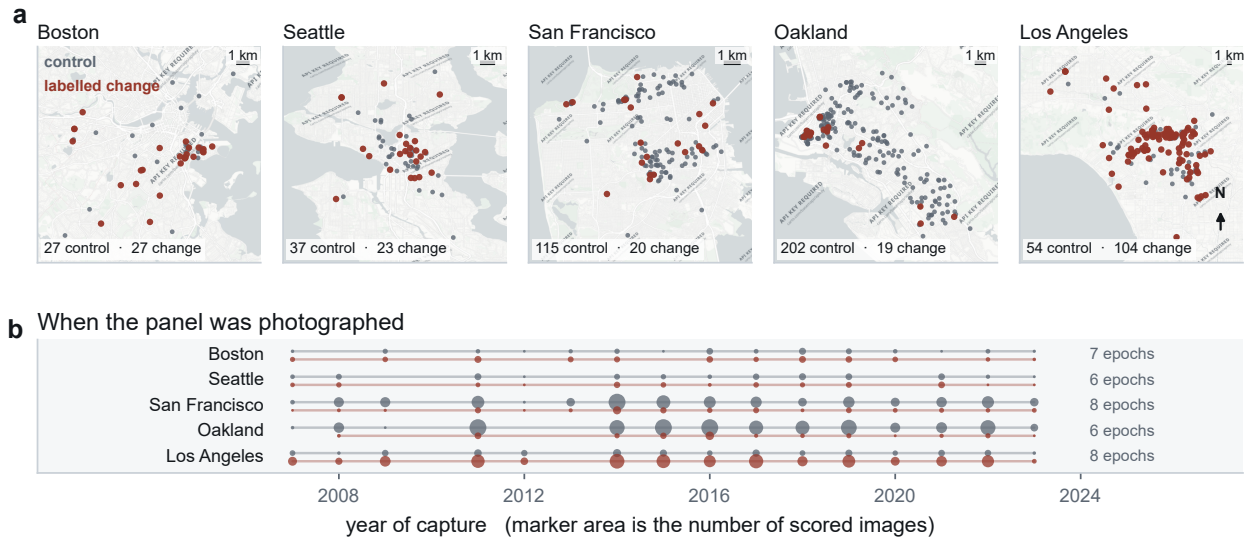


Figure 3: The panel. (a) Standpoints in each city, separated into those that contribute control pairs and those that carry a labelled change point. (b) When each city was photographed; marker area is the number of scored frames in that year, and the right-hand figure is the median number of epochs per standpoint.

subset carrying human labels for weather, glare, reflection, quality, platform, view direction and panorama status. Those labels serve twice: to calibrate the perturbations against the conditions they are named for, and to select clean base images.

Crowdsourced imagery. For the camera-geometry experiment we enumerate Mapillary imagery through the vector-tile layer and retrieve per-image detail through the graph API. Four tiles over San Francisco return 436,838 images, of which 28,160 grid cells at 20 m by 45° resolution hold imagery from two or more distinct years.

What is scored. Twelve perception dimensions are used throughout: six aligned with Place Pulse 2.0, for which human ground truth exists, and six physically auditable dimensions a reader can check against the image. Each is anchored at 0, 5 and 10 and returned with a short evidence clause naming what in the frame drives the score. Two dimensions, *boring* and *depressing*, are reverse-coded; every figure flips them so that a positive shift always means the street looks better. What the paper measures is the repeatability of these prompted scores, which is a different question from their agreement with human raters.

The panel, the noise floor and the change-detection evaluation are all scored by *gemini-2.5-flash* at temperature zero, so that one instrument runs through the observational half of the paper. The controlled experiments of Sections 5 and 6 vary the model deliberately and name it wherever they do. The noise floor is measured on the 150 base images that also serve the perturbation experiment, since it is a property of the instrument rather than of the panel.

Throughout the paper, differences in score are reported against one yardstick: the mean absolute difference between two randomly chosen different standpoints *in the same city*, 1.19 points on the ten-point scale. That is the variation a map of one city exists to display. Where a figure reports an effect in standard-deviation units instead, the standard deviation is that of the same standpoint means.

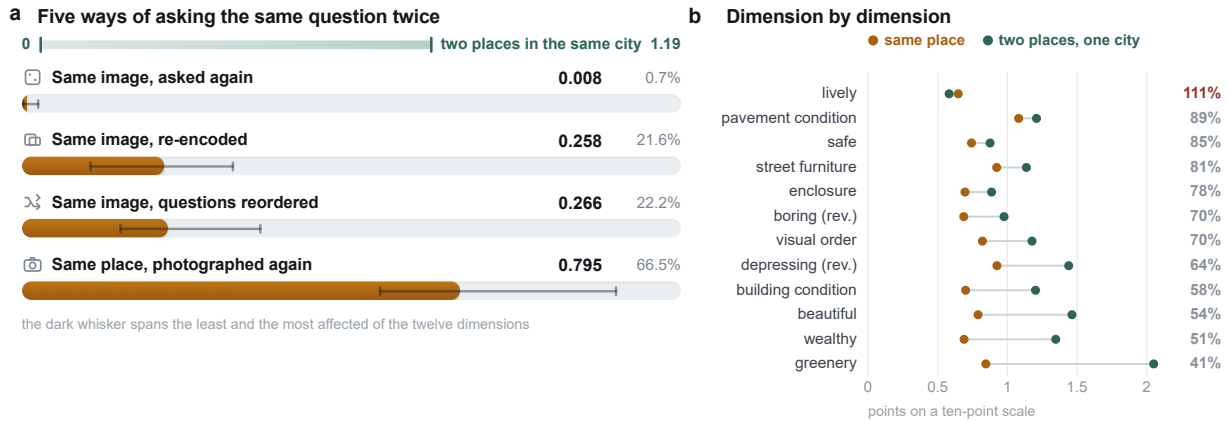


Figure 4: (a) Mean absolute difference in perception score under four repeat conditions, averaged over twelve dimensions. Each sits in a track as wide as the difference between two standpoints in the same city, 1.19 points, so the filled share is the quantity in the right-hand column. (b) The same comparison dimension by dimension; the percentage is the same-place difference as a share of that dimension's own between-place difference.

4 A second photograph of the same street

Five conditions bracket what a longitudinal comparison actually contains. Ask the same question of the same image twice, and only the sampling of the model's own output changes. Re-encode that image at a slightly different JPEG quality, and the pixels move without the scene moving. Reorder the twelve questions in the prompt and leave the image alone, and only the instrument changes. Photograph the same unchanged street on a second visit, and everything a second visit brings changes with it. Compare two different streets, and the scene changes as well. Figure 4 puts all five on one scale. Three readings follow.

The model is close to deterministic at temperature zero. Repeated calls on one image differ by less than one part in a hundred of the between-place difference, so averaging repeated samples buys nothing, and any stability obtained that way is illusory. Sampling variance explains none of what follows.

Prompt structure is an instrument property of the same order as image encoding. Re-encoding an image at a JPEG quality four points away, which produces a visually indistinguishable file, moves a score by a fifth of the between-place difference. Reordering the twelve questions while leaving the image untouched moves it by the same amount, with *safe* the most position-sensitive dimension of the twelve. Applied work now routinely asks for twenty or thirty dimensions in one pass; a battery of that length is a longer list to permute, and the effect is not currently reported.

The dominant term is none of these. A second photograph of the same unchanged standpoint differs by three times the prompt-order effect and two-thirds of the between-place difference, and Figure 4b shows this is not an artefact of averaging over dimensions. Eleven of the twelve sit between 41% and 89% of their own between-place difference, and the twelfth, *lively*, crosses it: two photographs of the same street differ on how lively it looks by more than two different streets in the same city do. The variation is spread across the panel rather than concentrated in a few unstable standpoints, with only 7% to 14% of the variance in the pairwise difference lying between standpoints. Averaging the two headings of a standpoint, which costs one extra request per epoch, brings the same-place difference down by a fifth, to 0.64 points.

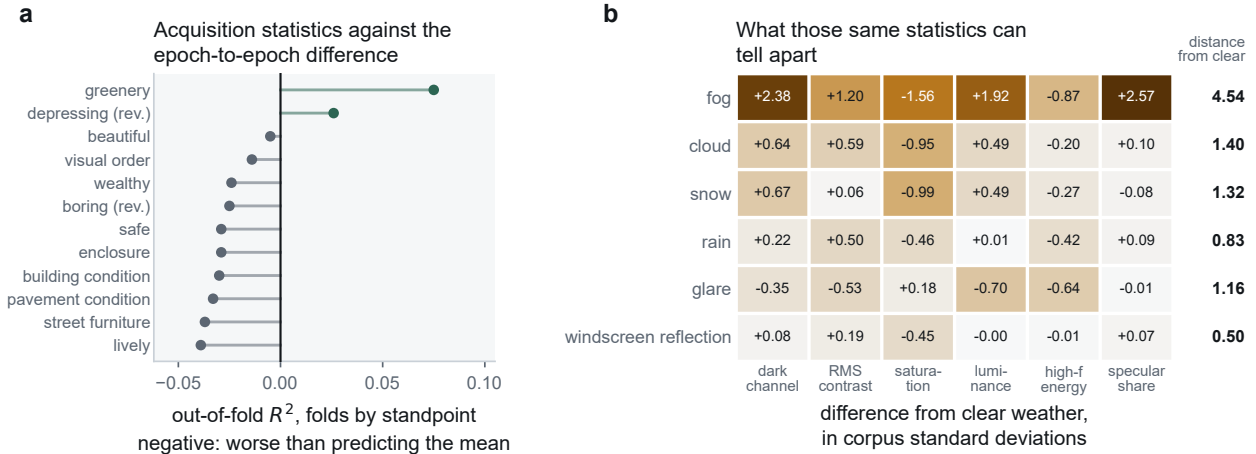


Figure 5: (a) Out-of-fold R^2 of a gradient-boosted model over six acquisition statistics, fitted to the epoch-to-epoch difference on 4,648 control frame pairs, with folds assigned by standpoint. (b) The same six statistics on 4,000 manually annotated Global Streetscapes images, grouped by human label and expressed as a displacement from the clear-weather mean in corpus standard deviations.

4.1 What the residual is made of

For every image we compute six statistics: the dark-channel mean (He et al., 2011), whole-frame RMS contrast, mean saturation, mean luminance, mean absolute Laplacian response, and the share of near-saturated pixels. These capture scattering, contrast, colour, exposure, sharpness and specularity, and they are the statistics with which the perturbations of Section 5 are calibrated.

Figure 5a fits them to the epoch-to-epoch difference on the control standpoints. Across all six statistics and all twelve dimensions the largest single correlation is 0.19, and a gradient-boosted model over the levels and differences of all six, plus the interval between captures and the seasonal offset, cross-fitted with folds assigned by standpoint, returns a negative out-of-fold R^2 on ten of twelve dimensions. *Greenery* is the exception, at 0.075. There is no acquisition component of consequence to subtract.

A null is worth only as much as the covariates behind it can see, and Figure 5b measures that on 4,000 manually annotated images. Fog displaces the dark channel by 2.4 corpus standard deviations, cuts saturation to a third and multiplies the specular fraction eightfold; cloud, snow and rain each sit in a distinct position; images annotated for glare are displaced by 1.2 standard deviations. Windscreen reflection is the exception. Images annotated as carrying a reflection have the same profile as those annotated without one on all six statistics, because reflection is a localised, spatially structured artefact and a whole-frame mean averages it away. Reflection is also the acquisition attribute whose prevalence grew fastest over the study period. The imagery used here is rendered by Google from a fixed virtual camera, which removes the geometric part of that artefact but not a reflection present in the source panorama.

What is left has a small systematic part. Measured on the 2,367 control transitions with standard errors clustered by standpoint, the signed drift reaches 0.118 points on *wealthy* and 0.110 on *building condition*, under a tenth of the between-place difference in both cases, and it is distinguishable from zero on eleven of twelve dimensions. Its sign is the same throughout: a later photograph of the same unchanged standpoint is judged marginally safer, wealthier, better maintained and more attractive.

The timing says what produces it. The drift grows with the interval between the two captures ($r = 0.088$, $p < 10^{-4}$) and is flat against the calendar ($r = -0.008$, $p = 0.70$), so it is not a secular improvement in Street

View imagery. It is what a street does over time when nobody records it: the mean absolute difference in the same data rises from 0.75 points under a year to 0.91 points at four to eight years, and Section 7.1 finds real physical change among control pairs when they are inspected one by one. The practical consequence is a floor. Averaging removes the random part of the same-place difference and leaves about a tenth of a point of drift, which is below the effects Section 7 detects and comparable to the ones it does not.

4.2 What that does to reporting scale

An estimate at a single location carries a standard error of the same order as the between-place standard deviation. A map in which each sample point carries its own perception change is therefore displaying, at the point level, a quantity whose noise is comparable to the cross-sectional signal it is being compared against. Aggregation is the condition under which such a design produces anything, and Section 7 gives the sample size at which it does.

5 What acquisition does when it is free to vary

The flat result in Section 4.1 is a statement about rendered Street View imagery. The complementary question is what acquisition conditions do when they are allowed to move, and that requires holding the scene fixed by construction rather than by a label.

We apply sixteen families of perturbation at 57 levels to 150 base images restricted to daylight, clear-weather, good-quality, non-panoramic frames and stratified across six continents. Each family reproduces one axis along which the corpus varies. Atmospheric scattering follows the Koschmieder model with the dark-channel prior (He et al., 2011) as its calibration statistic, and camera yaw is applied as the exact homography KRK^{-1} for a pinhole source and by resampling the sphere for an equirectangular one, so the manipulation is exact in both cases rather than approximated by an image shift. Perturbation strengths are set so that each reproduces the statistical signature of the corresponding real condition, measured on the annotated corpus of Figure 5b. The fitted fog strength is $\beta = 0.95$; the $\beta = 2.0$ level is roughly twice real fog and is reported as an upper bound.

5.1 Magnitude

Figure 6a gives the response surface for `qwen2.5-v1-72b-instruct`, one of the models used by published urban-perception benchmarks (Mushkani, 2026). Each row is shown at the level where that family’s mean absolute response is largest, so a row that stays inside the noise floor stays inside it at its own most damaging setting. A cell has to pass two tests to count: a bootstrap interval that excludes zero, and a shift larger than the noise floor that prompt order and re-encoding set for that dimension in Figure 4. Taken one cell at a time the picture is restrictive: 29 of 192 clear both. Atmospheric scattering dominates, followed by motion blur, defocus, exposure and camera yaw. Ten families clear nothing anywhere: resolution, JPEG quality, white balance, saturation, contrast, glare, reflection, foliage state, field of view and rain.

Dose–response relationships are far cleaner than single cells, because model variability is not ordered by perturbation strength while the response is. Figure 6b shows the largest family: at the calibrated strength of real fog the shift is about a fifth of a between-place standard deviation on the most affected dimensions, and it grows monotonically with dose.

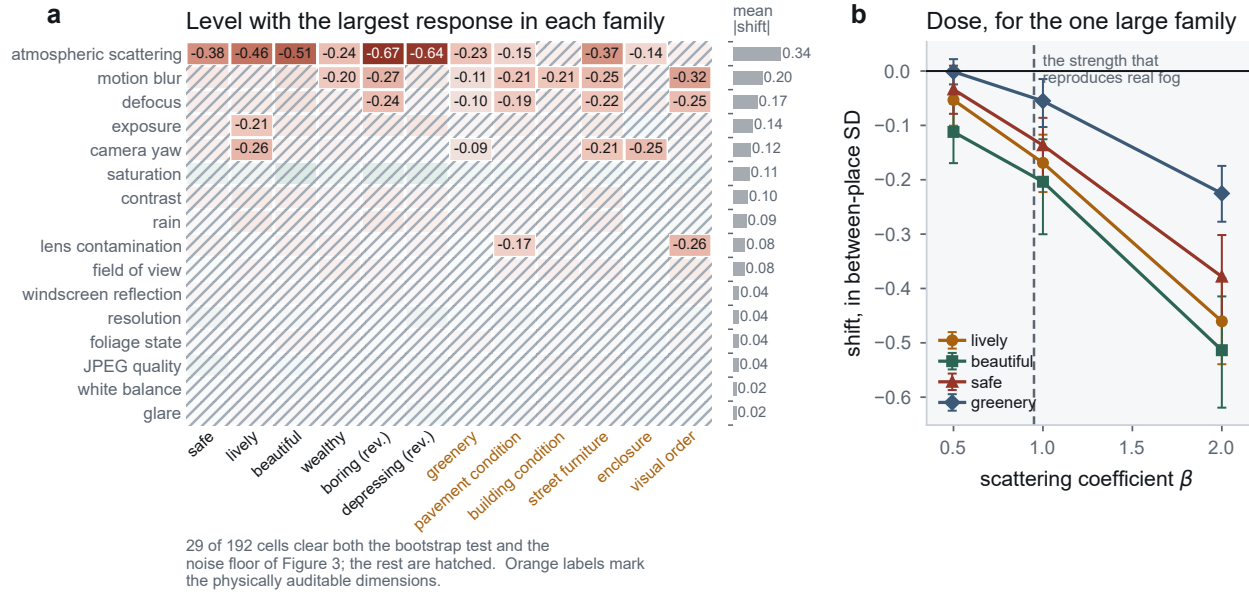


Figure 6: (a) Perturbation family against perception dimension for qwen2.5-vl-72b-instruct, at the level where each family produces its largest mean absolute response, in units of the between-place standard deviation, with that magnitude in the gutter. Because the level is chosen on the response, each row is an upper bound on its family. (b) The dose–response for atmospheric scattering, with bootstrap intervals and the calibrated strength of real fog marked.

5.2 Direction, and whose property it is

Effect size and direction answer different questions. A family that shifts a dimension by less than the noise floor still carries information about the sign, and sixteen families give sixteen readings of it. We take the sign in each family for three models scored on the identical 150 base images, restricted to the 34 perturbation levels that all three runs share, so that the model is the only thing that differs.

In Figure 7a, six of twelve dimensions have all three models agreeing on the sign of the response, and no dimension is significant in all three. One disagreement reverses a significant result: *beautiful* is significantly negative under gemini-3.7-flash and significantly positive under llama-4-maverick. *Boring* reverses in sign as well, with one of the two models individually significant. A study reporting *beautiful*, with either model, would have had a result at conventional significance whose sign the choice of model determined. What agreement exists is concentrated in one pair (Figure 7b): the qwen–gemini correlation over the full family-by-dimension response is 0.59, against 0.42 and 0.28 for the pairs involving llama.

The sign of the acquisition response therefore depends on which model is asked. The consequence is practical: a directional correction cannot be applied without first fixing the model, and a correction estimated with one model may point the other way under another.

6 Camera geometry in crowdsourced imagery

Crowdsourced imagery has no panorama identifier to request, so a pair must be identified from metadata. Mapillary exposes structure-from-motion-refined position and heading, and a field named `merge_cc`, documented as the connected component of images aligned into a common reconstruction. The refined fields

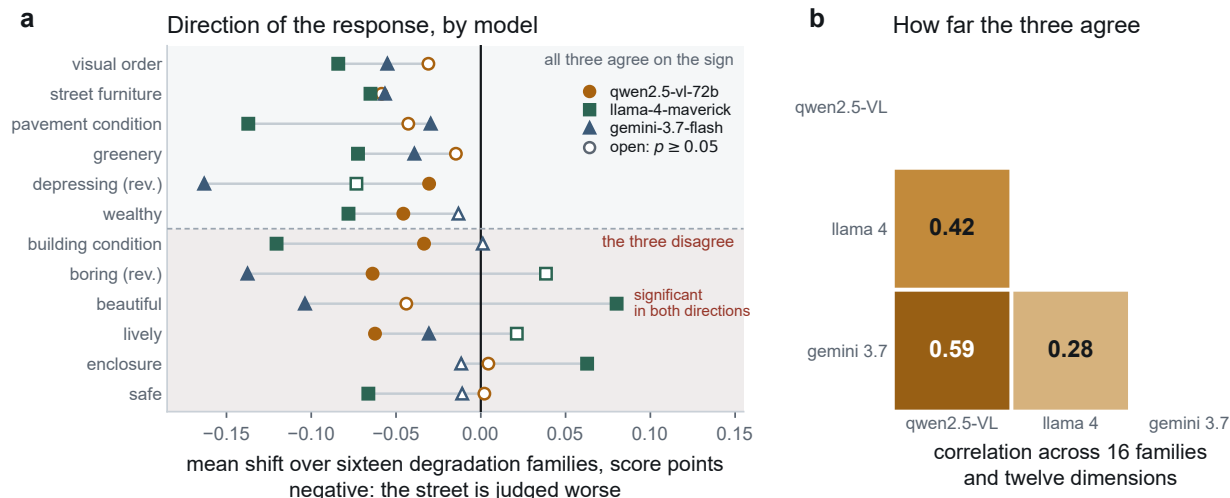


Figure 7: (a) Mean shift over sixteen degradation families, by dimension and by model, on identical images under identical conditions. Filled markers are significant at 5% on a two-sided binomial test over the sixteen family signs. (b) Correlation between the three models' full family-by-dimension response. None of these three is the gemini-2.5-flash instrument used for the field panel.

are necessary and available: present on every image checked, moving the raw position by a median of 7.1 m and the raw compass heading by a median of 3.1°. The connected-component field does not do what its name suggests. Only 15.0% of cross-year pairs share one, the share is unrelated to how far apart the two images are, and 40 frames from a single sequence captured seconds apart by one moving camera carry 22 to 28 distinct values. It cannot serve as a co-location key.

Applying the geometric criterion alone, 47.7% of cross-year candidate pairs fall within 10 m and 20°. Visual inspection of the pairs that pass shows the remaining obstacle is the camera. A 2015 dashcam covers 61° by 48°, a 2024 action camera 96° by 64°, and an equirectangular panorama the whole sphere. Two frames from the same point facing the same way frame nothing alike, and a panorama has no heading in the sense the criterion assumes.

We therefore resample both frames into one virtual pinhole camera, with a shared field of view derived from what the two sources can each cover and a yaw equal to the difference between the target heading and each image's own refined heading. Working from the relative heading avoids depending on the orientation convention of the reconstruction frame. Deriving the field of view per pair rather than fixing it matters: a fixed 80° target leaves 64% of the output frame outside the source, while the derived target leaves under 1%.

Figure 8 isolates the effect. One panorama is rendered twice, once as the narrow camera and once as the wide camera offset by 4°. Both frames show the same scene, from the same point, at the same instant, under the same light, so any reported change is an artefact. Under raw optics the model reports physical change on 45% of the forty panoramas, naming building facade change six times, amenities and furniture four, road and traffic infrastructure four, storefront signage three and boundary configuration three, on scenes that did not change. Normalising both frames into one virtual camera, while keeping the residual alignment error that survives in the field, reduces that sixfold.

The two outcomes separate. Change classification is largely fixed by normalisation; the perception artefact is not, falling only from 0.39 to 0.35, because perception scores remain sensitive to three degrees of yaw

a One panorama, rendered twice



b What the camera alone produces

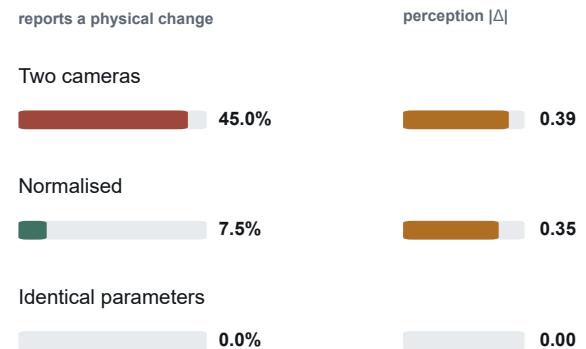


Figure 8: (a) One Mapillary panorama rendered as two virtual cameras, above, and normalised into a common camera, below; the wedge gives the two fields of view in plan. (b) Over 40 such panoramas, the share on which the model reported a physical change, with the mean absolute perception difference alongside. The two cameras differ by $61 \times 48^\circ$ against $96 \times 64^\circ$ and 4° of yaw; the normalised row keeps 3.1° of yaw and 6% of field as residual error, and the last row renders both frames with identical parameters. Both frames of every pair come from a single panorama, so the scene is identical by construction.

and six percent of field of view, which is below what any alignment can guarantee. Feature matching is not improved at all: median inlier counts are 14 before and 13 after, with only 30% of pairs improving, because scale-invariant keypoint matching is already invariant to the differences normalisation removes and the resampling costs detail. Keypoint matching and a vision–language model ask different questions of the same pair, and a pipeline validated on the first is not thereby validated on the second.

7 What survives aggregation

Averaging removes the random part of the same-place difference and leaves the drift of Section 4.1, so the question is how many paired observations are needed before an effect larger than that drift is resolvable. Figure 9a compares the 224 transitions spanning a labelled change point, at 193 standpoints, against the 2,367 control transitions at 435 standpoints.

Four of the twelve dimensions are distinguishable from the control transitions, and they describe a coherent process: a standpoint that crosses a labelled change point is judged wealthier, better maintained and more enclosed, and less green. Redevelopment adds built fabric and removes vegetation, and the instrument reports both. Three of the four are physically auditable dimensions and one is Place-Pulse aligned, so the result does not rest on the perceptual half of the battery alone.

That comparison is exposed to a compositional difference. Oakland supplies 202 control standpoints and 19 labelled-change ones, Los Angeles 54 and 104, so a pooled contrast partly compares cities. Re-weighting the five cities so that the two groups match, all four dimensions survive: greenery falls by 0.35, building condition rises by 0.24, wealthy by 0.20 and enclosure by 0.19, each at $p < 0.01$. The effects shrink by a fifth to a third and the pattern is the same. Greenery is the one dimension that behaves differently in one place, falling in Boston, Los Angeles and San Francisco and rising in Seattle.

Figure 9b converts the measured variance into sample size. An effect the size of the shifts that clear in

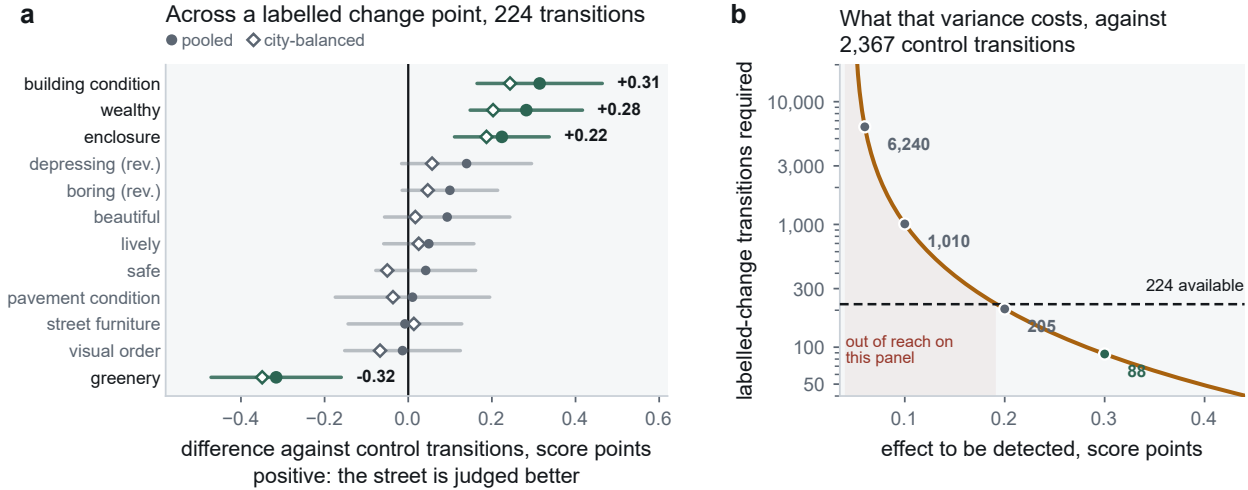


Figure 9: (a) Perception change across a labelled change point against control transitions, in score points, with 95% intervals clustered by standpoint. Filled circles are the pooled contrast; open diamonds re-weight the five cities so that the two groups have the same city composition. (b) The labelled-change transitions required to detect an effect of a given size at 80% power, holding the control set at its realised size.

Table 1: Paired change detection against the CityPulse labels, on 172 consecutive-epoch pairs. The reference label marks substantial redevelopment; the prompts differ only in what they specify.

Prompt	Reports change	TP	FP	TN	Precision	Recall	Specificity
Task description only	97.7%	24	144	4	0.143	1.000	0.027
+ acquisition artefacts to disregard	86.0%	23	125	23	0.155	0.958	0.155
+ threshold for substantial change	76.7%	22	110	38	0.167	0.917	0.257

panel (a) needs about 88 labelled-change transitions against a control set of the size realised here, and 224 are available. An effect of a tenth of a point needs 1,010, and one of six hundredths needs 6,240. Below about a tenth of a point the drift of Section 4.1 becomes the binding constraint rather than the sample size, because a systematic tenth of a point does not average away. A study reporting perception change at a single location is working three orders of magnitude below the smaller of these two thresholds.

7.1 Where the change threshold sits

Part of the residual in Section 4.1 is real change that no label records, and the same ambiguity governs how a change rate should be read. Table 1 evaluates paired change detection against the CityPulse labels. The pairs are the consecutive-epoch pairs at heading 0° for the standpoints whose series carries a labelled change point, one pair per step, giving 172 pairs of which 24 are labelled change points. The three prompts differ only in what they specify; the images and the model are identical throughout.

Specificity rises ninefold across the three prompts while recall falls only from 1.000 to 0.917. Precision stays near 0.16 throughout, because the model keeps reporting change on three-quarters of the pairs while the reference label marks it on 14%. Some of that gap is a difference in definition rather than model error. Figure 10 shows three of the six pairs with the smallest acquisition difference and the shortest interval;

What the reference label calls no change

three of the six hardest false positives



Figure 10: *Three of the six false positives with the smallest acquisition difference and the shortest interval. CityPulse marks none of these standpoints as a change point over the whole series, and each pair carries a persistent physical change: a construction hoarding erected along the fence line, fresh graffiti with repainted crossing markings, and a hoarding with a newly painted red kerb.*

each carries a physical change that persists and that the reference label does not record. CityPulse labelled substantial redevelopment; the model was asked about any persistent physical change; over a four-month interval a street does change in small ways. Across the three prompts the model calls change on between 76.7% and 97.7% of these pairs while the reference prevalence is 14.0%, and the operational threshold that separates the two is a free parameter this literature does not state.

8 Discussion

Reporting scale. The result that governs the rest is that a second photograph of an unchanged street reproduces two-thirds of the difference between two different streets in the same city. Nothing in the pipeline removes this: neither sampling variance, nor prompt order, nor the acquisition statistics that separate real weather conditions cleanly. Point-level maps of perception change are displaying it. The usable unit is a few hundred paired observations, and the field currently reports at a unit of one.

Where correction is and is not needed. The absence of a predictable acquisition component in the Street View panel is a property of that imagery, not a general finding. Google renders every panorama into a fixed virtual camera before an analyst sees it, and Section 6 shows what happens without that step. On crowdsourced imagery, rendering both frames into a common camera removes most of the spurious change classification and little of the perception artefact, so it is worth doing and it is not sufficient on its own.

Model choice. Across three models on identical images, six of twelve dimensions agree on the sign of the acquisition response and none is significant in all three. *Beautiful* reverses from significantly negative under one model to significantly positive under another. The sign belongs to the model, which means a directional correction cannot be applied without fixing the model first.

Reproducibility of the imagery. Half the panorama identifiers published with a January 2024 dataset no longer resolved in August 2026, and Google's own capture date disagreed with the published one for a further 2.0% of those that did. A study identifying its imagery by Street View panorama identifier cannot retrieve the images it used. The release accompanying this paper therefore carries identifiers, retrieval dates, the capture date the endpoint returned, the prompts and the derived scores, which is what remains distributable.

9 Limitations

The reliability measurement is made on Google Street View imagery, rendered to a common virtual camera and requested at a fixed heading and field of view, so the same-place difference reported here is a lower bound for crowdsourced imagery, where camera heterogeneity adds the component measured in Section 6. Control standpoints are certified by human labels that mark substantial redevelopment, and Section 7.1 shows that streets change in ways such a scheme does not record; the signed drift in Section 4.1 is the size of that contribution, and separating it completely from instrument noise would require a labelling scheme with an explicit magnitude threshold applied to the control set. The panel covers five US cities, and the three models of Section 5 are not the model that scored the field panel, so the sign disagreement shows that model choice matters, and does not supply a correction table for `gemini-2.5-flash`. Two of the sixteen perturbation families cannot be calibrated against what their names refer to, since images annotated for glare carry the signature of low-sun illumination rather than of a source in frame, and images annotated for reflection have the same whole-frame profile as those without one. Base images reach 3.15 megapixels at the median, because the Global Streetscapes distribution carries 2048-pixel thumbnails, so the finding that resolution produces no effect above the noise floor is established over 0.5 to 3.2 megapixels rather than over the full observed range.

Data and code availability

All primary data are open. Global Streetscapes is distributed under CC BY-SA, the CityPulse panorama index is released with the original paper, Mapillary imagery is CC BY-SA, and OpenStreetMap history is queried through the `ohsome` API. Street View imagery is retrieved under the Google Maps Platform terms and is not redistributable, so the release carries panorama identifiers and derived scores rather than images. Of the 8,846 identifiers published with CityPulse in January 2024, the 4,526 that still resolved in August 2026 are listed with their retrieval date and with the capture date the metadata endpoint returned, since that set will continue to shrink.

The analysis code, the sixteen perturbation implementations, the full text of all five prompt variants, the study-design table and the response cache will be released on publication. The cache is content-addressed, so every number in this paper can be regenerated without re-querying a model.

References

- Alpherts, T., Ghebreab, S., and van Noord, N. (2025). Artifacts of idiosyncrasy in global street view data. In *Proceedings of the 2025 ACM Conference on Fairness, Accountability, and Transparency (FAccT)*, pages 416–437.
- Biljecki, F. and Ito, K. (2021). Street view imagery in urban analytics and GIS: A review. *Landscape and Urban Planning*, 215:104217.
- Dubey, A., Naik, N., Parikh, D., Raskar, R., and Hidalgo, C. A. (2016). Deep learning the city: Quantifying urban perception at a global scale. In *Computer Vision – ECCV 2016*, volume 9905 of *Lecture Notes in Computer Science*, pages 196–212.
- Fan, Z., Feng, C.-C., and Biljecki, F. (2025). Coverage and bias of street view imagery in mapping the urban environment. *Computers, Environment and Urban Systems*, 117:102253.
- He, J., Lin, Y., Huang, Z., Yin, J., Ye, J., Zhou, Y., Li, W., and Zhang, X. (2026). Urbanfeel: A comprehensive

- benchmark for temporal and perceptual understanding of city scenes through human perspective. In *International Conference on Learning Representations (ICLR)*.
- He, K., Sun, J., and Tang, X. (2011). Single image haze removal using dark channel prior. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 33(12):2341–2353.
- Hou, Y., Quintana, M., Khomiakov, M., Yap, W., Ouyang, J., Ito, K., Wang, Z., Zhao, T., and Biljecki, F. (2024). Global streetscapes – a comprehensive dataset of 10 million street-level images across 688 cities for urban science and analytics. *ISPRS Journal of Photogrammetry and Remote Sensing*, 215:216–238.
- Huang, T., Wu, Z., Wu, J., Hwang, J., and Rajagopal, R. (2024). Citypulse: Fine-grained assessment of urban change with street view time series. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(20):22123–22131.
- Ito, K., Kang, Y., Zhang, Y., Zhang, F., and Biljecki, F. (2024). Understanding urban perception with visual data: A systematic review. *Cities*, 152:105169.
- Ki, D., Lee, S., Han, C., Kim, Y., Koo, B. W., and Hwang, U. (2026). Does weather matter? examining measurement bias in street view image-based urban perception assessments. *Computers, Environment and Urban Systems*, 127:102421.
- Liu, Y., Wang, Z., Ren, S., Chen, R., Shen, Y., and Biljecki, F. (2025). Physical urban change and its socio-environmental impact: Insights from street view imagery. *Computers, Environment and Urban Systems*, 119:102284.
- Mushkani, R. (2026). Benchmarks for vision-language models in urban perception should be reliability-aware and negotiated. In *Proceedings of the 43rd International Conference on Machine Learning (ICML)*. arXiv:2606.00871.
- Naik, N., Kominers, S. D., Raskar, R., Glaeser, E. L., and Hidalgo, C. A. (2017). Computer vision uncovers predictors of physical urban change. *Proceedings of the National Academy of Sciences*, 114(29):7571–7576.
- Salesses, P., Schechtner, K., and Hidalgo, C. A. (2013). The collaborative image of the city: Mapping the inequality of urban perception. *PLoS ONE*, 8(7):e68400.
- Stalder, S., Volpi, M., Büttner, N., Law, S., Harttgen, K., and Suel, E. (2024). Self-supervised learning unveils urban change from street-level images. *Computers, Environment and Urban Systems*, 112:102156.
- Torkko, J. (2026). Pairwise image finder: An open-source tool for finding visually aligned street-level image pairs for urban perception studies. arXiv:2606.08795.
- Zhao, T., Liang, X., Biljecki, F., Tu, W., Cao, J., Li, X., and Yi, S. (2025). Quantifying seasonal bias in street view imagery for urban form assessment: A global analysis of 40 cities. *Computers, Environment and Urban Systems*, 120:102302.

A Study design

Table 2: *The four experiments, with the unit at which each is analysed. Frame pairs join two consecutive epochs at one standpoint and heading; transitions average the two headings of the same step.*

Experiment	Source	Scope	Rows analysed	Unit of inference	Model
Field panel	Street View	5 US cities, 2007–2023	2,367 + 224 transitions	transition, clustered by site	gemini-2.5-flash
Noise floor	Streetscapes	150 images, 6 continents	320 paired scorings	image	gemini-2.5-flash
Perturbation	Streetscapes	150 images, 16 families	9,750 responses	base image	three, see §5
Optics	Mapillary	40 panoramas, 3 conditions	120 scored pairs	panorama	gemini-2.5-flash

B Perturbation families and levels

Sixteen families are applied at 57 levels in total: atmospheric scattering ($\beta = 0.5, 1.0, 2.0$), motion blur (5, 11, 21 px), defocus (2, 4, 8 px), camera yaw (5, 10, 20°), lens contamination (0.3, 0.6, 1.0), rain (0.3, 0.6, 1.0), glare (0.15, 0.35, 0.6), windscreen reflection (0.2, 0.4, 0.7), foliage state (0.33, 0.66, 1.0), field of view (45, 60, 75°), resolution (0.5, 1.0, 2.1, 5.1, 8.3, 12.0 MP), JPEG quality (25, 40, 60, 80, 95), exposure ($\pm 0.75, \pm 1.5$ EV), white balance (4000, 5000, 8000, 10000 K), contrast ($\times 0.6, 0.8, 1.25, 1.6$) and saturation ($\times 0.4, 0.7, 1.3, 1.8$). Levels span the range the corpus exhibits, with the atmospheric families set by the calibration of Figure 5b. Camera yaw is applied as the homography KRK^{-1} for a pinhole source and by resampling the sphere for an equirectangular one, so the manipulation is exact in both cases rather than approximated by an image shift.

Rain was revised after calibration. It originally drew falling streaks; measured against real rainy imagery, which is softer than clear imagery rather than sharper, that mechanism moved the diagnostic statistic in the wrong direction, and it was rewritten from the physical consequences of rain: overcast illumination, a partly specular wet road, scattering in air, and droplets on the lens.

C Prompt texts

Five prompts are used. Two score perception, differing only in whether the artefact block below is included. Three detect change: a task description alone, the same with the artefact block, and the same again with the magnitude threshold below. The two blocks are the experimental manipulation behind Figure 4 and Table 1 and are given in full; the surrounding scaffolding, which does not vary, is released with the code.

The artefact block.

```
IMPORTANT --- judge the place, not the photograph.
These images come from crowdsourced street-level photography. They were taken with
different cameras, in different weather, at different times of day and year, from
slightly different positions. None of that is a property of the street. Score the
street as a competent observer standing there would perceive it, discounting every
one of the following:
--- image resolution, sharpness, compression artefacts, sensor noise
--- exposure, brightness, contrast, colour cast, white balance
--- motion blur, lens blur, lens flare, glare, water or dirt on the lens
--- weather at the moment of capture (rain, snow cover, fog, cloud)
```

```
--- time of day, sun angle, shadows, whether the scene is lit or overcast
--- season and the leaf state of the same plants
--- camera height, lens field of view, projection type, framing
--- vehicles, pedestrians, cyclists and other movable objects that happen to be
present
A blurry photograph of a well-maintained street is still a well-maintained street. A
crisp photograph of a derelict street is still a derelict street.
```

The magnitude threshold.

```
REPORT ONLY SUBSTANTIAL CHANGE.
A change is substantial if it alters what the street is or how it works, not merely
how it looks on the day. Report it when a structure, surface or fixed element has
been built, demolished, replaced, widened, narrowed or rebuilt.
Do not report:
--- graffiti, tags, posters, stickers or repainting of an existing surface
--- kerb or road markings repainted in the same configuration
--- construction hoarding, scaffolding, cones or temporary site barriers, unless the
building behind them has visibly changed
--- a plant that has grown, been trimmed, or changed with the season, where the
planting itself is unchanged
--- litter, dumped items, wear, staining, or a surface that is merely dirtier
--- individual items of street furniture appearing or disappearing
The test to apply: would a planner recording what happened on this street write this
down. If the honest answer is that the street is the same street with a different
surface appearance, report no change.
```

D Released tables

Figure 4 averages over twelve dimensions in panel (a) and reports them individually in panel (b). The underlying per-dimension figures, the signed drift by dimension and by capture era, the decomposition of the pairwise difference into between-standpoint and within-standpoint variance, the full condition profiles behind Figure 5b, the family-by-level response behind Figure 6, and the city-by-city contrasts behind Figure 9 are released as tables with the code.