

Nyström Attention Matches Full Attention for Cross-Sectional Stock Prediction

Kunhan Guo

The University of Hong Kong
aguo0521@connect.hku.hk

Abstract

MASTER’s inter-stock multi-head attention—the module responsible for modeling cross-sectional stock relationships—accounts for 42.5% of model parameters and 25% of predictive value. We systematically decompose this module and uncover a surprising structure: the learned attention is near-uniform (perplexity 278/300), yet forcing exact uniformity eliminates all cross-sectional discrimination. Spectral analysis resolves this paradox: the deviation from uniformity is *low-rank* (effective rank ~ 65 , top-10 modes capture 96.5% of energy), explaining why sparse approximations consistently fail while Nyström low-rank attention ($m = 32$ landmarks) matches full $O(N^2)$ attention at $O(mN)$ cost—certified equivalent via TOST at both $N = 300$ (5 seeds, Rank IC $p = 0.003$) and $N = 800$ (10 seeds, Rank IC $p = 0.034$). Additional findings include: (i) attention anti-correlates with return similarity (Spearman $\rho = -0.614$; on the industry-labeled subset, -0.645 unconditionally and -0.627 after controlling for industry, beta, and volatility), suggesting complementarity-seeking rather than correlation mining; (ii) all graph-based alternatives degrade performance, with hard masking worse than complete module removal; and (iii) at $N \approx 3,500$ with adapted architectures, no cross-stock module (GCN, Nyström, or MASTER-style pipeline) significantly outperforms a per-stock LSTM baseline ($n = 4$ seeds), indicating that the benefits observed at smaller scales do not trivially transfer. These results establish that the inter-stock attention’s value resides in a compressible, dynamic, near-global redistribution that rewards low-rank approximation but resists sparsification.

1 Introduction

Cross-sectional stock prediction—ranking which stocks will outperform within a universe—is a core task in quantitative finance. Recent Transformer-based models, particularly MASTER (Market-Guided Stock Transformer) [1], have become standard baselines by applying multi-head attention *across stocks* at each timestep. This inter-stock attention module (Step ③ in MASTER’s five-stage pipeline) claims to capture “momentary and cross-time stock correlations,” and subsequent work has sought to enhance it with explicit graph structures drawn from industry membership, supply chains, or return correlations [4, 5, 6, 8, 3, 7, 14].

But what does this module actually learn? And can it be made cheaper? We address both questions through a systematic decomposition combining statistical diagnostics, controlled ablations, spectral analysis, and efficient-attention experiments. Our findings challenge several prevailing assumptions:

1. **The attention is near-uniform but not uniform.** Per-stock entropy is within 1.2% of the theoretical maximum, yet forcing exact uniformity eliminates all cross-sectional discrimi-

nation. The deviation from uniformity contributes only 1.3% of output energy but is the *sole* source of cross-sectional variance.

2. **The deviation structure is low-rank.** Spectral analysis of the deviation matrix $D = A - \frac{1}{N}\mathbf{1}\mathbf{1}^\top$ reveals an effective rank of ~ 65 (out of 300 stocks), with the top-10 singular values capturing 96.5% of the Frobenius norm. This directly predicts that low-rank attention should succeed while sparse attention should fail.
3. **Nyström attention matches full attention at $O(mN)$.** Replacing full $O(N^2)$ attention with Nyström approximation using just $m = 32$ landmarks produces equivalent Rank IC (TOST $p = 0.003$ within ± 0.005) and equivalent IC within ± 0.008 (TOST $p = 0.028$) across 5 seeds, with *lower* seed-to-seed variance.
4. **Sparsification consistently fails.** Graph-masked, top- K , and deviation-thresholded variants all degrade performance. Hard masking to correlation-based neighbors is worse than removing the module entirely. A 2×2 factorial reveals that IC scales with neighbor *count* while Rank IC scales with weight *sharpening*—requirements that are mutually exclusive under sparsity.
5. **Large- N transferability is limited.** At $N \approx 3,500$ (full A-share market) with adapted architectures, no cross-stock module significantly outperforms a per-stock LSTM baseline across multiple seeds ($n = 4$). The benefits documented at $N = 300\text{--}800$ do not trivially transfer to larger, noisier universes—a finding that itself required multi-seed validation to establish, as single-seed results suggested a spurious trade-off.

Together, these findings establish that MASTER’s inter-stock attention implements a *compressible, dynamic, complementarity-seeking* redistribution of cross-sectional information. Its value is real but resides in a low-rank structure that rewards Nyström approximation and resists sparsification—a distinction with direct implications for scaling stock Transformers, tempered by the observation that scaling benefits are not guaranteed at larger N .

2 Background: MASTER Architecture

MASTER [1] processes N stocks over T lookback timesteps through five stages. **Step ①** applies market-guided gating, using market index features to dynamically rescale each stock’s input. **Step ②** performs intra-stock temporal attention—a Transformer encoder operating independently per stock across T timesteps. **Step ③** applies inter-stock multi-head attention at each timestep:

$$z_{u,t} = \sum_{v=1}^N \alpha_{uv}^{(t)} V_v^{(t)}, \quad \alpha_{uv}^{(t)} = \text{softmax} \left(\frac{Q_u^{(t)} K_v^{(t)\top}}{\sqrt{d}} \right) \quad (1)$$

This module contains 329,216 parameters (42.5% of the model), including QKV projections, a feed-forward network, and LayerNorm. **Step ④** collapses the temporal dimension via attention (the last timestep queries all others), and **Step ⑤** applies a linear prediction head.

Why focus on Step ③? We ablate each step individually (Table 1). Step ③ contributes the largest IC drop (-25.3%) and is the only module enabling cross-stock information flow. Notably, removing Step ④ (temporal aggregation) *increases* Rank IC by 5.4%, foreshadowing the aggregation-hurts-ranking phenomenon we document at scale in Section 7.

Table 1: Full pipeline ablation (CSI300, seed 0). Step ③ is the dominant value contributor. ΔIC computed from unrounded values; displayed IC is rounded to 4 decimal places.

Configuration	IC	Rank IC	ΔIC	Params
Full MASTER	0.0646	0.0685	—	775,041
No Step ① (gating)	0.0622	0.0673	−3.6%	764,929
No Step ② (temporal attn)	0.0612	0.0671	−5.2%	445,825
No Step ③ (inter-stock attn)	0.0482	0.0514	−25.3%	445,825
No Step ④ (temporal agg.)	0.0605	0.0722	−6.3%	709,505

3 Experimental Setup

Data. Our primary experiments use the MASTER opensource CSI300 dataset [1]: ~ 300 A-share stocks with 222-dimensional features (158 Alpha158 technical factors, 63 market features, 1 label), following the original train/validation/test split (619 test days). For scale validation, we use the full A-share market via Qlib ($\sim 3,486$ stocks per day on average), with 17 features computed from raw OHLCV, training on 2010–2017 and testing on 2019–2020 (383 days).

Metrics. We report IC (Pearson correlation between predicted and actual 4-day forward returns), Rank IC (Spearman correlation, measuring ordering accuracy), and their information ratios ($\text{ICIR} = \text{mean}/\text{std}$, measuring consistency). The label is defined as $\text{close}(t+5)/\text{close}(t+1) - 1$, a strictly future return with a one-day gap, following the MASTER opensource configuration. Long-short portfolio Sharpe ratios are reported for scale experiments.

Protocol. All CSI300 experiments use MASTER’s original loss-threshold stopping (train loss ≤ 0.95) with Adam optimization. All Step ③ variants are implemented as subclasses without modifying the original codebase, ensuring identical treatment of Steps ①, ②, ④, and ⑤. Single-seed (seed 0) results are used for mechanistic decomposition where relative ordering across many controlled variants is the focus; all equivalence claims are validated across 5–10 seeds with proper TOST testing.

4 Attention Diagnostic

We extract inter-stock attention weights from a trained MASTER model across all 619 test days and characterize their statistical properties.

Near-uniform distribution. The mean per-row attention entropy is 5.63 nats, compared to $\ln(300) = 5.70$ for a uniform distribution—a gap of only 1.2%. The corresponding perplexity (effective number of attended stocks) is 278 out of 300. Figure 1 shows the time-averaged attention matrix sorted by Shenwan Level-1 industry: no block-diagonal structure is visible.

Anti-correlation with return similarity. The Spearman correlation between pairwise attention weights and pairwise return correlations is $\rho = -0.614$ ($p \approx 0$, $n = 73,910$ valid pairs from a universe of 433 stocks; pairs require ≥ 60 overlapping return observations). Stocks that co-move receive *less* attention. This association is robust to controls: on the 423 stocks (out of 433) with

Shenwan L1 industry labels, the unconditional $\rho = -0.645$ (71,165 both-labeled pairs); a multiple regression controlling for same-industry membership, beta difference, and volatility difference yields a partial $\rho = -0.627$. Controls attenuate the association only marginally (Figure 2). Same-industry stock pairs receive significantly *lower* attention than cross-industry pairs ($b = -0.011$, $p = 3 \times 10^{-4}$). Per-day Spearman ρ is negative on all 619 test days (mean -0.215 , std 0.071). The per-day mean is substantially smaller than the pooled estimate because pooling across days absorbs shared cross-sectional structure that is constant within each day but varies across days.

Temporal dynamics. Centered cosine similarity between attention matrices decays as: lag-1: 0.967, lag-5: 0.665, lag-20: 0.048 (Figure 2). The attention pattern fully reorganizes every 2–4 weeks. PCA of flattened daily deviation matrices shows PC1 explaining only 9% of variance, indicating drift through high-dimensional space rather than oscillation between discrete modes. A permutation test confirms that market regime (up/flat/down days) does not drive attention changes ($p = 0.17$).

Preliminary interpretation. By conventional entropy diagnostics, the attention is “effectively uniform.” As we show next, this interpretation is misleading—the 1.2% deviation from uniformity carries all of the module’s cross-sectional value.

5 What Carries the Value?

5.1 Graph-Guided Variants All Fail

If near-uniform attention wastes capacity on irrelevant stock pairs, explicit graph structure should help. We test three approaches—hard masking (GraphMask), soft biasing (GraphBias), and GCN replacement [12]—using both return-correlation and industry-based graphs. Table 2 shows that *every* variant degrades performance. Hard masking to correlation-based neighbors produces IC *below* complete module removal (0.045 ± 0.004 vs. 0.050 ± 0.001 across 4 seeds; Table 2), directly contradicting the intuition that attention should focus on “related” stocks.

Table 2: Step ③ variants (CSI300). Multi-seed ($n = 4$) for key configs; others seed 0. Ordering Original > No Step ③ > GraphMask holds across seeds (paired t : Original vs. GraphMask $p = 0.040$).

Configuration	IC	Rank IC	ICIR	Seeds
Original MASTER	0.057 ± 0.008	0.066 ± 0.003	0.386	4
GraphBias + Corr	0.0497	0.0580	0.319	1
GCNReplace + Corr	0.0487	0.0570	0.374	1
No Step ③	0.050 ± 0.001	0.052 ± 0.002	0.377	4
GraphMask + Industry	0.0437	0.0458	0.300	1
GraphMask + Corr	0.045 ± 0.004	0.049 ± 0.002	0.340	4
StaticAttn (oracle $\tilde{A}$)	0.0497	0.0595	0.382	1
UniformAttn ($1/N$)	0.0491	0.0514	0.368	1
MeanPool	0.0502	0.0536	0.377	1

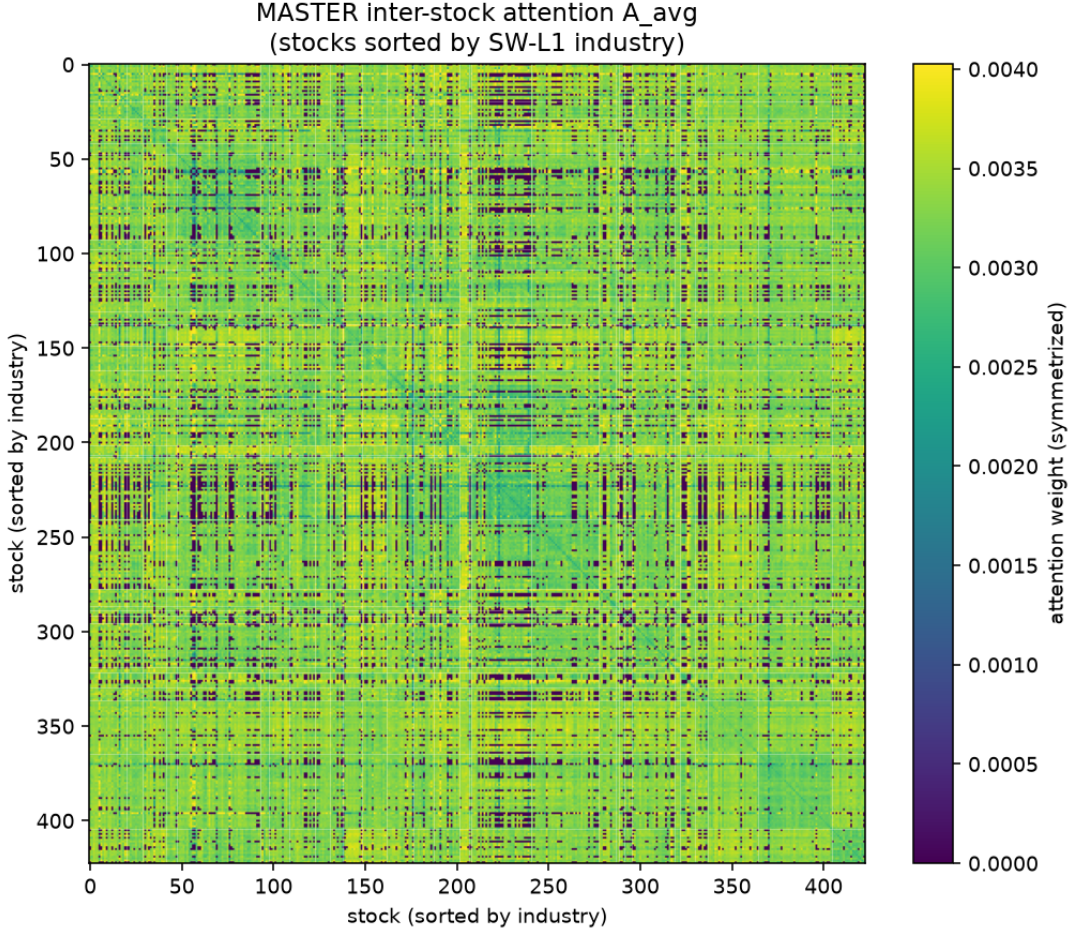


Figure 1: Time-averaged attention matrix (centered at $1/N$). Blue = below-average, red = above-average. Stocks sorted by Shenwan L1 industry; no block-diagonal structure. The matrix shows 433 unique stocks appearing across test days; on any given day ~ 300 are active.

5.2 The Deviation Is Small but Essential

To understand why near-uniform attention outperforms all alternatives, we decompose Step ③’s output. For each stock u :

$$z_u = \underbrace{\frac{1}{N} \sum_v V_v}_{z_{\text{uniform}}} + \underbrace{\sum_v \left(\alpha_{uv} - \frac{1}{N} \right) V_v}_{z_{\text{deviation},u}} \quad (2)$$

The uniform component z_{uniform} is identical for all stocks (a rank-1 broadcast) and contributes 98.7% of output energy. The deviation component $z_{\text{deviation},u}$ contributes only 1.3% of energy but is the *sole* source of cross-sectional variance—without it, Step ③’s output carries no stock-specific information. We verify that value-vector heterogeneity does not affect this conclusion: the coefficient of variation of $\|V_v\|$ across stocks is 0.10, and the entropy of effective weights $\alpha_{uv}\|V_v\|$ differs from raw attention entropy by only 0.002 nats.

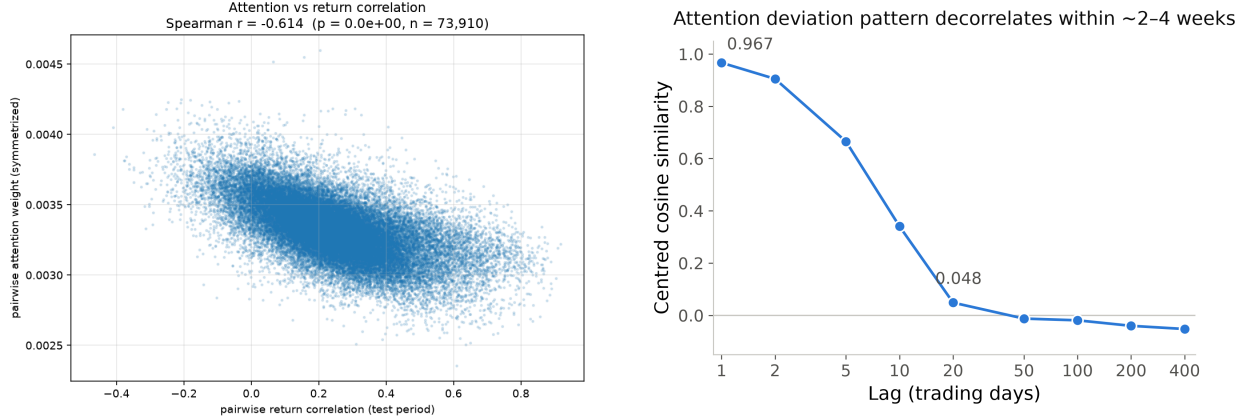


Figure 2: **Left:** Pairwise attention weight vs. return correlation ($\rho = -0.614$; $n = 73,910$ pairs). **Right:** Centered cosine similarity vs. lag; full decorrelation in ~ 20 trading days.

5.3 Dynamic Recomputation Is Essential

We freeze the attention to the time-averaged oracle matrix $\bar{A}$ (computed on the test set, giving the static pattern its best chance). StaticAttn recovers $\sim 47\%$ of Rank IC value and only $\sim 9\%$ of IC value relative to the floor. Combined with the temporal dynamics analysis (Section 4), this establishes that value resides in daily recomputation, not in a stable backbone.

6 Spectral Analysis and Nyström Approximation

6.1 The Deviation Matrix Is Low-Rank

The preceding sections establish that Step ③’s value lies in a near-uniform, dynamic, anti-correlation-seeking attention pattern. Sparsification fails because it destroys near-global support. We now ask: is there a *different* axis of approximation?

We compute the SVD of the deviation matrix $D = A - \frac{1}{N}\mathbf{1}\mathbf{1}^\top$ averaged over test days. The effective rank is ~ 65 (out of 300), and the top-10 singular values capture 96.5% of $\|D\|_F^2$. This structure is robust: across 208 individual day $\times$ head matrices, the median effective rank is 65 [IQR: 45–81] and the median top-10 energy share is 96.8%.

Is low-rank structure learned or inherent? We compute the deviation spectrum of 10 randomly initialized (untrained) MASTER models. The random-init deviation is *also* low-rank (effective rank 59 ± 7 , top-10 energy $95.6 \pm 0.9\%$), comparable to the trained model (rank ~ 65 , top-10 energy 96.5%). Training modestly increases the effective rank and lowers entropy (5.49 vs. 5.68), but the low-rank property is present before any learning occurs. Thus, low-rank is inherent to softmax attention over N items; what training contributes is the *specific pattern* of deviations carrying predictive value. Nyström succeeds because softmax attention is architecturally guaranteed to remain low-rank, regardless of training.

This low-rank structure has a direct algorithmic implication: the Nyström method approximates the full attention matrix using $m \ll N$ landmark points, effectively performing a low-rank factorization. If the deviation matrix *is* low-rank, Nyström should preserve its structure at $O(mN)$ cost.

6.2 Nyström Matches Full Attention

We replace Step ③’s full attention with Nyström attention [9] using $m = 32$ landmarks (10.7% of N), selected uniformly at random each forward pass. The pseudo-inverse is computed via 6 Newton–Schulz iterations to avoid materializing any $N \times N$ matrix. All other components (FFN, LayerNorm, residual connections) are unchanged.

Table 3: Nyström vs. full attention (CSI300, 5 seeds). TOST equivalence: Rank IC within ± 0.005 ($p = 0.003$); IC within ± 0.008 ($p = 0.028$).

	IC	Rank IC	ICIR	Rank ICIR
Original ($O(N^2)$)	0.058 ± 0.007	0.066 ± 0.003	0.386	0.429
Nyström $m=32$ ($O(32N)$)	0.059 ± 0.002	0.066 ± 0.003	0.389	0.416
TOST ($\delta = 0.005$): Rank IC $p = 0.003$ ✓ IC $p = 0.099$				
TOST ($\delta = 0.008$): IC $p = 0.028$ ✓ 90% CI: IC $[-0.005, +0.007]$, Rank IC $[-0.002, +0.001]$				

The result (Table 3) confirms the spectral prediction. A TOST equivalence test [13] establishes that Nyström Rank IC is equivalent to full attention within ± 0.005 ($p = 0.003$); IC equivalence holds at the ± 0.008 margin ($p = 0.028$) but not at ± 0.005 ($p = 0.099$), reflecting higher IC variance across seeds. Nyström also exhibits notably lower seed-to-seed IC variance (0.002 vs. 0.007). Landmark-induced stochasticity is negligible (eval jitter $< 10^{-4}$).

6.3 Why Low-Rank Works but Sparse Does Not

Table 4 compares the full landscape of efficient alternatives. Two patterns emerge. First, low-rank methods dominate sparse methods: Nyström ($m=32$) matches the original on Rank IC while TopK ($K=16$) retains at most 50% of either metric (IC equivalence across seeds is established in Table 3). Second, *more* landmarks do not help: $m=64$ performs worse than $m=32$, a phenomenon we analyze in detail in Section 6.4. Landmark-based approximation (Nyström) also substantially outperforms random-feature approximation (Performer) at the same m .

Table 4: Efficient attention sweep (CSI300). Multi-seed for the main comparisons; exploratory rows are seed 0 only. Low-rank dominates sparse; landmark count is non-monotonic (see §6.4).

Configuration	IC	Rank IC	Complexity	Seeds
Original	0.058 ± 0.007	0.066 ± 0.003	$O(N^2)$	5
Nyström $m=32$	0.059 ± 0.002	0.066 ± 0.003	$O(32N)$	5
DeviationAttn	0.052 ± 0.005	0.065 ± 0.004	$O(N^2)^*$	5
TopK $K=16$	0.052 ± 0.004	0.064 ± 0.004	$O(16N)$	5
No Step ③ (floor)	0.050 ± 0.001	0.052 ± 0.002	—	4
<i>Seed 0 only (exploratory):</i>				
Nyström $m=64$	0.0554	0.0603	$O(64N)$	1
Performer $m=32$	0.0540	0.0577	$O(32N)$	1
UniformAttn	0.0491	0.0514	$O(N^2)$	1

*Requires full N^2 softmax before thresholding.

The mechanistic explanation follows from the near-uniform attention structure. In a distribution where most weights are $\approx 1/N$, the top- K entries are themselves near-equal (perplexity 15.9/16 at

$K=16$). Subtracting a constant from near-equal values cannot create meaningful differentiation—sharpening requires support spanning a range around $1/N$, which small K cannot provide. This is a *structural* prediction: all small- K weighted variants should fail identically, and our 2×2 factorial (varying support size $\times$ weighting rule) confirms this.

6.4 Landmark Count: A Non-Monotonic Profile

A dense sweep of $m \in \{8, 16, 24, 32, 48, 64, 96, 128\}$ with 5 seeds each reveals a non-monotonic relationship between landmark count and performance (Figure 3). Performance peaks at $m = 32$ (IC 0.059 ± 0.002 , Rank IC 0.066 ± 0.003), dips at $m = 48$ (1.2σ below $m = 32$), and remains below the peak at $m = 64$ – 128 . This non-monotonic profile, confirmed across seeds, resolves an apparent contradiction: $m = 64$ underperforms $m = 32$ despite the deviation matrix having effective rank ~ 65 . The explanation is that m landmarks in Nyström do not correspond one-to-one to SVD components; over-sizing the landmark set worsens the conditioning of the pseudo-inverse, increasing approximation variance faster than it reduces bias.

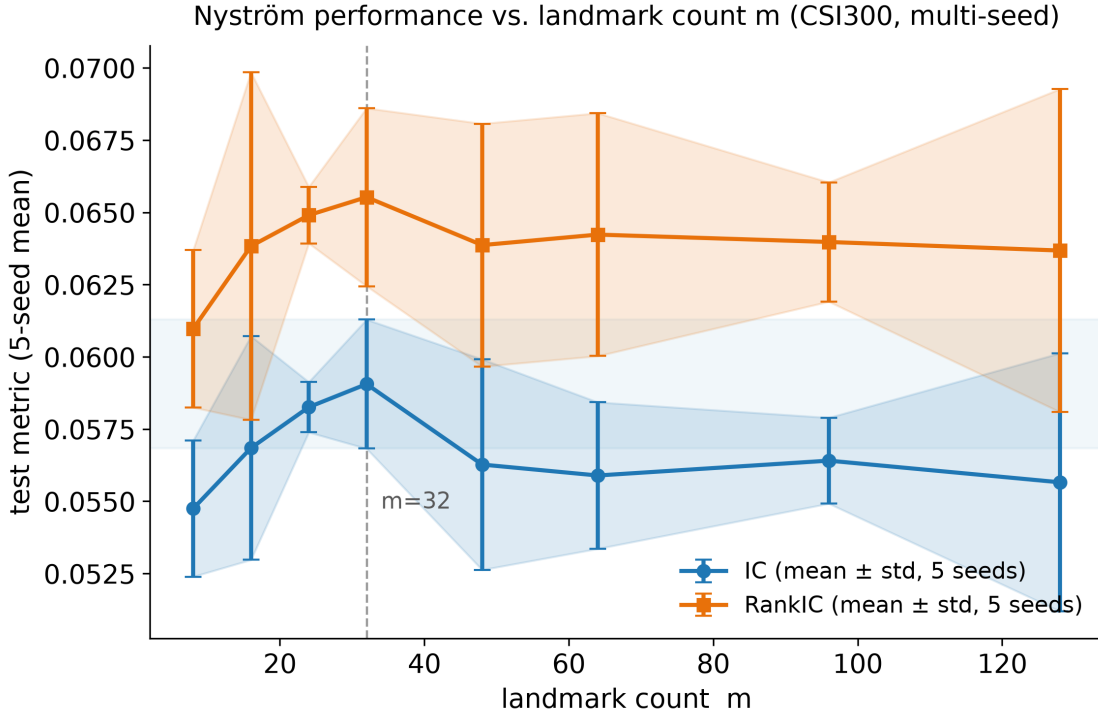


Figure 3: Nyström performance vs. landmark count m (CSI300, 5 seeds each, ± 1 std). Peak at $m = 32$; non-monotonic profile reflects bias-variance trade-off in pseudo-inverse computation.

6.5 Dynamic Sampling Is Essential, Not Just Low-Rank Structure

To disentangle whether Nyström’s success derives from its low-rank structure or its dynamic (per-forward-pass) landmark resampling, we test a **LearnedLowRank** baseline: each stock receives a learnable embedding $e_i \in \mathbb{R}^{32}$, and attention scores are computed as $a_{ij} = e_i^\top e_j / \sqrt{32}$ (static, trained end-to-end). This provides a rank-32 attention pattern that is *optimized for the task* but *fixed across days*.

Table 5: Dynamic vs. static, crossed with full-rank vs. low-rank (CSI300, seed 0; 5-seed means for Original and Nyström are in Table 3). Dynamic routing is essential; low-rank is viable only when dynamic.

	IC	Rank IC	Dynamic?	Rank
Full attention	0.0646	0.0685	Yes	Full
Nyström $m=32$	0.0607	0.0685	Yes (random)	Low
StaticAttn (oracle)	0.0497	0.0595	No (frozen)	Full
LearnedLowRank $r=32$	0.0478	0.0500	No (learned)	Low
No Step ③	0.0482	0.0514	—	—

Table 5 reveals a clear interaction: low-rank approximation preserves performance only when combined with dynamic, data-dependent routing (Nyström). A static low-rank attention, even when optimized end-to-end, collapses to the no-attention floor ($IC = 0.0478 \approx 0.0482$). This establishes that Nyström’s success is not merely a consequence of low-rank structure but requires the QK-driven, day-specific attention computation that adapts to each day’s cross-sectional configuration.

7 Cross-Stock Aggregation at Scale

The Nyström result enables, in principle, scaling cross-stock attention to large universes at $O(mN)$ cost. We test scaling along two axes: first within the same MASTER codebase at $N = 800$ (CSI800), then with adapted architectures at $N \approx 3,500$.

7.1 CSI800: Same Codebase, Larger Universe

Using the same MASTER architecture, features, and training protocol as CSI300—only N changes—we compare Original vs. Nyström at $N \approx 800$ (10 seeds each).

Table 6: Nyström at CSI800 ($N \approx 800$, 10 seeds). Equivalence certified within ± 0.005 on both metrics.

	Original ($n=10$)	Nyst $m=32$ ($n=10$)
IC	0.047 ± 0.004	0.045 ± 0.004
Rank IC	0.059 ± 0.004	0.059 ± 0.006
TOST ($\delta = 0.005$): IC $p = 0.038$ ✓ RankIC $p = 0.034$ ✓		
90% CI: IC $[-0.005, +0.001]$ RankIC $[-0.004, +0.004]$		

At $N = 800$, Nyström with $m = 32$ (4% coverage) is certified equivalent to full attention within ± 0.005 on both IC ($p = 0.038$) and Rank IC ($p = 0.034$). Importantly, increasing landmarks to $m = 80$ (10%, matching CSI300’s ratio) does *not* improve performance—the optimal $m \approx 32$ is stable across scale. An initial 5-seed analysis suggested a possible gap; doubling to 10 seeds revealed this as a statistical-power artifact, not a real degradation.

7.2 $N \approx 3,500$: Adapted Architecture

We further test at $N \approx 3,500$ using the full A-share market with adapted architectures (17 OHLCV-derived features, $d_{\text{model}} = 64$, no market gating). Table 7 reports results across 4 seeds.

Table 7: Large-scale validation ($N \approx 3,500$, 4 seeds). No cross-stock module significantly outperforms PureLSTM.

	IC	Rank IC	Sharpe
PureLSTM	0.043 ± 0.002	0.056 ± 0.003	5.6 ± 0.5
LSTM + GCN	0.034 ± 0.008	0.063 ± 0.009	4.1 ± 1.5
MASTER + Nyst32	0.037 ± 0.008	0.050 ± 0.016	5.6 ± 1.1

At this scale, no cross-stock module significantly outperforms PureLSTM on either IC or Rank IC (paired t -tests: MASTER+Nyst32 vs. PureLSTM IC $p = 0.27$, Rank IC $p = 0.53$; $n = 4$). An initial single-seed analysis (seed 42) had suggested a consistent IC $\uparrow$ /Rank IC $\downarrow$ trade-off across all module types, but this pattern did not survive multi-seed validation—underscoring the necessity of multi-seed evaluation in financial ML. The high seed-to-seed variance at $N \approx 3,500$ (e.g., MASTER+Nyst32 IC std = 0.008, vs. 0.002 at CSI300) suggests that the noisier, more heterogeneous full-market cross-section is substantially harder to model, and that Nyström’s benefits—established at $N = 300$ and $N = 800$ within MASTER’s native pipeline—do not trivially transfer to adapted architectures at larger scale.

8 Efficiency

The equivalence results establish that Nyström preserves predictive quality. We now quantify the computational savings via forward-pass benchmarks on a Tesla T4 (16 GB, CUDA 12.8), using the deployed Step ③ configuration ($d_{\text{model}} = 256$, $n_{\text{head}} = 2$, $T = 8$), with 50 timed passes after 10 warmup iterations (Table 8, Figure 4).

Table 8: Forward-pass efficiency: full attention vs. Nyström ($m = 32$). Median latency (ms) and peak GPU memory (MB) on a Tesla T4 (16 GB). $d_{\text{model}} = 256$, $n_{\text{head}} = 2$, $T = 8$.

N	Latency (ms)			Memory (MB)		
	Full	Nyst	Speedup	Full	Nyst	Saving
300	1.65	5.90	$0.3\times$	37	36	$1.0\times$
800	3.80	5.59	$0.7\times$	112	77	$1.5\times$
1,500	10.30	7.24	$1.4\times$	297	135	$2.2\times$
2,500	25.87	6.57	$3.9\times$	727	216	$3.4\times$
3,500	48.66	8.92	$5.5\times$	1,350	298	$4.5\times$
5,000	96.30	12.82	$7.5\times$	2,642	421	$6.3\times$
9,000	339.5	23.17	$14.7\times$	8,194	732	$11.2\times$
12,000	OOM	30.46	—	OOM	974	—

At $N = 300$, Nyström is *slower* (5.90 vs. 1.65 ms): the Newton–Schulz pseudo-inverse imposes a fixed overhead of ~ 4 ms that is independent of N .¹ The latency crossover occurs at $N^* \approx 1,300$;

¹An iteration-count ablation confirms this: at $N = 300$, Nyström latency rises from 2.29 ms (0 iterations) to

beyond this, Nyström’s $O(mN)$ scaling wins decisively— $5.5\times$ at $N = 3,500$ and $14.7\times$ at $N = 9,000$. The memory scaling is unambiguous: from $N = 300$ to $9,000$ (a $30\times$ increase), full-attention memory grows $\times 219$ (consistent with $\propto N^2$) while Nyström grows $\times 20$ (consistent with $\propto N$). Full attention exhausts the 16 GB budget at $N = 12,000$, where Nyström still requires only 974 MB.

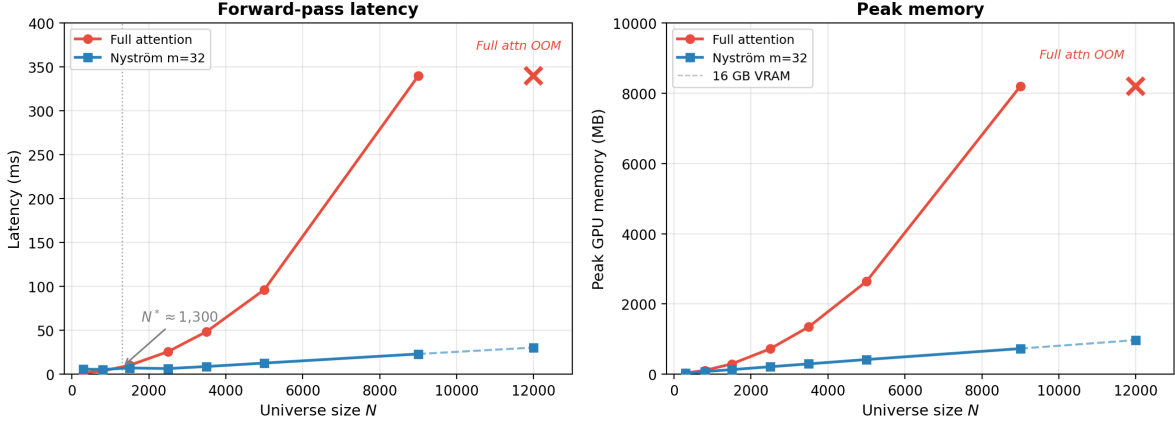


Figure 4: Forward-pass latency and memory vs. N on a Tesla T4 (16 GB), extended to $N = 12,000$. Full attention OOMs at $N = 12,000$; Nyström scales linearly and uses 974 MB there. Latency crossover at $N^* \approx 1,300$.

Training overhead. Nyström training is $\sim 2\times$ slower per epoch due to Newton–Schulz iterations (6 sequential matrix multiplications). Training is a one-time offline cost; daily inference for portfolio rebalancing is the recurring cost that scales with N . At CSI300 we do not claim wall-clock savings—full attention is in fact faster below $N^* \approx 1,300$. The value proposition is at scale: a $5\text{--}15\times$ latency reduction with proportional memory savings for $N > 3,000$, at equivalent predictive quality.

9 SVD Factor Interpretation

The spectral analysis reveals *that* the deviation is low-rank; we now ask *what* each component encodes. Mapping the top SVD components of D to financial characteristics reveals that attention implicitly implements a multi-factor risk model (Table 9).

The dominant mode (PC1, 79.5%) tracks cross-sectional volatility dispersion—high-volatility stocks load on one end, low-volatility on the other. This single mode explains both the anti-correlation finding (high-vol stocks co-move and cluster on the same side of PC1, receiving less differentiating attention) and Nyström’s success (a structure dominated by one mode is trivially captured by few landmarks).

PC4 provides the cleanest industry signal ($\eta^2 = 0.48$): banks and construction (defensive, low-beta) vs. autos and power equipment (cyclical, high-beta). PCs 2, 3, 5, and 7 correspond to momentum, sector rotation (old vs. new economy), liquidity, and reversal—canonical factors in the quantitative finance literature.

MASTER’s inter-stock attention thus functions as an *implicit 6-factor risk model*: it routes information along dimensions that align with well-known financial risk factors, despite never being explicitly trained on factor labels.

5.95 ms (6 iterations), i.e. ~ 0.6 ms per iteration. At $N = 3,500$ the same 6 iterations add only 0.4 ms ($9.07 \rightarrow 9.48$ ms), because the $O(mN)$ attention computation dominates.

Table 9: Top SVD components of the deviation matrix mapped to financial risk factors. Six components (91% of energy) have interpretable financial meaning; PCs 6 and 8–10 do not.

PC	Energy	Beta ρ	Vol ρ	η^2	Interpretation
1	79.5%	+0.11	+0.48	0.12	Volatility / market mode
2	3.6%	−0.04	−0.05	0.14	Momentum (pharma vs. power equip.)
3	3.4%	+0.02	−0.02	0.18	Old vs. new economy
4	2.0%	−0.53	−0.69	0.48	Defensive vs. cyclical
5	1.4%	−0.25	−0.23	0.22	Liquidity / turnover
7	1.1%	−0.05	−0.24	0.21	Reversal
6,8–10	3.5%	—	—	—	Not interpretable

10 Discussion

Entropy diagnostics are insufficient. Perplexity 278/300 would lead most practitioners to conclude that attention is “effectively uniform”—an interpretation our spectral analysis contradicts. Entropy is a bulk statistic that cannot distinguish every weight equaling $1/N$ from most weights near $1/N$ with a structured low-rank deviation. We recommend that attention analysis always include functional ablations (uniform-forcing, oracle-static) alongside distributional summaries.

Complementarity, not similarity. The robust negative association between attention and return correlation ($\rho = -0.614$ unconditionally, -0.627 after controlling for industry, beta, and volatility; negative on all 619 test days) suggests that inter-stock attention implements information *diversification*: each stock attends preferentially to stocks with different price dynamics. This is the opposite of MASTER’s stated “correlation mining” interpretation and is consistent with the failure of correlation-based graph masking.

IC vs. Rank IC dissociation. A recurring pattern across our CSI300 experiments is that IC and Rank IC respond to different mechanisms. IC scales with the *breadth* of aggregation (neighbor count), while Rank IC depends on weight *sharpness*. Tercile analysis by return magnitude reveals that predictive signal is overwhelmingly concentrated in extreme movers: the top tercile by $|\text{return}|$ carries $\sim 77\%$ of IC covariance at CSI300, with $3\text{--}4\times$ the IC of near-zero stocks. This dissociation has practical implications: portfolio strategies focused on return magnitude may prefer cross-stock modules, while pure ranking strategies may be better served by per-stock models. However, at $N \approx 3,500$, neither advantage survives multi-seed validation (Table 7), suggesting that this dissociation is most relevant within MASTER’s native architecture and scale.

Related work. Our finding that near-uniform attention carries predictive value echoes work in NLP showing that fixed or random attention patterns can match learned attention [10, 11]. We extend this to a financial domain and add a spectral explanation. StockMixer [2], from the same research group as MASTER, achieves comparable performance with a static MLP-based cross-stock mixing layer, consistent with our finding that the attention pattern’s effective mechanism is near-global redistribution rather than selective routing.

Economic significance. All Sharpe ratios reported are frictionless (no transaction costs, slippage, or market impact). In the A-share market, where daily turnover is high and short-selling

is restricted, the IC differences of 0.005–0.01 we observe are modest but practically relevant for institutional portfolios. Practitioners should note that IC and Rank IC serve different downstream tasks: return-focused strategies (e.g., long-short with continuous position sizing) benefit from IC improvements, while pure ranking strategies (e.g., top- K selection) depend on Rank IC.

Preprocessing sensitivity. Under improved feature normalization (per-day cross-sectional z-score, beyond Qlib’s default global robust z-score), full attention benefits more than Nyström: Original IC improves by +0.005 with $5.8\times$ lower seed variance, while Nyström IC is unchanged. The TOST Rank IC equivalence weakens from $p = 0.003$ to $p = 0.120$, suggesting the equivalence margin is partially contingent on input conditioning. Better-conditioned inputs allow full $O(N^2)$ attention to extract finer cross-sectional structure that the low-rank approximation misses. This represents an honest boundary of our core claim: Nyström equivalence is robust under standard preprocessing but narrows under optimized preprocessing.

Limitations. The CSI300 decomposition results rely on seed 0 for most ablations; the key Nyström claim is validated across 5 seeds (CSI300) and 10 seeds (CSI800). The large-scale experiments use an adapted MASTER pipeline (17 features, $d_{\text{model}} = 64$, no market gating) rather than the full original architecture, limiting direct comparability with the CSI300 analysis. Our findings are established on a single model (MASTER) in a single market (Chinese A-shares); whether the low-rank deviation structure is a general property of cross-stock attention or specific to MASTER requires verification on additional architectures and markets.

11 Conclusion

We have systematically decomposed MASTER’s inter-stock attention module and established that its value derives from a mechanism fundamentally different from what its design implies. Rather than learning interpretable stock relationships, the module implements a dynamic, near-global redistribution whose deviation from uniformity is low-rank and compressible. This low-rank structure—inherent to softmax attention, not learned—explains why Nyström approximation matches full attention on ranking metrics at $O(mN)$ cost (TOST-certified at $N = 300$ and $N = 800$) while sparsification consistently fails. At $N \approx 3,500$ with adapted architectures, cross-stock modules do not significantly outperform per-stock baselines, indicating that the benefits do not trivially transfer across scales and architectures—a finding that itself required multi-seed validation to establish. Future work may explore cross-stock mechanisms that enhance differentiation rather than smooth it, as well as testing Nyström within MASTER’s full pipeline at larger scales.

References

- [1] T. Li, Z. Liu, Y. Shen, X. Wang, H. Chen, and S. Huang. MASTER: Market-guided stock transformer for stock price forecasting. In *Proc. AAAI*, pages 162–170, 2024.
- [2] J. Fan and Y. Shen. StockMixer: A simple yet strong MLP-based architecture for stock price forecasting. In *Proc. AAAI*, pages 8389–8397, 2024.
- [3] Y. Hu, P. Liu, Y. Li, D. Cheng, N. Li, T. Dai, J. Bao, and S.-T. Xia. FinMamba: Market-aware graph enhanced multi-level Mamba for stock movement prediction. *arXiv:2502.06707*, 2025.

- [4] S. Xiang, D. Cheng, C. Shang, Y. Zhang, and Y. Liang. Temporal and heterogeneous graph neural network for financial time series prediction. In *Proc. CIKM*, pages 3584–3593, 2022.
- [5] H. Du, L. Lv, H. Wang, and A. Guo. TGNS: A transformer-based graph neural network for stock trend forecasting. *Information Sciences*, 720:122555, 2025.
- [6] J. Dong and S. Liang. Hybrid CNN-LSTM-GNN neural network for A-share stock prediction. *Entropy*, 27(8):881, 2025.
- [7] P. Zhu, Y. Li, Y. Hu, Q. Liu, D. Cheng, and Y. Liang. LSR-IGRU: Stock trend prediction based on long short-term relationships and improved GRU. In *Proc. CIKM*, pages 5135–5142, 2024.
- [8] H. Xia, H. Ao, L. Li, Y. Liu, S. Liu, G. Ye, and H. Chai. CI-STHPAN: Pre-trained attention network for stock selection with channel-independent spatio-temporal hypergraph. In *Proc. AAAI*, pages 9187–9195, 2024.
- [9] Y. Xiong, Z. Zeng, R. Chakraborty, M. Tan, G. Fung, Y. Li, and V. Singh. Nyströmformer: A Nyström-based algorithm for approximating self-attention. In *Proc. AAAI*, 2021.
- [10] S. Jain and B. C. Wallace. Attention is not explanation. In *Proc. NAACL*, 2019.
- [11] Y. Tay, D. Bahri, D. Metzler, D.-C. Juan, Z. Zhao, and C. Zheng. Synthesizer: Rethinking self-attention for transformer models. In *Proc. ICML*, 2021.
- [12] T. N. Kipf and M. Welling. Semi-supervised classification with graph convolutional networks. In *Proc. ICLR*, 2017.
- [13] D. J. Schuirmann. A comparison of the two one-sided tests procedure and the power approach for assessing the equivalence of average bioavailability. *J. Pharmacokinetics and Biopharmaceutics*, 15(6):657–680, 1987.
- [14] Y. Lu, K. Hu, and L. Zhang. S³G: Stock state space graph for enhanced stock trend prediction. *arXiv:2603.24236*, 2026.