

CoRA-NAS: Coarse Ranking and Anchor-Residual Refinement for Neural Architecture Search

Yifan Yang^{1*} Zhaoyan Wang^{2*} Zheng Gao¹
 Xiaoyu Li¹ Jiaojiao Jiang¹

¹University of New South Wales

²Korea Advanced Institute of Science and Technology

Abstract

Training-free neural architecture search (NAS) ranks candidate networks from a few forward/backward passes at initialization, avoiding the cost of full training. Yet zero-cost ranking has saturated: under one protocol, no single proxy robustly beats the trivial #Params/FLOPs baseline across both structure-varying and size-varying spaces. We start from the observation that a trained network’s accuracy is driven by three complementary signals. Two are static and near-zero-cost: its capacity, and how well its structure uses that capacity at initialization. The third is its learning dynamics, visible only once training begins and read here at a small ($\approx 1\%$ of full training) cost. We realize this as **CoRA-NAS** (COarse Ranking + Anchor-residual), a single-configuration, coarse-to-fine method that does not use fully trained architecture-accuracy labels to fit its ranker (only the architecture encoding is space-specific, as for any NAS method). Stage 1 (*Rank*) forms an equal-weight rank consensus over existing zero-cost proxies spanning the two static axes, with a *consensus gate* that adapts the bank per space without ever reading accuracy. Stage 2 (*Refine*) spends $\approx 1\%$ of a full-training budget on a stratified anchor set and corrects the static prior with a target-free early-curve residual. Across four vision spaces, CoRA-Refine has no weak regime on any of them: its per-space Spearman is 0.946 (NB201) / 0.715 (NB101) / 0.786 (TransNAS-Bench-101) / 0.894 (NATS-SSS), so its worst space ($\rho = 0.715$) is the highest floor of any compared method, target-aware LIBRA-NAS included, whereas every baseline collapses on at least one space. The refinement also selects strong architectures, reaching CIFAR-100 best-found accuracy 73.32, near the ground-truth best of 73.37. We are explicit about scope: on the pure size space the unsupervised prior does not beat #Params, and the low-cost curve residual corrects this prior, yielding one configuration robust across all four vision spaces.

1 Introduction

Neural architecture search (NAS) automates the design of network topologies, but its classical bottleneck is performance estimation: ranking candidate architectures by how well they will train is what makes search expensive, because the faithful estimator, training each candidate to convergence, is prohibitively costly over spaces with 10^4 – 10^{18} members [12, 35, 45]. *Zero-cost* (training-free) proxies attack this directly: from a single forward/backward pass at initialization they produce a score meant to correlate with final accuracy [1, 29, 31, 36]. Two difficulties,

*These authors contributed equally to this work.

Corresponding author: Yifan Yang (evanyifanyang2026@gmail.com).

however, are now well documented. First, zero-cost ranking has saturated: the strongest recent proxies cluster within a narrow band on the home benchmark and improve on one another only marginally [25, 27, 47]. Second, and more damaging, every proxy has a weak regime. A capacity-driven proxy excels on size-varying spaces but falters on topology-varying ones; a structure-driven proxy does the reverse. The result is a *cross-over*: neither a single proxy nor a single simple baseline robustly beats the trivial #Params/FLOPs baseline across both structure-varying and size-varying spaces under one protocol [21, 24, 32]. (ZiCo [27] reports beating #Params, but as a single gradient statistic it is not space-adaptive; we revisit this on equal footing in Section 2.) The community has made the #Params baseline an explicit bar to clear, and clearing it everywhere with one method to close the cross-over remains open.

A natural response is to add training signal. Performance predictors and learning-curve extrapolators cut cost relative to full training and are often more accurate than any single zero-cost proxy [2, 34, 41, 42]. But the accurate ones are typically supervised: they need ground-truth accuracies to fit, and a fresh fit (or transfer) per search space. One-shot/supernet methods introduce their own ranking bias and must be retrained per space [20, 30]. RoBoT [21], the closest combination method, robustifies a set of weak proxies but does so with Bayesian optimization that queries ground-truth evaluations. The gap we target is therefore a method that is simultaneously (i) *label-free* with respect to fully trained architecture-accuracy labels used to fit the ranker (early validation curves are used); (ii) *single-configuration*, with one set of hyperparameters across every dataset and space (only the architecture encoding is necessarily space-specific, as for any NAS method); and (iii) a strong cross-space ranker that also selects top architectures cheaply, across structure-varying and size-varying spaces alike. We are not aware of a prior method combining all three: the accurate refinement methods query ground-truth accuracy (RoBoT [21]) or are supervised per space, target-aware selectors such as LIBRA-NAS [8] read accuracy to weight proxies, and label-free proxies carry no refinement at all. The gap is structural, and it is felt most on the size space, where our unsupervised consensus prior does not beat #Params, motivating a training-signal correction.

Idea. Our starting point is that a trained network’s accuracy is driven by three complementary sources of signal: its capacity (a static budget), how well its structure uses that budget at initialization (also static), and its *learning dynamics* (dynamic, visible only once training begins). The two static signals are near-zero-cost; the dynamic one costs a small fraction of training ($\approx 1\%$). Their complementarity is not assumed but visible in the data: capacity and structure are decoupled by construction in NATS-Bench, where size spaces isolate the former and topology spaces the latter, so each alone fails in the opposite regime, which is precisely why no static proxy is robust everywhere [13, 32]. Static proxies, moreover, cannot observe optimization; the early training curve can. This motivates a *coarse-to-fine* design: judge a network first on capacity and structure (static, zero-cost), then correct that judgement with its early training curve (dynamic, $\approx 1\%$ cost) exactly where the static prior errs. The dynamic axis sees optimization the static prior cannot, so the curve residual supplies exactly the signal the prior structurally lacks rather than re-deriving what it already has. This makes the correction well-posed rather than redundant (Section 3).

CoRA-NAS. We instantiate this as a two-stage, label-free method (Fig. 1). **Stage 1 (Rank)** percentile-ranks each of a small bank of off-the-shelf zero-cost proxies covering the two static axes and combines them by an *equal-weight rank consensus* $\sum_i \log(\text{rank}_i(a)/N)$, with a *target-free consensus gate* that adapts the bank per space without reading any label, learning weights, or tuning on per-space accuracy. **Stage 2 (Refine)** draws a small stratified anchor set (a fixed $\sim 6.4\%$ of the space), trains each anchor for a few epochs, forms a *target-free* final-accuracy estimate from the early

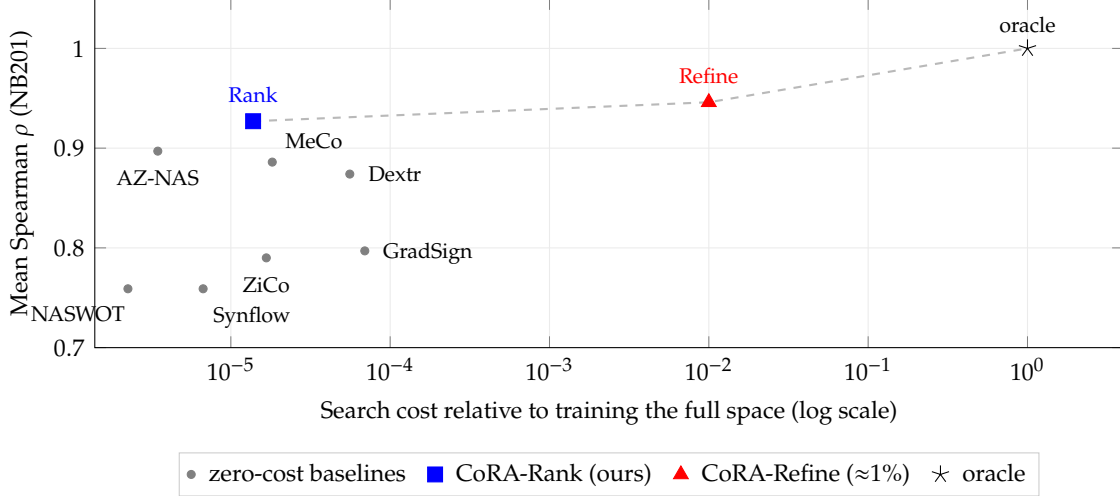


Figure 1: **Cost-quality frontier on NAS-Bench-201.** Mean Spearman ρ (over the three NB201 datasets, Table 2) versus search cost per architecture, measured as proxy runtime relative to full training (log scale). All zero-cost proxies occupy one negligible-cost band (~ 10 – 700 ms/arch, $\sim 10^{-5}$ of full training); within it CoRA-Rank attains the highest ranking quality ($\rho = 0.927$). It is not the cheapest: at ≈ 140 ms/arch it runs AZ-NAS’s three views plus additional proxies ($\approx 4\times$ AZ-NAS’s 35 ms). But nothing cheaper ranks better, so it sits on the Pareto frontier (dashed). The $\approx 1\%$ CoRA-Refine stage then reaches near-oracle $\rho = 0.946$; the oracle is the ground-truth ranking ($\rho = 1$).

curve, computes the residual against the prior, and propagates it to all architectures with a tree ensemble before a light operation-locality smoothing. The full pipeline uses a single configuration across all datasets and spaces and introduces no new proxy.

Findings. Our headline is cross-space robustness across four spaces under one configuration (Fig. 3, Table 3): two topology spaces (NB201, NB101), a cross-task space (TransNAS-Bench-101), and a size space (NATS-SSS). Together they expose the cross-over directly: a capacity proxy is strong on size but weak on topology, a structure proxy the reverse, so every baseline drops sharply on at least one space, and even the strongest combined proxies floor at 0.55–0.61 somewhere. Across these four vision benchmarks **CoRA-Refine has no weak regime**: its worst space ($\rho = 0.715$) is the highest floor of any compared method (0.946/0.715/0.786/0.894), target-aware LIBRA-NAS included. Among label-free methods it has the highest reported means on all four spaces, with size-space differences from the strongest capacity proxies within noise; the only per-space value ahead of it anywhere is target-aware LIBRA-NAS on NB101, which reads accuracy to weight its proxies and still floors lower than CoRA-Refine overall. On the pure size space the unsupervised consensus prior does not beat #Params; it is the low-cost, label-free curve residual that recovers it (Section 4.5). As a pure zero-cost ranker, CoRA-Rank already leads every baseline on NB201 and on the cross-task TransNAS space at negligible absolute cost (Table 2). NB201 ranking itself is saturated, so the $\approx 1\%$ Refine stage adds only a modest ranking margin there by design; its value is selection (CIFAR-100 best-found 73.32, near the ground-truth best of 73.37 and well above every baseline) and the cross-space recovery (Section 4.3).

The prior transfers to a real cell space. On the real DARTS cell space (via the NB301 surrogate), Refine on real 15-epoch curves recovers the capacity-dominated boundary, beating the diluted prior (+0.046) and matching #Params within noise, with a scramble control confirming the lift

is curve-driven. Trained from scratch (5 seeds), its selected cell reaches 2.81% CIFAR-10 error, beating AZ-NAS and random using the same candidate pool and evaluation protocol (5 shared seeds, paired $p < 0.015$; [Section 4.2](#)).

Scope. The no-weak-regime result is over four vision spaces, and CoRA is a proxy-agnostic Rank+Refine *framework* whose benefit scales with the prior’s and the encoding’s informativeness. We map its boundary explicitly: on a structurally-distinct recurrent space (NAS-Bench-NLP) both prior and residual are weak, so CoRA hits an honest weak regime; on a vision-transformer space (ViT-Bench-101) the label-free consensus is competitive with the ViT specialist L-SWAG (approximately 0.03 lower mean Spearman) and ahead of the general ranker AZ-NAS. These delimit the claim to vision rather than universality ([Section 4.3](#)).

Contributions.

- **C1: Cross-space robustness from one configuration.** A single, untuned configuration with no weak regime across four vision benchmarks (NB201, NB101, TransNAS, NATS-SSS): the highest worst-case Spearman of any compared method, the highest reported means among the non-target-aware methods on the three structure/task spaces and, on the size space, matching the strongest capacity proxies while decisively beating naive #Params ([Table 2](#), [Table 3](#)). A *label-free consensus gate* contributes to this robustness, dropping a sign-flipped proxy per space from inter-proxy agreement alone, never accuracy, unlike the target-aware per-space selection of LIBRA-NAS [8] ([Section 4.3](#)).
- **C2: Label-free and budget-tunable.** Fully trained accuracy labels are not used to fit the ranker; the only training is a tunable $\approx 1\%$ anchor budget, placing it on an explicit cost–quality frontier ([Fig. 1](#)), in contrast to label-querying combination methods such as RoBoT [21].
- **C3: A target-free curve-residual refinement.** A two-stage design whose second stage corrects the prior’s error from early learning curves rather than predicting accuracy from scratch, transferable across spaces because it is label-free.
- **C4: Clean and interpretable.** An equal-weight consensus over published proxies with no learned weights and no new proxy; we show ([Section 4.1](#)) that learned/adaptive weighting and an opaque off-the-shelf score instead make a worse prior. A clean prior is what keeps the curve residual learnable, which justifies the simple choice.

2 Related Work

2.1 Zero-cost (training-free) proxies

A large family of proxies scores an architecture from a single (or few) forward/backward pass(es) at initialization. *Gradient-based* proxies include SNIP [26], GraSP [37], Synflow [36], GradSign [47] and ZiCo [27]; *gradient-free* proxies include NASWOT/jacov [31], the Zen-score [29] and the NTK/linear-region view of TE-NAS [9]; recent entries such as MeCo [22], SWAP [33] and Dextr [3] push correlation higher still on the home benchmark. Two findings from this literature frame our work. Ning et al. [32] show that Synflow is essentially a smooth parameter counter and that many proxies inherit a strong #Params bias; Krishnakumar et al. [24] catalogue 13 proxies over 28 tasks and report both that the proxies carry *substantial complementary information* and that none dominates across tasks. ZiCo [27] reports being the first single proxy to consistently beat #Params; we take that claim seriously and test it on equal footing, finding that under one unified protocol it

is a single gradient statistic that is not space-adaptive (NB201 mean SPR 0.790, Table 2) and that on a size space the #Params cross-over still holds. The recurring conclusion, reinforced by RoBoT [21] and the bias analysis above, is that **#Params/FLOPs is the hard baseline**: no single proxy robustly beats it across both structure and size spaces under one protocol. We do not propose a new proxy; we reuse published ones, covering two complementary static axes, combine them without learned weights, then add a cheap dynamic correction.

2.2 Aggregating and combining proxies

Because no single proxy wins, several works combine them. Abdelfattah et al. [1] “vote” proxies together; AZ-NAS [25] assembles four views (expressivity, progressivity, trainability, complexity) with a non-linear rank aggregation in a single pass and is the strongest zero-cost ranker we compare against; RoBoT [21] combines weak proxies into a robust metric with Bayesian optimization and a greedy exploitation step, with theoretical guarantees; LIBRA-NAS [8] selects a complementary proxy trio *per space*, but fits that selection to ground-truth validation accuracy, a target-aware, offline adaptation. The crucial axis of difference is supervision: RoBoT queries ground-truth evaluations online and LIBRA-NAS peeks at accuracy offline to choose its proxies, whereas our consensus and its per-space gate use no labels at all. Relative to AZ-NAS, we use the same off-the-shelf signals but not its score: we show (Section 4.1) that an equal-weight rank consensus is not only label-free but makes a *better prior* for refinement than AZ-NAS’s score, which is opaque in the precise sense that its non-linear aggregation yields a residual the refinement cannot learn from cheap features (cross-validated $R^2 = 0.37$ vs. 0.43, Table 4). We do not mean that the score is undocumented. We also find that learned/adaptive weighting does not help overall, so we deliberately learn nothing. A second distinction is structural: AZ-NAS, Dextr and the single proxies above are static metrics with no training-signal refinement and no mechanism to recover the size space, whereas CoRA adds a label-free curve-residual second stage that is robust across the cross-over. This unsupervised consensus-plus-gate-plus-refinement design is what separates us from RoBoT (online labels), LIBRA-NAS (offline label-fitted per-space proxy selection), AZ-NAS (fixed non-linear score) and Dextr (single static metric, no refinement).

2.3 Performance predictors and learning-curve extrapolation

A complementary line predicts final accuracy from partial signal. White et al. [42] benchmark 31 predictors and conclude that predictors from different families are composable into stronger estimators, providing methodological support for our two-stage prior-plus-curve design. The composition they study is of supervised predictors; our composition is label-free end-to-end (a residual on a prior, with no ground-truth target), which is what makes it portable across spaces under one configuration. Learning-curve methods extrapolate a few early epochs to the final value: classical parametric models (pow₃, log-linear/LLW) [11], the training-loss surrogate SoTL, which beats validation-accuracy extrapolation without per-curve tuning [34], and LC-PFN, which performs amortized Bayesian curve extrapolation in a single forward pass [2]. Supervised predictors such as BANANAS [41] are accurate but require labelled architectures to train. Our Stage 2 sits in this family but differs in two ways: it is target-free, forming its per-anchor estimate from the early curve via an LLW+pow₃ blend with no ground-truth target, and it predicts a *residual* on the zero-cost prior rather than accuracy from scratch, which keeps the learnable signal small, structured and portable across spaces.

2.4 Multi-fidelity search and the cost–quality frontier

Multi-fidelity methods allocate a training budget adaptively: successive halving and Hyperband [28], the Bayesian BOHB [15] and evolutionary DEHB [4], and predictor-guided non-uniform halving in RANK-NOSH, which reaches near-oracle NB201 selection at a fraction of the cost [38]. FEAR [10] freezes training at a fixed error and notes that zero-cost rankings can degrade as training proceeds. Our Stage 2 occupies the same cost–quality regime, spending a small, tunable training budget, but is driven by a label-free curve residual on a fixed anchor set rather than by online ground-truth comparisons, and Stage 1 provides the zero-cost endpoint of the frontier (Fig. 1).

2.5 One-shot NAS and benchmarks

One-shot/supernet methods (DARTS [30], SPOS [20], ProxylessNAS [6], OFA [7]) amortize training cost but introduce supernet-induced ranking bias and require retraining per space; we are not a one-shot method. Evaluation beyond classification encompasses perceptual fidelity and task-specific reliability, as illustrated by stylization [16] and visual-content verification [18, 46]. Robustness studies of visual-content verification [5, 17] and graph learning [39] likewise examine behavior under changes to inputs or data availability. For architecture ranking, we evaluate on tabular and surrogate benchmarks that make controlled comparison possible: NAS-Bench-101 [45] and NAS-Bench-201 [12] (the latter with full learning curves); NATS-Bench [13], whose size (SSS) and topology (TSS) variants decouple capacity from structure and give us a clean cross-space testbed; TransNAS-Bench-101 [14] for cross-task generalization; and surrogate learning curves from NAS-Bench-x11 [44] and the DARTS-space NAS-Bench-301 [35].

3 Method

3.1 Problem formulation and a three-axis decomposition

Let $\mathcal{S}$ be a search space of $N = |\mathcal{S}|$ architectures and let $f(a)$ denote the (unknown, expensive) final test accuracy of $a \in \mathcal{S}$. We want a scoring function $\hat{s} : \mathcal{S} \rightarrow \mathbb{R}$ whose induced ranking matches that of f as closely as possible, so that selecting the top-ranked architectures recovers near-optimal ones without training the space or querying any ground-truth accuracy.

Our design rests on the premise that $f(a)$ is driven by three complementary sources of signal (Table 1): a static capacity budget, the static quality of an architecture’s structure at initialization (both near-zero-cost), and its learning dynamics, which are dynamic, visible only once training begins, and read here at a small ($\approx 1\%$) fraction of full-training cost. We argue these axes are complementary, not redundant, on three grounds. (i) *Capacity and structure are decoupled by construction.* NATS-Bench isolates them: its size variant (SSS) fixes topology and varies width, while its topology variant (TSS) does the reverse [13]. Each axis alone therefore fails in the other regime: capacity dominates size spaces, while structure dominates topology spaces (Section 4.1). Neither therefore suffices alone. (ii) *Static cannot observe learning.* Initialization-time proxies structurally cannot see optimization; the early training curve catches the “good at init but trains poorly” (and the reverse) cases that static proxies miss. (iii) *Information-theoretic.* Zero-cost proxies have been shown to carry substantial complementary information across tasks [24, 32].

Design consequence. This decomposition is the spine of a two-stage method. The prior aggregates the two static axes (Stage 1, Section 3.2); the refinement injects the dynamic axis as a residual on that prior (Stage 2, Section 3.3). Because the dynamic axis is orthogonal to the static prior, the

Table 1: The three complementary axes of signal that drive final accuracy, and the cheap estimator CoRA uses for each. The prior (Stage 1) aggregates the two *static* axes; the refinement (Stage 2) injects the *dynamic* axis as a residual.

Axis	Nature	What it captures	Cheap estimator
Capacity	static	representational budget (necessary, not sufficient)	#Params, Synflow
Structure	static	how the wiring uses that budget at init	expressivity, trainability, jacov
Learning dynamics	dynamic	how it actually optimizes on the data	early training curve

curve residual carries exactly the information the prior structurally lacks, yielding a well-posed and maximally-informative correction, provided the prior is clean enough that its error remains learnable from cheap features (Section 3.4). Fig. 2 shows the resulting two-stage pipeline end to end.

3.2 Stage 1: Rank with a zero-cost coarse prior

Stage 1 produces a label-free coarse ranking from a small bank of m *off-the-shelf* zero-cost proxies $\{g_i\}_{i=1}^m$ that together cover the two static axes: capacity (#Params, Synflow [36]) and structure-at-init (the expressivity and trainability views of AZ-NAS [25], and jacov/NASWOT [31]). We introduce no new proxy: the bank is exactly these five signals (#Params, Synflow, jacov, and AZ-NAS’s expressivity and trainability views). Computing the two AZ-NAS views reuses AZ-NAS’s shared pass, which also yields views we leave unused (e.g. progressivity); the Stage 1 runtime in Table 2 is the combined cost of all five proxies. All five are label-free in that they query no ground-truth accuracy, but they are not *data-free*: jacov reads a small unlabeled real-data minibatch on the classification spaces (NB201/NB101/NATS-SSS) and a random-normal batch on TransNAS, the two AZ-NAS views use random-normal inputs, and Synflow uses an all-ones input. CoRA is therefore label-free/target-free (it never uses accuracy), not data-free; this is the property that makes it portable across spaces. For each proxy we compute its percentile rank over the space,

$$r_i(a) = \frac{\text{rank}_i(a)}{N} \in (0, 1], \quad (1)$$

where $\text{rank}_i(a)$ is the position of a under g_i (best = N).

Target-free consensus gate. Before combining, we adapt the bank to each space *without any labels* by gating each proxy on its agreement with the leave-one-out consensus of the others,

$$\bar{r}_{-i}(a) = \frac{1}{m-1} \sum_{j \neq i} r_j(a), \quad \alpha_i = \rho(r_i(\cdot), \bar{r}_{-i}(\cdot)), \quad (2)$$

where ρ is Spearman’s correlation taken over $\mathcal{S}$, and keep the set $\mathcal{K} = \{i : \alpha_i \geq \tau_g\}$ with $\tau_g = -0.3$ (a majority floor retains the three highest- α_i proxies if fewer than three would pass). A proxy that is undefined on a space (e.g. synflow on the attention blocks of a vision transformer, which yields no finite score) is dropped before the gate is computed, so it cannot corrupt the leave-one-out agreement; this is a definedness check, not a tuning choice. The gate reads only the proxies’ mutual rank-agreement, never accuracy, and drops a proxy only on a *clear sign-flip* (it anti-correlates with the rest on this space), not on weak disagreement. The rationale is a majority-vote argument: when

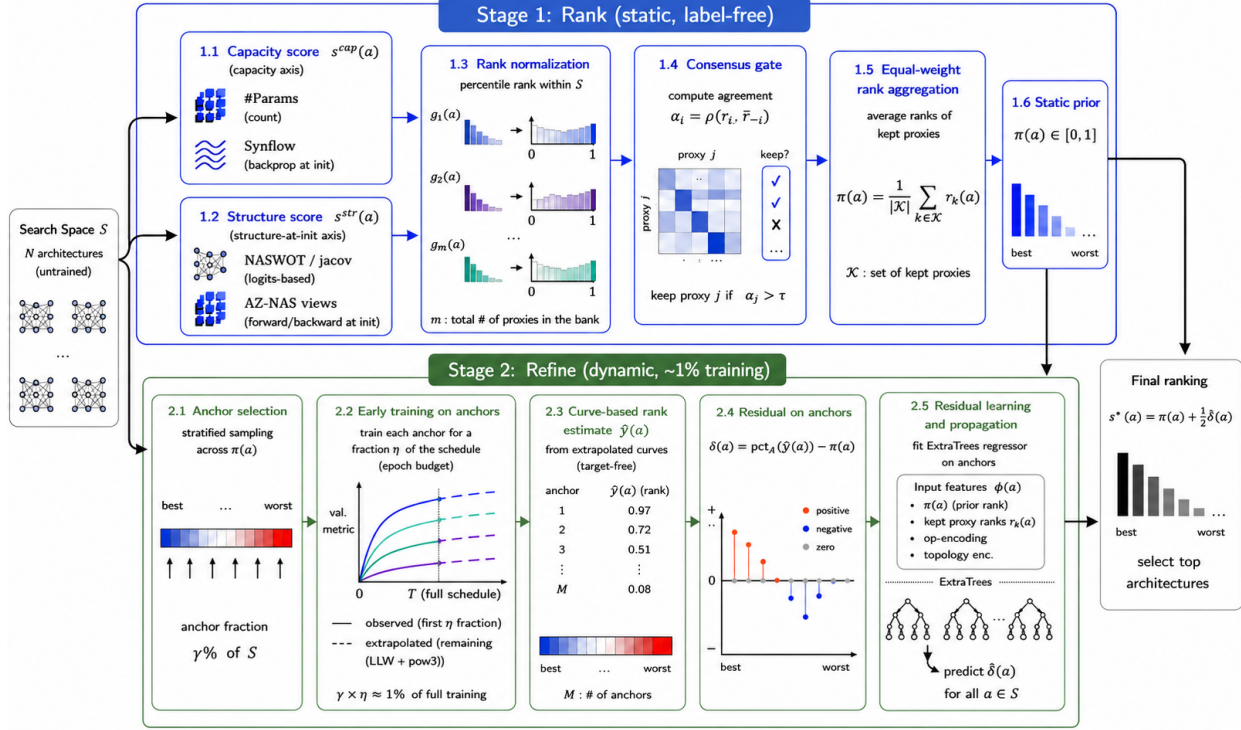


Figure 2: **CoRA-NAS in one pass.** Final accuracy is driven by three cheap, complementary signals: two *static* axes, *capacity* (#Params, Synflow) and *structure-at-init* (NASWOT/jacov, AZ-NAS views), and one *dynamic* axis, *learning dynamics*. **Stage 1 (Rank, blue)** percentile-ranks a bank of m off-the-shelf zero-cost proxies, applies a target-free consensus gate, and aggregates the kept set into a static prior π . **Stage 2 (Refine, green)** draws stratified anchors across π , trains each for an early prefix, extrapolates its curve, and propagates an ExtraTrees residual correction. The diagram is schematic: the implemented prior uses log-percentile aggregation (Equation 3), and the residual model uses the raw-signal and encoding features in Section 3.3, followed by clipping and locality smoothing (Equation 6–Equation 7). The anchor and prefix fractions satisfy $\gamma\eta \approx 1\%$ of the cost of fully training the candidate set. Early validation curves are used; fully trained architecture-accuracy labels are not used to fit the ranker.

most proxies in the bank carry usable signal on a space, their consensus is a better ranking than any one of them, and a proxy that anti-correlates with that consensus is contributing the wrong sign and can only degrade it. Removing exactly those proxies is therefore expected to improve the consensus without ever consulting accuracy. This is a label-free heuristic, not a proof that agreement implies accuracy. We validate it empirically rather than assume it: the gate’s only firing (drop jacov on NB101) coincides with the oracle leave-one-out decision computed against ground truth (Section 4.3), and an injected sign-flipped proxy is caught ($\alpha = -0.77$), so the heuristic recovers the label-informed choice on the cases we can check. We then combine the kept proxies by an equal-weight rank consensus,

$$s(a) = \sum_{i \in \mathcal{K}} \log r_i(a), \quad \pi(a) = \text{pct}_{\mathcal{S}}(s(a)) \in [0, 1], \quad (3)$$

where higher s is better and $\pi(a)$ is the prior percentile of a within $\mathcal{S}$. The log makes the consensus penalize any proxy ranking a near the bottom (a soft AND); within $\mathcal{K}$, equal weighting means **no learned weights and no per-space tuning on ground truth**. The gate is a no-op on NB201 and NATS-SSS (all five proxies agree, so $\mathcal{K}$ is the full bank and the prior is bit-identical to the

Algorithm 1 Stage 1: Rank (zero-cost coarse prior)

Require: space $\mathcal{S}$ ($N = |\mathcal{S}|$); proxy bank $\{g_i\}_{i=1}^m$ over capacity + structure

```
1: for each  $a \in \mathcal{S}$  do
2:   for  $i = 1, \dots, m$  do
3:      $g_i(a) \leftarrow$  one forward/backward pass at init            $\triangleright$  no training, no labels
4:   end for
5: end for
6: for  $i = 1, \dots, m$  do                                        $\triangleright$  percentile-rank each proxy over  $\mathcal{S}$ 
7:    $r_i(a) \leftarrow \text{rank}_i(a)/N$  for all  $a$ 
8:    $\alpha_i \leftarrow \rho(r_i(\cdot), \frac{1}{m-1} \sum_{j \neq i} r_j(\cdot))$         $\triangleright$  leave-one-out agreement; no labels
9: end for
10:  $\mathcal{K} \leftarrow \{i : \alpha_i \geq \tau_g\}$  ( $\tau_g = -0.3$ ); if  $|\mathcal{K}| < 3$ , keep the 3 highest- $\alpha_i$             $\triangleright$  consensus gate
11:  $s(a) \leftarrow \sum_{i \in \mathcal{K}} \log r_i(a)$ ;  $\pi(a) \leftarrow \text{pct}_{\mathcal{S}}(s(a))$ 
Ensure: prior percentile  $\pi(\cdot)$ ; kept set  $\mathcal{K}$ 
```

ungated equal consensus, leaving Table 2 unaffected); on every space we evaluate it keeps the full bank except NB101, where it removes jacob, which genuinely anti-correlates there ($\alpha_{\text{jacob}} = -0.41$), independently rediscovering jacob as the least transferable proxy [1] and lifting the NB101 prior (Section 4.3). The threshold is robust: any $\tau_g \in [-0.35, -0.2]$ yields the same partition. This is the key contrast with LIBRA-NAS [8], which selects its per-space proxies by agreement with *ground-truth accuracy*: our gate adapts per space using only inter-proxy agreement, so it remains fully label-free. The same gate also filters the raw-signal features of Stage 2’s residual regressor (Section 3.3), so jacob is dropped from both the prior and the residual features on NB101, and the bank is unchanged elsewhere. Section 4.1 further shows that, on the kept set, unsupervised adaptive weighting and a 2-axis decoupling both fail to improve the final result and often hurt it, which justifies equal weighting. Stage 1 trains nothing and is summarized in Algorithm 1.

3.3 Stage 2: Refine with an anchor-based dynamic residual

Stage 2 spends a tiny training budget to inject the dynamic axis as a correction to the prior (Algorithm 2).

Anchors and early curves. We draw an anchor set $\mathcal{A} \subset \mathcal{S}$, $|\mathcal{A}| \approx 1000$, stratified across the prior percentile π so that the prior’s full range is covered evenly (no clustering). Each anchor is trained for a few epochs (5–30, $\approx 1\%$ of training the space) and we record its early validation-accuracy curve $c_a = (v_a^{(1)}, \dots, v_a^{(T)})$, which captures the dynamic axis.

Target-free estimate. From each curve we form a final-accuracy estimate *without any ground-truth target* by rank-averaging two parametric extrapolations [11]: a log-linear (LLW) fit and a bounded power law (pow₃),

$$\hat{y}(a) = \frac{1}{2} \left(\text{rank}_{\mathcal{A}}[\text{LLW}(c_a)] + \text{rank}_{\mathcal{A}}[\text{pow}_3(c_a)] \right). \quad (4)$$

The pow₃ term supplies a bounded asymptote that prevents top-end overshoot; both extrapolations here use the early validation-accuracy curve defined above.

Algorithm 2 Stage 2: Refine (anchor-based dynamic residual)

Require: prior $\pi(\cdot)$; kept set $\mathcal{K}$; features $\phi(\cdot)$ filtered by $\mathcal{K}$

budget: anchor fraction and epoch-prefix fraction

1: $\mathcal{A} \leftarrow$ stratified sample of a fixed fraction ($\approx 6.4\%$) of $\mathcal{S}$ across π

2: **for** each $a \in \mathcal{A}$ **do**

3: train a for T epochs $\rightarrow$ early curve c_a

▷ the only training; no labels of f

4: $\hat{y}(a) \leftarrow \frac{1}{2}(\text{rank}[\text{LLW}(c_a)] + \text{rank}[\text{pow}_3(c_a)])$

5: $\delta(a) \leftarrow \text{pct}_{\mathcal{A}}(\hat{y}(a)) - \pi(a)$

6: **end for**

7: fit ExtraTrees $h : \phi(a) \mapsto \widehat{\delta}(a)$ on $\mathcal{A}$; predict $\widehat{\delta}(a)$ for all $a \in \mathcal{S}$

8: $\tilde{s}(a) \leftarrow \text{clip}(\pi(a) + \frac{1}{2}\widehat{\delta}(a), 0, 1)$

9: $s^*(a) \leftarrow (1 - \beta)\tilde{s}(a) + \beta \text{mean}_{a' \in \mathcal{N}(a)} \tilde{s}(a')$

Ensure: refined ranking $s^*(\cdot)$; select $\arg \max_a s^*(a)$

Residual, propagation, smoothing. The residual on each anchor is where the prior is wrong,

$$\delta(a) = \text{pct}_{\mathcal{A}}(\hat{y}(a)) - \pi(a), \quad a \in \mathcal{A}. \quad (5)$$

We fit an Extremely Randomized Trees regressor [19] $h : \phi(a) \mapsto \widehat{\delta}(a)$ on the anchors, using features $\phi(a) = [\pi(a), \text{Synflow}(a), \text{jacov}(a), \ell_2\text{-norm}(a), \#\text{Params}(a), \text{op-encoding}(a), \text{topology}(a)]$. These comprise the prior percentile, four cheap raw signals (Synflow log-scaled; the ℓ_2 weight norm is a capacity cue), and the architecture encoding. A proxy the gate drops (Equation 2) is likewise removed from these features, so the sign-flipped jacov is excluded from both the prior and the residual on NB101. We propagate the residual to every $a \in \mathcal{S}$, then combine and smooth:

$$\tilde{s}(a) = \text{clip}(\pi(a) + \frac{1}{2}\widehat{\delta}(a), 0, 1), \quad (6)$$

$$s^*(a) = (1 - \beta)\tilde{s}(a) + \beta \text{mean}_{a' \in \mathcal{N}(a)} \tilde{s}(a'), \quad \beta = 0.3, \quad (7)$$

where $\mathcal{N}(a)$ is the set of architectures one operation away from a . The half-weight on the predicted residual hedges against propagation error, and the operation-locality smoothing in (7) averages each score with its neighbours to denoise the head of the ranking, exploiting the correlated true accuracy of architectures one edit apart. The final ranking is by s^* , and we select its top architecture(s). Reported SPR/KT are computed over the evaluated candidate set $\mathcal{S}$ (anchors included, $\approx 6.4\%$ of $\mathcal{S}$), so the anchors are not held out of the evaluation; the residual regressor is cross-validated on the anchors. The two constants here (the residual half-weight and $\beta = 0.3$) are held identical across all datasets and spaces; β sits on a wide sensitivity plateau, while the residual half-weight is the one sensitive axis and is fixed a priori at the cross-space-safe 0.5 (not the size-space optimum) on a label-free propagation-error argument (Section 4.5). The operation-locality smoothing primarily improves head-of-ranking selection (e.g. the CIFAR-10 sample-3000 fix, $93.4 \rightarrow 94.2$) with negligible effect on whole-space SPR, so it cannot be inflating the ranking headline.

3.4 Why these choices: a clean prior keeps the residual learnable

The decomposition of Section 3.1 only pays off if the residual the refinement must learn is itself learnable from cheap features. This reframes what makes a *good prior*: not maximal standalone ranking accuracy, but a prior whose error is learnable.

Why the residual is learnable from $\phi(a)$. The target is not noise but the prior’s structured error. By construction $\delta(a) = \text{pct}_{\mathcal{A}}(\hat{y}(a)) - \pi(a)$ is the gap between the dynamic (early-curve) ranking and the static prior, so it is large exactly where the omitted learning-dynamics axis diverges from the static rank, and that divergence is not random across the space. Whether a static proxy over- or under-estimates an architecture’s trainability is a property of *which operations and connectivity* it has (e.g. a proxy blind to a normalization or skip pattern mis-estimates every architecture carrying it), and those are precisely the operation- and topology-encoding coordinates in $\phi(a)$. The residual is therefore a function of the same features the regressor sees, which is why it is predictable rather than irreducible. Two existing controls make this falsifiable, not asserted. (i) *It is real curve signal, not overfitting*: scrambling which early curve belongs to which anchor collapses the refinement to the prior level ($0.516 \rightarrow 0.465$ on DARTS, at or below the 0.470 prior; [Section 4.2](#)). (ii) *Learnability tracks encoding informativeness, as the mechanism predicts*: where the encoding is only weakly predictive of true performance, the residual is not learnable and Refine cannot lift the prior. A supervised encoding $\rightarrow$ performance diagnostic reads 0.25 on the recurrent NAS-Bench-NLP space (an honest weak regime) versus 0.47 on NATS-SSS, where Refine does recover the size axis ([Section 4.3](#)). The claim is thus a mechanism with a stated failure mode, not a guarantee. We make this precise in [Section 4.1](#) with an ablation that feeds different priors into the same refinement (an off-the-shelf opaque score versus our clean consensus): a clean, signal-transparent equal consensus yields a residual that the tree ensemble explains substantially better (higher cross-validated R^2) and hence a higher final ranking, whereas an opaque non-linear score, even one that ranks well on its own, produces an unlearnable residual that the refinement cannot correct. This is also why we predict a residual rather than accuracy from scratch (the correction is small and structured) and why the estimate is target-free (it must run on any space without fully trained performance labels). The budget choices follow the same logic: a few epochs on a small anchor set, costing $\approx 1\%$ of full training, suffice because the limiting factor is predictor quality, not anchor count, and a head-only variant that trains only the top-ranked anchors makes selection far cheaper still. Crucially, **a single configuration**, comprising the proxy bank, the equal weighting, the gate threshold, the residual weight, β , and the budget as a fixed fraction ($\approx 6.4\%$ of architectures trained for $\approx 15\%$ of the epoch schedule, i.e. $\approx 6.4\% \times 15\% \approx 1\%$ of full-training cost), is held fixed across all datasets and spaces in [Section 4](#); the absolute anchor and epoch counts follow from each space’s size and training schedule (e.g. 1000 anchors at 30 epochs on NB201, 192 at 14 on NATS-SSS), and only the necessarily space-specific architecture encoding (a propagation feature) changes, as it must for any NAS method.

4 Experiments

Setup and benchmarks. We evaluate on tabular and surrogate NAS benchmarks that permit controlled comparison. NAS-Bench-201 [\[12\]](#) (15,625 architectures, full learning curves) on CIFAR-10, CIFAR-100 and ImageNet16-120 is our home topology benchmark. For cross-space generalization we use NATS-Bench [\[13\]](#), whose size variant (NATS-SSS) decouples width from topology and thus isolates the capacity axis, a second topology space NAS-Bench-101 [\[45\]](#), and the cross-task TransNAS-Bench-101 [\[14\]](#). CoRA uses a single configuration across all datasets and spaces ([Section 3.4](#)).

Metrics. Following standard practice we report ranking quality as Spearman’s ρ (SPR) and Kendall’s τ (KT) computed over each evaluated candidate set against final test accuracy, and selection quality as the test accuracy of the selected network under the AZ-NAS protocol [25]: best-of-3,000-sample selection, mean $\pm$ std over 5 fixed runs. We lead with SPR/KT (stable, evaluated-set) and report selection accuracy honestly. Unless a per-dataset value is given, a reported NB201 SPR/KT is the mean over the three NB201 datasets.

Reproduction protocol (fairness). To make the comparison fair we re-run the baselines, except sourced entries noted below, under one unified protocol on a single NVIDIA L40S, scoring SPR/KT over all 15,625 NB201 architectures against test-accuracy at 200 epochs; these re-runs do not copy heterogeneous published numbers, each computed under its own protocol (some on validation accuracy, some on a 1,000-architecture subsample, some reporting only KT). Two checks support the port. First, our nine GPU-dependent proxies match an independent RTX-4090 reproduction within $|\Delta\text{SPR}| \leq 0.009$ on all 27 corresponding cells (#Params and FLOPs are deterministic and machine-independent; AZ-NAS is not part of the 4090 run), confirming the pipeline is machine-agnostic. Second, the discrepancies exceeding 0.02 from published values are each a documented protocol or source difference, not a port error (full per-cell table in the appendix). In particular, T-CET [43] reports KT rather than SPR, so we gate it on KT (our KT matches its paper to $|\Delta\text{KT}| \leq 0.018$); and AZ-NAS’s published ImageNet16-120 figure is not reproducible from its released code, so we report our faithfully reproduced value ($\rho = 0.877$) and note the discrepancy. Three standard, documented port fixes are applied: GradSign uses the SUM aggregation, SWAP its regularised SWAP-reg variant, and LIBRA the RankProduct operator; Fisher and Plain are taken from NAS-Bench-Suite-Zero [24].

4.1 Does one configuration rank well across spaces?

NAS-Bench-201. Table 2 compares CoRA against 19 baselines on the home benchmark. Our zero-cost Stage 1 (CoRA-Rank) attains the best SPR among all training-free methods on every dataset (0.938 / 0.932 / 0.911; mean 0.927) and the best KT (0.786 / 0.777 / 0.760; mean 0.774), ahead of the strongest prior zero-cost ranker AZ-NAS (mean SPR 0.897, KT 0.720) and of MeCo [22] (0.886), Dextr [3] (0.874), LIBRA-NAS [8] (0.872), SWAP [33] (0.859) and ZiCo [27] (0.790), all under one protocol (Section 4). This Stage 1 comparison is the like-for-like zero-cost result. Stage 2 (CoRA-Refine) is not zero-cost: at the $\approx 1\%$ full-training-cost budget (the † in Table 2) it raises ranking to the top of the table (SPR 0.942 / 0.951 / 0.946; mean 0.946), so its bold cells should be read against the low-cost regime, not as a zero-cost win. On NB201 ranking the field is saturated and this ~ 0.02 SPR margin is modest by design; Stage 2 earns its budget on selection, raising mean best-found accuracy over CoRA-Rank on all three datasets and above every baseline, reaching CIFAR-100 best-found 73.32, close to the ground-truth best of 73.37 (mean over 5 runs; Table 2). We do not oversell the single-pick accuracy: on CIFAR-10 the field is compressed near the optimum and several methods (including #Params-driven selection) tie within noise; our advantage is clearest in SPR/KT and in the harder CIFAR-100 / ImageNet16-120 selection.

Cross-space generalization. Table 3 extends the comparison to four spaces under one configuration: two topology spaces (NB201, NB101), the cross-task TransNAS-Bench-101, and the size space NATS-SSS. It exposes a cross-over. Capacity proxies (#Params, Synflow) are strong on the size space but collapse on topology, while structure proxies (NASWOT) do the reverse and weaken on size (Table 3). A method leaning on either axis alone therefore fails in the opposite regime. **Across**

Table 2: **Ranking and selection on NAS-Bench-201.** Ranking (KT τ , SPR ρ over all 15,625 architectures) and selected-network accuracy (mean $\pm$ std, 5 runs) under one evaluation protocol; live measurements use a single NVIDIA L40S, while Fisher and Plain use the precomputed source noted in Appendix A. Our two stages: **CoRA-Rank** (Stage 1, zero-cost prior) and **CoRA-Refine** (Stage 2, $\approx 1\%$ refinement, †). For KT and SPR, the best value per column is bold with dark-blue shading and the second-best is shaded light blue; proxy input type A/B/F = architectural/backward/forward. Runtime and budget accounting in Section 4.1.

Method	Type	Runtime (ms/arch)	CIFAR-10			CIFAR-100			ImageNet16-120		
			KT	SPR	Acc.	KT	SPR	Acc.	KT	SPR	Acc.
#Params	A	–	0.578	0.753	93.71 $\pm$ 0.17	0.552	0.728	70.73 $\pm$ 0.36	0.520	0.691	42.80 $\pm$ 1.60
FLOPs	A	–	0.578	0.753	93.71 $\pm$ 0.17	0.551	0.727	70.73 $\pm$ 0.36	0.519	0.691	42.80 $\pm$ 1.60
GradNorm	B	16.4	0.355	0.483	89.05 $\pm$ 0.33	0.358	0.488	61.41 $\pm$ 1.09	0.321	0.440	22.86 $\pm$ 9.96
Grasp	B	161.4	0.312	0.450	89.10 $\pm$ 0.33	0.324	0.464	62.41 $\pm$ 2.30	0.330	0.467	28.21 $\pm$ 6.40
Snip	B	140.2	0.453	0.614	89.54 $\pm$ 1.21	0.461	0.619	62.41 $\pm$ 2.30	0.403	0.539	20.81 $\pm$ 9.35
Synflow	B	67.0	0.571	0.769	93.58 $\pm$ 0.94	0.565	0.761	71.47 $\pm$ 2.52	0.555	0.747	41.95 $\pm$ 5.36
NASWOT	F	22.6	0.556	0.742	92.05 $\pm$ 1.50	0.578	0.767	68.74 $\pm$ 1.72	0.582	0.768	42.58 $\pm$ 4.03
TE-NAS	B+F	400.6	0.539	0.735	92.15 $\pm$ 0.16	0.526	0.717	69.92 $\pm$ 1.99	0.494	0.685	44.55 $\pm$ 0.96
ZenNAS	F	10.7	0.296	0.386	89.59 $\pm$ 1.37	0.283	0.362	64.85 $\pm$ 4.66	0.294	0.399	37.67 $\pm$ 4.05
GradSign	B	692.5	0.622	0.812	93.71 $\pm$ 0.17	0.604	0.795	70.73 $\pm$ 0.36	0.594	0.784	42.80 $\pm$ 1.60
ZiCo	B	167.1	0.588	0.783	93.71 $\pm$ 0.17	0.603	0.797	70.73 $\pm$ 0.36	0.596	0.789	42.80 $\pm$ 1.60
AZ-NAS	A+B+F	34.8	0.741	0.913	93.60 $\pm$ 0.16	0.724	0.900	69.99 $\pm$ 1.04	0.695	0.877	44.90 $\pm$ 1.46
Fisher	B	–	0.306	0.444	91.13 $\pm$ 1.85	0.310	0.449	66.54 $\pm$ 2.47	0.315	0.457	40.60 $\pm$ 3.79
Plain	B	–	0.115	0.172	92.21 $\pm$ 1.82	0.106	0.158	67.28 $\pm$ 3.22	0.113	0.167	41.32 $\pm$ 3.52
MeCo	F	182.2	0.746	0.915	93.12 $\pm$ 0.95	0.720	0.895	69.42 $\pm$ 1.91	0.666	0.848	42.22 $\pm$ 0.45
SWAP	F	472.3	0.708	0.882	93.71 $\pm$ 0.17	0.696	0.873	70.73 $\pm$ 0.36	0.653	0.822	42.80 $\pm$ 1.60
T-CET	B+F	93.5	0.644	0.824	93.99 $\pm$ 0.53	0.602	0.788	72.12 $\pm$ 1.34	0.579	0.767	43.77 $\pm$ 2.38
Dextr	F	557.6	0.720	0.898	93.31 $\pm$ 0.14	0.700	0.880	70.48 $\pm$ 1.03	0.667	0.845	42.66 $\pm$ 0.70
LIBRA-NAS	A+B+F	87.8	0.698	0.876	93.56 $\pm$ 0.14	0.693	0.874	70.60 $\pm$ 0.39	0.693	0.865	45.91 $\pm$ 0.43
CoRA-Rank (Stage 1)	A+B+F	138.5	0.786	0.938	93.52 $\pm$ 0.17	0.777	0.932	71.09 $\pm$ 0.63	0.760	0.911	44.24 $\pm$ 0.81
CoRA-Refine (Stage 2)	A+B+F+LC †	+1k $\times$ 30ep	0.793	0.942	94.24 $\pm$ 0.25	0.810	0.951	73.32 $\pm$ 0.29	0.802	0.946	46.28 $\pm$ 0.24
Ground truth	–	–	–	–	94.33 $\pm$ 0.05	–	–	73.37 $\pm$ 0.20	–	–	47.25 $\pm$ 0.08

these four vision benchmarks **CoRA-Refine has no weak regime**: its worst space (0.715, NB101) is the highest worst-case of any method. Every baseline, including the strong hybrids AZ-NAS and Dextr, drops sharply on at least one space (Table 3), and CoRA-Refine is the strictly best label-free ranker on the three structure/task spaces. (A structurally-distinct non-vision space, NAS-Bench-NLP, is examined below as the honest boundary of this property.) Even at zero cost, CoRA-Rank leads all methods on the cross-task space TransNAS and is competitive on NB101 (Table 3), where the target-free consensus gate drops jacov (it anti-correlates, $\alpha = -0.41$) so the refined score reaches its 0.715 floor, the best among fair baselines (AZ-NAS 0.676). The size space is the honest boundary: the unsupervised prior is beaten by #Params (CoRA-Rank 0.747 < 0.824), so it is the cheap, label-free curve residual of Stage 2, not the prior, that recovers it. There CoRA-Refine (0.894) decisively beats naive #Params (0.824; +0.07, Holm $p < 0.001$) and ties the strongest capacity proxies Synflow and MeCo (0.891; differences within multiple-comparison-corrected run-noise, Section 4.5). On the size space the label-free residual thus matches the best size cue rather than beating it. Since our zero-cost prior does not beat #Params there, this is the robust outcome. Section 4.3 decomposes this per space, and Table 14 (appendix) reports the per-dataset/per-task breakdown behind each per-space mean. Two methodological honesty notes are folded into the table footnotes. (i) LIBRA-NAS is **target-aware**: it selects its per-space proxies using ground-truth accuracy, so its cells are a soft upper bound, not a fair zero-shot baseline; even so, CoRA-Refine exceeds it on three

Table 3: **Cross-space ranking generalization** (Spearman ρ over the evaluated candidate sets, *one configuration*). Capacity proxies (#Params/FLOPs/Synflow) are strong on the size space but weak on topology; structure proxies (NASWOT) show the opposite; only **CoRA-Refine** is robust across both. The first three columns vary structure or task; only NATS-SSS varies capacity. Each cell is a per-space mean; the per-dataset/per-task breakdown is in Table 14 (appendix). Per-cell sourcing, reproduction caveats, and the target-aware caveat for LIBRA-NAS are detailed in Appendix B.

Method	Topology (structure)			Size
	NB201	NB101	TransNAS	NATS-SSS
#Params	0.724	0.397	0.510 ^b	0.824
FLOPs	0.724	0.397	0.522 ^b	0.512
Synflow	0.759	0.344	0.555 ^b	0.891
GradNorm	0.470	0.188	0.461 ^b	0.488
Grasp	0.460	0.478	0.198 ^b	0.182
Snip	0.591	0.208	0.521 ^b	0.735
Fisher	0.450	0.368	0.467 ^b	0.588
NASWOT	0.759	0.309	0.469 ^b	0.488
ZenNAS	0.382	0.612	0.585 ^b	0.835
TE-NAS	0.712	0.296	0.295	0.205
Plain	0.166	0.364	0.315 ^b	0.015
GradSign	0.797	0.397	0.686	0.852
ZiCo	0.790	0.621	0.568	0.841
MeCo	0.886	0.595	0.55 ^{b,d}	0.891ⁿ
SWAP	0.859	0.398*	0.54 ^b	0.703
T-CET	0.793	0.397	0.638 ^c	0.770
AZ-NAS	0.897	0.676	0.608	0.756
Dextr	0.874	0.649	0.568	0.786 ⁿ
LIBRA-NAS ^{TA}	0.872	0.734	0.667 ^b	0.878
CoRA-Rank	0.927	0.664	0.750	0.747
CoRA-Refine[†]	0.946	0.715	0.786^a	0.894

Bold dark-blue cells mark the best in each column, excluding target-aware LIBRA-NAS; within-noise ties (≤ 0.005) share the marking.

[†] Refine uses a $\approx 1\%$ prefix-training budget: 1000 anchors for NB201, 192 elsewhere (Appendix B).

^a TransNAS anchor curves read from the benchmark’s recorded trajectories ($\approx 1\%$ live-equivalent).

^b Sourced from NAS-Bench-Suite-Zero (data-dependent proxies need non-redistributable Taskonomy images).

ⁿ Anti-correlated on NATS-SSS; $|\rho|$ reported (Appendix B).

* SWAP’s published NB101 0.77 does not reproduce; we report the reproduced 0.40.

^c T-CET TransNAS is a class_object surrogate (1 of 3 tasks available). ^d MeCo TransNAS 0.55 cited (noise input under-reproduces on dense tasks).

^{TA} **Target-aware:** LIBRA-NAS peeks at validation accuracy to pick its per-space trio, so its cells are a soft *upper bound*, not a fair zero-shot baseline.

of four spaces (only NB101, 0.715 vs. 0.734), and our consensus gate achieves per-space adaptation without reading any label. (ii) Several baselines carry documented per-space reproduction caveats (SWAP’s size-regularised NB101 figure does not reproduce; MeCo’s TransNAS value is cited from its paper; Dextr and MeCo anti-correlate on NATS-SSS, where we report $|\rho|$); the TransNAS classic

Table 4: **A clean prior makes a learnable residual.** Four priors fed into the same Stage 2 refinement (NB201). A good prior combines a strong start with a learnable-enough residual; CV- R^2 separates clean priors (≥ 0.43) from the opaque AZ-NAS score (0.37) but does not by itself rank among the clean priors (note 3-view’s higher 0.48 only ties, and params-only’s 0.46 still loses from a weak start). *mean best-found accuracy over the three NB201 datasets. Values are from the exp26 prior-ablation sweep (run on benchmark learning curves); absolute SPRs differ from the live Table 2 by ≤ 0.006 (a separate run on cached benchmark curves; the reported number is the 0.946 live value), but the prior-vs-prior ordering, the point of this table, is unaffected.

Prior fed to Refine	Rank SPR	→ Refine SPR	Refine Top-1*	residual CV- R^2
AZ-NAS score (opaque)	0.896	0.929	70.34	0.37
params only (weak)	0.724	0.862	71.39	0.46
3-view equal	0.920	0.951	71.33	0.48
CoRA clean consensus	0.930	0.951	71.44	0.43

baselines are sourced from NAS-Bench-Suite-Zero while CoRA and the remaining proxies are run live (see the table footnotes and Section 4.3).

A clean prior keeps the residual learnable. Table 4 substantiates the design claim of Section 3.4 by feeding four different priors into the same refinement on NB201. The final ranking is driven by two factors at once: a high starting Rank SPR and a residual the tree ensemble can actually learn. Cross-validated residual R^2 is necessary but not sufficient: it cleanly separates a clean consensus ($R^2 = 0.43$) from AZ-NAS’s opaque non-linear score (0.37), but it does not rank among clean priors: the 3-view consensus has the highest R^2 (0.48) yet only ties our final, and params-only has high R^2 (0.46) yet still loses (0.862) because it starts weak (0.724). The decisive contrast is therefore clean-vs-opaque: AZ-NAS is a good standalone ranker (0.896) but a *bad prior*, reaching only 0.929 through the identical Refine because its error is unlearnable from cheap features, whereas our clean consensus starts highest (0.930) and ends at the top (0.951, tied with the 3-view consensus). Thus a good prior is judged not by its standalone ranking but by whether it combines a strong start with a learnable-enough residual, precisely where a transparent equal consensus wins, and why we learn no weights (C4). Refine is accordingly robust to which clean prior is used (the 3-view equal consensus reaches the same 0.951) but sensitive to clean-vs-opaque, confirming the prior should be kept simple.

4.2 Does the refinement select strong architectures, not just rank them?

Stage 2 is a coarse-to-fine search as well as a ranker: because the prior already concentrates good architectures near its top, we can train only a shortlist of the highest-ranked anchors and re-rank them by their early curves, a head-only variant that trades a tiny budget for near-oracle selection. The budget is small and not tuned: the epoch prefix is a flat plateau from 3 to 30 epochs and the anchor count plateaus above 96 (Section 4.5), so the $\approx 1\%$ setting is not a sweet spot. Table 6 makes the cost–quality trade-off concrete on NATS-SSS/CIFAR-100: ranking the 3,000-architecture sample by the zero-cost prior and re-ranking a top- N shortlist on $K=14$ -epoch curves, **CoRA-Rank reaches test accuracy 70.24, within 0.5% of the 70.74 in-shortlist oracle, at $\approx 2,800$ epochs, $\approx 1\%$ of the 270,000-epoch cost of evaluating the sample.** Against *prior-free* multi-fidelity search at matched budgets, CoRA-Rank beats random-search-with-early-stopping and successive halving by 1–2% test accuracy at every budget (Table 6): the uninformed baselines plateau near 68% because more budget merely re-samples the same distribution, whereas a zero-cost prior focuses the budget on

Table 5: **Real-space search on DARTS / CIFAR-10.** All three panels use the DARTS cell space; margins are small on this low-variance space, and the curve-residual Stage 2 recovers the capacity-dominated boundary where the zero-cost prior is weakest. **(a)** Full-space ranking (Spearman vs. the NB301 surrogate) and best-of-10 selection (oracle 94.42): the prior alone trails #Params, and real 15-epoch curves in Stage 2 recover it (beating diluted Rank +0.046, matching #Params $\Delta=+0.008$). **(b)** Shared-pool selection: all four selectors pick from the *same* 100k-genotype pool; the selected networks are trained from scratch under the same protocol at 5 shared seeds. CoRA-Refine beats AZ-NAS, CoRA-Rank and random (seed-paired $p < 0.015$); search costs differ as reported below. **(c)** Anchor-count ablation: full-space SPR vs. stratified-anchor count K on the 100k pool († nearest the deployed ≈ 230). Surrogate SPRs are vs. *predicted* accuracy, not comparable to tabular true-accuracy SPRs (Section 4.2).

(a) Surrogate ranking and best-of-10 selection				
selector	SPR (vs. surrogate)		best-of-10 (surr.)	
CoRA-Refine (real 15-ep curves)	0.516		94.28	
#Params	0.508		94.30	
AZ-NAS	0.477		94.26	
CoRA-Rank (zero-cost)	0.470		94.22	
Synflow	0.193		94.08	
random search	–		93.82	

(b) Shared-pool selection (trained from scratch, 5 seeds)				
method	search (GPU-d)	surrogate acc	test-err (%)	params (M)
random	~0	93.03	3.09±0.10	3.23
AZ-NAS	0.13	93.61	3.11±0.12	4.26
CoRA-Rank	0.67	94.29	3.04±0.06	4.14
CoRA-Refine	1.76	94.55	2.81±0.05	4.56
<i>reference (gradient / training-free; different paradigm):</i>				
DARTS	0.4	–	2.76	3.3
PC-DARTS	0.1	–	2.57	3.6
P-DARTS	0.3	–	2.50	3.4
TE-NAS	0.05	–	2.63	3.8

(c) Anchor-count ablation (CoRA-Rank prior 0.482, #Params 0.516 on the 100k pool)						
K	10	100	200 [†]	300	600	1000
SPR	0.493	0.532	0.532	0.547	0.559	0.563

strong architectures. We state two honest points. First, on this capacity-dominated size space the prior alone is already near-oracle (70.12), so the curve re-rank adds little here (70.12 $\rightarrow$ 70.24). The win is reaching near-oracle cheaply, not a large re-ranking gain. Second, the search must use a short best-of- K verify, not the raw Refine argmax: on SSS/CIFAR-100 the Refine score’s raw top-1 over-trusts one misleading early curve and mis-selects (67.60) despite its far better whole-space ranking. This is the SPR-versus-selection gap, which the verified head-only protocol above avoids. On the home space NB201, where the prior is not near-oracle, the curve re-rank adds real lift (Table 7): across CIFAR-10/100 and 5 seeds at a matched epoch budget, at the moderate operating point ($B=1,200\text{--}2,400$) CoRA-Rank reaches within ~ 0.3 of the in-shortlist oracle on CIFAR-100 (Table 7) and is $\geq$ random search, successive halving, and a synflow-guided predictor-SHA there; the 12-epoch re-rank is imperfect on much larger shortlists (non-monotone at high budget), so we report the moderate-budget point.

Table 6: **Search efficiency (NATS-SSS / CIFAR-100).** Best-found test-acc@90 vs. epoch budget. A zero-cost prior (CoRA-Rank) reaches within 0.5% of the 70.74 in-shortlist oracle at $\approx 1\%$ of the 270,000-epoch full-evaluation budget, and beats prior-free multi-fidelity search by 1–2% at every matched budget. The NB201 frontier and real DARTS search are reported in Table 7 and Table 5, respectively.

budget (ep)	CoRA-Rank	random+early-stop	successive-halving
350	69.88	68.95 ± 1.04	68.43
700	69.88	68.96 ± 1.00	67.58
1400	69.88	68.15 ± 0.76	68.20
2800	70.24	68.54 ± 1.30	68.23
5600	70.24	68.13 ± 0.89	68.54
11200	70.24	68.07 ± 0.81	68.13

Table 7: **End-to-end search on the home space (NB201, CIFAR-10/100).** Best-found test accuracy at a *matched* epoch budget (5 seeds for the stochastic baselines). At the moderate-budget operating point ($B=1200\text{--}2400$) CoRA-Rank reaches within ~ 0.3 of the in-shortlist oracle and is $\geq$ random search, successive-halving and a synflow-guided predictor-SHA. The 12-epoch re-rank is imperfect on larger shortlists (non-monotone at higher budget), so we report the moderate-budget point. (NB201 ImageNet16-120 signals are not cached; a from-scratch DARTS run is reported in Table 5.)

dataset	B (ep)	rank-only	CoRA-Rank	random+ES	SHA	pred-SHA	oracle
CIFAR-10	1200	93.89	94.04	93.05	93.30	93.99	94.10
CIFAR-10	2400	93.89	94.04	93.27	93.74	93.99	94.37
CIFAR-100	1200	71.18	72.42	70.38	71.51	71.60	72.42
CIFAR-100	2400	71.18	73.22	71.01	71.95	71.60	73.51

A real-space search on DARTS. Beyond the tabular benchmarks, we run an end-to-end search on the real DARTS cell space via the NB301 surrogate (Table 5): 3,000 genotypes scored by each method, shortlisted, and surrogate-evaluated (best-of-10; oracle 94.42). DARTS is capacity-dominated, like NATS-SSS, so the zero-cost prior alone (CoRA-Rank, surrogate-Spearman 0.470; here and below correlations are against the NB301 surrogate’s predictions, a noisier reference than tabular true accuracy) matches AZ-NAS (0.477) but trails #Params (0.508); diagnostically, the equal-weight consensus is diluted by two uninformative proxies (jacov, trainability; Section 5). CoRA’s two-stage method recovers it: feeding **real 15-epoch CIFAR-10 curves** from ~ 120 shortlisted cells into Stage 2 significantly beats the diluted prior (Refine 0.516 vs. Rank 0.470, $+0.046$) and the strongest zero-cost ranker AZ-NAS (0.477; paired bootstrap, Holm $p=0.008$), and ties #Params (paired $\Delta=+0.008$, $p=0.60$, 95% CI $[-0.018, +0.031]$; within noise, the same standard we apply on NATS-SSS), at $\sim$ a few GPU-hours versus DARTS’s ~ 1.5 GPU-days to fully train one cell. A scramble control that shuffles which curve belongs to which anchor collapses Refine to at or below the prior ($0.516 \rightarrow 0.465$, versus the 0.470 prior; within noise of it), confirming the lift is driven by the real training curves, not feature overfitting. As elsewhere the gain is in ranking; best-of-10 selection is a near-tie with #Params at this budget (Table 5). We bound this honestly: the Spearman here is against the surrogate’s predictions (a compressed, noisier reference, not comparable to the tabular true-accuracy SPRs of Table 3), so we also run a real shared-pool search comparison and train the selected cell from scratch (Table 5): scoring a 100k-genotype pool and training CoRA-Refine’s pick under the standard DARTS evaluation (600 epochs, 5 seeds), it reaches **$2.81 \pm 0.05\%$**

test error (97.19%), trailing the best gradient/training-free references (2.50–2.76%) but beating the other shared-pool selectors: with all four picks trained at five shared seeds, CoRA-Refine ($2.81 \pm 0.05\%$) beats AZ-NAS (3.11 ± 0.12), CoRA-Rank (3.04 ± 0.06) and random (3.09 ± 0.10), seed-paired and significant (paired- t $p < 0.015$, all five seeds favouring CoRA-Refine). It is not a Pareto win: CoRA-Refine’s 1.76 GPU-day search is dearer than the gradient/training-free references and does not undercut their 2.50–2.76% (a different search paradigm, shown for context); margins are small on this low-variance space (CoRA-Rank and random tie), so the surrogate-SPR ranking remains the more reliable comparator. An anchor-count ablation confirms the curve component is real: Refine’s SPR rises monotonically with the anchor budget, overtaking #Params (0.516) by $K \approx 100$ and plateauing (~ 0.56) by $K \approx 600$ (Table 5); the deployed cell uses ≈ 230 anchors, on the rising part just past the #Params-crossing knee, trading a little ranking headroom for lower cost. These are two distinct experiments: the ~ 120 shortlisted cells above are the best-of-10 pool of the 3,000-genotype *surrogate* run, whereas the ≈ 230 anchors (nearest tabulated grid point $K=200^+$) are the Stage-2 budget of the 100k-pool *shared-pool* comparison. Still, it makes the thesis concrete on a real space: the dynamic curve residual recovers exactly the capacity-dominated boundary where the static prior is weakest.

4.3 Where does each stage close the cross-over?

We unpack Table 3 along two axes: how the gate adapts the prior per space, and how Refine repairs each space.

The consensus gate adapts the prior without labels. The target-free gate of Equation 2 measures each proxy’s leave-one-out agreement with the others on the current space and drops only a clear sign-flip. It runs on every space-instance behind Table 3 and fires exactly once: on NB101, jacov anti-correlates with the consensus ($\alpha_{\text{jacov}} = -0.41$) and is dropped, lifting the prior from 0.628 to 0.664. On all nine other instances, namely NB201 ($\times 3$), NATS-SSS ($\times 3$, including ImageNet16-120), and the three TransNAS tasks, every proxy clears the threshold (the lowest, TransNAS expressivity at -0.17 , is correctly kept, a weak disagreement that should not trigger a drop), so the bank is unchanged and the prior is bit-identical to the ungated consensus (NB201 in Table 2 is unaffected). Because the gate never reads accuracy, its decision on TransNAS is task-agnostic (identical across Object/Scene/Jigsaw), and the -0.41 -versus- -0.17 gap means any $\tau_g \in [-0.35, -0.2]$ gives the same partition, so the gate is not a tuned knob; it independently rediscovers jacov as the least transferable proxy [1], using only inter-proxy agreement and never accuracy, in contrast to LIBRA-NAS, whose per-space selection is fit to ground-truth labels. The gate’s role is to remove a genuine sign-flip without labels, not to win a space at zero cost: even after it, zero-cost CoRA-Rank on NB101 (0.664) sits just below AZ-NAS (0.676), and the label-free NB101 lead is delivered by Refine (0.715). That the single firing is a detector rather than a hard-coded case is confirmed by a deliberately injected sign-flipped proxy, which is also caught and dropped ($\alpha = -0.77$) while all five real proxies are kept. The gate activates whenever a proxy genuinely flips; it simply rarely does.

Refine repairs every space. Reading Table 3 as Rank $\rightarrow$ Refine, the residual lifts every space: NB201 $0.927 \rightarrow 0.946$, NB101 $0.664 \rightarrow 0.715$, TransNAS $0.750 \rightarrow 0.786$, and most of all the size space NATS-SSS $0.747 \rightarrow 0.894$, exactly where the static prior is weakest. This is the core claim made concrete: a single label-free residual makes one configuration robust across structure, size, and task spaces. Notably, on the cross-task TransNAS benchmark CoRA’s prior uses random-normal

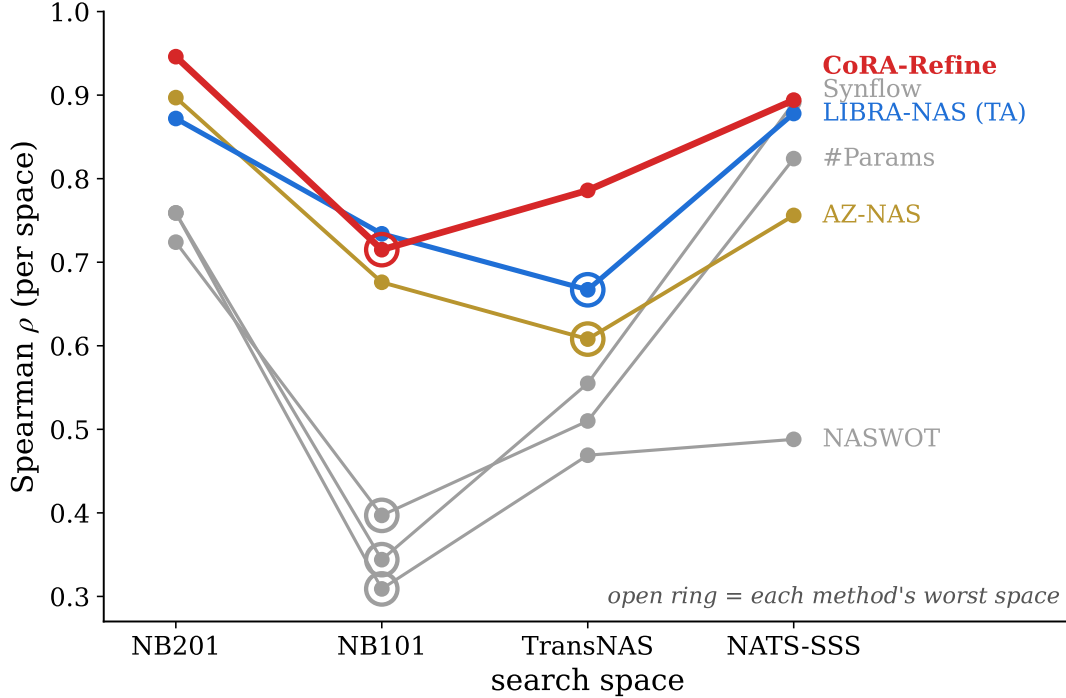


Figure 3: **The cross-over, and how CoRA-Refine closes it.** Per-space Spearman ρ for representative methods across the four vision spaces (values from Table 3); an open ring marks each method’s worst space. Capacity- and structure-driven proxies each collapse in the opposite regime (grey), and even target-aware LIBRA-NAS floors at 0.667 on TransNAS; only CoRA-Refine stays high on all four, with the highest floor ($\rho = 0.715$) of any compared method.

inputs throughout and reads no Taskonomy task images, so this cross-task result needs neither labels nor task data, a sharper statement than label-free alone.

The cross-space lead is not a provenance artifact. Table 3’s TransNAS row mixes sources (classic proxies from NAS-Bench-Suite-Zero, MeCo cited; see its footnotes). To rule out a mixed-provenance artifact we recompute every proxy live under one recipe on the same 3,000-architecture TransNAS/class_object sample (Table 8): CoRA-Rank (0.693) and CoRA-Refine (0.732) lead the best live baseline, AZ-NAS (0.631), by +0.06/+0.10, so the cross-space advantage survives a strict single-provenance comparison. (These single-task values sit below the Object/Scene/Jigsaw mean in Table 3; the ordering is the point.)

Honest size-space caveat. On the pure size space the gain is in ranking, not single-pick selection. The static prior is already a near-oracle selector there (its top-1 architecture is within a few tenths of the full-pipeline pick on both CIFAR-10/100) because the size space is capacity-dominated and capacity is the easy part. So while Refine lifts SSS SPR markedly ($0.747 \rightarrow 0.894$), its best-found accuracy roughly ties #Params-driven selection. We state this plainly: on size spaces the value is single-configuration robustness and the SPR lift, not a selection win over #Params. A per-space leave-one-out of the signal bank (which proxies earn their place on each space) is reported in Table 12 (Section 4.4): it confirms the bank is collaborative on the structure spaces and that the gate’s drop-jacov decision on NB101 matches the oracle leave-one-out.

Table 8: **Single-provenance (all-live) cross-space check, TransNAS/class_object.** Every proxy scored under one live recipe, same 3000-arch sample, $|\rho|$ vs the live ground truth (no Suite-Zero/cited cells); CoRA-Rank/Refine lead every live baseline, so the Table 3 cross-space lead is not a mixed-provenance artifact. (jacob, NASWOT could not be scored cleanly live on the dense-task MacroNet.)

method (all live)	$ \rho $	method (all live)	$ \rho $
CoRA-Refine	0.732	#Params	0.464
CoRA-Rank	0.693	Plain	0.426
AZ-NAS	0.631	Grasp	0.425
Synflow	0.479	GradNorm	0.344
		GradSign	0.295
		Fisher	0.173

Table 9: **The framework’s boundary: a non-vision space (NAS-Bench-NLP).** On the out-of-family recurrent space both the off-the-shelf proxies and the architecture encoding are weak, and Refine does not consistently improve the prior. In contrast, on NATS-SSS the informative encoding lets it lift $0.747 \rightarrow 0.894$. The framework’s benefit scales with the prior’s and the encoding’s informativeness (Section 4.3).

	NAS-Bench-NLP (out-of-family)	NATS-SSS (vision, ref.)
CoRA-Rank prior $ \rho $	0.27 (jacob alone 0.31)	0.747
encoding $\rightarrow$ true-perf (supervised)	0.25	0.47
CoRA-Refine $ \rho $	$\approx$ prior (within noise)	0.894

The framework’s boundary: a non-vision space (NAS-Bench-NLP). To test whether the cross-space behaviour is a property of the method rather than of the vision-CNN benchmark family, we run CoRA on a structurally-distinct non-vision space: NAS-Bench-NLP [23] (recurrent/LSTM language cells, ranked against test perplexity; Table 9). It is an honest weak regime, and the reason is instructive. Two of the five proxies (AZ-NAS’s feature-map views) are undefined on recurrent nets and dropped; the rest are weak (best, jacob, 0.31 in our faithful reproduction; we could not close the gap to the literature’s 0.56 over five implementations, and report ours straight), so the prior itself is poor. Moreover, Refine propagates the anchor-curve residual through the architecture encoding, and a controlled supervised diagnostic shows that encoding is only weakly predictive of perplexity (0.25 for the NB-NLP op-histogram vs. 0.47 for the NATS-SSS channel encoding); accordingly Refine does not reliably lift the prior here (its effect is within run-noise, our runs spanning 0.31–0.41), and the absolute ranking (~ 0.3) stays well below the vision worst-case (0.715). This is what the framework view predicts: benefit scales with the prior’s and the encoding’s informativeness, both low here. It also delineates where the method works: a simple 8-epoch val-loss prefix ranks NB-NLP well on its own (~ 0.92), so the curve signal exists but cannot be propagated from the anchors through an uninformative encoding. We therefore scope the “no weak regime” result to the four vision benchmarks and report NB-NLP straight as the honest boundary that removes the “only vision” objection.

Zero-cost ranking transfers to a transformer space (ViT-Bench-101). The cleaner test of cross-family generality is a space where the proxies are not crippled, compared against the transformer specialist. On ViT-Bench-101 [40] (vision transformers, true accuracy across seven targets; Table 10) CoRA’s AZ-NAS views are well-defined, and we compare directly against the ViT specialist of [8],

Table 10: **Zero-cost ranking on a transformer space (ViT-Bench-101)**. Spearman correlation with true accuracy over seven targets ($n=200$ evaluated AutoFormer-Tiny subnets). CoRA-Rank’s mean is approximately 0.03 below L-SWAG’s; it leads on CIFAR-100 (KD) and has a higher mean than AZ-NAS. We do *not* claim to beat L-SWAG overall. L-SWAG uses sample labels, while LIBRA is target-aware (soft upper bound). Bold dark-blue cells mark the best per row, excluding LIBRA. Details in [Section 4.3](#).

ViT-Bench-101 target	CoRA-Rank label-free	L-SWAG labels	AZ-NAS	#Params	jacov	$LIBRA^{UB}$ target-aware
CIFAR-100 (base)	0.328	0.451	0.142	0.472	0.434	0.475
CIFAR-100 (KD)	0.889	0.371	0.755	0.619	0.545	0.768
Flowers (base)	0.256	0.480	0.086	0.451	0.383	0.448
Flowers (KD)	0.669	0.764	0.347	0.855	0.810	0.839
Chaoyang (base)	0.090	0.116	0.029	0.060	0.115	0.119
Chaoyang (KD)	0.323	0.363	0.195	0.429	0.415	0.413
ImageNet	0.002	0.219	0.003	0.225	0.217	0.321
mean	0.365	0.395	0.222	0.445	0.417	0.483
worst-case	0.002	0.116	0.003	0.060	0.115	0.119

one paper contributing two methods, the L-SWAG proxy and the target-aware *LIBRA-NAS* selector, which we reimplement from the paper (no public code) and hand its best-for-itself layer range. **Label-free CoRA-Rank is competitive with L-SWAG**: its mean Spearman is approximately 0.03 lower ([Table 10](#)), while L-SWAG uses sample labels (its gradient term needs y) and is handed its best-tuned per-space layer range. CoRA-Rank decisively wins the CIFAR-100-KD target (bootstrap CI [+0.41, +0.63]) while trailing on the mean and worst-case, and it is well clear of the general ranker AZ-NAS, ahead on six of seven targets. This retires the “only beats a CNN proxy” reading: a label-free, single-configuration consensus has mean Spearman approximately 0.03 below a best-tuned, label-using transformer specialist. We do not claim to beat L-SWAG, and we bound the transfer honestly: ViT-Bench-101 is capacity-leaning. #Params (0.445 mean) is the strongest single cue (the same boundary as NATS-SSS and DARTS) and outranks CoRA-Rank (0.365) on the mean, while the worst-case is low for every label-free method (CoRA-Rank’s worst-case falls to 0.002, below both #Params 0.060 and L-SWAG 0.116), so we do not extend “no weak regime” here; it remains the four vision-CNN benchmarks. (LIBRA-NAS is target-aware because it peeks at held-out accuracy, so we show it only as a soft upper bound.) The curve-residual Refine also does not help on this benchmark: its architectures span only $\sim 2\%$ accuracy, so early curves cannot separate them and extrapolation amplifies noise. This sharpens when Refine helps: it needs architecture spread and clean curves, present on DARTS ([Table 5](#)) and the tabular spaces, absent on the tightly clustered ViT-Bench-101. We report this benchmark-dependence explicitly.

4.4 Which components are load-bearing?

What the composition adds. [Table 11](#) adds CoRA’s pieces one at a time. Two are load-bearing and two are deliberately inert: the consensus gate earns its place on the topology space NB101 (+0.036 rank, +0.046 refine, by dropping the sign-flipped jacov), and the *curve-residual refinement* is the dominant lift on the size space NATS-SSS (+0.260 over the rank); the pow_3 blend and op-locality smoothing each move $|\rho|$ by only $\approx \pm 0.001$. The value of the composition is thus precisely the gate (topology) + residual (size) pairing the cross-over demands; pow_3 and smoothing are kept for stability, not accuracy, and the method is robust to dropping them.

Table 11: **Additive ablation of CoRA’s composition.** Rank and Refine form separate cumulative blocks; additions are relative to the preceding row within each block. The two load-bearing pieces are the consensus gate (topology, NB101) and the curve-residual refinement (size, NATS-SSS); the pow3 blend and op-smoothing are within-noise (± 0.001) and kept for stability, not accuracy. The full-CoRA NB101 value (0.715) is the deployed configuration and matches Table 3; the 0.716 peak at the +gate/+pow3 rows is within the ± 0.001 band.

variant (cumulative)	NB101	NATS-SSS/C100
rank (no gate)	0.628	0.564
+ consensus gate	0.664	0.564
refine (LLW, no gate/smooth)	0.670	0.824
+ gate	0.716	0.824
+ pow3 blend	0.716	0.823
+ op-smoothing (full)	0.715	0.824

Prior weighting. Equal weighting is the result of trying the alternatives and finding they do not help. A flat equal consensus over the five signals beats the earlier 3-view grouping on all four NB201 metrics (e.g. Top-1 $71.33 \rightarrow 71.44$); an unsupervised discriminative re-weighting (weight $\propto$ agreement with the others) helps standalone Rank slightly ($+0.006$ – 0.009 on NB201) but hurts Refine selection (-0.33 Top-1); and a 2-axis decoupling that residualizes structure on log-params craters NB201 ($0.92 \rightarrow 0.82$). These negatives justify the equal consensus and, together with the prior-quality result (Table 4), the principle that the prior should be clean rather than clever.

Predictor and components. For the per-anchor estimate, the log-linear (LLW) fit is the strongest single curve model (final SPR 0.9475 at 30 epochs); pow3 contributes a bounded asymptote that prevents top-end overshoot, and the rank-average blend is our default. Curve-extrapolation and MMF variants are worse, and a supervised cross-dataset predictor is worse at Refine (0.86) despite higher intrinsic accuracy, confirming the target-free residual generalizes better. Operation-locality smoothing is the CIFAR-10 selection fix (sample-3000 $93.4 \rightarrow 94.2$) with negligible effect on whole-space SPR, and the ExtraTrees residual propagation is what carries the anchor signal to the full space.

Training-dynamics (B-)signals: a clean negative. We also tested seven training-time signals (gradient norm, weight movement, feature entropy, ...) recorded live on 1,000 anchors, used as extra features, as reliability weights, and for adaptive fidelity. They add nothing to Refine in every use; we keep the pipeline clean and report the negative.

Cross-space leave-one-out of the signal bank. Table 12 drops each of the five proxies in turn from the $a=0$ consensus and re-ranks (pure re-aggregation, no training). Two facts stand out. First, the bank is genuinely collaborative on the structure spaces: on NB201 every single-proxy drop lowers $|\rho|$, and on NB101 the best leave-one-out is precisely drop jacob, the very proxy the target-free gate removes there, which both ties the gated full bank and beats every other drop (the next best, drop synflow, falls to 0.604). The uniform gate thus independently rediscovers the same proxy that an oracle leave-one-out would remove. Second, on the capacity-dominated NATS-SSS dropping trainability (or jacob) raises ranking $|\rho|$, yet the gate keeps both because they positively agree with the consensus on that space ($\alpha > \tau_g$): the gate adapts on label-free agreement, never on

Table 12: **Cross-space leave-one-out of the five-signal CoRA-Rank bank.** $|\rho|$ of the equal-weight consensus with each proxy dropped in turn, vs. the locked gated full bank. On NB101 the best drop is exactly jacov, the proxy the target-free gate removes there; on NATS-SSS dropping trainability would help but the gate keeps it (it agrees with the consensus), and the residual stage closes the slack ($0.747 \rightarrow 0.894$). Bold dark-blue cells mark the best per column; details in [Section 4.4](#).

Bank variant	NB201	NB101	TransNAS	NATS-SSS
Full bank (gated, = Table 3)	0.927	0.664	0.750	0.747
– expressivity	0.919	0.450	0.736	0.708
– trainability	0.908	0.561	0.714	0.807
– jacov	0.918	0.664	0.716	0.792
– synflow	0.901	0.604	0.750	0.689
– params	0.907	0.584	0.755	0.690

accuracy, so it does not chase this hindsight gain, and the residual Refine stage closes the size-space slack regardless ($0.747 \rightarrow 0.894$, [Table 3](#)).

4.5 Are the margins significant, and is the configuration tuned?

Significance. Selection accuracies in [Table 2](#) are mean $\pm$ std over 5 fixed runs, and the ranking SPR has a per-seed spread of $\approx \pm 0.008$ on the 3,000-sample spaces. The one close call is the size space, where we test CoRA-Refine against #Params (the trivial baseline the field asks us to clear) and the two nearest capacity proxies above it, Synflow and MeCo, with a paired bootstrap ($B=10,000$) and Holm correction ($m=3$); the other strong size cues (GradSign 0.852, ZiCo 0.841, ZenNAS 0.835) sit below these and so are not the binding comparison. The verdict is two-sided and honest: CoRA-Refine decisively beats naive #Params ($\Delta|\rho|=+0.07$, Holm $p < 0.001$, survives correction) but ties Synflow and MeCo ($\Delta=+0.004$ – 0.009 and $+0.003$, both inside the corrected noise band; two-sided $p=0.06$ and 0.20). So on the size space CoRA-Refine matches the best capacity proxies and decisively clears the trivial baseline rather than beating the best proxies outright. The cross-space headline rests on worst-case robustness (min-SPR 0.715, above any baseline), not on this size-space margin. Notably, random-input proxies such as Synflow and jacov carry ≈ 0.005 – 0.006 run-to-run noise of their own, part of why a consensus-plus-residual is steadier than any single proxy.

Is it tuned? A one-axis-at-a-time sweep on NATS-SSS/CIFAR-100 shows the result does not hinge on hyperparameters: the anchor count plateaus above 96, the epoch prefix is flat from 3 to 30 epochs, and op-locality smoothing β is flat over $[0, 0.5]$. Only the residual weight (shrink) is sensitive ($0.25 \rightarrow 0.703$, $0.5 \rightarrow 0.824$, $0.75 \rightarrow 0.898$, $1.0 \rightarrow 0.917$), and we fix it a priori at the cross-space-safe 0.5, not the SSS-optimal 1.0, on the label-free rationale that a high shrink over-trusts the residual on topology spaces where the anchor signal is weaker. This value is set by that propagation-error argument, not chosen by reading any accuracy, so it does not breach the label-free protocol. The reported SSS number is thus computed with a conservative, non-SSS-tuned weight and is, if anything, understated: the single configuration is a robust plateau set deliberately to no single space’s optimum.

5 Limitations

We state the following boundaries of the method up front.

The size space is a tie with the best capacity proxies, not a win. On a pure size space (NATS-SSS) the unsupervised prior is beaten by #Params. The curve residual recovers it (ρ 0.747 $\rightarrow$ 0.894, Table 3) but only to match the strongest capacity proxies: CoRA-Refine decisively beats naive #Params (+0.07, Holm $p < 0.001$) yet ties Synflow and MeCo within multiple-comparison-corrected noise (Section 4.5), and its best-found-accuracy selection only ties #Params (the space is capacity-dominated, so the easy capacity signal is already a near-oracle selector). The value we claim on size spaces is single-configuration robustness (no weak regime, and decisively clearing the trivial baseline), not a ranking or selection win over the best size-aware proxy.

The architecture encoding is space-specific. The method and all its hyperparameters are constant across spaces, but Stage 2’s propagation features (operation encoding, topology) and the op-locality neighbourhood are necessarily defined per space, as they are for any NAS method that consumes architectures. “One configuration” refers to the algorithm and its constants, not to a space-agnostic encoding.

The gate catches sign-flips, not dilution. The consensus gate removes a proxy only when it anti-correlates with the others ($\alpha < \tau_g$). On a capacity-dominated space where some proxies are merely *uninformative* rather than contradictory (on DARTS, jacob and trainability have near-zero correlation with accuracy, $\alpha \approx 0$), the gate keeps them and the equal-weight consensus is diluted, underperforming its own best component (on DARTS, expressivity alone 0.578 vs. the consensus 0.470, Table 5). This is why the zero-cost prior only matches rather than beats the strongest proxies on capacity-dominated spaces; the curve residual (Refine) is what recovers the gap (it flips DARTS to a win, Table 5). An importance-weighted consensus would address dilution directly but is a method change we leave to future work.

Label-free, not data-free; and Refine is not zero-cost. We claim CoRA is label-free with respect to fully trained architecture-accuracy labels used to fit the ranker, but not data-free: the jacob proxy reads a small unlabeled real-data minibatch on the classification spaces (random-normal on TransNAS; Section 3.2), as do the other proxies in synthetic form. Separately, Stage 2 spends $\approx 1\%$ of the cost of training the space; it is positioned on the cost-quality frontier (Fig. 1, Section 4.2) against predictors and multi-fidelity methods, not presented as a zero-cost proxy. Stage 1 (Rank) is the zero-cost operating point. Separately, a few cross-space baseline cells are reproduced under documented constraints rather than fully live (TransNAS classic proxies are sourced from NAS-Bench-Suite-Zero because the data-dependent variants need the non-redistributable Taskonomy images; MeCo’s TransNAS value is cited from its paper), and the target-aware LIBRA-NAS is reported only as a soft upper bound; these are detailed in the Table 3 footnotes.

6 Conclusion

We presented **CoRA-NAS**, a label-free, single-configuration, coarse-to-fine method for architecture ranking and selection. Stage 1 (Rank) forms an equal-weight rank consensus over a small bank

of off-the-shelf zero-cost proxies spanning capacity and structure-at-initialization, with a target-free consensus gate that adapts the bank per space, dropping a proxy only when it genuinely anti-correlates with the others, using no labels. Stage 2 (Refine) corrects the prior’s error with a target-free residual read from $\approx 1\%$ early training curves. The result is cross-space robustness from one configuration: across four vision benchmarks (two topology spaces, a cross-task space, and a size space) every baseline has a weak regime whereas CoRA-Refine has none. Its worst space is the highest worst-case of any method (Table 3), and a clean prior is what keeps the residual learnable (Table 4). CoRA is best understood as a proxy-agnostic Rank+Refine framework whose benefit scales with the prior’s and the architecture encoding’s informativeness: on a recurrent space (NAS-Bench-NLP) both are weak, an honest *weak regime* that scopes the no-weak-regime result to vision; on a vision-transformer space (ViT-Bench-101) the label-free consensus is competitive with the ViT specialist L-SWAG (approximately 0.03 lower mean Spearman) and ahead of AZ-NAS. The size space is a related boundary: there our unsupervised prior cannot beat #Params, and even the residual only matches the strongest capacity proxies (decisively beating naive #Params but tying Synflow / MeCo within multiple-comparison-corrected noise, Section 5). We demonstrate end-to-end search on the home space (NB201, where the curve re-rank beats matched-budget multi-fidelity) and on the real DARTS cell space, where CoRA-Refine ties #Params and significantly beats AZ-NAS on the surrogate ranking and, trained from scratch (5 seeds), reaches 2.81% CIFAR-10 error, within the competitive band and beating AZ-NAS and random on the same candidate pool (5 shared seeds, paired $p < 0.015$), though not the cheaper gradient methods. The honest remaining steps are an ImageNet-scale search and closing the absolute gap to gradient/one-shot methods on the real cell space.

References

- [1] Mohamed S. Abdelfattah, Abhinav Mehrotra, Łukasz Dudziak, and Nicholas D. Lane. Zero-cost proxies for lightweight NAS. In *International Conference on Learning Representations (ICLR)*, 2021. arXiv:2101.08134. 1, 5, 9, 18
- [2] Steven Adriaensen, Herilalaina Rakotoarison, Samuel Müller, and Frank Hutter. Efficient bayesian learning curve extrapolation using prior-data fitted networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. LC-PFN. arXiv:2310.20447. 2, 5
- [3] Rohan Asthana, Joschua Conrad, Maurits Ortmanns, and Vasileios Belagiannis. Dextr: Zero-shot neural architecture search with singular value decomposition and extrinsic curvature. *Transactions on Machine Learning Research (TMLR)*, 2025. arXiv:2508.12977. 4, 12
- [4] Noor Awad, Neeratyoy Mallik, and Frank Hutter. DEHB: Evolutionary hyperband for scalable, robust and efficient hyperparameter optimization. In *International Joint Conference on Artificial Intelligence (IJCAI)*, 2021. arXiv:2105.09821. 6
- [5] Rui Bao, Zheng Gao, Xiaoyu Li, Xiaoyan Feng, Yang Song, and Jiaojiao Jiang. SHIFT: Stochastic hidden-trajectory deflection for removing diffusion-based watermark, 2026. URL <https://arxiv.org/abs/2603.29742>. 6
- [6] Han Cai, Ligeng Zhu, and Song Han. ProxylessNAS: Direct neural architecture search on target task and hardware. In *International Conference on Learning Representations (ICLR)*, 2019. 6
- [7] Han Cai, Chuang Gan, Tianzhe Wang, Zhekai Zhang, and Song Han. Once-for-all: Train one network and specialize it for efficient deployment. In *International Conference on Learning Representations (ICLR)*, 2020. 6
- [8] Sofia Casarin, Sergio Escalera, and Oswald Lanz. L-SWAG: Layer-sample wise activation with gradients information for zero-shot NAS on vision transformers. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2025. introduces LIBRA-NAS (Low Information gain and Bias Re-Alignment). arXiv:2505.07300. 2, 4, 5, 9, 12, 20

- [9] Wuyang Chen, Xinyu Gong, and Zhangyang Wang. Neural architecture search on ImageNet in four GPU hours: A theoretically inspired perspective. In *International Conference on Learning Representations (ICLR)*, 2021. arXiv:2102.11535. 4
- [10] Debadeepta Dey, Shital Shah, and Sébastien Bubeck. FEAR: A simple lightweight method to rank architectures, 2021. arXiv:2106.04010. 6
- [11] Tobias Domhan, Jost Tobias Springenberg, and Frank Hutter. Speeding up automatic hyperparameter optimization of deep neural networks by extrapolation of learning curves. In *International Joint Conference on Artificial Intelligence (IJCAI)*, 2015. 5, 9
- [12] Xuanyi Dong and Yi Yang. NAS-Bench-201: Extending the scope of reproducible neural architecture search. In *International Conference on Learning Representations (ICLR)*, 2020. 1, 6, 11
- [13] Xuanyi Dong, Lu Liu, Katarzyna Musial, and Bogdan Gabrys. NATS-Bench: Benchmarking NAS algorithms for architecture topology and size. *IEEE Transactions on Pattern Analysis and Machine Intelligence (TPAMI)*, 2021. 2, 6, 11
- [14] Yawen Duan, Xin Chen, Hang Xu, Zewei Chen, Xiaodan Liang, Tong Zhang, and Zhenguo Li. TransNAS-Bench-101: Improving transferability and generalizability of cross-task neural architecture search. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2021. arXiv:2105.11871. 6, 11
- [15] Stefan Falkner, Aaron Klein, and Frank Hutter. BOHB: Robust and efficient hyperparameter optimization at scale. In *International Conference on Machine Learning (ICML)*, 2018. 6
- [16] Zheng Gao, Zhicheng Bao, Haoran Fan, Xiaoyu Li, Qipei Nong, and Jiaojiao Jiang. GSCNet: A transformer-based granular style control network for artifact-free image style transfer. *Journal of Visual Communication and Image Representation*, 120:104895, 2026. doi: 10.1016/j.jvcir.2026.104895. 6
- [17] Zheng Gao, Xiaoyu Li, Zhicheng Bao, Xiaoyan Feng, and Jiaojiao Jiang. Breaking semantic-aware watermarks via LLM-guided coherence-preserving semantic injection. In *Proceedings of the ACM Web Conference 2026*, pages 8569–8572. Association for Computing Machinery, 2026. doi: 10.1145/3774904.3792912. 6
- [18] Zheng Gao, Yifan Yang, Xiaoyu Li, Xiaoyan Feng, Haoran Fan, Yang Song, and Jiaojiao Jiang. SLICE: Semantic latent injection via compartmentalized embedding for image watermarking, 2026. URL <https://arxiv.org/abs/2603.12749>. 6
- [19] Pierre Geurts, Damien Ernst, and Louis Wehenkel. Extremely randomized trees. *Machine Learning*, 2006. ExtraTrees. 10
- [20] Zichao Guo, Xiangyu Zhang, Haoyuan Mu, Wen Heng, Zechun Liu, Yichen Wei, and Jian Sun. Single path one-shot neural architecture search with uniform sampling. In *European Conference on Computer Vision (ECCV)*, 2020. 2, 6
- [21] Zhenfeng He, Yao Shu, Zhongxiang Dai, and Bryan Kian Hsiang Low. Robustifying and boosting training-free neural architecture search. In *International Conference on Learning Representations (ICLR)*, 2024. RoBoT. arXiv:2403.07591. 2, 4, 5
- [22] Tangyu Jiang, Haodi Wang, and Rongfang Bie. MeCo: Zero-shot NAS with one data and single forward pass via minimum eigenvalue of correlation. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. NeurIPS 2023 spotlight. 4, 12
- [23] Nikita Klyuchnikov, Ilya Trofimov, Ekaterina Artemova, Mikhail Salnikov, Maxim Fedorov, and Evgeny Burnaev. NAS-Bench-NLP: Neural architecture search benchmark for natural language processing. *IEEE Access*, 2022. arXiv:2006.07116. 20
- [24] Arjun Krishnakumar, Colin White, Arber Zela, Renbo Tu, Mahmoud Safari, and Frank Hutter. NAS-Bench-Suite-Zero: Accelerating research on zero cost proxies. In *Advances in Neural Information Processing Systems (NeurIPS) Datasets and Benchmarks Track*, 2022. arXiv:2210.03230. 2, 4, 6, 12, 29
- [25] Jung-hyup Lee and Bumsub Ham. AZ-NAS: Assembling zero-cost proxies for network architecture search. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. arXiv:2403.19232. 2, 5, 7, 12
- [26] Namhoon Lee, Thalaiyasingam Ajanthan, and Philip H. S. Torr. SNIP: Single-shot network pruning based on connection sensitivity. In *International Conference on Learning Representations (ICLR)*, 2019. 4

- [27] Guihong Li, Yuedong Yang, Kartikeya Bhardwaj, and Radu Marculescu. ZiCo: Zero-shot NAS via inverse coefficient of variation on gradients. In *International Conference on Learning Representations (ICLR)*, 2023. arXiv:2301.11300. 2, 4, 12
- [28] Lisha Li, Kevin Jamieson, Giulia DeSalvo, Afshin Rostamizadeh, and Ameet Talwalkar. Hyperband: A novel bandit-based approach to hyperparameter optimization. *Journal of Machine Learning Research (JMLR)*, 2018. 6
- [29] Ming Lin, Pichao Wang, Zhenhong Sun, Heseng Chen, Xiuyu Sun, Qi Qian, Hao Li, and Rong Jin. Zen-NAS: A zero-shot NAS for high-performance image recognition. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021. 1, 4
- [30] Hanxiao Liu, Karen Simonyan, and Yiming Yang. DARTS: Differentiable architecture search. In *International Conference on Learning Representations (ICLR)*, 2019. 2, 6
- [31] Joe Mellor, Jack Turner, Amos Storkey, and Elliot J. Crowley. Neural architecture search without training. In *International Conference on Machine Learning (ICML)*, 2021. 1, 4, 7
- [32] Xuefei Ning, Changcheng Tang, Wenshuo Li, Zixuan Zhou, Shuang Liang, Huazhong Yang, and Yu Wang. Evaluating efficient performance estimators of neural architectures. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021. arXiv:2008.03064. 2, 4, 6
- [33] Yameng Peng, Andy Song, Haytham M. Fayek, Vic Ciesielski, and Xiaojun Chang. SWAP-NAS: Sample-wise activation patterns for ultra-fast NAS. In *International Conference on Learning Representations (ICLR)*, 2024. SWAP / SWAP-reg. arXiv:2403.04161. 4, 12
- [34] Binxin Ru, Clare Lyle, Lisa Schut, Miroslav Fil, Mark van der Wilk, and Yarin Gal. Speedy performance estimation for neural architecture search. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021. SoTL. arXiv:2006.04492. 2, 5
- [35] Julien Siems, Lucas Zimmer, Arber Zela, Jovita Lukasik, Margret Keuper, and Frank Hutter. NAS-Bench-301 and the case for surrogate benchmarks for neural architecture search, 2021. arXiv:2008.09777. 1, 6
- [36] Hidenori Tanaka, Daniel Kunin, Daniel L. K. Yamins, and Surya Ganguli. Pruning neural networks without any data by iteratively conserving synaptic flow. *Advances in Neural Information Processing Systems (NeurIPS)*, 2020. 1, 4, 7
- [37] Chaoqi Wang, Guodong Zhang, and Roger Grosse. Picking winning tickets before training by preserving gradient flow. In *International Conference on Learning Representations (ICLR)*, 2020. 4
- [38] Ruochen Wang, Xiangning Chen, Minhao Cheng, Xiaocheng Tang, and Cho-Jui Hsieh. RANK-NOSH: Efficient predictor-based architecture search via non-uniform successive halving. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021. arXiv:2108.08019. 6
- [39] Zhaoyan Wang, Zheng Gao, Arogya Kharel, and In-Young Ko. Are LLMs better GNN helpers? rethinking robust graph learning under deficiencies with iterative refinement, 2025. URL <https://arxiv.org/abs/2510.01910>. 6
- [40] Zimian Wei, Lujun Li, Peijie Dong, Zheng Hui, Anggeng Li, Menglong Lu, Hengyue Pan, Zhiliang Tian, and Dongsheng Li. Auto-prox: Training-free vision transformer architecture search via automatic proxy discovery. In *AAAI Conference on Artificial Intelligence (AAAI)*, 2024. introduces the ViT-Bench-101 vision-transformer benchmark. arXiv:2312.09059. 20
- [41] Colin White, Willie Neiswanger, and Yash Savani. BANANAS: Bayesian optimization with neural architectures for neural architecture search. In *AAAI Conference on Artificial Intelligence*, 2021. 2, 5
- [42] Colin White, Arber Zela, Robin Ru, Yang Liu, and Frank Hutter. How powerful are performance predictors in neural architecture search? In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021. arXiv:2104.01177. 2, 5
- [43] Lichuan Xiang, Łukasz Dudziak, Mohamed S. Abdelfattah, Thomas Chau, Nicholas D. Lane, and Hongkai Wen. Exploiting network compressibility and topology in zero-cost NAS. In *International Conference on Automated Machine Learning (AutoML)*, PMLR vol. 224, 2023. T-CET proxy (Compressible Expressivity + Trainability). 12
- [44] Shen Yan, Colin White, Yash Savani, and Frank Hutter. NAS-Bench-x11 and the power of learning curves. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021. arXiv:2111.03602. 6

- [45] Chris Ying, Aaron Klein, Eric Christiansen, Esteban Real, Kevin Murphy, and Frank Hutter. NAS-Bench-101: Towards reproducible neural architecture search. In *International Conference on Machine Learning (ICML)*, 2019. arXiv:1902.09635. 1, 6, 11
- [46] Bokang Zeng, Zheng Gao, Xiaoyu Li, Xiaoyan Feng, and Jiaojiao Jiang. LAVA: Layered audio-visual anti-tampering watermarking for robust deepfake detection and localization, 2026. URL <https://arxiv.org/abs/2604.23957>. Accepted at ACM Multimedia 2026. 6
- [47] Zhihao Zhang and Zhihao Jia. GradSign: Model performance inference with theoretical insights. In *International Conference on Learning Representations (ICLR)*, 2022. 2, 4

CoRA-NAS: Coarse Ranking and Anchor-Residual Refinement for Neural Architecture Search

Supplementary Material

A Reproduction notes (Table 2 baselines)

Baselines in Table 2, except the sourced entries noted below, are re-run under one unified protocol on a single L40S (Section 4). As a cross-machine check, our nine GPU-dependent proxies match an independent RTX-4090 reproduction within $|\Delta\text{SPR}| \leq 0.009$ on all 27 corresponding cells (#Params and FLOPs are deterministic; AZ-NAS is not part of the 4090 run; SPR/KT are GPU-agnostic). Discrepancies exceeding 0.02 from *published* values are documented for eight methods; each reflects a protocol or source difference, not a port error (Table 13). Three standard port fixes are applied: GradSign uses the SUM aggregation (the AZ-NAS port’s mean inverts the ranking), SWAP uses its regularised SWAP-reg variant, and LIBRA uses the RankProduct operator; Fisher and Plain are taken from NAS-Bench-Suite-Zero [24]. We report our reproduced values, not each paper’s heterogeneous published number.

Table 13: Differences from published values exceeding 0.02 for eight methods, with the documented cause. None is a port error.

Method (cell)	Δ	Root cause
GradNorm (im16)	+0.028	AZ-NAS published-vs-released-code discrepancy (matches our 4090 exactly)
Grasp (im16)	+0.061	same published-vs-code discrepancy
Fisher (c10/im16)	+0.044/+0.037	source protocol (NAS-Bench-Suite-Zero precomputed)
MeCo (c10)	+0.025	near-tie with published (≈ 0.89)
SWAP-reg (c100/im16)	−0.027/−0.048	SWAP-reg recipe vs. L-SWAG’s protocol (c10 matches ± 0.002)
T-CET (c10/im16)	+0.054/−0.043	paper reports KT, not SPR (our KT matches to ≤ 0.018)
Dextr (c100/im16)	−0.030/−0.025	Dextr’s own protocol (validation accuracy)
LIBRA (c100)	−0.026	RankProduct operator + per-benchmark protocol

In particular, T-CET is gated on KT (the metric its paper reports), and AZ-NAS’s published ImageNet16-120 figure is not reproducible from its released code, so we report our faithfully reproduced value ($\rho = 0.877$). Cross-space provenance (split sourcing on TransNAS, the target-aware status of LIBRA-NAS, and the per-space reproduction caveats for SWAP, MeCo, Dextr) is documented in the Table 3 footnotes.

B Cross-space table: per-cell sourcing and reproduction caveats

This appendix records, cell by cell, how each entry of Table 3 was obtained: which values we computed live, which are sourced from a benchmark, and which are cited from the originating paper. All values in the table are unchanged from our runs; this section only documents them.

Protocol and sample. NB201 ρ is over the full 15,625-architecture space (from Table 2); NB101, TransNAS, and NATS-SSS live results use a fixed 3,000-architecture sample (SPR std ≈ 0.008 , far below the cross-over gaps). The sourced Suite-Zero TransNAS classics instead use the full 4,096-architecture benchmark, as noted in Table 14. Refine ([†]) adds $\approx 1\%$ training: NB201’s cell is the full-space Table 2 result (1000 anchors at 30 epochs); the other three columns use 192 Stage 1-stratified anchors ($\approx 6.4\%$ of the 3000-arch sample) at a $\approx 15\%$ epoch prefix (SSS/NB101/TransNAS = 14/16/4 epochs), a $\approx 1\%$ budget.

TransNAS anchor curves (^a). On TransNAS the anchor curves are read from the benchmark’s recorded per-epoch trajectories (Taskonomy training data is not redistributable), $\approx 1\%$ live-equivalent on the benchmark’s exact networks; NB201/NB101/SSS are live-trained. Refine drops jacob from its ExtraTrees features on NB101 (consensus-gate, as in the prior).

Suite-Zero-sourced classic baselines (^b). TransNAS classic baselines are taken from NAS-Bench-Suite-Zero precomputed scores, because the data-dependent proxies need the non-redistributable Taskonomy task images and the benchmark’s exact networks. Fisher is identical in recipe but our live adapter yields 0.21 vs 0.44 (see Section 4.3); the residual is the Suite-Zero/NASLib pipeline, so re-running it reproduces the stored value. CoRA and the proxies absent from Suite-Zero are computed live. TransNAS is the mean over its 3 classification tasks (Object/Scene/Jigsaw), matching NB201’s 3 datasets.

Target-aware LIBRA-NAS (^{TA}). LIBRA-NAS selects its proxy trio per space by agreement with ground-truth validation accuracy (it peeks at the labels and is therefore not zero-shot), so its cells are a soft *upper bound*, not a fair zero-shot baseline; its TransNAS value (^b) is cited from L-SWAG (its selected trio includes data-dependent proxies). CoRA-Refine uses early training curves rather than fully trained performance labels. Its reported correlations exceed LIBRA-NAS on NB201/TransNAS/SSS, but not NB101 (0.734 for LIBRA-NAS vs 0.715 for CoRA-Refine). Their supervision and cost regimes differ.

Anti-correlated size-space entries (^u). Dextr and MeCo are *anti*-correlated on the size space NATS-SSS (both grow with channel capacity, which saturates against test accuracy); $|\rho|$ is reported, with a negative raw sign, reproducing the documented anti-correlation (Dextr Tab. 6). Their SSS $|\rho|$ runs somewhat above the original papers’ because our data-light protocol makes the score a purer capacity probe.

SWAP’s non-reproducing NB101 figure (*). SWAP’s published NB101 0.77 (size-regularised) does not reproduce here. The raw SWAP score reproduces (unreg. 0.44 vs paper 0.46), but its size-prior regulariser only injects as much signal as size predicts accuracy in the population ($\rho(\#\text{Params}, \text{acc}) = 0.40$ on our NB101 sample), so SWAP-reg reaches 0.40 not 0.77; the same regulariser *does* help on the true size space NATS-SSS ($0.54 \rightarrow 0.70$). This is not a sample-count artifact (verified). We report the reproduced 0.40.

T-CET surrogate (^c). T-CET is data-dependent; its TransNAS value is a real-image class_object surrogate (1 of 3 tasks; the other tasks’ images are unavailable), $|\rho|$ comparable to its published Object Kendall- τ .

MeCo TransNAS citation ^(d). MeCo is data-free on the classification benchmarks (NB201/NB101/SSS, randn $\approx$ real per its Tab. 3) but not on TransNAS: with randn input our live 3-task value is only 0.28 vs its published 0.55, because the dense-task macro-nets’ feature-map correlation (whose min-eigenvalue is the MeCo score) is not reproduced by a noise input. We cite the paper’s 0.55. The MacroNet adapter itself is faithful here: our live Synflow and #Params match the benchmark at $\rho = 0.997$ and 1.000, so CoRA’s live TransNAS prior is unaffected.

Table 14: **Per-dataset / per-task breakdown of Table 3.** Each cell is $|\rho|$ (Spearman); the μ column of every space reproduces that space’s main-table value (max deviation 0.0014). CoRA-Refine’s largest single-dataset gain is on NATS-SSS CIFAR-100 (CoRA-Rank 0.564 $\rightarrow$ 0.824). NB201/SSS use their 3 datasets (C10/C100/IN16); TransNAS-micro uses its 3 classification tasks (Object/Scene/Jigsaw); NB101 is CIFAR-10 only. NB201 uses the full 15,625-architecture space. In the other spaces, live proxies and CoRA use the fixed 3000-architecture samples; Suite-Zero precomputed TransNAS classics ^(b) in Table 3 use the full 4096-architecture benchmark. The five newer methods (MeCo/SWAP/T-CET/Dextr/LIBRA) are omitted here: their per-space means are in Table 3 and their NB201 per-dataset values in Table 2; their remaining per-dataset breakdowns are not yet compiled under our protocol.

Method	NB201				NB101	TransNAS-micro				NATS-SSS			
	C10	C100	IN16	μ	C10	Obj	Scn	Jig	μ	C10	C100	IN16	μ
#Params	0.753	0.728	0.691	0.724	0.397	0.454	0.638	0.439	0.510	0.881	0.723	0.868	0.824
FLOPs	0.753	0.727	0.691	0.724	0.397	0.462	0.653	0.450	0.522	0.635	0.301	0.600	0.512
Synflow	0.769	0.761	0.747	0.759	0.344	0.480	0.720	0.466	0.555	0.942	0.779	0.951	0.891
GradNorm	0.483	0.488	0.440	0.470	0.188	0.382	0.651	0.351	0.461	0.548	0.348	0.567	0.488
Grasp	0.450	0.464	0.467	0.460	0.478	0.212	0.275	0.108	0.198	0.014	0.086	0.447	0.182
Snip	0.614	0.619	0.539	0.591	0.208	0.448	0.705	0.410	0.521	0.796	0.612	0.797	0.735
Fisher	0.444	0.449	0.457	0.450	0.368	0.437	0.665	0.300	0.467	0.682	0.457	0.624	0.588
NASWOT	0.742	0.767	0.768	0.759	0.309	0.393	0.599	0.416	0.469	0.611	0.275	0.578	0.488
ZenNAS	0.386	0.362	0.399	0.382	0.612	0.535	0.717	0.504	0.585	0.920	0.689	0.895	0.835
TE-NAS	0.735	0.717	0.685	0.712	0.296	0.268	0.395	0.222	0.295	0.255	0.069	0.292	0.205
Plain	0.172	0.158	0.167	0.166	0.364	0.344	0.247	0.355	0.315	0.008	0.020	0.015	0.015
GradSign	0.812	0.795	0.784	0.797	0.397	0.626	0.818	0.614	0.686	0.880	0.785	0.892	0.852
ZiCo	0.783	0.797	0.789	0.790	0.621	0.501	0.699	0.506	0.568	0.893	0.728	0.901	0.841
AZ-NAS	0.913	0.900	0.877	0.897	0.676	0.586	0.622	0.613	0.607	0.849	0.639	0.779	0.756
CoRA-Rank	0.938	0.932	0.911	0.927	0.664	0.693	0.860	0.696	0.750	0.872	0.564	0.803	0.747
CoRA-Refine	0.942	0.951	0.946	0.946	0.715	0.732	0.868	0.758	0.786	0.926	0.824	0.933	0.894