

What FID Hides: Detecting, Ranking, and Diagnosing Deviations in Generative Evaluation

Hao Chen
 Department of Statistics
 University of California, Davis
 hxchen@ucdavis.edu

Abstract

Generative models are commonly ranked by Fréchet Inception Distance (FID) and Kernel Inception Distance (KID), yet FID’s first-two-moment summary can miss distributional differences, and a reported scalar gap alone is not a calibrated test against sampling variation. FID’s moment restriction has concrete consequences: on ImageNet, visually unrecognizable images optimized only to match the reference Inception mean and covariance obtain FID 24.7 versus 58.6 for held-out real images (lower is better). Moreover, FID and KID are scalar discrepancies that are unchanged when the two samples are exchanged and therefore do not encode the direction of a dispersion change: under-dispersion, as can occur in mode collapse, versus over-dispersion. We introduce **ZID** (*Z-resolved Integrated Diagnostic*), which combines six standardized location- and dispersion-sensitive arms from a rank graph (RISE) and Gaussian kernels (GPK at two bandwidths). Rather than asking one scalar to serve incompatible roles, ZID reports three linked outputs: an index for ranking departure magnitude, a permutation p -value for testing distributional equality, and a signed dispersion readout for diagnosis. In controlled experiments, ZID detects a broad range of departures, and its score tracks increasing severity along the corresponding sweeps, including cases in which FID is flat or reversed. On DiT-XL/2 and SiT-XL/2 guidance sweeps, ZID detects departure from real data, and its signed readout labels the high-guidance diversity collapse as under-dispersion.

1 Introduction

Generative models are increasingly used across science and industry, making model-selection metrics consequential: a misleading ranking can favor a worse model. Two widely used embedding-based scalar summaries are FID and KID. FID (Heusel et al., 2017) fits a Gaussian to each set of embedded samples and reports their Fréchet distance; KID (Bińkowski et al., 2018) reports the maximum mean discrepancy associated with a degree-3 polynomial kernel on the same embeddings. Both are commonly used to rank models.

Because FID depends only on the first two moments of the embedding distribution, optimizing a noise-initialized batch of 64×64 images to match the Inception feature mean and covariance of an ImageNet reference (Deng et al., 2009; Russakovsky et al., 2015) yields visual noise to which FID assigns a lower, nominally better value than to held-out real images: 24.7 versus the 58.6 finite-sample real–real baseline (Inception-2048, $n=512$; Fig. 1 and Sec. 6), demonstrating FID’s matched-moment blind spot. By contrast, the ZID score is much larger for the optimized image set than for held-out real images (Fig. 1).

The same failure appears directly in feature space. At full-dimensional Inception-2048 ($m=n=2500$, with full-rank sample covariances), FID is 19.5 for real versus held-out real features but 0.003 for real versus a moment-restored bimodal batch; the corresponding KID estimates are 9.5×10^{-5} and -3.2×10^{-4} ,

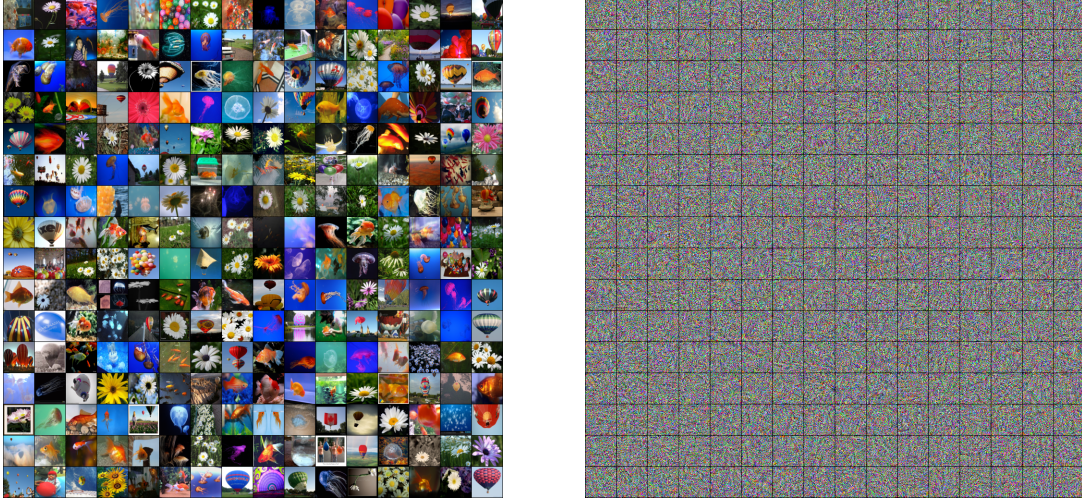


Figure 1: **Pixel-space matched-moment optimization reverses the FID ranking.** The montages show 256 images from each 512-image set; metrics use all 512. Left: held-out ImageNet images. Right: noise-initialized images optimized only to match the reference Inception mean and covariance. Despite being visual noise, the optimized set receives a lower (nominally better) FID (24.7 vs. 58.6). ZID gives it a larger departure score (17.2 vs. 0.86), and none of 499 random label permutations produces an equally large score; the held-out comparison has permutation $p=.328$. See Sec. 6.

respectively (App. A.1). Related Gaussian constructions reproduce the FID inversion after PCA reduction, on Tiny-ImageNet¹, and in DINO features (Caron et al., 2021) (App. A.1).

A second limitation appears when the departure has a direction. We sweep classifier-free guidance (CFG) (Ho and Salimans, 2022) in DiT-XL/2 (Peebles and Xie, 2023), a standard control of the fidelity–diversity tradeoff. Along this sweep, FID and KID are scalar discrepancies that are unchanged when the two samples are exchanged and therefore do not distinguish low-guidance off-manifold dispersion from high-guidance mode collapse. ZID additionally reports a separate signed dispersion readout, which identifies the transition from over- to under-dispersion (Fig. 7).

Finite-sample sensitivity provides an additional concern: at $d = 100$ and $n = 100$, KID power remains below .25 across pure-dispersion shrinkages from 5% to 25%, while FID reaches only .75 power for a 5% shrinkage even at $n = 1000$ (App. A.6).

ZID (*Z-resolved Integrated Diagnostic*) addresses these issues by combining complementary graph- and kernel-based statistics, calibrating their aggregated response by permutation, and retaining a signed dispersion contrast. The aggregated response provides an index of departure magnitude, and its permutation distribution yields an equality-test p -value. The signed contrast permits an under- or over-dispersion label when the direction is identifiable. Section 3 defines the statistics and their aggregation.

Contributions. We argue that generative-model evaluation should support model ranking and calibrated testing, remain sensitive to distinct forms of distributional departure, and provide directional diagnostics when the relevant effect is identifiable.

1. **Matched-moment analysis and calibrated detection.** FID’s manipulability is known (Alfarra et al., 2022; Kynkäänniemi et al., 2023), and prior work has exhibited distinct distributions with matching first two moments and hence zero FID (Benny et al., 2021; Luzi et al., 2023; Jayasumana et al., 2024).

¹Tiny-ImageNet is the 200-class dataset distributed by Stanford CS231n.

Proposition 1 states this non-identifiability for any reference distribution with nonzero covariance, and degree-3 KID is likewise zero for distributions matched through third order. We introduce ZID as a calibrated detector for these and other distributional departures. In a pixel-space stress test optimized to match the reference Inception mean and covariance, FID falls below the real–real baseline, while ZID assigns the resulting images a much larger score than held-out real images.

2. **Detection coverage and directional diagnosis.** ZID combines rank-based, median-bandwidth, and fine-scale kernel evidence to cover departures that favor different sensitivities. Across controlled evaluations spanning location, dispersion, dependence, higher-order structure, multimodality, and off-manifold support, it provides the broadest overall detection coverage. Alongside the calibrated equality-test p -value, ZID reports separate location-sensitive and dispersion-sensitive component magnitudes and, when direction is identifiable, labels the departure as under- or over-dispersed.
3. **Ranking by severity within departure types.** Across controlled sweeps of increasing severity, the ZID score provides consistent ordering across all examined departure types, including settings where FID is flat or reversed. On DiT-XL/2 and SiT-XL/2 (Ma et al., 2024), it also tracks departure across the practically relevant guidance range, while the signed dispersion readout identifies the associated collapse direction.

ZID is therefore intended as a broad-coverage diagnostic when the departure type is not known in advance and ranking, calibrated testing, and, when identifiable, dispersion-direction diagnosis are all required. Our experiments use both Inception and DINO embeddings and include five pretrained generator families: BigGAN (Brock et al., 2019), StyleGAN2-ADA (StyleGAN2: Karras et al., 2020b; ADA: Karras et al., 2020a), a CIFAR DDPM (Ho et al., 2020), DiT-XL/2, and SiT-XL/2.

The paper proceeds as follows. Section 2 reviews related metrics. Section 3 defines the ZID score, its outer-permutation equality test, and the signed readouts. Section 4 evaluates detection, ranking, construction choices, and robustness under controlled feature-space departures, with comparisons across datasets and feature representations. Section 5 studies pretrained generators, and Sec. 6 presents the pixel-space FID stress test. The appendices provide proofs, experimental protocols, expanded results, and per-class values.

2 Background and related metrics

FID compares fitted feature-space Gaussians through their means and covariances (Heusel et al., 2017), whereas KID is the MMD associated with a degree-3 polynomial kernel (Bińkowski et al., 2018). Gaussian-kernel MMD and CMMD are kernel two-sample discrepancies that differ in their kernels or feature representations (Gretton et al., 2012; Jayasumana et al., 2024). FID’s finite-sample bias motivated the extrapolation-based FID_∞ correction (Chong and Forsyth, 2020). Robustness and representation concerns motivated R-FID (Alfarra et al., 2022) and related analyses (Kynkäänniemi et al., 2023), while compound FID aggregates Fréchet distances across multiple feature levels (Nunn et al., 2021). These alternatives address estimation or representation concerns but retain unsigned Gaussian moment summaries. MIND instead uses sliced Wasserstein distances to improve sample efficiency and robustness to moment matching (Berthet et al., 2026), while ECS uses characteristic-function transforms to probe moments and tails (Tam and Engelhardt, 2026). C2ST provides a learned comparison by testing whether a held-out classifier can distinguish the two samples (Lopez-Paz and Oquab, 2017).

Some metrics instead focus on particular aspects of diversity, coverage, or dispersion. Vendi Score summarizes sample diversity (Friedman and Dieng, 2023); Precision/Recall separates fidelity from coverage (Sajjadi et al., 2018; Kynkäänniemi et al., 2019); and Density/Coverage refines their neighborhood-based estimates (Naeem et al., 2020). PERMDISP tests homogeneity of multivariate dispersion through distances to group centroids (Anderson, 2006).

3 The ZID diagnostic: score, test, and signed readout

3.1 Candidate families and a common two-coordinate structure

We begin with three candidate tests for the ZID construction: the generalized permutation-based kernel test (GPK) (Song and Chen, 2024), the rank-in-similarity-graph edge-count test (RISE) (Zhou and Chen, 2023), and the generalized edge-count test (GET) (Chen and Friedman, 2017). Although they use different pairwise representations, all three produce the same form of two-coordinate summary of within-sample similarity. Let $X = \{x_i\}_{i=1}^m$ denote the reference sample, $Y = \{y_i\}_{i=1}^n$ the generated sample, and $N = m + n$ the pooled sample size. For any of these tests, let w_{ij} denote its pairwise weight on the pooled observations, and define

$$U_x = \sum_{i < j} w_{ij} \mathbf{1}\{i, j \in X\}, \quad U_y = \sum_{i < j} w_{ij} \mathbf{1}\{i, j \in Y\}.$$

GPK uses dense Gaussian-kernel weights, GET a sparse binary similarity graph, and RISE a rank-weighted similarity graph. Thus each test yields $U = (U_x, U_y)^\top$ while encoding similarity differently. Let μ and Σ be the mean and covariance of U under the label-permutation null; throughout, the subscript 0 denotes expectation, variance, or covariance under this null. Each test measures the joint displacement of the two within-sample quantities with the Mahalanobis statistic

$$T = (U - \mu)^\top \Sigma^{-1} (U - \mu).$$

This two-dimensional statistic admits an established decomposition. Define

$$W = \frac{U_x}{m-1} + \frac{U_y}{n-1}, \quad D = U_x - U_y.$$

For GET, W is proportional to the weighted edge-count statistic; for RISE, it is the corresponding weighted combination of the two within-sample rank totals. For GPK, the centered coordinate $W - \mathbb{E}_0 W$ is proportional to the unbiased empirical squared MMD (Sec. 3.2). Define the standardized forms

$$Z_W = \frac{W - \mathbb{E}_0 W}{\sqrt{\text{Var}_0(W)}}, \quad Z_D = \frac{D - \mathbb{E}_0 D}{\sqrt{\text{Var}_0(D)}}.$$

The two standardized coordinates are uncorrelated under the permutation null and satisfy

$$T = Z_W^2 + Z_D^2, \quad \text{Cov}_0(Z_W, Z_D) = 0.$$

Because both weights in W are positive, Z_W records aligned displacement of the two within-sample quantities, whereas Z_D records their opposing displacement. Interchanging X and Y leaves T unchanged and reverses the sign of Z_D . Pure location shifts tend to displace U_x and U_y in the same direction relative to their permutation-null expectations and therefore respond primarily through Z_W . Scale-dominated alternatives can instead produce signal primarily in the signed Z_D coordinate, particularly as dimension grows. At low dimension, however, scale alternatives can also produce appreciable aligned displacement in U_x and U_y , yielding signal in Z_W . Departures combining location and scale changes may produce signal in one or both coordinates.

3.2 Connections and contrasts with MMD, FID, and KID

Set $w_{ij} = k(z_i, z_j)$ and define $U_{xy} = \sum_{i \in X, j \in Y} w_{ij}$. Let $\bar{k} = \{N(N-1)\}^{-1} \sum_{i \neq j} k(z_i, z_j)$ be the fixed pooled average kernel weight. Because $\mathbb{E}_0(W) = N\bar{k}/2$, the usual unbiased empirical squared MMD satisfies

$$\widehat{\text{MMD}}_u^2 = \frac{2U_x}{m(m-1)} + \frac{2U_y}{n(n-1)} - \frac{2U_{xy}}{mn} = \frac{2(N-1)}{mn} (W - \mathbb{E}_0 W).$$

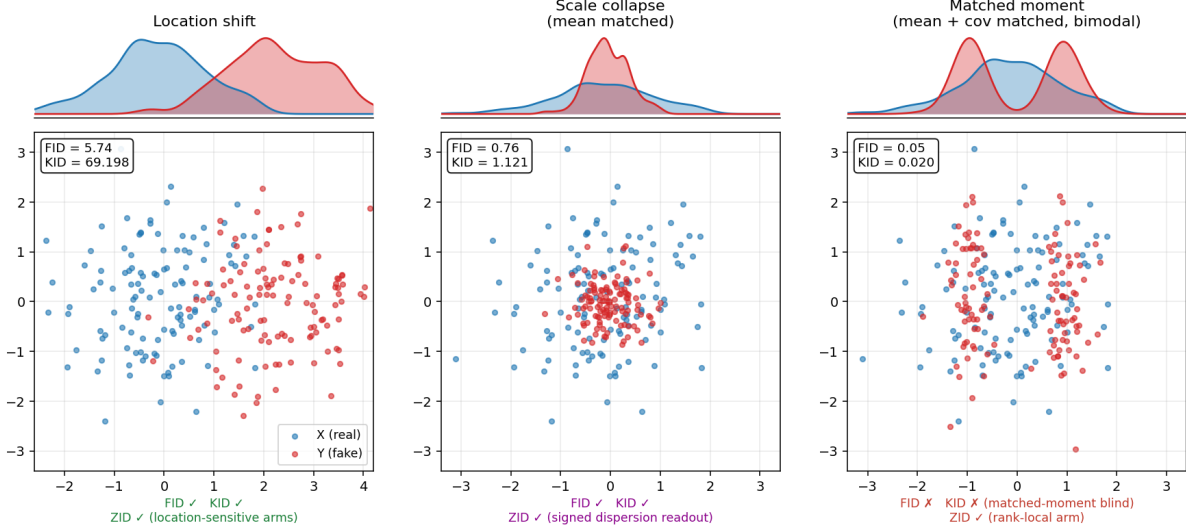


Figure 2: **Controlled differences and diagnostic readouts.** Two-dimensional schematics (real in blue, generated in red); FID and KID are computed from the displayed samples. All three procedures respond to a location shift. Under mean-matched scale collapse, the three scalar scores do not encode direction; ZID’s separate signed dispersion readout identifies the change as under-dispersion. For the symmetric matched-moment construction, moments through total degree three also agree, so population FID and degree-3 KID are both zero. ZID is not constrained to zero by either moment identity. High-dimensional finite-sample power for dispersion changes is quantified in App. A.6.

Thus, $\widehat{\text{MMD}}_u^2$ and $W - \mathbb{E}_0 W$ differ only by the positive factor $2(N-1)/(mn)$. MMD is symmetric under swapping X and Y and supplies no signed-difference coordinate corresponding to Z_D . KID uses the same MMD statistic with a degree-three polynomial kernel. Z_D instead contrasts U_x with U_y ; its sign supplies the orientation used by the under- versus over-dispersion readout (Figs. 2 and 4). The opposite-direction scale pattern is the mechanism exploited by generalized graph and kernel tests (Chen and Friedman, 2017; Song and Chen, 2024). Under the scale alternatives, increasing dimension can concentrate pairwise similarities and place the two within-sample similarities on opposite sides of their pooled permutation reference. When these centered shifts have opposite signs, their contributions largely cancel in $W - \mathbb{E}_0 W$ but add in $D - \mathbb{E}_0 D$. The same pattern can occur when location and scale both change: opposing centered shifts can contribute to Z_D , while aligned shifts simultaneously produce signal in Z_W . App. A.6 shows empirically how the scale response becomes increasingly concentrated in Z_D as dimension grows.

FID’s dependence on only the feature mean and covariance creates a matched-moment blind spot: its population value is exactly zero whenever those moments match, even if the two feature distributions differ. The following elementary proposition records this known non-identifiability in a general form.

Proposition 1 (Blindness of two-moment discrepancies). *Let $M(P, Q)$ be a discrepancy determined only by the means and covariances of P and Q , with $M(P, Q) = 0$ whenever these moments agree. For every distribution P on $\mathbb{R}^d$ with finite second moments and nonzero covariance, there exists $Q \neq P$ with the same mean and covariance. Hence $M(P, Q) = 0$; in particular, $\text{FID}(P, Q) = 0$.*

(Proof in Appendix A.2: choose either the Gaussian with the same moments or, when P is already that Gaussian, an explicit non-Gaussian distribution with the same moments.)

KID uses a degree-3 polynomial kernel, so Prop. 1 does not cover it directly. If two distributions match all mixed moments of total degree at most three, their population polynomial-kernel MMD, and hence population

KID, is zero.

To examine finite-sample behavior under first-two-moment matching in real feature space, we use a bimodal alternative whose mean and covariance match those of real CIFAR–Inception features. As $m = n$ increases from 2k to 25k, empirical FID remains at its real–real baseline: the alternative/real–real FID values are 24.5/24.3 at $n = 2\text{k}$ and 2.00/1.99 at $n = 25\text{k}$. At $n = 2\text{k}$, the ZID score defined below has median 84.3 for the alternative and .32 for the corresponding real–real comparison; its permutation test rejects in all 20 repetitions at the minimum attainable $p = .01$ with 99 permutations (App. A.1).

3.3 Score construction and design choices

ZID retains three complementary similarity representations: rank-based RISE, GPK-med, and GPK-small. RISE and GET both use similarity graphs. ZID retains RISE because its rank weights preserve graded similarity information, whereas GET uses binary edge weights; Zhou and Chen (2023) report higher power for this weighted construction in most of their studied settings. GET is not retained in the six-arm construction and is evaluated separately in Sec. 4. GPK-med uses a Gaussian-kernel bandwidth equal to the pooled median pairwise distance, denoted σ_{med} . GPK-small uses $0.175\sigma_{\text{med}}$ in the reported six-arm ZID construction. Sensitivity to nearby bandwidths is reported in App. C. For each representation, ZID retains both $Z_W^{(j)}$ and $Z_D^{(j)}$, giving six arms.

The ZID score: an omnibus departure index. Each of the six arms $\{Z_W^{(j)}, Z_D^{(j)}\}_{j=1}^3$ is centered and scaled to have a unit-variance permutation null; this standardization is not, by itself, a normality claim. For arm k , define the two-sided normal-reference tail $r_k = 2\bar{\Phi}(|Z_k|)$, sort these as $r_{(1)} \leq \dots \leq r_{(6)}$, and set

$$q_{\text{rank}} = \min \left\{ 1, \min_{i=1, \dots, 6} \frac{6r_{(i)}}{i} \right\}, \quad S_{\text{ZID}} = -\log q_{\text{rank}}.$$

The flat-Simes form (Simes, 1986) makes the score coordinatewise monotone in the observed arm magnitudes and unbounded. Larger values indicate a more extreme standardized departure from the reference under the fixed evaluation protocol. Because the arms are dependent and the normal-reference tails are reference mappings rather than finite-sample arm p -values, r_k and q_{rank} serve as reference-scale ranking quantities; the outer permutation in Sec. 3.4 supplies test calibration. Score comparisons use a common sample size, embedding, reference, and preprocessing because an alternative’s standardized departure can vary with n .

Because different departures can concentrate signal in different arms, we use flat-Simes to preserve a strong signal in any one arm without allowing another arm to cancel it. The map $-\log\{2\bar{\Phi}(|Z|)\}$ puts unit-variance arms on a common, unbounded reference scale, assigns zero severity at $Z = 0$, and satisfies $-\log\{2\bar{\Phi}(|Z|)\} = Z^2/2 + \log|Z| + O(1)$ as $|Z| \rightarrow \infty$. Flat-Simes is symmetric in the arms, coordinatewise monotone, and sparse-adaptive: one large arm can drive the score, while several moderate arms reduce its multiplicity penalty. In particular, writing $s_k = -\log\{2\bar{\Phi}(|Z_k|)\}$ and $s_{\max} = \max_k s_k$,

$$s_{\max} - \log 6 \leq S_{\text{ZID}} \leq s_{\max}, \tag{1}$$

and if all six severities are equal to s , then $S_{\text{ZID}} = s$. Thus no arm can be hidden by cancellation. Appendix C compares flat Simes with max and sum-of-squares aggregation, Fisher’s combination rule (Fisher, 1932), and the Cauchy combination rule (Liu and Xie, 2020). Flat Simes is among the leading rules for both detection and ranking across increasing severity.

3.4 Permutation test and diagnostic readouts

For a pooled sample, we recompute all six arms and S_{ZID} after each of B label permutations. The reported Monte Carlo permutation tail is denoted $\hat{p}_{\text{ZID}}$:

$$\hat{p}_{\text{ZID}} = \frac{1 + \sum_{b=1}^B \mathbf{1}\{S_{\text{ZID}}^{(b)} \geq S_{\text{ZID}}^{\text{obs}}\}}{B + 1}.$$

At nominal level α , the test rejects when $\hat{p}_{\text{ZID}} \leq \alpha$. The plus-one Monte Carlo permutation p -value (Phipson and Smyth, 2010) includes the observed labeling alongside the B random relabelings, giving $B + 1$ exchangeable configurations. Recomputing the entire construction under each relabeling preserves its internal dependence and yields a finite-sample-valid Monte Carlo permutation p -value without independence or Gaussian assumptions on the arms. The test asks whether the embedded distributions are distinguishable at the available n . “ZID test” and “ZID score” always denote the six-arm implementation; member-specific analyses are labeled RISE or GPK.

Component readouts. Applying flat-Simes separately to $\{Z_W^{(j)}\}_{j=1}^3$ and $\{Z_D^{(j)}\}_{j=1}^3$ gives nonnegative aggregated W - and D -component magnitudes, denoted S_W and S_D , respectively. S_W summarizes the three W -coordinate responses; S_D summarizes the three D -coordinate responses and supplies the magnitude used by the dispersion diagnosis below. Let $\hat{p}_W$ and $\hat{p}_D$ denote the permutation tails of S_W and S_D , respectively. These component tails describe where the six-arm signal appears; only $\hat{p}_{\text{ZID}}$, the permutation tail of the complete six-arm score, determines whether the test rejects distributional equality, and neither magnitude is an additive part of that score. The dispersion diagnosis applies the coherence rule below to S_D and the signed member-level D coordinates. In reported numerical results, S_W and S_D denote the aggregated component magnitudes, whereas $Z_W^{(j)}$ and $Z_D^{(j)}$ retain their signed member-level meanings; RISE, GPK-med, and GPK-small superscripts identify the member arms. For continuous visualization, the ungated net signed dispersion score is $\text{sign}(\sum_j Z_D^{(j)})S_D$. The formal diagnosis below combines the D -component permutation tail with the reference-active member signs. The resulting diagnostic readout is denoted

$$D_{\text{ZID}} = \begin{cases} -S_D, & \text{under-dispersion,} \\ +S_D, & \text{over-dispersion,} \end{cases}$$

and is undefined when the diagnosis is *member-sign conflict*, *ambiguous*, or *not assigned*. Thus $Z_D^{(j)}$ always denotes a standardized member coordinate, whereas D_{ZID} denotes the coherence-qualified aggregate diagnostic.

Dispersion diagnosis. Using the D -component tail $\hat{p}_D$ of the flat-Simes magnitude formed from the three D arms $\{Z_D^{(j)}\}_{j=1}^3$, define the descriptive reference-active set $\mathcal{A} = \{j : 2\bar{\Phi}(|Z_D^{(j)}|) \leq \alpha\}$. Then

$$\text{diagnosis} = \begin{cases} \text{under-dispersion,} & \hat{p}_D \leq \alpha, \mathcal{A} \neq \emptyset, Z_D^{(j)} < 0 \forall j \in \mathcal{A}, \\ \text{over-dispersion,} & \hat{p}_D \leq \alpha, \mathcal{A} \neq \emptyset, Z_D^{(j)} > 0 \forall j \in \mathcal{A}, \\ \text{member-sign conflict,} & \hat{p}_D \leq \alpha \text{ and signs within } \mathcal{A} \text{ conflict,} \\ \text{ambiguous,} & \hat{p}_D \leq \alpha \text{ and } \mathcal{A} = \emptyset, \\ \text{not assigned,} & \hat{p}_D > \alpha. \end{cases}$$

The six-arm $\hat{p}_{\text{ZID}}$ alone determines rejection of distributional equality; $\hat{p}_D$ is a prespecified diagnostic gate rather than an additional separately error-controlled test. An under- or over-dispersion label, and hence D_{ZID} ,

is reported only when $\hat{p}_D \leq \alpha$ and the reference-active member signs are coherent. The same α threshold defining $\mathcal{A}$ filters signs by their normal-reference magnitude; it is not a separate significance test. The labels *under-dispersion* and *over-dispersion* describe the sign of the within-sample-similarity imbalance. In the controlled scale, truncation, and guidance families studied here, this sign tracks diversity contraction or expansion. Controlled scale changes, DiT, and SiT support this interpretation. When reference-active signs conflict, the diagnosis is *member-sign conflict*, and the member signs are reported rather than collapsed into a single direction. The label *ambiguous* is reserved for a passed diagnostic gate with no reference-active member from which to read a direction.

4 Feature-space evaluation under controlled departures

Using controlled transformations of real image features, we compare ZID with its comparators across eight distributional departures and examine the directional diagnosis supplied by ZID. We then evaluate ranking across sweeps of increasing severity, analyze the ZID construction, vary severity, dimension, and sample size, and compare responses across datasets and feature representations.

4.1 Detection and directional diagnosis

Each repetition draws two disjoint samples from a fixed pool of Inception features extracted from real CIFAR-10 images (Krizhevsky, 2009) and reduced to $d = 128$; a controlled transformation is applied to the second sample. The common setting uses $m = n = 200$, 300 independent repetitions, and $\alpha = .05$. Permutation-calibrated methods use 499 label relabelings, and rejection follows the $p \leq \alpha$ convention defined in Sec. 3.4. We examine eight departure families spanning location, dispersion, linear and nonlinear dependence, skewness, kurtosis, matched-moment multimodality, and off-manifold support. Each transformation emphasizes one distributional characteristic, whereas a real generator may combine several. Preliminary multi-method pilot runs selected the displayed strength for each family so that the maximum estimated power over the panel was high but below ceiling; the chosen signal was then held fixed across all methods in the reported comparison. The resulting signal strengths are specific to their departure families and are not numerically comparable across columns. Appendix A.3 summarizes the controlled transformations; Sec. 4.4 varies severity, dimension, and sample size.

Fig. 3 compares ZID with standalone RISE, GPK-med, GPK-small, and GET tests and twelve external comparators. The general-purpose group comprises FID, KID, Gaussian-kernel MMD, MIND, ECS, and C2ST; the specialist diagnostics are Precision, Recall, Density, Coverage, Vendi Score, and PERMDISP (Kynkäänniemi et al., 2019; Naeem et al., 2020; Friedman and Dieng, 2023). Collectively, this panel draws on moments, kernels, projections, classifiers, nearest-neighbor geometry, support estimates, diversity summaries, and dispersion tests. ECS uses frequency parameter T , selected in the independent balancing study documented in App. A.3. These four standalone tests use their established calibrations: RISE and GET compare $Z_W^2 + Z_D^2$ with their asymptotic χ_2^2 references, whereas GPK-med and GPK-small calibrate their quadratic statistics by label permutation. The remaining external scalar and geometric comparators use sample-label permutation calibrations of their displayed statistics. For the full six-arm ZID, the complete score is recomputed under every relabeling and calibrated by its own outer permutation tail. C2ST uses a stratified training–test split and a fixed one-hidden-layer MLP; its held-out accuracy is calibrated by balanced test-label relabelings. Appendix A.3 summarizes the controlled-departure and comparator protocols.

Relative to the twelve external comparators, ZID has the highest power on nonlinear dependence (.97), skewness (.79), kurtosis (.83), and matched-moment multimodality (.71). KID leads location (.89), PERMDISP dispersion (.87), FID linear dependence (.87), and Density off-manifold support (.93). ZID is the only row in this comparison with power of at least .70 in every column; among the external comparators,

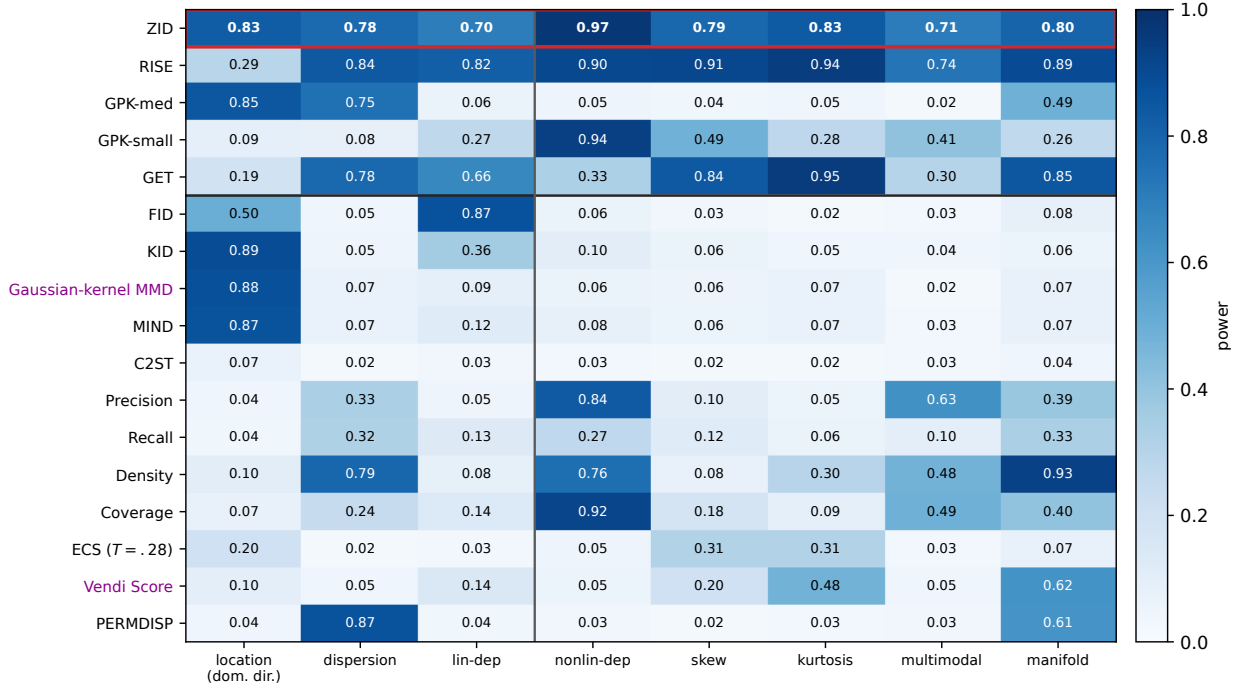


Figure 3: **Detection power across eight controlled distributional departures.** Cells report empirical power at the 0.05 significance level using real CIFAR-Inception features reduced to $d = 128$, with $n = 200$ observations per sample and 300 independent repetitions. Permutation-calibrated tests use 499 relabelings. The boxed row is the complete six-arm ZID test. The next four rows report standalone RISE, GPk-med, GPk-small, and GET tests; the remaining twelve are external comparators. The eight probes span location, dispersion, dependence, higher-order structure, multimodality, and off-manifold support.

the largest row minimum is Density’s .08.

Among these standalone tests, RISE is sensitive to dependence, higher-order structure, multimodality, and off-manifold support but is weak on location (.29); GPk-med supplies location and dispersion (.85/.75); and GPk-small is strongest on nonlinear dependence (.94) but weak on location and dispersion. GET is broadly sensitive but weak on location, nonlinear dependence, and multimodality. The six-arm aggregation combines these departure-specific strengths into the breadth summarized above. Section 4.3 tests this complementarity by removing both arms of RISE, GPk-med, or GPk-small in turn and by analyzing severity ordering.

Null calibration on real features. To verify calibration at the representation and sample size used in Fig. 3, we compare two disjoint samples from the same real CIFAR-Inception PCA-128 pool ($m = n = 200$) over 500 repetitions with 999 outer permutations, giving finer Monte Carlo p -value resolution at this setting. The resulting rejection rates are .048 at $\alpha = .05$ (Wilson 95% CI [.032, .070]) and .010 at $\alpha = .01$.

Directional diagnosis. Detection power does not assess whether a metric identifies the direction of a scale change. We therefore apply symmetric contraction and expansion to full-dimensional Inception features and compare the resulting magnitudes and signed readout (Fig. 4). In this full-rank dispersion sweep, the ungated net signed dispersion score changes sign across the reference scale. The formal readout D_{ZID} is negative for the displayed contractions and positive for the displayed expansions; at $c=1$, it is undefined because no direction is assigned. FID remains unsigned and can assign similar magnitudes to deviations on opposite

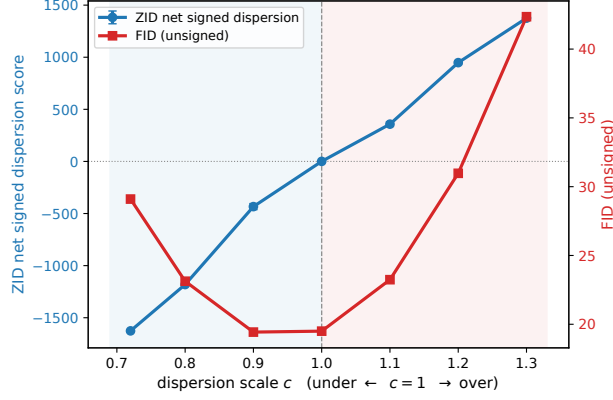


Figure 4: **Signed vs. unsigned dispersion** (real raw Inception-2048, disjoint $m=n=2500>d$, full-rank covariance; $Y=\mu+c(\text{base}-\mu)$). The blue curve shows the ungated net signed dispersion score, $\text{sign}(\sum_j Z_D^{(j)})S_D$. The formal readout D_{ZID} equals this score when the diagnosis resolves to under- or over-dispersion; at $c=1$, the diagnosis is not assigned and D_{ZID} is undefined (Sec. 3.4). FID is unsigned and is nearly equal at $c=0.8$ and 1.1. FID’s displayed minimum, 19.43 at $c=0.9$ versus 19.50 at $c=1$, slightly favors mild collapse in this finite sample. Points are means over eight independent repetitions.

sides of the reference.

4.2 Ranking across increasing severity

Detection and ranking address different questions. Figure 3 compares rejection power at one level of each departure. The ranking experiments use CIFAR–Inception PCA-128 features with $m=n=200$. For each controlled departure family, the full sweep evaluates six ordered levels, beginning with equality and increasing in severity, with 100 independently generated reference–comparison pairs per level; Spearman ρ is computed between the score and the level index across the resulting 600 comparisons (Fig. 5). A separate endpoint experiment generates 100 independent mild-versus-final comparison pairs per family and reports the fraction for which the final-level score is at least as large as the mild-level score (Table 1). The transformations and complete sweeps are specified in App. A.3.

Figure 5 shows that FID and KID track increasing severity on location, linear dependence, and off-manifold support. FID instead reverses the dispersion-collapse ordering ($\rho = -.41$) and is essentially flat ($|\rho| \leq .05$) on the four moment-restored departures: nonlinear dependence, skewness, kurtosis, and matched-moment multimodality. KID remains weak on dispersion collapse and the four moment-restored sweeps ($\rho \leq .20$). The ZID score maintains positive rank association on every sweep, ranging from .56 on matched-moment multimodality to .95 on off-manifold support.

Table 1 shows that all three methods are near-perfect on location, linear dependence, and off-manifold support. On dispersion collapse and the four moment-restored departures, ZID orders 83–100% of pairs correctly, whereas FID is at or below chance (27–55%) and KID reaches only 48–64%.

To broaden the comparison beyond FID and KID, we apply both ranking protocols to these four standalone tests and three additional external comparators: multiscale MMD, MIND, and ECS (App. C). Among the five external comparators, ZID has the highest mean and minimum Spearman correlations across the eight departures, as well as the highest mean and minimum pairwise ordering accuracies. Among these standalone tests, RISE is essentially tied with ZID in mean pairwise ordering accuracy (.969 versus .968) and has higher minimum accuracy (.90 versus .83), whereas ZID has higher mean and minimum Spearman correlations.

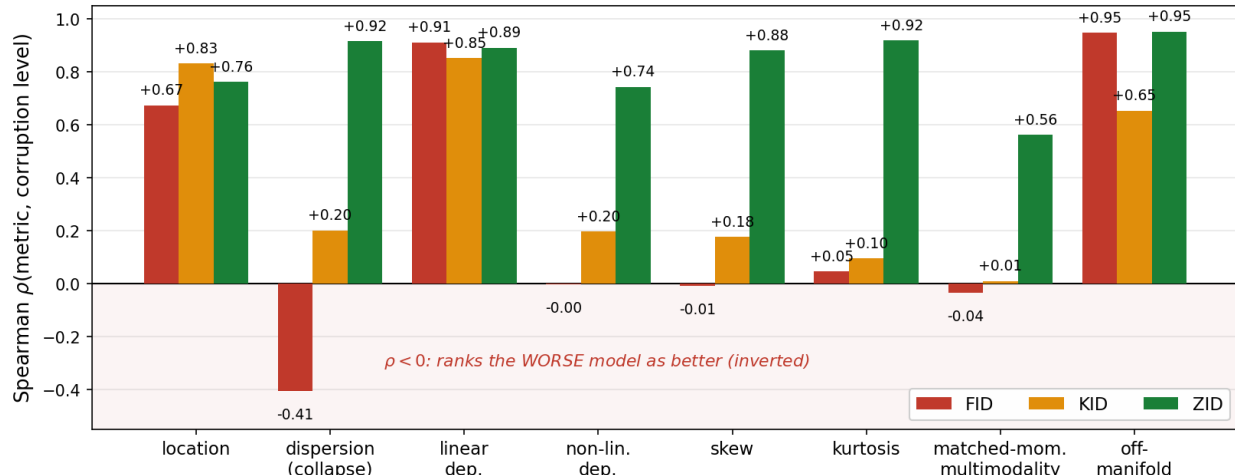


Figure 5: **Ranking across sweeps of increasing severity.** Spearman ρ between each score and the six ordered levels of each controlled departure family. Positive values indicate that the score tends to increase as the departure becomes more severe; negative values indicate that it tends to assign smaller scores to more severe samples. Within each departure, all methods use the same embedding, sample size, and preprocessing.

Table 1: **Pairwise ordering of graded departures.** Accuracy is the percentage of 100 independent mild-versus-final comparisons ordered correctly; chance accuracy is 50%. The real CIFAR-Inception protocol is $d=128, n=200$; dispersion is diversity collapse. Bold denotes the row best.

	FID	KID	ZID
location	98	100	99
dispersion (collapse)	27	64	100
linear dependence	100	100	100
nonlinear dependence	45	61	92
skewness	50	61	100
kurtosis	52	48	100
matched-mom. multimodality	55	59	83
off-manifold support	100	100	100

4.3 Construction ablations and sensitivity

To examine the roles of RISE, GPK-med, and GPK-small and the two coordinates within ZID, Table 2 compares the full six-arm construction with variants that omit RISE, GPK-med, or GPK-small and two coordinate-only variants. Table 3 isolates the contribution of GPK-small by comparing the full six-arm ZID with its variant without GPK-small across four severity levels. Table 4 studies a moment-restored resampling-with-perturbation construction. Starting from two disjoint real samples R and H , with R as the reference, the construction replaces a fraction f of the observations by perturbed resamples from H and then restores the sample mean and covariance of H (App. A.3). The table examines how the full six-arm ZID, RISE, GPK-med, and GPK-small, together with FID and KID, order increasing values of f across perturbation scales. Finally, we check sensitivity to the Gaussian-reference tail probabilities by replacing them with permutation estimates (App. A.5).

Table 2 shows complementary roles within the full six-arm ZID. Omitting RISE produces the largest power loss on six of the eight departures; omitting GPK-med reduces location power from .830 to .237; and omitting GPK-small has its clearest effect on nonlinear dependence, reducing power from .980 to .860.

Table 2: **Paired construction ablation at the Fig. 3 signal levels.** Results use real CIFAR-Inception features at $d = 128, n = 200, \alpha = .05$, with 300 repetitions and 499 outer permutations. Rejection uses $p \leq .05$. Within each repetition, every specification uses the same samples, six computed arms, and label permutations. Among the rows omitting RISE, GPK-med, or GPK-small, bold marks the largest power loss from the full six-arm ZID for each departure.

specification	location	dispersion	lin.-dep.	nonlin.-dep.	skew	kurtosis	multimodal	off-manifold	mean
full six-arm ZID	.830	.750	.727	.980	.847	.847	.717	.833	.816
drop RISE	.843	.630	.167	.893	.347	.210	.317	.527	.492
drop GPK-med	.237	.760	.800	.983	.893	.907	.767	.870	.777
drop GPK-small	.840	.800	.740	.860	.840	.897	.697	.853	.816
Z_W arms only	.850	.073	.793	.983	.830	.747	.777	.100	.644
Z_D arms only	.063	.837	.127	.467	.407	.787	.130	.910	.466

Table 3: **Paired contribution of GPK-small across severity levels.** Entries are paired rejection-rate differences, $\Delta = \text{Power}(\text{full six-arm ZID}) - \text{Power}(\text{ZID without GPK-small})$. Positive values favor including GPK-small. The first seven departures use perturbation multipliers 0.50, 0.75, 1.00, 1.25; matched-moment multimodality replaces fractions .25, .50, .75, 1.00 of the initially real observations with their moment-matched bimodal counterparts. All cells use 300 paired repetitions, 499 outer permutations, and rejection at $p \leq .05$. **Bold** marks $|\Delta| \geq .05$.

departure	setting 1	setting 2	setting 3	setting 4
common multiplier	0.50	0.75	1.00	1.25
location	−.013	−.027	−.013	+ .003
dispersion	−.040	−.060	−.040	−.017
linear dependence	+ .010	−.023	−.017	.000
nonlinear dependence	+ .343	+ .193	+ .077	+ .013
skewness	.000	−.027	.000	+ .010
kurtosis	−.020	−.060	−.030	.000
off-manifold support	+ .017	−.020	−.027	.000
multimodality replacement fraction	.25	.50	.75	1.00
matched-moment multimodality	.000	+ .023	+ .033	+ .030

Table 4: **Moment-restored resampling with perturbation.** Spearman ρ between each score and the replacement fraction f (real CIFAR-Inception, $d=128, n=200$), evaluated across perturbation scales ε (fractions of the per-coordinate standard deviations). Five perturbation scales $\varepsilon \in \{.05, .10, .20, .30, .50\}$ and six replacement fractions $f \in \{0, .1, .2, .3, .4, .5\}$ are evaluated with 100 repetitions at each (ε, f) setting. Within each repetition, every method is evaluated on the same reference sample R and transformed sample B . Their standalone columns use $T = Z_W^2 + Z_D^2$. **Bold** marks the largest correlation in each row.

ε	ZID	FID	KID	RISE	GPK-med	GPK-small
0.05	+ .97	−.10	−.13	+ .74	−.10	+ .98
0.10	+ .96	−.04	+ .02	+ .71	+ .00	+ .97
0.20	+ .96	+ .04	−.01	+ .66	−.07	+ .97
0.30	+ .93	+ .02	+ .06	+ .55	+ .05	+ .95
0.50	+ .86	+ .06	+ .04	+ .23	−.07	+ .84

Among the coordinate-only variants, the Z_W -only variant is stronger on location, dependence, skewness, and multimodality, whereas the Z_D -only variant is stronger on dispersion, kurtosis, and off-manifold support.

With bandwidth $0.175\sigma_{\text{med}}$, GPK-small targets unusually close-pair structure, complementing the rank-based and median-bandwidth members. Table 3 shows that GPK-small contributes most clearly on nonlinear dependence: its incremental power contribution grows from $+.013$ at multiplier 1.25 to $+.343$ at $.50$, with the largest gain at the lower-signal end of the tested range. Its effects on the other seven departures are smaller and occasionally negative. Table 4 provides a second view of the fine-scale role: under a moment-restored resampling-with-perturbation construction, the full six-arm ZID score remains strongly associated with the replacement fraction across perturbation scales ($\rho = .86\text{--}.97$). GPK-small supplies the clearest member-level signal ($.84\text{--}.98$), while RISE weakens from $.74$ to $.23$ as the perturbation scale increases; FID, KID, and GPK-med remain near zero.

Gaussian-reference versus permutation arm tails. For flat-Simes aggregation, ZID assigns each standardized arm the two-sided Gaussian-reference tail probability $2\bar{\Phi}(|Z_k|)$. To check sensitivity to this choice, we compare these probabilities with estimates obtained from inner label permutations. Both resulting scores use the same outer calibration and therefore control Type-I error. They give broadly similar power profiles (App. A.5). Because permutation estimation requires an additional inner loop, we use the computationally simpler Gaussian-reference formula.

4.4 Sensitivity across severity and (d, n) regimes

We evaluate the full six-arm ZID over five ordered severity levels with $d = 128, n = 200, 300$ repetitions, and 499 outer permutations per cell. Seven departures use multiples $\{0, .5, .75, 1, 1.25\}$ of the Fig. 3 signal; matched-moment multimodality instead uses fractions $\{0, .25, .5, .75, 1\}$ of the initially real observations replaced by their moment-matched bimodal counterparts; $\lambda = 0$ is the unmodified real sample and $\lambda = 1$ is the full bimodal alternative, the highest-severity endpoint. Across each five-level ladder, the empirical rejection rate increases monotonically with the perturbation multiplier, or with the replacement fraction for matched-moment multimodality (App. D.1, Fig. 10).

To compare relative sensitivity across several dimension–sample-size regimes, we repeat the eight-departure comparison at $d \in \{128, 512, 2048\}$ and $n \in \{50, 200, 600\}$ (Fig. 11). Signals are selected separately within each (d, n) cell, so comparisons are within cells rather than power trends over d or n . Method definitions and calibration procedures follow Fig. 3. Rows requiring permutation calibration use 99 relabelings per repetition. We define a cell-wise leading group among ZID and the twelve external comparators using a threshold of 80% of the highest power within that set. Across the 72 cells, ZID enters this group 63 times, followed by Density (28), PERMDISP (17), and FID (11); each remaining external comparator enters it at most nine times. When assessed against the same threshold, the four standalone rows reach it in 58 cells for RISE, 50 for GET, 18 for GPK-med, and 13 for GPK-small.

4.5 Additional dataset and representation comparisons

The controlled evaluations above use CIFAR-10 Inception features. We next examine whether their response patterns persist under a different dataset or feature representation. Table 5 evaluates variance collapse, over-dispersion, a leading-PC location shift, and class mode-drop on CIFAR-10 and Tiny-ImageNet (200 classes) in Inception features². The two datasets show closely matched response profiles: ZID has high power on collapse and location in both datasets, Density leads over-dispersion, and FID leads mode-drop; ZID power remains $.62\text{--}.97$ across all eight comparisons.

Figure 6 traces power across perturbation levels for the same four departures on CIFAR-10 using Inception-2048 and DINO ViT-S/16 CLS embeddings (Caron et al., 2021). The DINO representation is

²The Inception representation is identified in App. A.3. Absolute FID/KID magnitudes are on an implementation-specific scale; the analysis uses their relative rankings, and Fig. 6 reports the corresponding DINO evaluation.

identified in App. A.3. Across the full curves, ZID responds to all four departures in both representations: power rises rapidly with variance collapse, over-dispersion, and class omission, and increases smoothly with the leading-PC shift. At selected levels, Density leads over-dispersion, KID leads location shift, and FID leads mode-drop.

Table 5: **Cross-dataset comparison across four perturbations.** Entries report empirical power at the 0.05 significance level on CIFAR-10 and Tiny-ImageNet (200 classes), with dataset-specific PCA-128 maps fitted to 5,000 Inception features, $m = n = 200$, 300 repetitions, and 499 relabelings. For mode-drop, CIFAR-10 retains 80% of its classes and Tiny-ImageNet retains 50%; the other three perturbations use the same displayed strengths in both datasets. Bold marks row maxima.

dataset	alternative	ZID	FID	KID	MIND	Density	Recall	Coverage	C2ST
CIFAR-10	collapse ($s = .05$)	.97	.08	.06	.18	.96	.68	.18	.03
	over-disp. ($\tau = .25$)	.68	.07	.07	.05	.86	.26	.39	.05
	location ($\delta = .40$)	.91	.67	.97	.93	.15	.05	.10	.11
	mode-drop (80% retained; 2 classes dropped)	.85	.93	.88	.83	.06	.10	.86	.15
Tiny-IN	collapse ($s = .05$)	.89	.08	.05	.18	.92	.62	.15	.05
	over-disp. ($\tau = .25$)	.62	.07	.05	.08	.80	.27	.37	.05
	location ($\delta = .40$)	.94	.54	.93	.88	.25	.09	.05	.06
	mode-drop (50% retained; 100 classes dropped)	.80	.94	.82	.65	.05	.28	.33	.30

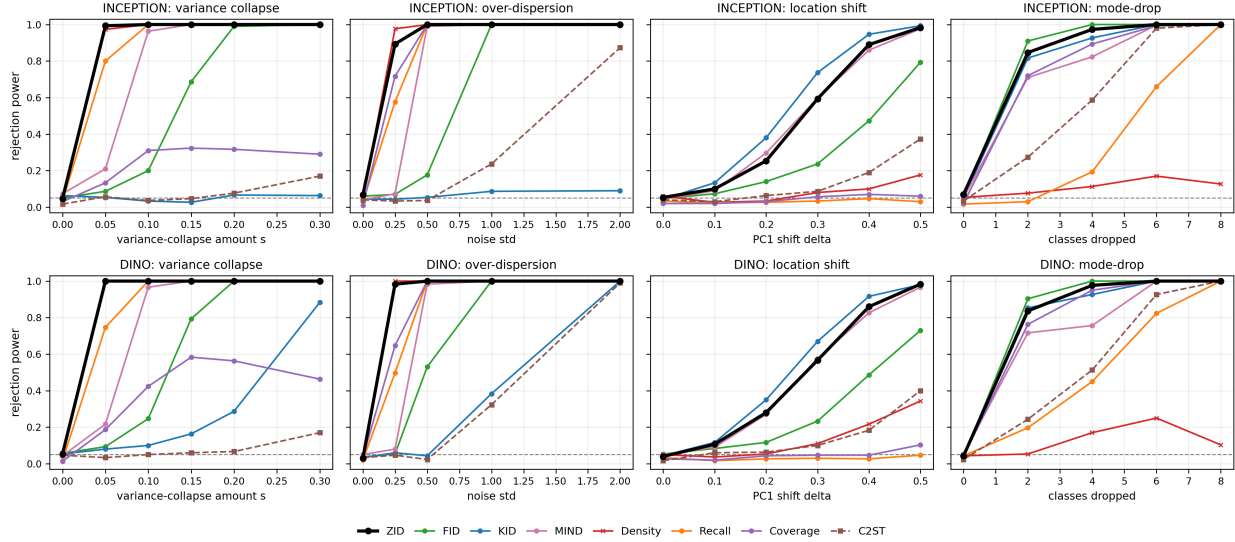


Figure 6: **Detection power across perturbation levels on CIFAR-10.** Rows use Inception-2048 and DINO ViT-S/16 CLS embeddings; columns show variance collapse (variance-collapse amount s , where deviations from the reference-feature mean are multiplied by $1 - s$), over-dispersion (adding independent Gaussian noise with coordinate-wise standard deviation τ times the reference standard deviation), location shift (translating by δ reference standard deviations along the leading PC), and mode-drop (omitting the displayed number of classes). Curves report power at the 0.05 significance level with $m = n = 200$ and 300 repetitions per level. Permutation-calibrated methods use 99 relabelings.

5 Evaluation of pretrained generative models

We examine five evaluations of pretrained generative models spanning GAN, diffusion, and interpolant-transformer architectures. They test truncation ordering, sensitivity to sampling steps, and the transition from low-guidance over-dispersion to high-guidance collapse; Table 6 summarizes each setting. Appendix B.1 gives the sampling, reference, and calibration protocol.

Table 6: **Evaluations of pretrained generative models.** Each row varies only the listed sampling or truncation parameter; the pretrained generator and evaluation setup are otherwise fixed.

generator	paradigm	domain	varied parameter	embedding	evaluation scale	role
BigGAN-deep-128	GAN	ImageNet	truncation	Inception-2048	10 classes, $n = 450$	truncation ordering and direction
CIFAR DDPM	diffusion	CIFAR-10	DDIM steps	Inception-2048 + DINOv2-384	$n = 200$	sampling-step comparison and direction
DiT-XL/2	diffusion transformer	ImageNet	CFG	Inception-2048	6 classes, $n = 500$	over- to under-dispersion
SiT-XL/2	interpolant transformer	ImageNet	CFG	Inception-2048	6 classes, $n = 500$	guidance transition in a second architecture
StyleGAN2-ADA	GAN	FFHQ faces	truncation	Inception-2048	$n = 5000$	full-rank evaluation on FFHQ

BigGAN-deep-128: ordering along truncation. On BigGAN-deep-128 (Brock et al., 2019) ($m=n=450$, 10 ImageNet classes), FID is lowest at $\psi = .8$ and rises under stronger truncation. KID and the ZID score both increase monotonically as truncation tightens, from .0075 to .0173 and from 328 to 1150, respectively. The ZID test rejects all four generator–real comparisons at $p = .002$. ZID reports under-dispersion throughout, with S_D increasing from 42.2 to 176.7 (App. B.2).

CIFAR DDPM: sampling-step comparison and direction. On a pretrained CIFAR-10 diffusion model (Ho et al., 2020), ZID rejects all three generator–real comparisons, and both the ZID score and KID move toward their real–real values as DDIM steps increase (Song et al., 2021). FID likewise decreases from 173.6 to 130.8 toward the real–real value 121.0. ZID reports under-dispersion at five steps and a member-sign conflict at 15 and 25 steps (Table 7).

Table 7: **DDPM sampling-step sweep.** A pretrained CIFAR-10 DDPM versus real CIFAR-10 in Inception $d=2048$, $m=n=200$). The ZID equality test and diagnostic gate each use 499 outer permutations. The real–real row compares disjoint halves and has no assigned dispersion direction.

DDIM steps	FID	KID	ZID score	ZID test p -value	dispersion diagnosis
5	173.6	.0789	6442	.002	under-dispersion
15	138.3	.0223	519	.002	member-sign conflict
25	130.8	.0148	255	.002	member-sign conflict
real–real	121.0	.0004	.109	.878	not assigned

DiT-XL/2: one guidance sweep, two failure directions. We vary classifier-free guidance (CFG) on **DiT-XL/2-256** (Peebles and Xie, 2023) for six ImageNet classes ($n=500$), producing a trajectory from diffuse, low-precision samples to high-guidance diversity collapse. At $\text{CFG} \in \{1, 2, 4, 8\}$ (Ho and Salimans, 2022), we compare each sample set with matched real images: Higher Precision and Recall indicate better fidelity and diversity, respectively, whereas smaller FID, KID, and ZID scores indicate less departure within this fixed sweep. Low guidance is over-dispersed/off-manifold, while increasing guidance improves fidelity but collapses diversity. In the class-aggregated curves in Fig. 7(a), FID, KID, and the ZID score attain their minima at $\text{CFG}=2$. These scalar summaries identify the same aggregate closest setting, but do not indicate whether larger departures reflect off-manifold over-dispersion or diversity collapse. Precision and Recall must be read together: at $\text{CFG}=8$, Precision can remain as high as 0.89 while Recall falls to 0.025; at $\text{CFG}=1$, mean Recall is 0.75 even though Precision is only 0.4–0.65. Recall alone can therefore make the low-guidance samples appear strong despite their off-manifold mass, just as Precision alone can make the collapsed high-guidance samples appear strong.

As CFG increases from 2 to 8, ZID’s W -component magnitude S_W rises through CFG 8 in all six classes. The final aggregate dispersion readout is over-dispersion at $\text{CFG}=1$ and under-dispersion at $\text{CFG} \in \{2, 4, 8\}$ for every class; the diagnostic readout D_{ZID} therefore changes from positive at low guidance to negative as guidance rises. Figure 7 is the counterpart of Fig. 4 for a pretrained generative model: departure magnitude increases on both sides of the closest sampled setting, while the signed readout distinguishes the two failure directions. Per-class results are in App. B.3.

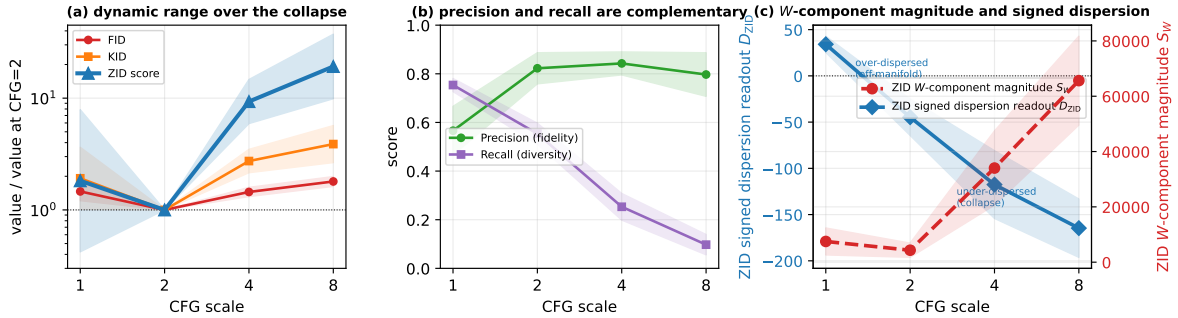


Figure 7: **A guidance sweep from over- to under-dispersion.** Across six DiT-XL/2 ImageNet classes and $\text{CFG} \in \{1, 2, 4, 8\}$: (a) thick lines are geometric means across the six class-specific ratios to their $\text{CFG}=2$ values, and shading spans one standard deviation on the log-ratio scale; (b) Precision can remain high while Recall collapses; and (c) ZID’s nonnegative W -component magnitude S_W tracks departure magnitude along this sweep, while its diagnostic readout D_{ZID} flips from over-dispersed (> 0 , off-manifold) at low guidance to under-dispersed (< 0 , collapse).

SiT-XL/2: guidance transition in a second architecture. The same transition appears on the interpolant-based transformer **SiT-XL/2** (Ma et al., 2024), over six ImageNet classes with $n = 500$ and $\text{CFG} \in \{1, 2, 4, 8, 16\}$. Across the six classes, the signed dispersion readout indicates over-dispersion at $\text{CFG} = 1$ and under-dispersion at $\text{CFG} \in \{4, 8, 16\}$; at $\text{CFG} = 2$, five classes are under-dispersed and one is not assigned. At $\text{CFG} = 16$, FID exceeds its $\text{CFG} = 1$ value on five classes but remains lower on class 910 (107.2 versus 125.8; App. B.3, Fig. 9).

StyleGAN2-ADA: full-rank evaluation on FFHQ. We examine the collapse diagnosis outside diffusion models and ImageNet by sweeping **StyleGAN2-ADA** (StyleGAN2: Karras et al., 2020b; ADA: Karras et al., 2020a) on **FFHQ** (Karras et al., 2019) over truncation $\psi \in \{1.0, 0.9, 0.7, 0.5\}$ ($n=5000 > d$, giving a

full-rank sample covariance and reduced finite-sample bias). Table 8 summarizes the sweep.

FID, KID, and Gaussian-kernel MMD all increase monotonically as truncation tightens, correctly ordering this sweep. ZID likewise separates every truncated setting from the untruncated generator reference and additionally identifies under-dispersion, with a signed readout whose magnitude increases as ψ falls. Precision and Density instead increase as Recall declines, reflecting their emphasis on different aspects of the precision–recall tradeoff. In this full-rank FFHQ setting, FID, KID, Gaussian-kernel MMD, and the ZID score therefore agree on the truncation ordering, while ZID additionally supplies calibrated detection and direction.

Table 8: **StyleGAN2-ADA truncation on FFHQ.** Columns compare independent draws at the indicated ψ with an untruncated generator reference; the $\psi = 1$ versus $\psi = 1$ baseline uses two independent untruncated draws. FID and ZID use 5000 samples; KID, Gaussian-kernel MMD, Precision, Density, and Recall use a fixed 2500-sample subset. Arrows give the conventional preferred direction. Within each metric row, bold marks the best value for that metric. The ZID test p -value and D_{ZID} are diagnostic quantities rather than ranking criteria and are not bolded. Larger ZID scores indicate stronger departures, while negative D_{ZID} indicates under-dispersion; the $\psi = 1$ versus $\psi = 1$ baseline has no assigned direction.

metric	$\psi = 1$ vs.			
	$\psi = 1$ baseline	$\psi = .9$	$\psi = .7$	$\psi = .5$
FID ↓	5.97	6.97	22.13	57.89
KID ↓	-4.4×10^{-5}	.00119	.01461	.04596
Gaussian-kernel MMD ↓	-4.0×10^{-5}	.00130	.01664	.05510
Precision ↑	.817	.876	.931	.963
Density ↑	.964	1.169	1.604	1.944
Recall ↑	.750	.698	.506	.221
ZID score ↓	.52	626.6	1.35×10^5	1.41×10^6
ZID test p -value	.502	.002	.002	.002
D_{ZID}	undefined	−22.7	−441.0	−1215.6

What ZID adds across generators. Across the five generator families, ZID jointly provides scalar ordering, calibrated detection, and directional diagnosis. On BigGAN and StyleGAN2-ADA, the ZID score increases as truncation tightens and its signed readout identifies under-dispersion; conventional distances respond as well but do not supply direction. On DiT and SiT, the ZID score measures departure on both sides of the closest sampled guidance setting, while its signed readout distinguishes low-guidance over-dispersion from high-guidance collapse. On DDPM, ZID reports under-dispersion at five steps and retains the member signs when the fixed-bank comparison gives conflicting directions at later steps.

6 Gaming FID in pixel space

Proposition 1 states the matched-moment blind spot in feature space; here we realize it by optimizing actual pixels. Starting from noise we optimize a set of $N=512$ images at 64×64 by gradient descent to match an ImageNet reference’s Inception mean and covariance. The pretrained feature extractor is held fixed and only the image pixels are updated.

This optimization directly targets the moments that determine FID. It lowers FID to 24.7, below the real–real baseline of 58.6, while the resulting images remain visually unrecognizable (Fig. 1). On the same saved feature banks, the real–holdout and real–gamed KID estimates are 8.6×10^{-6} and -5.2×10^{-5} , respectively (App. A.1). Against the same reference and using 499 outer permutations, the held-out-real comparison yields a ZID score of 0.86 ($p=.328$), whereas the gamed-set comparison yields 17.2, larger than all 499 relabeled scores. For the gamed pair, ZID reports component magnitudes $S_W=17.9$ and $S_D=9.8$; S_D

also exceeds all 499 relabeled values. The RISE dispersion arm is not reference-active ($Z_D^{\text{RISE}}=.58$, $p=.565$). The two active GPK arms have opposite signs ($Z_D^{\text{med}}=-3.5$, $Z_D^{\text{small}}=+4.3$), so D_{ZID} is undefined and the dispersion diagnosis is *member-sign conflict*.

Because the 512 images are jointly optimized against the same reference used for evaluation, the generated batch is reference-adaptive rather than an i.i.d. draw independent of that reference. For this fixed pair, none of the 499 random outer relabelings produces an equally or more extreme score; the plus-one Monte Carlo tail is therefore .002. Because the pair is reference-adaptive, this tail is descriptive, not a calibrated population two-sample p -value. Thus moment matching can drive FID below its real-data baseline for visually unrecognizable samples, while ZID assigns this FID-targeted construction a large departure score under the same reference.

A separate CIFAR-10 replication with the same $N=512$ optimization drives the gamed FID to 31.1, below the 76.0 real–real baseline, while the ZID score exceeds all 499 randomly relabeled scores (App. A.1).

7 Conclusion

FID’s compactness is also its limitation: reducing a feature distribution to its mean and covariance can make distinct distributions indistinguishable and cannot encode the direction of a diversity change. ZID separates three tasks that a single scalar is often asked to serve. Its six-arm score orders settings by severity within a fixed protocol, its outer-permutation p -value tests distributional equality, and its component readouts characterize location-sensitive joint departure and report a dispersion direction when supported.

Across controlled feature departures, real-feature replications, and evaluations of pretrained generative models, these outputs provide broad detection, track progression as severity increases, and distinguish low-guidance over-dispersion from high-guidance collapse. Retained member signs also reveal when dispersion direction differs across scales. The evidence therefore supports pairing calibrated evidence of distributional difference with diagnostic readouts rather than relying on an unsigned moment summary alone.

References

- Motasem Alfarra, Juan C. Pérez, Anna Frühstück, Philip H. S. Torr, Peter Wonka, and Bernard Ghanem. On the robustness of quality measures for GANs. In *European Conference on Computer Vision (ECCV)*, pages 18–33, 2022. doi: 10.1007/978-3-031-19790-1_2.
- Marti J. Anderson. Distance-based tests for homogeneity of multivariate dispersions. *Biometrics*, 62(1): 245–253, 2006. doi: 10.1111/j.1541-0420.2005.00440.x.
- Yaniv Benny, Tomer Galanti, Sagie Benaim, and Lior Wolf. Evaluation metrics for conditional image generation. *International Journal of Computer Vision*, 129:1712–1731, 2021. doi: 10.1007/s11263-020-01424-w.
- Quentin Berthet, Yu-Han Wu, Clement Crepy, Romuald Elie, Klaus Greff, and Michael Eli Sander. MIND: Monge Inception Distance for generative models evaluation. *arXiv preprint arXiv:2605.06797*, 2026.
- Mikołaj Bińkowski, Danica J Sutherland, Michael Arbel, and Arthur Gretton. Demystifying MMD GANs. In *International Conference on Learning Representations (ICLR)*, 2018.
- Andrew Brock, Jeff Donahue, and Karen Simonyan. Large scale GAN training for high fidelity natural image synthesis. In *International Conference on Learning Representations (ICLR)*, 2019.
- Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9650–9660, 2021.

- Hao Chen and Jerome H Friedman. A new graph-based two-sample test for multivariate and object data. *Journal of the American Statistical Association*, 112(517):397–409, 2017. doi: 10.1080/01621459.2016.1147356.
- Min Jin Chong and David Forsyth. Effectively unbiased FID and Inception Score and where to find them. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6070–6079, 2020.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. ImageNet: A large-scale hierarchical image database. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 248–255, 2009.
- Ronald A. Fisher. *Statistical Methods for Research Workers*. Oliver and Boyd, Edinburgh, 4th edition, 1932.
- Dan Friedman and Adji Bousso Dieng. The Vendi Score: A diversity evaluation metric for machine learning. *Transactions on Machine Learning Research*, 2023.
- Arthur Gretton, Karsten M Borgwardt, Malte J Rasch, Bernhard Schölkopf, and Alexander Smola. A kernel two-sample test. *Journal of Machine Learning Research*, 13:723–773, 2012.
- Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. GANs trained by a two time-scale update rule converge to a local Nash equilibrium. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 30, pages 6626–6637, 2017.
- Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022.
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 33, pages 6840–6851, 2020.
- Sadeep Jayasumana, Srikumar Ramalingam, Andreas Veit, Daniel Glasner, Ayan Chakrabarti, and Sanjiv Kumar. Rethinking FID: Towards a better evaluation metric for image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 9307–9315, 2024.
- Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 4401–4410, 2019.
- Tero Karras, Miika Aittala, Janne Hellsten, Samuli Laine, Jaakko Lehtinen, and Timo Aila. Training generative adversarial networks with limited data. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 33, pages 12104–12114, 2020a.
- Tero Karras, Samuli Laine, Miika Aittala, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. Analyzing and improving the image quality of StyleGAN. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 8110–8119, 2020b.
- Alex Krizhevsky. Learning multiple layers of features from tiny images. Technical report, University of Toronto, 2009.
- Tuomas Kynkäänniemi, Tero Karras, Samuli Laine, Jaakko Lehtinen, and Timo Aila. Improved precision and recall metric for assessing generative models. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 32, pages 3929–3938, 2019.
- Tuomas Kynkäänniemi, Tero Karras, Miika Aittala, Timo Aila, and Jaakko Lehtinen. The role of ImageNet classes in Fréchet Inception Distance. In *International Conference on Learning Representations (ICLR)*, 2023.

- Yaowu Liu and Jun Xie. Cauchy combination test: A powerful test with analytic p -value calculation under arbitrary dependency structures. *Journal of the American Statistical Association*, 115(529):393–402, 2020. doi: 10.1080/01621459.2018.1554485.
- David Lopez-Paz and Maxime Oquab. Revisiting classifier two-sample tests. In *International Conference on Learning Representations (ICLR)*, 2017.
- Lorenzo Luzi, Carlos Ortiz Marrero, Nile WYNAR, Richard G. Baraniuk, and Michael J. Henry. Evaluating generative networks using gaussian mixtures of image features. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 279–288, 2023.
- Nanye Ma, Mark Goldstein, Michael S. Albergo, Nicholas M. Boffi, Eric Vanden-Eijnden, and Saining Xie. SiT: Exploring flow and diffusion-based generative models with scalable interpolant transformers. In *European Conference on Computer Vision (ECCV)*, pages 23–40, 2024.
- Muhammad Ferjad Naeem, Seong Joon Oh, Youngjung Uh, Yunjey Choi, and Jaejun Yoo. Reliable fidelity and diversity metrics for generative models. In *Proceedings of the 37th International Conference on Machine Learning (ICML)*, volume 119 of *Proceedings of Machine Learning Research*, pages 7176–7185, 2020.
- Eric J. Nunn, Pejman Khadivi, and Shadrokh Samavi. Compound Fréchet Inception Distance for quality assessment of GAN created images. *arXiv preprint arXiv:2106.08575*, 2021.
- William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 4195–4205, 2023.
- Belinda Phipson and Gordon K. Smyth. Permutation p -values should never be zero: Calculating exact p -values when permutations are randomly drawn. *Statistical Applications in Genetics and Molecular Biology*, 9(1):Article 39, 2010. doi: 10.2202/1544-6115.1585.
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet large scale visual recognition challenge. *International Journal of Computer Vision*, 115(3):211–252, 2015. doi: 10.1007/s11263-015-0816-y.
- Mehdi S. M. Sajjadi, Olivier Bachem, Mario Lučić, Olivier Bousquet, and Sylvain Gelly. Assessing generative models via precision and recall. In *Advances in Neural Information Processing Systems (NeurIPS)*, volume 31, pages 5234–5243, 2018.
- R. John Simes. An improved Bonferroni procedure for multiple tests of significance. *Biometrika*, 73(3): 751–754, 1986. doi: 10.1093/biomet/73.3.751.
- Hoseung Song and Hao Chen. Generalized kernel two-sample tests. *Biometrika*, 111(3):755–770, 2024. doi: 10.1093/biomet/asad068.
- Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. In *International Conference on Learning Representations (ICLR)*, 2021.
- Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. Rethinking the Inception architecture for computer vision. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 2818–2826, 2016.

Edric Tam and Barbara E. Engelhardt. Assessing the distributional fidelity of Synthetic Chest X-rays using the Embedded Characteristic Score. *arXiv preprint arXiv:2501.00744v2*, 2026.

Doudou Zhou and Hao Chen. A new ranking scheme for modern data and its application to two-sample hypothesis testing. In *Proceedings of the 36th Conference on Learning Theory (COLT)*, volume 195 of *Proceedings of Machine Learning Research*, pages 3615–3668, 2023.

Use of AI assistance

A large language model was used as a coding and writing assistant under the author’s direction; all methods, code, and numerical results were verified by the author, who takes full responsibility for all claims.

A Foundations and controlled validation

A.1 Matched-moment feature controls

Table 9 tests whether the feature-space FID inversion in the Introduction is specific to one dataset or embedding. Each comparison uses $m = n = 2500$ samples after projection to the leading 128 pooled principal components. The Gaussian construction is drawn from the Gaussian fitted to the reference sample.

Table 9: **FID under fitted-Gaussian feature controls.** Lower values are nominally better. The real–real column compares the reference with a held-out real sample; the Gaussian column replaces the held-out sample by a draw from the fitted Gaussian. DINO denotes the DINO ViT-S/16 CLS embeddings ($d = 384$) defined in Sec. 4.5.

Dataset / embedding	real–real	fitted Gaussian
CIFAR-10 / Inception	2.517	1.157
Tiny-ImageNet / Inception	2.884	1.291
CIFAR-10 / DINO	76.472	33.864
Tiny-ImageNet / DINO	113.849	53.552

Table 10 restores the reference sample’s empirical mean and covariance exactly. By contrast, the large-sample comparison in Sec. 3.2 draws from a fixed population-matched alternative, so its empirical FID follows the real–real finite-sample baseline rather than being numerically zero. In that comparison, empirical FID is evaluated through $n = 25k$ observations in each sample. The six-arm ZID comparison uses $n = 2k$, 20 repetitions, and 99 outer permutations.

Table 10: **Full-dimensional matched-bimodal feature controls.** Each comparison uses raw Inception-2048 features with $m = n = 2500$. The matched-bimodal sample is recolored to the reference mean and covariance. KID is the unbiased degree-3 polynomial-kernel MMD estimate and may be slightly negative.

Dataset	Metric	real–real	matched bimodal
CIFAR-10	FID	19.5146	0.0030
	KID	9.5×10^{-5}	-3.20×10^{-4}
Tiny-ImageNet	FID	25.8680	0.0024
	KID	-5.7×10^{-5}	-3.39×10^{-4}

The pixel-space stress test in Sec. 6 uses a separate pair of 512×2048 feature banks. On these same banks, KID is 8.6×10^{-6} for real versus held-out real and -5.2×10^{-5} for real versus the optimized batch.

The CIFAR-10 replication follows the same reference-adaptive stress-test design: a noise-initialized image batch is optimized to match the feature mean and covariance of one real sample, while a disjoint real sample supplies the real–real baseline. Because the optimized batch is adapted to its evaluation reference, the resulting permutation tail is descriptive rather than a calibrated population two-sample p -value.

A.2 Proof of Proposition 1

Proof. Let $G = \mathcal{N}(\mu_P, \Sigma_P)$. If $P \neq G$, take $Q = G$. It has the same mean and covariance as P and is a different distribution. It remains to handle $P = G$. Write the nonzero part of the spectral decomposition as $\Sigma_P = U_r \Lambda_r U_r^\top$, where $r \geq 1$, and let $\varepsilon \in \{-1, +1\}^r$ have independent Rademacher coordinates. Define Q as the law of

$$\mu_P + U_r \Lambda_r^{1/2} \varepsilon.$$

This distribution has mean μ_P and covariance Σ_P , but it has finite support and therefore differs from the Gaussian law $P = G$ (including when that Gaussian is supported on a proper subspace). Thus in either case there is a $Q \neq P$ with matching first two moments, and $M(P, Q) = 0 = M(P, P)$. $\square$

A.3 Controlled-departure overview

Each controlled comparison starts from two disjoint real-feature samples and applies one transformation to the second sample. The eight transformations introduce, respectively, a leading-direction location shift, isotropic contraction or expansion, linear dependence, nonlinear dependence with unchanged marginals, skewness, kurtosis, moment-matched multimodality, or noise in low-variance coordinates. The dependence and higher-order transformations are followed by affine moment restoration where required, so their intended differences are not reducible to a change in feature mean or covariance. Figure 3 uses one panel-selected signal per departure, held fixed across all methods; the ranking and severity studies use ordered versions of the same transformations.

Feature representations. Inception evaluations use the 2048-dimensional penultimate Inception-v3 representation (Szegedy et al., 2016); DINO evaluations use ViT-S/16 CLS embeddings (Caron et al., 2021). The DDPM representation analysis uses DINOv2 rather than DINO. All use the corresponding standard released weights and preprocessing. The pixel-space stress test and controlled feature-space studies use separate standard Inception implementations, so absolute FID and KID values are interpreted only within their stated protocols.

Moment-restored resampling with perturbation. Table 4 begins with an independent real sample, replaces a specified fraction of its observations by perturbed resamples from that sample, and then restores its empirical mean and covariance. The replacement fraction controls the amount of resampling, while ε controls the perturbation scale relative to the coordinatewise standard deviations.

Comparator settings. MIND uses a fixed common set of random projections. Precision, Recall, Density, and Coverage use a common nearest-neighbor specification. Vendi Score is computed from a cosine-similarity Gram matrix, PERMDISP compares the samples’ mean distances to their respective centroids, and Gaussian-kernel MMD uses the unbiased U -statistic with a pooled median-distance bandwidth. Permutation-calibrated rows reuse the same pooled samples and statistic-specific representation across relabelings.

C2ST protocols. The controlled comparisons use a stratified half split, a fixed one-hidden-layer MLP trained on one half, and held-out accuracy on the other. Calibration relabels the balanced held-out labels while keeping the fitted classifier and its predictions fixed.

ECS protocol. ECS depends on a frequency parameter T : smaller values emphasize lower-order and location differences, whereas larger values emphasize higher moments and tails. An independent preliminary study selected the fixed value $T = .28$ to balance these sensitivities before the reported comparison. Because coordinatewise ECS is not invariant to coordinate rescaling or rotation, its results are conditional on the PCA coordinates used by the controlled comparison.

A.4 Outer-permutation calibration

Table 11 evaluates the final six-arm equality test on real-feature null comparisons across two datasets and two embeddings. Its rejection rates remain near their nominal levels, supporting the outer-permutation calibration used in the main experiments.

Table 11: **Outer-permutation calibration on real features.** This independent real-null study applies one common protocol across four dataset–embedding settings: 500 repetitions per setting, $m = n = 200$, and 99 permutations for the six-arm equality test. The CIFAR–Inception row repeats the Fig. 3 null setting as an internal reference for the matrix; the main-text check uses 999 permutations for finer p -value resolution. DINO denotes the DINO ViT-S/16 CLS embeddings ($d = 384$) defined in Sec. 4.5. Rejection uses $p \leq \alpha$; $p = .01$ is the smallest attainable value.

dataset / embedding	$\alpha=.01$	.05	.10
CIFAR-10 / Inception	.008	.028	.094
CIFAR-10 / DINO	.010	.052	.104
Tiny-ImageNet / Inception	.010	.054	.098
Tiny-ImageNet / DINO	.014	.048	.090

A.5 GPK, GET, and RISE constructions and sensitivity to arm-level tail probabilities

GPK, GET, and RISE instantiate within-sample similarity differently: GPK uses dense Gaussian-kernel weights; GET uses a union of edge-disjoint minimum spanning trees; and RISE uses a directed nearest-neighbor graph weighted by neighbor rank. The reported standalone analyses use fixed graph specifications and the pooled median-distance GPK bandwidth. Thus GET and RISE differ in graph construction and weighting, whereas GPK is kernel based. The standalone RISE and GET tests use $T = Z_W^2 + Z_D^2$ with their asymptotic χ_2^2 references. For GPK, $W - \mathbb{E}_0 W$ is proportional to $\widehat{\text{MMD}}_u^2$ (Sec. 3.2), and the standalone GPK-med and GPK-small tests calibrate their quadratic statistics by label permutation rather than assigning a χ_2^2 reference from coordinate standardization. The normal-reference tail of an individual GPK Z_D coordinate is an arm-level quantity used in constructing ZID, not the standalone GPK omnibus p -value. These family-specific calibrations apply only to these standalone rows; the final six-arm ZID p -value is the outer permutation tail of the complete aggregated score.

To check sensitivity to the Gaussian-reference arm tails used in ZID, a nested comparison replaces each arm’s two-sided normal tail by an inner-permutation estimate while retaining outer-permutation calibration. The comparison uses 300 paired repetitions on each of the eight Fig. 3 departures; power at the 0.05 significance level is reported in Table 12. Among the 2,400 paired alternatives, 143 rejection decisions occur only with Gaussian-reference tails and 53 only with permutation tails. The departure-wise probabilities that

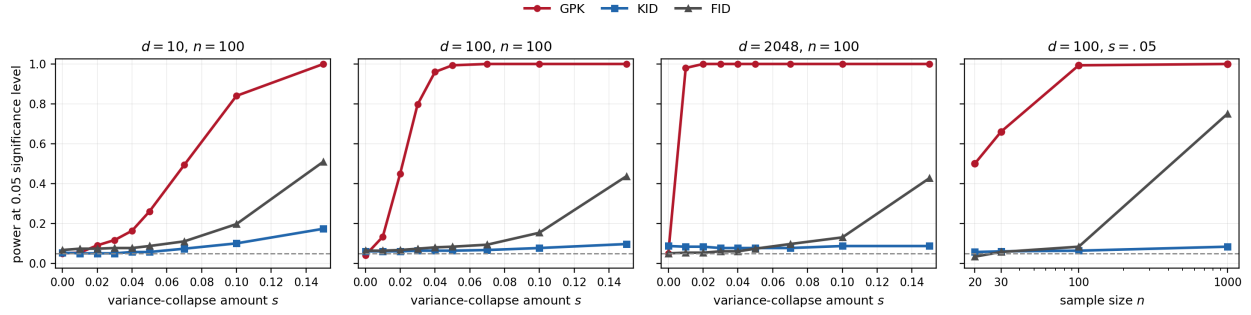


Figure 8: **Aligned sensitivity to Gaussian shrinkage across dimension and sample size.** Empirical power for median-bandwidth GPK, degree-3 KID, and FID; $s = 0$ denotes the null.

an alternative score exceeds its paired null score range from .947 to .997 and from .933 to .997, respectively; the pooled probabilities are .964 and .958. Across the 2,400 paired null comparisons, the corresponding rejection rates are .050 and .037. The two methods for assigning arm-level tail probabilities therefore yield similar probabilities that an alternative score exceeds its paired null score, while the Gaussian-reference implementation has somewhat higher detection power in this finite-permutation comparison.

Table 12: **Sensitivity to arm-level tail probabilities.** Each cell reports power at the 0.05 significance level over 300 paired repetitions. The Gaussian-reference specification uses the two-sided normal-reference tail of each standardized arm; the permutation-tail specification estimates each arm tail by label permutation.

departure	Gaussian-reference	permutation-tail
location	.823	.727
dispersion	.763	.763
linear dependence	.707	.643
nonlinear dependence	.977	.957
skewness	.827	.790
kurtosis	.840	.807
off-manifold support	.760	.777
matched-moment multimodality	.727	.660

A.6 High-dimensional dispersion sensitivity and coordinate separation

We compare median-bandwidth GPK, KID, and FID under one aligned protocol. Figure 8 compares power across dimension and sample size. The variance-collapse amount s multiplies standardized deviations from the reference mean by $1 - s$, so $s = 0$ is the null.

Within each repetition, the three methods use the same Gaussian reference–alternative pair and the same 99 label relabelings; power at the 0.05 significance level is estimated from 300 repetitions. The first three panels fix $n = 100$ and vary dimension over the full shrinkage grid; the fourth fixes $d = 100$ and $s = .05$ and varies sample size. At $n = 100$, GPK power for a 1% shrinkage is .98 at $d = 2048$; at $d = 10$, its power is .493 for a 7% shrinkage and .84 for a 10% shrinkage. At $d = 100$ and 5% shrinkage, GPK power is .50, .66, .993, and 1.00 at $n = 20, 30, 100$, and 1000, respectively. FID reaches .75 at $n = 1000$, while KID remains at .083. Across the displayed range, GPK responds sharply to small shrinkages as dimension or sample size increases, KID remains below .20, and FID rises more gradually.

B Protocols and supporting analyses for pretrained generative models

B.1 Sampling and calibration for pretrained generative models

Section 5 evaluates released generative models under fixed model weights, feature representations, sampling pipelines, and reference sets. Within each sweep, only the sampling or truncation parameter listed in Table 6 changes. Each entry is a fixed reference–model comparison rather than a power estimate over independently trained or generated models. All ZID equality-test and D -component p -values use the same six-arm construction and 499 outer relabelings.

The BigGAN comparison uses ten ImageNet classes with $m = n = 450$. The CIFAR DDPM comparison uses $m = n = 200$ at 5, 15, and 25 sampling steps. DiT-XL/2 and SiT-XL/2 use six ImageNet classes with $m = n = 500$ at each guidance setting. StyleGAN2-ADA compares independent $n = 5000$ draws across the displayed truncation values; the remaining metrics use a common fixed subset. Inception and DINOv2 results use their respective standard released representations and preprocessing.

B.2 BigGAN truncation control

BigGAN-deep-128 provides a control in which tighter truncation should reduce diversity. FID is lowest at $\psi = .8$ and rises from $\psi = .8$ to $.4$ as truncation tightens. Over truncation ψ ($m=n=450$, 10 ImageNet classes), the ZID score rises from 328 to 1150 as truncation tightens, while its aggregated S_D rises from 42.2 to 176.7 and the dispersion diagnosis remains under-dispersion. At $m=n=450 < d=2048$, the real–real FID is 70.3, and the generator–real values are 89–102 (Table 13).

Table 13: **BigGAN truncation control.** BigGAN-deep-128 versus real ImageNet from the same 10 classes (Inception-2048, $m=n=450$). The dispersion ratio is $\text{tr}(\hat{\Sigma}_{\text{gen}})/\text{tr}(\hat{\Sigma}_{\text{real}})$. For the generator rows, $(\hat{p}_{\text{ZID}}, \hat{p}_D) = (.002, .002)$; for real–real, the pair is $(.598, .856)$.

ψ	disp. ratio	FID	KID	ZID score	S_W	S_D	D_{ZID}	dispersion diagnosis
1.0	0.82	90.0	.0075	328	329.1	42.2	−42.2	under-dispersion
0.8	0.79	88.7	.0108	566	566.4	96.1	−96.1	under-dispersion
0.6	0.77	96.8	.0145	813	813.8	119.3	−119.3	under-dispersion
0.4	0.76	101.6	.0173	1150	1151.2	176.7	−176.7	under-dispersion
real–real	1.00	70.3	−.0004	.353	1.05	.12	undefined	not assigned

B.3 Detailed CFG sweeps: DiT and SiT

Table 14 gives the class-specific DiT-XL/2 guidance results underlying the aggregate main-text view in Fig. 7.

Table 14: **Per-class DiT-XL/2 classifier-free-guidance sweep.** Six ImageNet classes with class-matched real images (Inception-2048, $m = n = 500$). Parentheses report $\hat{p}_D$; “over” and “under” abbreviate the dispersion diagnoses. All $\hat{p}_{\text{ZID}} = .002$ with 499 permutations.

class	CFG	FID	S_{ZID}	KID	Prec	Recall	S_W	D_{ZID}	diagnosis ($\hat{p}_D$)
10	1	40.9	4.1e3	0.0149	0.652	0.805	4.1e3	41.1	over (.002)
	2	20.2	3.2e3	0.0053	0.890	0.639	3.2e3	-50.3	under (.002)
	4	27.7	26e3	0.0121	0.814	0.251	26e3	-100.2	under (.002)
	8	38.4	69e3	0.0216	0.698	0.065	69e3	-148.3	under (.002)
190	1	42.3	2.2e3	0.0128	0.698	0.745	2.2e3	18.4	over (.002)
	2	35.4	6.8e3	0.0140	0.868	0.500	6.8e3	-61.3	under (.002)
	4	53.1	33e3	0.0320	0.814	0.179	33e3	-83.8	under (.002)
	8	59.3	60e3	0.0398	0.782	0.109	60e3	-141.8	under (.002)
370	1	42.6	3.9e3	0.0153	0.624	0.773	3.9e3	30.8	over (.002)
	2	37.4	8.2e3	0.0176	0.818	0.532	8.2e3	-66.9	under (.002)
	4	56.2	54e3	0.0361	0.868	0.195	54e3	-175.7	under (.002)
	8	64.0	81e3	0.0408	0.892	0.025	81e3	-223.4	under (.002)
550	1	80.9	6.9e3	0.0374	0.498	0.739	6.9e3	39.2	over (.002)
	2	55.2	4.7e3	0.0221	0.850	0.559	4.7e3	-43.4	under (.002)
	4	87.0	45e3	0.0622	0.938	0.285	45e3	-150.0	under (.002)
	8	98.8	65e3	0.0716	0.936	0.152	65e3	-184.4	under (.002)
730	1	85.6	12e3	0.0375	0.514	0.732	12e3	30.6	over (.002)
	2	55.9	2.5e3	0.0152	0.818	0.558	2.5e3	-40.3	under (.002)
	4	87.8	35e3	0.0577	0.810	0.268	35e3	-124.1	under (.002)
	8	121.2	83e3	0.0926	0.702	0.123	83e3	-161.9	under (.002)
910	1	121.0	16e3	0.0467	0.410	0.731	16e3	44.7	over (.002)
	2	76.4	0.6e3	0.0087	0.692	0.535	0.6e3	-5.9	under (.008)
	4	92.0	12e3	0.0322	0.812	0.342	12e3	-71.5	under (.002)
	8	121.3	35e3	0.0567	0.772	0.111	35e3	-128.3	under (.002)

Figure 9 summarizes the corresponding guidance transition on **SiT-XL/2** (Ma et al., 2024), an interpolant transformer with a continuous flow objective. The sweep uses the same six classes and $n=500$, with $\text{CFG} \in \{1, 2, 4, 8, 16\}$. FID, KID, and the Frobenius covariance discrepancy are minimized near $\text{CFG}=2$ and increase on both sides, but their scalar values do not encode which side is over- versus under-dispersed (FID on class 10: $41 \rightarrow 22 \rightarrow 34 \rightarrow 43 \rightarrow 49$). The covariance-trace difference, centroid-distance difference (PERMDISP), and Vendi Score difference corroborate that dispersion changes across the sweep. For reference sample X and generator sample Y , the covariance-trace difference is $\sum_k \{\widehat{\text{Var}}(Y_k) - \widehat{\text{Var}}(X_k)\}$, the Vendi Score difference is $V(Y) - V(X)$, and the centroid-distance difference is $\bar{r}_Y - \bar{r}_X$, where $\bar{r}_X = n^{-1} \sum_i \|X_i - \bar{X}\|$ and likewise for Y . The Frobenius covariance discrepancy is $\|\widehat{\Sigma}_Y - \widehat{\Sigma}_X\|_F$. ZID’s final aggregate readout supplies the direction: on class 10, its D -component magnitude S_D grows from 42.3 at $\text{CFG}=1$ to 176.6 at $\text{CFG}=16$, while the direction changes from over-dispersion to under-dispersion.

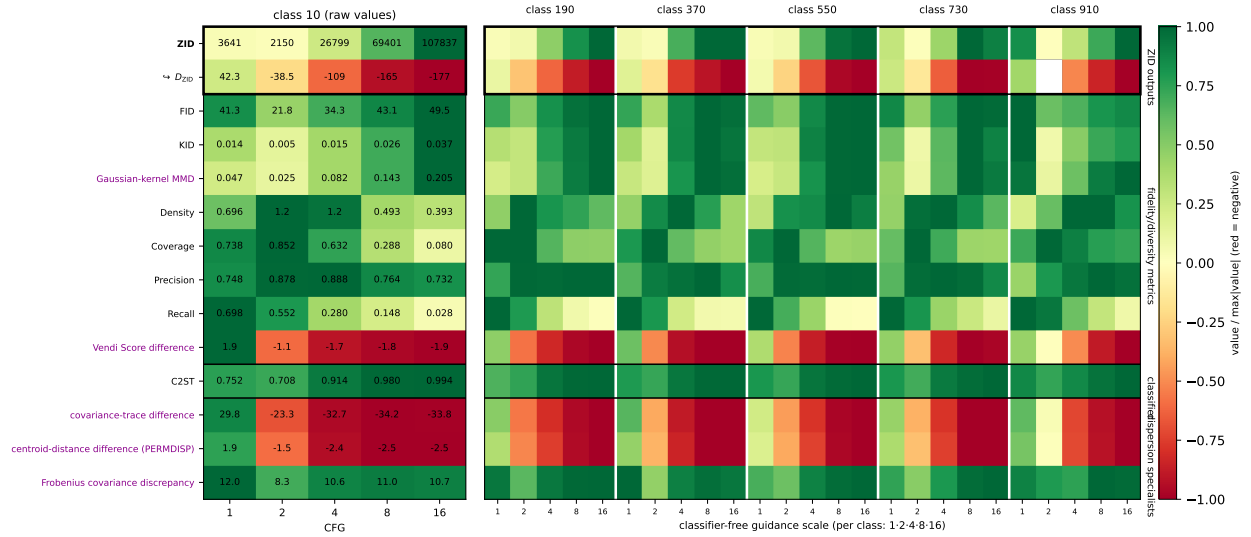


Figure 9: **Classifier-free-guidance corroboration on SiT-XL/2.** Classifier-free-guidance sweep vs. real ImageNet for six classes ($n=500$), using the 14 displayed quantities. **Class 10 (left) is shown with its raw values**; the other five classes are shown as normalized color cells. Color is each row scaled by its own peak $|\cdot|$ within a class (diverging; green >0 , red <0), so color shows each method’s response shape, not cross-row magnitudes (the raw values do). The boxed first two rows place ZID and its signed dispersion readout D_{ZID} together; shared external methods below follow their relative order in Fig. 3. FID, KID, and the Frobenius covariance discrepancy attain their minima near CFG=2. The specialist rows corroborate a dispersion change, while D_{ZID} flips positive $\rightarrow$ negative (the red band) and identifies the high-guidance side as under-dispersed; the blank cell is the one case in which no direction is assigned.

C Additional aggregation, ranking, and bandwidth controls

These controls retain the six-arm definition and its $0.175\sigma_{\text{med}}$ GPK-small member. Unless stated otherwise, they use the eight controlled departures, CIFAR-Inception PCA-128 features, and $n = 200$ observations per sample; each table states its repetition and permutation budgets. The ranking controls use the full-range sweeps from Sec. 4.2; the power controls use the departure definitions and signal levels from Fig. 3, with independent samples.

Aggregation rule. Table 15 compares five ways to aggregate the same six standardized arms. For the power columns, every rule shares samples, arm matrices, and 199 outer relabelings within a replicate. Flat Simes has the highest mean power and the strongest ranking summaries across the full severity ladders, whereas Cauchy has a one-point higher minimum power estimate. The differences among flat Simes, max, and Cauchy are descriptively small, while sum-of-squares and Fisher are weaker in the displayed power cells. Taken together, these results place flat Simes in the leading group across detection and ranking summaries, supporting its use as ZID’s aggregation rule.

Expanded ranking across increasing severity. Table 16 applies the same full-range ranking protocol to the four standalone tests and five external comparators: FID, KID, multiscale MMD, MIND, and ECS. Multiscale MMD uses a fixed sum of Gaussian kernels spanning several scales. Relative to these external comparators, ZID ranks first on all four summaries: mean and minimum Spearman correlations across the eight departures, and mean and minimum pairwise ordering accuracies. Among these standalone tests, RISE

Table 15: **Paired aggregation-rule comparison.** Mean and minimum summaries are across the eight controlled departures. Power and null rejection are evaluated at the 0.05 significance level using 100 repetitions and 199 outer permutations per departure; ranking uses 100 repetitions per sweep level and per mild-versus-final pair. All rules are evaluated on identical arms within each replicate.

rule	power		null	Spearman ρ		paired accuracy	
	mean	min		mean	min	mean	min
flat Simes	.826	.67	.041	.829	.562	.968	.83
max $ Z_k $	.818	.66	.042	.828	.556	.966	.82
sum of squares	.784	.60	.048	.822	.543	.958	.80
Fisher	.775	.58	.055	.812	.535	.956	.79
Cauchy	.825	.68	.042	.818	.539	.963	.80

ties ZID in mean pairwise ordering accuracy (.969 versus .968) and has higher minimum pairwise ordering accuracy (.90 versus .83), whereas ZID has higher mean and minimum Spearman correlations. This contrast separates monotonicity across the full severity ladders from ordering the mild and final levels. Density is not included in Table 16 because converting its directional output into a two-sided departure score requires an additional orientation choice.

Table 16: **Expanded ranking across increasing severity.** Spearman correlation uses the complete six-level sweep for each departure family; paired accuracy compares 100 independent mild-versus-final pairs per family. Mean and minimum are across the same eight departure families. MIND uses common random projections within each paired replicate, and ECS uses the independently selected fixed specification. Rows are grouped as the complete ZID construction, the standalone RISE, GPK-med, GPK-small, and GET tests, and external comparators.

method	mean ρ	min ρ	mean paired accuracy	min paired accuracy
ZID	.829	.562	.968	.83
RISE	.808	.494	.969	.90
GPK-med	.411	-.082	.752	.47
GPK-small	.556	.087	.821	.55
GET	.679	.199	.906	.63
FID	.266	-.406	.659	.27
KID	.378	.010	.741	.48
MMD _{ms}	.597	.043	.875	.57
MIND	.529	-.011	.839	.51
ECS	.380	-.030	.776	.55

GPK-small bandwidth sensitivity. Within each replicate, Table 17 holds samples and relabelings fixed and changes only the GPK-small multiplier over seven prespecified values from .10 to .25. Across this range, minimum power varies from .70 to .71 and mean null rejection from .035 to .048. The neighboring .15 and .20 ratios differ from .175 by at most .05 in power on every departure and have minimum paired decision agreement of at least .95 under the alternative and .98 under the null. Wider changes produce larger power differences or lower paired agreement on at least one departure. These quantities are descriptive sensitivity summaries rather than a rule for selecting the default.

Table 17: **Seven-point GPK-small bandwidth profile.** Only the GPK-small multiplier changes; the other four arms, samples, and 199 outer relabelings are shared across ratios within each of 100 repetitions per departure. Entries give the minimum power and mean null rejection rate across departures at the 0.05 significance level. The final three columns compare each ratio with .175: the largest absolute departure-wise power difference and the minimum paired decision agreement under the alternative and null.

multiplier	min. power	mean null	max $ \Delta $	min. alt. agree	min. null agree
.100	.70	.035	.070	.90	.94
.125	.70	.041	.050	.91	.97
.150	.71	.039	.050	.95	.98
.175 (reference)	.70	.039	.000	1.00	1.00
.200	.70	.043	.040	.96	.98
.225	.70	.048	.050	.93	.98
.250	.70	.044	.050	.95	.96

D Detection across severity, dimension, and sample size

D.1 Detection across increasing severity

To examine how ZID’s detection power changes as each departure strengthens, we extend the single signal level used in Fig. 3 to a five-level ladder. Each level uses 300 repetitions and 499 outer permutations per cell. Seven departures use multiples $\{0, .5, .75, 1, 1.25\}$ of their Fig. 3 signal. For matched-moment multimodality, the ladder varies the fraction $\lambda \in \{0, .25, .5, .75, 1\}$ of initially real observations replaced by their counterparts from the same moment-matched bimodal construction. This parameter ranges from the unmodified real sample at $\lambda = 0$ to the full bimodal alternative at $\lambda = 1$. Figure 10 shows monotonically increasing empirical power across all eight departures.

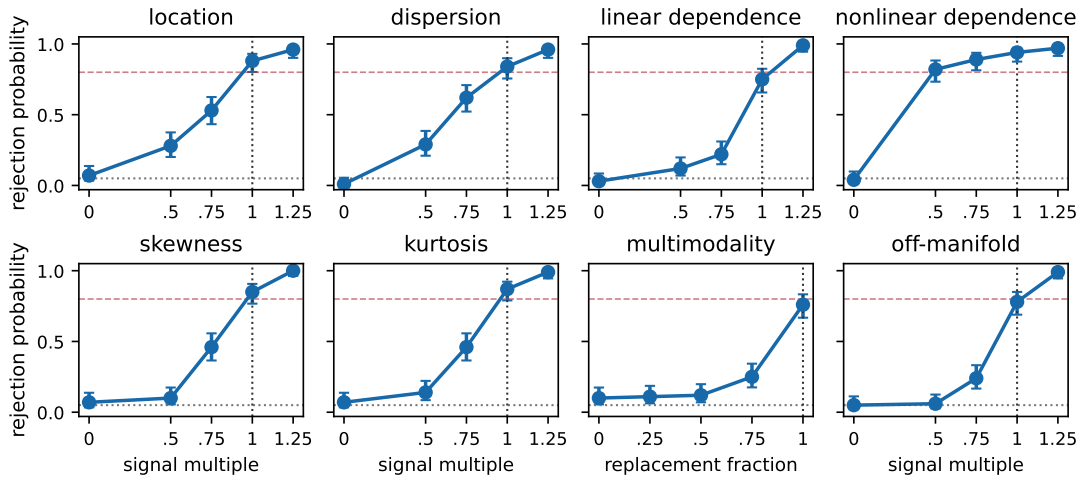


Figure 10: **Detection across increasing severity.** Empirical rejection rates use 300 repetitions and 499 outer permutations per cell at the 0.05 significance level; bars are Wilson 95% intervals. Horizontal dotted and dashed lines mark .05 and .80, and the vertical dotted line marks the Fig. 3 signal. For multimodality the horizontal coordinate is the fraction of initially real observations replaced by their moment-matched bimodal counterparts; for the other seven departures it is a multiple of the Fig. 3 signal.

D.2 Dimension–sample-size grid

We compare methods across $d \in \{128, 512, 2048\}$ and $n \in \{50, 200, 600\}$ for the eight controlled-departure constructions in App. A.3. Figure 11 reports power for the aligned 17-row method panel. A panel-level criterion selects one signal per cell to limit widespread ceiling effects, and that signal is held fixed across methods; comparisons are therefore within cells rather than trends over d or n .

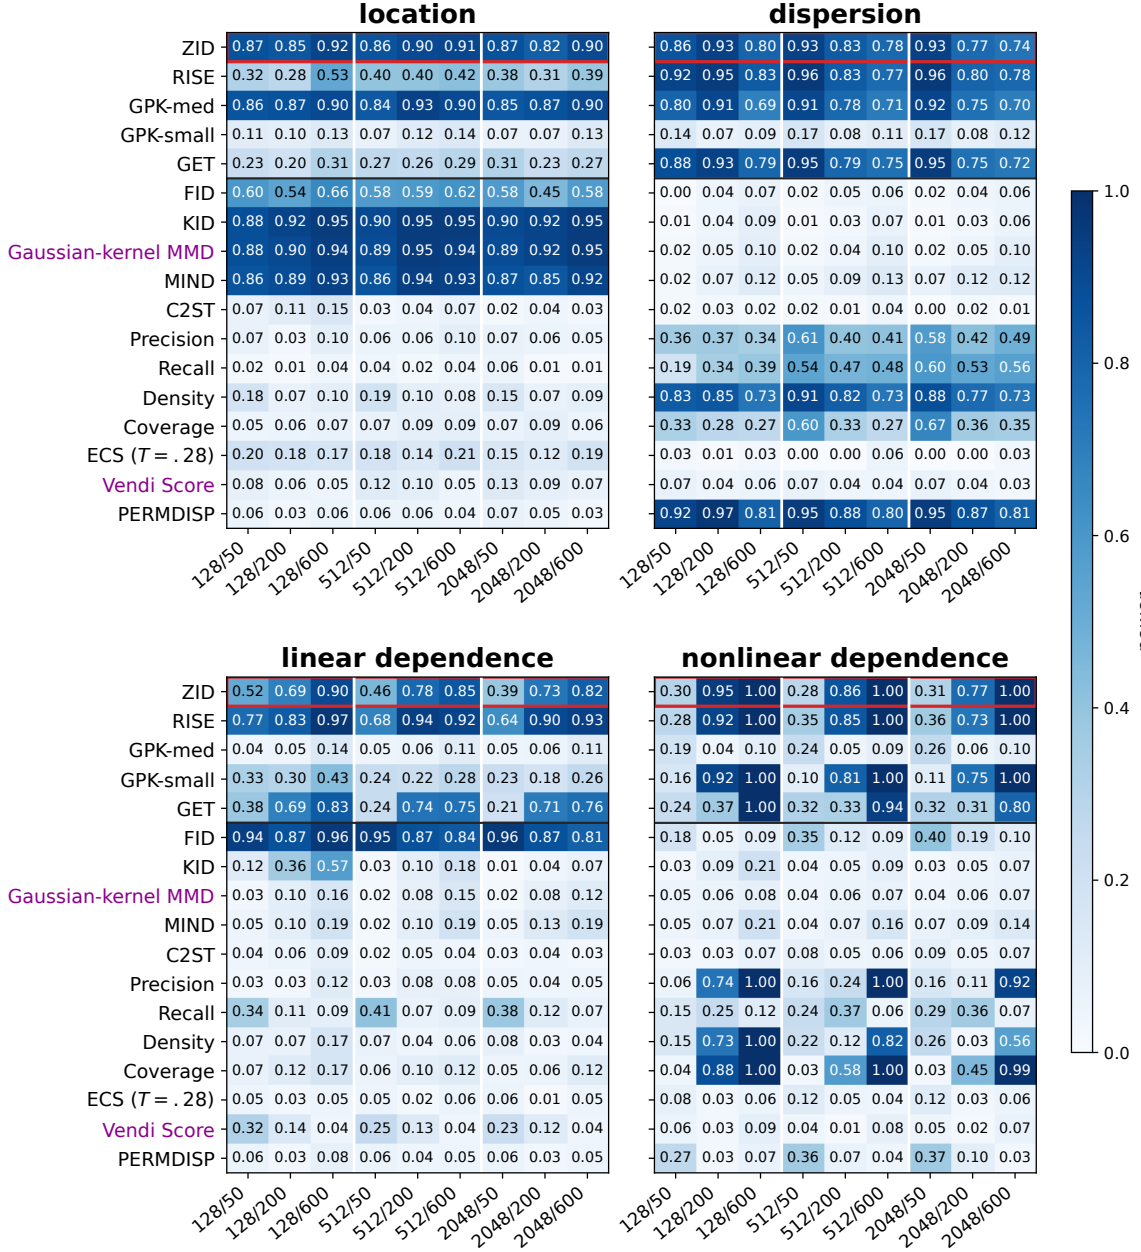


Figure 11: **Detection across departures, sample sizes, and dimensions.** The 17 rows match Fig. 3; columns are nine (d, n) cells and panels are eight controlled departures. Each cell uses CIFAR-10 Inception features projected to d pooled principal components, 100 repetitions at the 0.05 significance level, and one signal shared by all methods; permutation-calibrated rows use 99 relabelings. The boxed row is ZID; GPK-small uses $0.175\sigma_{\text{med}}$. Right panels share the method ordering shown at left.

Figure 11 continued.



Table 18 reports the maximum panel-specific null rejection estimate for each method and (d, n) cell.

Table 18: **Null rejection across the aligned robustness grid.** The 17 rows match Fig. 11. For each method and (d, n) cell, the table reports the maximum of the eight panel-specific null rejection-rate estimates, providing a worst-panel calibration summary. Each estimate uses real CIFAR-Inception features and 100 repetitions at the 0.05 significance level; rejection is defined by $p \leq .05$, and permutation-calibrated rows use 99 relabelings. The displayed values range from .00 to .10; the binomial s.e. of each underlying estimate is approximately .022. GPK-small uses $0.175\sigma_{\text{med}}$.

method	$d=128$			$d=512$			$d=2048$		
	$n=50$	$n=200$	$n=600$	$n=50$	$n=200$	$n=600$	$n=50$	$n=200$	$n=600$
ZID	0.05	0.03	0.01	0.03	0.05	0.02	0.03	0.05	0.02
RISE	0.07	0.03	0.05	0.05	0.05	0.04	0.03	0.04	0.04
GPK-med	0.04	0.05	0.04	0.01	0.05	0.07	0.02	0.04	0.06
GPK-small	0.06	0.04	0.03	0.03	0.04	0.04	0.04	0.04	0.02
GET	0.05	0.05	0.05	0.03	0.05	0.04	0.08	0.06	0.06
FID	0.03	0.05	0.07	0.03	0.08	0.07	0.03	0.08	0.07
KID	0.02	0.04	0.05	0.05	0.04	0.05	0.04	0.04	0.05
Gaussian-kernel MMD	0.05	0.04	0.04	0.03	0.05	0.03	0.03	0.05	0.03
MIND	0.04	0.03	0.04	0.04	0.06	0.04	0.08	0.06	0.03
C2ST	0.01	0.05	0.04	0.01	0.07	0.10	0.01	0.00	0.05
Precision	0.03	0.04	0.06	0.03	0.02	0.05	0.02	0.02	0.05
Recall	0.00	0.01	0.05	0.03	0.03	0.04	0.02	0.04	0.03
Density	0.01	0.04	0.02	0.05	0.04	0.04	0.02	0.04	0.03
Coverage	0.03	0.02	0.05	0.05	0.03	0.03	0.01	0.03	0.01
ECS ($T = .28$)	0.04	0.02	0.03	0.05	0.07	0.05	0.04	0.07	0.07
Vendi Score	0.04	0.03	0.01	0.03	0.06	0.03	0.03	0.05	0.03
PERMDISP	0.07	0.02	0.06	0.06	0.05	0.07	0.06	0.05	0.06