

Coverage, Not Targeting: A Structural Regime in Multi-Turn Agent Credit Assignment

Chenyu Zhou^{1,†}, Qiliang Jiang², Shuning Wu³, and Xu Zhou^{3,†}

¹School of Engineering, Institute of Science Tokyo, Japan

²College of Control Science and Engineering, Zhejiang University, China

³Department of Electrical and Computer Engineering, National University of Singapore, Singapore

[†]Corresponding authors: zhou.c.76d6@m.isct.ac.jp, zhouxu_nus@u.nus.edu.

Abstract

Multi-turn agentic RL increasingly treats credit assignment as a *targeting* problem: given a single terminal verifiable reward, a fast-growing line of methods—turn-level reward models, learned per-step calibration, process supervision—aims to localize credit onto the turns that “really” mattered. We identify the structural quantity that predicts when this is the right move—the **verifier information density** $V_d=k/C$, the fraction of an agent’s C -step causal chain whose per-turn correctness the verifier exposes—and show that terminal-state verifiers, which dominate current agentic-RL evaluation, sit deep in a low- V_d regime where targeting is the wrong axis. There, in controlled shared-rollout comparisons on τ^2 -bench [3] that separate reward density from credit geometry, the harmful axis is not *where* credit is targeted but *how much* it is concentrated: a continuous dense reward spread *uniformly* beats the sparse binary outcome reward—which is *net-harmful*, degrading the base policy on 4/5 seeds—while redistributing the *same* advantage onto “progress” turns, or onto *random* turns, is equally harmful. Targeting is second-order. The mechanism is **coverage**: terminal-state verification collapses the observable credit signal to a single final-write turn ($k=1$ in 98% of rollouts) while success requires a 5–8 step chain of hard-prerequisite tool calls, so any fixed-budget concentration under-covers it. A controlled synthetic **phase boundary** (concentration wins only above a high crossover $V_d^*\approx 0.8$) and a real-rollout diagnostic (measured $k=1$, $C=5-8$, so $V_d\approx 0.15$) converge on this account, which predicts uniform should also win on a second benchmark whose natively per-turn checker still exposes under half the chain ($V_d\approx 0.4$)—and it does, with the same concentration-not-targeting structure (shuffled 8/8 seeds, per-turn 6/8). Uniform redistribution is thus the zero-information coverage default that per-turn schemes must beat, and we contribute the matched-concentration **shuffled control** that any targeting claim should clear. The credit-geometry effect holds within Qwen3 (8B and 14B) and reproduces *across model families* on a tool-specialized Llama-3.1 agent (ToolACE-2-8B; $\Delta = -0.048$ over 32 pre-registered seeds, with an independent 20-seed replication itself significant at $\Delta = -0.054$). A pre-registered matched-budget breadth sweep on the same agent traces a monotone dose–response whose deficit vanishes only at full chain coverage, and a reward-to-go arm reaches full-coverage parity, as the account predicts. The structural ingredients ($k=1$, $C=5-8$) are measured across both families.

1 Introduction

Reinforcement learning on multi-turn tool-using agents is increasingly trained against **terminal verifiable rewards**: a program checks the final environment state (a database, a filesystem, an API ledger) and returns a scalar at the end of the rollout. This poses a credit-assignment question that single-turn RLHF never had to answer—a successful trajectory is a *chain* of tool calls, and the verifier scores only its endpoint. How should that endpoint signal be distributed across the turns that produced it?

Credit assignment is the central open problem of this setting, and the field’s prevailing answer is to *add information*: turn-level reward models and critics [4, 20, 27, 28], learned per-step calibration [13], process reward models [10], hindsight relabeling [1]—a fast-growing line of work whose implicit premise is that better *localization* of credit (putting reward where the “real” progress happened) is what is missing.

We report a result that inverts this premise. With **no new information**—redistributing the *same* terminal advantage—uniform spreading beats heuristic concentration, and the binary outcome reward is actively harmful. The harmful axis is not *where* credit is targeted but *how concentrated* it is: progress-targeted and random-targeted concentration are equally bad, while uniform spreading wins. Localization is not the lever. That dense rewards can beat sparse ones [15, 17], and that naive per-turn rewards can degrade performance [13], has been reported before; our contribution is to isolate the *responsible* axis—concentration, not targeting—with a shuffled-credit control, and to explain it with a coverage mechanism measured on real rollouts.

The explanation is **coverage**. Under terminal-state verification, the only turn whose observable progress signal moves is the final batched write—so any progress-derived per-turn signal collapses to a single-turn spike (we measure $k = 1$ in 98% of real rollouts). But task success depends on a 5–8 step chain of *hard prerequisite* tool calls—look up the user, retrieve the order, find the replacement product, then write the exchange; you cannot exchange an order you never looked up. Concentration on a fixed budget of turns covers only a fraction of that chain and starves the rest; uniform spreading covers all of it (Fig. 1). When the causal chain is longer than the concentration budget ($C > k$), uniform wins; this is a **phase boundary**. We establish the boundary in a controlled synthetic environment (§5.1); the real model does not cross it—it is measured to sit deep on the $C \gg k$ side (§5.2). And it *cannot* cheaply cross it: absent oracle labels or a learned judge, a state-transition verifier observes only steps that change state, so V_d is upper-bounded by the task’s *write-fraction* and read/exploration steps are a structural blind spot—a census of common multi-turn tool-agent benchmarks finds none escaping this ceiling (the highest, BFCL V3’s per-turn checker, reaches only $V_d \approx 0.4$; §5.4). Uniform coverage is thus not a tuning choice but the structurally forced default for terminal-verifier agents.

Contributions.

1. *The verifier information density $V_d = k/C$ as a structural regime map for credit geometry.* V_d —the fraction of an agent’s C -step causal chain whose per-turn correctness the verifier exposes—is both *measurable* (from real rollouts) and *predictive*: a controlled synthetic **phase boundary** shows fixed-budget concentration pays off only above a high crossover ($V_d^* \approx 0.8$), while terminal-state verifiers, which dominate agentic-RL evaluation, are *measured* to sit at low $V_d \approx 0.15$ ($k=1$, $C=5-8$)—deep in the coverage regime (§5, §5.3).
2. *A structural ceiling on V_d : the write-fraction bound.* A state-transition verifier can score a step only if the step changes state, so—absent oracle goal-labels or a learned judge—the

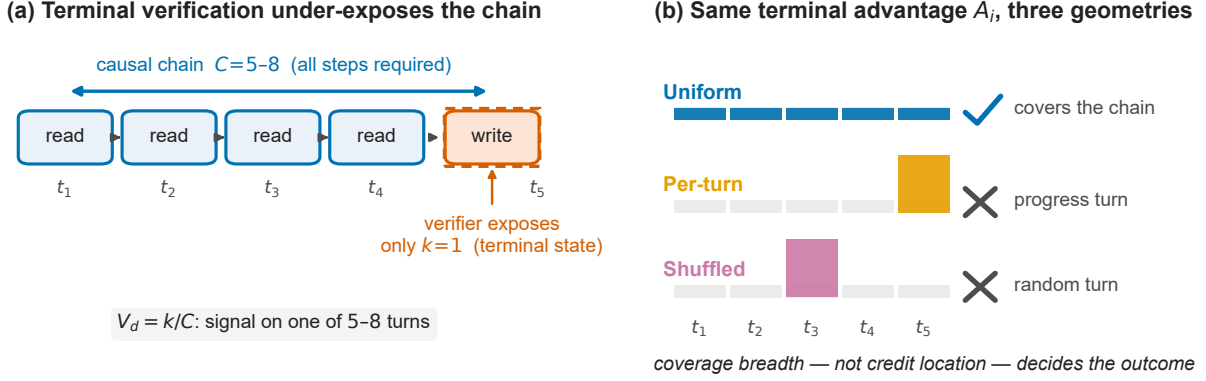


Figure 1: **Why coverage, not location, governs credit assignment under terminal verification.** (a) A successful rollout is a $C = 5-8$ chain of hard-prerequisite tool calls, but a state-transition verifier scores only the terminal write, exposing a single turn ($k = 1$, so $V_d = k/C$ is 0.12–0.20). (b) The same group-normalized terminal advantage A_i , redistributed three ways: *uniform* spreads it over every turn and covers the whole chain, whereas *per-turn* (progress turns) and *shuffled* (random turns) both concentrate it on a single turn and under-cover the chain. Because a lone spike lands on one of 5–8 causal turns wherever it goes, coverage breadth—not credit location—decides the outcome.

independently checkable fraction of the causal chain is upper-bounded by the task’s *write-fraction*; read/exploration steps, whose correctness is goal-relative, are a permanent structural blind spot. A census of common multi-turn tool-agent benchmarks (Table 3) finds none that exposes a naturally high V_d : the highest, BFCL V3’s per-turn checker, reaches only $V_d \approx 0.4$, and the terminal-verifier majority sits at $V_d \approx 0.1-0.2$. This explains *why* the coverage regime is the common case—a structural property of state-based verification, not an accident of our tasks—and recasts learned or oracle process rewards as paying to fill this observability gap rather than acting as free streaming verifiers (§5.4).

3. In that low- V_d regime, a controlled isolation (shared-rollout) shows dense-uniform $>$ binary (binary *net-harmful*) and per-turn concentration harmful—only the credit geometry differs across arms (§3). And it is *concentration, not targeting*: random-targeted $\approx$ progress-targeted $\ll$ uniform, so targeting is second-order and coverage breadth first-order (§4). The **coverage** mechanism explains why—observable credit collapses to $k=1$ while success needs the 5–8 step chain—and is algorithm-agnostic (GRPO, advantage-baseline, REINFORCE at matched effective learning rate) (§5).
4. *A methodological control for targeting claims.* Because changing credit geometry alters concentration and optimization dynamics *together*, isolating a genuine *targeting* benefit requires a matched-concentration **shuffled control** that holds coverage breadth fixed and varies only *which* turns are credited. We use this control throughout and recommend it as a default guard for per-turn credit-assignment claims (§4, §8).
5. Boundary conditions that unify the null regimes under the same mechanism (a capability floor, a resolution/partial-density gate), and reproduction of the effect on a second benchmark (BFCL V3, $V_d \approx 0.4$) and *across model families* (a tool-specialized Llama-3.1 agent), which also passes a pre-registered matched-budget breadth sweep: at fixed total credit, performance rises monotonically with chain coverage, and a companion reward-to-go arm on Qwen3-8B

reaches full-coverage parity (§6). Uniform redistribution is the strong zero-information default for the $C \gg k$ regime, the common case for terminal-verifier tool agents.

Roadmap. We first isolate the empirical effect at the measured low- V_d operating point (§3–§4), then lift it into the verifier-density phase diagram (§5–§5.3) and test its predictions across capability, model family, credit breadth, and a second benchmark (§6).

2 Setup

Environment. τ^2 -bench **retail**, restricted to its pure database-state tasks (the verifier checks DB field-level changes; no natural-language-judged assertions). Base agent Qwen3-14B (we also report 8B and 4B for the scale analysis). Training is GRPO [16] with LoRA [8] (rank 16; full configuration in Appendix D). BFCL V3 multi-turn [22] provides a second benchmark, and a second τ^2 -bench domain (telecom) a partial-progress contrast for the resolution gate (§6).

Shared-rollout isolation (the clean comparison). For each seed we collect *one* batch of base-policy rollouts and train every arm from the *same* batch with the same optimizer. Two axes are separated. Along the *density* axis, the binary arm scores each rollout with the coarse 0/1 outcome while the dense arms use the continuous DB-field progress. Along the *geometry* axis, the dense arms share a single group-normalized terminal advantage A_i and differ *only* in how it is distributed across turns. The geometry comparison thus isolates credit distribution from every confound (data, exploration, terminal signal, magnitude). This isolation exists *only* at the first policy update: once training iterates, each arm collects its own data, and any downstream difference conflates credit geometry with data collection. The single-update comparison is therefore the object of study.

Arms. We compare four credit geometries.¹ **Binary**—the conventional sparse 0/1 outcome reward. **Uniform**—a continuous dense reward (DB-field progress) with the group-normalized advantage assigned to every turn, $a_t = A_i$ (the standard GRPO allocation). **Per-turn**—the same A_i redistributed by each turn’s share of positive DB-field progress ΔS_t , so that $\sum_t a_t = A_i$ (progress-targeted concentration). **Shuffled**—the per-turn weights permuted to *random* turns (random-targeted concentration; same concentration, no targeting information). A global gradient-norm clip of 1.0, saturated in every logged epoch of every arm, equalizes the applied update magnitude across geometries, which therefore differ in update direction, not size. Note that the per-turn arm consumes strictly more verifier information than uniform—it sees *where* the progress occurred—so the geometry comparison is, if anything, biased toward per-turn.

Metric. Held-out environment-assertion support on the pre-registered gradable subset (primary, continuous) and official task success (co-primary, binary); the formal definition, the frozen gradable task list, and the user-simulator protocol are in Appendix E. We report per-seed paired deltas (sign test) and a one-sided per-task Wilcoxon signed-rank test in the pre-registered direction on the held-out gradable subset (95 task–seed pairs for the main comparison). All confirmatory arm comparisons are **within-run paired**—competing geometries share each seed’s training rollouts and evaluation batch; Appendix B quantifies the between-batch evaluation variability that makes unpaired cross-run comparisons unsafe at this evaluation budget.

¹Released-harness names: Binary = `official`, Uniform = `dense_full`, Per-turn = `dense_perturn`, Shuffled = `dense_perturn_shuf`.

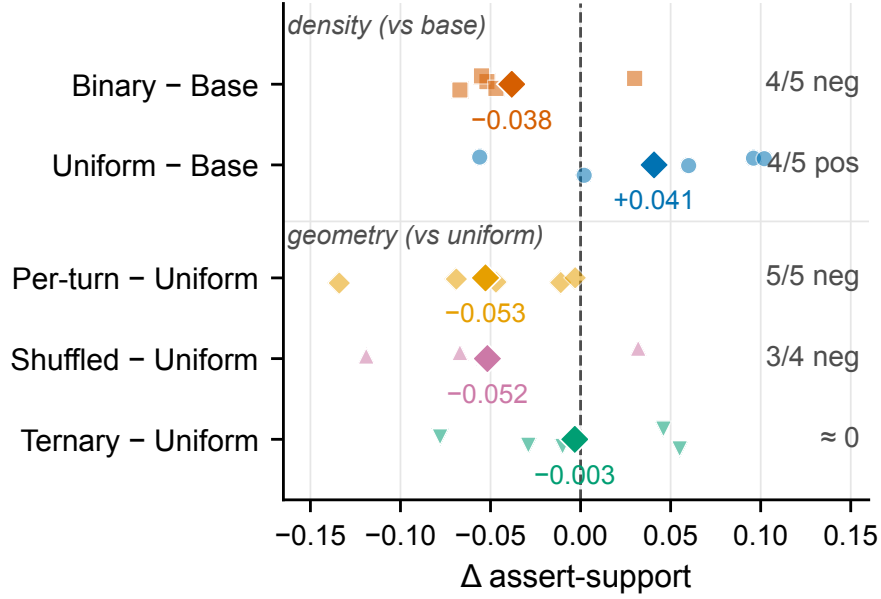


Figure 2: **Credit geometry as paired per-seed contrasts** (retail-14B, held-out assert-support; faint markers are per-seed differences, diamonds means). Binary degrades the untrained base while dense uniform improves it; relative to uniform, concentrated per-turn and shuffled are harmful while ternary is indistinguishable. Inference is task-level (one-sided Wilcoxon over 95 task-seed pairs). Concentration is the harm; targeting is second-order.

3 Density is necessary but not sufficient

Uniform dense beats binary, and binary is net-harmful. The uniform arm exceeds the binary arm by +0.079 on gradable assert-support (sign 4/5 across seeds; one-sided per-task Wilcoxon $p = 0.003$ over the 95 task-seed pairs; seed-then-task hierarchical bootstrap 95% CI [+0.009, +0.149], Appendix B), and by +5.2pp on official success. The separation is *twofold*: relative to the untrained base, the binary reward *degrades* the policy (4/5 seeds) while the uniform dense reward *improves* it (4/5 seeds; +0.041 over base, Table 1). The conventional sparse outcome reward is not merely weaker—under matched conditions it actively hurts (Fig. 2).

Resolution is cheap. A ternary discretization of the dense reward (three levels: 0, 0.5, 1) retains 96% of the advantage (+0.076 over binary, 5/5): the gain comes from having *any* non-degenerate gradient on groups where every rollout otherwise fails, not from fine-grained reward resolution.

But concentrating the dense reward hurts. Redistributing the *same* terminal advantage onto progress turns (the per-turn arm) underperforms uniform on every seed on assert-support (sign 0/5, mean -0.053) and on official task success (mean -0.063 , 4/5 seeds; per-seed values in Appendix F), a deficit that persists across the entire trainable dose range (Appendix A) and reproduces in the powered same-batch four-arm comparison on BFCL V3 (-0.036 , paired $t = -2.80$; §6). Density is necessary; how the density is distributed decides whether it helps (Fig. 2). The matched-budget sweep of §6 reproduces this deficit at strictly equal total credit and separates its coverage and scale components on a second benchmark.

Table 1: Held-out gradable assert-support, per seed (retail-14B). Uniform is the reference for Δ . Binary degrades the base while uniform improves it (twofold separation). Per-turn and shuffled (both concentrated) are below uniform; ternary $\approx$ uniform. Shuffled is over four seeds; its mean and deltas are computed on those four, where the per-turn mean is 0.499 (hence the +0.014 shuffled–per-turn difference in §4, not 0.513 – 0.510). On official success the binary–uniform gap is –5.2pp.

arm	s1	s2	s3	s4	s5	mean	Δ base	Δ unif.
base (untrained)	0.597	0.502	0.509	0.506	0.496	0.522	+0.000	–0.041
binary outcome	0.545	0.447	0.539	0.439	0.449	0.484	–0.038	–0.079
dense uniform	0.541	0.504	0.605	0.608	0.556	0.563	+0.041	+0.000
dense per-turn	0.494	0.493	0.471	0.539	0.553	0.510	–0.012	–0.053
dense shuffled	0.488	0.536	0.538	0.489	–	0.513	–0.016	–0.052
dense ternary	0.587	0.475	0.595	0.530	0.611	0.560	+0.038	–0.003

4 It is concentration, not targeting

If per-turn concentration loses because it targets the *wrong* turns, then targeting *random* turns should be strictly worse. It is not. The shuffled arm (random-targeted) lands within noise of the per-turn arm (progress-targeted)—both well below uniform (shuffled – per-turn mean +0.014 on the four shuffled seeds, 95% CI $[-0.07, +0.10]$). This is a null on targeting, not a certified equivalence. But the direction is clear—moving the same concentrated credit to random turns does not make it worse—and the coverage mechanism of §5 explains why: at $C \gg k$ a single spike covers ~ 1 of 5–8 causal turns wherever it lands, so *where* it lands is second-order and *that* it is concentrated is the harm. The first-order quantity is coverage breadth. The shuffled arm removes exactly one thing—the information about which turns carried progress—while holding the concentration budget fixed; that its removal costs nothing is direct evidence that the per-turn deficit is not a mis-targeting failure that sharper localization could repair. Any scheme that concentrates a fixed advantage budget, however well it chooses the target, therefore inherits the same coverage risk in this regime.

No targeting scheme isolates a robust benefit. As a robustness check on whether *any* plausible targeting scheme can beat uniform once coverage is held fixed, a wider battery of matched-concentration, shared-rollout credit geometries on Qwen3-8B (4 seeds) stress-tests the same conclusion: crediting verifier-confirmed gold-relevant read turns, a matched count of *random* read turns, write turns only, or gold reads only. No variant isolates a robust benefit from *which* turns receive credit once coverage breadth is held fixed; we report this as directional corroboration ($n=4$) of the shuffled-control result above, because these auxiliary arms were trained and evaluated in separate runs (Appendix B). The powered, within-run-paired version of this control is the pre-registered cross-family breadth sweep of §6, which reproduces the null.

5 The coverage account

5.1 A synthetic phase boundary

In a controlled multi-turn GRPO toy with *known* causal structure (C of T turns are causally necessary; a concentration budget covers k turns), we sweep causal sparsity C . Uniform credit is robust across all sparsities. Fixed-budget concentration wins only when it can cover the whole causal set ($C \leq k$) and loses monotonically as the causal chain outgrows the budget ($C > k$; Fig. 3b)—a prediction the real-model breadth sweep confirms directly (§6). The crossover at $C \approx k$ is the

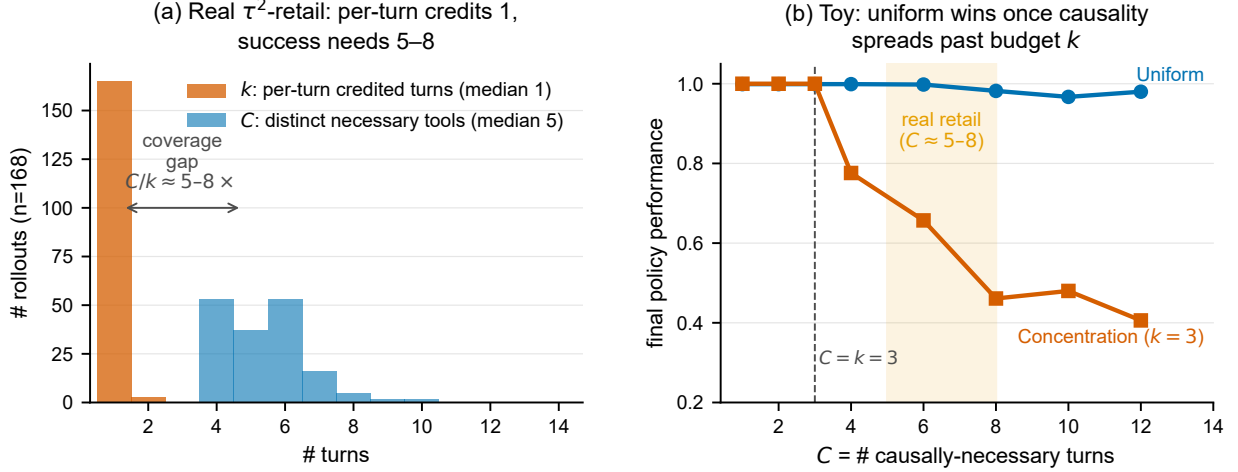


Figure 3: **The coverage gap.** (a) Real τ^2 -bench rollouts: the per-turn credit budget is $k = 1$ (spike on the terminal DB write) while the causal tool chain is $C = 5\text{--}8$; the prerequisite reads receive zero per-turn credit. (b) The synthetic phase boundary: uniform wins iff $C > k$; the real-retail operating point ($k = 1$, $C = 5\text{--}8$) sits deep in the shaded $C \gg k$ region.

mechanism: concentration is a coverage bet that pays off only when the causal structure is sparse enough to fit the budget. The boundary is robust to budget size, network capacity, graded (rather than binary) causality, and sequential dependency, and persists under collect-from-policy training in which each arm collects from its own evolving policy. It is **algorithm-agnostic**: once effective learning rate is matched, uniform wins under GRPO, an advantage-baseline, and REINFORCE—raw cross-algorithm differences are an effective-LR confound, not a GRPO artifact. The full environment specification is in Appendix C.

5.2 A real-rollout coverage diagnostic

On real τ^2 -bench rollouts we measure the two quantities the toy predicts matter. The per-turn credit budget—the participation ratio (effective number of turns carrying the credit signal) of the ΔS weights—is $k = \text{median } 1.00$: in 98% of rollouts the entire progress signal lands on a single turn, the terminal batched DB write (the 2% multi-turn cases do not move the regime). But success requires a chain of $C = 5\text{--}8$ tool calls (median 8 actions from 5 distinct tools), whose first members are hard-prerequisite reads—user lookup, order retrieval, product lookup—that change no DB state, and therefore receive *zero* per-turn credit, yet are physically necessary: an order cannot be exchanged without first retrieving it. This is a hard *data* dependency, not an inflated count: a static data-flow check confirms that in 100% of successful rollouts the terminal write’s arguments (order, item, and product ids) are values returned by the precursor reads (median 5 reads precede the first write). The write cannot be constructed without them, and its arguments cannot be assembled from the user instruction alone; the chain length is also insensitive to how it is counted (Appendix F). So $C/k = 5\text{--}8\times$: the observable signal is maximally concentrated exactly where the causal structure is maximally distributed (Fig. 3a).

This explains the targeting null. At $C \gg k$, a single spike—whether on the progress turn (per-turn) or a random turn (shuffled)—covers ~ 1 of 5–8 causal turns. *Which* turn it lands on is a

second-order choice among equally-incomplete coverings; only uniform covers the chain. This is precisely why shuffled $\approx$ per-turn $\ll$ uniform.

5.3 Verifier information density as the regime coordinate

Is the collapse to $k = 1$ intrinsic to multi-turn credit, or an artifact of the *batched* terminal verifier? We answer this in the controlled synthetic environment of §5.1 by adding a second axis, the verifier information density V_d —the fraction of the causal chain whose per-turn correctness the verifier exposes *independently*. At $V_d \rightarrow 0$ the verifier reveals only a terminal aggregate, so any progress signal collapses to a single spike ($k = 1$); at $V_d = 1$ every causal turn carries its own reward ($k \rightarrow C$). Real terminal-verifier agents sit near the low end: $k = 1$ over a $C = 5$ –8 chain is $V_d = k/C \approx 0.12$ –0.20 (we use $V_d \approx 0.15$ as the representative value). Crucially, V_d and C parameterize different subsystems— V_d the verifier’s observation model, C the task’s causal structure; we vary V_d by verifier exposure at *fixed* C (they couple through the budget k in the toy, but a real streaming verifier raises V_d without changing C). The two credit geometries are matched in total advantage mass per rollout, so they differ only in shape.

Sweeping V_d traces a clean boundary (Fig. 4). On the realistic state-dependent chain—a turn counts only once all prerequisite turns are also correct—the targeted-minus-uniform gap closes monotonically with V_d : $-0.43, -0.36, -0.27, -0.11, +0.36$ across $V_d = 0 \dots 1$ (32 paired seeds), crossing zero only at $V_d^* \approx 0.81$. Uniform coverage wins until the verifier exposes roughly four-fifths of the chain. This crossover is not an artifact of one chain length: sweeping $C = 4$ –10, V_d^* stays in $[0.75, 0.91]$ —in every case far above where real terminal-verifier agents operate ($V_d \approx 0.15$). The same coverage budget is at work as in §5.1—below V_d^* the verifier exposes too little of the chain for concentration to cover it—but now turned by the verifier’s observation model rather than by chain length, the two being independent knobs. (On independent-turn chains, where uniform is near its ceiling, the crossover comes later, $V_d^* \approx 0.95$; Fig. 4a.) The mechanism is the one from §5.1: at low V_d the targeted arm can only cover the few turns the verifier exposes (the rest receive zero gradient) while uniform covers the whole chain; the targeted arm’s held-out score climbs from 0.10 to 0.89 purely as its coverage grows, while uniform stays flat at 0.53.

This *strengthens* the coverage account. Where targeting eventually wins ($V_d \rightarrow 1$) it does so because the streaming verifier has already supplied the per-turn coverage signal: targeting is then a conduit for coverage the verifier provides, not a competing principle. The whole surface is one coverage mechanism, with V_d setting how that coverage is best delivered. It also localizes the cause of $k = 1$: even the state-dependent chain crosses over under a streaming verifier, so $k = 1$ in real τ^2 is a property of the *batched* verifier, not of multi-turn structure.

Probing the high- V_d end on the real model. On these tasks the only way to raise V_d at fixed C is to inject oracle knowledge—either exposing gold read-correctness to credit, or injecting the prerequisite target ids that make reads structurally checkable. Neither construction reproduces the toy crossover on Qwen3-8B: even with V_d raised by oracle labels, concentrated credit stays at or below uniform, so at the natural low- V_d operating point the uniform $\geq$ concentration ordering holds *a fortiori*. That *both* constructions must inject oracle knowledge to move V_d at all is itself the point—the cost the write-fraction ceiling (§5.4) identifies as structural.

5.4 The write-fraction ceiling

The need to inject oracle knowledge to move V_d is not specific to τ^2 : it is a property of *state-based* verification. A verifier that scores a trajectory by its effect on world state can attribute correctness

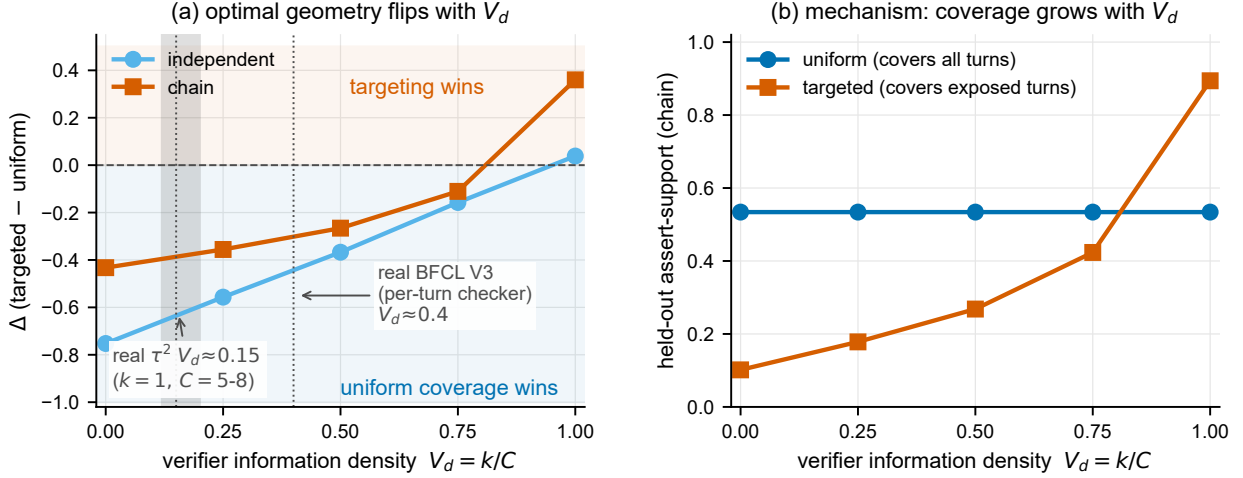


Figure 4: **The relative performance of credit geometries is organized by verifier information density V_d .** (a) Targeted–uniform held-out gap vs. V_d (the fraction of the causal chain the verifier exposes independently per turn); uniform coverage wins below the crossover V_d^* , targeting only above it. Real terminal-verifier agents sit at $V_d \approx 0.15$ ($k=1, C=5-8$), deep in the coverage regime. (b) Mechanism: the targeted arm’s score rises purely as its coverage grows with V_d ; uniform (full coverage) is flat. “Chain” is the realistic state-dependent causal structure (the independent-turn structure, crossover ≈ 0.95 , is also shown); 32 paired seeds.

only to steps that *change* state; a read or query returns information but leaves no state delta, so whether it advanced the (a-priori-unknown) goal is invisible to the verifier unless it is supplied an oracle label or a learned judge. The independently checkable, non-oracle fraction of a task’s causal chain is therefore upper-bounded by its *write-fraction*, with read and exploration steps a structural dead zone:

$$V_d \leq \text{write-fraction} \quad (\text{state-transition verifier, absent oracle or learned per-step labels}). \quad (1)$$

The census of Table 3 shows the ceiling is binding in practice: no widely used multi-turn tool-agent benchmark exposes a naturally high V_d . The measured maximum is BFCL V3, whose per-turn checker fires only on state-changing turns and reaches $V_d \approx 0.4$; the terminal-verifier majority sits at $V_d \approx 0.1-0.2$. High- V_d per-step signal appears only outside multi-turn tool use—in single-turn reasoning with a *learned* process verifier, or in simulator domains with an authored per-step score—that is, where the per-step label is *supplied* rather than structurally free. Two consequences follow. First, the coverage regime ($C \gg k$) is the structurally common case for tool agents, not an artifact of our task selection, so uniform redistribution is their forced zero-information default. Second, the learned and oracle process-reward methods that beat outcome-only training on such tasks are best read not as free streaming verifiers but as *paying* this ceiling’s price—supplying the missing per-step signal (§7).

5.5 Prescription

For terminal-state verifiers the observable credit signal structurally collapses to a final-write spike ($k=1$), while success depends on a 5–8 step prerequisite chain. In this $C \gg k$ regime uniform redistribution is the zero-information coverage strategy that no fixed-budget concentration beats:

a strong default to reach for before adding learned per-turn signal, not a baseline to improve on. Learned calibration that recovers the causal chain is the complementary lever (§7). The verifier-density boundary (§5.3) makes the condition concrete: concentration is worth its coverage risk only once the verifier exposes most of the causal chain (V_d near 1), which terminal-state verifiers structurally do not—so for the dominant paradigm, uniform coverage remains the default.

6 Validation and boundary conditions

The mechanism predicts where the effect should *hold*, where it should *vanish*, and how it should *scale*; we confirm all three—and that the effect reproduces on a second benchmark, with structural ingredients invariant across model families. One mechanism organizes the positives, the scaling, and the nulls into a single regime map (Table 2).

Prediction	Regime	Observed (anchors)
uniform > binary	above floor, $C \gg k$	+0.079 (4/5; one-sided Wilcoxon $p=0.003$, 95 pairs; 14B); +0.048, 3/3 (8B)
per-turn < uniform shuffled $\approx$ per-turn	above floor, $C \gg k$ above floor	5/5 (14B); 2/3 (8B) CI $[-0.07, +0.10]$ (τ^2); $\Delta = +0.002$ (BFCL)
$k=1$, $C=5-8$	terminal verifier	median $k=1$, $C=5-8$ (Qwen3 + Llama-3.1)
null (no usable gradient) concentration < uniform, $V_d < V_d^*$	below floor / thin signal 2nd benchmark, $V_d \approx 0.4$	null (4B, Llama-3.1, telecom) per-turn -0.036 (6/8), shuffled -0.034 (8/8), 8 seeds (BFCL)
same effect, cross-family	non-Qwen, above floor	-0.048 , $t = -6.54$, CI $[-0.063, -0.033]$, 32 seeds (ToolACE)
coverage widens $\Rightarrow$ deficit shrinks	matched budget, above floor	-0.048 ($k=1$) $\rightarrow -0.017$ ($k \approx 3$) $\rightarrow +0.010$ (all calls) vs. full coverage; both steps $p < 0.01$ (20 seeds, ToolACE)

Table 2: One coverage mechanism predicts the positives, the scaling, *and* the nulls. The structural ingredients ($k=1$, $C=5-8$) and the below-floor null both reproduce across model families; the credit-geometry effect is measured within the above-floor Qwen3 family *and* reproduced across family on ToolACE-2-8B (BFCL V3, last row). The BFCL rows are within-run paired same-batch comparisons (§6); the ToolACE row pools the pre-registered 8-seed main set, 4-seed replication, and independent 20-seed replication (32 seeds); the breadth row is the pre-registered matched-budget sweep on the same frozen rollouts (20 seeds; Appendix G). Seed counts are fractions of seeds satisfying the prediction.

Capability floor. At 4B the comparison is null—but the diagnostic shows why: the 4B agent completes the prerequisite chain in only 24% of rollouts (vs. $\sim 70\%$ at 14B). With too few completed chains, no credit geometry has anything to cover. The floor is a *completion* limit, not a shortened chain: the task-required chain is unchanged, and Fig. 5b plots the chain each agent actually traverses.

Scale reproduction (within Qwen3). Above the floor the effect reproduces and scales with capability: dense > binary is +0.048 at 8B (3/3) and +0.079 at 14B; per-turn – uniform is -0.050

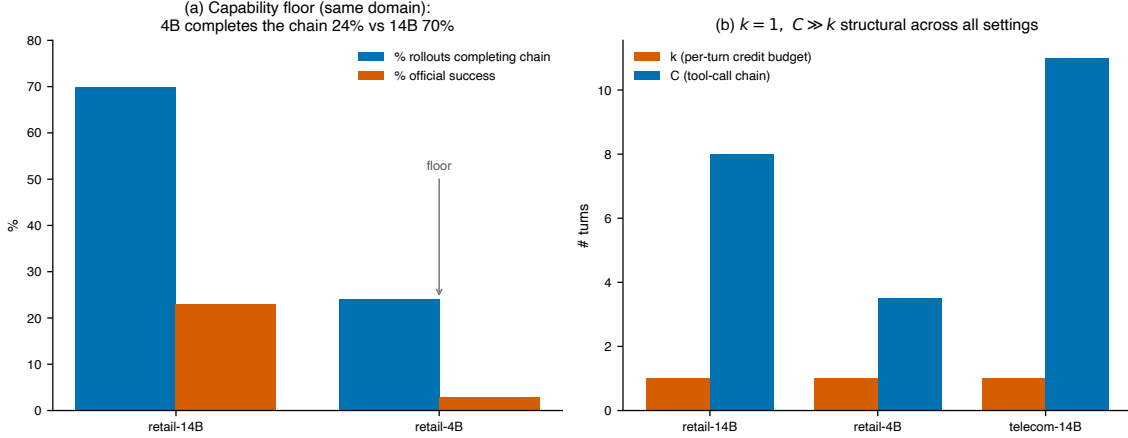


Figure 5: **Boundary conditions.** (a) Capability floor: 14B completes the prerequisite chain far more often than 4B. (b) The $k = 1, C \gg k$ structure holds across retail-14B, retail-4B, and telecom-14B.

at 8B (2/3) and -0.053 at 14B. Three scale anchors (4B floor / 8B / 14B) rule out a 14B-specific artifact (4B and 14B plotted in Fig. 5; 8B in text).

Cross-family structural invariance (and a predicted null). The regime’s structural ingredients are task-defined, not Qwen-specific. On Llama-3.1-8B—an independently pretrained family—the same retail tasks traverse a causal chain of the same length ($C = 5\text{--}8$; median 6 distinct tools, 7 on the successful rollout), and the progress signal reaching the terminal write again collapses to $k = 1$. Llama is genuinely doing tool use (63% of its turns issue tool calls), so this is a structural measurement, not a parsing artifact. The credit-geometry effect itself is *not identifiable* on Llama: it sits below this benchmark’s capability floor (2% base success, comparable to the below-floor Qwen3-4B; Fig. 5a)—consistent with public τ -bench leaderboard results [23], where non-Qwen agents of this class score in the single digits—so its training groups are near-uniformly zero-variance. Its failures trace to weak grounding: only 50% of its terminal-write arguments come from its precursor reads (vs. 100% for the above-floor Qwen agent), i.e. it traverses the chain but does not reliably consume it. The regime ($k = 1, C \gg k$) is thus cross-family. The absent effect is itself a prediction of the coverage account, not a failed replication: below the floor, too few rollouts complete the chain for any credit geometry to have a gradient to exploit, so the mechanism correctly anticipates *both* where the effect appears (above-floor Qwen3) and where it vanishes (below-floor Llama-3.1 and 4B). Scale alone does not fix this grounding deficit: Llama-3.3-70B scores 0/32 on the same tasks with the same traverses-but-does-not-consume signature, despite well-formed tool calls on 81% of its rollouts. The above-floor cross-family confirmation of the credit-geometry *effect* comes on the second benchmark: on BFCL V3, where a tool-specialized Llama-3.1 agent clears the floor, concentration again underperforms uniform (below). (On τ^2 -bench itself, no open non-Qwen family we tested clears the floor.)

Resolution gate. In the telecom domain, where the dense signal’s intermediate material is too thin to separate arms, the comparison is null. This is the second axis—signal density—gating the *visibility* of the coverage mechanism. The mechanism itself ($k = 1, C \gg k$) holds structurally across all three settings: retail-14B, retail-4B, and telecom-14B.

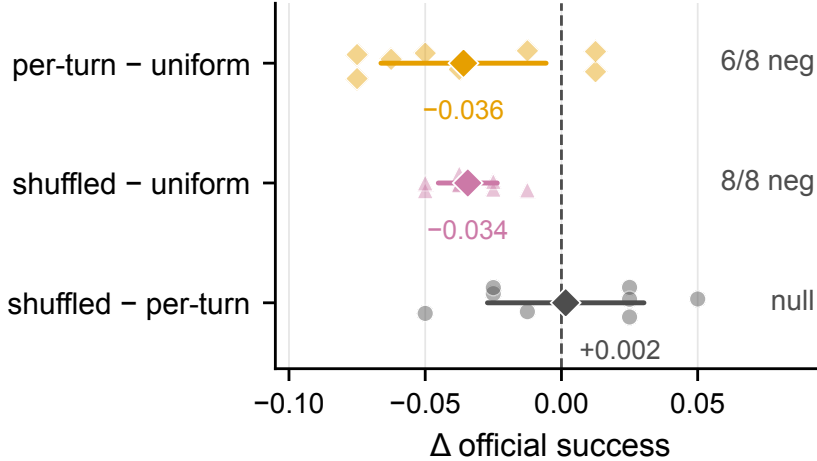


Figure 6: **Second-benchmark reproduction on BFCL V3** (8 paired seeds; faint markers are per-seed differences, diamonds means with paired 95% CIs). Per-turn (checker-visible) and shuffled are both harmful relative to uniform, while the direct shuffled–per-turn contrast is null, reproducing the targeting null—concentration is the harm, targeting second-order, exactly as on τ^2 . All arms share each seed’s training rollouts and a single fresh evaluation batch (Appendix B).

Second-benchmark reproduction (BFCL). Finally, we test the coverage prediction outside τ^2 -bench entirely. BFCL V3 multi-turn [22] has a state-based checker that verifies the backend state *after every turn*—a natively per-turn, non-oracle verifier. Measuring its structure shows that even this checker exposes only the state-changing steps, a median of 2 of a 5–6-step tool chain ($V_d \approx 0.4$), well below the synthetic crossover $V_d^* \approx 0.8$ (§5.3)—so the coverage account predicts uniform should win here too, and it does—and the full §4 targeting-falsification structure reproduces with it. In a same-batch four-arm comparison (8 seeds), restricting the shared-rollout advantage to the checker-visible steps (per-turn concentration) *underperforms* spreading it uniformly across all turns (the same uniform geometry as on τ^2) on held-out official success: $\Delta(\text{per-turn} - \text{uniform}) = -0.036$ (paired $t = -2.80$, $p = 0.027$; 6/8 seeds negative; a continuous per-step support metric trends the same way). Redistributing the *same* concentrated credit onto *random* turns is equally harmful— $\Delta(\text{shuffled} - \text{uniform}) = -0.034$ (8/8 seeds negative, $t = -7.5$, $p < 0.001$)—and shuffled minus per-turn is $+0.002$, with its 95% interval contained within ± 0.031 , below the concentration deficit itself: the same targeting null as on τ^2 , now on a second benchmark with a natively per-turn verifier (Fig. 6). The comparison is within-run paired: all arms share each seed’s training rollouts and the same fresh evaluation batch, so between-batch evaluation drift cancels in the difference (Appendix B). The reproduction also carries a descriptive fact that does not depend on the RL outcome: *even natively streaming state verification leaves the majority of the causal chain unobserved*, placing a second benchmark in the coverage regime—and there, as on τ^2 , uniform coverage wins.

Cross-family reproduction of the effect (BFCL). Having reproduced the effect on a second benchmark within Qwen3, we ask whether it is confined to Qwen3 at all. We repeat the shared-rollout uniform-vs-concentrated comparison on **ToolACE-2-8B** [11], a tool-specialized model in the independently pretrained Llama-3.1 family (38.4% BFCL V3 multi-turn official), which satisfies the same pre-registered eligibility criteria as the Qwen3 runs: valid tool-call parsing, training

above the variance floor, and update dynamics matched to Qwen3.² Concentrating credit on the checker-visible steps again underperforms uniform spreading. The pre-registered 8-seed main set is negative on 7/8 seeds ($\Delta(\text{concentrated} - \text{uniform}) = -0.034$, $t = -2.20$)—a magnitude matching the within-Qwen3 BFCL effect, though its 95% CI narrowly includes zero ($[-0.071, +0.003]$). Following the pre-registered analysis plan we then ran a 4-seed replication, which returned 4/4 negative ($\Delta = -0.044$, $t = -2.65$), and a further pre-registered 20-seed replication that is significant on its own ($\Delta = -0.054$, $t = -5.73$, 95% CI $[-0.073, -0.034]$; 18/20 negative). The pooled 32-seed estimate is $\Delta = -0.048$ ($t = -6.54$, 95% CI $[-0.063, -0.033]$; 29/32 negative). We report the main set, each replication, and the pooled estimate separately, as pre-registered. An above-floor non-Qwen agent thus shows the same concentration-underperforms-uniform result: the credit-geometry effect is not confined to a single model family.

Breadth dose-response. The coverage account makes a finer prediction than a two-point contrast: at a fixed total credit budget, performance should rise monotonically with the fraction of the chain covered. A pre-registered five-arm sweep on the same frozen ToolACE rollouts confirms it (Fig. 7; 20 seeds; official success; all arms share each seed’s training batch and are evaluated in one common batch per seed; full table and protocol in Appendix G). Holding $\sum_t |a_t| = |A_i|$ fixed, concentrating the advantage on a single turn costs -0.048 relative to spreading it over all turns ($a_t = A_i/n$; $t = -7.84$; 18/20 negative); widening to the checker-visible steps recovers $+0.031$ ($t = 3.12$), and widening further to every tool call recovers another $+0.027$ ($t = 3.05$), reaching parity with full coverage ($+0.010$, 95% CI $[-0.007, +0.027]$). The targeting null reproduces inside the sweep: shuffling the checker-visible credit onto random turns shifts it by a statistically indistinguishable $+0.014$ (90% CI within ± 0.037) while both arms stay below uniform. Doubling the concentrated arm’s learning rate—driving its post-update KL two orders of magnitude above uniform’s—still leaves it -0.024 below uniform ($t = -2.70$). Coverage and scale decompose cleanly: breadth accounts for the ladder above, and the standard un-normalized allocation contributes a further $+0.033$ over the all-turns-normalized variant ($t = 3.08$)—full chain coverage is necessary, and the standard terminal advantage completes the gain.

Reward-to-go restores prefix coverage. The account also makes a prediction about the classical remedy for delayed credit: reward-to-go redistribution should succeed *because it restores prefix coverage*, not because it targets better. With a purely terminal reward, per-turn returns-to-go are constant across the trajectory—the classical estimator already *is* the uniform allocation in this regime; concentration arises only when an intermediate progress signal invites it. A pre-registered reward-to-go arm built from the intermediate progress signal, on the BFCL Qwen3-8B rollouts (5 seeds, same frozen-batch, common-batch protocol), confirms the prediction: reward-to-go lands at parity with full coverage ($+0.025$ vs. the normalized all-turns arm, 95% CI $[-0.019, +0.069]$) and above checker-visible concentration ($+0.045$, CI $[+0.003, +0.087]$; Appendix G).

The coverage regime is the common case. BFCL is not an outlier. Table 3 surveys the verifier structures of widely used agentic-RL benchmarks: measured V_d for the two we measure directly (this work), and the verifier’s structural type elsewhere. Terminal-state verification predominates—for such verifiers, the collapse of observable per-turn progress to the final step ($k=1$) is an analytical

²Concretely, parser validity 0.556, non-degenerate training success 0.281, and pre-registered update-dynamics parity 0.996; the training subset was chosen by the *same* model-specific variance screen used for Qwen3, with the held-out 20 tasks held identical (train-task overlap Jaccard 0.167), so the comparison is procedure-matched rather than task-matched. Non-tool turns, which ToolACE’s chat template serializes without an empty tool-call field, were normalized identically across both arms.

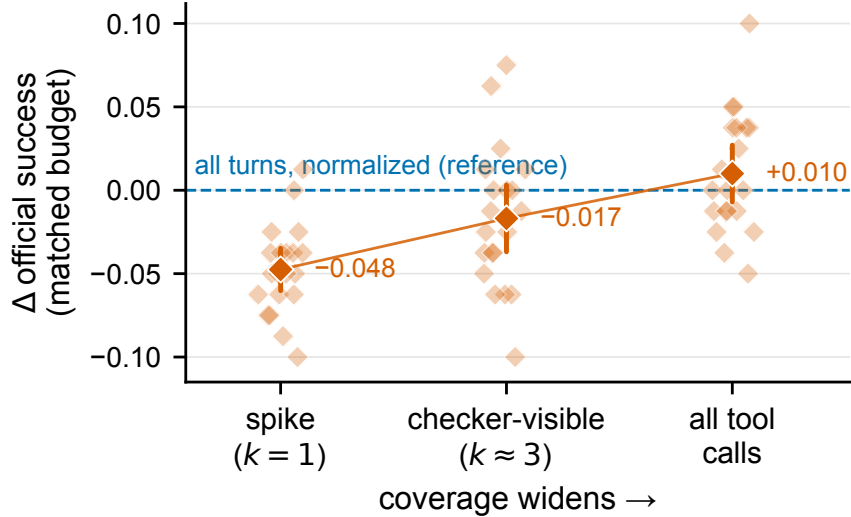


Figure 7: **Matched-budget coverage dose-response** on the frozen ToolACE rollouts (20 seeds; official success). Coverage widens left to right at fixed total credit $\sum_t |a_t| = |A_i|$; faint markers are per-seed differences against the all-turns-normalized reference (dashed line), diamonds means with paired 95% CIs. The deficit shrinks monotonically and vanishes at full chain coverage; adjacent steps are significant at $p < 0.01$ (Appendix G).

property of the reward code, not an empirical parameter—and the two directly measured points, τ^2 ’s terminal DB check ($V_d \approx 0.15$) and BFCL V3’s natively per-turn state checker ($V_d \approx 0.4$), both fall well below the crossover $V_d^* \approx 0.8$. Even ToolSandbox, the intermediate-milestone exception, exposes only part of the chain.

7 Related work

Adding intermediate signal. Turn-level reward methods, turn-level critics, and learned per-step calibration [13, 20, 24, 27, 28] add *new* intermediate supervision—a *learned* per-turn signal, in the tradition of process supervision [10]. Our harmful arm is a *naive structural* concentration (progress-derived ΔS) with zero new information, and our coverage account predicts exactly when such methods help: a learned signal wins to the extent it restores coverage of the causal chain that the structural signal collapses ($k=1$). In the language of §5.3, such methods raise an *effective*, data-driven V_d —a learned model recovering per-turn signal, subject to its own bias and the localization risk below—which is distinct from the structural V_d swept in §5.3. Their gains over outcome-only baselines are thus *compatible with* the high- V_d prediction. We characterize the coverage gap such methods must close, and the $C \gg k$ regime in which zero-information uniform spreading is already a strong default. We further note that a learned signal that *localizes* credit onto a few turns inherits the same coverage risk our structural concentration arms expose: localization is unreliable exactly in the $C \gg k$ regime that terminal-verifier agents occupy. Structural step-level schemes [5] construct fine-grained per-step advantages from repeated states without new supervision; our account predicts that their benefit tracks the chain coverage the step-level signal restores, and the matched-concentration shuffled control is the guard that separates coverage from targeting in any fixed-budget redistribution. Classical credit assignment—potential-based shaping [14], return

Benchmark	Verifier	Checked	V_d
τ^2 -bench [3]	final DB state	terminal	0.12–0.20 (measured)
BFCL V3 multi-turn [22]	backend state per turn (writes only)	per-turn	≈ 0.4 (measured)
SWE-bench [9]	post-patch test suite	terminal	$k=1$ (from scoring code)
WebArena [26]	final page/URL state (state-scored tasks)	terminal	$k=1$ (from scoring code)
OSWorld [21]	final system state	terminal	$k=1$ (from scoring code)
AppWorld [18]	final-state unit tests	terminal	low (structural)
ToolSandbox [12]	trajectory milestones	intermediate	partial
ScienceWorld [19]	simulator score per step	per-step	high (non-tool domain)

Table 3: Verifier structures across agentic benchmarks. “low (structural)” denotes terminal-state verification, which collapses the observable per-turn signal to $k=1$ (§5.2); measured values are from this work. For SWE-bench, WebArena (state-scored task types), and OSWorld, $k=1$ —and hence $V_d = 1/C \leq \text{write-fraction}$ (Eq. 1)—follows analytically from the official scoring harnesses, which invoke the task verifier once on the terminal state (pinned commits: SWE-bench f7bbbb2, `run_evaluation.py`; WebArena dce0468, `evaluators.py`; OSWorld 7a17d3a, `desktop_env.py`). The coverage regime is the common case.

decomposition [2], and hindsight credit assignment [7]—reshapes where credit lands; at $C \gg k$, however, coverage breadth dominates that location. **Reward richness.** Tool-use reward shaping and the sparse-to-dense result [15, 17] establish that richer feedback can help; our contribution is orthogonal, isolating the geometry of how the same terminal advantage is distributed. **Token-level uniformity.** Sequence-level control of token-level ratio variance within one response [25] is a mechanistic precedent at a different granularity; our contribution is the multi-turn rollout coverage account and its phase boundary. **Coverage over credit routing.** A recent report reaches a parallel conclusion at the module level [6]: routing a fixed zeroth-order perturbation budget across the modules of a frozen tool-using LLM agent by trajectory-level failure credit does not improve on-pool sample efficiency over uniform allocation, the loss under credit-routed schedules scales with how often the bottleneck module is starved of updates, and a pre-registered credit-free coverage floor removes the detected harm. That setting routes a perturbation budget across *parameters* under gradient-free optimization rather than a terminal advantage across *turns* under policy gradients; the shared conclusion—uniform coverage is the default that credit-routed concentration must beat—is complementary to ours.

8 Limitations

The mechanism is characterized for terminal-verifier tool agents in the $C \gg k$ regime—the common case for DB/state-verified agents, above the capability floor. The structural ingredients ($k = 1$ with $C \gg k$; $C = 5\text{--}8$ on retail) are measured *across two model families* (Qwen3 and Llama-3.1) and three τ^2 task settings (retail-14B, retail-4B, telecom-14B), and the phase boundary is established in a domain- and algorithm-agnostic toy, so the account is not retail- or Qwen-specific. The credit-geometry *effect* is confirmed across model families on BFCL V3—a tool-specialized Llama-3.1 agent (ToolACE-2-8B) reproduces concentration $< \text{uniform}$ above the floor and passes the matched-budget breadth sweep (§6)—but on τ^2 -bench itself it is observed only within Qwen3, the only open family of this scale class that cleared that benchmark’s floor in our tests.

Our real-model comparisons isolate the first policy update; longer-horizon training dynamics are outside the scope of this study. The toy—where concentration wins at $C \leq k$ *despite* higher per-update variance—rules out per-token gradient variance (which uniform spreading also minimizes)

as the sole explanation, and the matched-budget sweep separates coverage from update scale on the real model (§6). The Qwen3-8B battery (§4) is reported directionally, its arms having been trained in separate runs (Appendix B).

This also motivates a *methodological* recommendation: because changing credit geometry moves concentration and optimization dynamics together, any claim that a learned or oracle per-turn signal helps by better *localization* (rather than by broadening coverage or changing effective step size) should be tested against a matched-concentration shuffled control; absent that control, reported per-turn gains are confounded.

A The per-turn deficit holds across the trainable dose range

The geometry result (per-turn < uniform) could in principle be specific to the single optimizer dose used in the main experiments, or to a difference in effective update magnitude between geometries. It is not. We swept the update strength across the full range in which the policy remains trainable (Table 4). At the gentle main-experiment dose the per-turn arm trails uniform by 0.053 (5 seeds). Pushing the effective dose $40\times$ (single-epoch, so the importance ratio stays near one and training cannot diverge in-step) over-steps the policy—both arms degrade—and the per-turn deficit *widens* to 0.20 (paired bootstrap CI $[-0.33, -0.02]$ on the seed that does not fully collapse). Raising the learning rate under two-epoch updates instead diverges (the asymmetric treatment of negative-advantage turns across epochs blows up the off-policy ratio), bounding high-dose stability under multi-epoch updates. Across every trainable dose, per-turn $\leq$ uniform.

Dose regime	rel. LR	stable?	$\Delta(\text{per-turn} - \text{uniform})$	seeds
Gentle (main)	$1\times$	yes	-0.053	5
Aggressive (single-epoch)	$40\times$	trains, policy over-steps	-0.20 (CI $[-0.33, -0.02]$)	2
High-LR, two-epoch	$10\text{--}40\times$	diverges	— (untrainable)	2

Table 4: Per-turn concentration underperforms uniform across the entire trainable dose range. Δ on held-out assert-support; negative = per-turn worse.

B Between-batch evaluation variability, and why all comparisons are within-run paired

Our held-out evaluation samples 4 rollouts per task over 19 tasks. To quantify the run-to-run variability of this estimator we re-evaluated the *same* four trained uniform adapters on the *same* task set in a fresh evaluation batch under an identical configuration (same split, sampling, serving stack, and user simulator). Per-seed assert-support moved by +0.061, -0.042, +0.112, and +0.159 between batches, and a third re-evaluation of the same adapters spans a range of about 0.07. The same instability recurs on BFCL: re-evaluating the same trained adapters in a fresh batch shifts official success by a mean of -0.009 over a range of $[-0.05, +0.04]$ across seeds—itsself the size of the credit-geometry effect we measure there, which is exactly why the BFCL arms (including the shuffled control) are compared within-run paired. These measurements motivate our reporting rule: confirmatory numeric arm comparisons use a **within-run paired** design—competing credit geometries share the same training rollouts and are evaluated on identical task instances in the same batch, so batch-level environment and simulator noise affects both arms equally and cancels in the paired difference (this holds for the main τ^2 arms, the V_d arms, and the BFCL reproduction). Inference likewise respects the seed hierarchy: for uniform - binary, a paired hierarchical bootstrap

that first resamples the five seeds and then the 19 paired tasks within each selected seed gives a mean difference of +0.0789 with percentile 95% CI [+0.0085, +0.1492] (20,000 replicates, fixed random seed). Auxiliary arms trained and evaluated in separate runs (the gold/random/write/read battery of §4) are reported directionally, not as effect-fraction estimates. A matched-batch paired design is the inexpensive guard we recommend for per-turn credit-assignment comparisons at small evaluation budgets.

C Synthetic environment specification

The controlled environment of §5.1 and §5.3 is a T -turn episodic task with known causal structure, small enough to sweep exhaustively. **Task.** Each episode has $T=12$ turns ($T=24, 48$ in the horizon sweep); turn t presents a fixed random unit-norm feature $\phi_t \in \mathbb{R}^8$ and the policy picks one of K actions ($K=5$; $K=10$ in the V_d sweep, which keeps the uniform arm off its performance ceiling so the crossover location is visible). A hidden subset of C turns is causally necessary, each with one designated correct action. Under the *independent* structure the return is the fraction of causal turns answered correctly; under the *chain* structure a causal turn counts only if all earlier causal turns are also correct, mirroring the prerequisite reads of §5.2; a *graded* variant replaces the binary causal set with per-turn relevance weights. **Policy and update.** The policy is a two-layer MLP (hidden width 16, parameters shared across turns) mapping ϕ_t to a softmax over actions. Each update samples a group of $G=24$ rollouts, computes the group-normalized terminal advantage A_i (GRPO), distributes it across turns according to the arm, and applies a policy-gradient step; training runs 400 steps at learning rate 0.6 under a global gradient-norm clip of 1.0, which matches the effective step size across arms and algorithms. The algorithm-agnostic check replaces the group normalization with a batch-mean baseline and with plain REINFORCE at the same learning rate and clip. **Arms.** Uniform spreads A_i/T over all turns (the budget-normalized counterpart of the real-model sweep’s all-turns arm). Concentrated places the credit on a budget of k turns ($k=3$ in the C -sweep over $C \in \{1, 2, 3, 4, 6, 8, 10, 12\}$); in the V_d sweep the targeted arm receives an independent group-normalized per-turn signal on the verifier-exposed causal turns plus the terminal residual on the final causal turn. Every arm is rescaled per rollout so that its total absolute credit equals $|A_i|$; arms differ only in credit shape, never in magnitude. **Scale.** The C -sweep uses 6–12 paired seeds per point; the V_d sweep uses 32 paired seeds; k_{eff} is the participation ratio of the mean per-turn absolute credit. Re-running the V_d sweep at hidden widths 8 and 32 and action counts $K=5$ and $K=20$ leaves the crossover within [0.79, 0.88] (baseline 0.81).

D Real-model training configuration

All real-model comparisons use the same GRPO/LoRA stack (harness names in the footnote of §2); per-benchmark settings are below. Within a benchmark, arms differ *only* in the reward argument. The τ^2 experiments run on single data-center GPUs of the NVIDIA H100/H20 class (94–96 GB); the BFCL and ToolACE experiments, including the breadth and reward-to-go sweeps, run on single 96 GB NVIDIA RTX PRO 6000 workstation GPUs. vLLM serves rollout collection and evaluation and PyTorch/PEFT performs LoRA training on Linux (libraries listed in the released harness); each (arm, seed) chain fits on one GPU. PPO-ratio clipping is essentially inactive throughout: the clipped-token fraction stays below 1% in every τ^2 and BFCL arm and below 2.5% on ToolACE, with no arm separation. At the main dose the two τ^2 geometries also displace the policy equally: per-seed post-update KL from the base policy lies in the same 5×10^{-4} – 1.1×10^{-3} band for uniform and per-turn. Group-level trainability separates the reward types: under binary, 0.50–0.75 of τ^2

training groups have nonzero advantage variance (mean 0.65), versus 0.75–1.00 (mean 0.90) under the dense arms—quantifying the non-degenerate group signal of §3.

	τ^2 -bench	BFCL V3 multi-turn
Optimizer	GRPO (clip 0.2)	GRPO (clip 0.2)
Gradient-norm clip	1.0	1.0
LoRA rank	16	16
Learning rate	5×10^{-5}	5×10^{-5}
KL coefficient	10^{-3}	6×10^{-4}
Epochs per update	2	2
Training batch	8 tasks $\times$ group 6	8 tasks $\times$ group 4
Max sequence length (train)	8,000	8,000
Held-out evaluation	19 gradable tasks $\times$ 4	20 tasks $\times$ 4
Sampling temperature (eval)	0.7	0.7

Table 5: Training and evaluation configuration for the real-model comparisons.

E Metric definition and evaluation protocol

Formal definition of held-out assert-support. For task q , let d_q^0 , d_q^* , and $\hat{d}_{saqj}$ be the flattened initial, gold-replayed, and predicted terminal database states for seed s , arm a , and rollout j . Define the gold-modified existing-field set

$$M_q = \{k \in \text{dom}(d_q^0) \cap \text{dom}(d_q^*) : d_q^0(k) \neq d_q^*(k)\}.$$

The rollout score is

$$S_{saqj} = \frac{1}{|M_q|} \sum_{k \in M_q} \mathbf{1}[\hat{d}_{saqj}(k) = d_q^*(k)],$$

where a missing predicted key is read as its initial value $d_q^0(k)$; if M_q is empty the evaluator falls back to the official binary outcome. This evaluation quantity is distinct from the training-time per-turn support, whose target set also includes gold-created keys. For each task we average its four rollout scores, then take an unweighted macro-average over the 19 frozen gradable tasks; reported contrasts average within-seed differences of these task-macro means, and no rollout or task-seed cell is treated as an independent seed.

Frozen gradable subset. The pre-results task-property rule is $|G_q| \geq 2$, where G_q counts all gold DB changes including created fields. It selects exactly the held-out task IDs 1, 9, 11, 22, 30, 49, 56, 73, 74, 75, 81, 85, 86, 90, 91, 93, 94, 98, and 100. Official task success is computed over all 20 held-out tasks; assert-support over the 19 gradable ones.

User environment and decoding. In the τ^2 campaign the user simulator is the fixed base Qwen3-14B served from the same local vLLM endpoint as the evaluated agent, with temperature 0.5, at most 512 generated tokens per user turn, and thinking disabled; evaluation seeds also seed the serving stack. The BFCL campaign has no generative user simulator: each user turn is the benchmark’s fixed multi-turn prompt, and the evaluated Qwen3-8B agent samples at temperature 0.7 with at most 512 tokens.

F Additional coverage and targeting diagnostics

The causal-chain length is insensitive to its definition. Table 6 recomputes C under three definitions—every executed tool call, distinct executed tools, and the data-flow ancestors of the terminal write (precursor reads plus the write)—on the retained raw-trace archive of official-success τ^2 -retail rollouts. All three plug-in V_d values are at most 0.167, consistent with the main-text diagnostic range ($C = 5\text{--}8$; $V_d = 0.12\text{--}0.20$) and roughly fivefold below the synthetic crossover.

On the same archive, 72 of 76 unique identifiers consumed by the terminal writes (94.7%) do not appear in the user instruction, so the write’s arguments cannot be assembled from the instruction alone.

Definition of C	Median [IQR]	V_d
Executed tool calls	8 [6, 11.25]	0.125
Distinct executed tools	6 [4.75, 6.25]	0.167
Provenance ancestors	6 [3.75, 7.25]	0.167

Table 6: Sensitivity of the causal-chain length C to its definition (16 official-success rollouts from the retained raw-trace archive; V_d is the plug-in ratio with measured median $k_{\text{eff}} = 1.0$). The low-density diagnosis does not depend on how C is counted.

The geometry deficit holds on official task success. The main-text geometry result uses held-out gradable assert-support; it reproduces on official task success, the deployed metric. Across the five retail-14B seeds official success is 0.41/0.34/0.44/0.43/0.40 for uniform and 0.36/0.34/0.31/0.33/0.36 for per-turn (Table 7); the paired difference per-turn – uniform is -0.063 (paired $t = -2.80$, 4/5 negative with one tie), the same sign and comparable magnitude as the assert-support deficit. Concentrating the terminal advantage on progress turns underperforms uniform on the metric practitioners optimize, not only on the proxy.

arm	s1	s2	s3	s4	s5	mean
base (untrained)	0.41	0.34	0.38	0.36	0.35	0.367
uniform	0.41	0.34	0.44	0.43	0.40	0.403
per-turn	0.36	0.34	0.31	0.33	0.36	0.340
Δ (per-turn – uniform)	-0.05	0.00	-0.13	-0.10	-0.04	-0.063

Table 7: Per-seed official task success on τ^2 -bench retail-14B (held-out 20 tasks). The geometry deficit reproduces on official success: per-turn – uniform = -0.063 (paired $t = -2.80$, 4/5 negative, one tie), matching the assert-support result on the deployed metric. The untrained base is evaluated in the same batches as the trained arms: uniform gains +3.6pp over the untrained policy while per-turn falls 2.7pp below it. Per-seed entries are rounded to two decimals; means are computed from unrounded values.

G The pre-registered credit-breadth sweep on ToolACE

The sweep reuses the frozen rollout batches of the 20-seed ToolACE replication (§6). For each seed, five new arms—a single-turn spike ($k=1$, placed on the turn carrying maximal checker-visible progress), the checker-visible weights shuffled onto random turns, all executed tool calls ($k \approx 5\text{--}6$),

all turns ($a_t = A_i/n$, where n is the rollout’s turn count), and the checker-visible arm at doubled learning rate—are trained from the same batch under the identical configuration (Table 5), and all arms, including the archived uniform and checker-visible-steps ($k \approx 3$) adapters, are re-evaluated in a single common batch per seed (one evaluation session, identical task order, held-out 20 tasks $\times$ 4 rollouts; official success; Table 8). Every budget-matched arm redistributes the same group-normalized terminal advantage with $\sum_t |a_t| = |A_i|$, enforced to numerical precision. A data-flow oracle set in the sense of the τ^2 diagnostic is not constructible on BFCL (median provenance set size 1), so the pre-registered fallback, all executed tool calls, serves as the widest concentrated arm.

arm (k_{eff})	Δ vs. uniform ($a_t = A_i$)	Δ vs. all-turns normalized
spike (1)	-0.081 ($t = -7.75$; 18/20 neg.)	-0.048 ($t = -7.84$; 18/20 neg.)
checker-visible steps (≈ 3)	-0.050	-0.017 ($t = -1.76$)
shuffled, matched count (≈ 3)	-0.036 ($t = -2.34$)	-0.003
all tool calls (≈ 5 –6)	-0.023 ($t = -2.21$)	$+0.010$ (CI $[-0.007, +0.027]$)
all turns, normalized (n)	-0.033 ($t = -3.08$)	0
checker-visible at $2 \times$ LR	-0.024 ($t = -2.70$)	$+0.009$

Table 8: Breadth sweep on ToolACE (20 seeds, per-seed paired, official success). Signs follow the stated contrast direction (named arm minus reference). Adjacent-step contrasts: spike $\rightarrow$ checker-visible $+0.031$ ($t = 3.12$); checker-visible $\rightarrow$ all tool calls $+0.027$ ($t = 3.05$). The $2 \times$ -LR arm’s post-update KL is 0.60 versus uniform’s 0.006; it brackets the deficit from above. Re-evaluating the archived arms in the common batch reproduces the archived contrast (-0.050 vs. -0.054).

Reward-to-go on Qwen3-8B. A pre-registered companion experiment reuses the frozen rollout batches of the BFCL Qwen3-8B campaign (5 seeds): three budget-normalized breadth arms (the single-turn spike, all tool calls, and all turns) and a reward-to-go arm ($w_t \propto \sum_{t' \geq t} \Delta S_{t'}$, the classical delayed-credit remedy) are trained per seed, and all eight arms—including the four archived ones—are evaluated in one common batch per seed. No re-evaluated archived contrast reverses its archived direction. Reward-to-go scores highest of all eight arms (0.340): $+0.025$ over the normalized all-turns arm (95% CI $[-0.019, +0.069]$; parity with full coverage), $+0.045$ over checker-visible concentration (CI $[+0.003, +0.087]$), and $+0.020$ over progress-targeted concentration—as the coverage account predicts, since reward-to-go propagates the terminal signal to every turn preceding the last progress point. The concentrated-arm deficits at this scale are directionally consistent (spike -0.018 ; 4/5 negative) but do not resolve the intermediate rungs at five seeds; the 20-seed matched-budget ToolACE sweep above resolves the full staircase.

References

- [1] Marcin Andrychowicz, Filip Wolski, Alex Ray, Jonas Schneider, Rachel Fong, Peter Welinder, Bob McGrew, Josh Tobin, Pieter Abbeel, and Wojciech Zaremba. Hindsight experience replay. In *Advances in Neural Information Processing Systems*, 2017.
- [2] Jose A. Arjona-Medina, Michael Gillhofer, Michael Widrich, Thomas Unterthiner, Johannes Brandstetter, and Sepp Hochreiter. RUDDER: Return decomposition for delayed rewards. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- [3] Victor Barres, Honghua Dong, Soham Ray, Xujie Si, and Karthik Narasimhan. τ^2 -bench: Eval-

- uating conversational agents in a dual-control environment. *arXiv preprint arXiv:2506.07982*, 2025.
- [4] Yangyi Fang, Jiaye Lin, Xiaoliang Fu, Cong Qin, Haolin Shi, et al. Proximity-based multi-turn optimization: Practical credit assignment for LLM agent training. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Industry Track)*, 2026.
 - [5] Lang Feng, Zhenghai Xue, Tingcong Liu, and Bo An. Group-in-group policy optimization for LLM agent training. *arXiv preprint arXiv:2505.10978*, 2025.
 - [6] Yuxu Ge. Coverage, not credit: Failure-credit routing of zeroth-order perturbation budgets does not improve on-pool sample efficiency for LLM agents. *arXiv preprint arXiv:2608.28011*, 2026.
 - [7] Anna Harutyunyan, Will Dabney, Thomas Mesnard, Mohammad Gheshlaghi Azar, Bilal Piot, Nicolas Heess, Hado van Hasselt, Greg Wayne, Satinder Singh, Doina Precup, and Rémi Munos. Hindsight credit assignment. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
 - [8] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Chen, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022.
 - [9] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, et al. SWE-bench: Can language models resolve real-world GitHub issues? *arXiv preprint arXiv:2310.06770*, 2023.
 - [10] Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, et al. Let’s verify step by step. *arXiv preprint arXiv:2305.20050*, 2023.
 - [11] Weiwen Liu, Xu Huang, Xingshan Zeng, Xinlong Hao, Shuai Yu, Dexun Li, et al. ToolACE: Winning the points of LLM function calling. In *International Conference on Learning Representations (ICLR)*, 2025. <https://arxiv.org/abs/2409.00920>.
 - [12] Jiarui Lu, Thomas Holleis, Yizhe Zhang, Bernhard Aumayer, Feng Nan, Felix Bai, Shuang Ma, Shen Ma, Mengyu Li, Guoli Yin, Zirui Wang, and Ruoming Pang. ToolSandbox: A stateful, conversational, interactive evaluation benchmark for LLM tool use capabilities. *arXiv preprint arXiv:2408.04682*, 2024.
 - [13] Wachiravit Modecrua, Krittanon Kaewtawee, Krittin Pachtrachai, and Touchapon Kraisingkorn. Multi-turn reinforcement learning for tool-calling agents with iterative reward calibration. *arXiv preprint arXiv:2604.02869*, 2026.
 - [14] Andrew Y. Ng, Daishi Harada, and Stuart Russell. Policy invariance under reward transformations: Theory and application to reward shaping. In *International Conference on Machine Learning (ICML)*, 1999.
 - [15] Cheng Qian, Emre Can Acikgoz, Qi He, Hongru Wang, et al. ToolRL: Reward is all tool learning needs. *arXiv preprint arXiv:2504.13958*, 2025.
 - [16] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.

- [17] Leitian Tao, Ilia Kulikov, Swarnadeep Saha, Tianlu Wang, et al. Hybrid reinforcement: When reward is sparse, it’s better to be dense. *arXiv preprint arXiv:2510.07242*, 2025.
- [18] Harsh Trivedi, Tushar Khot, Mareike Hartmann, Ruskin Manku, Vinty Dong, Edward Li, Shashank Gupta, Ashish Sabharwal, and Niranjan Balasubramanian. AppWorld: A controllable world of apps and people for benchmarking interactive coding agents. *arXiv preprint arXiv:2407.18901*, 2024.
- [19] Ruoyao Wang, Peter Jansen, Marc-Alexandre Côté, and Prithviraj Ammanabrolu. ScienceWorld: Is your agent smarter than a 5th grader? *arXiv preprint arXiv:2203.07540*, 2022.
- [20] Quan Wei, Siliang Zeng, Chenliang Li, William Brown, et al. Reinforcing multi-turn reasoning in LLM agents via turn-level reward design. *arXiv preprint arXiv:2505.11821*, 2025.
- [21] Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, et al. OSWorld: Benchmarking multimodal agents for open-ended tasks in real computer environments. *arXiv preprint arXiv:2404.07972*, 2024.
- [22] Fanjia Yan, Huanzhi Mao, Charlie Cheng-Jie Ji, Tianjun Zhang, Shishir G. Patil, Ion Stoica, and Joseph E. Gonzalez. BFCL v3: Multi-turn and multi-step function calling. Berkeley Function-Calling Leaderboard, 2024. https://gorilla.cs.berkeley.edu/blogs/13_bfcl_v3_multi_turn.html.
- [23] Shunyu Yao, Noah Shinn, Pedram Razavi, and Karthik Narasimhan. τ -bench: A benchmark for tool-agent-user interaction in real-world domains. *arXiv preprint arXiv:2406.12045*, 2024.
- [24] Huining Yuan, Zelai Xu, Huaijie Wang, Xiangmin Yi, et al. Verifiable process rewards for agentic reasoning. *arXiv preprint arXiv:2605.10325*, 2026.
- [25] Chujie Zheng, Shixuan Liu, Mingze Li, Xiong-Hui Chen, et al. Group sequence policy optimization. *arXiv preprint arXiv:2507.18071*, 2025.
- [26] Shuyan Zhou, Frank F. Xu, Hao Zhu, Xuhui Zhou, et al. WebArena: A realistic web environment for building autonomous agents. *arXiv preprint arXiv:2307.13854*, 2023.
- [27] Yifei Zhou, Andrea Zanette, Jiayi Pan, Sergey Levine, and Aviral Kumar. ArCHer: Training language model agents via hierarchical multi-turn RL. *arXiv preprint arXiv:2402.19446*, 2024.
- [28] Yifei Zhou, Song Jiang, Yuandong Tian, Jason Weston, et al. SWEET-RL: Training multi-turn LLM agents on collaborative reasoning tasks. *arXiv preprint arXiv:2503.15478*, 2025.