

Date of publication October 6, 2025.

Digital Object Identifier 10.1109/ACCESS.2025.3618109

Systematic Literature Review of Machine Learning Models and Applications for Text Recognition

NUZHAT KHAN¹, AB AL-HADI AB RAHMAN¹ (Senior Member, IEEE), SHAHRIYAR MASUD RIZVI³, IBRAHIM YOUSEF ALSHAREEF¹, MUHAMMAD NADZIR MARSONO¹, MUHAMMAD PAEND BAKHT⁴ (Member, IEEE), MOHD SHAHRIZAL RUSLI², and SHAHIDATUL SADIAH¹

¹Faculty of Electrical Engineering, Universiti Teknologi Malaysia, Johor Bahru 81310, Malaysia (khan.nuzhat@utm.my), (hadi@utm.my),

(Yousefm@graduate.utm.my), (shahidatulsadih@utm.my), (mnadzir@utm.my)

²Faculty of Artificial Intelligence, Universiti Teknologi Malaysia, Kuala Lumpur 54100, Malaysia (shahrizalr@utm.my)

³Department of Electrical and Electronic Engineering, American International University-Bangladesh, 408/1, Kuratoli 1229, Bangladesh (shahriyar@aiub.edu)

⁴Department of Electrical Engineering, Balochistan University of Information Technology, Engineering and Management Sciences, Quetta 87300, Pakistan (paend.bakht@gmail.com)

Corresponding author: Ab Al-Hadi Ab Rahman (hadi@utm.my).

This work was supported in part by Universiti Teknologi Malaysia with the Flagship CoE/RG research grant number

Q.J130000.5023.10G05 and Q.J130000.5023.10G09, and the Professional Development grant number R.J130000.7113.07E51. This work is licensed under a Creative Commons Attribution 4.0 License. For more information, see <https://creativecommons.org/licenses/by/4.0/>.

ABSTRACT Optical Character Recognition (OCR) for text recognition using machine vision has significantly improved, particularly when handling heterogeneous textual data. Traditional OCR models struggle with script variations, writing styles, and degraded documents. Advancements in technology are leading to new AI models with improved architecture for handling multiple languages and complex data formats. Despite this progress, a comprehensive evaluation of OCR advancements remains limited. Based on the established preferred reporting items for systematic reviews and meta-analysis (PRISMA) guidelines, this literature review presents an extensive assessment of OCR research to trace the evolution of AI models over the past decade. It explores the transition in AI models, application domains, data types, linguistic coverage, and challenges. Through a detailed analysis of 97 selected studies published during January 2015 - January 2025, key OCR models are identified, and their performance, strengths, and limitations are analyzed. The findings highlight how OCR technologies have evolved to address structured and unstructured text, scene text recognition, and multilingual processing. Unresolved challenges include limited resources for underrepresented languages, high variability in handwritten text, visual similarity among characters, and constraints in real-time OCR applications. To address these issues, several promising approaches are proposed. Key suggestions include self-supervised learning, multimodal AI, automated machine learning (AutoML), AI-assisted postprocessing, tiny machine learning (TinyML), and the creation of joint corpora for script matching. The future recommendations aim to enhance OCR accuracy and tackle the challenges identified for real-time industrial applications. This study will guide future research and establish a foundation for OCR field.

INDEX TERMS Optical Character Recognition, OCR, Machine Vision, Deep Learning, Text Recognition, Literature Review.

I. INTRODUCTION

OPTICAL character recognition (OCR) systems have transformed the way we interact with textual information [1]. Recent advancements in artificial intelligence (AI) and machine vision have significantly enhanced the ability of computers to interpret and process visual information. Now,

AI models analyze their surroundings through image processing to extract meaningful insights. One key application of image processing is text extraction, where AI models use OCR to convert printed or handwritten text into a machine-readable format [2]. See a simplified illustration of an end-to-end OCR system for a car license plate recognition in

Figure 1. The process begins with text detection, followed by text segmentation, and concludes with text recognition. Associated techniques, such as text localization and text verification, complement the main process. These dynamic and problem-specific techniques may include multiple steps of image processing, classification, and natural language processing [3]. Initially developed to digitize printed and handwritten documents, OCR has evolved into a standard tool for modern data management and the digital preservation of cultural heritage [4]. Today, OCR technology is widely adopted across various industries for seamless human-computer interaction [5]. In the finance sector, OCR streamlines check processing and fraud detection [6]. In healthcare, it facilitates the digitization of patient records and the automation of medical billing [7]. The education sector benefits from the digitization of books and research papers, which increases access to academic resources [8]. In the legal field, OCR supports contract analysis and digitization of case files [9] while government agencies use it to digitize public records for efficient services [10]–[12]. In logistics, OCR automates data extraction from shipping labels and packaging for rapid inventory management. Retailers implement OCR for receipt scanning and product cataloging. In manufacturing, it assists with quality control and information extraction from documents. The publishing industry utilizes OCR to digitize newspapers and archives for online accessibility [13]. The automotive sector uses it for license plate recognition and vehicle registration [14]. Additionally, OCR aids law enforcement in forensic analysis and identity verification, besides enhancing assistive technologies for visually impaired users and facilitating real-time text translation in augmented reality (AR) and virtual reality (VR) environments [15].

Considering their widespread adoption, modern intelligent systems require fast and accurate OCR models for real-time text recognition. The core of these systems is OCR technology supported by pre-trained AI models to transform analog text into a machine-encoded format [16]. AI-based OCR models use classification techniques to recognize and extract text from images. These models have evolved significantly since their inception [17]. Early OCR systems were built on handcrafted feature extraction, where models identified textual patterns using predefined rules and statistical methods. These approaches, including template matching and optical feature detection, performed well for structured printed text but faced difficulty with font, style, and layout variations. The advent of machine learning improved the capabilities of OCR models to learn representations from labeled data. For instance, techniques such as support vector machines (SVMs) and artificial neural networks (ANNs) enhanced OCR. However, these models required extensive feature engineering and often lacked adaptability for different languages and scripts [18].

The shift towards deep learning has revolutionized OCR and empowered models to learn hierarchical features automatically. Convolutional neural networks (CNNs) became the foundation for printed OCR with convolutional layers to

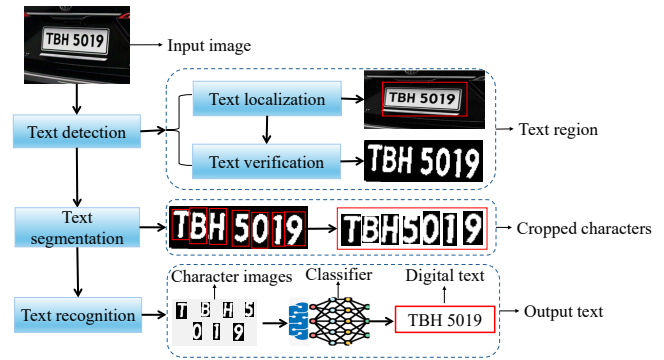


FIGURE 1: Example of end-to-end car plate OCR.

extract spatial features and classify characters [19]. Similarly, different types of recurrent neural networks (RNNs), particularly long short-term memory networks (LSTMs) addressed sequential dependencies in handwritten and cursive text [20]. These methods led to enhanced recognition of connected characters. Transformer-based architectures have recently dominated OCR applications. Models such as TrOCR [21], ViT [22], and CharFormer [23] have achieved state-of-the-art results using self-attention mechanisms for contextual text interpretation. They are characterized by the ability to process multilingual content, recognize handwritten scripts, and navigate complex document layouts [24]. Despite these breakthroughs, OCR systems still fall short of human-level reading. While research in this area is expanding, the absence of a unified review has resulted in a lack of clarity regarding dominant OCR architectures. Moreover, several persistent challenges in OCR applications have not been explored. Many existing literature reviews related to OCR are fragmented due to focusing on individual languages [25], datasets [26], particular scenarios [27] or specific model architectures [28]. Given the growing demand for efficient real-world OCR solutions, a systematic evaluation of current AI-based OCR models is necessary. This review bridges existing gaps by examining the evolution of OCR technologies, their multilingual capabilities, and the primary challenges. It presents a comprehensive and up-to-date synthesis of OCR-based information extraction (IE), extending beyond previous surveys that focused on narrower aspects [2], [29]. By consolidating recent model developments, real-world applications, and multilingual advancements, the review provides a structured meta-analysis of the field. It critically assesses leading architectures, outlines their strengths and limitations, and proposes future research directions to advance the state of OCR systems. The key objectives of this work are as follows:

- A systematic review of existing OCR research to examine state-of-the-art models and supported languages.
- To assess the temporal trends in OCR models from a multilingual recognition and overall accuracy perspective.
- To explore the fundamental challenges encountered by

existing OCR systems.

- To identify the gaps in ongoing OCR research.
- To propose future directions for improved cross-lingual OCR, robust error correction, and better recognition of underrepresented languages.

The remainder of this paper is organized as follows: Section II explains the review methodology. The results and a detailed discussion are presented in Section III, and Section IV concludes the paper.

II. REVIEW METHODOLOGY

A. PROBLEM FORMULATION

Advancements in AI [30] have led to major improvements in computer vision techniques for automatically recognizing text from images using OCR [9]. This progress has introduced many OCR systems, each using unique machine-learning and deep-learning models [2]. Several studies focus on evaluating specific models [31] or testing them on individual languages [32], [33] and datasets [34], [35]. However, no structured review explores the core OCR models. Despite extensive research, a clear gap remains because no comprehensive study identifies the main OCR models, their strengths, and their limitations. A broader analysis is needed to understand the barriers to accurate OCR and to determine which models work best for different problems. This review addresses that gap by examining existing OCR models and their performance for several languages and application domains. Furthermore, it highlights underexplored areas that require additional investigation. These findings will assist researchers in making informed decisions about model selection and advance OCR technology.

B. REVIEW SCOPE

The scope of this review is defined according to the PICOC (population, intervention, comparator, outcomes, context) framework, which supports a well-structured and unbiased analysis [36]. The review focuses on the development and transition of OCR models from January 2015 to January 2025. It is important to note that AI models used in OCR have been extensively studied in other fields, for example [37]. Therefore, this review does not explain the working mechanisms or architectural designs of OCR models. Instead, it examines their application in OCR, performance in different languages and scripts, and the challenges they face. In response to these challenges, the review proposes alternative methods to mitigate the limitations. It includes peer-reviewed journal articles and conference papers published in the last ten years and excludes gray literature, extended abstracts, literature reviews, and non-English studies. The review also omits general computer vision applications (such as self-driving cars reading signboards), non-text image analysis (e.g., satellite imagery with partial textual content), and commercial software evaluations.

C. REVIEW PROTOCOL

Unlike previous systematic reviews that have focused on specific aspects of OCR such as [8], [38], this work comprehensively covers OCR research. We conducted a systematic search across seven major academic databases: ScienceDirect, IEEE Xplore, Scopus, Web of Science, ACM Digital Library, SpringerLink, and Google Scholar. These databases were selected for their broad coverage of AI, machine learning, and computer vision research. Predefined inclusion and exclusion criteria were applied to filter and select relevant studies to ensure a thorough and focused analysis. The primary search strategy involved a combination of Boolean operators and keyword variations to maximize retrieval efficiency. The core search terms in the search string were related to OCR and AI. Figure 2 shows the step-by-step review protocol.

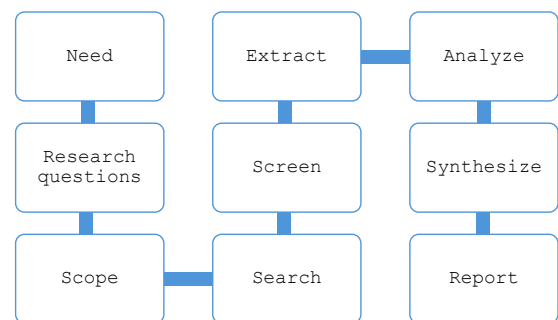


FIGURE 2: Review protocol.

This review protocol was designed to extract, synthesize, and evaluate studies that align with the predefined research objectives. For each database, the search string was modified to refine the search outcomes. We applied additional filters based on publication type, accessibility, and relevance to OCR model development. By applying the inclusion and exclusion criteria, only papers that met the predefined selection parameters were retained for further analysis. While some papers may have indirectly addressed OCR models without explicitly mentioning key terms in their titles, abstracts, or keywords, they were omitted as they fell outside the search scope. The inclusion and exclusion criteria are outlined in Table 1.

Initially, a total of 45959 records were retrieved from various databases (including 1923 from Web of Science, 9039 from Scopus, 21100 from Google Scholar, 10149 from IEEE Xplore, 2480 from SpringerLink, 3121 from ScienceDirect and 689 from ACM Digital Library). After removing irrelevant and inaccessible articles, the database was reduced to 497 articles for title screening. Following this, 310 papers met the eligibility criteria for abstract review. Upon further assessment, only 182 papers proceeded to full-text evaluation due to the inaccessibility of 128 articles. During this phase, we manually excluded duplicate entries and studies that lacked transparent OCR models or evaluation methodologies.

TABLE 1: Inclusion and exclusion criteria

Criteria Type	Description
Period	Focus on recent advancements in OCR. Inclusion: Publications from January 2015 to January 2025. Exclusion: Articles published before 2015.
Language	Only English language articles are included. Exclusion: The articles published in languages other than English.
Type of literature	Only high-quality, peer-reviewed sources are considered. Exclusion: Grey literature such as reports, government documents, working papers, and non-peer-reviewed sources.
Type of source	Only peer-reviewed journal and conference papers are included. Exclusion: Books, preprints, and non-peer-reviewed articles.
Accessibility	Studies must be accessible from major academic databases (IEEE Xplore, Scopus, Web of Science, SpringerLink, ScienceDirect, ACM Digital Library). Exclusion: Articles behind paywalls without institutional access.
Relevance to RQs	Articles must contribute to at least two predefined research questions. Exclusion: Articles that do not address at least two research questions.

D. SEARCH STRATEGY AND DATABASE SELECTION

To retrieve relevant high-quality articles, the search involved multiple iterations in refining keyword combinations. The primary search string included variations of following terms: ("optical character recognition" OR "OCR" OR "text recognition" OR "document digitization" OR "document digitisation" OR "image text extraction" OR "character recognition") AND ("deep learning" OR "machine vision" OR "machine learning" OR Model). Searches were performed between 15–26 January 2025, applying language, date, and article type filters specific to each database. Following the inclusion and exclusion criteria, initial search results were filtered using a full-text screening process. The final dataset selection process is summarized in Table 2. After duplicate removal and full-text analysis, the final dataset comprised 97 articles that met the predefined inclusion criteria. The PRISMA flow diagram in Figure 3 illustrates the step-by-step article selection process. Additionally, distribution of the final database of 97 article with percentages is given in Figure 4.

TABLE 2: Studies retrieved from each database in automated search

Source	Initial Results	Retrieved Articles
Web of Science	1923	870
Scopus	9039	685
Google Scholar	21100	40
IEEE Xplore	10149	689
SpringerLink	2480	509
ScienceDirect	3121	88
ACM Digital Library	627	21

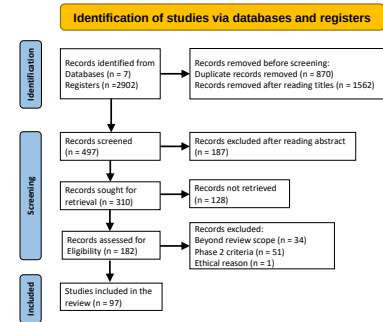


FIGURE 3: PRISMA flow diagram of reviewed literature.

E. RESEARCH QUESTIONS AND MOTIVATION

For this systematic review, we defined three research questions (RQs) that align with the study's primary objectives. These RQs are given below:

- RQ1: What are the dominant AI-based models used in OCR, and how do they compare in terms of accuracy, efficiency, and multilingual performance?
- RQ2: Which writing scripts are well-supported in OCR research, and what gaps exist?
- RQ3: What are the significant challenges in current OCR systems, and what future research directions can address these issues?

Addressing these questions comes with individual and collective benefits. Individually, each question targets a critical dimension of OCR: RQ1 enhances understanding of AI-driven OCR models, RQ2 evaluates script coverage to identify inclusivity gaps, and RQ3 uncovers existing challenges to inform future advancements. Collectively, these inquiries form a comprehensive framework for an improved OCR technology. The combined outcomes will contribute

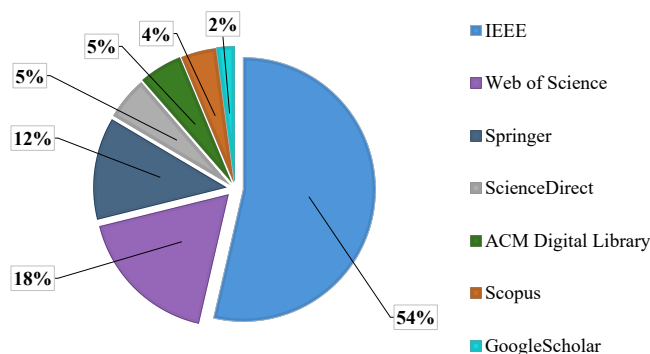


FIGURE 4: Database distribution of the final 97 retrieved articles after systematic screening.

to improving OCR accuracy and efficiency by addressing current limitations.

F. THREATS TO VALIDITY

The quality of a systematic review relies on thoroughly addressing potential threats to validity [39]. In this study, key threats included selection bias, information bias, and biases in the data extraction process. To minimize selection bias, we employed a broad search string followed by a selection strategy based on the method adopted in [40]. During the literature search, no keywords related to a certain model, method, or language were included in the search string. OCR research is captured equally, with statistics analyzed afterward from the final results to show a true research distribution. A second phase of selection criteria was introduced to address information bias, in which studies with ambiguous or missing information were excluded after a full-text review. Additionally, both manual and automated searches were conducted collectively on multiple databases, focusing on publication titles, abstracts, and keywords for thorough coverage of relevant studies.

While the search was restricted to English-language publications within a specific time frame, the large number of identified studies reflects the thoroughness of our approach. A data template was developed to guide information collection and reduce extraction bias. Furthermore, two researchers independently extracted the data, adhering to PRISMA guidelines to ensure consistency throughout the process and prevent disagreements.

III. RESULTS AND DISCUSSION

The overview of the initially retrieved database returned prominent OCR application domains, which are broadly classified into printed and handwritten OCR. Given the multidisciplinary nature of machine vision, it is clear that machines encounter various types of text in different languages and scripts for digitization [41]. OCR research is driven by the growing demand in fields including automatic data entry

[42], license plate recognition [43], passport verification [35], reading traffic signs for automated systems [44], managing traffic flow [45], converting handwriting in pen computing [46] and text to speech conversion to assist individuals with vision impairments [47]. The research published throughout the study period initially focused on OCR model development and data preprocessing methods [12]. From 2016 onward, the OCR applications spectrum expanded in handwritten text recognition [48] and vehicle plate identification [43]. The subsequent research in OCR focuses on complex data types and new application domains, as shown in Figure 5.

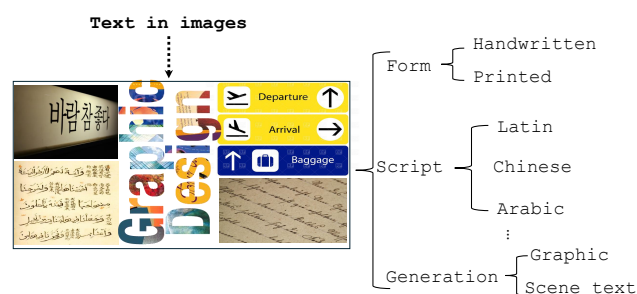


FIGURE 5: Classification of text types in OCR.

A. AI MODELS IN OCR (RQ1)

Classification models form the core of most OCR systems [49], with text recognition typically handled using multi-class classifiers [50]. To analyze the evolution of OCR models over time, a manual review of the final 97 selected studies was conducted. Figure 6 presents the temporal trend analysis of individual models, while Figure 7 illustrates broader classification trends, grouping OCR models into four main categories: conventional machine learning models, deep learning models, transformers, and hybrid models.

1) DOMINANT AND EMERGING DEEP LEARNING MODELS (CNN, LSTM, GAN, TRANSFORMERS)

Since 2015, CNNs have been widely used in image-based recognition tasks [31]. Different CNN architectures experienced steady growth and remained dominant until a surge of handwritten text. LSTM networks gained prominence after 2017 [51] for sequential and bidirectional text. However, their popularity has slightly declined in recent years, likely due to the rise of more advanced alternatives. Since 2020, GANs have attracted increasing attention in OCR research primarily for their ability to generate realistic synthetic data, enhance low-quality images, and refine recognition outputs. Although GANs do not directly perform OCR classification, they are valuable auxiliary techniques to support other OCR models [52]. More recently, OCR has been dominated by Transformer-based deep learning architectures. Since 2020, Transformers have seen significant growth and have largely replaced LSTMs in many OCR-related applications [53]. With dynamic feature selection, Transformers are a superior

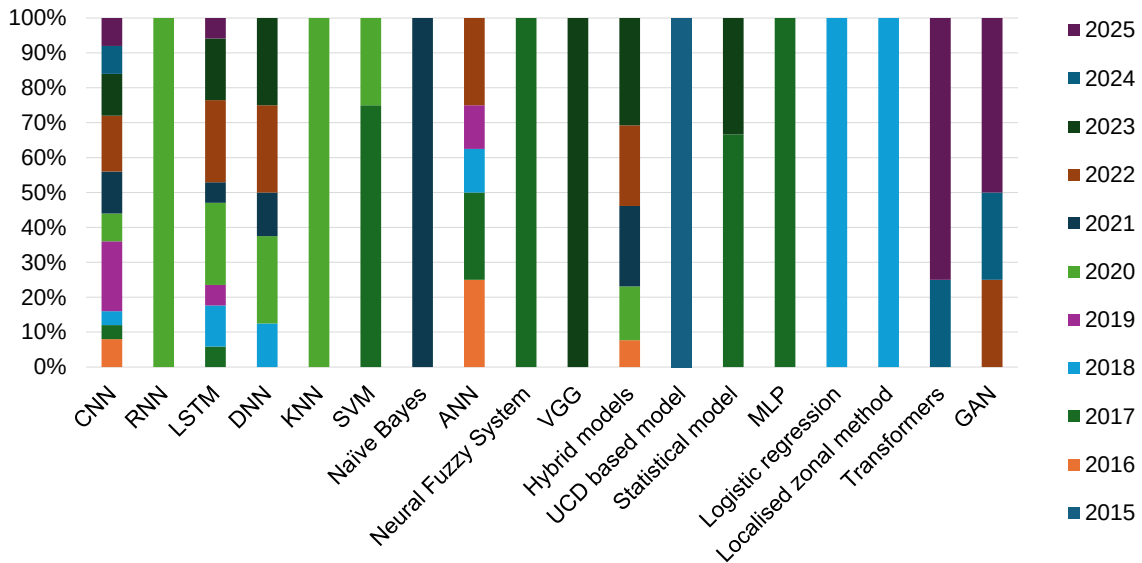


FIGURE 6: Prominent AI models applied to Optical Character Recognition (OCR) over the past decade.

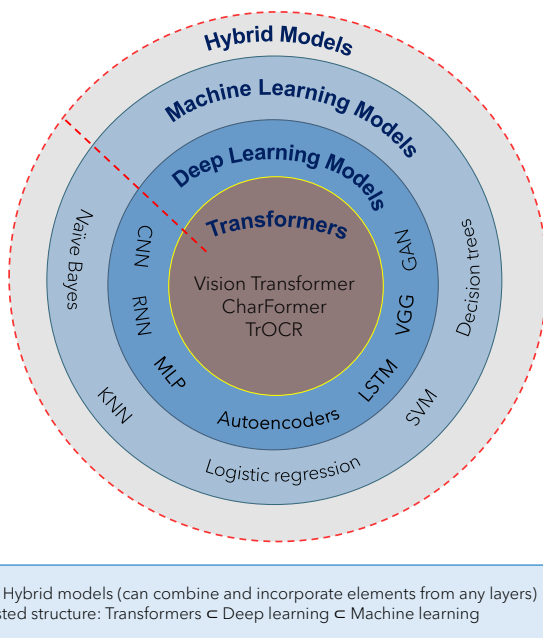


FIGURE 7: Evolution of OCR models architectures in a decade.

alternative to LSTMs for efficiently recognizing sequential data like handwritten text.

2) ADAPTIVE AND EVOLVING HYBRID MODELS AND NEURAL FUZZY SYSTEMS

Hybrid OCR models are important when standalone models deliver suboptimal results. These models enhance text recognition by combining different approaches, especially in

cases where a single method is inadequate due to limited training data or interpretation challenges. When dealing with distorted or ambiguous text, rule-based techniques refine predictions. A great example is Neural Fuzzy Systems, which have gained attention since 2020 for their ability to handle uncertainty and improve decision-making in complex recognition tasks. By integrating fuzzy logic with other learning models, these models efficiently process noisy or highly variable text [54]. Hybrid models are prioritized for recognizing text in languages and scripts with limited training data where characters can appear in different forms.

3) DECLINING TRADITIONAL MACHINE LEARNING MODELS

Before 2019, machine learning models like KNN, SVM, Naïve Bayes, Logistic regression, and statistical models were widely used in OCR [1], [55]. Their appeal came from their ability to recognize text even with limited training data. These models were ideal for early OCR systems when computational resources were scarce and large labeled datasets were hard to obtain. KNN and SVM are commonly applied to character recognition due to their strong classification capabilities, while Naïve Bayes is practical for text-based OCR. At that time, ANN and MLP, as early neural network-based models, helped with pattern recognition [1]. At the same time, logistic regression and statistical models were also used in rule-based approaches to text segmentation and classification. These models excelled in OCR on structured, small-scale datasets where handcrafted features were engineered for specific tasks [56].

However, as OCR tasks grew more complex and the availability of big data increased, the limitations of traditional machine learning became evident. These models require exten-

sive manual feature engineering, which demands domain expertise. While they worked well on simple datasets, they encountered obstacles with large-scale, high-dimensional data, when variations in fonts, handwriting styles, and document layouts introduced complexity beyond their capabilities. As a result, the reliance on traditional machine learning models has steadily declined.

B. TRANSITION IN OCR APPLICATIONS SPECTRUM

The applications of OCR reflect the extensive research and growing popularity of modern OCR systems. Recent research has oriented towards integrating OCR with advanced AI-driven applications shown in Figure 8. OCR, which started with basic document digitization has moved toward a deeper understanding of documents in healthcare and banking [57]. Now, autonomous systems extract text from real-world scenes with higher accuracy. On the other hand, multilingual recognition improves translation for low-resource languages [58]. Assistive technologies use OCR to support visually impaired individuals in reading and navigation [59]. Recently, multi-modal learning in augmented reality (AR)/virtual reality (VR) has been used for user engagement in an immersive environment [60]. Advanced research beyond applied models now addresses complex challenges, broader applications, and the need for stronger, more adaptable systems [61]. Recent publications have mainly focused on multilingual, multi-modal, and high-performance OCR solutions [62].

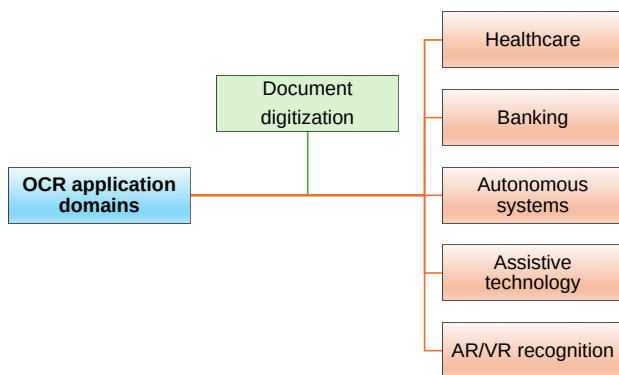


FIGURE 8: Popular OCR application domains. General domains (blue box) initially focused on document digitization (green box) and expanded to other domains (orange boxes).

The AI models in OCR research have evolved from traditional statistical methods to deep learning techniques for higher performance. The performance of OCR is typically evaluated using a variety of metrics including accuracy, precision, recall, F1-score, speed, and specialized metrics like character error rate (CER) and word error rate (WER). However, due to the variations in text formats ranging from individual digits and characters to complete words and sentences, accuracy remains the most consistently reported and broadly applicable evaluation metric in OCR research. Table 3 presents the reported accuracy values of each model on

different datasets. The minimum and maximum accuracy values reflect the performance range observed across separate studies using the same model architecture. These results were extracted directly from the original papers, without averaging or statistical aggregation. It is important to note that studies use various types and amounts of data for training and testing their methods, pre-process and split datasets in different ways. Therefore, it is impractical to suggest the best performing model based on direct comparison. As such, the table describes the reported performance of each model. Early models like logistic regression and KNN faced complex scripts and handwriting challenges [63]. The low accuracy of conventional machine learning led to the adoption of CNNs and LSTMs for OCR tasks. Deep learning significantly improved feature extraction and sequence modeling. Hybrid architectures (CNN-LSTM, CNN-RNN, CNN-YOLO) have been explored to combine feature extraction and sequence learning capabilities. It resulted in higher accuracy than standalone models [64]. However, complexity often increases training time and computational costs. Hence, it makes them less feasible for large-scale OCR applications. Hybrid models combining statistical and deep learning techniques are proposed in noisy document scenarios [65]. Despite improvements, challenges persist for low-resource languages and complex scripts because of the limited availability of training data.

In 2019, CNNs transformed OCR with high accuracy, while hybrid models like RF-CNN improved flexibility. By 2020, CNNs dominated printed text recognition, with LSTMs and CNN-LSTM hybrids excelling in sequential data recognition. Lightweight machine learning models still play an important role in resource-constrained applications. Initially developed for synthetic data generation, GANs found success for OCR in low-resource or degraded text scenarios. Their exceptional data generation feature is beneficial in OCR when handling incomplete, noisy, or distorted text data [66].

Deep learning-based transformer models have recently gained prominence for their superior contextual understanding and multilingual capabilities despite their high computational requirements [67]. Transformers use attention mechanisms to understand character and word relationships. These models, such as Vision Transformers (ViT) and TrOCR, have already improved efficiency through direct image-to-text conversion. AI models using these mechanisms have achieved an impressive 99.89% accuracy in character recognition [68].

The main difference between conventional machine learning, conventional deep learning, and transformers is how they handle data, feature extraction, context, and scalability. Traditional machine learning models rely on handcrafted features and do not inherently capture sequential dependencies [69]. They perform well on structured data but underperform with complex patterns in large-scale unstructured data. Conventional deep learning models learn features automatically but have limitations in processing long-range dependencies. RNN-based deep learning models like LSTMs handle se-

quential data but suffer from vanishing gradients, sequential bottlenecks, and inefficient scalability [70].

Transformers, in contrast, overcome these challenges with self-attention, parallel processing, and better long-range dependency capture [71]. Unlike conventional deep learning, transformers do not rely on recurrence. Hence, they are faster for OCR tasks that require contextual understanding. However, this comes at the cost of higher memory consumption and the need for large datasets for optimal performance [72].

C. PERFORMANCE OF OCR MODELS ON HETEROGENEOUS DATASETS

When the data is complicated, OCR models evolved from rule-based and statistical models to deep learning architectures. As the architectures of AI models contrast, their accuracy on various datasets differs; therefore, instead of a direct comparison, a comprehensive assessment of all models is tabulated in Table 3 for better understanding. Accuracy was chosen as the primary evaluation metric due to its consistent reporting in 72% of studies. In contrast, key OCR metrics such as WER and CER appeared in only 5% and 4% of studies, respectively. The limited reporting of other metrics prevented their use in cross-study analysis. In the same way, presenting an in-depth analysis of popular datasets and data processing methods merits writing another comprehensive literature review. From current analysis, it is found that OCR models are capable of recognizing printed and handwritten text containing symbols, digits, and characters in many languages. The performance gap between traditional and deep learning-based OCR models is evident from the accuracy range of each model. In SVM model a significant performance significant performance variation was observed. The accuracy ranged from 60% to 94% depending on script complexity, model architecture, hyperparameters, and dataset characteristics. Overall variation in accuracy indicates SVM can handle simpler OCR tasks, but its performance degrades for complex scripts, handwritten text, or degraded image quality. Similarly, CNN-based models like VGG16 and CRNN demonstrate consistent performance on printed text datasets but show notable accuracy drops on handwritten text due to their inherent limitations in processing sequential information and character dependencies. Compared to SVM and ANN-based models, deep learning-based transformer models, Vision Transformer (ViT), TrOCR, and CharForme maintain higher accuracy above 77% regardless of the datasets.

More recent Transformer-based OCR models outperform CNNs and LSTMs for multilingual and complex-script OCR due to their self-attention mechanisms. Transformer-based models achieved high accuracy and demonstrated state-of-the-art performance for languages with complex diacritics. Multi-head attention, parallel processing, bidirectional representation and self-supervised learning are distinguishing characteristics of Transformers [97]. However, these models are computationally expensive as compared to traditional CNN architectures. For instance, TrOCR [24] uses pre-

trained Vision Transformers for both image encoding and autoregressive decoding. The base and large versions of this model contain 334 million and 558 million parameters, respectively. These sizes are up to 20 times larger than those of traditional CNN-based models, which typically contain between 10 million and 50 million parameters. As a result, memory demand of TrOCR is high with usage ranging from 4 to 16 gigabytes, compared to the 500 megabytes to 2 gigabytes required by CNN-based models. This also leads to longer inference times, which can range from 100 to 500 milliseconds, whereas CNNs typically perform inference within 10 to 50 milliseconds. Additionally, the training costs are considerably higher for TrOCR. Similarly, Donut [98] avoids traditional OCR pipelines by relying on Transformer-based architectures. However, it requires over 200 million parameters and encounters similar computational and memory challenges. The self-attention mechanism with quadratic memory complexity necessitates the use of GPUs with at least 16 gigabytes of VRAM. It also requires a substantially higher number of floating-point operations per image, ranging from 10 to over 100 gigaflops, compared to the 1 to 10 gigaflops typically required by CNNs. Therefore, the feasibility of transformers in real-time and mobile applications is limited. For an in-depth comparison between Transformers and CNNs, along with a detailed exposition of the technical foundations of Transformer architectures, refer to study [97].

1) CORRELATION BETWEEN INPUT DATA AND GENERALIZATION OF OCR MODELS

The overall OCR accuracy is driven by several fundamental, architectural, and universal factors. Apart from the architecture of the classification model, hybridization, hyperparameter tuning, data preprocessing steps, training strategies, and post-processing methods, the ultimate performance of an OCR system is determined by the dataset complexities. Existing OCR models underperform in complex dynamic environments due to the complexity of the background information of the input data [99]. Pretraining data coverage is another major factor due to the limited transferability of pretrained models. Models trained primarily on Latin scripts may underperform on Arabic, Chinese, or Devanagari scripts due to differences in text direction (left-to-right vs. right-to-left), character complexity (e.g., dots, diacritics, and strokes), and word structure (spaced vs. compound). The reverse is also true for models trained on non-Latin scripts. Models trained on varied datasets, including multilingual, handwritten, or historical documents, tend to generalize better in real-world scenarios.

Real scene images contain text along with background, foreground information, and noise. It is challenging to detect, segment, and extract text from low-contrast real scene images with partial visibility. In addition to degraded images and noisy backgrounds, real-world OCR tasks frequently involve more complex visual conditions such as skewed perspectives, motion blur, occlusion, and multilingual text appearing within the same scene [67]. These adversarial

TABLE 3: Reported accuracy of each OCR model on various datasets from selected studies

Model Type	Architecture	Datasets Used	Text Type / Language(s)	Performance (Accuracy)	Strength / Limitation
SVM [73], [1], [74], [75],	SVM-MLP-ETC, NCC, HOG-SVM	286 Font Packs, Bangla Handwritten Dataset	Printed / Handwritten (English, Bangla)	60.6% - 94.53%	Works well for structured fonts but struggles with handwritten text and complex scripts
ANN [76], [77], [78], [79]	Feedforward NN, Backpropagation NN, Hopfield-ANN	MNIST, CROHME, EMNIST, Picture Editor Dataset	Printed / Handwritten (English, Arabic)	92% - 100%	Effective in basic OCR but lacks generalization for large-scale real-world datasets
Neural Fuzzy System [80], [81]	IT2NFS-SPSA, ANFIS	Alphabetic and Numeric Datasets, Burmese OCR	Printed (English, Burmese)	7.25% - 98.20%	Reduces computational cost compared to traditional fuzzy systems but limited in scalability
CNN [31], [50], [82]–[85]	VGG16, CRNN, Inception V3, ResNet50, Multi-CNN	MJSynth, Kaggle, IAM, BanglaLekha-Isolated, CMATERdb, EMNIST	Printed/Handwritten (English, Arabic, Tamil, Bangla, Gujarati, Devanagari)	57.2% - 99.76%	Strong for printed OCR, but struggles with handwritten cursive text and script complexity
LSTM/BLSTM [51], [14], [86], [87], [88], [89], [90], [91], [92], [93]	Bi-LSTM, Gated-CNN-BLSTM, Tesseract LSTM	Medical Records, EMNIST, IAM, BCSD	Long-Sequenced Text (English, Arabic, German, Indonesian)	91% - 99.94%	Worked well for long-sequence text, but require high computational resources
Transformer [23], [53], [84], [94]	Vision Transformer (ViT), TrOCR, CharFormer	Shotor, Sadri, Born-Digital, LicenseNet	Multilingual (Chinese, English, Persian)	77.25% - 99.98%	Outperforms CNNs/LSTMs in multilingual OCR, but computationally expensive
GAN [65], [66]	CycleGAN, DESRGAN	CASIA HWDB, Synthetic Data	Noise-Resistant OCR (Chinese, English)	87.4% - 99.89%	Effective for enhancing resolution of noisy images but prioritizes realism over textual correctness.
Hybrid Models [19], [95], [96]	CNN-LSTM, CNN-RNN, CNN-YOLO, Faster R-CNN	IIIT-HW-Telugu, CMATERdb, LicenseNet, CCPD	Printed/Handwritten (English, Arabic, Telugu, Chinese)	94.5% - 99.75%	Combining different models improves accuracy. However, training complexity increases

conditions challenge OCR models when the training data does not reflect such variability. Several real-scene datasets like ICDAR robust reading challenge, ICDAR incidental scene text, Street View Text (SVT), COCO-Text, SynthText, MJSynth, and TextOCR have been developed to capture the complexities of multilingual scripts, varied lighting conditions, handwriting variability and natural image distortions. However, a major limitation of these datasets is the absence of associated lexicons, which restricts the development and evaluation of OCR models that rely on language constraints or post-processing for improved accuracy [27]. The scale and script diversity in these datasets is limited compared to the complexity in real unconstrained environments. In such contexts, OCR accuracy is enhanced by combining domain-specific data augmentation, advanced feature learning, and semi-supervised techniques to bridge the gap between controlled training data and uncontrolled real-world inputs [100].

2) CONTEXTUAL SENSITIVITY OF OCR MODELS

The accuracy variations of the same model in different studies indicate that OCR performance depends on architecture, training strategy, data coverage, and decoding method. This includes how well a model's architecture aligns with the training design [101]. Earlier OCR systems, based on machine learning techniques, lacked the flexibility needed for complex or noisy layouts. While Transformer-based models show consistent advantages over traditional machine learning methods and CNN-based architecture for complex images

[102]. The ability to model contextual relationships and long-range dependencies between characters leads to higher recognition accuracy on multi-column and irregularly formatted documents [24]. Transformer-based models are suitable for visually complex or noisy inputs, while CNNs are preferred in resource-limited environments with high-quality inputs [103]. Hybrid systems, which combine pretraining, flexible decoding, and language-aware components, are well-suited for multilingual or high-accuracy applications such as text script identification [104]. Data augmentation with geometric transformations like rotation and perspective changes improves generalization on distorted inputs. Besides geometric transformations, augmentation strategies such as color space transformations, kernel filters, mixing images, random erasing, feature space augmentation, adversarial training, GAN-based augmentation, neural style transfer, and meta-learning schemes are good solutions for positional biases present in the training data [105]. Research suggests that different models respond differently to different preprocessing steps [106]. Traditional machine learning approaches are comparatively more reliant on binarization, denoising, skew correction, feature extraction, and segmentation. Preprocessing reduces input complexity and enhances feature clarity. Classical models require clean, well-aligned inputs and hand-crafted features. The performance of these models is strongly influenced by preprocessing quality, and their generalization is limited when inputs are noisy or documents deviate from

the expected layout. In addition, hyperparameters such as kernel functions in SVM, the number of neighbors in k-NN, and decision criteria in tree-based models are manually selected or externally tuned using techniques like grid search or cross-validation. These models are also sensitive to overfitting when trained on very large, very small, or imbalanced datasets [107]. In contrast, deep learning models learn hierarchical feature representations directly from raw input pixels. Their dependency on manual feature engineering is limited. However, their performance relies on the availability of large, well-labeled datasets [100]. Without sufficient data, deep learning models are prone to overfitting when trained from scratch. In such cases, data augmentation becomes an important strategy with techniques such as random rotation, scaling, contrast shifts, and synthetic noise, etc. to simulate variability found in real-world documents. Performance of deep learning models varies with changing training configurations. Hyperparameters such as learning rate, optimizer type, batch size, network depth, and regularization strategies, for instance, dropout, batch normalization, weight decay, etc., influence OCR accuracy [19]. To improve convergence and generalization in deep learning models, different techniques such as early stopping, learning rate scheduling, and data normalization are used. Hybrid models are generally more robust than a model alone, especially in recognizing text lines with varying lengths and orientations. However, additional complexities are introduced during training, including hyperparameter choices [108] and sequence length management. Stabilizing training may require techniques such as gradient clipping and careful weight initialization. In contrast, the end-to-end architectures in transformers can model entire sequences or documents using self-attention mechanisms. These models learn long-range dependencies and attend to relevant regions without explicit segmentation or handcrafted features. They perform well even on inputs with irregular layouts, noise, or partial occlusions. However, they are highly dependent on large-scale pretraining, typically on multimodal datasets, and fine-tuning on task-specific data. Factors such as input resolution, tokenization strategy, positional encoding, and optimizer configurations have a substantial influence on Transformers [24]. The relative impact of different factors on OCR varies, depending on the model family. Understanding these distinctions is critical when designing OCR systems for specific tasks or document domains.

D. TEXT SCRIPTS IN OCR RESEARCH (RQ2)

Language is a complex vocabulary, grammar, and phonetics system while its written counterpart, script is a structured visual representation. Scripts consist of symbols, letters, or characters that transcribe spoken language into a readable format. Interestingly, a single language can be represented in multiple scripts, just as a single script can be adapted for different languages. Based on their approach to encoding linguistic units, scripts are generally classified into three main categories: alphabetic, syllabic, and logographic [109]. Multilingual OCR research still has a long way to go,

especially compared to how well English is doing. Since English is resource-rich and works smoothly with most existing OCR tools, it has been the most used and researched language. English is one of the most spoken languages in the world. It is the official language in 53 countries and the first language for about 400 million people. Many bilingual speakers also use it to communicate globally. Over the years, researchers have studied OCR for English more than for any other language, leading to many published studies [38]. Because of this extensive research, English OCR systems have greatly improved and are widely used. Today, English OCR is mature, and its accuracy is high due to extensive training data, simple character sets, consistent spacing, and limited diacritics. After English, Arabic is the second most researched language in OCR. Written right to left, Arabic features letters that change shape based on position and diacritics that alter meaning. Complex Arabic script comprising connected characters is challenging for OCR. Similar-looking letters and variations in handwriting further complicate text recognition. These factors demand specialized OCR models for accurate processing, and research is being carried out, too. Although the demand for multilingual OCR continues to rise, languages with complex scripts have not advanced at the same pace as those with more straightforward writing systems. Primarily, it is due to the scarcity of high-quality datasets and the inherent complexity of the scripts themselves. The less explored languages, such as Bangla, Tamil, Telugu, Oriya, Devanagari, Chinese, Gujarati, Korean, Finnish, Indonesian, Javanese, Uighur, Myanmar, and Nepali and more lack quality datasets and advanced OCR solutions. As shown in Figure 9, these languages lag behind English due to limited resources and lower recognition accuracy. Moreover, their harder-to-process scripts result in less accurate OCR. There is an apparent necessity to bridge the gap for the global adoption of OCR by achieving high accuracy in languages other than English. Further research is needed to develop more inclusive multilingual OCR models with enhanced recognition capabilities for underrepresented languages.

Current research in OCR focuses on improving multilingual script recognition. However, a one-size-fits-all OCR model is ineffective due to the vast differences in writing systems. Current script-specific OCR systems are designed for the unique structural, linguistic, and typographical characteristics of individual scripts. This review explored prominent scripts adopted in OCR research, their unique characteristics, and the languages they support. Representative samples of the most commonly reported scripts are illustrated in Figure 10 followed by a brief discussion on prominent characteristics of each script. The identified features in different scripts sharing some common characteristics can be used in grouping similar script patterns to apply the same recognition approaches. This will improve the generalization performance of OCR models.

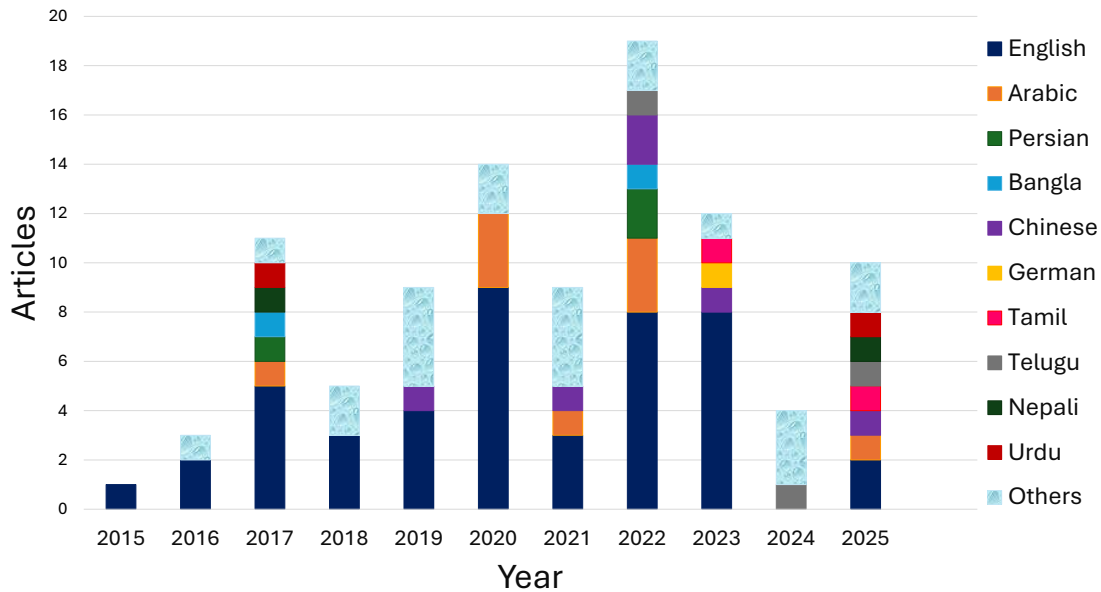


FIGURE 9: Trends in language-specific OCR models.



FIGURE 10: Sample of printed scripts: (a) Latin, (b) Devanagari, (c) Chinese, and (d) Arabic.

1) LATIN SCRIPT

The Latin script, also known as the Roman alphabet, has its roots in the old Italic scripts, which were influenced by the Greek alphabet and ultimately derived from the Phoenician script [110]. The Romans standardized it, and it has since evolved into the world's most widely used writing system [111]. It is the foundation for hundreds of languages, including English, Spanish, French, German, Italian, Portuguese, Dutch, Turkish, Vietnamese, and many more [112]. It is the dominant writing system in Europe, the Americas, parts of

Africa, and certain regions of Asia and Oceania [113]. It is one of the most versatile and enduring writing systems in history. Over time, the Latin script has evolved into numerous typographic styles, from simple print fonts to artistic calligraphy. It consists of a finite set of characters (letters, numbers, and punctuation) with consistent shapes. Some of the defining features of the Latin script include its left-to-right writing direction, the presence of both uppercase (capital) and lowercase letters, and the explicit representation of vowels as essential characters. Latin characters have only two

forms, uppercase and lowercase, that maintain shape within a word [71]. Due to these characteristics, the Latin script is highly compatible with digital processing. Individually spaced letters are easy to segment and recognize for OCR models. The Latin script has also been widely standardized through Unicode encoding for seamless digital representation.

2) ARABIC SCRIPT

The Arabic alphabetic script, known as the Arabic abjad, originates from the Nabataean script, which evolved from Aramaic around the 4th century CE [114]. Over time, it developed into a highly cursive and adaptable writing system. It is used for many languages, either as their primary writing system or as an alternative, including Arabic, Persian, Urdu, Pashto, Kurdish, Sindhi, Punjabi, Malay (Jawi), Uyghur, and Hausa. Various languages in the Middle East, North Africa, South Asia, Central Asia, Southeast Asia, and parts of Africa are expressed in the Arabic script. Some exceptional characteristics of Arabic script are right-to-left direction, diacritics, dots, the absence of vowels and capital letters, connected letters without spacing between them, and a slanted calligraphic style. Another distinction of Arabic script is its use of contextual characters, also called positional variants. In the Arabic script, letters have four shapes depending on their position in the word: isolated (complete) form, initial form, medial form, and final form [115]. Accuracy of Arabic OCR models is negatively influenced by segmentation errors. To address the segmentation complexities and shape variations in Arabic, many systems adopt word-level OCR. Arabic script-specific preprocessing steps typically involve diacritic removal, dot normalization, and segmentation into words or characters. Models such as CNN, RNN, and LSTM have been used for Arabic OCR on a labeled Quranic text database [50]. Among these, GRU and LSTM-based models have shown high performance due to the sequential nature of the Arabic script. To improve the Arabic OCR, postprocessing methods such as Word Beam Search decoding with dictionaries and auto-correction using BERT have been proposed [116].

3) CHINESE SCRIPT

The Chinese script, one of the world's oldest continuously used writing systems, dates back over 3,000 years to ancient oracle bone inscriptions [117]. Unlike alphabetic scripts, it is a logographic writing system where each character represents a word or a meaningful unit rather than individual sounds. The script is used primarily for Mandarin, Cantonese, and other Chinese dialects and has also historically influenced Japanese, Korean, and Vietnamese writing systems [118]. Today, it is the official script of China, Taiwan, and Singapore, with variations in Simplified Chinese, which is used in mainland China and Singapore, and Traditional Chinese, which is used in Taiwan and Hong Kong. Key features of the Chinese script include its top-to-bottom and left-to-right writing orientations, the absence of uppercase and lowercase distinctions, and diacritics. It consists of thou-

sands of unique words made up of strokes and radicals, which provide clues for meaning and pronunciation. [119]. Although complex, the Chinese script is one of the most visually attractive and historically significant writing systems globally. The massive Chinese character set, potentially containing over 50,000 characters in comprehensive dictionaries, is addressed through hierarchical encoding schemes and transformer architectures with attention mechanisms. To reduce computational complexity, OCR models employ multi-stage pipelines. A large number of visually similar elements and stroke variations (1-30 strokes per character) also create computational challenges, tackled through multi-scale feature extraction, attention-based discriminative learning for subtle stroke differences, and synthetic data augmentation to improve character distinction. The dual directionality with horizontal (left-to-right) or vertical (top-to-bottom, right-to-left) in Chinese text requires adaptive OCR systems. In literature, it is addressed through orientation-aware detection algorithms, bidirectional LSTMs for sequence modeling, and adaptive layout analysis modules in frameworks like EasyOCR and PaddleOCR [5].

4) DEVANAGARI SCRIPT

In South Asia, the Devanagari script is one of the most widely used writing systems. It originates from the Brahmi script and has been used for over 1,500 years. It is the primary script for Hindi, Marathi, Nepali, and Sanskrit, among other languages [63]. The Devanagari script is an abugida, a writing system that differs from purely alphabetic, logographic, or syllabic scripts. In Devanagari, each consonant inherently carries a vowel sound, which can be modified or muted using diacritical marks. Unlike alphabetic scripts, where vowels and consonants are written separately, Devanagari combines them into a single unit [120]. This script is more structured, but it is also more complex than a simple alphabet. A distinctive feature of Devanagari is the horizontal line running along the top of the characters, which visually connects letters in a word. The script follows a left-to-right writing direction. It consists of vowel and consonant characters, diacritical marks, ligatures, and conjunct forms, where multiple consonants merge into a single shape. Digital text processing of Devanagari script is complicated since characters change form when combined, and words are written without explicit spacing between them [121].

Consequently, segmentation of words, characters, and diacritical marks is a challenge for OCR on this script. Segmentation methods are broadly divided into implicit (pure segmentation), explicit (recognition-based segmentation), and holistic (segmentation-free) methods. In Devanagari character segmentation, the header line is removed, and characters in words are divided into three zones: the upper zone, the middle zone, and the lower zone. However, the performance of OCR models is significantly reduced due to incorrect segmentation. Therefore, for the Devanagari script, custom segmentation algorithms for conjunct handling are proposed. For accurate Devanagari OCR hybrid models for OCR and

post-processing for error correction are recommended [122]. Given the inherently sequential and interconnected structure of Devanagari characters, Bidirectional LSTM (BiLSTM) is a more appropriate choice for accurately recognizing this script [63].

E. KEY CHALLENGES IN ACCURATE OCR SYSTEMS (RQ3)

A word cloud analysis was performed to identify key terminologies associated with the challenges and limitations reported in OCR research. Unlike conventional systematic reviews that primarily rely on titles, abstracts, and keyword-based filtering, this study adopted a full-text analysis. Consequently, more profound insights into the specific obstacles encountered in the field are provided as illustrated in Figure 11.



FIGURE 11: A word cloud of keywords extracted from literature phrases describing challenges.

The most frequently reported challenges in OCR research emphasize the ongoing efforts to extract meaningful textual and visual features from complex, real-world images. Classification models, background noise, character shape and size variations, diacritics, low contrast, resolution limitations, and dataset scarcity are commonly discussed issues that cause persistent accuracy constraints. However, beyond these well-documented challenges, several less-explored but equally significant obstacles include glyph variations, distortion sensitivity, overlapping characters, skewed and tilted text, shading effects, data imbalance, positioning errors, short strokes, fragmented text segments, computational inefficiencies, overfitting, and punctuation mark recognition. These challenges bring up gaps in current OCR methodologies and point to deeper issues in script-specific complexities, language adaptability, and model generalization. The presence of these terms in word cloud feature the urgency to address these limitations with innovative solutions for advancing OCR technologies.

As observed, the studies on multi-disciplinary text extraction exhibited a variety of challenges and limitations that modern OCR models still face. The challenges reported in various contexts are broadly categorized into data quality issues, limitations of AI models (algorithmic challenges),

and resource constraints. Explicitly mentioned limitations are outlined in Figure 12.

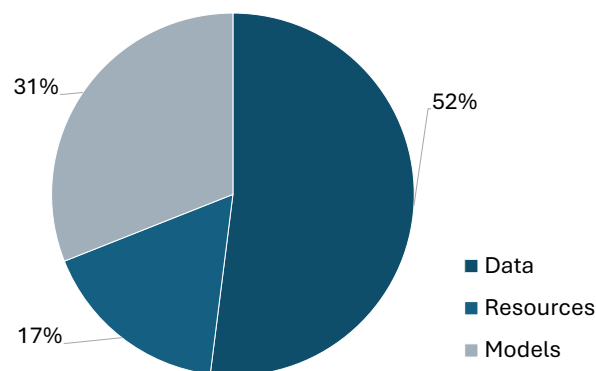


FIGURE 12: Main sources of challenges in OCR.

Challenges reported in the literature are often problem-specific and closely linked to individual system designs. However, these challenges can be broadly categorized into key problem areas, as illustrated in Figure 13. The identified challenges are grouped into data, model, and resource constraints. Since all main categories are interconnected while each category is wrapped around multiple subcategories. Therefore, the primary classification of challenges disregards their interconnected and multilayered nature. To dig deeper, the prominent subcategories of challenges associated with the primary categories are shown in Figure 14. Here, data-related issues focus on the quality, quantity, and availability of training data, directly impacting model performance. The complexity and variability of text, such as different fonts, handwriting styles, and distortions, add another layer of difficulty. Model limitations represent the technical constraints of OCR systems, including accuracy, speed, and complexity. Besides, latency, adaptability to different text styles, and the ability to generalize through datasets and languages are significant hurdles, especially when dealing with noisy real-world text. Finally, resource constraints are the practical barriers to deploying OCR systems. Hardware limitations include energy consumption, memory requirements, bandwidth, and connectivity issues. Resource constraints are particularly critical in edge computing or mobile applications, where processing power is limited. Collectively, these categories illustrate the persistent challenges faced by OCR. Addressing these challenges requires identifying research gaps for continuous advancements in data processing, model efficiency, and resource optimization [8]. Since the challenges identified are potential avenues for future research, a thorough discussion of these challenges and solutions will be provided in a subsequent section.

The discussion is followed by targeted solutions for each challenge and general guidelines for enhancing OCR system performance in future research. Data quality challenges include small sample sizes in datasets, insufficient for practical model training, and low-quality inputs, such as blurriness, noise, and low contrast. Complex scripts with diacritics and

joint characters add to the difficulties, as do fonts, sizes, and shape variations that affect recognition accuracy. Moreover, structural problems such as overlapping text and connected characters make OCR tasks more challenging. Environmental factors such as changes in lighting and background complexity negatively affect text recognition in natural scenes.

Selecting and optimizing suitable classification algorithms requires domain-specific knowledge. The architecture of the model determines accuracy, speed, and adaptability. Complex models can enhance recognition but may increase computational costs and latency, which limit their real-time performance. A lack of optimal training data required by the model raises the risk of overfitting and the inability to generalize to new scripts and fonts. Moreover, similar shapes, distortions, or noise also complicate feature extraction.

Resource constraints inhibit the evolution of real-time and embedded OCR applications. Limitations in hardware, such as processing speed and memory, restrict model deployment in resource-constrained environments. High energy consumption and optimization issues arise from power efficiency constraints. The lack of publicly available OCR datasets limits training samples and reduces model generalization. Additionally, deep learning model complexity contributes to high latency and impacts real-time performance.

Multilingual complexity is a growing challenge in OCR systems where script variations cause misclassifications and recognition errors. Addressing these challenges requires high-level data preprocessing techniques, optimized algorithmic strategies, and efficient resource management. The following sections propose targeted solutions for identified challenges and present general guidelines for developing robust OCR systems in the future.

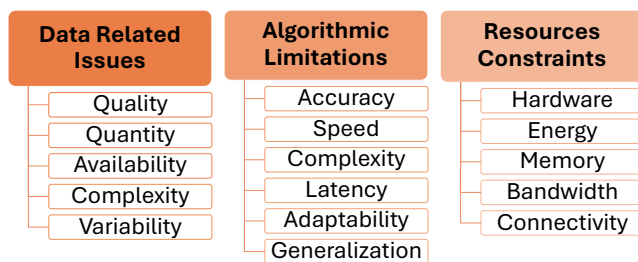


FIGURE 13: Key challenges and limitations in OCR.

The reviewed studies demonstrate substantial progress in OCR performance in several domains and uncover consistent shortcomings that limit the broader applicability and reliability of OCR technology. These limitations point to unaddressed critical gaps caused by script variability, domain-specific noise, and generalization on different databases. The following sections detail these research gaps obtained from empirical trends and common challenges observed in recent work.

1) DATA-RELATED CHALLENGES

OCR models use supervised learning and primarily depend on extensive, high-quality labeled training data. A comprehensive, well-annotated, and balanced dataset with a sufficient number of examples is vital for achieving optimal training results. Many existing datasets today are limited in both size and scope [99]. Uniform datasets are not available for different languages to equally train OCR models. Training OCR models on imbalanced datasets does not yield the necessary understanding for adequate generalization. Underfitting OCR models frequently fail when applied to real-world scenarios. Besides quantity, the quality of training datasets is an important element of OCR performance. Low-quality datasets propagate errors, resulting in poor performance even for strong models [52]. Text data can be quite challenging for OCR systems to recognize accurately. Unlike typed English text in clean environments, real-world OCR tasks involve complex scripts with multiple strokes, diacritics, connected characters, and glyph structures that are difficult for models to learn without specialized data. Moreover, many datasets do not account for challenging conditions like noisy, low-resolution, or degraded documents. OCR models must contend with variations in illumination, low contrast, background clutter, and geometric distortions such as rotated, tilted, or skewed text. Factors reducing recognition accuracy are not universal for models to learn from datasets. Similarly, different scripts have unique annotation practices when it comes to segmentation. The absence of standardized annotations makes it difficult to train models, compare results, reproduce findings, and generalize to multilingual datasets. Continuous retraining is required to enhance performance and ensure reproducibility. Furthermore, there has been limited attention given to documents with faded ink, worn-out characters, or overlapping and slanted text common in historical archives, handwritten records, and real-world imagery. Another limitation arises from domain-specific issues present in each dataset; for example, quality concerns differ between medical images and banking documents. Moreover, despite the increasing demand for multilingual OCR systems, there is a noticeable lack of high-quality datasets containing multiple scripts or mixed languages [8]. The common data-related issues, including availability, complexity, image condition, and text quality, are listed in Figure 14.

2) MODEL-SPECIFIC LIMITATIONS AND COMPUTATIONAL CONSTRAINTS

Despite significant advancements in OCR technology, there are several limitations in recognizing complex text structures and scripts. Challenges associated with adopted models explicitly reported in the literature are provided in the Table 4 and described in the subsequent section. Key challenges existing OCR models face include the following:

- Difficulty in handling overlapping, connected handwritten and cursive scripts.
- High misclassification rates for visually similar characters,

TABLE 4: Challenges associated with OCR models

Model	Application	Challenges Reported	References
CNN	Multiple studies on various languages (e.g., Arabic, Bangla, Telugu, Tamil, Persian, Urdu, Gujarati, Devanagari, Javanese and Swedish)	Small text size, blurry images, non-horizontal text, complex character shapes, compound characters, diacritics, connected characters, font variations, low-quality images, and overlapping text.	[4], [16], [82], [85], [123]–[125]
DNN	Studies on OCR for different languages and document types	High computational cost, large feature matrices, memory inefficiency, data imbalance, and difficulty in recognizing handwritten text.	[17], [126], [127]
LSTM	Studies on handwritten OCR, license plate recognition, and document processing	Similar character shapes, joint characters, varying orientations, illumination conditions, font and background variations, and computational resource limitations.	[51], [88]–[90], [128]–[135]
SVM	Printed Arabic OCR and Bangla OCR studies	Feature extraction challenges, low contrast images, and difficulty handling multiple font types.	[73], [136], [137]
ANN	Language-oriented OCR implementations for Arabic, Persian, and Nepali scripts	Image quality issues, font variations, low resolution, and complex background interference.	[77], [138]–[142]
Hybrid Models (CNN + LSTM, SVM + MLP, etc.)	Studies assessed ensemble approaches for OCR	Overfitting, increased training time, high memory requirements, and difficulty optimizing network layers.	[23], [54], [84], [96], [125], [143]–[145]
GAN-based Models	Studies on OCR for character separation and text denoising	Complex backgrounds, overlapping text, and variations in stroke thickness.	[65], [146]
Transformer-based Models (TrOCR, ViT-OCR, etc.)	Studies on printed and handwritten OCR	Poor generalization for different languages, computational complexity, and model fine-tuning challenges.	[53], [147], [148]

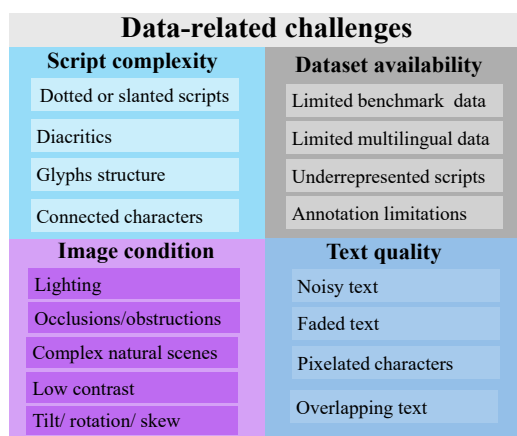


FIGURE 14: Data related challenges in OCR.

such as 'O' and '0' or '2' and 'z' lead to reduced recognition accuracy.

- Ineffective segmentation techniques for complex layouts, handwritten scripts, and multi-column documents, resulting in fragmented or incorrect text extraction.
- Deep learning models suffer from overfitting and inefficiencies when trained on small or unbalanced datasets.
- Lack of adaptive OCR architectures to handle script, font, and language variations.

Deploying OCR systems on mobile, edge, and embedded devices often encounters computational challenges. A few frequently reported computational challenges are listed below:

- Real-time OCR is impractical for resource-limited embedded systems due to high power consumption and process-

ing overhead.

- Limited lightweight and optimized models are available for mobile and edge computing environments.
- Balancing accuracy, speed, and computational efficiency are challenging when optimizing deep learning architectures.

Understanding these collective challenges is essential for identifying research gaps. These gaps reveal where current models are deficient and what issues are holding back further progress. Tackling these issues is about making real advancements that push OCR models forward. The following section explores possible solutions and future directions to develop more adaptable and powerful OCR systems.

F. OCR ENHANCEMENT STRATEGIES (RQ3)

Advanced strategies such as transformer-based architectures, self-supervised learning, and adaptive preprocessing methods are recommended for handling handwritten, complex, and cursive text recognition to enhance OCR performance further. Additionally, multi-modal learning, data augmentation, and GAN-based de-noising techniques should be integrated to mitigate challenges related to low resolution, distortions, and background interference [149]. Identified issues, existing solutions, the limitations associated with the existing methods, and future directions to overcome the challenges are in Figure 15.

For specialized applications such as license plate and scene text recognition, domain-adaptive learning, improved segmentation, and multi-frame fusion methods can be explicitly applied to handle variations in lighting conditions and motion blur. Post-processing techniques, including NLP-driven context-aware correction, hybrid dictionary-based refinement, and ensemble OCR models, are suggested to en-

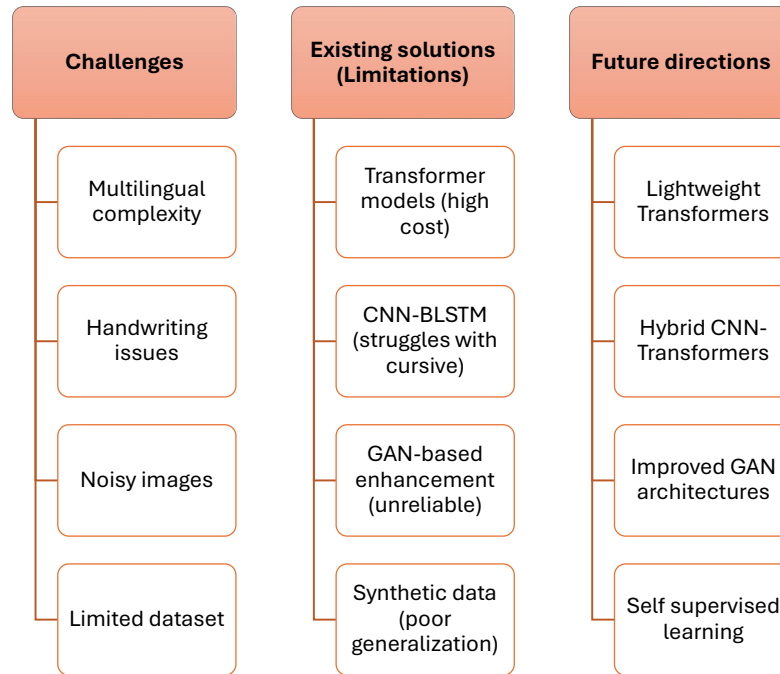


FIGURE 15: Frequently reported challenges, existing solutions, their limitations, and future directions to overcome these issues.

hance recognition accuracy. Furthermore, AutoML frameworks, hybrid deep learning models, and continual learning strategies should be explored for dynamic model adaptation without extensive manual tuning. OCR is a multi-stage process involving data preprocessing, character recognition, and post-recognition refinement. Accuracy enhancement techniques are systematically integrated during all stages of OCR development. These techniques can be broadly categorized into three key strategies: data-centric, model-oriented, and output refinement.

1) DATA-CENTRIC STRATEGIES

A significant portion of OCR research focuses on improving input data quality to enhance recognition accuracy. Preprocessing techniques are widely employed to mitigate variations in lighting, resolution, and geometric distortions [126].

Data-centric strategies in OCR are developed to improve input image quality with preprocessing. It ultimately contributes to the accuracy and processing speed of OCR models. Unlike traditional model-centric approaches that refine OCR architectures, data-centric methods emphasize intelligent preprocessing, adaptive data augmentation, and efficient dataset curation to optimize recognition performance. Existing preprocessing techniques, such as binarization, noise reduction, contrast enhancement, and geometric correction [126], have been widely used to address common challenges like poor lighting, distortions, and low resolution. However, preprocessing techniques are image- and case-specific and do not benefit images uniformly.

In the future, automated and flexible preprocessing pipelines can be developed to adjust data dynamically ac-

cording to the characteristics of each image. Moreover, deep learning-based enhancement techniques, such as super-resolution reconstruction and adaptive denoising, can improve text clarity without relying on fixed parameters [146]. Additionally, self-learning preprocessing frameworks, where models iteratively refine image quality based on OCR confidence scores, could enhance accuracy.

2) MODEL-ORIENTED STRATEGIES

Apart from input quality, OCR accuracy is ultimately determined by the ability of the recognition model to classify characters and words correctly. Model-oriented strategies focus on enhancing OCR systems through two primary approaches, model selection and optimization. first, the most suitable model is identified considering accuracy and computational efficiency. Then OCR models are fine-tuned by adjusting hyper-parameters, and employing suitable feature extraction techniques.

Model-oriented strategies in the literature still use domain knowledge for model selection and conventional optimization techniques for hyper-parameters tuning [108]. We suggest automating these model selection and optimization strategies simultaneously using AutoML. It can streamline the selection of the most efficient OCR architectures and hyperparameters using AI.

3) OUTPUT REFINEMENT STRATEGIES

Despite improvements in preprocessing and model architecture, OCR outputs contain residual errors, commonly in complex text environments. Post-recognition refinement strategies correct misclassified characters and contextual in-

consistencies to improve the reliability of the extracted text. Primary types of post-processing techniques include lexicon driven methods that correct OCR errors by referencing domain-specific dictionaries. Algorithm-based methods refine OCR predictions based on contextual understanding. Several computational models such as sequence-to-sequence (Seq2Seq) networks, topic-based language models, and probabilistic error correction algorithms are utilized. Besides, integrating domain-aware lexicons and language modeling techniques improve text recognition accuracy [7].

4) AI INTEGRATED SYSTEMS

In recent years, OCR technology has moved from traditional image processing pipelines to more advanced, integrated systems that combine multiple areas of machine intelligence. Figure 16 shows the main stages of this development. The years indicate when each approach saw the most attention in literature and broad use, not necessarily when it was first introduced. Early OCR systems focused on low-level pixel operations, but over time, they grew into more capable systems that can interpret both visual and textual information. Their performance improved further as methods from computer vision, natural language processing (NLP), large language models (LLMs), and contextual reasoning were brought together. Introduced by Google, PaLM-E demonstrated multimodal characteristics beyond conventional pipelines with embodied AI to interpret text within broader visual and semantic contexts [150]. Along similar lines, transformer-based design of TrOCR established a standard approach of end-to-end learning, which mitigated the dependence on separate text detection and recognition. The same trend continued in LayoutLMv3, which combines visual, textual, and structural features through cross-modal attention. This combined OCR model is efficient for complex layouts like tables, forms, and mixed-content documents [24]. A few new scene-text detection models, such as CLIP4STR, PARSeq, and ABINet, apply vision-language pretraining and iterative correction for more reliable OCR in real-world conditions. Outside the main timeline, other important developments include DONUT, an image encode-text-decoder, which skips OCR entirely for document parsing [151]; Nougat, designed specifically for scientific documents; and BERT-based systems that extend document understanding through language modeling [152]. Most recently, systems like GPT-4 Vision, Claude 3 Opus, and Gemini Pro Vision bring OCR into the zero-shot era for recognizing and interpreting text in unfamiliar domains and languages without task-specific training [153]. These models blur the line between OCR and general AI, and appear to be moving toward systems that not only extract text but also understand its visual, linguistic, and contextual framework. While recent OCR models exhibit broader language understanding and some level of cross-domain capability, several improvements are needed in real-world applications. There is still no unified system that performs consistently well on heterogeneous document types and languages. Contextual understanding is limited for long

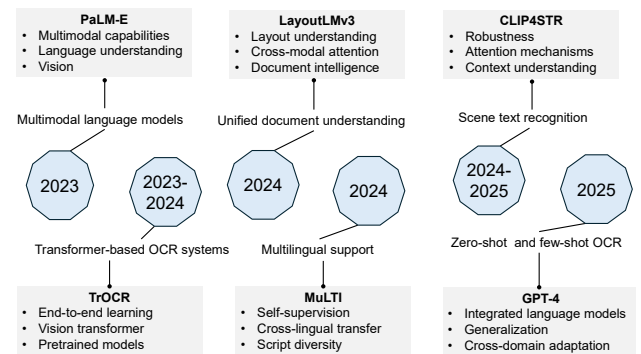


FIGURE 16: Recent advancements in integrated systems for OCR.

documents. Most models also lack support for incremental learning and on-device adaptability. Future research should explore building multimodal OCR systems that can jointly process text, layout, and visual features. Addressing script diversity will require developing multilingual and multiscript models using self-supervised and cross-lingual learning. Further progress is needed in context-aware OCR using memory-augmented transformers. Models should be designed to generalize well in zero-shot settings while adapting to new domains and tasks. As OCR systems are widely adopted, protect user privacy with federated learning needs to be prioritized.

G. FUTURE RESEARCH DIRECTIONS (RQ3)

1) ADVANCED LEARNING APPROACHES FOR LOW-RESOURCE LANGUAGES

OCR on low-resource scripts is due to insufficient training data, which limits the ability of OCR models to generalize well. To address the dataset limitations, self-supervised learning (SSL) [20] and few-shot learning (FSL) [154] can be promising alternatives for extracting meaningful patterns from unlabeled text data. These techniques enhance recognition accuracy with minimal reliance on annotated datasets. Consequently, they reduce the need for extensive manual labeling. By integrating SSL and FSL, OCR systems can become more adaptable and resilient. In this way, text recognition can be more accessible to languages with scarce digital resources.

2) OPTIMIZED ARCHITECTURES FOR REAL-TIME APPLICATIONS

While transformers have significantly advanced OCR performance, their computational cost is a key limitation for real-time deployment. Research on efficient transformer variants such as MobileViT and TinyBERT can improve model scalability without compromising accuracy [53]. Quantization, knowledge distillation, and pruning techniques can further reduce model size and inference time [155], making OCR viable for mobile and embedded systems.

3) ADVANCED IMAGE ENHANCEMENT TECHNIQUES

Noisy and low-resolution images are one of the key obstacles to OCR accuracy. Future research should focus on GANs for document enhancement. Super-resolution GANs (SRGAN, DESRGAN) can reconstruct degraded text, mitigate background noise, and enhance text clarity to improve recognition performance in challenging real-world environments.

An important prerequisite for achieving high OCR accuracy is the completeness and legibility of both training and inference data [156]. In many real-world scenarios, parts of the textual information may be missing or corrupted. Unlike traditional enhancement filters that only modify existing pixels, GANs can generate entirely new image content based on learned patterns [66]. Through adversarial training, GANs produce high-quality reconstructions with lifelike features that are sufficiently realistic to fool the discriminator network [5].

With semantic understanding, GANs are capable of reconstructing contextually appropriate character structures. They address both local character-level missing information and global document-level quality issues simultaneously [157]. In contrast to conventional methods, GANs learn the data distribution and hallucinate plausible structures in place of missing or degraded regions. Consequently, GAN-based methods can restore broken license plates [149] obscured by dirt or weathering [158], reconnect incomplete pen strokes in handwritten text [159], recover damaged or faded characters in historical documents [160], [161], infer obscured portions of text hidden by ink smearing (ink blots) [162], [163] and overlapping objects in scene text images [164]. For challenging images with noise or missing information, GAN-based preprocessing for simultaneous data cleaning, repairing, filling, and reconstruction instead of simple image enhancement is expected to overcome the limitations of traditional preprocessing techniques. A comprehensive comparison of GAN with traditional popular data-centric approaches, including Bilateral filter, Contrast-limited adaptive histogram equalization (CLAHE) [165], Otsu thresholding [106], Gaussian blur [166], Unsharp mask [167], Morphological operations

(Morphological Ops), and Wavelet transform is provided in Table 5.

IV. CONCLUSION

The evolution of AI models for Optical Character Recognition (OCR) has led to remarkable improvements in text recognition accuracy. Yet, significant challenges persist in handling complex scripts, handwritten text, and real-world noisy environments. This systematic review analyzed 97 research articles from seven major scholarly databases to present a structured examination of OCR progress over the past decade. It investigated the evolution of OCR models, the expansion of application domains, the increasing complexity of dataset types, and the continuous improvements in accuracy. Through a PRISMA-based methodology, this study examined the transition from traditional machine learning techniques (KNN, RF, SVM) to deep learning-based architectures, including CNNs, LSTMs, GANs, and Transformers, which have significantly enhanced OCR performance. This review explores advancements and highlights critical gaps in OCR research. The main challenges fall into three areas: data limitations, algorithmic constraints, and computational demands.

To address these issues, we propose targeted solutions. Techniques such as transfer learning and self-supervised learning can enhance model generalization, while multi-modal AI and integrated data sources help mitigate data scarcity. For improved accuracy, the use of advanced pre-trained models is recommended to refine OCR outputs at the character level. This survey provides valuable insights for both industry and academia. The identified research gaps and suggested solutions are expected to accelerate the development of fast, reliable, and multilingual AI-driven OCR systems.

ACKNOWLEDGMENT

The authors extend their gratitude to UTM for providing invaluable support.

TABLE 5: Comparison of traditional image enhancement techniques and GAN-based methods. (✓= Supported, ✗= Not supported, ◦= Limited support)

Enhancement Capability	Bilateral Filter	CLAHE	Otsu Thresh-olding	Gaussian Blur	Unsharp Mask	Morph. Ops	Wavelet Transf.	GAN Methods
Noise Reduction	✓	✗	✗	◦	✗	✗	✓	✓
Contrast Enhancement	✗	✓	✗	◦	✗	✗	✗	✓
Resolution Enhancement	✗	✗	✗	✗	✗	✗	✗	✓
Blur Removal	✗	✗	✗	◦	✓	✗	✗	✓
Artifact Removal	✗	✗	✗	✗	✗	✗	✗	✓
Illumination Correction	✗	✓	✗	✗	✗	✗	✗	✓
Data Generation	✗	✗	✗	✗	✗	✗	✗	✓
Multi-degradation Handling	✗	✗	✗	✗	✗	✗	✗	✓
Semantic Understanding	✗	✗	✗	✗	✗	✗	✗	✓
Adaptive Processing	✗	✗	✗	✗	✗	✗	✗	✓

REFERENCES

- [1] L. Abhishek, "Optical character recognition using ensemble of svm, mlp and extra trees classifier," in 2020 International Conference for Emerging Technology (INCET). IEEE, 2020, pp. 1–4.
- [2] M. H. A. Abdullah, N. Aziz, S. J. Abdulkadir, H. S. A. Alhussian, and N. Talpur, "Systematic literature review of information extraction from textual data: recent methods, applications, trends, and challenges," IEEE Access, vol. 11, pp. 10 535–10 562, 2023.
- [3] C. Thorat, A. Bhat, P. Sawant, I. Bartakke, and S. Shirsath, "A detailed review on text extraction using optical character recognition," ICT Analysis and Applications, pp. 719–728, 2022.
- [4] S. Drobac and K. Lindén, "Optical character recognition with neural networks and post-correction with finite state methods," International Journal on Document Analysis and Recognition (IJDAR), vol. 23, no. 4, pp. 279–295, 2020.
- [5] L. Kopitar, P. Kocbek, L. Gosak, and G. Stiglic, "Review of data-driven generative ai models for knowledge extraction from scientific literature in healthcare," in Next Generation eHealth. Elsevier, 2025, pp. 127–146.
- [6] I. A. Khandokar and P. Deshpande, "Computer vision-based framework for data extraction from heterogeneous financial tables: A comprehensive approach to unlocking financial insights," IEEE Access, 2024.
- [7] S. Karthikeyan, A. G. S. de Herrera, F. Doctor, and A. Mirza, "An ocr post-correction approach using deep learning for processing medical reports," IEEE Transactions on Circuits and Systems for Video Technology, vol. 32, no. 5, pp. 2574–2581, 2021.
- [8] A. Naseer, M. Tamoor, N. Allheeb, and S. Kanwal, "Investigating the taxonomy of character recognition systems: A systematic literature review," IEEE Access, 2024.
- [9] D. Baviskar, S. Ahirrao, V. Potdar, and K. Kotecha, "Efficient automated processing of the unstructured documents using artificial intelligence: A systematic literature review and future directions," IEEE Access, vol. 9, pp. 72 894–72 936, 2021.
- [10] P. Ruangraweenukit, P. Khambun, T. Nupim, P. Chophuk, A. Onuean, and A. Saengsai, "Autonomous drive-through system using easyocr and dobot," in 2024 IEEE International Symposium on Consumer Technology (ISCT). IEEE, 2024, pp. 497–502.
- [11] R. K. Singh, A. K. Saxena, A. Jhapate, R. Shrivastava, and R. Srivastava, "Review on advanced vehicle recognition system: Ocr and rest api integration for efficient results," in 2024 IEEE International Conference on Computing, Power and Communication Technologies (IC2PCT), vol. 5. IEEE, 2024, pp. 95–100.
- [12] N. H. Imam, V. G. Vassilakis, and D. Kolovos, "Ocr post-correction for detecting adversarial text images," Journal of Information Security and Applications, vol. 66, p. 103170, 2022.
- [13] A. Almutairi, "Newspaper elements detection and newspaper pages categorization using cnns and transformers," International Journal on Document Analysis and Recognition (IJDAR), pp. 1–13, 2024.
- [14] M. S. H. Onim, H. Nyeem, K. Roy, M. Hasan, A. Ishmam, M. A. H. Akif, and T. B. Ovi, "Blpnet: A new dnn model and bengali ocr engine for automatic licence plate recognition," Array, vol. 15, p. 100244, 2022.
- [15] T. T. H. Nguyen, A. Jatowt, M. Coustaty, and A. Doucet, "Survey of post-ocr processing approaches," ACM Computing Surveys (CSUR), vol. 54, no. 6, pp. 1–37, 2021.
- [16] S. Ahlawat, A. Choudhary, A. Nayyar, S. Singh, and B. Yoon, "Improved handwritten digit recognition using convolutional neural networks (cnn)," Sensors, vol. 20, no. 12, p. 3344, 2020.
- [17] H. Chaitanyaswami and A. Dobariya, "Deep learning recurrent attention optical character recognition network with data augmentation for cheque data extraction," in 2023 International Conference on Computer, Electronics & Electrical Engineering & their Applications (IC2E3). IEEE, 2023, pp. 1–6.
- [18] H. Wang, C. Pan, X. Guo, C. Ji, and K. Deng, "From object detection to text detection and recognition: A brief evolution history of optical character recognition," Wiley Interdisciplinary Reviews: Computational Statistics, vol. 13, no. 5, p. e1547, 2021.
- [19] A. Choudhury and K. K. Sarma, "A cnn-lstm based ensemble framework for in-air handwritten assamese character recognition," Multimedia Tools and Applications, vol. 80, no. 28, pp. 35 649–35 684, 2021.
- [20] J. Gui, T. Chen, J. Zhang, Q. Cao, Z. Sun, H. Luo, and D. Tao, "A survey on self-supervised learning: Algorithms, applications, and future trends," IEEE Transactions on Pattern Analysis and Machine Intelligence, 2024.
- [21] H. Zhang, E. Whittaker, and I. Kitagishi, "Extending trocr for text localization-free ocr of full-page scanned receipt images," in Proceedings of the IEEE/CVF International Conference on Computer Vision, 2023, pp. 1479–1485.
- [22] F. Xue, J. Sun, Y. Xue, Q. Wu, L. Zhu, X. Chang, and S.-c. Cheung, "Attention guidance by cross-domain supervision signals for scene text recognition," IEEE Transactions on Image Processing, 2025.
- [23] D. Shi, X. Diao, L. Shi, H. Tang, Y. Chi, C. Li, and H. Xu, "Charformer: A glyph fusion based attentive framework for high-precision character image denoising," in Proceedings of the 30th ACM international conference on multimedia, 2022, pp. 1147–1155.
- [24] M. Li, T. Lv, J. Chen, L. Cui, Y. Lu, D. Florencio, C. Zhang, Z. Li, and F. Wei, "Trocr: Transformer-based optical character recognition with pre-trained models," in Proceedings of the AAAI conference on artificial intelligence, vol. 37, no. 11, 2023, pp. 13 094–13 102.
- [25] H. M. Balaha, H. A. Ali, and M. Badawy, "Automatic recognition of handwritten arabic characters: a comprehensive review," Neural Computing and Applications, vol. 33, pp. 3011–3034, 2021.
- [26] K. Nikolaidou, M. Seuret, H. Mokayed, and M. Liwicki, "A survey of historical document image datasets," International Journal on Document Analysis and Recognition (IJDAR), vol. 25, no. 4, pp. 305–338, 2022.
- [27] X. Chen, L. Jin, Y. Zhu, C. Luo, and T. Wang, "Text recognition in the wild: A survey," ACM Computing Surveys (CSUR), vol. 54, no. 2, pp. 1–35, 2021.
- [28] S. Saeed, S. Naz, and M. I. Razzak, "An application of deep learning in character recognition: an overview," Handbook of Deep Learning Applications, pp. 53–81, 2019.
- [29] J. Fields, K. Chovanec, and P. Madiraju, "A survey of text classification with transformers: How wide? how large? how long? how accurate? how expensive? how safe?" IEEE Access, vol. 12, pp. 6518–6531, 2024.
- [30] M. Pandey, M. Arora, S. Arora, C. Goyal, V. K. Gera, and H. Yadav, "Ai-based integrated approach for the development of intelligent document management system (idms)," Procedia Computer Science, vol. 230, pp. 725–736, 2023.
- [31] S. B. Suthar and A. R. Thakkar, "Cnn-based optical character recognition for isolated printed gujarati characters and handwritten numerals," International Journal of Mathematical, Engineering and Management Sciences, vol. 7, no. 5, p. 643, 2022.
- [32] M. Sobhi, Y. Hifny, and S. Mesbah Elkaffas, "Arabic optical character recognition using attention based encoder-decoder architecture," in 2020 2nd International Conference on Artificial Intelligence, Robotics and Control, 2020, pp. 1–5.
- [33] C. Ziyang and L. Shiguo, "China's self-driving car legislation study," Computer Law & Security Review, vol. 41, p. 105555, 2021.
- [34] A. Alaei, V. Bui, D. Doermann, and U. Pal, "Document image quality assessment: A survey," ACM computing surveys, vol. 56, no. 2, pp. 1–36, 2023.
- [35] S. Chakrabarti, H. Singh, D. Yadav, and P. Rana, "Authentication system combining optical character recognition and error level analysis," in 2024 Asia Pacific Conference on Innovation in Technology (APCIT). IEEE, 2024, pp. 1–8.
- [36] M. Petticrew and H. Roberts, Systematic reviews in the social sciences: A practical guide. John Wiley & Sons, 2008.
- [37] D. Peral-García, J. Cruz-Benito, and F. J. García-Peñalvo, "Systematic literature review: Quantum machine learning and its applications," Computer Science Review, vol. 51, p. 100619, 2024.
- [38] J. Memon, M. Sami, R. A. Khan, and M. Uddin, "Handwritten optical character recognition (ocr): A comprehensive systematic literature review (slr)," IEEE access, vol. 8, pp. 142 642–142 668, 2020.
- [39] A. Ampatzoglou, S. Bibi, P. Aygeriou, M. Verbeek, and A. Chatzigeorgiou, "Identifying, categorizing and mitigating threats to validity in software engineering secondary studies," Information and Software Technology, vol. 106, pp. 201–230, 2019.
- [40] X. Zhou, Y. Jin, H. Zhang, S. Li, and X. Huang, "A map of threats to validity of systematic literature reviews in software engineering," in 2016 23rd Asia-Pacific Software Engineering Conference (APSEC). IEEE, 2016, pp. 153–160.
- [41] M. A. K. Raiaan, M. S. H. Mukta, K. Fatema, N. M. Fahad, S. Sakib, M. M. J. Mim, J. Ahmad, M. E. Ali, and S. Azam, "A review on large language models: Architectures, applications, taxonomies, open issues and challenges," IEEE access, vol. 12, pp. 26 839–26 874, 2024.
- [42] H. T. Ha and A. Horák, "Information extraction from scanned invoice images using text analysis and layout features," Signal Processing: Image Communication, vol. 102, p. 116601, 2022.

- [43] S. M. Silva and C. R. Jung, "Real-time license plate detection and recognition using deep convolutional neural networks," *Journal of Visual Communication and Image Representation*, vol. 71, p. 102773, 2020.
- [44] D. Sirohi, N. Kumar, and P. S. Rana, "Convolutional neural networks for 5g-enabled intelligent transportation system: A systematic review," *Computer Communications*, vol. 153, pp. 459–498, 2020.
- [45] M. Anedda, M. Fadda, R. Girau, G. Pau, and D. Giusto, "A social smart city for public and private mobility: A real case study," *Computer Networks*, vol. 220, p. 109464, 2023.
- [46] M. A. Alzubaidi, M. Otoom, and N. S. Ahmad, "Real-time assistive reader pen for arabic language," *ACM Transactions on Asian and Low-Resource Language Information Processing (TALLIP)*, vol. 20, no. 1, pp. 1–30, 2021.
- [47] V. P. Revelli, G. Sharma *et al.*, "Automate extraction of braille text to speech from an image," *Advances in Engineering Software*, vol. 172, p. 103180, 2022.
- [48] R. Najam and S. Faizullah, "A scarce dataset for ancient arabic handwritten text recognition," *Data in Brief*, vol. 56, p. 110813, 2024.
- [49] D. Das, D. R. Nayak, R. Dash, and B. Majhi, "Mjcn: Multi-objective jaya convolutional network for handwritten optical character recognition," *Multimedia Tools and Applications*, vol. 79, no. 43, pp. 33 023–33 042, 2020.
- [50] M. Mohd, F. Qamar, I. Al-Sheikh, and R. Salah, "Quranic optical text recognition using deep learning models," *IEEE Access*, vol. 9, pp. 38 318–38 330, 2021.
- [51] Y. Zou, Y. Zhang, J. Yan, X. Jiang, T. Huang, H. Fan, and Z. Cui, "A robust license plate recognition model based on bi-lstm," *IEEE Access*, vol. 8, pp. 211 630–211 641, 2020.
- [52] V. Agrawal, J. Jagtap, and M. P. Kantipudi, "Exploration of advancements in handwritten document recognition techniques," *Intelligent Systems with Applications*, p. 200358, 2024.
- [53] A. Azadbakht, S. R. Kheradpisheh, and H. Farahani, "Multipath vit ocr: A lightweight visual transformer-based license plate optical character recognition," in *2022 12th International Conference on Computer and Knowledge Engineering (ICCKE)*. IEEE, 2022, pp. 092–095.
- [54] A. T. Sahlol, M. Abd Elaziz, M. A. Al-Qaness, and S. Kim, "Handwritten arabic optical character recognition approach based on hybrid whale optimization algorithm with neighborhood rough set," *IEEE Access*, vol. 8, pp. 23 011–23 021, 2020.
- [55] A. Raj, "An optical character recognition of machine printed oriya script," in *2015 Third International Conference on Image Information Processing (ICIIP)*. IEEE, 2015, pp. 543–547.
- [56] A. W. Mahastama and L. D. Krisnawati, "Optical character recognition for printed javanese script using projection profile segmentation and nearest centroid classifier," in *2020 Asia Conference on Computers and Communications (ACCC)*. IEEE, 2020, pp. 52–56.
- [57] S. A. Francis and M. Sangeetha, "A comparison study on optical character recognition models in mathematical equations and in any language," *Results in Control and Optimization*, p. 100532, 2025.
- [58] A. Ghafoor, A. S. Imran, S. M. Daudpota, Z. Kastrati, R. Batra, M. A. Wani *et al.*, "The impact of translating resource-rich datasets to low-resource languages through multi-lingual text processing," *IEEE Access*, vol. 9, pp. 124 478–124 490, 2021.
- [59] M. P. Arakeri, N. Keerthana, M. Madhura, A. Sankar, and T. Munnavar, "Assistive technology for the visually impaired using computer vision," in *2018 International Conference on Advances in Computing, Communications and Informatics (ICACCI)*. IEEE, 2018, pp. 1725–1730.
- [60] J. Cao, K.-Y. Lam, L.-H. Lee, X. Liu, P. Hui, and X. Su, "Mobile augmented reality: User interfaces, frameworks, and intelligence," *ACM Computing Surveys*, vol. 55, no. 9, pp. 1–36, 2023.
- [61] S. V. Mahadevkar, S. Patil, K. Kotecha, L. W. Soong, and T. Choudhury, "Exploring ai-driven approaches for unstructured document analysis and future horizons," *Journal of Big Data*, vol. 11, no. 1, p. 92, 2024.
- [62] F. Sanfilippo, T. Blažauskas, M. Girdžiūna, A. Janonis, E. Kiudys, and G. Salvietti, "A multi-modal auditory-visual-tactile e-learning framework," in *International conference on intelligent technologies and applications*. Springer, 2021, pp. 119–131.
- [63] S. Arora, L. Malik, S. Goyal, D. Bhattacharjee, M. Nasipuri, and O. Krejcar, "Devanagari character recognition: A comprehensive literature review," *IEEE Access*, 2024.
- [64] S. Hangaragi, P. B. Pati, and N. Neelima, "Accuracy comparison of neural models for spelling correction in handwriting ocr data," in *Proceedings of Fourth International Conference on Communication, Computing and Electronics Systems: ICCCES 2022*. Springer, 2023, pp. 229–239.
- [65] B. Huang, J. Lin, J. Liu, J. Chen, J. Zhang, Y. Hu, E. Chen, and J. Yan, "Separating chinese character from noisy background using gan," *Wireless Communications and Mobile Computing*, vol. 2021, no. 1, p. 9922017, 2021.
- [66] H. Ibrahim, O. M. Fahmy, and M. A. Elattar, "License plate image analysis empowered by generative adversarial neural networks (gans)," *IEEE Access*, vol. 10, pp. 30 846–30 857, 2022.
- [67] P. Xu, X. Zhu, and D. A. Clifton, "Multimodal learning with transformers: A survey," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 45, no. 10, pp. 12 113–12 132, 2023.
- [68] P. Kumar, R. L. Babu, G. Sunil, J. Sampathkumar, and S. Chakraborty, "Attention-based deep learning algorithm in natural language processing for optical character recognition," in *2023 International Conference on Evolutionary Algorithms and Soft Computing Techniques (EASCT)*. IEEE, 2023, pp. 1–5.
- [69] Z. Azam, M. M. Islam, and M. N. Huda, "Comparative analysis of intrusion detection systems and machine learning-based model analysis through decision tree," *IEEE Access*, vol. 11, pp. 80 348–80 391, 2023.
- [70] S. F. Ahmed, M. S. B. Alam, M. Hassan, M. R. Rozbu, T. Ishtiaq, N. Rafa, M. Mofijur, A. Shawkat Ali, and A. H. Gandomi, "Deep learning modelling techniques: current progress, applications, advantages, and challenges," *Artificial Intelligence Review*, vol. 56, no. 11, pp. 13 521–13 617, 2023.
- [71] C. Gu and S. A. Manan, "Transliterated multilingualism/globalisation: English disguised in non-latin linguistic landscapes as new type of world englishes?" *International Journal of Applied Linguistics*, vol. 34, no. 3, pp. 1183–1204, 2024.
- [72] A. Mortadi, A. Mohamed, A. Talima, A. Alkhattip, A. Ibrahim, A. Osman, and Y. Hifny, "Alnasikh: an arabic ocr system based on transformers," in *2023 International Mobile, Intelligent, and Ubiquitous Computing Conference (MIUCC)*. IEEE, 2023, pp. 74–81.
- [73] O. J. Yamina, M. El Mamoun, and S. Kaddour, "Printed arabic optical character recognition using support vector machine," in *2017 International Conference on Mathematics and Information Technology (ICMIT)*. IEEE, 2017, pp. 134–140.
- [74] M. Das and M. Panda, "An ensemble method of feature selection and classification of odia characters," in *2021 1st Odisha international conference on electrical power engineering, communication and computing technology (ODICON)*. IEEE, 2021, pp. 1–6.
- [75] M. R. Phangtriastu, J. Harefa, and D. F. Tanoto, "Comparison between neural network and support vector machine in optical character recognition," *Procedia computer science*, vol. 116, pp. 351–357, 2017.
- [76] Y. Jing, B. Youssefi, M. Mirhassani, and R. Muscedere, "An efficient fpga implementation of optical character recognition for license plate recognition," in *2017 IEEE 30th Canadian Conference on Electrical and Computer Engineering (CCECE)*. IEEE, 2017, pp. 1–4.
- [77] S. Afroge, B. Ahmed, and F. Mahmud, "Optical character recognition using back propagation neural network," in *2016 2nd International Conference on Electrical, Computer & Telecommunication Engineering (ICECTE)*. IEEE, 2016, pp. 1–4.
- [78] R. S. Hussien, A. A. Elkhidir, and M. G. Elnourani, "Optical character recognition of arabic handwritten characters using neural network," in *2015 International Conference on Computing, Control, Networking, Electronics and Embedded Systems Engineering (ICCNEEE)*. IEEE, 2015, pp. 456–461.
- [79] J. Lee, B. W. Yogatama, and H. Christian, "Optical character recognition for handwritten mathematical expressions in educational humanoid robots," in *2018 IEEE 8th International Conference on System Engineering and Technology (ICSET)*. IEEE, 2018, pp. 178–183.
- [80] S. Bhyrapuneni and A. Rajendran, "A comparative analysis for optical character recognition for text extraction from images using artificial neural network fuzzy inference system," *Traitement du Signal*, vol. 39, no. 1, 2022.
- [81] C. M. M. Maung *et al.*, "Myanmar optical character recognition using block definition and featured approach," in *2017 3rd International Conference on Science in Information Technology (ICSITech)*. IEEE, 2017, pp. 313–318.
- [82] R. Busa, K. Shahira, and A. Lijiya, "Small text extraction from documents and chart images," in *2022 IEEE 19th India Council International Conference (INDICON)*. IEEE, 2022, pp. 1–5.
- [83] A. Shukla, A. Sharma, A. Aggarwal, and S. Jain, "Devnagari character recognition using optical character recognition (ocr)," in *2023 International Conference on Computational Intelligence, Communication Technology and Networking (CICTN)*. IEEE, 2023, pp. 373–379.

- [84] M. A. Zaryab and C. R. Ng, "Optical character recognition for medical records digitization with deep learning," in 2023 IEEE International Conference on Image Processing (ICIP). IEEE, 2023, pp. 3260–3263.
- [85] B. Dessai and A. Patil, "A deep learning approach for optical character recognition of handwritten devanagari script," in 2019 2nd international conference on intelligent computing, instrumentation and control technologies (ICICICT), vol. 1. IEEE, 2019, pp. 1160–1165.
- [86] J. Singh and B. Bhushan, "Real time indian license plate detection using deep neural networks and optical character recognition using lstm tesseract," in 2019 international conference on computing, communication, and intelligent systems (ICCCIS). IEEE, 2019, pp. 347–352.
- [87] G. Serhan, D. Parker, G. Dhruv, F. Alexander, and A. Ali, "Gpu-based and streaming-enabled implementation of pre-processing flow towards enhancing optical character recognition accuracy and efficiency," Cluster Computing, vol. 26, no. 6, pp. 3407–3419, 2023.
- [88] M. Wasan et al., "Development of text extraction technique using optical character recognition and morphological reconstruction to eliminate artifacts of image's background," Eastern-European Journal of Enterprise Technologies, vol. 1, no. 2, p. 115, 2022.
- [89] S. Gener, P. Dattilo, D. Gajaria, A. Fusco, and A. Akoglu, "Gpgpu-based high throughput image pre-processing towards large-scale optical character recognition," in 2022 IEEE/ACS 19th International Conference on Computer Systems and Applications (AICCSA). IEEE, 2022, pp. 1–7.
- [90] N. Alamsyah, M. N. Fauzan, A. G. Putrada, and S. F. Pane, "Autoencoder image denoising to increase optical character recognition performance in text conversion," in 2022 International Conference on Advanced Creative Networks and Intelligent Systems (ICACNIS). IEEE, 2022, pp. 1–6.
- [91] D. Scazzoli, G. Bartezzaghi, D. Uysal, M. Magarini, M. Melacini, and M. Marcon, "Usage of hough transform for expiry date extraction via optical character recognition," in 2019 Advances in Science and Engineering Technology International Conferences (ASET). IEEE, 2019, pp. 1–6.
- [92] D. Akinbade, A. O. Ogunde, M. O. Odim, and B. O. Oguntunde, "An adaptive thresholding algorithm-based optical character recognition system for information extraction in complex images," Journal of Computer Science, vol. 16, no. 6, pp. 784–801, 2020.
- [93] Y. Yanfi, H. Soeparno, R. Setiawan, and W. Budiharto, "Multi-head attention based bidirectional lstm for spelling error detection in the indonesian language," IEEE Access, 2024.
- [94] A. Rakshit, S. Mehta, and A. Dasgupta, "A novel pipeline for improving optical character recognition through post-processing using natural language processing," in 2023 IEEE Guwahati Subsection Conference (GCON). IEEE, 2023, pp. 01–06.
- [95] S. R. Dhanikonda, P. Sowjanya, M. L. Ramanaiah, R. Joshi, B. Krishna Mohan, D. Dhablya, and N. K. Raja, "An efficient deep learning model with interrelated tagging prototype with segmentation for telugu optical character recognition," Scientific Programming, vol. 2022, no. 1, p. 1059004, 2022.
- [96] Z. Zhao, M. Jiang, S. Guo, Z. Wang, F. Chao, and K. C. Tan, "Improving deep learning based optical character recognition via neural architecture search," in 2020 IEEE Congress on Evolutionary Computation (CEC). IEEE, 2020, pp. 1–7.
- [97] S. Khan, M. Naseer, M. Hayat, S. W. Zamir, F. S. Khan, and M. Shah, "Transformers in vision: A survey," ACM computing surveys (CSUR), vol. 54, no. 10s, pp. 1–41, 2022.
- [98] G. Kim, T. Hong, M. Yim, J. Nam, J. Park, J. Yim, W. Hwang, S. Yun, D. Han, and S. Park, "Ocr-free document understanding transformer," in European Conference on Computer Vision. Springer, 2022, pp. 498–517.
- [99] K. Tzoumpas, A. Estrada, P. Miraglio, and P. Zambelli, "A data filling methodology for time series based on cnn and (bi) lstm neural networks," IEEE Access, vol. 12, pp. 31 443–31 460, 2024.
- [100] H. Gbada, K. Kalti, and M. A. Mahjoub, "Deep learning approaches for information extraction from visually rich documents: Datasets, challenges and methods," International Journal on Document Analysis and Recognition (IJDAR), vol. 28, no. 1, pp. 121–142, 2025.
- [101] J. Martinek, L. Lenc, and P. Král, "Building an efficient ocr system for historical documents with little training data," Neural Computing and Applications, vol. 32, no. 23, pp. 17 209–17 227, 2020.
- [102] R. Anand, A. Rath, P. K. Sahoo, P. Jain, G. Panda, X. Wang, and H. Liu, "Winograd transform based fast detection of heart disease using ecg signals and chest x-ray images," IEEE Access, 2025.
- [103] Y. Aliyu, A. Sarlan, K. U. Danyaro, A. S. B. Rahman, and M. Abdullahi, "Sentiment analysis in low-resource settings: a comprehensive review of approaches, languages, and data sources," IEEE Access, vol. 12, pp. 66 883–66 909, 2024.
- [104] Y. Yang, E. Eli, A. Aysa, and K. Ubul, "Script identification in multilingual environment: a survey in recent years," Artificial Intelligence Review, vol. 58, no. 10, p. 294, 2025.
- [105] C. Shorten and T. M. Khoshgoftaar, "A survey on image data augmentation for deep learning," Journal of big data, vol. 6, no. 1, pp. 1–48, 2019.
- [106] M. Amiriebrahimabadi, Z. Rouhi, and N. Mansouri, "A comprehensive survey of multi-level thresholding segmentation methods for image processing," Archives of Computational Methods in Engineering, vol. 31, no. 6, pp. 3647–3697, 2024.
- [107] K. Sharifani and M. Amini, "Machine learning and deep learning: A review of methods and applications," World Information Technology and Engineering Journal, vol. 10, no. 07, pp. 3897–3904, 2023.
- [108] L. Liao, H. Li, W. Shang, and L. Ma, "An empirical study of the impact of hyperparameter tuning and model optimization on the performance properties of deep neural networks," ACM Transactions on Software Engineering and Methodology (TOSEM), vol. 31, no. 3, pp. 1–40, 2022.
- [109] S. Kuester-Gruber, T. Faist, V. Schick, G. Righetti, C. Braun, A. Cordey-Henke, M. Klosinski, C.-C. Sun, and S. Trautzettel-Klosinski, "Is learning a logographic script easier than reading an alphabetic script for german children with dyslexia?" Plos one, vol. 18, no. 2, p. e0282200, 2023.
- [110] C. Burlacu and A. Rabus, "Digitising (romanian) cyrillic using transkribus: new perspectives," Diacronia, no. 14, 2021.
- [111] T. Asselborn, W. Johal, B. Tleubayev, Z. Zhexenova, P. Dillenbourg, C. McBride, and A. Sandygulova, "The transferability of handwriting skills: from the cyrillic to the latin alphabet," npj Science of Learning, vol. 6, no. 1, p. 6, 2021.
- [112] Z. Byambadorj, R. Nishimura, A. Ayush, and N. Kitaoka, "Normalization of transliterated mongolian words using seq2seq model with limited data," Transactions on Asian and Low-Resource Language Information Processing, vol. 20, no. 6, pp. 1–19, 2021.
- [113] F. Lebsanft and F. Tacke, Manual of standardization in the Romance languages. Walter de Gruyter GmbH & Co KG, 2020, vol. 24.
- [114] B. Gruendler, The development of the Arabic scripts: From the Nabatean era to the first Islamic century. Brill, 2019, vol. 43.
- [115] E. F. Bilgin Tasdemir, "Printed ottoman text recognition using synthetic data and data augmentation," International Journal on Document Analysis and Recognition (IJDAR), vol. 26, no. 3, pp. 273–287, 2023.
- [116] R. Krithiga, S. Varsini, R. G. Joshua, and C. O. Kumar, "Ancient character recognition: a comprehensive review," IEEE Access, 2023.
- [117] Z. Liu, "Optical character recognition and the smart ancient script database," Journal of Chinese Writing Systems, vol. 4, no. 4, pp. 255–269, 2020.
- [118] Y. Liang and Z. Li, Diversity and Inclusiveness in Chinese as a Second Language Education. Taylor & Francis, 2025.
- [119] Z. Handel, Sinography: The borrowing and adaptation of the Chinese script. Brill, 2019, vol. 1.
- [120] N. Gautam, S. S. Chai, and M. Gautam, "The dataset for printed brahmi word recognition," in Micro-Electronics and Telecommunication Engineering: Proceedings of 3rd ICMETE 2019. Springer, 2020, pp. 125–133.
- [121] S. Singh, N. K. Garg, and M. Kumar, "Feature extraction and classification techniques for handwritten devanagari text recognition: a survey," Multimedia Tools and Applications, vol. 82, no. 1, pp. 747–775, 2023.
- [122] S. K. Manocha and P. Tewari, "Comparative study of deep learning models for devanagari ocr," in 2021 International Conference on Smart Generation Computing, Communication and Networking (SMART GENCON). IEEE, 2021, pp. 1–7.
- [123] S. M. Darwish and K. O. Elzoghaly, "An enhanced offline printed arabic ocr model based on bio-inspired fuzzy classifier," IEEE Access, vol. 8, pp. 117 770–117 781, 2020.
- [124] N. M. Dipu, S. A. Shohan, and K. Salam, "Bangla optical character recognition (ocr) using deep learning based image classification algorithms," in 2021 24th International Conference on Computer and Information Technology (ICIT). IEEE, 2021, pp. 1–5.
- [125] Z. Khosrobeigi, H. Veisi, E. Hoseinzade, and H. Shabanian, "Persian optical character recognition using deep bidirectional long short-term memory," Applied Sciences, vol. 12, no. 22, p. 11760, 2022.
- [126] T. C. Wei, U. Sheikh, and A. A.-H. Ab Rahman, "Improved optical character recognition with deep neural network," in 2018 IEEE 14th

- international colloquium on signal processing & its applications (CSPA). IEEE, 2018, pp. 245–249.
- [127] X. Zhang, H. Ma, H. Zhao, and R. Wang, “Optical character recognition of electrical equipment nameplate with contrast enhancement,” in 2022 Power System and Green Energy Conference (PSGEC). IEEE, 2022, pp. 1062–1066.
- [128] M. Brisinello, R. Grbić, M. Pul, and T. Anđelić, “Improving optical character recognition performance for low quality images,” in 2017 International Symposium ELMAR. IEEE, 2017, pp. 167–171.
- [129] K. Charan and T. Pramod, “Optical character recognition system of telugu language characters using convolutional neural networks,” in Emerging Research in Computing, Information, Communication and Applications: Proceedings of ERCICA 2022. Springer, 2022, pp. 615–623.
- [130] A. Arora and A. Chandratre, “Optical character recognition for handwritten forms with dynamic layout,” in 2018 4th International Conference on Applied and Theoretical Computing and Communication Technology (iCATecT). IEEE, 2018, pp. 299–303.
- [131] M. Andersson, S. Kanwal, and F. Khan, “Cognitive-inspired post-processing of optical character recognition for swedish addresses,” in 2022 IEEE 21st International Conference on Cognitive Informatics & Cognitive Computing (ICCI* CC). IEEE, 2022, pp. 248–257.
- [132] F. M. Rusli, K. A. Adhiguna, and H. Irawan, “Indonesian id card extractor using optical character recognition and natural language post-processing,” in 2021 9th International Conference on Information and Communication Technology (ICOICT). IEEE, 2021, pp. 621–626.
- [133] U. Kumaran, D. Biswas, B. Sneha, S. Nadipalli, S. Raja et al., “Text post-processing on optical character recognition output using natural language processing methods,” in 2023 IEEE 3rd Mysore Sub Section International Conference (MysuruCon). IEEE, 2023, pp. 1–6.
- [134] D. G. Vidakis and D. I. Kosmopoulos, “Facilitation of air traffic control via optical character recognition-based aircraft registration number extraction,” IET intelligent transport systems, vol. 12, no. 8, pp. 965–975, 2018.
- [135] P. Ramya, T. H. Chowdary, P. K. Teja, and T. Hrushikesh, “Number plate recognition using optical character recognition (oca) and connected component analysis (cca),” in Smart Technologies in Data Science and Communication: Proceedings of SMART-DSC 2022. Springer, 2023, pp. 29–40.
- [136] S. L. Gomes, E. d. S. Rebouças, E. C. Neto, J. P. Papa, V. H. d. Albuquerque, P. P. Rebouças Filho, and J. M. R. Tavares, “Embedded real-time speed limit sign recognition using image processing and machine learning techniques,” Neural Computing and Applications, vol. 28, no. Suppl 1, pp. 573–584, 2017.
- [137] M. T. Pervin, S. Afroge, and A. Huq, “A feature fusion based optical character recognition of bangla characters using support vector machine,” in 2017 3rd international conference on electrical information and communication technology (EICT). IEEE, 2017, pp. 1–6.
- [138] M. Rajkumar, I. Chandra, S. J. Ganesh, K. Dhivya, and K. Sangeethalakshmi, “Smart vehicle number plate scanning system using optical character recognition strategy,” in 2022 6th International Conference on Computing Methodologies and Communication (ICCMC). IEEE, 2022, pp. 1328–1334.
- [139] A. Singh and S. Desai, “Optical character recognition using template matching and back propagation algorithm,” in 2016 International Conference on Inventive Computation Technologies (ICICT), vol. 3. IEEE, 2016, pp. 1–6.
- [140] M. I. Yap, K. Moorthy, K. M. Daud, and F. Ernawan, “Optical character recognition using backpropagation neural network for handwritten digit characters,” in 2021 International Conference on Software Engineering & Computer Systems and 4th International Conference on Computational Science and Information Management (ICSECS-ICOCSIM). IEEE, 2021, pp. 167–171.
- [141] M. K. Sharma and B. Bhattarai, “Optical character recognition system for nepali language using convnet,” in Proceedings of the 9th International Conference on Machine Learning and Computing, 2017, pp. 184–189.
- [142] C.-C. Chang, A. Arora, L. P. G. Perera, D. Etter, D. Povey, and S. Khudanpur, “Optical character recognition with chinese and korean character decomposition,” in 2019 International Conference on Document Analysis and Recognition Workshops (ICDARW), vol. 5. IEEE, 2019, pp. 134–139.
- [143] P. Georgieva and P. Zhang, “Optical character recognition for autonomous stores,” in 2020 IEEE 10th International Conference on Intelligent Systems (IS). IEEE, 2020, pp. 69–75.
- [144] A. Chandra and R. Stefanus, “An end-to-end optical character recognition pipeline for indonesian identity card,” in 2021 9th International Conference on Information and Communication Technology (ICOICT). IEEE, 2021, pp. 307–312.
- [145] K. Eghbali, H. Veisi, M. Mirzaie, and Y. M. Behbahani, “Font recognition for persian optical character recognition system,” in 2017 10th Iranian Conference on Machine Vision and Image Processing (MVIP). IEEE, 2017, pp. 252–257.
- [146] A. C. Luna, C. Trajano, J. P. So, N. J. Pascua, A. Magpantay, and S. Ambat, “License plate recognition for stolen vehicles using optical character recognition,” in ICT Analysis and Applications. Springer, 2022, pp. 575–583.
- [147] F. Asadi-Zeydabadi, E. Shabaninia, H. Nezamabadi-Pour, and M. Shojaei, “Farsi optical character recognition using a transformer-based model,” in 2023 13th International Conference on Computer and Knowledge Engineering (ICCCKE). IEEE, 2023, pp. 293–299.
- [148] W. Zou, X. Sun, W. Wu, Q. Lu, X. Zhao, Q. Bo, and J. Yan, “Tcmt: Target-oriented cross modal transformer for multimodal aspect-based sentiment analysis,” Expert Systems with Applications, vol. 264, p. 125818, 2025.
- [149] Y. Pan, J. Tang, and T. Tjahjadi, “Lpsrgan: Generative adversarial networks for super-resolution of license plate image,” Neurocomputing, vol. 580, p. 127426, 2024.
- [150] W. Gao and G. Li, “Point cloud-language multi-modal learning,” in Deep Learning for 3D Point Clouds. Springer, 2024, pp. 227–254.
- [151] A. Sassioui, R. Benouini, Y. El Ouargui, M. El Kamili, M. Chergui, and M. Ouzif, “Visually-rich document understanding: concepts, taxonomy and challenges,” in 2023 10th International Conference on Wireless Networks and Mobile Communications (WINCOM). IEEE, 2023, pp. 1–7.
- [152] Q. Zhang, F. Liu, and W. Song, “Imtlm-net: improved multi-task transformer based on localization mechanism network for handwritten english text recognition,” Complex & Intelligent Systems, vol. 11, no. 1, p. 125, 2025.
- [153] J. Wang, Y. Ming, Z. Shi, V. Vineet, X. Wang, S. Li, and N. Joshi, “Is a picture worth a thousand words? delving into spatial reasoning for vision language models,” Advances in Neural Information Processing Systems, vol. 37, pp. 75392–75421, 2024.
- [154] H. Gharoun, F. Momenifar, F. Chen, and A. H. Gandomi, “Meta-learning approaches for few-shot learning: A survey of recent advances,” ACM Computing Surveys, vol. 56, no. 12, pp. 1–41, 2024.
- [155] J. Kim, “Quantization robust pruning with knowledge distillation,” IEEE Access, vol. 11, pp. 26419–26426, 2023.
- [156] C. Neudecker, K. Baierer, M. Gerber, C. Clausner, A. Antonacopoulos, and S. Plöschacher, “A survey of ocr evaluation tools and metrics,” in Proceedings of the 6th International Workshop on Historical Document Imaging and Processing, 2021, pp. 13–18.
- [157] X. Li, J. Jin, Y. Zhou, Y. Zhang, P. Zhang, Y. Zhu, and Z. Dou, “From matching to generation: A survey on generative information retrieval,” ACM Transactions on Information Systems, vol. 43, no. 3, pp. 1–62, 2025.
- [158] A. Pattanaik and R. C. Balabantaray, “Enhancement of license plate recognition performance using xception with mish activation function,” Multimedia tools and applications, vol. 82, no. 11, pp. 16793–16815, 2023.
- [159] M. Ayyoob and P. M. Ilyas, “Stroke-based data augmentation for enhancing optical character recognition of ancient handwritten scripts,” IEEE Access, 2024.
- [160] M. A. Souibgui and Y. Kessentini, “De-gan: A conditional generative adversarial network for document enhancement,” IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 44, no. 3, pp. 1180–1191, 2020.
- [161] U. Saha, S. Saha, S. A. Fattah, and M. Saquib, “Npix2cpix: A gan-based image-to-image translation network with retrieval-classification integration for watermark retrieval from historical document images,” IEEE Access, 2024.
- [162] W. Alkendi, F. Gechter, L. Heyberger, and C. Guyeux, “Unsupervised approach to text line extraction in belfort civil registers of births,” International Journal on Document Analysis and Recognition (IJAR), pp. 1–22, 2024.
- [163] O. Kodym and M. Hradiš, “Tg 2: text-guided transformer gan for restoring document readability and perceived quality,” International Journal on Document Analysis and Recognition (IJAR), vol. 25, no. 1, pp. 15–28, 2022.

- [164] Y. Cheema, M. N. Cheema, A. Nazir, F. A. Khokhar, P. Li, and A. Ahmed, "A novel approach for improving open scene text translation with modified gan," *The Visual Computer*, pp. 1–13, 2024.
- [165] P. Musa, F. Al Rafi, and M. Lamsani, "A review: Contrast-limited adaptive histogram equalization (clahe) methods to help the application of face recognition," in *2018 third international conference on informatics and computing (ICIC)*. IEEE, 2018, pp. 1–6.
- [166] Y.-Q. Liu, X. Du, H.-L. Shen, and S.-J. Chen, "Estimating generalized gaussian blur kernels for out-of-focus image deblurring," *IEEE Transactions on circuits and systems for video technology*, vol. 31, no. 3, pp. 829–843, 2020.
- [167] N. K. Shine, G. Bhutani, T. S. Keerthana, and G. Rohith, "An approach for improving optical character recognition using contrast enhancement technique," in *Journal of Physics: Conference Series*, vol. 2466, no. 1. IOP Publishing, 2023, p. 012009.



NUZHAT KHAN is a Postdoctoral Research Fellow at the VLSI and Embedded Computing Architecture Design Laboratory (VeCAD Lab), Universiti Teknologi Malaysia (UTM). She completed her Ph.D. in Environmental Technology at Universiti Sains Malaysia (USM) in 2023. She earned her M.S. in Information Technology from Balochistan University of Information Technology, Engineering, and Management Sciences (BUIITEMS), Pakistan, in 2019 under the Higher Education Commission (HEC) Scholarship. Her research focuses on optical character recognition (OCR), image processing, natural language processing (NLP), artificial intelligence (AI), machine learning, deep learning, applied and statistical linguistics, and precision agriculture. She has authored multiple research papers, completed projects, and holds patents in these domains. She is a technical committee member for the ICEST 2025 conference. She serves as a reviewer for several reputed journals, including *Pattern Recognition*, *Genetic Resources and Crop Evolution*, *Artificial Intelligence Review*, *Scientific Reports*, *Theoretical and Applied Climatology*, *Journal of Oil Palm Research*, *Discover Applied Sciences*, *Cluster Computing*, and the *Journal of Big Data*, among others.



AB AL-HADI AB RAHMAN PhD, SMIEEE, MIET, CEng, PEng, is the Head of the Research Group at the VLSI and Embedded Computing Architecture Design (VeCAD) Laboratory, Faculty of Electrical Engineering, Universiti Teknologi Malaysia (UTM). He is also an Associate Professor in the Department of Electronic and Computer Engineering at UTM. Dr. Ab Al-Hadi holds professional affiliations as a Senior Member of the IEEE (SMIEEE), a Member of the Institution of Engineering and Technology (MIET), a Chartered Engineer (CEng), and a Professional Engineer (PEng). His research interests include VLSI design, embedded systems, computer architecture, and high-performance computing. He has published extensively in high-impact journals and conferences. He leads several research projects focused on advanced computing and embedded system technologies. He also holds two patents in the related area.



performance in artificial intelligence applications.

IBRAHIM YOUSEF ALSHAREEF is pursuing his Ph.D. in Artificial Intelligence at Universiti Teknologi Malaysia (UTM). He holds a bachelor's degree in industrial electronics and automatic control from the College of Electronics and Communications and a Master's in Embedded Software Engineering from Gannon University, USA. His research interests include deep neural networks, electronics, and embedded systems, focusing on optimizing computational efficiency and performance in artificial intelligence applications.



SHAHRIYAR MASUD RIZVI is an Associate Professor in the Department of Electrical and Electronic Engineering and a Deputy Director at the Center for VLSI and Embedded Systems, Dr. Anwarul Abedin Institute of Innovation at the American International University-Bangladesh (AIUB). He received his BS and MS degrees in Electrical Engineering (EE) in 2000 and 2002, respectively, from the University of Wyoming, WY, USA. He obtained his Ph.D. in EE in 2023 from the Universiti Teknologi Malaysia (UTM), Johor Bahru, Malaysia. His research interests include low-complexity and energy-efficient deep learning, optical character recognition (OCR), synthesis methodologies for behavioral FSMs modeled in SystemVerilog/VHDL, and hardware/software co-simulation for FPGA-based image processing. He also serves as a reviewer for the Scopus-indexed AIUB Journal of Science and Engineering (AJSE) and numerous international conferences.



MUHAMMAD NADZIR MARSONO is an Electronics and Computer Engineering Professor at Universiti Teknologi Malaysia (UTM). He serves as Deputy Dean (Academic and Student Affairs) at the Faculty of Electrical Engineering. He is also a member of the VeCAD research group. His research focuses on domain-specific computing architecture, VLSI/SoC design, and embedded systems. His interests span digital system design, computer architecture, reconfigurable computing, multicore/manycore SoCs, NoCs, network algorithmics, network processing, and software-defined networks. He holds a PhD from the University of Victoria, Canada, and an MEng degree from UTM.



MUHAMMAD PAEND BAKHT received the Ph.D. degree in electrical engineering from the Universiti Teknologi Malaysia (UTM). He is currently an Assistant Professor in the Department of Electrical Engineering at Balochistan University of Information Technology, Engineering and Management Sciences (BUIITEMS), Quetta, Pakistan. He has also gained postdoctoral research experience at Universiti Tun Hussein Onn Malaysia (UTHM). He has authored several research articles in reputable journals and presented his research ideas at international conferences. His research interests include optimization and energy management of grid-connected renewable energy systems, Artificial Intelligence, and predictive modeling. His current research at Teagasc, Ireland, focuses on the integration of renewable energy technologies in agriculture.



MOHD SHAHRIZAL RUSLI received his PhD, MEng. and BEng. in electrical engineering from Universiti Teknologi Malaysia (UTM), Malaysia. During his doctoral study, he attended the University of California Irvine, USA, and the University of Catania, Italy, as a research scholar. His research interests are network-on-chip, computer architecture, machine learning accelerators and power management. He has published in numerous journals, proceedings, and book chapters.

From 2021 to 2022, he was a SoC design engineer at Mediatek Singapore, working on interconnect design and timing closure. He is a senior lecturer of Electronic and Computer Engineering, UTM, and a researcher for VLSI and Embedded Computing Architecture Design (VeCAD) Research Group.



SHAHIDATUL SADIAH (Member, IEEE) received a B.Eng. degree in communication network engineering and an M.Eng. degree in electronic and information system engineering from Okayama University, Japan, in 2013 and 2015, respectively, and a Ph.D. degree in information engineering from Hiroshima University, Japan, in 2018. She has been a senior lecturer with the Department of Electronics and Computer Engineering, Universiti Teknologi Malaysia, since January

2019. Her research interests include cryptography, information security, digital system design, and computer architecture.

...