

CodeTS: Verifiable Text-to-Time Series Generation via Executable Code

Xudong Yuan¹ Shunyu Liu² Tongya Zheng¹ Huiping Zhuang³ Mingli Song¹ Kaixuan Chen¹

¹Zhejiang University, Hangzhou, China

²Nanyang Technological University, Singapore

³South China University of Technology, Guangzhou, China

Abstract

Text-to-Time Series Generation (Text-to-TS) provides a promising paradigm for synthesizing time series from natural language, enabling scenario-specific generation when real observations are scarce or costly to acquire. However, existing methods typically lack an explicit mechanism for deriving generation logic from textual descriptions to guide time series synthesis. In this paper, we propose CodeTS, a verifiable framework that uses code as an intermediate generation interface, reformulating Text-to-TS generation as a Text-to-Code-to-TS process. CodeTS first maps textual temporal descriptions into an explicit code space, where executable code specifies how textual requirements shape target temporal patterns, and then obtains the time series through code execution. To learn this code generation process reliably without real code annotations, CodeTS constructs aligned Text-Code-TS triplets from structured temporal attributes for supervised initialization. More importantly, we further design multi-stage execution-based rewards that verify format validity, code executability, and time series quality, enabling real Text-TS pairs to provide training signals for Reinforcement Learning with Verifiable Rewards (RLVR). Extensive experiments on eight benchmarks across short, medium, and long generation lengths demonstrate that CodeTS provides a strong zero-shot solution for Text-to-TS generation, outperforming LLM-based baselines and achieving better averaged results than supervised generative baselines trained on the target datasets. The anonymized code repository is available at <https://anonymous.4open.science/r/CodeTS-54DA>.

1 Introduction

Time series data are pervasive across real world domains such as finance, healthcare, energy systems, transportation networks, and climate science [Sezer et al., 2020, Faust et al., 2018, Deb et al., 2017, Ermagun and Levinson, 2018, An et al., 2025], where they support fundamental tasks including forecasting, classification, and anomaly detection [Wen et al., 2022]. These tasks require representative data that adequately cover diverse temporal patterns and characteristic behaviors across application contexts. However, such comprehensive time series data are often scarce and costly to obtain, especially when the target patterns involve rare events, privacy restricted sensor measurements, or expert descriptions of temporal behaviors [Ge et al., 2025, Wu et al., 2025, Wen et al., 2021]. As a result, many important temporal patterns remain insufficiently covered, limiting model performance in downstream scenarios

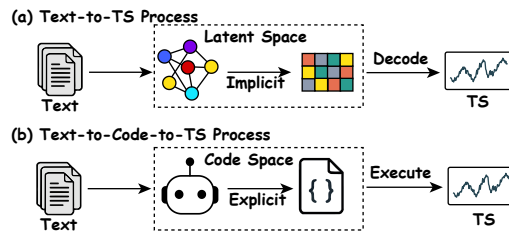


Figure 1: Illustration of the Text-to-TS process and the proposed Text-to-Code-to-TS process.

where such patterns are most critical. Therefore, this underscores the need for time series generation methods that synthesize samples with targeted temporal characteristics rather than simply increasing the number of synthetic samples.

Existing time series generation methods have mainly focused on learning temporal distributions from observed series and synthesizing new samples with similar statistical properties [Jeong et al., 2025, Yoon et al., 2019, Lee et al., 2023, Yuan and Qiao, 2024]. To improve controllability, conditional generation methods further incorporate auxiliary signals, such as metadata, labels, or historical observations, to guide the synthesis process [Narasimhan et al., 2024, Shankar et al., 2025, Lin et al., 2020, Ni et al., 2020, Liao et al., 2024]. However, these forms of conditioning are often predefined and structured, making it difficult to specify fine-grained temporal requirements [Gu et al., 2025], such as desired trends, periodicity, amplitude changes and local events, in a flexible and intuitive manner. Natural language, in contrast, provides a more expressive interface for specifying such target temporal behaviors, thereby motivating time series generation from text.

Following this direction, Text-to-Time Series Generation (Text-to-TS) has emerged as a promising paradigm for natural language-guided time series synthesis, enabling compositional temporal requirements to be specified in a flexible form. Existing approaches can be broadly divided into supervised Text-to-TS generation methods and LLM-based generation methods. The former learn Text-to-TS mappings from paired Text-TS data, typically by aligning textual and temporal representations and training neural generators to synthesize numerical sequences [Gu et al., 2025, Ge et al., 2025, Li et al., 2025, Zhang, 2026]; the latter use large language models either through prompting or by autoregressively modeling textualized time series representations to synthesize temporal data [Rousseau et al., 2025, Xie et al., 2025, Wang et al., 2025, Guan et al., 2025]. However, these existing methods connect textual descriptions and temporal patterns through latent representation spaces (Fig. 1(a)), where the transformation from textual semantics to temporal patterns remains implicit and underspecified, which leaves the Text-TS semantic gap insufficiently addressed and makes the underlying generation logic difficult to verify or optimize. This raises a key challenge:

How to develop an explicit intermediate interface that maps textual requirements into time series generation logic, while making the process verifiable and optimizable to better bridge the semantic gap between textual descriptions and temporal dynamics?

In this paper, we propose CodeTS, a novel Text-to-Code-to-TS framework that bridges the semantic gap between textual descriptions and temporal dynamics by introducing executable code as an explicit intermediate interface, as illustrated in Fig. 1(b). Specifically, CodeTS decomposes Text-to-TS generation into Code Generation (CodeGen), which grounds textual temporal requirements into executable generation programs, and Code Execution (CodeExe), which executes these programs to produce time series. This decomposition transforms the implicit Text-to-TS mapping into an explicit generation process, enabling verification through execution while allowing the code generation policy to be initialized with supervised learning and further optimized through reinforcement learning. To support this two-stage learning process, we construct aligned Text-Code-TS triplets from structured temporal attributes for supervised initialization, and design multi-stage execution-based rewards over format validity, code executability, and time series quality for reinforcement learning optimization. Finally, extensive experiments on eight benchmarks across different generation lengths demonstrate the effectiveness of CodeTS compared with state-of-the-art baselines.

Our main contributions are summarized as follows:

- We are the first to reformulate Text-to-TS generation as a Text-to-Code-to-TS process, transforming the implicit mapping between text and time series into an explicit code space. This formulation provides a new perspective for mitigating the gap between language semantics and temporal dynamics.
- We propose CodeTS, a novel framework that implements Text-to-Code-to-TS with normalized code generation and sandboxed execution, making time series generation explicit, verifiable, and optimizable via execution-based rewards.
- We develop aligned Text-Code-TS triplets for supervised initialization and multi-stage execution rewards for reinforcement learning. These designs provide code-level supervision and multi-stage verification over format validity, code executability, and time-series quality.

- Extensive experiments on eight benchmarks across different generation lengths demonstrate the effectiveness of CodeTS compared with state-of-the-art supervised Text-to-TS methods and LLM-based zero-shot baselines.

2 Related Work

Time Series Generation and Text-to-TS Generation. Deep generative models for time series have progressed from GAN-based approaches, such as TimeGAN [Yoon et al., 2019] and GT-GAN [Jeon et al., 2022], to diffusion and discrete-latent models, such as Diffusion-TS [Yuan and Qiao, 2024] and TimeVQVAE [Lee et al., 2023]. Recent Text-to-TS studies extend conditional generation to natural language, including VerbalTS [Gu et al., 2025], T2S [Ge et al., 2025], BRIDGE [Li et al., 2025], and textualized autoregressive generation methods [Rousseau et al., 2025]. Despite their differences in supervision, architecture, and generation strategy, existing methods mostly rely on implicit representations, making the gap between textual requirements and temporal patterns difficult to inspect and directly optimize.

Language Models and Foundation Models for Time Series. Recent studies have explored language models and foundation models for time series forecasting, representation learning, and multimodal understanding. Representative examples include LLM-based forecasting methods such as GPT4TS [Zhou et al., 2023] and Time-LLM [Jin et al., 2024], foundation models such as Chronos [Ansari et al., 2024], and multimodal time series systems such as ChatTime [Wang et al., 2025] and TimeOmni-1 [Guan et al., 2025]. These works highlight the potential of language model-based time series modeling, but still rely on numerical, discretized, or textualized sequence representations, leaving the translation from textual requirements to temporal patterns largely implicit. Additionally, TS2Code [Tan et al., 2026] recently explores code-based time series understanding by generating code from time series visualizations, but it focuses on reconstruction and forecasting rather than text-conditioned generation.

3 Problem Definition

Text-to-TS generation aims to synthesize a time series conditioned solely on a natural language description. Following the setting in [Ge et al., 2025], the dataset with N samples can be denoted as:

$$\mathcal{D} = \{(x_i, d_i)\}_{i=1}^N, \quad (1)$$

where $x_i \in \mathbb{R}^{L_i}$ denotes a univariate time series of length L_i and d_i denotes its corresponding description. The generated time series $\hat{x}_i$ is expected to match the target time series x_i , which can be written as:

$$\min_{\theta} \mathbb{E}_{(x_i, d_i) \sim \mathcal{D}} [\|x_i - \hat{x}_i\|_2^2], \quad \hat{x}_i \sim \pi_{\theta}(\cdot \mid d), \quad (2)$$

where π_{θ} denotes a conditional generative model. In this formulation, π_{θ} can be instantiated as a text-conditioned diffusion or as an LLM-based generator. However, the generation logic that maps textual semantics to temporal dynamics remains implicit.

4 Methodology

This section presents CodeTS, which reformulates Text-to-TS generation as Text-to-Code-to-TS: a textual description is first translated into executable code, and the time series is then obtained by code execution. We first formalize this formulation in Sec. 4.1, then describe how aligned Text-Code-TS triplets are constructed to provide code-level supervision in Sec. 4.2. We next introduce execution-based rewards for evaluating generated code and its executed time series in Sec. 4.3, followed by the supervised initialization and RLVR-based [Lambert et al., 2024] optimization procedure in Sec. 4.4.

4.1 Text-to-Code-to-TS Formulation

Conventional Text-to-TS generation directly maps a natural language description d to a numerical sequence x , leaving the mapping implicit and making it difficult to inspect whether key temporal factors are reflected in the output. Executable code addresses this limitation by externalizing textual temporal requirements into executable generation programs, making the Text-to-TS mapping explicit,

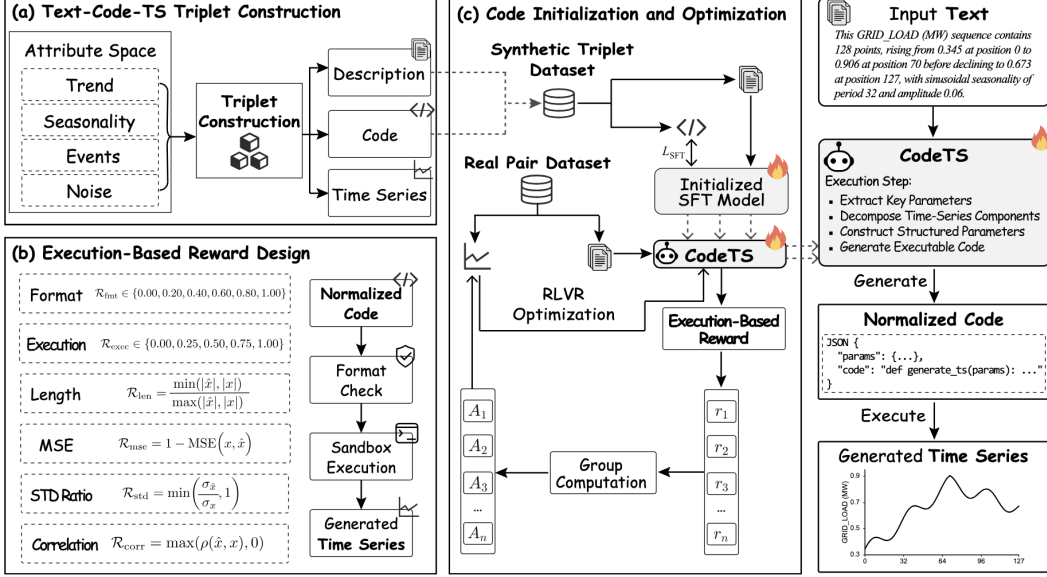


Figure 2: Overview of CodeTS. (a) Synthetic Text-Code-TS triplets are constructed from structured temporal attributes. (b) Execution-based rewards verify normalized format, code executability, and time series quality. (c) The model is first initialized on synthetic triplets by SFT and then optimized on real Text-TS pairs with execution-based rewards and GRPO. At inference time, CodeTS maps input text to normalized code and executes it to generate the target time series.

verifiable through execution, and optimizable with execution-based rewards. To this end, we formulate Text-to-TS generation as a Text-to-Code-to-TS process (Fig. 1(b)). Given a natural language description d , the model generates a code program y from the code space $\mathcal{Y}$:

$$y \sim \pi_{\theta}(\cdot | d), \quad (3)$$

where π_{θ} denotes the code generation policy. The generated time series is then obtained by executing the code:

$$\hat{x} = \text{Execute}(y). \quad (4)$$

Therefore, the Text-to-TS generation is formulated as the composition of code generation and execution:

$$d \xrightarrow{\pi_{\theta}} y \xrightarrow{\text{Execute}} \hat{x}. \quad (5)$$

This formulation changes the generation target from raw numerical sequences to executable generation logic, which is well suited to time series because temporal patterns such as trends, periodic fluctuations, local events, and noise can be explicitly specified and combined in code. However, real world Text-TS pairs lack executable code, which motivates the rule-based construction of synthetic Text-Code-TS triplets in the next subsection.

4.2 Text-Code-TS Triplet Construction

The Text-to-Code-to-TS formulation requires learning a mapping from textual descriptions to executable code, whereas real world Text-to-TS datasets typically provide only Text-TS pairs without corresponding code annotations. This motivates the construction of synthetic Text-Code-TS triplets, which provide code-level supervision for initializing the framework.

Inspired by the synthetic data construction in [Xie et al., 2025, Lin et al., 2026], we adopt a rule-based triplet construction strategy. Each triplet is generated from a shared structured temporal attribute a_j , which specifies the temporal factors to be realized, including sequence length, trend, seasonality, local events, and noise characteristics:

$$a_j = (a_j^{\text{len}}, a_j^{\text{trend}}, a_j^{\text{season}}, a_j^{\text{event}}, a_j^{\text{noise}}) \in \mathcal{A}, \quad (6)$$

where $\mathcal{A}$ denotes the structured temporal attribute space. For synthetic data construction, a_j serves as a shared source for generating the description, code, and time series, thereby aligning the three

elements of each triplet:

$$d_j = \mathcal{G}_{\text{text}}(a_j), \quad y_j = \mathcal{G}_{\text{code}}(a_j), \quad x_j = \text{Execute}(y_j), \quad (7)$$

where $\mathcal{G}_{\text{text}}$ and $\mathcal{G}_{\text{code}}$ generate the textual description and executable code from a_j , respectively. The synthetic triplet dataset is then defined as:

$$\mathcal{D}_{\text{syn}} = \{(d_j, y_j, x_j)\}_{j=1}^{N_s}. \quad (8)$$

In each triplet, d_j is the textual input, y_j is the reference code for supervised code generation, and x_j is the execution result of y_j . Since all three elements are generated from the same temporal attribute a_j , the triplet is aligned by construction.

Normalized Code Representation. Although the above construction provides aligned descriptions, code, and time series, reliable parsing, execution, and reward computation require a structured code format. We therefore represent each reference code y_j as a normalized JSON object with two fields: `params`, which stores temporal parameters such as length, trend, seasonality, local events, and noise settings, and `code`, which defines a Python function that generates the time series from these parameters. A concrete example is provided in Appendix B.

4.3 Execution-Based Reward Design

Given a textual description d , the model samples a code $y \sim \pi_\theta(\cdot \mid d)$. Following Eq. (4), the code is executed to obtain the generated time series $\hat{x}$ if it passes the required format and execution checks. The reward is designed to evaluate both the generated code and its executed output, covering normalized format validity, executable correctness, and time-series quality.

Formally, the overall reward is defined as

$$R(y, x, d) = \lambda_{\text{fmt}} R_{\text{fmt}}(y) + \lambda_{\text{exec}} R_{\text{exec}}(y) + \mathbb{I}_{\text{valid}}(y) \lambda_{\text{ts}} R_{\text{ts}}(\hat{x}, x), \quad (9)$$

where R_{fmt} evaluates whether the output follows the normalized `params/code` schema, R_{exec} evaluates whether the generated code is safe and executable, and R_{ts} , defined in Eq. (10), measures the quality of the executed time series. The indicator $\mathbb{I}_{\text{valid}}(y)$ equals 1 only when the generated output can be correctly parsed and executed; otherwise, the sequence-level reward is not assigned. This design prevents invalid code from receiving misleading feedback based on time-series similarity. After successful execution, the generated time series $\hat{x}$ is compared with the paired target series x . The time series reward is defined as a weighted combination of complementary criteria:

$$R_{\text{ts}}(\hat{x}, x) = \lambda_{\text{len}} R_{\text{len}}(\hat{x}, x) + \lambda_{\text{err}} R_{\text{err}}(\hat{x}, x) + \lambda_{\text{corr}} R_{\text{corr}}(\hat{x}, x) + \lambda_{\text{stat}} R_{\text{stat}}(\hat{x}, x). \quad (10)$$

Here, R_{len} checks length consistency, R_{err} measures pointwise numerical accuracy, R_{corr} evaluates temporal-pattern alignment through correlation, and R_{stat} compares distributional statistics such as scale or variance. Together, these terms assess whether the executed code produces a time series that matches the paired target sequence in both local values and global temporal structure. Detailed definitions of these rewards are provided in Appendix C.

This reward design turns executable generation into a verifiable optimization signal. For real Text-to-TS pairs where reference code is unavailable, the model can still be optimized through format validation, execution checking, and direct comparison between the generated and target time series.

4.4 Initialization and Execution-based Optimization

The model is trained in two stages. First, supervised initialization is performed on the synthetic triplets in Eq. (8), where each textual description is paired with a reference executable code. The second stage further optimizes the initialized code generation model on real Text-TS pairs using the reward in Eq. (9), where no reference code is available.

Supervised Code Initialization. Given the synthetic triplet dataset $\mathcal{D}_{\text{syn}} = \{(d_j, y_j, x_j)\}_{j=1}^{N_s}$, the supervised stage trains the model to generate the reference code y_j conditioned on the textual description d_j . The executed series x_j is not used as a direct generation target in this stage; instead, it verifies that the reference code is executable and aligned with the temporal attribute used to construct the triplet. The supervised fine-tuning objective is defined as the negative log-likelihood of the reference code:

$$\mathcal{L}_{\text{SFT}}(\theta) = -\mathbb{E}_{(d, y, x) \sim \mathcal{D}_{\text{syn}}} \sum_{t=1}^{|y|} \log \pi_\theta(y_t \mid y_{<t}, d). \quad (11)$$

This stage teaches the model the normalized params/code format and initializes the mapping from textual temporal descriptions to executable generation code. Such initialization is important for the subsequent reinforcement learning stage, where invalid or non-executable code would otherwise lead to sparse and noisy feedback.

Execution-Guided Policy Optimization. After supervised initialization, the model is further optimized on real Text-TS pairs, where no reference code is available. For each description d_i , the policy samples a group of G candidate code. Each candidate is checked, executed when valid, and scored by the execution-based reward in Eq. (9). Let $R_i^{(k)}$ denote the reward of the k -th sampled code for the pair (d_i, x_i) . The relative advantage used by GRPO [Shao et al., 2024] is computed within the sampled group:

$$\hat{A}_i^{(k)} = \frac{R_i^{(k)} - \text{mean}(\{R_i^{(j)}\}_{j=1}^G)}{\text{std}(\{R_i^{(j)}\}_{j=1}^G) + \varepsilon}, \quad (12)$$

where ε is a small constant for numerical stability. This group-relative normalization encourages code that outperform other candidates generated for the same description, while suppressing invalid or low-quality code.

The policy is updated with GRPO using the relative advantages. For stable optimization, we maximize a clipped surrogate objective with KL regularization [Schulman et al., 2015] toward the supervised initialization policy:

$$\mathcal{J}_{\text{GRPO}}(\theta) = \mathbb{E} \left[\frac{1}{G} \sum_{k=1}^G \ell_i^{(k)}(\theta) - \beta D_{\text{KL}}(\pi_{\theta}(\cdot | d_i) \| \pi_{\text{SFT}}(\cdot | d_i)) \right], \quad (13)$$

where the clipped surrogate term is:

$$\ell_i^{(k)}(\theta) = \frac{1}{T_k} \sum_{t=1}^{T_k} \min \left(\rho_{i,t}^{(k)}(\theta) \hat{A}_i^{(k)}, \text{clip}(\rho_{i,t}^{(k)}(\theta), 1 - \varepsilon, 1 + \varepsilon) \hat{A}_i^{(k)} \right). \quad (14)$$

Here, T_k is the total length of output code, $\rho_{i,t}^{(k)}(\theta)$ is the policy ratio between the current policy and the sampling policy, ε is the clipping threshold, and β controls the KL regularization strength. The clipped surrogate favors candidates with higher relative advantages while limiting overly large policy updates, and the KL term keeps the policy close to the supervised initialization policy.

Overall, the training process is summarized as:

$$\theta_{\text{SFT}} = \arg \min_{\theta} \mathcal{L}_{\text{SFT}}(\theta), \quad \theta_{\text{final}} = \arg \max_{\theta} \mathcal{J}_{\text{GRPO}}(\theta; \theta_{\text{SFT}}). \quad (15)$$

The supervised stage initializes executable code generation, and the execution-guided stage improves generation quality through verifiable feedback from code execution and TS comparison.

5 Experiments

5.1 Experimental Setup

Datasets. We evaluate on eight public benchmarks, including ETTh1, ETTh2, ETTm1, ETTm2 [Wu et al., 2021], Electricity, Exchange, Weather [Zhou et al., 2021], and Web [Casado-Vara et al., 2021], with generation lengths of 96, 192, and 336. Details of the text-conditioned benchmark and the real Text-TS data used for RLVR training are provided in Appendix D.

Metrics. We report Mean Squared Error (MSE), Dynamic Time Warping distance (DTW) [Sakoe and Chiba, 2003], and Pearson correlation as general quality metrics. For LLM-based zero-shot baselines, we additionally report Pass@1 [Chen et al., 2021] Success Rate (SR), defined as the fraction of samples whose outputs can be successfully parsed and, when applicable, executed. Detailed introductions are provided in Appendix E.

Baselines. We compare CodeTS with four supervised generative baselines, including Diffusion-TS [Yuan and Qiao, 2024], T2S [Ge et al., 2025], VerbalTS [Gu et al., 2025], and TimeVQVAE [Lee et al., 2023]; Diffusion-TS and TimeVQVAE use text-conditioning adapters following Ge et al. [2025]. To adapt non-text generative baselines to the Text-to-TS setting, Diffusion-TS and TimeVQVAE are

Table 1: Comparison with supervised time series generation baselines. CodeTS is evaluated zero-shot, while all supervised baselines are trained separately on each target dataset and generation length. Bold and underline denote the best and second-best results.

Datasets	Length	CodeTS			VerbalTS			T2S			Diffusion-TS			TimeVQVAE		
		MSE↓	DTW↓	Pearson↑	MSE↓	DTW↓	Pearson↑	MSE↓	DTW↓	Pearson↑	MSE↓	DTW↓	Pearson↑	MSE↓	DTW↓	Pearson↑
ETTh1	96	0.0202	0.0799	0.8136	0.1438	0.1794	0.0600	0.1114	0.1740	-0.0253	0.1286	0.1721	0.1351	<u>0.0575</u>	0.1545	0.3571
	192	0.0219	0.0808	0.7714	0.1430	0.1847	0.0889	0.1242	0.1626	-0.0331	0.0933	<u>0.1415</u>	0.1620	<u>0.0578</u>	0.1533	0.3005
	336	0.0232	0.0823	0.7242	0.1895	0.2368	0.0414	0.0839	0.1522	-0.0474	0.0835	<u>0.1385</u>	<u>0.2414</u>	<u>0.0666</u>	0.2061	0.0608
ETTh2	96	0.0305	0.1041	0.7302	0.1238	0.1891	<u>0.2522</u>	0.1126	0.1931	0.0150	0.1259	0.2118	0.2064	<u>0.0741</u>	0.1769	0.2389
	192	0.0295	0.0999	0.6835	0.1598	0.2220	0.0668	0.1277	0.2078	0.0199	0.1465	0.2312	0.1246	<u>0.0852</u>	<u>0.1977</u>	0.2234
	336	0.0292	0.0993	0.6456	0.2531	0.3584	0.0336	0.1003	0.1945	0.0251	0.1059	<u>0.1868</u>	<u>0.1001</u>	<u>0.0935</u>	0.2368	0.0202
ETTm1	96	0.0161	0.0669	0.8713	<u>0.0723</u>	<u>0.1139</u>	<u>0.4928</u>	0.1143	0.1998	0.0069	0.1480	0.1824	0.0386	0.0830	0.2338	0.0434
	192	0.0181	0.0685	0.8338	0.0854	<u>0.1274</u>	<u>0.3767</u>	0.1104	0.1900	-0.0123	0.1246	0.1595	0.1136	<u>0.0679</u>	0.1647	0.3147
	336	0.0276	0.0704	0.7341	0.1429	0.1786	0.0011	0.0730	0.1564	0.0257	0.1124	<u>0.1450</u>	<u>0.0264</u>	<u>0.0619</u>	0.1933	0.0000
ETTm2	96	0.0279	0.0982	0.7944	0.0883	<u>0.1354</u>	<u>0.4486</u>	0.1604	0.2525	0.0125	0.1820	0.2372	0.0266	<u>0.0882</u>	0.2253	0.0629
	192	0.0295	0.1016	0.7532	0.1091	0.1608	0.2999	0.1167	0.1925	0.0298	0.1434	0.1994	0.1579	<u>0.0705</u>	<u>0.1556</u>	<u>0.3092</u>
	336	0.0332	0.0968	0.6689	0.1305	<u>0.1830</u>	-0.0058	0.0945	0.1838	<u>0.0331</u>	0.1320	0.1940	0.0118	<u>0.0671</u>	0.2117	-0.0111
Weather	96	0.0159	0.0622	0.8599	0.0741	0.0874	<u>0.4925</u>	0.1636	0.2468	0.0023	0.1566	0.1839	0.0374	0.0907	0.2312	0.0108
	192	0.0159	0.0592	0.8427	<u>0.0787</u>	<u>0.0930</u>	<u>0.4415</u>	0.1652	0.2370	0.0284	0.1566	0.1894	0.0188	0.0812	0.2114	0.0044
	336	0.0213	0.0648	0.7701	0.1344	<u>0.1409</u>	-0.0026	0.1105	0.1951	<u>0.0219</u>	0.1532	0.1986	0.0097	<u>0.0721</u>	0.2008	-0.0045
Electricity	96	0.0301	0.0923	0.8112	<u>0.0458</u>	<u>0.0968</u>	<u>0.7666</u>	0.1725	0.2206	0.0629	0.1033	0.1389	0.5250	0.0559	0.1027	0.7242
	192	0.0284	0.0845	0.7982	0.0461	0.1024	<u>0.7372</u>	0.1515	0.1869	0.1028	0.0966	0.1421	0.5896	0.0657	0.1341	0.6669
	336	0.0280	0.0824	0.7811	<u>0.0533</u>	<u>0.1197</u>	<u>0.7024</u>	0.1121	0.1550	0.1137	0.1020	0.1585	0.5294	0.0670	0.1620	0.6459
Exchange	96	0.0795	0.1643	0.4815	0.2182	0.2499	0.0318	0.1296	0.2235	0.0013	0.2110	0.2906	0.0516	0.1660	0.3090	0.2021
	192	0.0837	0.1481	0.5180	0.2714	0.2979	0.0083	0.1777	<u>0.2634</u>	0.0059	0.2064	0.2794	<u>0.1936</u>	<u>0.1038</u>	0.2646	0.0447
	336	0.0870	0.1449	0.5159	0.2336	0.3207	0.0047	0.1090	0.1921	-0.0246	0.1315	0.2021	<u>0.1139</u>	<u>0.0957</u>	0.2508	0.0040
Web	96	<u>0.0326</u>	<u>0.1162</u>	0.3672	0.0518	0.0940	<u>0.0533</u>	0.0727	0.1597	-0.0147	0.0582	0.1169	-0.0123	<u>0.0430</u>	0.1274	-0.0411
	192	0.0246	0.1002	0.3024	0.0343	0.0733	<u>0.0577</u>	0.0391	0.1056	-0.0147	0.0360	<u>0.0909</u>	-0.0080	<u>0.0277</u>	0.0925	-0.0270
	336	<u>0.0175</u>	0.0823	0.2664	0.0273	0.0751	0.0203	0.0212	0.0749	0.0209	0.0219	<u>0.0662</u>	0.0463	0.0171	0.0653	0.1078
Average		0.0321	0.0938	0.6808	0.1213	<u>0.1675</u>	<u>0.2279</u>	0.1148	0.1883	0.0148	0.1233	0.1774	0.1433	<u>0.0733</u>	0.1859	0.1774

Table 2: Comparison with zero-shot LLM baselines for time series generation. SR denotes the pass@1 execution success rate. [†] indicates values that are approximately 100.0%. Bold and underline denote the best and second-best results.

Datasets	Length	CodeTS				TimeOmni-1				ChatTime				GPT4o-mini			
		MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑
ETTh1	96	0.0202	0.0799	0.8136	100.0	0.1749	<u>0.2736</u>	0.0669	87.1	0.1826	0.2772	0.0063	92.0	<u>0.1721</u>	0.3344	<u>0.0810</u>	<u>97.3</u>
	192	0.0219	0.0808	0.7714	100.0	0.1592	0.2644	<u>0.0660</u>	82.9	0.1672	<u>0.2561</u>	0.0156	92.9	<u>0.1552</u>	0.3201	0.0527	<u>93.7</u>
	336	0.0232	0.0823	0.7242	100.0	0.1615	0.2737	<u>0.0499</u>	66.0	0.1536	<u>0.2458</u>	0.0182	89.8	<u>0.1488</u>	0.3201	0.0098	87.1
ETTh2	96	0.0305	0.1041	0.7302	100.0	0.2489	0.3131	<u>0.0368</u>	79.3	<u>0.1771</u>	0.2814	-0.0020	90.8	0.3353	0.5147	0.0152	<u>97.1</u>
	192	0.0295	0.0999	0.6835	100.0	0.2094	0.3091	<u>0.0514</u>	77.8	<u>0.1730</u>	<u>0.2740</u>	-0.0087	88.9	0.3237	0.5116	0.0082	<u>92.1</u>
	336	0.0292	0.0993	0.6456	100.0	0.2047	0.3078	<u>0.0441</u>	56.5	<u>0.1450</u>	<u>0.2432</u>	-0.0446	<u>91.2</u>	0.2995	0.4919	-0.0048	74.1
ETTm1	96	0.0161	0.0669	0.8713	100.0	0.1967	<u>0.2755</u>	0.1279	86.4	<u>0.1924</u>	0.2856	-0.0050	92.7	0.2004	0.3543	<u>0.1668</u>	<u>97.3</u>
	192	0.0181	0.0685	0.8338	100.0	0.1836	0.2759	<u>0.0796</u>	80.5	<u>0.1742</u>	<u>0.2651</u>	0.0011	91.6	0.1808	0.3419	0.0772	<u>94.3</u>
	336	0.0276	0.0704	0.7341	100.0	0.1669	0.2695	<u>0.0548</u>	66.1	<u>0.1607</u>	<u>0.2538</u>	-0.0039	86.4	<u>0.1702</u>	0.3417	0.0136	<u>91.6</u>
ETTm2	96	0.0279	0.0982	0.7944	100.0	0.2618	0.3079	<u>0.0901</u>	80.2	<u>0.1983</u>	<u>0.2955</u>	-0.0038	92.5	0.3669	0.5284	0.0134	<u>96.8</u>
	192	0.0295	0.1016	0.7532	100.0	0.2423	0.3209	<u>0.0484</u>	73.4	<u>0.1815</u>	<u>0.2733</u>	0.0001	91.3	0.3500	0.5255	0.0009	<u>93.1</u>
	336	0.0332	0.0968	0.6689	100.0	0.2242	0.3200	<u>0.0521</u>	59.7	<u>0.1578</u>	<u>0.2538</u>	-0.0016	<u>86.7</u>	0.3382	0.5223	-0.0005	84.5
Weather	96	0.0159	0.0622	0.8599	100.0	<u>0.2330</u>	<u>0.2748</u>	<u>0.1505</u>	79.1	0.2400	0.3338	-0.0040	92.9	0.3276	0.4507	0.0758	<u>98.0</u>
	192	0.0159	0.0592	0.8427	100.0	0.2586	<u>0.3068</u>	<u>0.0680</u>	68.1	<u>0.2375</u>	0.3273	0.0010	91.5	0.2981	0.4279	0.0341	<u>95.0</u>
	336	0.0213	0.0648	0.7701	100.0	<u>0.2144</u>	<u>0.2765</u>	<u>0.0858</u>	59.2	0.2206	0.3112	0.0102	87.2	0.2512	0.3928	0.0234	<u>88.1</u>
Electricity	96	0.0301	0.0923	0.8112	100.0	0.2490	<u>0.2817</u>	<u>0.0123</u>	79.3	<u>0.2165</u>	0.2903	0.0045	92.8	0.3337	0.4789	0.0054	<u>97.0</u>
	192	0.0284	0.0845	0.7982	99.8	0.2186	0.2998	<u>0.0034</u>	73.6	<u>0.2106</u>	<u>0.2847</u>	0.0006	90.1	0.3161	0.4699	0.0024	<u>94.9</u>
	336	0.0280	0.0824	0.7811	99.9	0.1887	0.2992	<u>0.0205</u>	65.0	<u>0.1858</u>	<u>0.2711</u>	0.0000	84.9	0.3000	0.4611	0.0036	<u>85.3</u>
Exchange	96	0.0795	0.1643	0.4815	100.0	0.3052	0.3530	<u>0.0577</u>	64.3	0.2118	0.3079	0.0411	96.2	0.4009	0.4932	0.0264	<u>97.3</u>
	192	0.0837	0.1481	0.5180	100.0	0.2893	0.3536	0.0324	51.6	<u>0.1924</u>	<u>0.2956</u>	0.0213	<u>92.3</u>	0.3706	0.4718	<u>0.0619</u>	<u>92.3</u>
	336	0.0870	0.1449	0.5159	100.0	0.2927	0.3896	<u>0.0353</u>	28.6	<u>0.1983</u>	<u>0.3133</u>	-0.0800	<u>91.1</u>	0.3415	0.4784	0.0301	71.4
Web	96	0.0326	0.1162	0.3672	100.0	0.1738	0.2314	<u>0.0639</u>	81.6	0.3097	0.4230	-0.0012	<u>92.0</u>	<u>0.0631</u>	<u>0.1690</u>	0.0577	90.0
	192	0.0246	0.1002	0.3024	100.0	0.2420	0.2924	0.0476	65.0	0.3359	0.4486	0.0001	<u>91.8</u>	<u>0.0406</u>	<u>0.1293</u>	<u>0.0509</u>	67.7
	336	0.0175	0.0823	0.2664	99.9	0.2387	0.2776	0.0242	48.9	0.3313	0.4483	-0.0099	<u>87.5</u>	<u>0.0254</u>	<u>0.0997</u>	<u>0.0657</u>	37.3
Average		0.0321	0.0938	0.6808	100.0 [†]	0.2224	<u>0.2978</u>	<u>0.0571</u>	69.2	<u>0.2064</u>	0.3025	-0.0019	<u>90.7</u>	0.2546	0.4012	0.0363	88.1

equipped with text-conditioning adapters [Ge et al., 2025]. For LLM-based baselines, we evaluate direct zero-shot generators, including ChatTime [Wang et al., 2025], TimeOmni-1 [Guan et al., 2025], and GPT-4o-mini [Hurst et al., 2024], as well as recent coding-capable LLMs under the same Text-to-Code-to-TS prompting setup, including IQuest-Coder-V1-7B-Instruct [Yang et al., 2026], Devstral-Small-2-24B-Instruct-2512 (Devstral-Instruct-24B) [Rastogi et al., 2025], Seed-Coder-8B-Instruct [Seed et al., 2025], and Qwen3.5-9B [Team, 2026].

Implementation Details. CodeTS is initialized from Qwen2.5-Coder-7B-Instruct [Hui et al., 2024]. For SFT warmup, we train on 500 synthetic triplets for one epoch with a maximum sequence length of 3072, a learning rate of 5×10^{-6} , a batch size of 64. For RLVR, we train on 6300 real (d, x) pairs using GRPO with 4 samples per prompt, learning rate 5×10^{-7} , KL coefficient 10^{-3} , and 200 update steps. We use ZeRO-2 [Rajbhandari et al., 2020] for SFT and ZeRO-3 with vLLM [Kwon et al., 2023] for RLVR on A100 GPUs. More details are provided in Appendix G.

5.2 Main Results

In Table 1, CodeTS achieves the best averaged performance across all three metrics, despite being evaluated zero-shot against supervised baselines trained separately on each target dataset and generation length. Compared with the strongest supervised baseline for each metric, CodeTS improves MSE from 0.0733 to 0.0321, DTW from 0.1675 to 0.0938, and Pearson correlation from 0.2279 to 0.6808, corresponding to relative improvements of **56.2%**, **44.0%**, and **198.7%**, respectively. On the Web dataset, although CodeTS does not always achieve the best MSE or DTW, it consistently obtains the best Pearson correlation across all generation lengths. This metric is particularly informative in this dataset, where long flat regions and sparse abrupt variations make shape preservation more relevant than pointwise error alone. We provide a detailed analysis of the Web results in Appendix H. Table 2 shows that CodeTS achieves the best performance across all length settings and all reported metrics. In the averaged results, CodeTS reduces MSE from 0.2064 to 0.0321 and DTW from 0.2978 to 0.0938 compared with the strongest zero-shot LLM baseline for each error metric, corresponding to relative reductions of **84.4%** and **68.5%**, respectively. It also increases the average Pearson correlation from 0.0571 to 0.6808, corresponding to **11.9** times the strongest zero-shot LLM baseline, while maintaining a near-perfect pass@1 execution success rate.

We further compare with mainstream and recent strong coding-capable LLMs, including IQuest-Coder-V1-7B-Instruct [Yang et al., 2026], Devstral-Instruct-24B [Rastogi et al., 2025], Seed-Coder-8B-Instruct [Seed et al., 2025], and Qwen3.5-9B [Team, 2026], under the same Text-to-Code-to-TS setup. Although these models achieve high execution success rates, CodeTS remains stronger overall, especially in Pearson correlation, indicating better preservation of temporal patterns rather than merely producing executable code. Detailed comparisons are provided in Appendix F.

5.3 Ablation Studies

We conduct ablation studies on three key components of CodeTS: the training stages, the normalized code representation, and the reward design; the main paper reports averaged and representative results, with detailed per-dataset and per-length statistics provided in Appendix I. Additional supporting analyses, including RLVR training dynamics, prompt settings, and representative case studies, are provided in Appendix K–N.

Training Stage Ablation. We analyze the contribution of each training stage by comparing the base model, the SFT-initialized model, and the final RLVR-optimized model. As shown in Table 3, the averaged performance over all benchmark datasets improves from the base model to SFT and further to the full RLVR-optimized model across output lengths. This shows that both stages are beneficial: SFT improves MSE, DTW, and Pearson correlation by learning the normalized code format and basic executable generation patterns, while RLVR further improves the executed time series through reward-based optimization on real Text-TS pairs. The improvement from SFT is moderate because it mainly serves as a warmup for format alignment and executable code initialization, rather than directly optimizing the generated series against real targets. Fig. 3 further decomposes the relative gains on representative datasets, showing that SFT provides a stable warmup contribution, whereas RLVR accounts for the dominant share of the improvement, especially on Pearson correlation.

Normalized Code Representation Ablation. We evaluate the effect of the normalized code representation by comparing full CodeTS with a variant that directly generates executable code without explicit temporal parameters. As shown in Fig. 4(a), removing normalized code consistently worsens the results on ETTm1, ETTm2, and Weather, leading to higher MSE and DTW and lower Pearson correlation. This shows that the improvement of CodeTS does not come only from using executable code, but also from structuring the output into explicit temporal parameters and executable logic.

Reward Design Ablation. We evaluate the reward design by removing key components from the time-series quality reward while keeping the format and execution rewards fixed. As shown in Fig. 4(b), the full reward achieves the best overall performance across the evaluated datasets, with lower MSE and DTW and higher Pearson correlation. Removing the statistical reward weakens the results, and removing both correlation and statistical rewards leads to further degradation, especially in Pearson correlation.

5.4 Template Dependency Analysis

Table 3: Training-stage ablation averaged over all benchmark datasets and output lengths.

Length	Metric	Base	SFT	Full
96	↓MSE	0.095	0.089	0.032
	↓DTW	0.147	0.141	0.098
	↑PC	0.238	0.282	0.716
192	↓MSE	0.092	0.086	0.031
	↓DTW	0.137	0.134	0.093
	↑PC	0.185	0.210	0.688
336	↓MSE	0.084	0.081	0.033
	↓DTW	0.135	0.133	0.090
	↑PC	0.132	0.157	0.638

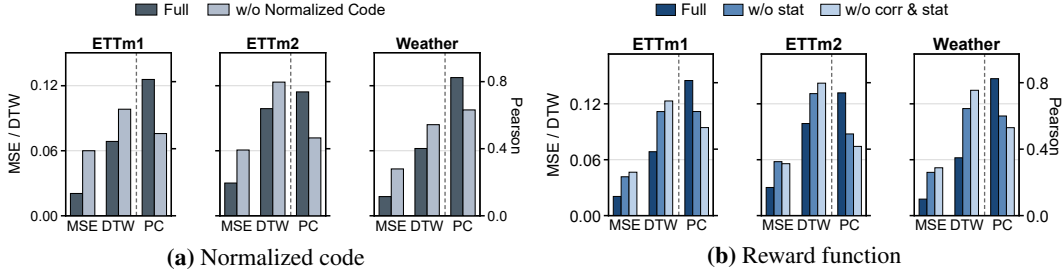
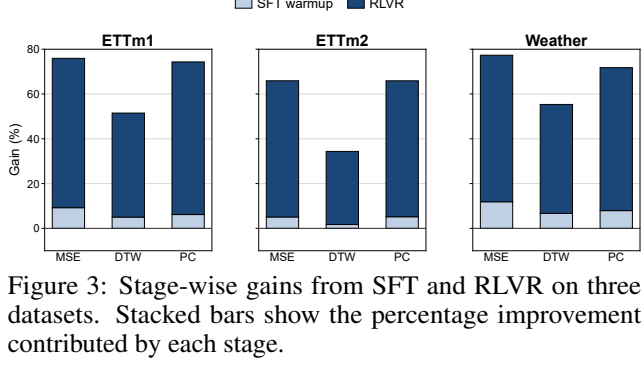


Figure 4: Ablation results for normalized code representation and reward design. Panel (a) studies normalized code, and panel (b) studies reward components.

We further evaluate whether CodeTS remains effective when the input description is written in a different form. Specifically, we rewrite each description by preserving the same temporal attributes while changing the wording and attribute order, and then test the model on these perturbed descriptions. As shown in Figure 5, performance generally decreases after perturbation, indicating that the model is still affected by changes in description form. However, the final RLVR-optimized model remains much closer to the diagonal line than the SFT-warmup model across MSE, DTW, and Pearson correlation. Since points closer to the diagonal indicate smaller performance changes after perturbation, this result shows that RLVR improves robustness to textual perturbations and helps CodeTS learn a more stable mapping from temporal descriptions to generated time series, rather than relying only on fixed training templates. Detailed analysis are provided in Appendix J.

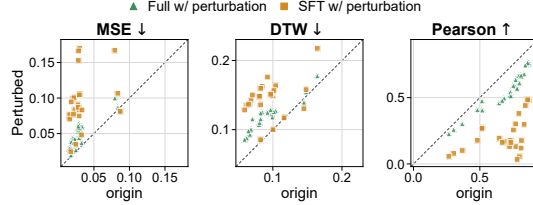


Figure 5: Template robustness analysis under perturbed descriptions.

6 Conclusion

We presented CodeTS, a verifiable Text-to-Code-to-TS framework that uses executable code as an explicit intermediate interface for Text-to-Time Series Generation. Through Text-Code-TS triplet initialization and execution-based RLVR, CodeTS learns to generate executable programs that translate textual temporal requirements into time series and can be optimized through verifiable feedback. Experiments on eight benchmarks show that CodeTS achieves strong Text-to-TS generation performance, outperforming LLM-based baselines and achieving better averaged results than supervised generative baselines trained on the target datasets.

Limitations and Future Work. While CodeTS demonstrates strong zero-shot generation ability, its current formulation is limited to univariate time series and can still be sensitive to ambiguous descriptions or missing temporal attributes. Future work will extend CodeTS to multivariate temporal data, and explore richer execution-based rewards for more data-scarce and high-value application generation scenarios.

References

- Sojung An, Tae-Jin Oh, Eunha Sohn, and Donghyun Kim. Deep learning for precipitation nowcasting: A survey from the perspective of time series forecasting. *Expert Systems with Applications*, 268: 126301, 2025.
- Abdul Fatir Ansari, Lorenzo Stella, Caner Turkmen, Xiyuan Zhang, Pedro Mercado, Huibin Shen, Oleksandr Shchur, Syama Sundar Rangapuram, Sebastian Pineda Arango, Shubham Kapoor, et al. Chronos: Learning the language of time series. *arXiv preprint arXiv:2403.07815*, 2024.
- Roberto Casado-Vara, Angel Martin del Rey, Daniel Pérez-Palau, Luis de-la Fuente-Valentín, and Juan M. Corchado. Web traffic time series forecasting using lstm neural networks with distributed asynchronous training. *Mathematics*, 9(4):421, 2021. doi: 10.3390/math9040421.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- Chirag Deb, Fan Zhang, Junjing Yang, Siew Eang Lee, and Kwok Wei Shah. A review on time series forecasting techniques for building energy consumption. *Renewable and Sustainable Energy Reviews*, 74:902–924, 2017.
- Alireza Ermagun and David Levinson. Spatiotemporal traffic forecasting: review and proposed directions. *Transport Reviews*, 38(6):786–814, 2018.
- Oliver Faust, Yuki Hagiwara, Tan Jen Hong, Oh Shu Lih, and U Rajendra Acharya. Deep learning for healthcare applications based on physiological signals: A review. *Computer methods and programs in biomedicine*, 161:1–13, 2018.
- Yunfeng Ge, Jiawei Li, Yiji Zhao, Haomin Wen, Zhao Li, Meikang Qiu, Hongyan Li, Ming Jin, and Shirui Pan. T2s: high-resolution time series generation with text-to-series diffusion models. In *Proceedings of the Thirty-Fourth International Joint Conference on Artificial Intelligence*, pages 5208–5216, 2025.
- Shuqi Gu, Chuyue Li, Baoyu Jing, and Kan Ren. Verbalts: Generating time series from texts. In *Forty-second International Conference on Machine Learning*, 2025.
- Tong Guan, Zijie Meng, Dianqi Li, Shiyu Wang, Chao-Han Huck Yang, Qingsong Wen, Zuozhu Liu, Sabato Marco Siniscalchi, Ming Jin, and Shirui Pan. Timeomni-1: Incentivizing complex reasoning with time series in large language models. *arXiv preprint arXiv:2509.24803*, 2025.
- Binyuan Hui, Jian Yang, Zeyu Cui, Jiayi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Keming Lu, et al. Qwen2. 5-coder technical report. *arXiv preprint arXiv:2409.12186*, 2024.
- Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, et al. Gpt-4o system card. *arXiv preprint arXiv:2410.21276*, 2024.
- Jinsung Jeon, Jeonghak Kim, Haryong Song, Seunghyeon Cho, and Noseong Park. Gt-gan: General purpose time series synthesis with generative adversarial networks. *Advances in Neural Information Processing Systems*, 35:36999–37010, 2022.
- Seungwoo Jeong, Junghyo Sohn, Jaehyun Jeon, and Heung-II Suk. Frequency-conditioned diffusion models for time series generation. In *Proceedings of the 34th ACM International Conference on Information and Knowledge Management*, pages 1114–1123, 2025.
- Ming Jin, Shiyu Wang, Lintao Ma, Zhixuan Chu, James Y Zhang, Xiaoming Shi, Pin-Yu Chen, Yuxuan Liang, Yuan-Fang Li, Shirui Pan, et al. Time-llm: Time series forecasting by reprogramming large language models. In *International Conference on Learning Representations*, 2024.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the 29th symposium on operating systems principles*, pages 611–626, 2023.

- Nathan Lambert, Jacob Morrison, Valentina Pyatkin, Shengyi Huang, Hamish Ivison, Faeze Brahman, Lester James V Miranda, Alisa Liu, Nouha Dziri, Shane Lyu, et al. Tulu 3: Pushing frontiers in open language model post-training. *arXiv preprint arXiv:2411.15124*, 2024.
- Daesoo Lee, Sara Malacarne, and Erlend Aune. Vector quantized time series generation with a bidirectional prior model. In *International Conference on Artificial Intelligence and Statistics*, pages 7665–7693. PMLR, 2023.
- Hao Li, Yu-Hao Huang, Chang Xu, Viktor Schlegel, Renhe Jiang, Riza Batista-Navarro, Goran Nenadic, and Jiang Bian. Bridge: Bootstrapping text to control time-series generation via multi-agent iterative optimization and diffusion modeling. *arXiv preprint arXiv:2503.02445*, 2025.
- Shujian Liao, Hao Ni, Marc Sabate-Vidales, Lukasz Szpruch, Magnus Wiese, and Baoren Xiao. Sig-wasserstein gans for conditional time series generation. *Mathematical Finance*, 34(2):622–670, 2024.
- Jiafeng Lin, Yuxuan Wang, Jialong Wu, Huakun Luo, Zhongyi Pei, and Jianmin Wang. Thoth: Mid-training bridges llms to time series understanding. *arXiv preprint arXiv:2603.01042*, 2026.
- Zinan Lin, Alankar Jain, Chen Wang, Giulia Fanti, and Vyas Sekar. Using gans for sharing networked time series data: Challenges, initial promise, and open questions. In *Proceedings of the ACM Internet Measurement Conference*, pages 464–483, 2020.
- Sai Shankar Narasimhan, Shubhankar Agarwal, Oguzhan Akcin, Sujay Sanghavi, and Sandeep Chinchali. Time weaver: a conditional time series generation model. In *International Conference on Machine Learning*, pages 37293–37320, 2024.
- Hao Ni, Lukasz Szpruch, Magnus Wiese, Shujian Liao, and Baoren Xiao. Conditional sig-wasserstein gans for time series generation. *arXiv preprint arXiv:2006.05421*, 2020.
- Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. Zero: Memory optimizations toward training trillion parameter models. In *SC20: international conference for high performance computing, networking, storage and analysis*, pages 1–16. IEEE, 2020.
- Abhinav Rastogi, Adam Yang, Albert Q Jiang, Alexander H Liu, Alexandre Sablayrolles, Amélie Héliou, Amélie Martin, Anmol Agarwal, Andy Ehrenberg, Andy Lo, et al. Devstral: Fine-tuning language models for coding agent applications. *arXiv preprint arXiv:2509.25193*, 2025.
- Cécile Rousseau, Tobia Boschi, Giandomenico Cornacchia, Dhaval Salwala, Alessandra Pascale, and Juan Bernabe Moreno. Forging time series with language: A large language model approach to synthetic data generation. In *Advances in Neural Information Processing Systems*, 2025.
- Hiroaki Sakoe and Seibi Chiba. Dynamic programming algorithm optimization for spoken word recognition. *IEEE transactions on acoustics, speech, and signal processing*, 26(1):43–49, 2003.
- John Schulman, Sergey Levine, Pieter Abbeel, Michael Jordan, and Philipp Moritz. Trust region policy optimization. In *Proceedings of the 32nd International Conference on Machine Learning*, pages 1889–1897, 2015.
- ByteDance Seed, Yuyu Zhang, Jing Su, Yifan Sun, Chenguang Xi, Xia Xiao, Shen Zheng, Anxiang Zhang, Kaibo Liu, Daoguang Zan, et al. Seed-coder: Let the code model curate data for itself. *arXiv preprint arXiv:2506.03524*, 2025.
- Omer Berat Sezer, Mehmet Ugur Gudelek, and Ahmet Murat Ozbayoglu. Financial time series forecasting with deep learning : A systematic literature review: 2005–2019. *Applied Soft Computing*, 90:106181, 2020.
- Aditya Shankar, Lydia Chen, Arie van Deursen, and Rihan Hai. Wavestitch: Flexible and fast conditional time series generation with diffusion models. *Proceedings of the ACM on Management of Data*, 3(6):1–25, 2025.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Yang Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.

- Mingtian Tan, C. Bayan Bruss, Nam H. Nguyen, David Evans, and Thomas Hartvigsen. Ts2code: Enhancing time series understanding via learning to code. In *ICLR 2026 Conference Submission*, 2026. URL <https://openreview.net/forum?id=4Ygp2A6am2>. Withdrawn submission.
- Qwen Team. Qwen3. 5-omni technical report. *arXiv preprint arXiv:2604.15804*, 2026.
- Chengsen Wang, Qi Qi, Jingyu Wang, Haifeng Sun, Zirui Zhuang, Jinming Wu, Lei Zhang, and Jianxin Liao. Chattime: A unified multimodal time series foundation model bridging numerical and textual data. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 12694–12702, 2025.
- Qingsong Wen, Liang Sun, Fan Yang, Xiaomin Song, Jingkun Gao, Xue Wang, and Huan Xu. Time series data augmentation for deep learning: A survey. In *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence*, pages 4653–4660. International Joint Conferences on Artificial Intelligence Organization, 2021.
- Qingsong Wen, Tian Zhou, Chaoli Zhang, Weiqi Chen, Ziqing Ma, Junchi Yan, and Liang Sun. Transformers in time series: A survey. *arXiv preprint arXiv:2202.07125*, 2022.
- Haixu Wu, Jiehui Xu, Jianmin Wang, and Mingsheng Long. Autoformer: Decomposition transformers with auto-correlation for long-term series forecasting. *Advances in Neural Information Processing Systems*, 34:22419–22430, 2021.
- Wen Wu, Ziyang Zhang, Liwei Liu, Xuenan Xu, Junlin Liu, Ke Fan, Qitan Lv, Jimin Zhuang, Chen Zhang, Zheqi Yuan, et al. Scits: Scientific time series understanding and generation with llms. *arXiv preprint arXiv:2510.03255*, 2025.
- Zhe Xie, Zeyan Li, Xiao He, Longlong Xu, Xidao Wen, Tieying Zhang, Jianjun Chen, Rui Shi, and Dan Pei. Chatts: Aligning time series with llms via synthetic data for enhanced understanding and reasoning. *Proceedings of the VLDB Endowment*, 18(8):2385–2398, 2025.
- Jian Yang, Wei Zhang, Shawn Guo, Zhengmao Ye, Lin Jing, Shark Liu, Yizhi Li, Jiajun Wu, Cening Liu, X Ma, et al. Iquest-coder-v1 technical report. *arXiv preprint arXiv:2603.16733*, 2026.
- Jinsung Yoon, Daniel Jarrett, and Mihaela Van der Schaar. Time-series generative adversarial networks. *Advances in neural information processing systems*, 32, 2019.
- Xinyu Yuan and Yan Qiao. Diffusion-ts: Interpretable diffusion for general time series generation. In *International Conference on Learning Representations*, 2024.
- Shijie Zhang. Spectral-aware text-to-time series generation with billion-scale multimodal meteorological data. *arXiv preprint arXiv:2603.27135*, 2026.
- Haoyi Zhou, Shanghang Zhang, Jieqi Peng, Shuai Zhang, Jianxin Li, Hui Xiong, and Wancai Zhang. Informer: Beyond efficient transformer for long sequence time-series forecasting. In *Proceedings of the AAAI conference on artificial intelligence*, volume 35, pages 11106–11115, 2021.
- Tian Zhou, Peisong Niu, Liang Sun, Rong Jin, et al. One fits all: Power general time series analysis by pretrained lm. *Advances in neural information processing systems*, 36:43322–43355, 2023.

A Notations

Table 4 summarizes the main mathematical symbols used in the paper.

Table 4: Notations used in CodeTS.

Notation	Description
$\mathcal{D} = \{(x_i, d_i)\}_{i=1}^N$	Text-TS dataset.
d_i, d	Text description.
x_i, x	Target time series.
$\hat{x}_i, \hat{x}$	Generated time series.
L_i, L	Series length.
π_θ	Code-generation policy.
y, y_j	Generated code and reference code.
$\mathcal{Y}$	Code space.
$\text{Execute}(\cdot)$	Sandboxed code execution.
a_j	Structured temporal attribute.
a_j^m	Temporal factor, where m denotes length, trend, seasonality, event, or noise.
$\mathcal{A}$	Attribute space.
$\mathcal{G}_{\text{text}}, \mathcal{G}_{\text{code}}$	Text/code generators.
$\mathcal{D}_{\text{syn}}, N_s$	Synthetic triplet dataset and its size.
$R_{\text{fmt}}, R_{\text{exec}}, R_{\text{ts}}$	Format, execution, and TS rewards in the main formulation.
$R_{\text{len}}, R_{\text{err}}, R_{\text{corr}}, R_{\text{stat}}$	Length, error, correlation, and statistic rewards.
$\lambda_{\text{fmt}}, \lambda_{\text{exec}}, \lambda_{\text{ts}}$	Weights for format, execution, and TS rewards.
$\lambda_{\text{len}}, \lambda_{\text{err}}, \lambda_{\text{corr}}, \lambda_{\text{stat}}$	Weights for TS reward components.
$\mathbb{I}_{\text{valid}}(y)$	Indicator of parseable and executable generated code.
G	Candidates per prompt.
$R_i^{(k)}$	Reward of candidate k .
$\hat{A}_i^{(k)}$	Group-normalized advantage.
$\rho_{i,t}^{(k)}(\theta)$	Token-level policy ratio.
$\ell_i^{(k)}(\theta)$	Clipped surrogate term for candidate k .
T_k	Output-code length.
ε	Stability constant and clipping threshold.
β	KL coefficient.
D_{KL}	Kullback-Leibler divergence.
π_{SFT}	SFT reference policy.
$\mathcal{L}_{\text{SFT}}(\theta)$	Supervised fine-tuning objective.
$\mathcal{J}_{\text{GRPO}}(\theta)$	GRPO objective.
$\theta_{\text{SFT}}, \theta_{\text{final}}$	SFT-initialized and final model parameters.

B Normalized Code Representation

Figure 6 illustrates the normalized code representation used by CodeTS. Each output is a JSON object with two fields: `params` stores structured temporal specifications such as length, trend, seasonality, local changes, noise, and target statistics, while `code` stores an escaped Python function `generate_ts(params)` that maps these parameters to a finite one-dimensional time series. This fixed interface keeps outputs parseable, executable, and rewardable, while still allowing diverse implementations of temporal patterns inside the generated code.

Normalized Code Representation	
<pre>{ "params": { "length": <int>, "trend_segments": [{ "start": <int>, "end": <int>, "start_value": <float>, "end_value": <float>, "trend_type": <string> }], "seasonality_type": <string>, "period": <float>, "amplitude": <float>, "phase": <float>, "harmonics": [{ "order": <int>, "amplitude_ratio": <float> }], "amplitude_envelope": <string>, "changes": [{ "position": <int>, "magnitude": <float>, "width": <float>, "change_type": <string> }], "noise_std": <float>, "target_mean": <float or null>, "target_std": <float or null> }, "code": "def generate_ts(params):\n ..." }</pre>	<pre>def generate_ts(params): t = arange(params["length"]) y = zeros(params["length"]) y += compose_trend(t, segments=params["trend_segments"]) y += compose_seasonality(t, seasonality_type=params["seasonality_type"], period=params["period"], amplitude=params["amplitude"], phase=params["phase"], harmonics=params["harmonics"], envelope=params["amplitude_envelope"]) y += compose_local_changes(t, changes=params["changes"]) y += normal_noise(std=params["noise_std"], length=params["length"]) y = match_statistics(y, target_mean=params["target_mean"], target_std=params["target_std"]) return y</pre>

Figure 6: Normalized code representation in CodeTS. The output separates structured temporal parameters from the executable `generate_ts` function, enabling both format-level verification and execution-based time series evaluation.

C Detailed Reward Function Design

This section provides the concrete reward construction used in RLVR. The main paper presents the reward at a high level as a combination of format validity, executability, and time-series quality. In implementation, all reward terms are scaled to $[0, 1]$, and we expand Eq. (9) by absorbing λ_{ts} into the four time-series component weights:

$$\begin{aligned}
 R(y, x, d) = & \lambda_{\text{fmt}} R_{\text{fmt}}(y) + \lambda_{\text{exec}} R_{\text{exec}}(y) \\
 & + \mathbb{I}_{\text{valid}}(y) (\lambda_{\text{len}} R_{\text{len}}(\hat{x}, x) + \lambda_{\text{err}} R_{\text{err}}(\hat{x}, x) \\
 & + \lambda_{\text{corr}} R_{\text{corr}}(\hat{x}, x) + \lambda_{\text{stat}} R_{\text{stat}}(\hat{x}, x)),
 \end{aligned} \tag{16}$$

where y is the generated JSON object, $\hat{x} = \text{Execute}(y)$ is the executed time series, and $\mathbb{I}_{\text{valid}}(y) = 1$ only when the code passes parsing, sandbox execution, and returned-array validity checks. The weights are set to $\lambda_{\text{fmt}} = 0.05$, $\lambda_{\text{exec}} = 0.10$, $\lambda_{\text{len}} = 0.10$, $\lambda_{\text{err}} = 0.30$, $\lambda_{\text{corr}} = 0.30$, and $\lambda_{\text{stat}} = 0.15$.

Format reward. R_{fmt} gives graded feedback before execution. It checks whether the model output follows the normalized params/code interface:

$$R_{\text{fmt}}(y) = \begin{cases} 0.00, & \text{no JSON-like structure is detected,} \\ 0.20, & \text{JSON-like content is detected but parsing fails,} \\ 0.40, & \text{parsing succeeds but the result is not a dictionary,} \\ 0.60, & \text{the dictionary misses either params or code,} \\ 0.80, & \text{both fields exist but } \text{generate_ts}(\text{params}) \text{ is absent,} \\ 1.00, & \text{the normalized format is complete.} \end{cases} \tag{17}$$

This term reduces reward sparsity by distinguishing malformed text, incomplete JSON, and complete normalized outputs.

Execution reward. R_{exec} evaluates whether the generated code can be compiled, sandboxed, invoked, and converted into a valid numerical sequence:

$$R_{\text{exec}}(y) = \begin{cases} 0.00, & \text{compilation fails because of syntax errors,} \\ 0.25, & \text{syntax is valid but execution or function definition fails,} \\ 0.50, & \text{generate_ts(params) is defined but invocation fails,} \\ 0.75, & \text{invocation succeeds but the returned value is invalid,} \\ 1.00, & \text{a finite one-dimensional numerical sequence is returned.} \end{cases} \quad (18)$$

Invalid returned values include non-numerical objects, arrays with incompatible shape, non-finite values, or empty sequences.

Length reward. For a valid executed output, length consistency is scored by

$$R_{\text{len}}(\hat{x}, x) = \frac{\min(|\hat{x}|, |x|)}{\max(|\hat{x}|, |x|)}. \quad (19)$$

This term provides partial credit for approximately correct output length while penalizing sequences that are too short or too long.

Pointwise error reward. Let $T = \min(|\hat{x}|, |x|)$, and let $\tilde{x}$ and $\tilde{\hat{x}}$ denote the first T points of x and $\hat{x}$ after per-sample min-max normalization. The error reward is

$$R_{\text{err}}(\hat{x}, x) = \max \left(1 - \frac{1}{T} \sum_{t=1}^T (\tilde{x}_t - \tilde{\hat{x}}_t)^2, 0 \right). \quad (20)$$

The clipping prevents large numerical mismatches from producing negative rewards.

Correlation reward. The correlation term measures global shape agreement:

$$R_{\text{corr}}(\hat{x}, x) = \max \left(\rho(\tilde{\hat{x}}, \tilde{x}), 0 \right), \quad (21)$$

where $\rho(\cdot, \cdot)$ is Pearson correlation. If either normalized sequence is numerically degenerate, this term is set to 0. Negative correlations are also truncated to 0 because they indicate mismatched temporal direction.

Statistical reward. The statistical term is implemented as a standard-deviation ratio:

$$R_{\text{stat}}(\hat{x}, x) = \min \left(\frac{\sigma(\hat{x}_{1:T})}{\sigma(x_{1:T}) + \varepsilon_{\text{stat}}}, 1 \right), \quad (22)$$

where $\varepsilon_{\text{stat}}$ is a small stability constant for the standard-deviation ratio. This term directly penalizes low-variance collapsed outputs, which may otherwise obtain nontrivial pointwise error or correlation rewards after normalization. Excessive variance is mainly controlled by the pointwise error term.

D Data Sources

D.1 Text-Conditioned Benchmark Construction

The eight evaluation benchmarks used in the main experiments are public time series datasets that are originally released as numerical sequences rather than as Text-TS pairs. To evaluate Text-to-TS generation, we therefore convert each benchmark into a text-conditioned benchmark while keeping the original numerical windows as the ground-truth targets. This conversion does not introduce human-written captions or reference generation code; it only derives a natural language description from each target window through a deterministic signal analysis pipeline.

Window construction. For each benchmark, we read the raw CSV file, automatically identify the time column when present, and treat each remaining numerical column as a univariate series. For each target length $L \in \{96, 192, 336\}$, we segment every univariate series into fixed-length windows using a stride of $L/2$, i.e., 48, 96, and 168 for the three generation lengths. Windows containing non-finite values are discarded. Each retained window $x \in \mathbb{R}^L$ becomes the target sequence in one evaluation pair. The variable or column name is retained as lightweight metadata and may appear in the generated description.

Deterministic description extraction. For each target window, we extract temporal attributes directly from its numerical values. The extractor first records summary statistics, including length, mean, standard deviation, minimum, and maximum. It then estimates trend with linear regression, optionally using a two-segment trend when the segmented fit significantly improves over a single global line. After removing the trend, it detects dominant seasonality from the residual using FFT-based spectral analysis, with an autocorrelation fallback for short or ambiguous windows. The seasonal component is summarized by period, amplitude, phase, number of visible cycles, and amplitude-envelope type. Local events are then detected as peaks and troughs on the residual after removing trend and seasonality; each event records its direction, start position, turning point, end position, magnitude, and whether it is spike-like or smooth. The remaining residual variance is reported as the noise level.

Text-TS pair formation. The extracted attributes are rendered into a fixed natural-language template. For example, a description may state the sequence identifier, the length and summary statistics, the trend direction and endpoints, the dominant seasonal period and amplitude, a list of local events, and the residual noise level. The final evaluation example is therefore

$$(d, x),$$

where d is the automatically rendered description and x is the original benchmark window. During evaluation, a method receives only d and must generate a time series $\hat{x}$; all reported metrics compare $\hat{x}$ against the unchanged original numerical window x . For supervised baselines, the same conversion procedure is applied to the corresponding training split of each target benchmark. For CodeTS and zero-shot LLM baselines, only the converted test descriptions are used at inference time.

This construction makes the evaluation compatible with Text-to-TS generation while preserving the original public benchmark values. It should be interpreted as a text-conditioned synthesis benchmark: the text describes the target temporal behavior derived from the target window, and the task is to realize that described behavior as a numerical sequence, rather than to forecast future values from historical context.

D.2 Real-World Training Data Sources

Table 5 lists the real-world data sources used to construct the real Text-TS pairs for RLVR. The entries are filtered according to the final RLVR training file and linked to the corresponding public data-source pages. These sources are used only for training-data construction and are kept separate from the evaluation benchmarks reported in the main experiments.

Table 5: Real-world data sources used for RLVR training.

Dataset	URL
Alibaba Cluster Trace	https://github.com/alibaba/clusterdata
Binance BTC/USDT	https://data.binance.vision/
Currency Hourly/Volatility	https://finance.yahoo.com/currencies/
ESC-50	https://github.com/karolpiczak/ESC-50
Freesound Dataset 50k (FSD50K)	https://zenodo.org/records/4060432
GDELT Event Data	https://www.gdeltproject.org/data.html
Google COVID-19 Open Data	https://github.com/GoogleCloudPlatform/covid-19-open-data
IMS Bearing Data (NASA)	https://www.nasa.gov/intelligent-systems-division/discovery-and-systems-health/pcoe-data-set-repository/
MIT-BIH Arrhythmia	https://physionet.org/content/mitdb/1.0.0/
M5 Forecasting (Walmart)	https://www.kaggle.com/c/m5-forecasting-accuracy
Natural Gas Futures	https://www.eia.gov/dnav/ng/ng_pri_fut_s1_d.htm
NREL Wind Toolkit	https://developer.nrel.gov/docs/wind/wind-toolkit/wtk-download/
NYC Yellow Taxi Trip Data	https://www.nyc.gov/site/tlc/about/tlc-trip-record-data.page
OpenMeteo Solar Data	https://open-meteo.com/en/docs/historical-weather-api
Paderborn University Bearing Dataset	https://mb.uni-paderborn.de/en/kat/research/bearing-datacenter/data-sets-and-download
PTB-XL	https://physionet.org/content/ptb-xl/1.0.3/
UK-DALE	https://jack-kelly.com/data/
USGS Daily Streamflow	https://api.waterdata.usgs.gov/ogcapi/v0/collections/daily

E Evaluation Metrics and Success Rate

Let $\mathcal{V}$ denote the valid sample index set after removing near-constant target windows and clearly invalid predictions. For each $i \in \mathcal{V}$, we align $(x_i, \hat{x}_i)$ by truncation to $T_i = \min(|x_i|, |\hat{x}_i|)$. Let $m_i = \min_{1 \leq t \leq T_i} x_{i,t}$ and $M_i = \max_{1 \leq t \leq T_i} x_{i,t}$. The normalized sequences are

$$\tilde{x}_{i,t} = \frac{x_{i,t} - m_i}{M_i - m_i}, \quad \tilde{\hat{x}}_{i,t} = \frac{\hat{x}_{i,t} - m_i}{M_i - m_i}, \quad t = 1, \dots, T_i. \quad (23)$$

Samples with numerically degenerate $M_i - m_i$ are excluded from $\mathcal{V}$, and the same filtering is applied to all methods.

The reported MSE is

$$\text{MSE} = \frac{1}{|\mathcal{V}|} \sum_{i \in \mathcal{V}} \frac{1}{T_i} \sum_{t=1}^{T_i} (\tilde{x}_{i,t} - \tilde{\hat{x}}_{i,t})^2. \quad (24)$$

The reported DTW is the averaged normalized warping cost:

$$\text{DTW} = \frac{1}{|\mathcal{V}|} \sum_{i \in \mathcal{V}} \frac{1}{T_i} \min_{\pi \in \Pi_i} \sum_{(p,q) \in \pi} |\tilde{x}_{i,p} - \tilde{\hat{x}}_{i,q}|, \quad (25)$$

where Π_i is the set of monotone warping paths between the two aligned sequences.

Pearson correlation is averaged as

$$\text{PC} = \frac{1}{|\mathcal{V}|} \sum_{i \in \mathcal{V}} \frac{\sum_{t=1}^{T_i} (\tilde{x}_{i,t} - \bar{x}_i)(\tilde{\hat{x}}_{i,t} - \bar{\hat{x}}_i)}{\sqrt{\sum_{t=1}^{T_i} (\tilde{x}_{i,t} - \bar{x}_i)^2} \sqrt{\sum_{t=1}^{T_i} (\tilde{\hat{x}}_{i,t} - \bar{\hat{x}}_i)^2}}, \quad (26)$$

where $\bar{x}_i$ and $\bar{\hat{x}}_i$ are means of the normalized sequences.

For LLM-based zero-shot baselines, we report success rate as $\text{pass}@k$ [Chen et al., 2021]. For task i , suppose n_i candidates are sampled and c_i of them are successful. The unbiased estimator is

$$\widehat{\text{pass}@k} = \frac{1}{N} \sum_{i=1}^N \left(1 - \frac{\binom{n_i - c_i}{k}}{\binom{n_i}{k}} \right), \quad n_i \geq k. \quad (27)$$

Here $c_i = \sum_{j=1}^{n_i} s_{i,j}$, where $s_{i,j} = 1$ if candidate j passes all required checks and 0 otherwise. For code-generating methods, these checks require JSON parsing, the `params/code` fields, the `generate_ts(params)` function, sandboxed execution, and a finite one-dimensional returned sequence with compatible length. For textualized baselines, the parsing and shape checks are adapted to their output format. The reported SR is the $\text{pass}@1$ special case:

$$\text{SR}(\%) = 100 \times \widehat{\text{pass}@1}. \quad (28)$$

F Additional Comparison with Recent LLMs under Text-to-Code-to-TS

We further evaluate several mainstream and recent strong LLMs under the same Text-to-Code-to-TS prompting setup, including IQuest-Coder-V1-7B-Instruct [Yang et al., 2026], Devstral-Instruct-24B [Rastogi et al., 2025], Seed-Coder-8B-Instruct [Seed et al., 2025], and Qwen3.5-9B [Team, 2026]. These models cover recent code-oriented LLMs, a larger coding-capable instruction model, and a strong general-purpose LLM with coding capability. This comparison examines whether the gains of CodeTS come from the proposed training framework rather than from code generation ability alone.

As shown in Table 6, CodeTS achieves the strongest overall performance across datasets and generation lengths. Although some prompted LLMs obtain competitive results on a few individual metrics, their generated series generally show weaker temporal fidelity and less stable execution success. In contrast, CodeTS maintains consistently low MSE and DTW, substantially higher Pearson correlation, and near-perfect $\text{pass}@1$ success rate. These results indicate that the advantage of CodeTS does not come merely from prompting a strong LLM to write code, but from learning the normalized Text-to-Code-to-TS interface and optimizing generation quality through execution-based feedback.

Table 6: Results of mainstream and recent strong coding-capable LLMs under the Text-to-Code-to-TS setup. SR denotes the $\text{pass}@1$ success rate.

Datasets	Length	CodeTS (ours) (7B)				IQuest-Coder-V1-7B-Instruct (7B)				Seed-Coder-8B-Instruct (8B)				Qwen3.5-9B (9B)				Devstral-Instruct-24B (24B)			
		MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑
ETTh1	96	0.0202	0.0799	0.8136	100.0	0.1902	0.1815	0.1463	96.3	0.0975	0.1338	0.1632	99.2	0.0910	0.1316	0.2201	94.1	0.0915	0.1324	0.2172	98.4
	192	0.0219	0.0808	0.7714	100.0	0.1516	0.1587	0.1161	92.5	0.0878	0.1261	0.1360	95.6	0.0845	0.1256	0.1742	88.5	0.0867	0.1249	0.1550	97.6
	336	0.0232	0.0823	0.7242	100.0	0.1116	0.1500	0.0969	89.1	0.0798	0.1250	0.1195	95.9	0.0787	0.1251	0.1424	83.7	0.0789	0.1242	0.1288	97.3
ETTh2	96	0.0305	0.1041	0.7302	100.0	0.1870	0.1860	0.1508	93.3	0.0926	0.1436	0.1689	98.0	0.0881	0.1436	0.2123	93.7	0.0876	0.1419	0.2111	97.8
	192	0.0295	0.0999	0.6835	100.0	0.1025	0.1512	0.1556	91.3	0.0793	0.1345	0.1572	96.4	0.0828	0.1404	0.1804	84.9	0.0777	0.1351	0.1767	96.8
	336	0.0292	0.0993	0.6456	100.0	0.0983	0.1503	0.1474	89.8	0.0711	0.1322	0.1510	100.0	0.0752	0.1373	0.1626	85.0	0.0689	0.1337	0.1771	95.9
ETTm1	96	0.0161	0.0669	0.8713	100.0	0.2059	0.1964	0.4431	93.8	0.0649	0.1258	0.4973	97.8	0.0595	0.1226	0.5471	90.2	0.0588	0.1219	0.5459	98.2
	192	0.0181	0.0685	0.8338	100.0	0.1942	0.1811	0.2702	94.4	0.0836	0.1256	0.2886	95.7	0.0798	0.1241	0.3293	87.5	0.0809	0.1233	0.3223	96.2
	336	0.0276	0.0704	0.7341	100.0	0.1299	0.1716	0.1217	92.4	0.0901	0.1414	0.1365	95.4	0.0841	0.1427	0.1916	81.6	0.0865	0.1436	0.1759	97.1
ETTm2	96	0.0279	0.0982	0.7944	100.0	0.1760	0.1867	0.3395	92.8	0.0860	0.1499	0.3535	97.4	0.0789	0.1460	0.4042	89.3	0.0796	0.1456	0.4023	98.0
	192	0.0295	0.1016	0.7532	100.0	0.1373	0.1731	0.2345	94.8	0.0873	0.1437	0.2433	96.4	0.0822	0.1425	0.2887	87.6	0.0817	0.1414	0.2873	96.8
	336	0.0332	0.0968	0.6689	100.0	0.1206	0.1728	0.1403	92.6	0.0857	0.1449	0.1422	95.5	0.0859	0.1492	0.1701	80.7	0.0826	0.1460	0.1708	98.5
Weather	96	0.0159	0.0622	0.8599	100.0	0.1629	0.1626	0.4714	93.5	0.0685	0.1320	0.4869	97.1	0.0621	0.1268	0.5296	83.4	0.0617	0.1259	0.5282	97.6
	192	0.0159	0.0592	0.8427	100.0	0.1341	0.1527	0.4296	94.3	0.0718	0.1304	0.4279	96.7	0.0663	0.1262	0.4662	81.0	0.0646	0.1243	0.4730	97.8
	336	0.0213	0.0648	0.7701	100.0	0.1277	0.1623	0.2729	95.1	0.0778	0.1328	0.2914	96.9	0.0730	0.1333	0.3234	81.1	0.0739	0.1328	0.3158	97.5
Electricity	96	0.0301	0.0923	0.8112	100.0	0.1809	0.1599	0.1139	96.4	0.1610	0.1463	0.1133	97.7	0.1593	0.1468	0.1169	90.1	0.1589	0.1476	0.1220	97.4
	192	0.0284	0.0845	0.7982	99.8	0.1686	0.1463	0.0498	93.7	0.1553	0.1311	0.0470	97.4	0.1558	0.1312	0.0459	89.9	0.1549	0.1310	0.0483	97.3
	336	0.0280	0.0824	0.7811	99.9	0.1595	0.1391	0.0257	88.8	0.1448	0.1260	0.0211	97.7	0.1453	0.1260	0.0212	86.9	0.1437	0.1261	0.0213	94.7
Exchange	96	0.0795	0.1643	0.4815	100.0	0.4000	0.2341	0.4954	97.3	0.1229	0.2045	0.1251	96.7	0.0932	0.1828	0.3344	95.1	0.0983	0.1804	0.3100	96.7
	192	0.0837	0.1481	0.5180	100.0	0.3163	0.2181	0.4745	92.3	0.1018	0.1723	0.1820	91.2	0.0757	0.1505	0.3913	91.2	0.0866	0.1505	0.2901	97.8
	336	0.0870	0.1449	0.5159	100.0	0.2291	0.2051	0.4343	98.2	0.0978	0.1604	0.1211	98.2	0.0745	0.1402	0.3574	87.5	0.0768	0.1330	0.2956	100.0
Web	96	0.0326	0.1162	0.3672	100.0	0.0954	0.1489	0.0921	94.9	0.0501	0.1168	0.0689	97.7	0.0491	0.1162	0.1001	74.7	0.0482	0.1153	0.0975	97.8
	192	0.0246	0.1002	0.3024	100.0	0.0688	0.1367	0.0682	95.9	0.0357	0.0998	0.0451	97.3	0.0349	0.0991	0.0756	69.9	0.0343	0.0981	0.0690	97.4
	336	0.0175	0.0823	0.2664	99.9	0.0570	0.1310	0.0545	96.2	0.0245	0.0845	0.0339	97.9	0.0239	0.0837	0.0518	68.4	0.0235	0.0829	0.0436	96.7

G Training Configuration

This section supplements the details of the implementation of the two-stage training procedure, focusing on model initialization, sample organization, parallel training strategy, and optimization hyperparameters.

G.1 SFT Warmup Configuration

In the SFT warm-up stage, we initialize the policy model from Qwen2.5-Coder-7B-Instruct and conduct full-parameter supervised fine-tuning using DeepSpeed on four NVIDIA A100-SXM4-80GB

GPUs. Each training instance is formatted as a dialogue-style sequence, where the input consists of the task instruction and the corresponding textual description, and the output is the target JSON object. We adopt the chat template associated with the base model and pack multiple short instances into a single training sequence whenever feasible to improve computational efficiency.

This stage is conducted with 500 training examples for one epoch, using a maximum sequence length of 3072. The global batch size is set to 64, with a per-device micro-batch size of 8. We use a learning rate of 5×10^{-6} , a warm-up ratio of 0.05, and a cosine learning-rate schedule with a nonzero minimum learning rate. Training is performed in BF16 precision. To reduce memory consumption, we employ ZeRO-2 optimization together with gradient checkpointing. During training, only the most recent checkpoint is retained, and the final model is exported in the HuggingFace format.

This configuration reflects the intended function of the warm-up stage in our framework. Rather than aiming to overfit the synthetic reference code, this stage is designed to provide the model with an initial alignment to the expected output format, parameter organization, and executable code scaffold, while incurring only a limited computational cost. The deliberately short training schedule and small training set further preserve sufficient exploration capacity for the subsequent RLVR stage.

G.2 GRPO Configuration

In the RLVR stage, we continue training from the SFT warm-up model using a training pipeline built on OpenRLHF, Ray, and vLLM. This stage is conducted on two NVIDIA A100-SXM4-80GB GPUs. In contrast to the SFT warm-up stage, the training data consist of real text–time-series pairs. The input side contains a textual description, while the target side provides the corresponding time series and its length information, which are used to compute verifiable rewards from executed code outputs. We use the chat template associated with the base model, and set the maximum input length and maximum generation length to 1024 and 3072, respectively.

The RLVR stage uses 6,300 training examples. For each input, we sample four candidate programs, corresponding to $G = 4$ in the main paper. Both the rollout batch size and the training batch size are set to 16, while the micro rollout batch size and micro training batch size are both set to 2. The model is trained for one epoch and one episode. For optimization, the actor learning rate is set to 5×10^{-7} , the initial KL coefficient is 10^{-3} , and the clipping range is $[\epsilon_{\text{low}}, \epsilon_{\text{high}}] = [0.2, 0.28]$. Advantage estimation is performed with group normalization. Training is conducted in BF16 precision. To reduce memory consumption, we employ ZeRO-3 optimization, Adam offloading, and gradient checkpointing. Online sampling is performed with a single vLLM engine using tensor parallel size 2 and a GPU memory utilization ratio of 0.45. The actor model, reference policy, and rollout engine are deployed in colocated mode and synchronized through NCCL.

A central consideration in this stage is the resource balance among online sampling, reward evaluation, and gradient-based policy updates. The relatively conservative rollout batch size, number of sampled candidates, and micro-batch configuration are chosen to limit the sampling pressure at each update step, avoid excessive reuse of the same real-data batch, and reserve sufficient memory for generating, executing, and scoring long-form code outputs.

H Web Benchmark Analysis

The Web benchmark has a more event-concentrated structure than the other benchmarks. In the target windows used for evaluation, near-flat adjacent steps account for 13.5%, 18.9%, and 25.5% of the normalized transitions at lengths 96, 192, and 336, respectively. At the same time, the largest 5% of adjacent changes explain 30.9%, 34.9%, and 37.4% of the total variation. This combination makes Web a stress test for preserving sparse shape changes rather than only matching the dominant low-variation regions.

Figure 7 summarizes this behavior. The final CodeTS model achieves Pearson correlations of 0.367, 0.302, and 0.266 on Web for lengths 96, 192, and 336, respectively. However, the reward ablation shows that MSE and DTW alone are not sufficient to characterize this benchmark. After removing both the correlation and statistic rewards, Web MSE decreases from 0.0249 to 0.0230 and DTW decreases from 0.0996 to 0.0721, but Pearson drops from 0.3120 to 0.0803. Thus, a model can match many local values or warped segments while failing to preserve the sparse event-level shape. We

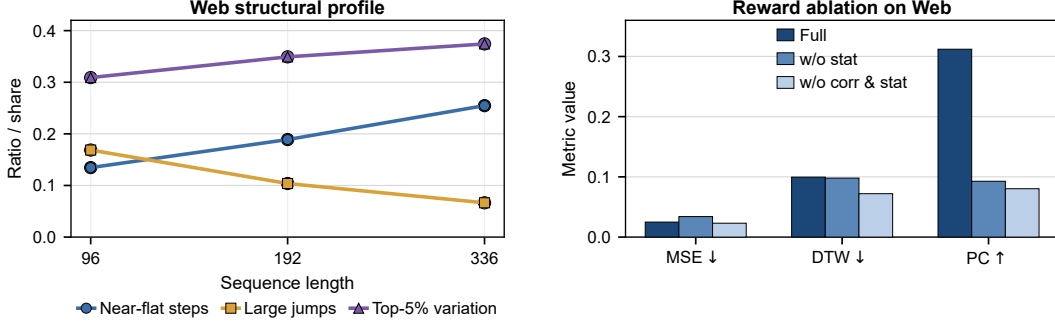


Figure 7: Web benchmark analysis. Left: target-window statistics for Web, where near-flat steps are normalized adjacent differences no larger than 0.01, large jumps are differences at least 0.20, and top-5% variation is the share of total variation contributed by the largest 5% adjacent changes. Right: reward ablation on Web averaged over lengths 96, 192, and 336. Removing correlation and statistic rewards can reduce MSE and DTW while sharply reducing Pearson correlation, showing that low pointwise or warped error does not necessarily imply event-shape preservation on Web.

Table 7: Training-stage ablation; SR is pass@1 success rate.

Datasets	Length	SFT				SFT+RLVR			
		MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑
ETTh1	96	0.0938	0.1358	0.1972	95.1	0.0202	0.0799	0.8136	100.0
	192	0.0909	0.1342	0.1155	87.7	0.0219	0.0808	0.7714	100.0
	336	0.0824	0.1334	0.1069	84.4	0.0232	0.0823	0.7242	100.0
ETTh2	96	0.0894	0.1455	0.1979	92.2	0.0305	0.1041	0.7302	100.0
	192	0.0776	0.1361	0.1707	86.1	0.0295	0.0999	0.6835	100.0
	336	0.0701	0.1349	0.1604	79.6	0.0292	0.0993	0.6456	100.0
ETTm1	96	0.0635	0.1268	0.5096	94.0	0.0161	0.0669	0.8713	100.0
	192	0.0820	0.1299	0.2973	88.3	0.0181	0.0685	0.8338	100.0
	336	0.0873	0.1461	0.1424	84.9	0.0276	0.0704	0.7341	100.0
ETTm2	96	0.0831	0.1489	0.3796	90.0	0.0279	0.0982	0.7944	100.0
	192	0.0849	0.1450	0.2757	90.0	0.0295	0.1016	0.7532	100.0
	336	0.0844	0.1501	0.1662	86.4	0.0332	0.0968	0.6689	100.0
Weather	96	0.0630	0.1256	0.5209	90.2	0.0159	0.0622	0.8599	100.0
	192	0.0690	0.1280	0.4469	89.6	0.0159	0.0592	0.8427	100.0
	336	0.0745	0.1355	0.3119	85.6	0.0213	0.0648	0.7701	100.0
Electricity	96	0.1590	0.1534	0.1193	90.9	0.0301	0.0923	0.8112	100.0
	192	0.1576	0.1473	0.0373	87.6	0.0284	0.0845	0.7982	99.8
	336	0.1466	0.1430	0.0139	85.7	0.0280	0.0824	0.7811	99.9
Exchange	96	0.1108	0.1807	0.2372	79.7	0.0795	0.1643	0.4815	100.0
	192	0.0941	0.1514	0.2716	70.3	0.0837	0.1481	0.5180	100.0
	336	0.0819	0.1407	0.3138	80.4	0.0870	0.1449	0.5159	100.0
Web	96	0.0486	0.1148	0.0945	75.1	0.0326	0.1162	0.3672	100.0
	192	0.0344	0.0970	0.0675	68.8	0.0246	0.1002	0.3024	100.0
	336	0.0230	0.0809	0.0429	67.9	0.0175	0.0823	0.2664	99.9

therefore interpret Pearson correlation as the most diagnostic metric for Web, with MSE and DTW serving as complementary error measures.

I Detailed Ablation Studies

Detailed Training-Stage Ablation Table 7 provides the detailed training stage ablation results for each benchmark dataset and generation length. Compared with the SFT-warmup model, the final SFT+RLVR model achieves substantially better generation quality in most settings, with lower MSE and DTW, higher Pearson correlation, and higher pass@1 success rate. These results further support the conclusion in the main paper that SFT provides a useful initialization for executable code generation, while RLVR is the key stage that improves the executed time series through verifiable feedback from real Text-TS pairs.

Detailed Normalized Code Ablation Table 8 reports the detailed normalized code ablation results for each benchmark dataset and generation length. Compared with the variant without normalized code, the full model generally achieves better generation quality, with lower MSE and DTW and

Table 8: Normalized code ablation; SR is pass@1 success rate.

Datasets	Length	Full				w/o Normalized Code			
		MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑
ETTh1	96	0.0202	0.0799	0.8136	100.0	0.0773	0.1195	0.3598	100.0
	192	0.0219	0.0808	0.7714	100.0	<u>0.0718</u>	<u>0.1108</u>	<u>0.3216</u>	100.0
	336	0.0232	0.0823	0.7242	100.0	<u>0.0669</u>	<u>0.1062</u>	<u>0.2901</u>	99.3
ETTh2	96	0.0305	0.1041	0.7302	100.0	0.0688	0.1327	0.3859	99.8
	192	0.0295	0.0999	0.6835	100.0	<u>0.0591</u>	<u>0.1269</u>	<u>0.3705</u>	100.0
	336	0.0292	0.0993	0.6456	100.0	<u>0.0531</u>	<u>0.1186</u>	<u>0.3596</u>	100.0
ETTm1	96	0.0161	0.0669	0.8713	100.0	0.0411	0.0947	0.6852	100.0
	192	0.0181	0.0685	0.8338	100.0	<u>0.0671</u>	<u>0.0988</u>	<u>0.4556</u>	99.7
	336	0.0276	0.0704	0.7341	100.0	<u>0.0719</u>	<u>0.1014</u>	<u>0.3305</u>	99.7
ETTm2	96	0.0279	0.0982	0.7944	100.0	0.0514	0.1240	0.6143	100.0
	192	0.0295	0.1016	0.7532	100.0	<u>0.0650</u>	<u>0.1247</u>	<u>0.4423</u>	99.3
	336	0.0332	0.0968	0.6689	100.0	<u>0.0657</u>	<u>0.1213</u>	<u>0.3367</u>	100.0
Weather	96	0.0159	0.0622	0.8599	100.0	0.0354	0.0839	0.7228	99.9
	192	0.0159	0.0592	0.8427	100.0	<u>0.0391</u>	<u>0.0822</u>	<u>0.6776</u>	99.6
	336	0.0213	0.0648	0.7701	100.0	<u>0.0553</u>	<u>0.0861</u>	<u>0.4938</u>	99.7
Electricity	96	0.0301	0.0923	0.8112	100.0	0.1472	0.1253	0.2005	99.7
	192	0.0284	0.0845	0.7982	99.8	<u>0.1480</u>	<u>0.1066</u>	<u>0.1049</u>	99.6
	336	0.0280	0.0824	0.7811	99.9	<u>0.1412</u>	<u>0.0970</u>	<u>0.0562</u>	99.9
Exchange	96	0.0795	0.1643	0.4815	100.0	0.0788	0.1861	0.4406	100.0
	192	<u>0.0837</u>	0.1481	0.5180	100.0	0.0751	0.1668	0.4722	100.0
	336	<u>0.0870</u>	0.1449	0.5159	100.0	0.0665	0.1385	<u>0.5109</u>	100.0
Web	96	0.0326	0.1162	0.3672	100.0	0.0285	0.1017	0.4987	99.9
	192	0.0246	0.1002	0.3024	100.0	0.0191	0.0831	0.5365	99.9
	336	<u>0.0175</u>	<u>0.0823</u>	<u>0.2664</u>	99.9	0.0126	0.0661	0.5606	100.0

higher Pearson correlation on most datasets. This confirms that the benefit of CodeTS comes not only from using executable code, but also from organizing the output into explicit temporal parameters and executable logic. The normalized representation provides a more structured interface for parsing, execution checking, and reward computation.

Detailed Reward Design Ablation Table 9 reports the detailed reward design ablation results for each benchmark dataset and generation length. Compared with removing the statistical reward or removing both correlation and statistical rewards, the full reward generally provides better overall generation quality, especially in Pearson correlation. This indicates that the correlation and statistical terms are important for preserving temporal shape and avoiding structurally weak outputs. In several settings such as Web, removing these terms can reduce MSE or DTW, but it also sharply decreases Pearson correlation, suggesting that lower local error does not necessarily imply better preservation of temporal patterns. These results support the use of a balanced reward design that jointly considers pointwise accuracy, temporal alignment, and statistical consistency.

J Detailed Template Robustness Analysis

Table 10 reports the detailed template-dependence results for each benchmark dataset and generation length. The perturbed descriptions preserve the same temporal attributes as the original descriptions, but change the wording and attribute order. Compared with the SFT-warmup model under perturbed descriptions, the final CodeTS model achieves substantially better MSE, DTW, Pearson correlation, and pass@1 success rate in most settings. Although performance still decreases compared with the original descriptions, the smaller degradation shows that RLVR improves robustness to description perturbations and reduces reliance on fixed training templates.

K Reinforcement Learning Training Dynamics and Effectiveness Analysis

During RLVR, we track six reward functions: R_{fmt} , R_{exec} , R_{len} , R_{err} , R_{corr} , and R_{stat} . Figure 8 shows their training trajectories.

The first three scores rise quickly because SFT already teaches the JSON schema, runnable scaffold, and explicit length parameter. The time-series terms improve more gradually, reflecting the harder search for code that matches target values, shape, and variability.

Table 9: Reward-design ablation; SR is pass@1 success rate.

Datasets	Length	Full				w/o stat				w/o corr, stat			
		MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑
ETTh1	96	0.0202	0.0799	0.8136	100.0	0.0391	0.1091	0.6418	100.0	0.0400	0.1184	0.5951	100.0
	192	0.0219	0.0808	0.7714	100.0	0.0395	0.1080	0.5899	100.0	<u>0.0393</u>	0.1140	0.5331	100.0
	336	0.0232	0.0823	0.7242	100.0	0.0391	0.1085	0.5377	100.0	<u>0.0379</u>	0.1129	0.4720	100.0
ETTh2	96	0.0305	0.1041	0.7302	100.0	0.0552	0.1268	0.5055	100.0	<u>0.0505</u>	0.1327	0.4626	100.0
	192	0.0295	0.0999	0.6835	100.0	0.0517	0.1238	0.4476	100.0	<u>0.0471</u>	0.1272	0.3860	100.0
	336	0.0292	0.0993	0.6456	100.0	0.0481	<u>0.1211</u>	<u>0.4188</u>	100.0	<u>0.0439</u>	0.1213	0.3477	100.0
ETTm1	96	0.0161	0.0669	0.8713	100.0	0.0366	0.1040	0.7126	100.0	0.0494	0.1310	0.5885	100.0
	192	0.0181	0.0685	0.8338	100.0	<u>0.0365</u>	0.1049	0.6660	100.0	0.0440	0.1152	0.5589	100.0
	336	0.0276	0.0704	0.7341	100.0	0.0520	0.1261	<u>0.5008</u>	100.0	<u>0.0464</u>	<u>0.1230</u>	0.4419	100.0
ETTm2	96	0.0279	0.0982	0.7944	100.0	0.0604	0.1329	0.5461	100.0	0.0606	0.1512	0.4748	100.0
	192	0.0295	0.1016	0.7532	100.0	0.0563	0.1278	0.5076	100.0	<u>0.0546</u>	0.1395	0.4192	100.0
	336	0.0332	0.0968	0.6689	100.0	0.0571	<u>0.1322</u>	<u>0.4210</u>	100.0	<u>0.0520</u>	0.1359	0.3559	100.0
Weather	96	0.0159	0.0622	0.8599	100.0	0.0457	0.1129	0.6469	100.0	0.0538	0.1423	0.5986	100.0
	192	0.0159	0.0592	0.8427	100.0	<u>0.0472</u>	0.1135	0.6049	100.0	0.0556	0.1387	0.4855	99.9
	336	0.0213	0.0648	0.7701	100.0	0.0464	<u>0.1182</u>	<u>0.5470</u>	100.0	<u>0.0447</u>	0.1226	0.5038	100.0
Electricity	96	0.0301	0.0923	0.8112	100.0	0.0520	0.1223	0.6827	99.9	0.0485	0.1245	0.6534	100.0
	192	0.0284	0.0845	0.7982	99.8	0.0482	0.1179	0.6678	99.8	<u>0.0448</u>	0.1186	0.6341	100.0
	336	0.0280	0.0824	0.7811	99.9	0.0462	0.1157	<u>0.6494</u>	99.9	<u>0.0419</u>	<u>0.1148</u>	0.6178	99.9
Exchange	96	0.0795	0.1643	0.4815	100.0	0.0740	0.1554	0.4565	100.0	0.0603	0.1598	0.4717	100.0
	192	0.0837	0.1481	0.5180	100.0	<u>0.0685</u>	0.1389	0.5039	100.0	0.0599	0.1597	0.4961	98.9
	336	0.0870	<u>0.1449</u>	0.5159	100.0	0.0574	0.1253	<u>0.4990</u>	100.0	<u>0.0598</u>	0.1591	0.4875	100.0
Web	96	0.0326	0.1162	0.3672	100.0	0.0456	0.1140	0.1396	99.9	0.0317	0.0869	0.1121	100.0
	192	<u>0.0246</u>	0.1002	0.3024	100.0	0.0334	0.0974	0.0841	98.2	0.0220	0.0705	0.0784	100.0
	336	<u>0.0175</u>	<u>0.0823</u>	0.2664	99.9	0.0232	0.0825	<u>0.0544</u>	99.0	0.0154	0.0588	0.0505	100.0

Table 10: Template-dependence ablation; SR is pass@1 success rate.

Datasets	Length	Full				Full w/ perturbation				SFT w/ perturbation			
		MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑	MSE↓	DTW↓	Pearson↑	SR(%)↑
ETTh1	96	0.0202	0.0799	0.8136	100.0	0.0440	0.1073	0.6578	92.4	0.0997	0.1481	0.1766	47.0
	192	0.0219	0.0808	0.7714	100.0	<u>0.0426</u>	0.1104	0.5815	93.7	0.1005	0.1483	0.1307	46.0
	336	0.0232	0.0823	0.7242	100.0	<u>0.0426</u>	<u>0.1155</u>	<u>0.5138</u>	90.5	0.0836	0.1359	0.1310	38.1
ETTh2	96	0.0305	0.1041	0.7302	100.0	0.0545	0.1275	0.5432	92.4	0.1045	0.1635	0.1782	44.2
	192	0.0295	0.0999	0.6835	100.0	0.0481	0.1235	0.4967	95.6	0.0832	0.1477	0.1710	51.2
	336	0.0292	0.0993	0.6456	100.0	<u>0.0442</u>	<u>0.1182</u>	<u>0.4600</u>	94.6	0.0747	0.1491	0.1945	43.5
ETTm1	96	0.0161	0.0669	0.8713	100.0	0.0329	0.0932	0.7589	93.2	0.0739	0.1362	0.4775	46.7
	192	0.0181	0.0685	0.8338	100.0	<u>0.0386</u>	0.1005	0.6783	93.9	0.0946	0.1440	0.2986	47.0
	336	0.0276	0.0704	0.7341	100.0	<u>0.0563</u>	<u>0.1155</u>	<u>0.5131</u>	94.0	0.0905	0.1502	0.1617	47.5
ETTm2	96	0.0279	0.0982	0.7944	100.0	0.0528	0.1236	0.6659	93.9	0.0868	0.1529	0.3809	48.2
	192	0.0295	0.1016	0.7532	100.0	<u>0.0524</u>	0.1260	0.5913	93.5	0.1045	0.1566	0.2562	51.2
	336	0.0332	0.0968	0.6689	100.0	<u>0.0603</u>	<u>0.1289</u>	<u>0.4786</u>	93.3	0.0832	0.1511	0.1622	49.4
Weather	96	0.0159	0.0622	0.8599	100.0	0.0298	0.0879	0.7644	94.0	0.0768	0.1355	0.4844	47.5
	192	0.0159	0.0592	0.8427	100.0	<u>0.0290</u>	0.0859	0.7451	92.9	0.0704	0.1285	0.4409	45.8
	336	0.0213	0.0648	0.7701	100.0	<u>0.0373</u>	<u>0.0983</u>	<u>0.6353</u>	93.8	0.0773	0.1369	0.3022	44.5
Electricity	96	0.0301	0.0923	0.8112	100.0	0.0588	0.1249	0.6690	94.0	0.1700	0.1761	0.1197	38.7
	192	0.0284	0.0845	0.7982	99.8	<u>0.0641</u>	0.1255	0.6102	91.3	0.1663	0.1626	0.0547	37.0
	336	0.0280	0.0824	0.7811	99.9	<u>0.0604</u>	0.1240	<u>0.5693</u>	91.4	0.1529	0.1597	0.0340	38.8
Exchange	96	0.0795	0.1643	0.4815	100.0	0.1000	0.1778	0.4082	92.3	0.1672	0.2177	0.1785	49.5
	192	0.0837	0.1481	0.5180	100.0	0.0866	0.1546	0.4058	95.6	0.1067	0.1579	0.2739	42.9
	336	0.0870	0.1449	0.5159	100.0	0.0808	<u>0.1397</u>	<u>0.4756</u>	92.9	<u>0.0813</u>	0.1304	0.2678	53.6
Web	96	0.0326	0.1162	0.3672	100.0	0.0370	0.1178	0.3033	96.5	0.0481	<u>0.1171</u>	0.1015	30.3
	192	0.0246	0.1002	0.3024	100.0	<u>0.0271</u>	0.1012	0.2601	96.5	0.0349	0.1000	0.0795	62.5
	336	0.0175	0.0823	0.2664	99.9	<u>0.0197</u>	<u>0.0843</u>	<u>0.2276</u>	96.1	0.0245	0.0854	0.0579	64.8

This trend is consistent with the reward-ablation results in the main paper. Pointwise error alone can produce numerically plausible but structurally weak sequences; shape correlation improves global alignment, and variance preservation discourages low-variance collapse.

L Prompts for Training and Inference

This section documents the prompts used by CodeTS and the zero-shot baselines. For SFT, RLVR, and fine-tuned model inference, we use the same prompt skeleton so that the output interface remains consistent across training and evaluation. The system message defines the model role, and the user message asks the model to translate a natural language time series description into a normalized JSON object containing params and code. During SFT, the reference JSON object is used as the supervised target. During RLVR, the same prompt is used to sample candidate code, while the paired

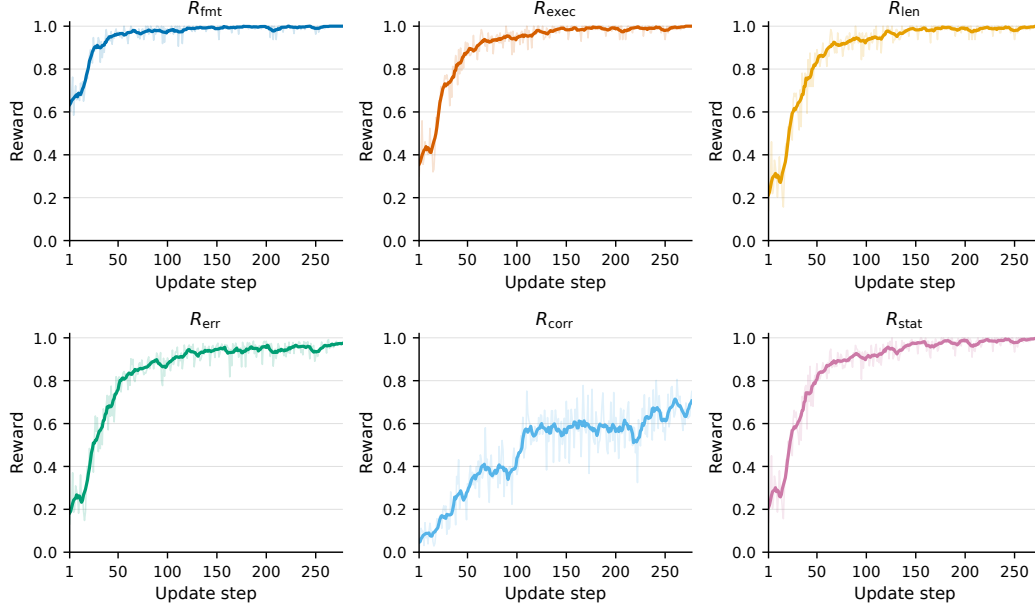


Figure 8: Training dynamics of the six RLVR reward functions.

time series is used only for execution-based reward computation. During inference, the test-time description is appended to the same user instruction.

System Prompt
You are an expert time series analyst and Python programmer. You translate natural language descriptions of time series patterns into precise generation parameters and executable Python code.
User Instruction
You are a time series generation assistant. Given a natural language description of a time series, produce a JSON object with two keys: <code>params</code>, the generation-parameter dictionary, and <code>code</code>, the complete Python function that generates the time series from these parameters. The <code>params</code> field must be directly usable as input to the <code>code</code> function. Input: The concrete time-series description <code>d</code>, appended after a blank line. Output: A normalized JSON object.

Figure 9: Prompt skeleton used for SFT, RLVR, and fine-tuned CodeTS inference. The concrete time-series description is appended to the user message; the target JSON object is provided only in SFT, while RLVR uses the paired time series only for reward computation.

For zero-shot LLM baselines, we use a separate and more explicit prompt because these models have not been task-specifically tuned to follow the normalized CodeTS output interface. The zero-shot prompt therefore includes the required JSON schema, the required `generate_ts(params)` function signature, the available Python libraries, safety constraints, and an example output format. In this setting, the user message contains only the test description, while the system prompt provides the task definition and formatting constraints.

M Broader Impact

Our work introduces CodeTS, a verifiable Text-to-Code-to-TS generation framework that employs executable code as an explicit intermediate interface between natural language temporal descriptions and synthetic time series generation. This design has the potential to facilitate time series modeling in data-scarce settings, including healthcare, energy systems, transportation, finance, and climate analysis, where acquiring representative observations may be costly, privacy-sensitive, or constrained

Zero-shot Prompt

You are an expert Python programmer specializing in time series generation.

Your task is to convert natural language descriptions into:

1. A JSON parameters object
2. A Python function that generates the time series

Output Format

Return a JSON object with this structure:

```
{
  "params": {
    "length": <int>,
    // ... other parameters inferred from the description
  },
  "code": "def generate_ts(params):\n    ..."
```

Python Code Requirements

The `code` field must contain a function:

```
def generate_ts(params):
    import numpy as np
    # ... implementation
    return ts # numpy array of shape (length,)
```

Available Libraries

- `numpy` / `np` - Core numerical operations
- `math` - Mathematical functions
- `scipy` - Scientific computing (scipy.signal, scipy.stats, scipy.fft, scipy.interpolate, scipy.ndimage, scipy.special)
- `pandas` / `pd` - Data manipulation
- `sklearn` - Machine learning (sklearn.preprocessing, sklearn.gaussian_process, sklearn.datasets, sklearn.decomposition)
- `statsmodels` - Time series models (statsmodels.tsa.arima_process, statsmodels.tsa.holtwinters, statsmodels.tsa.stattools)
- `tslearn` - Time series ML (tslearn.generators, tslearn.preprocessing, tslearn.barycenters)
- `einops` - Tensor operations
- `fastdtw` - Dynamic Time Warping
- `librosa` - Audio/music analysis
- `ruptures` / `rpt` - Change point detection
- `pywt` - Wavelet transforms
- `neurokit2` / `nk` - Physiological signals (ECG, PPG, RSP)
- `pandas\_ta` / `ta` - Technical analysis indicators
- `arch` / `arch\_model` - ARCH/GARCH volatility modeling

Code Constraints

1. ****NO** file I/O, network, or system calls
2. ****Function MUST** return a numpy array of shape (length,)
3. ****All** parameters **MUST** come from the `params` dict
4. ****The `code` field must be a SINGLE STRING with escaped newlines (\\n)****

The input description contains specific numerical values (mean, std, range, period, amplitude, etc.).

You **MUST** use these exact values as parameters in your code. Do **NOT** normalize the output.

Example

...

Output **ONLY** the JSON object, no other text.

Figure 10: Prompt used for zero-shot LLM baselines. Compared with the fine-tuned-model prompt, this prompt is more constrained and includes explicit format, code, library, and safety requirements to improve parseability and executability without task-specific fine-tuning.

by the rarity of relevant events. By rendering the generation process executable and inspectable, CodeTS further enables users to construct targeted temporal scenarios, stress-test downstream models, and examine whether generated samples conform to the specified temporal requirements.

Nevertheless, synthetic time series should not be regarded as a replacement for validated domain observations in high-stakes applications. Ambiguous or underspecified descriptions, biases inherited from training data or reference programs, and excessive reliance on generated samples may result in misleading evaluations or undesirable downstream model behavior. In addition, the use of executable code as an intermediate representation introduces security considerations, since candidate programs must be evaluated through execution. In this work, normalized code, format validation, sandboxed execution, and success-rate reporting serve as partial safeguards. However, real-world deployment should further incorporate domain-specific validation, provenance tracking, privacy assessment, and explicit disclosure whenever synthetic time series are used for analysis, evaluation, or model development.


N Additional Case Studies

We provide three representative successful cases selected from CodeTS evaluation outputs, prioritizing local-event richness rather than only the lowest global error. Each case forms a Text-Code-TS triplet: the natural language description d , the normalized generated program y containing `params` and `code`, and the executed time series $\hat{x} = \text{Execute}(y)$. Each case starts on a separate page so that the compressed text description, time-series visualization, folded parameter summary, execution metrics, and unframed executable code can be inspected together.

N.1 Case 1: Electricity-336 Client 314

Text description. This sequence is 314. The time series spans 336 points with mean 8271.58, std 4722.22, range [2115.00, 16956.00]. Flat linear trend from baseline 7788.97 to 8754.19 from position 0 to 335. Pure sinusoidal seasonality with period 24.0, amplitude 6468.78, phase 1.96 rad, 14 cycles, constant envelope. One smooth+up from position 19 to 25 (peak at 22), magnitude 0.24. One spike+down from position 23 to 25 (peak at 24), magnitude 0.19. One spike+up from position 27 to 31 (peak at 29), magnitude 0.17. One spike+down from position 33 to 35 (peak at 34), magnitude 0.17. One spike+up from position 44 to 46 (peak at 45), magnitude 0.19. One smooth+down from position 47 to 51 (peak at 49), magnitude 0.22. One spike+up from position 68 to 70 (peak at 69), magnitude 0.22. One spike+down from position 71 to 75 (peak at 73), magnitude 0.24. One smooth+up from position 91 to 95 (peak at 93), magnitude 0.24. One spike+down from position 96 to 98 (peak at 97), magnitude 0.19. One smooth+up from position 99 to 103 (peak at 101), magnitude 0.19. One smooth+down from position 118 to 124 (peak at 121), magnitude 0.28. One spike+up from position 130 to 134 (peak at 132), magnitude 0.28. One spike+down from position 134 to 136 (peak at 135), magnitude 0.29. One smooth+up from position 142 to 156 (peak at 149), magnitude 0.29. One smooth+down from position 154 to 164 (peak at 159), magnitude 0.38. One smooth+up from position 165 to 181 (peak at 173), magnitude 0.29. One smooth+down from position 181 to 185 (peak at 183), magnitude 0.29. One smooth+up from position 188 to 192 (peak at 190), magnitude 0.16. One spike+down from position 192 to 194 (peak at 193), magnitude 0.16. One spike+up from position 201 to 205 (peak at 203), magnitude 0.26. One spike+down from position 207 to 209 (peak at 208), magnitude 0.17. One spike+up from position 212 to 214 (peak at 213), magnitude 0.17. One spike+down from position 216 to 218 (peak at 217), magnitude 0.21. One spike+up from position 220 to 222 (peak at 221), magnitude 0.15. One spike+down from position 225 to 227 (peak at 226), magnitude 0.15. One smooth+up from position 231 to 243 (peak at 237), magnitude 0.21. One spike+down from position 240 to 242 (peak at 241), magnitude 0.20. One spike+up from position 243 to 247 (peak at 245), magnitude 0.20. One spike+down from position 249 to 251 (peak at 250), magnitude 0.17. One spike+up from position 252 to 254 (peak at 253), magnitude 0.17. One spike+down from position 264 to 266 (peak at 265), magnitude 0.20. One spike+up from position 267 to 271 (peak at 269), magnitude 0.15. One spike+down from position 273 to 275 (peak at 274), magnitude 0.15. One spike+up from position 276 to 278 (peak at 277), magnitude 0.20. One spike+down from position 287 to 291 (peak at 289), magnitude 0.26. One spike+up from position 299 to 301 (peak at 300), magnitude 0.26. One spike+down from position 302 to 304 (peak at 303), magnitude 0.16. One smooth+up from position 308 to 312 (peak at 310), magnitude 0.16. One spike+down from position 311 to 315 (peak at 313), magnitude 0.26. One spike+up from position 323 to 325 (peak at 324), magnitude 0.17. One spike+down from position 326 to 328 (peak at 327), magnitude 0.17. Noise std_deviation 1309.070.

Execution. $L = 336$; 42 events; MSE 0.0063; DTW 0.0453; PC 0.9632.

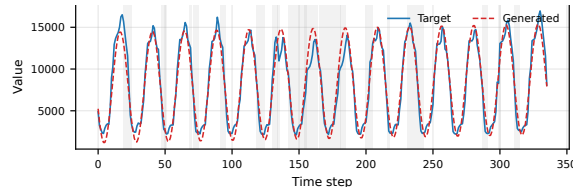

Folded params.

```
length=336; target_mean=8271.584; target_std=4722.224; noise_std=1309.07
trend: linear (0-335): 7788.974 -> 8754.194
seasonality: sinusoidal, period=24.0, amplitude=6468.784, phase=1.962, envelope=constant
events: 42 total = 30 spike + 12 smooth; 22 with magnitude >= 0.2; max magnitude=0.384
top events: smooth+down at 159 [154,164], mag=0.384; spike+down at 135 [134,136], mag=0.294;
smooth+up at 149 [142,156], mag=0.294; smooth+up at 173 [165,181], mag=0.294
```

Generated code.


```
def generate_ts(params):
    import numpy as np
    length = params['length']
    t = np.arange(length, dtype=float)
    def _trend_seg(n, sv, ev, stype, extra):
        if n <= 0:
            return np.array([])
        if n == 1:
            return np.array([sv])
        tn = np.arange(n, dtype=float) / (n - 1)
        return sv + (ev - sv) * tn
    trend = np.zeros(length)
    for _s in params['trend_segments']:
        _a, _b = (_s.get('start', 0), _s.get('end', length - 1))
        trend[_a:_b + 1] = _trend_seg(_b - _a + 1, _s.get('start_value', 0.0),
            _s.get('end_value', _s.get('start_value', 0.0)), _s.get('trend_type', 'constant'), _s)
    _last = params['trend_segments'][-1]
    _last_end = _last.get('end', length - 1)
    if _last_end < length - 1:
        trend[_last_end + 1:] = trend[_last_end]
    seasonality_type = params.get('seasonality_type', None)
    seasonality = np.zeros(length)
    def _build_seasonal(t_arr, s_type, period, amplitude, phase, harmonics, envelope_type, length_seg):
        seg = np.zeros(len(t_arr))
        if s_type is None or s_type == 'none' or amplitude == 0:
            return seg
        t_local = np.arange(len(t_arr), dtype=float)
        envelope = np.full(len(t_arr), 1.0)
        omega = 2.0 * np.pi * t_arr / period + phase
        seg = amplitude * np.cos(omega)
        for h in harmonics:
            order = h.get('order', 2)
            amp_ratio = h.get('amplitude_ratio', h.get('relative_amplitude', 0.0))
            seg += amplitude * amp_ratio * np.cos(order * 2.0 * np.pi * t_arr / period + phase)
        return seg * envelope
    seasonal_regions = params.get('seasonal_regions', None)
    period = params.get('period', length)
    amplitude = params.get('amplitude', 0.0)
    phase = params.get('phase', 0.0)
    harmonics = params.get('harmonics', [])
    envelope_type = params.get('amplitude_envelope_type', 'constant')
    seasonality = _build_seasonal(t, seasonality_type, period, amplitude, phase, harmonics, envelope_type, length)
    changes_array = np.zeros(length)
    for change in params.get('changes', []):
        ch_type = change.get('change_type', 'spike')
        direction = change.get('direction', 'up')
        tp = change.get('turning_point', length // 2)
        mag = abs(change.get('magnitude', 0.0))
        if direction == 'down':
            mag = -mag
        sp = change.get('start_position', None)
        ep = change.get('end_position', None)
        sigma = max(1.0, (ep - sp) / 4.0)
        changes_array += mag * np.exp(-0.5 * ((t - tp) / sigma) ** 2)
    raw_ts = trend + seasonality + changes_array
    raw_mean = params.get('target_mean', None).mean()
```

```
raw_std = params.get('target_std', None).std()
ts = (raw_ts - raw_mean) / raw_std * target_std + target_mean
return ts
```

N.2 Case 2: Weather-96 VPact

Text description. This sequence is VPact (mbar). The time series spans 96 points with mean 10.28, std 0.36, range [9.43, 10.92]. Downward linear trend from baseline 10.74 to 9.72 from position 0 to 47. Upward linear trend from baseline 9.83 to 10.85 from position 48 to 95. Pure sinusoidal seasonality with period 48.0, amplitude 0.20, phase -3.13 rad, 2 cycles, increasing envelope. One spike+down from position 7 to 11 (peak at 9), magnitude 0.11. One spike+up from position 10 to 12 (peak at 11), magnitude 0.11. One spike+down from position 14 to 18 (peak at 16), magnitude 0.12. One spike+up from position 17 to 19 (peak at 18), magnitude 0.12. One spike+down from position 24 to 26 (peak at 25), magnitude 0.09. One spike+up from position 26 to 28 (peak at 27), magnitude 0.09. One smooth+down from position 24 to 34 (peak at 29), magnitude 0.26. One spike+down from position 30 to 34 (peak at 32), magnitude 0.26. One spike+down from position 34 to 36 (peak at 35), magnitude 0.10. One spike+up from position 35 to 37 (peak at 36), magnitude 0.10. One smooth+down from position 43 to 53 (peak at 48), magnitude 0.23. One smooth+up from position 61 to 67 (peak at 64), magnitude 0.23. One spike+down from position 68 to 70 (peak at 69), magnitude 0.28. One spike+up from position 72 to 74 (peak at 73), magnitude 0.36. One spike+down from position 73 to 77 (peak at 75), magnitude 0.36. One spike+up from position 78 to 80 (peak at 79), magnitude 0.14. One spike+down from position 81 to 83 (peak at 82), magnitude 0.14. One spike+up from position 83 to 85 (peak at 84), magnitude 0.34. One smooth+down from position 85 to 89 (peak at 87), magnitude 0.17. One spike+up from position 91 to 93 (peak at 92), magnitude 0.17. Noise std_deviation 0.117.

Execution. $L = 96$; 20 events; MSE 0.0027; DTW 0.0317; PC 0.9767.

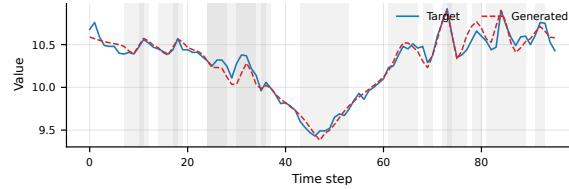

Folded params.

```
length=96; target_mean=10.283; target_std=0.3625; noise_std=0.1174
trend: linear(0-47): 10.744 -> 9.724; linear(48-95): 9.832 -> 10.852
seasonality: sinusoidal, period=48.0, amplitude=0.203, phase=-3.134, envelope=increasing
events: 20 total = 16 spike + 4 smooth; 8 with magnitude >= 0.2; max magnitude=0.364
top events: spike+up at 73 [72,74], mag=0.364; spike+down at 75 [73,77], mag=0.364;
spike+up at 84 [83,85], mag=0.344; spike+down at 69 [68,70], mag=0.284
```


Generated code.

```
def generate_ts(params):
    import numpy as np
    length = params['length']
    t = np.arange(length, dtype=float)
    def _trend_seg(n, sv, ev, stype, extra):
        if n <= 0:
            return np.array([])
        if n == 1:
            return np.array([sv])
        tn = np.arange(n, dtype=float) / (n - 1)
        return sv + (ev - sv) * tn
    trend = np.zeros(length)
    for _s in params['trend_segments']:
        _a, _b = (_s.get('start', 0), _s.get('end', length - 1))
        trend[_a:_b + 1] = _trend_seg(_b - _a + 1, _s.get('start_value', 0.0),
            _s.get('end_value', _s.get('start_value', 0.0)), _s.get('trend_type', 'constant'), _s)
    _last = params['trend_segments'][-1]
    _last_end = _last.get('end', length - 1)
    if _last_end < length - 1:
        trend[_last_end + 1:] = trend[_last_end]
    seasonality_type = params.get('seasonality_type', None)
    seasonality = np.zeros(length)
    def _build_seasonal(t_arr, s_type, period, amplitude, phase, harmonics, envelope_type, length_seg):
        seg = np.zeros(len(t_arr))
        if s_type is None or s_type == 'none' or amplitude == 0:
            return seg
        t_local = np.arange(len(t_arr), dtype=float)
        envelope = np.linspace(0.7, 1.3, len(t_arr))
        omega = 2.0 * np.pi * t_arr / period + phase
        seg = amplitude * np.cos(omega)
        for h in harmonics:
            order = h.get('order', 2)
            amp_ratio = h.get('amplitude_ratio', h.get('relative_amplitude', 0.0))
            seg += amplitude * amp_ratio * np.cos(order * 2.0 * np.pi * t_arr / period + phase)
        return seg * envelope
    seasonal_regions = params.get('seasonal_regions', None)
    period = params.get('period', length)
    amplitude = params.get('amplitude', 0.0)
    phase = params.get('phase', 0.0)
    harmonics = params.get('harmonics', [])
    envelope_type = params.get('amplitude_envelope_type', 'constant')
    seasonality = _build_seasonal(t, seasonality_type, period,
        amplitude, phase, harmonics, envelope_type, length)
    changes_array = np.zeros(length)
    for change in params.get('changes', []):
        ch_type = change.get('change_type', 'spike')
        direction = change.get('direction', 'up')
        tp = change.get('turning_point', length // 2)
        mag = abs(change.get('magnitude', 0.0))
        if direction == 'down':
            mag = -mag
        sp = change.get('start_position', None)
        ep = change.get('end_position', None)
        sigma = max(1.0, (ep - sp) / 4.0)
        changes_array += mag * np.exp(-0.5 * ((t - tp) / sigma) ** 2)
    noise_segments = params.get('noise_segments', None)
    noise_std = abs(params.get('noise_std', 0.0))
    noise = np.zeros(length)
    raw_ts = trend + seasonality + changes_array + noise
    target_mean = params.get('target_mean', None)
    target_std = params.get('target_std', None)
    raw_mean = raw_ts.mean()
    raw_std = raw_ts.std()
    ts = (raw_ts - raw_mean) / raw_std * target_std + target_mean
    return ts
```

N.3 Case 3: ETTm1-96 HUFL

Text description. This sequence is HUFL. The time series spans 96 points with mean 7.95, std 5.32, range [-8.97, 16.28]. Upward linear trend from baseline -3.08 to 12.91 from position 0 to 47. Downward linear trend from baseline 15.79 to 6.16 from position 48 to 95. No periodic/seasonal pattern. One spike+up from position 0 to 2 (peak at 1), magnitude 0.21. One spike+down from position 1 to 3 (peak at 2), magnitude 0.44. One spike+up from position 2 to 4 (peak at 3), magnitude 0.47. One spike+down from position 3 to 5 (peak at 4), magnitude 0.38. One spike+up from position 4 to 6 (peak at 5), magnitude 0.38. One spike+down from position 6 to 8 (peak at 7), magnitude 0.21. One spike+up from position 7 to 9 (peak at 8), magnitude 0.21. One spike+down from position 12 to 14 (peak at 13), magnitude 0.33. One smooth+up from position 17 to 25 (peak at 21), magnitude 0.17. One smooth+down from position 30 to 42 (peak at 36), magnitude 0.17. One spike+up from position 45 to 47 (peak at 46), magnitude 0.17. One spike+down from position 66 to 68 (peak at 67), magnitude 0.17. One smooth+up from position 66 to 72 (peak at 69), magnitude 0.33. One smooth+down from position 72 to 76 (peak at 74), magnitude 0.15. One spike+up from position 79 to 81 (peak at 80), magnitude 0.15. One spike+down from position 80 to 82 (peak at 81), magnitude 0.37. One smooth+up from position 89 to 95 (peak at 92), magnitude 0.23. Noise std_deviation 1.958.

Execution. $L = 96$; 17 events; MSE 0.0061; DTW 0.0471; PC 0.9315.



Folded params.

```
length=96; target_mean=7.952; target_std=5.324; noise_std=1.9584
trend: linear(0-47): -3.084 -> 12.914; linear(48-95): 15.794 -> 6.164
seasonality: none
events: 17 total = 5 smooth + 12 spike; 10 with magnitude >= 0.2; max magnitude=0.474
top events: spike+up at 3 [2,4], mag=0.474; spike+down at 2 [1,3], mag=0.444; spike+down at 4 [3,5], mag=0.384; spike+up at
5 [4,6], mag=0.384
```

Generated code.

```
def generate_ts(params):
    import numpy as np
    length = params['length']
    t = np.arange(length, dtype=float)

    def _trend_seg(n, sv, ev, stype, extra):
        if n <= 0:
            return np.array([])
        if n == 1:
            return np.array([sv])
        tn = np.arange(n, dtype=float) / (n - 1)
        return sv + (ev - sv) * tn

    trend = np.zeros(length)
    for _s in params['trend_segments']:
        _a, _b = (_s.get('start', 0), _s.get('end', length - 1))
        trend[_a:_b + 1] = _trend_seg(_b - _a + 1, _s.get('start_value', 0.0), _s.get('end_value', _s.get('start_value', 0.0)),
                                     _s.get('trend_type', 'constant'), _s)
    _last = params['trend_segments'][-1]
    _last_end = _last.get('end', length - 1)
    if _last_end < length - 1:
        trend[_last_end + 1:] = trend[_last_end]
    seasonality = np.zeros(length)
    changes_array = np.zeros(length)
    for change in params.get('changes', []):
        ch_type = change.get('change_type', 'spike')
        direction = change.get('direction', 'up')
        tp = change.get('turning_point', length // 2)
        mag = abs(change.get('magnitude', 0.0))
        if direction == 'down':
            mag = -mag
        sp = change.get('start_position', None)
        ep = change.get('end_position', None)
        sigma = max(1.0, (ep - sp) / 4.0)
        changes_array += mag * np.exp(-0.5 * ((t - tp) / sigma) ** 2)
    noise_segments = params.get('noise_segments', None)
    noise = np.zeros(length)
    noise_std = abs(params.get('noise_std', 0.0))
    raw_ts = trend + seasonality + changes_array + noise
    raw_mean = raw_ts.mean()
    raw_std = raw_ts.std()
    ts = (raw_ts - raw_mean) / raw_std * params.get('target_std', raw_std) + params.get('target_mean', raw_mean)
    return ts
```

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope?

Answer: [\[Yes\]](#)

Justification: The abstract and introduction state the main contributions of CodeTS, including the Text-to-Code-to-TS formulation, normalized executable code interface, synthetic Text-Code-TS triplet initialization, and execution-based RLVR optimization. The stated experimental claims are supported by comparisons on eight public benchmarks across three generation lengths, and the scope is qualified by the limitations discussion on univariate generation and ambiguous descriptions.

Guidelines:

- The answer [\[N/A\]](#) means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [\[No\]](#) or [\[N/A\]](#) answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: The conclusion discusses the main scope limitations, including the focus on univariate time series and sensitivity to ambiguous descriptions. Additional risks related to synthetic data usage and executable code generation are discussed in the broader impact section.

Guidelines:

- The answer [\[N/A\]](#) means that the paper has no limitation while the answer [\[No\]](#) means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate “Limitations” section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren’t acknowledged in the paper. The authors should use their best

judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [N/A]

Justification: The paper does not present theoretical results, theorems, or formal proofs. The mathematical formulations are used to define the Text-to-Code-to-TS framework, reward design, and optimization objective.

Guidelines:

- The answer [N/A] means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: The paper provides the key information needed to reproduce the main results, including benchmark datasets, metrics, model initialization, reward definitions, prompts, and SFT/RLVR hyperparameters. An anonymized repository is provided to support code reproduction.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- If the paper includes experiments, a [No] answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.

- (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
- (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: An anonymized code repository is provided in the paper, and the appendix documents the public data sources used for training and evaluation. The repository provides the implementation and supporting materials for reproducing the main experimental results.

Guidelines:

- The answer [N/A] means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: The paper specifies the benchmark datasets, generation lengths, evaluation metrics, baseline categories, model backbone, SFT and RLVR training settings, reward weights, and optimization hyperparameters. Additional details on reward definitions, prompts, real data sources, and training configuration are provided in the appendix.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: The paper reports aggregate performance metrics, including MSE, DTW, and Pearson correlation, to evaluate the generated time series against the ground-truth series.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.).
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [No]

Justification: The paper reports the main compute hardware and memory configuration, including the use of NVIDIA A100-SXM4-80GB GPUs for SFT and RLVR training. However, it does not provide wall-clock running time, per-experiment execution time, or an estimate of total compute consumption.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines?>

Answer: [Yes]

Justification: The research uses public datasets and pretrained models, reports the evaluation protocol, and discusses limitations, broader impacts, and safeguards for executable-code generation. To the best of the authors' knowledge, the work conforms to the NeurIPS Code of Ethics.

Guidelines:

- The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. **Broader impacts**

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: The appendix includes a Broader Impact section discussing potential positive impacts in data-scarce time series domains such as healthcare, energy, transportation, finance, and climate analysis. It also discusses negative risks, including over-reliance on synthetic data, inherited bias, misleading downstream evaluations, and security concerns from executable code generation.

Guidelines:

- The answer [N/A] means that there is no societal impact of the work performed.
- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. **Safeguards**

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

Answer: [Yes]

Justification: The paper describes safeguards for executable code generation, including normalized code formatting, format validation, sandboxed execution, and success rate reporting. The broader impact section further notes that real world deployment should include domain-specific validation, provenance tracking, privacy assessment, and disclosure of synthetic data usage.

Guidelines:

- The answer [N/A] means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring

that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.

- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [No]

Justification: The paper credits the main datasets, pretrained models, and software components through citations and public source URLs, and the appendix lists the public RLVR training data sources. However, it does not yet explicitly document the license names, versions, and terms of use for all existing assets.

Guidelines:

- The answer [N/A] means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [Yes]

Justification: The paper provides an anonymized repository containing the implementation and supporting materials for CodeTS. The paper and appendix document the training procedure, reward design, prompts, data sources, limitations, and broader impact considerations relevant to these released assets.

Guidelines:

- The answer [N/A] means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [N/A]

Justification: The paper does not involve crowdsourcing experiments or research with human subjects. All experiments are conducted on public time series datasets, synthetic triplets, and model generated outputs.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [N/A]

Justification: The paper does not involve crowdsourcing or human-subjects research, so IRB approval or equivalent review is not applicable.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. **Declaration of LLM usage**

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does *not* impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [Yes]

Justification: LLMs are a core methodological component of the work: CodeTS is initialized from Qwen2.5-Coder-7B-Instruct and trained to generate executable code from textual time series descriptions. The paper describes this use in the method, experimental setup, training configuration, and prompt appendix.

Guidelines:

- The answer [N/A] means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy in the NeurIPS handbook for what should or should not be described.