

Kathleen Remembers: Length-Invariant One-Shot Recall Without Attention

George Fountzoulas

Department of Computer Engineering & Informatics
Frederick University, Nicosia, Cyprus
george.fountzoulas.research@gmail.com

August 2026

Abstract

Recurrent, attention-free sequence models — the family to which Kathleen belongs, alongside state-space models and linear-attention variants — share a known structural weakness: a fading state cannot perform exact recall of something seen once, far in the past. The transformer answer, quadratic-cost attention over a growing window, is exactly what this series set out to avoid. We add to the Kathleen trunk a second memory layer — a **notebook**: a fixed-key holographic (HRR) associative store with a learned local write gate, a self-gating raw read, and write-triggered forgetting — 25K parameters that attach to the logits of any trunk. **(1) Mechanism.** On a controlled needle-in-haystack task, the notebook reaches 80–82% one-shot recall at $4\times$ the training length (learned gates, two seeds) where the bare trunk scores $\sim 4\%$ and a parameter-matched attention head scores 100% inside its training length and **0% beyond it**. The route to this result is reported as a ten-round, fully pre-registered forensic sequence: three independent length leaks (gate receptive fields too narrow to represent the correct write rule; ℓ_2 normalization amplifying empty-memory noise; trained trunk logits drifting out of range at unseen lengths) are isolated with oracle gates, counterfactual read-outs, and gate autopsies, and each is closed by construction rather than by tuning. The final design’s addressing is length-invariant by construction — fixed random content keys composed over a 7-byte window with unitary role keys — and the memory alone, untrained, recalls at 90% accuracy identically at 512, 2048 and 4096 bytes. Because the store is a linear superposition, two capabilities follow from arithmetic alone: **selective unlearning** — one subtraction erases one fact to chance (4.3/3.1%, chance 3.8) while retained facts are unharmed (84%), at both lengths — and **per-token attribution** — counterfactual erasure names the source fact of every correct byte with 100% provenance, at zero interference with ordinary prediction. **(2) Real text.** On WikiText-2 bytes, the notebook improves prediction of repeated rare words by +0.15–0.27 bits/byte over the same trunk, the gain *growing* with the distance between mentions and holding zero-shot at $4\times$ training length, at zero overall cost; the write gate learns with no supervision to spend its ink on content words ($\beta = 0.28$ on repeated-word bytes vs 0.19 elsewhere). Write-triggered forgetting — decay tied to write mass, not to time, so no clock re-enters the design — eliminates the only observed failure mode (memory pollution at $8\times$ length: first-mention cost +0.33 $\rightarrow$ -0.004). **(3) Scope and scale.** Two honest boundaries: a parameter-matched attention head *does* generalize on natural-text repetition (its collapse is specific to surgical one-shot recall), so the notebook’s claim is exact recall at $O(L)$, not repetition in general; and attached to a word-level model the notebook is largely absorbed — exact recall needs questions with exact answers, which bytes provide and words do not. Within its habitat the value *scales*: on a WikiText-103 ladder (8 $\rightarrow$ 32 $\rightarrow$ 128 $\rightarrow$ 512 MB) the notebook’s zero-shot repeat gain rises monotonically (+0.06 $\rightarrow$ +0.11 $\rightarrow$ +0.15 $\rightarrow$ +0.16 bits/byte, two seeds at the top rung) at zero-to-negative overall cost throughout. Memory, in this family, is not a small-model crutch but a capability that matures with the model. All experiments are pre-registered, seeds reported, and reproducible on a single free-tier GPU.

1 Introduction

Papers 1–3 of this series built a byte-level, attention-free architecture — wavetable encoding, multi-scale reverberant state, causal convolutions — and showed it classifies [19], learns without pretraining, and writes [20], at sub-million parameter scale, beating parameter-matched transformers on data scaling throughout. Paper 3 closed with a diagnosis rather than a victory lap: the reverberant state is a *lossy compressor by design*. It holds a fading summary of everything, and therefore an exact copy of nothing. Ask a Kathleen model to reproduce a key–value pair it saw once, two thousand bytes ago, and it fails — not from lack of scale but from the shape of its memory. The same diagnosis applies, in the published record, to the whole attention-free family: state-space models [3, 4] and linear-attention variants [7, 5] trade the transformer’s total-recall window for $O(L)$ cost, and give up exact long-range recall in the bargain.

This paper adds the missing organ. The design goal was set by three constraints the series already committed to: $O(L)$ (no quadratic window), **constant state** (a fixed-size memory, not a growing cache), and **byte-native** (no tokenizer, no positional table). The result — we call it the **notebook** — is a 25K-parameter module that attaches to the logits of any trunk:

- **fixed content keys**: every byte value owns a random unit vector in $d = 2048$ dimensions, drawn once and never trained; keys for a position are composed from the last 7 bytes with unitary role vectors (an n -gram bundle in the HRR/holographic tradition [1, 2]). Addresses depend on *what* the text says, never on *where* — length generalization by construction, not by hope.
- **a learned local write gate**: a small causal convolution over a 16-byte window decides what is worth writing. It cannot see sequence length, absolute position, or global state — so it cannot learn a length-dependent policy even by accident.
- **a self-gating read**: the retrieved vector’s raw magnitude is the gate. An empty or irrelevant memory returns near-zero and adds nothing; a hit returns a large vector and speaks. No read gate is learned, because none is needed.
- **write-triggered forgetting**: each write erases a little of what came before ($\text{mem} \leftarrow (1 - g\beta) \text{mem} + \beta \text{write}$). Decay is tied to write mass — to content — not to elapsed time, so no clock re-enters the design and junk cannot accumulate with length.

The contributions, in the order the paper argues them:

1. **A mechanism result.** One-shot key–value recall at $4\times$ the training length with fully learned gates (80–82%, two seeds), where the bare recurrent trunk scores $\sim 4\%$ and a parameter-matched attention head scores 0% (Section 3). The memory path alone, untrained, is length-flat to at least $8\times$ (90% at 512/2048/4096).
2. **A forensic method result.** The path to (1) required isolating three independent length leaks — none of which was the memory itself. We argue the isolation tools (oracle gates, counterfactual read-outs, gate autopsies at two lengths, pre-registered verdicts for every round) are as reusable as the design (Section 3.3).
3. **An algebraic-consequences result.** Because the store is a linear superposition, erasure is subtraction and provenance is counterfactual subtraction: one fact is unlearned to chance with the others unharmed, and every correct byte names its source fact with 100% provenance — both length-invariant, both without retraining (Section 4).

4. **A real-text result.** The notebook pays on natural text exactly where theory predicts — repeated rare words at distance — at zero overall cost, with an unsupervised write gate that discovers content-word salience (Section 5).
5. **Two honest boundaries.** Attention does generalize on loose natural-text repetition (its zero-shot collapse is specific to exact recall); and the notebook is absorbed by a word-level model, because words do not ask questions with exact answers (Section 6).
6. **A scaling result.** On an $8 \rightarrow 512$ MB data ladder the notebook’s zero-shot value rises monotonically ($+0.06 \rightarrow +0.16$ bits/byte, two seeds at the top rung, zero-to-negative overall cost throughout): memory in this family matures with the model instead of being replaced by it (Section 7).

2 The two-layer memory

2.1 The trunk (recap)

The Kathleen trunk is unchanged from Papers 2–3: byte embedding, N blocks of {multi-scale reverb bank || causal depthwise convolution, sigmoid-mixed, + FFN}, layer norm, and a linear head. The reverb bank is a bank of leaky integrators with input-dependent decay in three half-life regimes (fast/medium/slow) — the “timing layer”: it knows *that* something happened and roughly when, but stores a fading mixture, not retrievable items. All models in this paper use $d = 96\text{--}128$, 2–3 blocks, 0.2–0.5M parameters.

2.2 The notebook

One associative store per model, holographic (circular-convolution binding in FFT space [1]), dimension $d_{\text{hrr}} = 2048$. Write, at every position t :

$$\text{key}_t = \ell_2 \left(\sum_{j=0}^6 \text{role}_j \otimes \text{ck}[x_{t-j}] \right) \quad (\text{fixed}) \quad (1)$$

$$\beta_t = \sigma(\text{conv}_{16}(x)_t) \quad (\text{learned}) \quad (2)$$

$$\text{mem} \leftarrow (1 - g \beta_t) \text{mem} + \beta_t (\text{key}_{t-1} \otimes \text{ck}[x_t]) \quad (3)$$

Read, at every position t :

$$r_t = \text{mem} \otimes^\dagger \text{key}_t \quad (\text{unbind}) \quad (4)$$

$$\text{logits} += s \cdot (r_t \cdot \text{CK}^\top) \quad (\text{raw}) \quad (5)$$

with $\otimes$ circular convolution, $\otimes^\dagger$ correlation (unbinding), $\text{ck}[b]$ the fixed random unit key of byte b , CK the $256 \times d_{\text{hrr}}$ key table, role_j fixed unitary vectors (unit magnitude spectrum, random phase), g a learned forget rate ($\sigma(\cdot) \cdot 0.2$), and s a learned scalar. Cost per position is $O(d_{\text{hrr}} \log d_{\text{hrr}})$; the whole scan is parallel (cumulative sums, chunked where forgetting is active). Parameter count: the conv gate + two scalars $\approx 25\text{K}$; the key tables are buffers, not parameters.

2.3 Why each piece is what it is

Every design choice above is the survivor of a measured failure, reported in Section 3:

- *Fixed keys, not learned projections of the hidden state:* learned state-keys inherit the state’s length-dependence; fixed content keys are length-blind by construction (Round 6, after Rounds 1–5 established the delta-rule/learned-key variant fails zero-shot).

- *Local write gate, not a gate from the hidden state*: the trunk’s hidden state drifts at unseen lengths, and a gate computed from it sags measurably (β at needles: 0.49 at $L = 512 \rightarrow 0.11$ at $L = 2048$, Round 8 autopsy). A byte-local gate cannot sag with length. Its window must be $\geq$ the needle span: with an 8-byte window the gate *cannot represent* the correct write rule and never trains (Rounds 7–8, diagnosed in Round 9) — the fix is width, not optimization.
- *Raw self-gating read, not ℓ_2 -normalized read with a learned gate*: normalizing the retrieved vector amplifies empty-memory noise to unit norm at every position; training then shrinks the output scale, muting real hits along with the noise (Round 8’s oracle arm trained to only 55–65% for exactly this reason). Raw magnitudes carry the hit/no-hit information for free.
- *Write-triggered forgetting, not time decay and not delta-rule erasure*: time decay would reintroduce a clock (and length dependence); and with unitary keys the delta rule’s targeted erasure is *algebraically equivalent* to global decay — a unitary key’s power spectrum is flat, so “erase along this key” and “erase everything a little” are the same operation (Section 5.3). The honest option is the cheap one.
- *Variable-length training (final ingredient, in the trunk not the notebook)*: a trunk trained at one fixed length learns readout weights tuned to slow-integrator values that sit elsewhere at $4\times$ length; its logits drift and shout over a perfectly correct memory (Round 9/10: memory-only counterfactual 90% at 2048 while the full model scored 0.5%). Training on lengths $\{128 \dots 512\}$ cures the trunk; 2048+ remains genuinely zero-shot.

3 The needle laboratory

3.1 Task

Byte-level haystack of random filler words. One or more needles — `<MARK> key value` (6 + 6 bytes) — planted at uniform positions; a query `<MARK> key ?` at the end; the model must emit value byte-by-byte, teacher-forced accuracy measured on the value bytes, binned by needle→query distance. Train at $L = 512$ (later: variable 128–512), evaluate in-distribution and zero-shot at $L = 2048$ (and 4096 in diagnostics). Multi-needle variants plant 4 pairs (interference); no-mark variants remove `<MARK>` (salience).

3.2 Headline arms (final round)

Identical trunks, identical data, identical budget; two seeds for the learned arm (Figure 1):

arm	params	train (far bin, $L = 512$)	zero-shot $L = 2048$ (far bin)
trunk (reverb) only	195K	3.8%	0.0%
trunk + attention head	211K	100%	0.0%
trunk + notebook (oracle write mask)	195K	91.2%	92.1%
trunk + notebook (learned local gates, s42)	212K	81.9%	81.1%
trunk + notebook (learned local gates, s43)	212K	80.2%	81.1%

Table 1: Needle-in-haystack recall, final round. All arms share trunk, data, and budget.

The counterfactual read-out (same trained weights, logits from one component at a time) attributes the recall entirely to the memory: memory-only $\approx$ full model at every length; trunk-only $\approx$ chance. The attention head is the honest mirror: perfect inside its training length, zero beyond it — the known zero-shot length cliff of softmax attention [17, 16], reproduced at 200K scale.

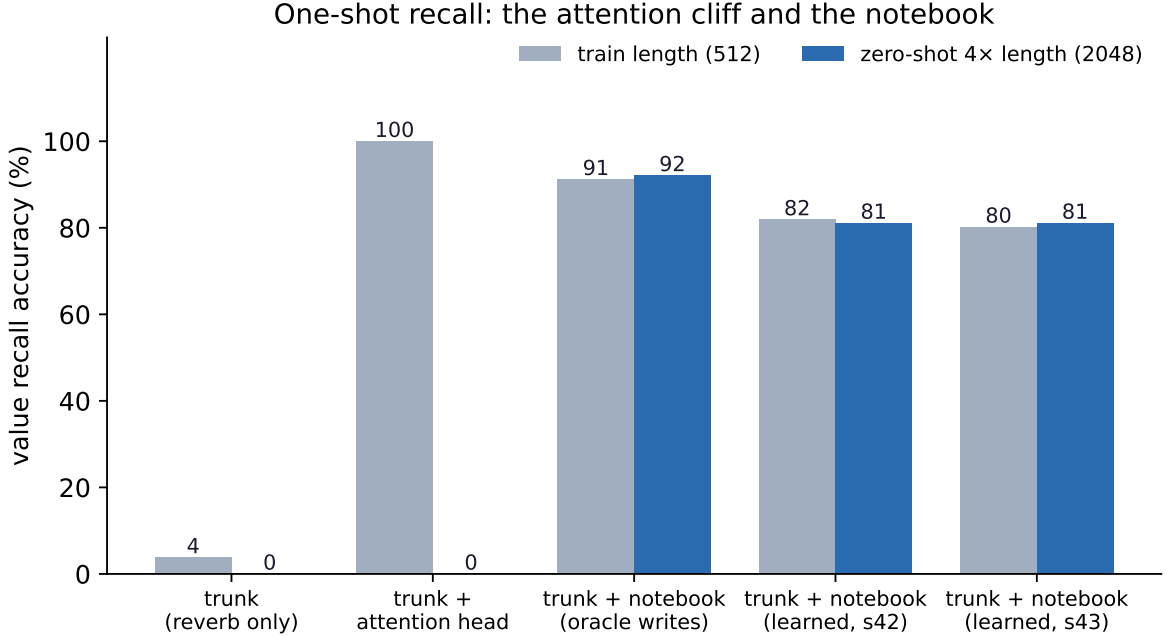


Figure 1: One-shot recall at training length (512) and zero-shot at 4 $\times$ length (2048). The attention head is perfect inside its training length and zero beyond it; the notebook is length-invariant.

3.3 The forensic path (ten rounds, all pre-registered)

We report the route because the failures carry the information:

- **R1 — proof of life.** Delta-rule fast-weight notebook [8] with gates learned from the hidden state: 100% train, 97% zero-shot. First evidence the two-layer design can work at all.
- **R2 — it breaks.** Same design, 4 needles or no markers: total failure (3–4%), and zero-shot at 4 $\times$ collapses to 0% in every multi-needle configuration tested thereafter.
- **R3–R5 — discovery dynamics, and a harness bug.** Longer budgets and curricula: multi-needle *is* learnable (a discrete “click” arrives after 2–6K steps, timing seed-dependent); a construction-order confound (modules built before seeding) was found and fixed — reported because silent RNG-order bugs of this kind can flip qualitative conclusions and rarely get documented.
- **R6 — the archive lesson.** Replacing learned state-keys with fixed content keys (from this group’s earlier HRR work) removes the learning cliff entirely (68% at step 500 vs thousands of dark steps), half-solves salience (no-mark: 4% $\rightarrow$ 53–64%), and exposes a capacity ceiling ($\sim$ 80% at $d = 512$ with indiscriminate writing). Zero-shot: still 0 — the keys were never the leak.
- **R7 — capacity vs gates, 2×2 .** $d = 2048$ lifts training to 96–97% (noise was the plateau); zero-shot still $\sim$ 0; gates computed from a local byte window fail to train at all (3–4%).
- **R8 — oracle round.** Perfect byte-computed write gates, no learning in the gate path: zero-shot **still 0** — the verdict says the leak lives in the memory path. The gate autopsy simultaneously documents the trunk-gate sag (β @needle 0.49 $\rightarrow$ 0.11 at 4 $\times$). Two leaks visible at once; neither is the memory.

- **Local diagnostics (CPU, zero training).** The memory alone — oracle writes, no trunk, no gradient — scores 58–68% *flat* at 512/2048/4096; with a clean write mask, **90.3/89.6%** at 512/2048. Twenty seconds on a laptop settles what three GPU rounds circled: the memory is length-proof; everything else leaks. The ℓ_2 noise-amplification and the 8-byte gate myopia fall out of the same session.
- **R9 — assembly.** Raw self-gating read + 16-byte local gate: local gates train for the first time (85–86%, two seeds; the failure was representational width, not optimization). Zero-shot 0.5% — by elimination (the memory path has one trained scalar), the *trained trunk logits* drift at unseen lengths. The untrained trunk is verified length-stable; training creates the drift.
- **R10 — the cure.** Variable-length training (128–512). Oracle: 91 → 92% (no degradation at 4×); learned gates: 80–82% → 81%, two seeds, flat across distance bins. Verdict: the synthetic arc is complete.

Three separate leaks — gate representational width, read-path noise amplification, trunk logit drift — each invisible while the others were present, each isolated by an oracle or counterfactual rather than by tuning. None of them was the associative memory, which was length-invariant from the day it had content keys.

4 Consequences of the algebra: unlearning and attribution

Because the store is a linear superposition of key–value bindings, two capabilities follow from the arithmetic itself — no retraining, no new parameters, no architectural change. We validate both on the multi-needle rig (5 facts per window, $d_{\text{hrr}} = 2048$, learned write gates, trained as in Section 3), at the training length and zero-shot at 4×.

4.1 Selective unlearning by subtraction

To erase one fact, subtract its writes: recompute the bound vectors of the fact’s span from the input (the keys are fixed and content-derived, so this needs no stored bookkeeping beyond the span itself) and subtract them from the memory vector. One vector subtraction, cost $O(\text{span})$; the other facts are untouched.

	before	erased fact	retained facts	memory-only, erased
$L = 512$ (train)	82.5%	4.3%	84.1%	3.5%
$L = 2048$ (zero-shot)	81.0%	3.1%	84.5%	2.6%

Table 2: Algebraic unlearning (chance = 3.8%). The erased fact drops to chance; the four retained facts are unharmed; the memory-only counterfactual confirms the fact is *absent from the store*, not merely outvoted.

The erased fact falls to chance level while the retained facts are, if anything, marginally cleaner (less superposition crosstalk), and the effect is length-invariant (Table 2). The memory-only read-out at the erased fact’s query is itself at chance: the information is gone from the store, not suppressed downstream. This is forgetting with a guarantee — the mechanism-level primitive that data-deletion obligations (e.g. GDPR’s right to erasure) ask of deployed models and that gradient-trained weights cannot offer without retraining.

4.2 Per-token attribution

The same subtraction, used counterfactually, yields provenance: for each emitted byte, erase each stored fact in turn and measure the drop in the chosen byte’s logit; the fact whose erasure drops it most is the primary source. Component attribution (trunk vs. notebook) falls out of the two-path logit sum for free.

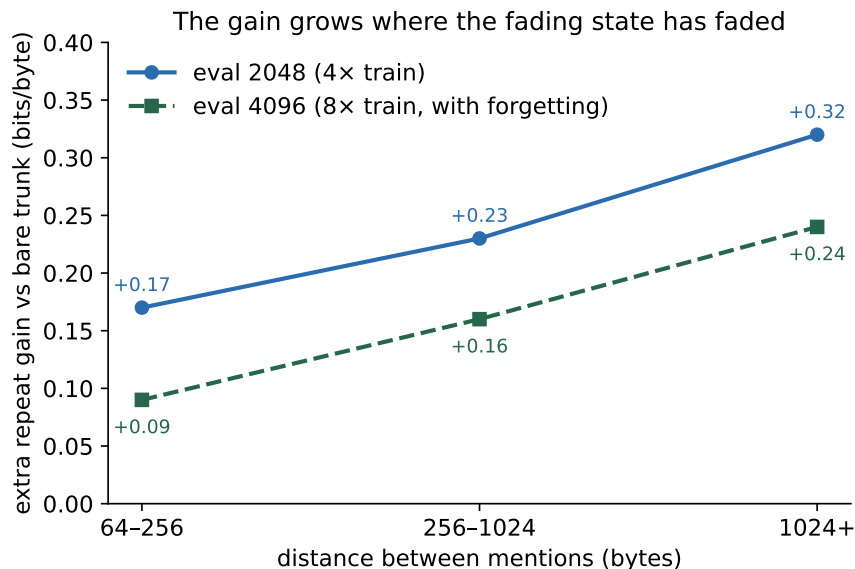


Figure 2: Extra repeat gain vs distance between mentions (WikiText-2 bytes). The notebook’s benefit grows exactly where the fading state has faded, and holds at 4× and 8× the training length.

At both lengths, on bytes the model gets right: **provenance is 100%** — every correct value byte names the fact (and hence the write position) it came from; 96.4/95.2% of correct value bytes are memory-decisive (the trunk alone would not have produced them); the notebook’s interference with ordinary filler prediction is +0.15/+0.03 percentage points (i.e. none). The self-gating margin separates hit from no-hit reads by $4.1\times/3.9\times$ — 93%/87% of the measured oracle ceiling ($4.4\times$), which is set by HRR superposition crosstalk, not by the gate. The model can therefore emit, alongside every byte, a faithful audit line of the form “*notebook, fact #2, written at position 255, logit drop 1.1*” — a property attention heat-maps approximate but do not guarantee [12], and one we exploit again in the unlearning demo above: attribution and erasure are the same subtraction read in two directions.

5 Real text: the repeat probe

5.1 Probe

No marks, no planted needles. On WikiText-2 bytes [18], partition test-window word bytes: a word (alphabetic, ≥ 4 chars) whose same form occurred ≥ 64 bytes earlier in the window is a **repeat**; first occurrences are the control. Report bits/byte on each set, and **extra repeat gain**: $(\text{bpb}_{\text{first}} - \text{bpb}_{\text{repeat}})$ minus the same difference for the bare trunk — what the notebook adds beyond the trunk’s own handling of repetition. Train varlen 128–512; evaluate at 512 and zero-shot 2048/4096.

5.2 Result

Two seeds: extra repeat gain +0.19/+0.15 **at 512**, +0.27/+0.24 **at 2048** — the gain *grows* where the reverb state has faded (Figure 2), which is the two-layer design’s signature prediction. Overall bpb cost: -0.02 (the notebook arm is marginally better overall). The write gate, trained only by the language-modeling loss, discovers salience: $\beta = 0.28$ on repeated-word bytes vs 0.19 elsewhere. The bare trunk’s own repeat “gain” is negative (-0.16): repeated rare words are *harder* than first mentions for a fading state, not easier.

5.3 The one failure, and forgetting

At 4096 ($8\times$ training length) the plain notebook begins to charge rent: first-mention bpb degrades $+0.33$ over the trunk — with $\beta \approx 0.19$ everywhere, thousands of positions fill the store with junk and superposition noise leaks into ordinary prediction. Write-triggered forgetting ($\text{mem} \leftarrow (1 - g\beta) \text{mem} + \beta \cdot \text{write}$, g learned) eliminates the cost entirely ($+0.33 \rightarrow -0.004$) while keeping every distance bin’s gain positive ($+0.09/+0.16/+0.24$ at 4096). The trade is real — near-bin gains shrink (the eraser takes some useful ink too) — and it is near-optimal for this mechanism: with unitary keys, delta-rule targeted erasure reduces algebraically to global decay (flat key spectrum $\Rightarrow$ “erase this key” $\equiv$ “erase everything slightly”), so no smarter eraser exists inside the FFT superposition design.

5.4 Scope: what attention does here

A parameter-matched one-head attention twin, same trunk, same training: on *natural* text its repeat gains are large ($+0.83 \cdots + 1.04$) and — unlike on the needle — hold at 2048 zero-shot. Loose copying over many mentions and soft context matches is attention’s home game, and it generalizes there. The needle collapse is specific to surgical one-shot recall. The claim this paper makes is therefore scoped precisely: **exact recall of once-seen material at $O(L)$ and constant state** — plus the practical note that the attention twin could not even be *evaluated* at 4096 within the same memory budget (its $O(L^2)$ matrices do not fit), while the notebook runs at any length.

6 The wrong habitat: a word-level negative result

Attached to the series’ word-level generation model (Paper 3’s composer: 10K vocabulary, $\sim 3\text{M}$ params), the same recipe — content keys per word, 3-gram bundles, 8-word gate — is largely absorbed: extra repeat gain $+0.07/-0.06$ at the training length (two seeds), $+0.08/+0.13$ at $4\times$ zero-shot, gate selectivity none (β flat at 0.16). Cost, as everywhere: zero.

The explanation is structural, and we consider it a finding rather than a disappointment. Exact-recall memory answers questions that have exact answers. At byte level such questions are everywhere: having seen word, the continuation *erful* is *deterministic given the memory*. At word level the question “which word follows?” almost never has an exact answer — the surrounding words of a repeated mention differ from its first occurrence, so a key built from context matches nothing. The notebook’s habitat is bytes and signals: exactly the levels where this series operates and where tokenized models do not.

7 Scaling: the ladder

The question a scaling reviewer asks: does more data make the trunk absorb the notebook? On the Paper-3 byte ladder (WikiText-103 slices; same model recipe minus the positional table, varlen 64–256; budget-matched arms), at 8/32/128/512 MB (Figure 3):

The value of the notebook **rises monotonically with data** — $64\times$ data, $2.4\times$ gain — at zero-to-negative overall cost on every rung, and the 512 MB point carries a two-seed error bar (± 0.008). The bare trunk’s repeat gain is negative on every rung ($-0.04 \cdots - 0.05$): long-range exact recall does not emerge from data scale in this family; it must be built in. (Sanity: the 32 MB trunk point, 2.01 bpb, reproduces the corresponding Paper-3 ladder point [20].) The parameter-matched attention twin, run on the 512 MB rung, posts a $+0.79$ extra repeat gain — natural-text repetition is its home game, as Section 5.4 scoped — while remaining $O(L^2)$ and unevaluable at 4096 within the same memory budget; the comparison the paper makes is exact recall at $O(L)$, and there the twin scores zero (Section 3).

rung	trunk bpb@256	+nb bpb@256	extra repeat gain @2048 (8×)
8 MB	2.2197	2.2166	+0.064
32 MB	2.0122	2.0041	+0.110
128 MB	1.9652	1.9596	+0.146
512 MB	1.9650	1.9573	+0.156 (seeds 42/43: +0.148/+0.163)

Table 3: The ladder: the notebook’s value rises monotonically with data, at zero-to-negative overall cost on every rung.

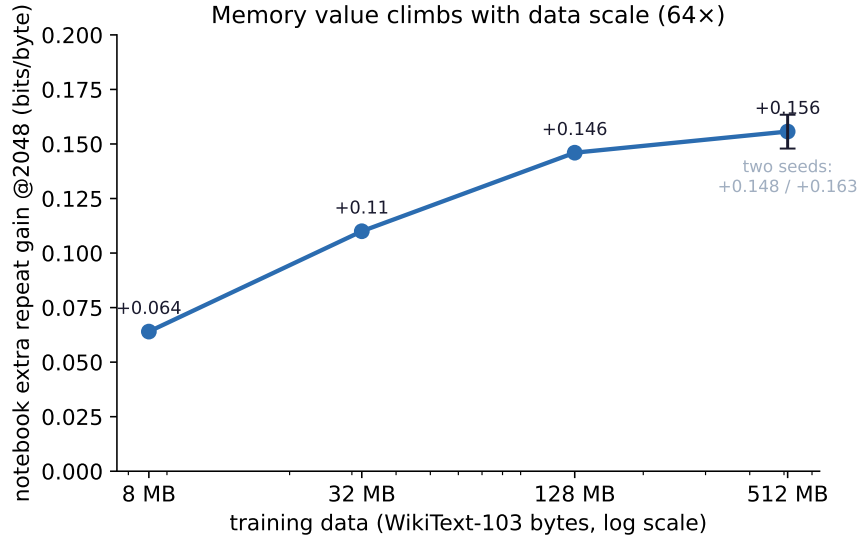


Figure 3: Notebook extra repeat gain at 8× training length vs training data (log axis). 64× data, 2.4× gain; two-seed error bar at the top rung.

8 Related work

State-space and gated-recurrent models (S4 [3], Mamba [4], RWKV [5], Griffin [6]): $O(L)$ trunks with fading state; documented weakness at exact long-range recall; our trunk is architecturally kin and inherits the diagnosis, which the notebook addresses.

Linear attention / fast weight programmers [7, 8, 9]: the delta-rule notebook of Round 1 is this family; the literature’s length-generalization failures match our Rounds 2–5, and the content-key redesign is the departure point.

Explicit memory modules (NTM/DNC [10, 11]; Memorizing Transformers [12]; Titans [13]; memory layers [14]): learned read/write against a separate store, typically with learned keys and/or attention-based addressing. The notebook differs in its fixed, content-derived, provably length-blind addressing and its 25K-parameter budget.

Holographic reduced representations / VSA [1, 2]: the binding/bundling algebra and unitary keys are classical; the contributions here are the learned *when-to-write* under an LM loss, the self-gating raw read, write-triggered forgetting, and the length-invariance measurements in a trained end-to-end model.

Length generalization in transformers (RoPE extensions [15], YaRN [16], ALiBi [17]): an entire engineering literature works around the attention length cliff we reproduce at small scale; the notebook sidesteps rather than patches it, at $O(L)$.

Retrieval-augmented decoding (Paper 3, §5.2 [20]): non-parametric phrase memory at *decode* time; the

notebook is the *train*-time, in-context counterpart. The provenance finding there (own-corpus only) and the habitat finding here (bytes only) are the same lesson at two levels: memory helps where its answers are exact.

9 Limitations

- **Scale.** All results are 0.2–3.4M parameters, ≤ 512 MB data, single GPU. The ladder’s monotonic trend is four points with a two-seed error bar at the top; the compute-optimal regime beyond ~ 0.5 M parameters remains unexplored.
- **Salience without structure.** Un-marked needle detection is half-solved (53–64%); the wide local gate alone does not solve it (4%), and a hybrid local+context gate is future work. On natural text this matters less (the gate finds content words), but structured domains without markers will need it.
- **Attention comparison scope.** The attention twin is one causal head on the same trunk, budget-matched — the honest small mirror, not a tuned modern transformer with rotary extrapolation tricks.
- **Forgetting trades gain for safety.** The eraser costs some near-distance gain; the algebra (unitary keys $\Rightarrow$ no targeted erase) says this is inherent to the superposition design, but alternative store geometries (e.g., slot-based) could reopen it.
- **Word-level absorption** is reported as a boundary of the method, not resolved.

10 Conclusion and the road ahead

Paper 3 ended by naming the fading state’s weakness; this paper removes it without betraying the series’ constraints. A 25K-parameter notebook — fixed holographic content keys, a myopically local learned write gate, a read that gates itself, and forgetting tied to writing rather than to time — gives an attention-free byte model one-shot recall that survives 4–8 $\times$ the training length, pays on real text precisely where the recurrent state fades, costs nothing anywhere, and *appreciates* with data scale. Because the store is algebraic, the model also does two things gradient-trained weights cannot: it forgets on command with a guarantee (one subtraction, one fact, chance-level erasure, no collateral) and it shows its sources (100% per-token provenance by counterfactual erasure). The route mattered as much as the destination: three separate length leaks, none in the memory itself, each found by oracle and counterfactual rather than by search.

The road ahead follows the series’ arc. (1) *Scale*: a compute-optimal pass over the two-layer recipe. (2) *Salience*: hybrid gating for structure-free domains. (3) *Signals*: the notebook’s habitat is raw streams — the natural next flagship is audio and sensor data, where “remember the signature you saw once, however far back, on-device” is not a benchmark but the product. Kathleen reads, writes, and now remembers; next she hears.

Disclosure. The memory mechanism described in this paper (content-keyed holographic superposition with locally learned write gates, raw self-gating readout, and write-triggered forgetting) is the subject of U.S. Provisional Patent Application No. 64/140,260, filed August 25, 2026.

A Recipe card (exact hyperparameters)

Trunk: $d = 96$ (needle rig) / 128 (ladder), 2–3 blocks, multi-scale reverb (fast 0.50–0.90, med 0.90–0.99, slow 0.95–0.9995), causal conv $k = 7$, FFN $\times 2$, dropout 0.1 (text), no positional table. Notebook: $d_{\text{hrr}} = 2048$, content keys $\mathcal{N}(0, I)$ ℓ_2 -normalized (buffer), role keys unitary (7 for bytes, 3 for words), write

gate: $\text{Embedding}(V, 32) \rightarrow \text{causal Conv1d}(32, 32, k=16) \rightarrow \text{GELU} \rightarrow \text{Linear}(32, 1)$, bias init +2; scale init 2000; forget $g = \sigma(g_{\text{logit}}) \cdot 0.2$, g_{logit} init -2; chunked scan, chunk 128–256, keep clamped ≥ 0.75 . Training: AdamW lr $3\text{e-}3$ (rig) / $2\text{e-}3$ (ladder), wd 0.01, clip 1.0, batch 24–64, varlen per batch. Eval: teacher-forced value-byte accuracy (needle); bits/byte with repeat masks (text). Seeds 42/43; all construction after seeding (see R3–R5 harness note).

B Full experiment registry

#	experiment	verdict (pre-registered)	key numbers
1	NEEDLE R1 — delta notebook, state gates	NOTEBOOK	100% train / 97% ZS (\$42)
2	NEEDLE R2 — multi-needle, no-mark	BOTH FAIL	3–4% all hard arms
3	NEEDLE R3 — budget vs curriculum	(confounded; superseded)	harness RNG-order bug found
4	NEEDLE R4 — replication/seed sweep	ROBUST SINGLE	click timing seed-dependent
5	NEEDLE R5 — multi-needle budget/capacity	SLOW CLICK	click at 2–6K steps; ZS 0%
6	NEEDLE R6 — fixed content keys	(threshold artifact)	instant learning; nomark 53–64%; ZS 0
7	NEEDLE R7 — gates $\times$ capacity 2×2	(capacity solved)	2048: 96–97%; local gates dead; ZS ~ 0
8	NEEDLE R8 — oracle gates + autopsy	MEMORY LEAK (superseded)	oracle ZS 0; β sag 0.49 $\rightarrow$ 0.11
9	local diagnostics — untrained memory	(length-proof)	90.3/89.6% @ 512/2048, zero training
10	NEEDLE R9 — raw read + wide local gate	GATE SHORTFALL $\rightarrow$ drift	local gates alive 85–86%; ZS 0.5%
11	NEEDLE R10 — varlen training	CURED	81% ZS learned gates $\times 2$ seeds
12	TEXT 1 — repeat probe WT-2	REAL LICK	extra +0.15–0.27; β 0.28 vs 0.19
13	TEXT 2 — distance bins + attn twin	FADES (scoped)	attn +0.83–1.04 on text; junk cost @4096
14	TEXT 3 — forgetting	CLEAN INK	first-cost +0.33 $\rightarrow$ -0.004
15	UNION — word-level composer	SWALLOWED (structural)	extra $\leq$ +0.13; β flat
16	LADDER — 8/32/128 MB	CLIMBS	+0.064 $\rightarrow$ +0.110 $\rightarrow$ +0.146
17	LADDER-512 — big rung, twin, 2 seeds	CLIMBS TO 512	+0.156 mean; attn +0.79 on text
18	UNLEARN — erase one fact by subtraction	UNLEARNED	erased 4.3/3.1% (chance 3.8); retained 84%
19	ATTRIB — component + fact provenance	ATTRIBUTED	provenance 100%/100%; filler $\Delta \approx 0$

Table 4: Every experiment in the program, with its pre-registered verdict. JSON reports accompany the scripts.

References

- [1] T. A. Plate. Holographic Reduced Representations. *IEEE Transactions on Neural Networks*, 1995.
- [2] P. Kanerva. Hyperdimensional Computing: An Introduction to Computing in Distributed Representation with High-Dimensional Random Vectors. *Cognitive Computation*, 2009.
- [3] A. Gu, K. Goel, C. Ré. Efficiently Modeling Long Sequences with Structured State Spaces. In *ICLR*, 2022.
- [4] A. Gu, T. Dao. Mamba: Linear-Time Sequence Modeling with Selective State Spaces. arXiv:2312.00752, 2023.
- [5] B. Peng et al. RWKV: Reinventing RNNs for the Transformer Era. In *Findings of EMNLP*, 2023.
- [6] S. De et al. Griffin: Mixing Gated Linear Recurrences with Local Attention for Efficient Language Models. arXiv:2402.19427, 2024.
- [7] A. Katharopoulos, A. Vyas, N. Pappas, F. Fleuret. Transformers are RNNs: Fast Autoregressive Transformers with Linear Attention. In *ICML*, 2020.

- [8] I. Schlag, K. Irie, J. Schmidhuber. Linear Transformers are Secretly Fast Weight Programmers. In *ICML*, 2021.
- [9] S. Yang, B. Wang, Y. Zhang, Y. Shen, Y. Kim. Parallelizing Linear Transformers with the Delta Rule over Sequence Length. In *NeurIPS*, 2024.
- [10] A. Graves, G. Wayne, I. Danihelka. Neural Turing Machines. arXiv:1410.5401, 2014.
- [11] A. Graves et al. Hybrid Computing Using a Neural Network with Dynamic External Memory. *Nature*, 2016.
- [12] Y. Wu, M. N. Rabe, D. Hutchins, C. Szegedy. Memorizing Transformers. In *ICLR*, 2022.
- [13] A. Behrouz, P. Zhong, V. Mirrokni. Titans: Learning to Memorize at Test Time. arXiv:2501.00663, 2025.
- [14] V.-P. Berges et al. Memory Layers at Scale. arXiv:2412.09764, 2024.
- [15] J. Su, M. Ahmed, Y. Lu, S. Pan, W. Bo, Y. Liu. RoFormer: Enhanced Transformer with Rotary Position Embedding. *Neurocomputing*, 2024.
- [16] B. Peng, J. Quesnelle, H. Fan, E. Shippole. YaRN: Efficient Context Window Extension of Large Language Models. In *ICLR*, 2024.
- [17] O. Press, N. A. Smith, M. Lewis. Train Short, Test Long: Attention with Linear Biases Enables Input Length Extrapolation. In *ICLR*, 2022.
- [18] S. Merity, C. Xiong, J. Bradbury, R. Socher. Pointer Sentinel Mixture Models. In *ICLR*, 2017.
- [19] G. Fountzoulas. Kathleen: Oscillator-Based Byte-Level Text Classification Without Tokenization or Attention. arXiv:2604.07969, 2026.
- [20] G. Fountzoulas. Kathleen Writes: Autoregressive Generation and Data Scaling Without Attention. arXiv:2608.04678, 2026.